




Test Report	Q181101S007-FCC-R1
Page	41 of 67

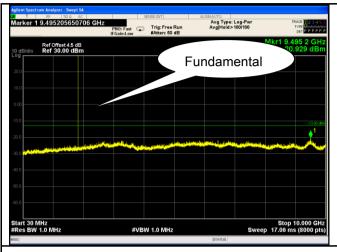


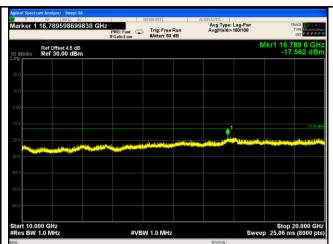


Band II - Low Channel-1

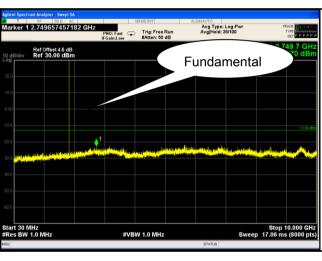

Band II - Low Channel-2

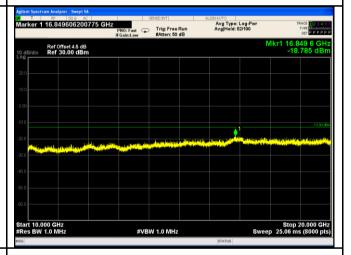

Band II - Middle Channel-1

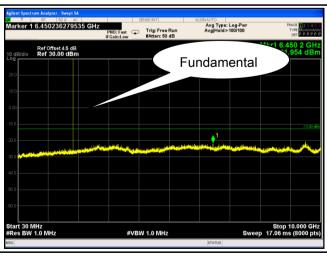

Band II - Middle Channel-2



Band II - High Channel-1


Band II - High Channel-2




Test Report	Q181101S007-FCC-R1
Page	42 of 67


HSUPA:

UMTS-FDD Band V (Part 22H)

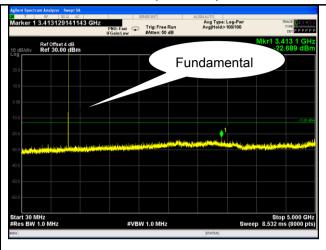


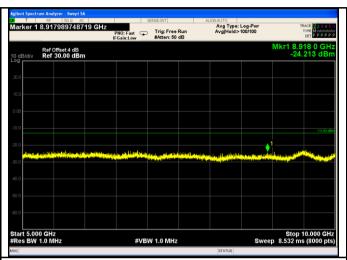


Band V - Low Channel-1

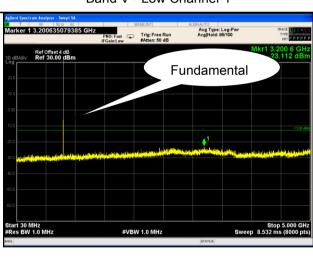


Band V - Low Channel-2

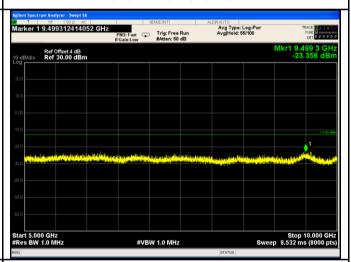

Band V - Middle Channel-1

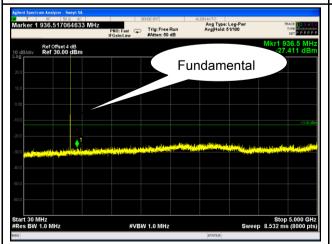

Band V - Middle Channel-2

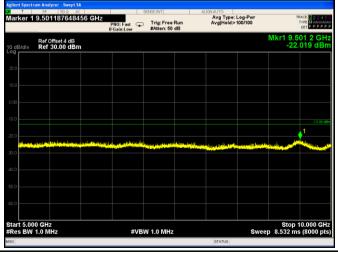



Band V - High Channel-1

Band V - High Channel-2



Test Report	Q181101S007-FCC-R1
Page	43 of 67

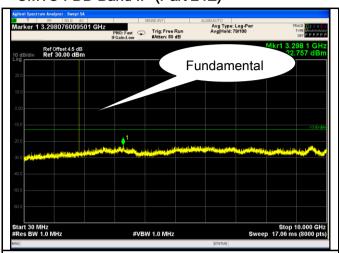

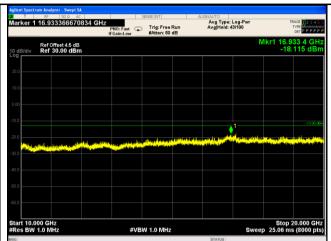

Band II - Low Channel-1

Morker 1 3.310540067508 GHz

Ref Oriset 4.5 dB

Ref 30.00 dBm


Ref 30.00 dBm

Fundamental


Band II - Low Channel-2



Band II - Middle Channel-1

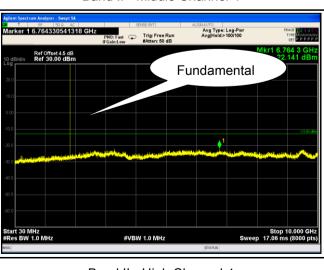

Band II - Middle Channel-2

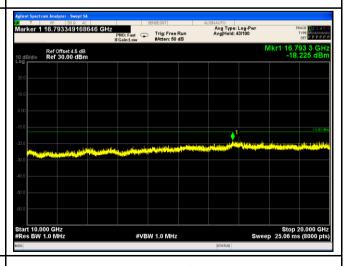

Band II - High Channel-1

Band II - High Channel-2



Test Report	Q181101S007-FCC-R1
Page	44 of 67

6.6 Spurious Radiated Emissions

Temperature	26 °C
Relative Humidity	59%
Atmospheric Pressure	1015mbar
Test date :	December 03, 2018
Tested By :	Aaron Liang

Requirement(s):

Requirement(s):						
Spec	Item Requirement Applicabl					
§2.1053, §22.917 & §24.238	a)	The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.				
Test setup	EUTe Suppo	Turn Table	le			
Test Procedure	 The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution. Sample Calculation: EUT Field Strength = Raw Amplitude (dBµV/m) — Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used) 					



Test Report	Q181101S007-FCC-R1
Page	45 of 67

Remark		
Result	Pass	Fail

Test Data Yes

Test Plot Yes (See below) N/A



Test Report	Q181101S007-FCC-R1
Page	46 of 67

Cellular Band (Part 22H) result

Low channel

Frequency	Antenna Polarization	Corrected Reading	Limit	Margin
(MHz)	(H/V)	(dBm)	(dBm)	(dB)
1648.4	V	-20.62	-13	-7.62
1648.4	Н	-25.09	-13	-12.09
328.9	V	-29.01	-13	-16.01
603.6	Н	-29.14	-13	-16.14

Middle channel

Frequency	Antenna Polarization	Corrected Reading	Limit	Margin
(MHz)	(H/V)	(dBm)	(dBm)	(dB)
1673.2	V	-23.17	-13	-10.17
1673.2	Н	-25.22	-13	-12.22
328.6	V	-29.91	-13	-16.91
603.7	Н	-34.63	-13	-21.63

High channel

Frequency	Antenna Polarization	Corrected Reading	Limit	Margin
(MHz)	(H/V)	(dBm)	(dBm)	(dB)
1697.6	V	-18.28	-13	-5.28
1697.6	Н	-21.2	-13	-8.2
328.1	V	-28.77	-13	-15.77
603.9	Н	-34.5	-13	-21.5

- 1, The testing has been conformed to 10*848.8MHz=8,488MHz
- 2, All other emissions more than 30 dB below the limit
- 3,GSM voice and GPRS mode were investigated. The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.
- 5,, The radiated spurious test above 18GHz is subcontracted to Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch Laboratories and found 30dB below the limit at least.



Test Report	Q181101S007-FCC-R1
Page	47 of 67

PCS Band (Part24E) result

Low channel

Frequency	Antenna Polarization	Corrected Reading	Limit	Margin
(MHz)	(H/V)	(dBm)	(dBm)	(dB)
3700.4	V	-23.64	-13	-10.64
3700.4	Н	-21.03	-13	-8.03
327.8	V	-28.33	-13	-15.33
603.5	Н	-28.18	-13	-15.18

Middle channel

Frequency	Antenna Polarization	Corrected Reading	Limit	Margin
(MHz)	(H/V)	(dBm)	(dBm)	(dB)
3760	V	-23.35	-13	-10.35
3760	Н	-21.36	-13	-8.36
327.6	V	-30.64	-13	-17.64
602.9	Н	-28.38	-13	-15.38

High channel

Frequency	Antenna Polarization	Corrected Reading	Limit	Margin
(MHz)	(H/V)	(dBm)	(dBm)	(dB)
3819.6	V	-27.99	-13	-14.99
3819.6	Н	-26.89	-13	-13.89
327.1	V	-27.4	-13	-14.4
602.8	Н	-25.87	-13	-12.87

- 1, The testing has been conformed to 10*1909.8MHz=19,098MHz
- 2, All other emissions more than 30 dB below the limit
- 3,GSM voice and GPRS mode were investigated. The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.
- 5, The radiated spurious test above 18GHz is subcontracted to Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch Laboratories and found 30dB below the limit at least.



Test Report	Q181101S007-FCC-R1
Page	48 of 67

UMTS-FDD Band V (Part 22H)

Low channel

Frequency	Antenna Polarization	Corrected Reading	Limit	Margin
(MHz)	(H/V)	(dBm)	(dBm)	(dB)
1652.8	V	-21.9	-13	-8.9
1652.8	Н	-23.34	-13	-10.34
328.3	V	-35.05	-13	-22.05
603.7	Н	-27.97	-13	-14.97

Middle channel

Frequency	Antenna Polarization	Corrected Reading	Limit	Margin
(MHz)	(H/V)	(dBm)	(dBm)	(dB)
1670	V	-21.71	-13	-8.71
1670	Н	-24.32	-13	-11.32
328.4	V	-34.78	-13	-21.78
603.8	Н	-26.86	-13	-13.86

High channel

Frequency	Antenna Polarization	Corrected Reading	Limit	Margin
(MHz)	(H/V)	(dBm)	(dBm)	(dB)
1693.2	V	-28.64	-13	-15.64
1693.2	Н	-26.8	-13	-13.8
328.6	V	-26.57	-13	-13.57
603.3	Н	-27.44	-13	-14.44

- 1, The testing has been conformed to 10*846.6MHz=8,466MHz
- 2, All other emissions more than 30 dB below the limit
- 3, RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.
- 5, The radiated spurious test above 18GHz is subcontracted to Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch Laboratories and found 30dB below the limit at least.



Test Report	Q181101S007-FCC-R1
Page	49 of 67

UMTS-FDD Band II (Part 24E)

Low channel

Frequency	Antenna Polarization	Corrected Reading	Limit	Margin
(MHz)	(H/V)	(dBm)	(dBm)	(dB)
3704.8	V	-22.1	-13	-9.1
3704.8	Н	-28.71	-13	-15.71
329.1	V	-32.66	-13	-19.66
602.5	Н	-31.39	-13	-18.39

Middle channel

Frequency (MHz)	Antenna Polarization (H/V)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	V	-26.09	-13	-13.09
3760	Н	-24.77	-13	-11.77
329.6	V	-30.39	-13	-17.39
602.2	Н	-32.66	-13	-19.66

High channel

Frequency	Antenna Polarization	Corrected Reading	Limit	Margin
(MHz)	(H/V)	(dBm)	(dBm)	(dB)
3815.2	V	-28.33	-13	-15.33
3815.2	Н	-20.72	-13	-7.72
329.4	V	-35.23	-13	-22.23
603.8	Н	-34.61	-13	-21.61

- 1, The testing has been conformed to 10*1907.6MHz=19,076MHz
- 2, All other emissions more than 30 dB below the limit
- 3,RMC, HSUPA and HSDPA mode were investigated. The results above show only the worse cases
- 4, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case
- 5, The radiated spurious test above 18GHz is subcontracted to Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch Laboratories and found 30dB below the limit at least.



Test Report	Q181101S007-FCC-R1
Page	50 of 67

6.7 Band Edge

Temperature	26 °C
Relative Humidity	59%
Atmospheric Pressure	1015mbar
Test date :	December 03, 2018
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement	Applicable
§22.917(a) §24.238(a)	a)	The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.	>
Test setup	Ba	EUT Spectrum Analyzer	
Procedure	-	 The EUT was connected to Spectrum Analyzer and Base Station via power divider. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100. 	
Remark			
Result	☑ Pa	ss Fail	

Test Data	Yes	□ _{N/A}
Test Plot	Yes (See below)	□ _{N/A}



Test Report	Q181101S007-FCC-R1
Page	51 of 67

GSM Voice:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.990	-15.835	-13
849.023	-17.728	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.994	-15.603	-13
1910.003	-14.092	-13

GPRS:

Cellular Band (Part 22H) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.996	-15.318	-13
849.024	-15.320	-13

PCS Band (Part24E) result

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.987	-16.232	-13
1910.022	-16.233	-13



Test Report	Q181101S007-FCC-R1
Page	52 of 67

RMC:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.75	-16.110	-13
850.83	-26.931	-13

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.99	-23.362	-13
1910.40	-28.888	-13



Test Report	Q181101S007-FCC-R1
Page	53 of 67

HSDPA:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.51	-21.327	-13
849.02	-26.898	-13

UMTS-FDD Band II (Part 24E)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.98	-22.286	-13
1910.03	-28.177	-13

HSUPA:

UMTS-FDD Band V (Part 22H)

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.99	-20.732	-13
849.01	-25.160	-13


Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.97	-25.568	-13
1910.02	-26.387	-13




Test Report	Q181101S007-FCC-R1
Page	54 of 67

GSM Voice:

Test Plots

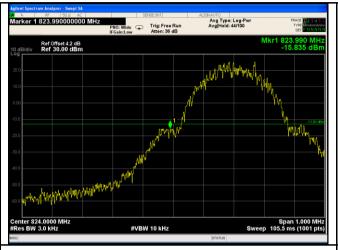

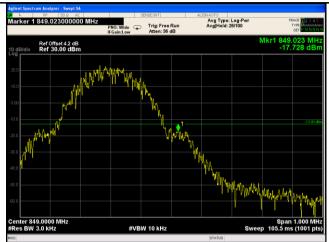

Cellular Band - Low Channel


Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log

(3.17/3)=4.0+0.2=4.2dB

Note: Offset=Cable loss (4.0) + 10log (3.16/3)=4.0+0.2=4.2dB



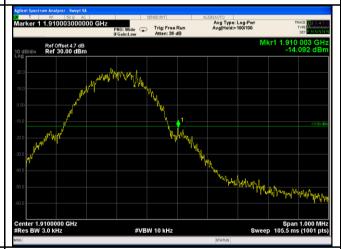

PCS Band - Low Channel

PCS Band - High Channel

Note: Offset=Cable loss (4.0) + 10log

Note: Offset=Cable loss (4.0) + 10log

(3.16/3)=4.5+0.2=4.7dB


(3.17/3)=4.5+0.2=4.7dB



Test Report	Q181101S007-FCC-R1
Page	55 of 67

GPRS:

Test Plots

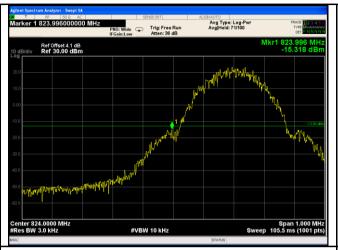




Cellular Band - Low Channel

Cellular Band - High Channel

Note: Offset=Cable loss (4.0) + 10log

(3.18/3)=4.0+0.1=4.1dB

Note: Offset=Cable loss (4.0) + 10log (3.19/3)=4.0+0.1=4.1dB

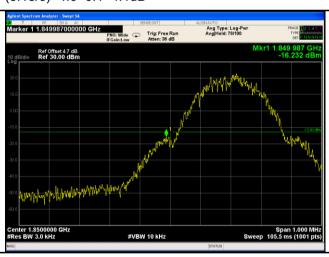



PCS Band - Low Channel

PCS Band - High Channel

Note: Offset=Cable loss (4.5) + 10log

Note: Offset=Cable loss (4.5) + 10log


(3.11/3)=4.5+0.2=4.7dB

(3.17/3)=4.5+0.2=4.7dB



Test Report	Q181101S007-FCC-R1
Page	56 of 67

RMC:

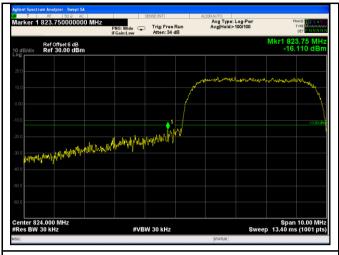



UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log

(47.01/30)=4.0+2.0=6.0 dB

UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log

(46.91/30)=4.0+2.0 =6.0dB





UMTS-FDD Band II - Low Channel

Note: Offset=Cable loss (4.5) + 10log

(46.98 /30)=4.5+2.0 =6.5dB

UMTS-FDD Band II - High Channel


Note: Offset=Cable loss (4.5) + 10log

(47.15/30)=4.5+2.0=6.5dB



Test Report	Q181101S007-FCC-R1
Page	57 of 67

HSDPA:

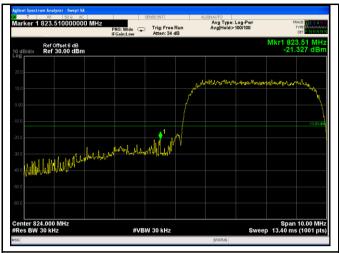



UMTS-FDD Band V - Low Channel


UMTS-FDD Band V - High Channel

Note: Offset=Cable loss (4.0) + 10log

Note: Offset=Cable loss (4.0) + 10log

(46.98 /30)=4.0+2.0=6.0dB

(47.15/30)=4.0+2.0=6.0dB

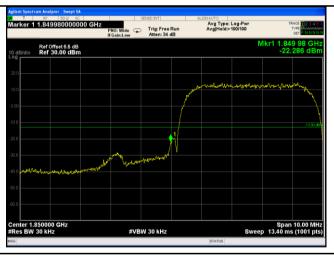



UMTS-FDD Band II - Low Channel

UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log

Note: Offset=Cable loss (4.5) + 10log


(46.95/30)=4.5+2.0=6.5dB

(47.08/30)=4.5+2.0=6.5dB



Test Report	Q181101S007-FCC-R1
Page	58 of 67

HSUPA:

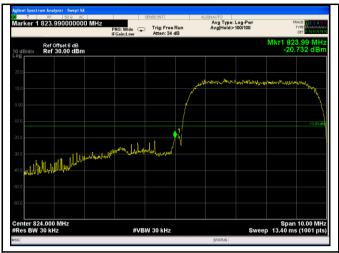



UMTS-FDD Band V - High Channel

UMTS-FDD Band V - Low Channel

Note: Offset=Cable loss (4.0) + 10log

Note: Offset=Cable loss (4.0) + 10log

(46.89/30)=4.0+2.0=6.0 dB

(46.85/30)=4.0+2.0=6.0dB





UMTS-FDD Band II - Low Channel

UMTS-FDD Band II - High Channel

Note: Offset=Cable loss (4.5) + 10log

Note: Offset=Cable loss (4.5) + 10log

(47.14/30)=4.5+2.0=6.5dB

(47.02/30)=4.5+2.0=6.5dB



Test Report	Q181101S007-FCC-R1
Page	59 of 67

6.8 Frequency Stability

Temperature	26 °C
Relative Humidity	59%
Atmospheric Pressure	1015mbar
Test date :	December 03, 2018
Tested By :	Aaron Liang

Requirement(s):

Spec	Item	Requirement				Applicable
		According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below: Frequency Tolerance for Transmitters in the Public Mobile Services				
		Frequency	Base,	Mobile ≥ 3	Mobile ≤ 3	
		Range	fixed	watts	watts	
§2.1055,		(MHz)	(ppm)	(ppm)	(ppm)	_
§22.355 &	a)	25 to 50 50 to 450	20.0 5.0	20.0 5.0	50.0	~
§24.235		45 □to 512	2.5	5.0		
		821 to 896	1.5	2.5	2.5	
		928 to 929	5.0	N/A	N/A	
		929 to 960.	1.5	N/A	N/A	
		2110 to 2220	10.0	N/A	N/A	
		According to §24.2	35, the frequ	lency stability shal	l be sufficient to	
		ensure that the fun	damental en	nissions stay withi	n the authorized	
		frequency block.				
Test setup	Base Station Thermal Chamber					



Test Report	Q181101S007-FCC-R1
Page	60 of 67

	A communication link was established between EUT and base station. The				
	frequency error was monitored and measured by base station under variation				
Procedure	of ambient temperature and variation of primary supply voltage.				
	Limit: The frequency stability of the transmitter shall be maintained within				
	±0.00025% (±2.5ppm) of the center frequency.				
Remark					
Result	Pass Fail				
Test Data	Yes N/A				
Test Plot	Yes (See below) N/A				



Test Report	Q181101S007-FCC-R1
Page	61 of 67

GSM Voice:

Cellular Band (Part 22H) result

	Middle Channel, f _o = 836.6 MHz			
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10		14	0.0167	2.5
0		13	0.0155	2.5
10		17	0.0203	2.5
20	2.7	14	0.0167	2.5
30	3.7	11	0.0131	2.5
40		9	0.0108	2.5
50		17	0.0203	2.5
55		14	0.0167	2.5
25	4.2	17	0.0203	2.5
25	3.2	16	0.0191	2.5

PCS Band (Part 24E) result

	Middle Channel, f₀ = 1880 MHz			
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10		13	0.0069	2.5
0		14	0.0074	2.5
10		11	0.0059	2.5
20		14	0.0074	2.5
30	3.7	13	0.0069	2.5
40		15	0.0080	2.5
50		16	0.0085	2.5
55		19	0.0101	2.5
25	4.2	17	0.0090	2.5
25	3.2	19	0.0101	2.5



Test Report	Q181101S007-FCC-R1
Page	62 of 67

RMC:

UMTS-FDD Band V (Part 22H)

	Middle Channel, f _o = 835 MHz			
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10		21	0.0251	2.5
0		18	0.0216	2.5
10		16	0.0192	2.5
20	2.7	17	0.0204	2.5
30	3.7	17	0.0204	2.5
40		16	0.0192	2.5
50		18	0.0216	2.5
55		18	0.0216	2.5
25	4.2	21	0.0251	2.5
25	3.2	18	0.0216	2.5

	OWITO-I DD Baild II (I art 242)			
	Middle Channel, f₀ = 1880 MHz			
Temperature (°C)	Power Supplied (V _{DC})	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10		22	0.0117	2.5
0		14	0.0074	2.5
10		16	0.0085	2.5
20	3.7	17	0.0090	2.5
30	3.7	15	0.0080	2.5
40		15	0.0080	2.5
50		18	0.0096	2.5
55		19	0.0101	2.5
25	4.2	20	0.0106	2.5
25	3.2	20	0.0106	2.5



Test Report	Q181101S007-FCC-R1
Page	63 of 67

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due
EMI test receiver	ESL6	100262	01/05/2018	01/04/2019
Active Antenna	AL-130	121031	02/08/2018	02/07/2019
3m Semi-anechoic Chamber	9m*6m*6m	N/A	10/18/2018	10/17/2019
Signal Amplifier	8447E	443008	01/25/2018	01/24/2019
MXA signal analyzer	N9020A	MY49100060	01/05/2018	01/04/2019
Horn Antenna	HAH-118	71259	01/26/2018	01/25/2019
Horn Antenna	HAH-118	71283	02/02/2018	02/01/2019
AMPLIFIER	EM01G26G	60613	01/25/2018	01/24/2019
AMPLIFIER	Emc012645	980077	01/05/2018	01/04/2019
Bilog Antenna (30MHz~6GHz)	JB6	A110712	02/08/2018	02/07/2019
DC Power Supply	E3640A	MY40004013	01/05/2018	01/04/2019
MXA Signal Analyzer	N9020A	MY49100060	01/05/2018	01/04/2019
MXG Vector Signal Generator	N5182A	MY50140530	01/05/2018	01/04/2019
Series Signal Generator	E4421B	US40051152	05/12/2018	05/11/2019
RF control unit	JS0806- 0806-2	188060112	04/25/2018	04/24/2019
Wireless Connectivity Tester	CMW270	1201.0002K75- 101601-PE	04/25/2018	04/24/2019



Test Report	Q181101S007-FCC-R1
Page	64 of 67

Universal Radio Communication Tester	CMU200	121393	01/05/2018	01/04/2019
Programmable Temperature &Humidity Chamber	HYL-TH- 225DH	DG-180746	07/16/2018	07/15/2019




Test Report	Q181101S007-FCC-R1	
Page	65 of 67	

Annex B. TEST SETUP AND SUPPORTING EQUIPMENT

Annex B.i. TEST SET UP BLOCK

Block Configuration Diagram for Radiated Emissions

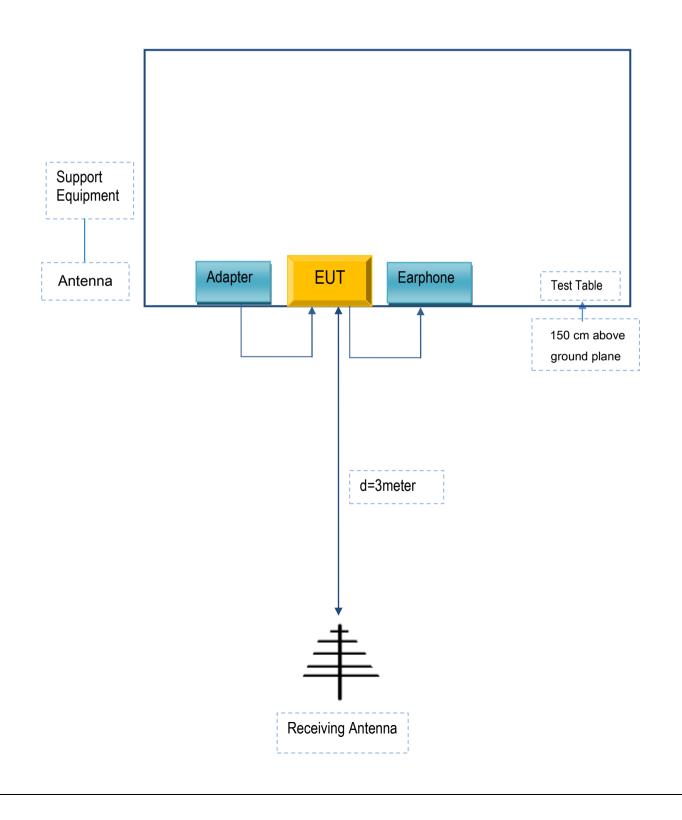



Test Report	Q181101S007-FCC-R1	
Page	66 of 67	

Annex C. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Cedar Kingdom Corporation Limited	Adapter	VT701	N/A
Cedar Kingdom Corporation Limited	Earphone	VT701	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A



Test Report	Q181101S007-FCC-R1
Page	67 of 67

Annex C. User Manual / Block Diagram / Schematics / Partlist/ DECLARATION OF SIMILARITY

Please see the attachment