



TEST REPORT

FCC ID: 2AKRP-BVS-ZR215

For

SHENZHEN BVSION TECHNOLOGY CO.,LTD

All in one PCS

Model No. : See in Annex I and Annex II.

Trade Name : N/A

Prepared for : SHENZHEN BVSION TECHNOLOGY CO.,LTD
Address : Floor 4, Buliding A, Hongqiao Industry Park, No. 547, Nanhuan Road,
Shajing, Baoan, Shenzhen, China, 518104

Prepared by : Shenzhen Alpha Product Testing Co., Ltd.
Address : Building B, East Area of Nanchang Second, Industrial Zone, Gushu
2nd Road, Bao'an, Shenzhen, China

Report No. : T1862248 07

Date of Receipt : November 09, 2016

Date of Test : November 09-December 17, 2016

Date of Report : December 17, 2016

Version Number : REV0

TABLE OF CONTENT

Description	Page
1. General Information-----	5
1.1 Description of Device (EUT) -----	5
1.2 Description of Test Facility -----	6
2 EMC Equipment List-----	6
3 Test Procedure -----	7
4 Summary of Measurement -----	8
4.1 Summary of test result -----	8
4.2 Test connection -----	8
4.3 Assistant equipment used for test -----	9
4.4 Test mode -----	9
4.5 Channel list -----	9
4.6 Test Conditions -----	10
4.7 Measurement Uncertainty (95% confidence levels, k=2) -----	10
5 Spurious Emission -----	11
5.1 Radiation Emission -----	11
5.1.1 Radiation Emission Limits(15.209) -----	11
5.1.2 Test Setup -----	11
5.1.3 Test Procedure -----	13
5.1.4 Test Equipment Setting For emission test Result -----	13
5.1.5 Test Condition -----	14
5.1.6 Test Result -----	14
6 POWER LINE CONDUCTED EMISSION -----	29
6.1 Conducted Emission Limits(15.207) -----	29
6.2 Test Setup -----	29
6.3 Test Procedure -----	30
6.4 Test Results -----	30
7 Conducted Maximum Output Power -----	33
7.1 Test limit -----	33
7.2 Test Procedure -----	33
7.3 Test Setup -----	33
7.4 Test Results -----	33
8 PEAK POWER SPECTRAL DENSITY -----	35
8.1 Test limit -----	35
8.2 Method of measurement -----	35
8.3 Test Setup -----	35
8.4 Test Results -----	36
9 Bandwidth -----	43
9.1 Test limit -----	43
9.2 Method of measurement -----	43
9.3 Test Setup -----	43
9.4 Test Results -----	43
10 Band Edge Check -----	51

10.1	Test limit-----	51
10.2	Test Procedure -----	51
10.3	Test Setup -----	51
10.4	Test Result-----	51
11	Antenna Requirement -----	64
11.1	Standard Requirement -----	64
11.2	Antenna Connected Construction -----	64
11.3	Result -----	64
12	Photographs of Test Setup -----	65
12.1	Photos of Conducted Emission test -----	65
12.2	Photos of Radiated emission-----	65
13	Photographs of EUT -----	67

DECLARATION

Applicant : SHENZHEN BVSION TECHNOLOGY CO.,LTD

Manufacturer : SHENZHEN BVSION TECHNOLOGY CO.,LTD

Product : All in one PCS

(A)Model No. : See in Annex I and Annex II.

(B)Trade Name : N/A

(C)Power supply : DC 12V From Adapter with AC 120V/60Hz

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.247: 2016,
ANSI C63.4:2014 ; ANSI C63.10:2013


The device described above is tested by Shenzhen Alpha Product Testing Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits both conducted and radiated emissions. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.


Tested by (name + signature).....:

Reak Yang
Test Engineer



Approved by (name + signature).....:

Simple Guan
Project Manager



Date of issue.....

December 17, 2016

1. General Information

1.1 Description of Device (EUT)

Trade Name	: N/A
EUT	: All in one PCS
Model No.	See in Annex I and Annex II.
DIFF.	: There is no difference between all the models, except the appearance and model name, so this report performs the model BVS-ZR215.
Antenna Type	: PCB Antenna, Maximum Gain 0dBi for WLAN
Operation Frequency	IEEE 802.11b/g: 2412MHz-2462MHz IEEE 802.11n HT20: 2412MHz-2462MHz IEEE 802.11n HT40: 2422MHz-2452MHz IEEE 802.11b/g: 11 Channels
Channel number	IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK)
Modulation type	IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n :OFDM(64QAM, 16QAM, QPSK, BPSK)
Power Supply	: DC 12V From Adapter with AC 120V/60Hz
Software version	N/A
Hardware version	Ver 4.1
Applicant	: SHENZHEN BVSION TECHNOLOGY CO.,LTD
Address	: Floor 4, Buliding A, Hongqiao Industry Park, No. 547, Nanhuan Road, Shajing, Baoan, Shenzhen, China, 518104
Manufacture	: SHENZHEN BVSION TECHNOLOGY CO.,LTD
Address	: Floor 4, Buliding A, Hongqiao Industry Park, No. 547, Nanhuan Road, Shajing, Baoan, Shenzhen, China, 518104
Adapter	: Input: AC100-240V, 1.0A, 50/60Hz Output: DC 12V/3.0A Model:ZL-D036WB1203000

1.2 Description of Test Facility

Shenzhen Alpha Product Testing Co., Ltd
Building B, East Area of Nanchang Second, Industrial Zone, Gushu 2nd Road,
Bao'an, Shenzhen, China

March 25, 2015 File on Federal Communication Commission
Registration Number: 203110

July 18, 2014 Certificated by IC
Registration Number: 12135A

2 EMC Equipment List

Equipment	Manufacture	Model No.	Serial No.	Due cal.	Cal Interval
3m Semi-Anechoic	ETS-LINDGREN	N/A	SEL0017	2017.01.16	1Year
Spectrum analyzer	Agilent	E4407B	MY46185649	2017.01.16	1Year
Receiver	R&S	ESCI	1166.5950K03-1011	2017.01.16	1Year
Receiver	R&S	ESCI	101202	2017.01.16	1Year
Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2018.01.18	2Year
Horn Antenna	EMCO	3115	640201028-06	2018.01.18	2Year
Active Loop Antenna	Beijing Daze	ZN30900A	SEL0097	2018.01.18	2Year
Cable	Resenberger	N/A	No.1	2017.01.16	1Year
Cable	SCHWARZBECK	N/A	No.2	2017.01.16	1Year
Cable	SCHWARZBECK	N/A	No.3	2017.01.16	1Year
Pre-amplifier	Schwarzbeck	BBV9743	9743-019	2017.01.16	1Year
Pre-amplifier	R&S	AFS33-18002650-30-8P-44	SEL0080	2017.01.16	1Year
Base station	Agilent	E5515C	GB44300243	2017.01.16	1 Year
Temperature controller	Terchy	MHQ	120	2017.01.16	1Year

Power divider	Anritsu	K240C	020346	2017.01.16	1 Year
Signal Generator	HP	83732B	VS3449051	2017.01.16	1 Year
Power Meter	Anritsu	ML2487A	6K00001491	2017.01.16	1Year
Power sensor	Anritsu	ML2491A	32516	2017.01.16	1Year
L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	2017.01.16	1Year
L.I.S.N.#2	ROHDE&SCHWARZ	ENV216	101043	2017.01.16	1 Year

3 Test Procedure

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard ANSI C63.4:2014 using a 50 μ H LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25°C with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard ANSI C63.4:2014 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3MHz above 1 GHz. The ambient temperature of the EUT was 25°C with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF + CABLE = FS

33.20 dBuV + 10.36 dB + 0.9 dB= 44.46 dBuV/m @ 3m

ANSI STANDARD ANSI C63.4:2014 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes. The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard ANSI C63.4:2014 10.1.7 with the EUT 40 cm from the vertical ground wall.


4 Summary of Measurement

4.1 Summary of test result

Test Item	Test Requirement	Standards Paragraph	Result
Spurious Emission	FCC PART 15:2015	Section 15.247&15.209	Compliance
Conduction Emission	FCC PART 15:2015	Section 15.207	Compliance
Bandwidth Test	FCC PART 15:2015	Section 15.247	Compliance
Peak Power	FCC PART 15:2015	Section 15.247	Compliance
Power Density	FCC PART 15:2015	Section 15.247	Compliance
Band Edge	FCC PART 15:2015	Section 15.247 Section 5.5	Compliance
Antenna Requirement	FCC PART 15:2015	Section 15.203	Compliance

Note: The EUT has been tested as an independent unit. And Continual Transmitting in maximum power (The adapter be used during Test)

4.2 Test connection



4.3 Assistant equipment used for test

Description	:	Adapter
Manufacturer	:	UPRITE
Model No.	:	ZL-D036WB1203000

4.4 Test mode

Dutycycle :100% Keeping TX			
Mode	data rate (Mbps)(see Note)	Channel	Frequency (MHz)
IEEE 802.11b	1	Low :CH1	2412
	1	Middle: CH6	2437
	1	High: CH11	2462
IEEE 802.11g	6	Low :CH1	2412
	6	Middle: CH6	2437
	6	High: CH11	2462
IEEE 802.11 n/HT20 with 2.4G	6.5	Low :CH1	2412
	6.5	Middle: CH6	2437
	6.5	High: CH11	2462
IEEE 802.11 n/HT40 with 2.4G	13.5	Low :CH3	2422
	13.5	Middle:CH6	2437
	13.5	High:CH9	2452

4.5 Channel list

For IEEE 802.11b/g and IEEE 802.11n/HT20 with 2.4G					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	2412	CH5	2432	CH9	2452
CH2	2417	CH6	2437	CH10	2457
CH3	2422	CH7	2442	CH11	2462
CH4	2427	CH8	2447		

For IEEE 802.11n/HT40 with 2.4G					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH1	/	CH5	2432	CH9	2452
CH2	/	CH6	2437	/	/
CH3	2422	CH7	2442	/	/
CH4	2427	CH8	2447	/	/

4.6 Test Conditions

Temperature range	21-25°C
Humidity range	40-75%
Pressure range	86-106kPa

4.7 Measurement Uncertainty (95% confidence levels, k=2)

Item	MU	Remark
Uncertainty for Conducted Emissions Test	2.71dB	
Uncertainty for Radiation Emission test in 3m chamber (30MHz to 1GHz)	3.90 dB	Polarize: V
	3.92dB	Polarize: H
Uncertainty for Radiation Emission test in 3m chamber (1GHz to 25GHz)	4.26 dB	Polarize: H
	4.28 dB	Polarize: V
Uncertainty for conducted RF Power	0.16dB	

5 Spurious Emission

5.1 Radiation Emission

5.1.1 Radiation Emission Limits(15.209)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

NOTE:


- a) The tighter limit applies at the band edges.
- b) $\text{Emission Level(dB uV/m)} = 20 \log \text{Emission Level(uv/m)}$

5.1.2 Test Setup


See the next page

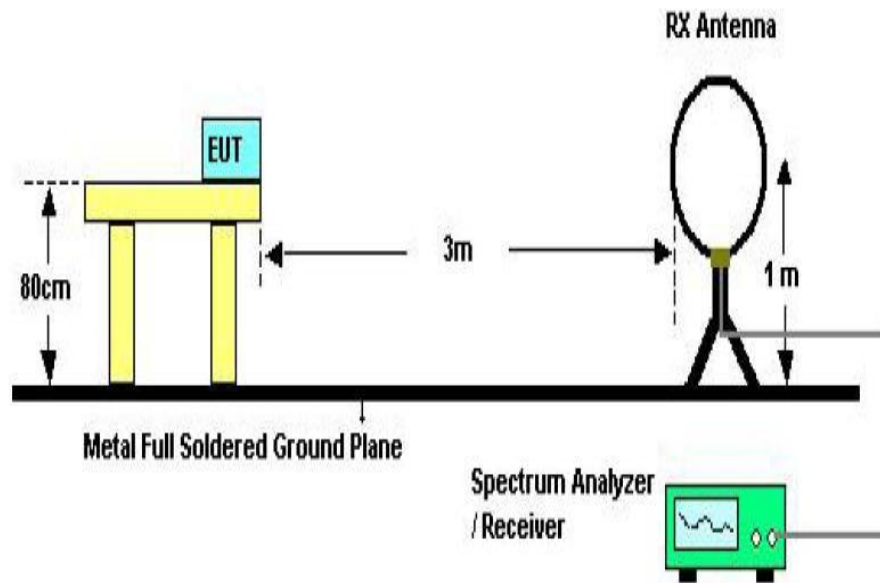

Below 30MHz Test Setup

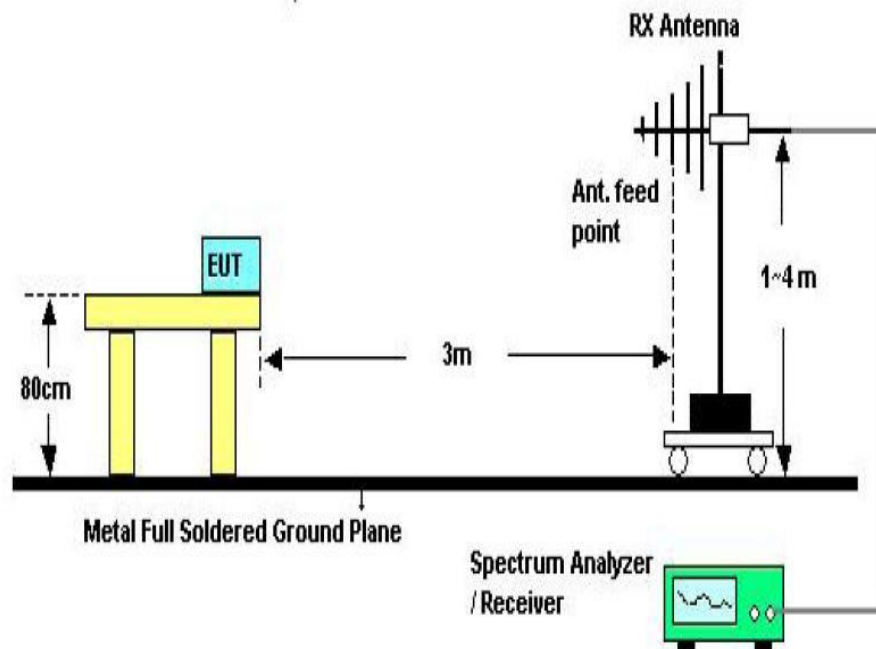

Above 30MHz Test Setup

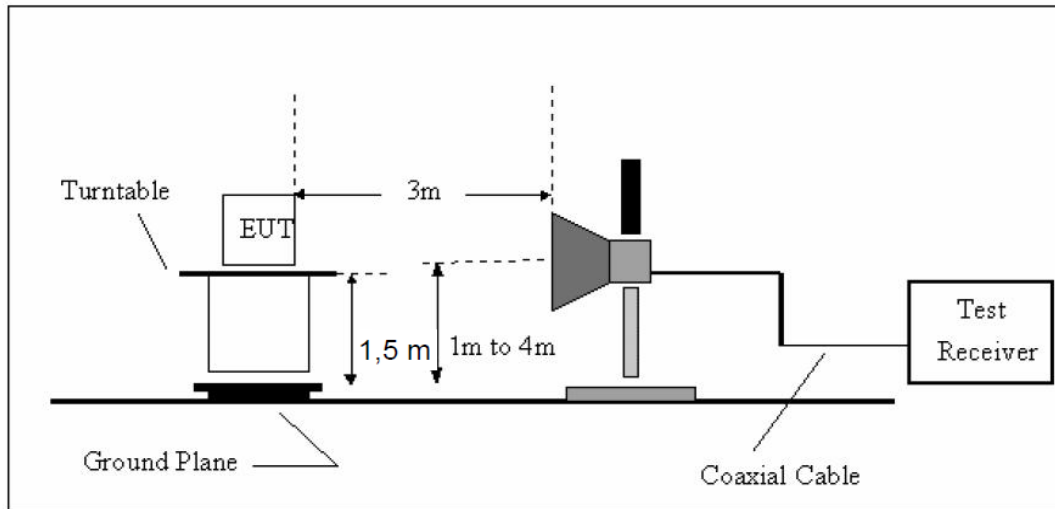

Above 1GHz Test Setup

5.1.3 Test Procedure

- The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1GHz, The EUT was placed on a rotating 0.8 m high above ground for below 1GHz and 1.5m high for above 1GHz testing, The table was rotated 360 degrees to determine the position of the highest radiation
- The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set of make measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer Peak detector mode pre-scanning the measurement frequency range. Significant Peaks are then marked. and then Qusia Peak Detector mode premeasured
- If Peak value comply with QP limit Below 1GHz. The EUT deemed to comply with QP limit. But the Peak value and average value both need to comply with applicable limit above 1GHz.
- For the actual test configuration, please see the test setup photo.

5.1.4 Test Equipment Setting For emission test Result

9KHz~150KHz	RBW 200Hz	VBW 1KHz
150KHz~30MHz	RBW 9KHz	VBW 30KHz
30MHz~1GHz	RBW 120KHz	VBW 300KHz
Above 1GHz	RBW 1MHz	VBW 3MHz

5.1.5 Test Condition

Continual Transmitting in maximum power.

5.1.6 Test Result

TX MODE

All modes have been tested , and only worse case of 802.11 b mode is reported only.


We have scanned the 10th harmonic from 9KHz to the EUT's highest frequency.

Detailed information please see the following page.


From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11b :
H:

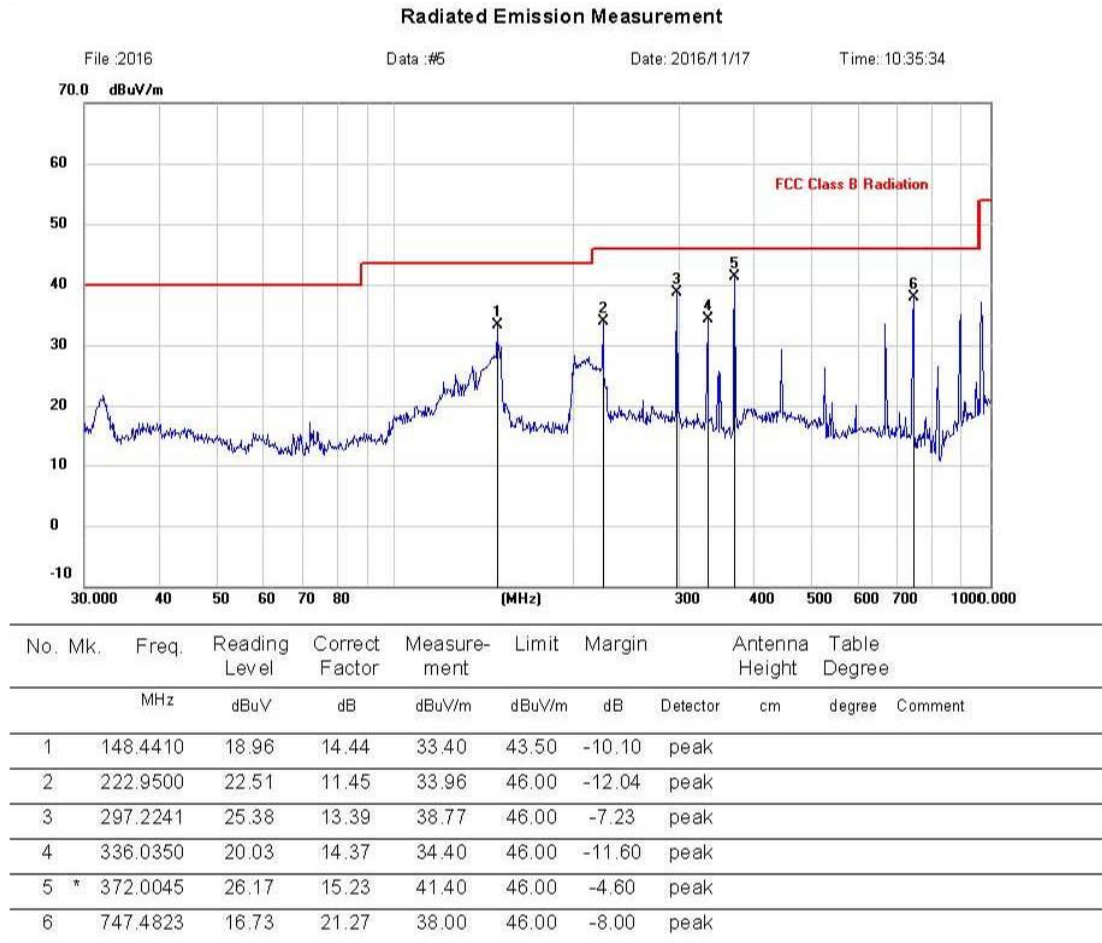

V:

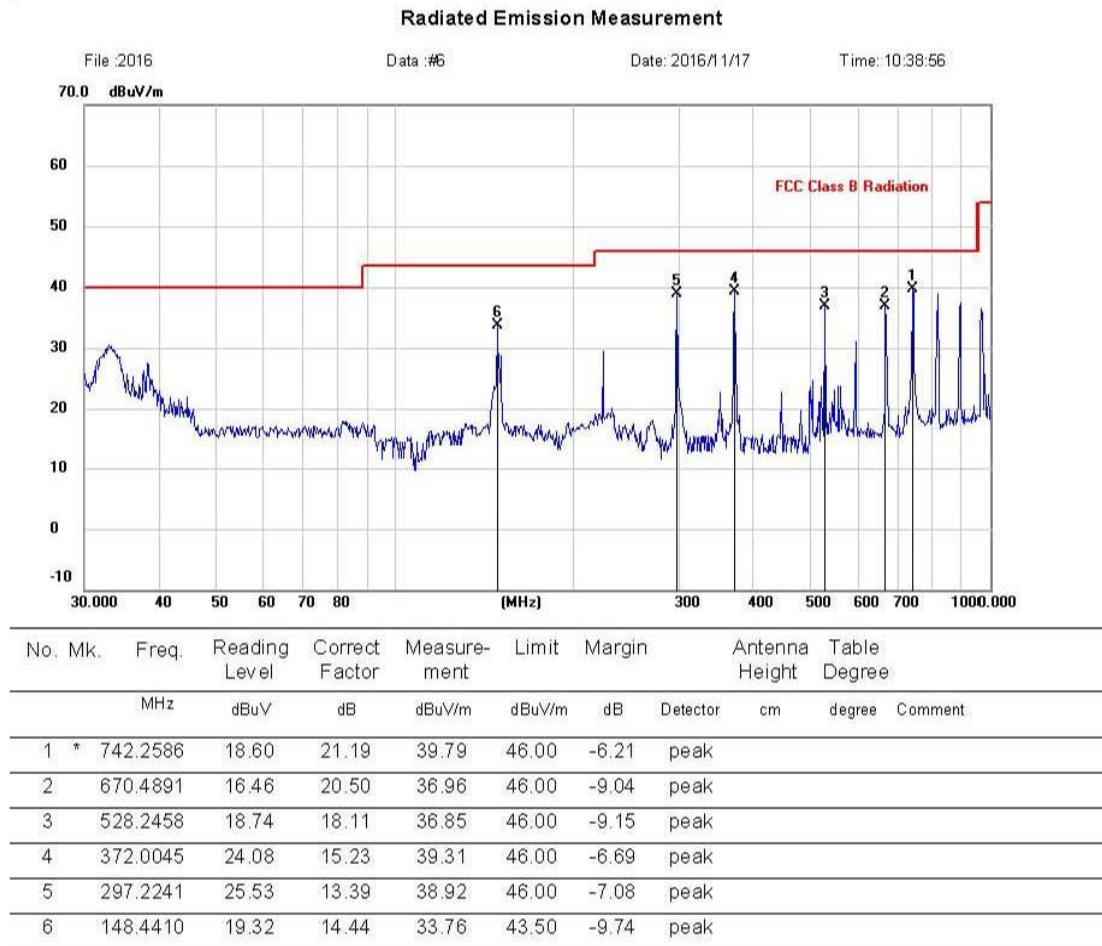

Notes: Above is below 1GHz test data. This report only shall the worst case mode 802.11b for TX 2412MHz.

From 1G-25GHz

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Low		

IEEE 802.11b :

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1103	V	45.57	---	-11.24	34.33	---	74	54	39.67	Peak
4824	V	39.16	---	0.64	39.8	---	74	54	34.2	Peak
N/A										

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1103	H	44.21	---	-11.24	32.97	---	74	54	41.03	Peak
4824	H	37.8	---	0.64	38.44	---	74	54	35.56	Peak
N/A										

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1103	V	43.73	---	-11.24	32.49	---	74	54	41.51	Peak
4874	V	38.5	---	0.76	39.26	---	74	54	34.74	Peak

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1103	H	44.91	---	-11.24	33.67	---	74	54	40.33	Peak
4874	H	38.61	---	0.76	39.37	---	74	54	34.63	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1103	V	43.45	---	-11.24	32.21	---	74	54	41.79	Peak
4924	V	37.35	---	0.87	38.22	---	74	54	35.78	Peak

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1103	H	44.12	---	-11.24	32.88	---	74	54	41.12	Peak
4924	H	36.38	---	0.87	37.25	---	74	54	36.75	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

IEEE 802.11 g:

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1145	V	44.62	---	-11.24	33.38	---	74	54	40.62	Peak
2586	V	45.71	---	-7.13	38.58	---	74	54	35.42	Peak
3062	V	45.32	---	-5.74	39.58	---	74	54	34.42	Peak
4824	V	41.48	---	0.64	42.12	---	74	54	31.88	Peak
N/A										

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1294	H	44.12	---	-10.96	33.16	---	74	54	40.84	Peak
2038	H	44.31	---	-8.58	35.73	---	74	54	38.27	Peak
3483	H	43.02	---	-4.95	38.07	---	74	54	35.93	Peak
4824	H	41.25	---	0.64	41.89	---	74	54	32.11	Peak
N/A										

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1374	V	44.3	---	-10.43	33.87	---	74	54	40.13	Peak
2589	V	44.71	---	-7.13	37.58	---	74	54	36.42	Peak
3365	V	44.17	---	-5.18	38.99	---	74	54	35.01	Peak
4874	V	41.81	---	0.76	42.57	---	74	54	31.43	Peak

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1321	H	43.56	---	-10.84	32.72	---	74	54	41.28	Peak
2314	H	44.87	---	-7.46	37.41	---	74	54	36.59	Peak
3577	H	43.51	---	-4.76	38.75	---	74	54	35.25	Peak
4874	H	40.82	---	0.76	41.58	---	74	54	32.42	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1302	V	44.88	---	-10.84	34.04	---	74	54	39.96	Peak
2982	V	44.62	---	-5.86	38.76	---	74	54	35.24	Peak
3831	V	43.91	---	-3.96	39.95	---	74	54	34.05	Peak
4924	V	40.71	---	0.87	41.58	---	74	54	32.42	Peak

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1446	H	44.37	---	-10.29	34.08	---	74	54	39.92	Peak
2198	H	45.13	---	-8.24	36.89	---	74	54	37.11	Peak
3905	H	44.36	---	-3.68	40.68	---	74	54	33.32	Peak
4924	H	41.31	---	0.87	42.18	---	74	54	31.82	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

IEEE 802.11n/HT20 with 2.4G

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1492	V	44.77	---	-10.27	34.5	---	74	54	39.5	Peak
2671	V	45.12	---	-6.94	38.18	---	74	54	35.82	Peak
3948	V	44.72	---	-3.68	41.04	---	74	54	32.96	Peak
4824	V	40.26	---	0.64	40.9	---	74	54	33.1	Peak
N/A										

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1451	H	44.3	---	-10.27	34.03	---	74	54	39.97	Peak
2839	H	44.92	---	-6.17	38.75	---	74	54	35.25	Peak
3607	H	42.53	---	-4.52	38.01	---	74	54	35.99	Peak
4824	H	40.61	---	0.64	41.25	---	74	54	32.75	Peak
N/A										

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1262	V	44.02	---	-10.96	33.06	---	74	54	40.94	Peak
2013	V	44.46	---	-8.58	35.88	---	74	54	38.12	Peak
3798	V	42.7	---	-4.07	38.63	---	74	54	35.37	Peak
4874	V	39.82	---	0.76	40.58	---	74	54	33.42	Peak

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1511	H	44.01	---	-10.14	33.87	---	74	54	40.13	Peak
2353	H	45.15	---	-7.59	37.56	---	74	54	36.44	Peak
3266	H	43.3	---	-5.39	37.91	---	74	54	36.09	Peak
4874	H	40.27	---	0.76	41.03	---	74	54	32.97	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1477	V	44.28	---	-10.27	34.01	---	74	54	39.99	Peak
2703	V	44.52	---	-6.43	38.09	---	74	54	35.91	Peak
3561	V	44.36	---	-4.76	39.6	---	74	54	34.4	Peak
4924	V	40.55	---	0.87	41.42	---	74	54	32.58	Peak

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1503	H	42.9	---	-10.14	32.76	---	74	54	41.24	Peak
3588	H	44.22	---	-4.96	39.26	---	74	54	34.74	Peak
4153	H	43.06	---	-2.48	40.58	---	74	54	33.42	Peak
4924	H	40.06	---	0.87	40.93	---	74	54	33.07	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

IEEE 802.11n/HT40 with 2.4G

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1551	V	44.35	---	-10.07	34.28	---	74	54	39.72	Peak
2695	V	44.48	---	-6.94	37.54	---	74	54	36.46	Peak
3463	V	42.92	---	-4.95	37.97	---	74	54	36.03	Peak
4844	V	40.31	---	0.64	40.95	---	74	54	33.05	Peak
N/A										

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Low		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1542	H	43.71	---	-10.14	33.57	---	74	54	40.43	Peak
2358	H	43.79	---	-7.59	36.2	---	74	54	37.8	Peak
3096	H	43.73	---	-5.74	37.99	---	74	54	36.01	Peak
4844	H	40.83	---	0.64	41.47	---	74	54	32.53	Peak
N/A										

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1628	V	43.76	---	-9.84	33.92	---	74	54	40.08	Peak
2593	V	44.13	---	-7.13	37	---	74	54	37	Peak
3301	V	43.4	---	-5.31	38.09	---	74	54	35.91	Peak
4874	V	40.65	---	0.76	41.41	---	74	54	32.59	Peak

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX Mid		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1564	H	43.42	---	-10.07	33.35	---	74	54	40.65	Peak
2248	H	44	---	-8.13	35.87	---	74	54	38.13	Peak
3159	H	42.91	---	-5.52	37.39	---	74	54	36.61	Peak
4874	H	40.1	---	0.76	40.86	---	74	54	33.14	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1645	V	44.73	---	-9.84	34.89	---	74	54	39.11	Peak
2590	V	44.25	---	-7.13	37.12	---	74	54	36.88	Peak
3851	V	43.76	---	-3.84	39.92	---	74	54	34.08	Peak
4904	V	40.22	---	0.87	41.09	---	74	54	32.91	Peak

EUT	All in one PCS	Model Name	BVS-ZR215
Temperature	25°C	Relative Humidity	56%
Pressure	960hPa	Test voltage	DC 12V From Adapter with AC 120V/60Hz
Test Mode	TX High		

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
1792	H	43.68	---	-9.27	34.41	---	74	54	39.59	Peak
2804	H	45.37	---	-6.17	39.2	---	74	54	34.8	Peak
3743	H	44.09	---	-4.24	39.85	---	74	54	34.15	Peak
4904	H	40.72	---	0.87	41.59	---	74	54	32.41	Peak

Notes: AV Means AV detector test data, Peak Means Peak detector test data.

Emissions attenuated more than 20 dB below the permissible value are not reported.

6 POWER LINE CONDUCTED EMISSION

6.1 Conducted Emission Limits(15.207)


Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 -0.50	66 -56*	56 - 46*
0.50 -5.00	56	46
5.00 -30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

6.2 Test Setup

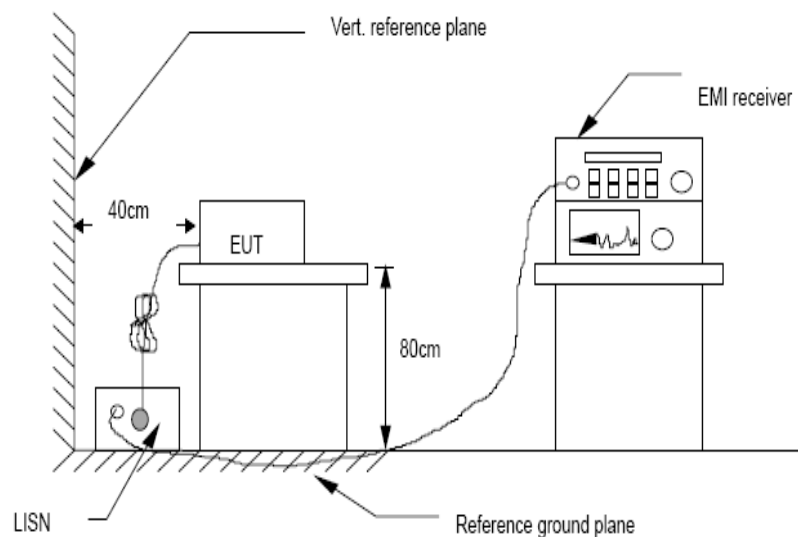

6.3 Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4:2014 on Conducted Emission Measurement. The bandwidth of test receiver (R & S ESCDLB ECHO 50) is set at 9 kHz.

6.4 Test Results

TX MODE

All modes have been tested, and only worse case of 802.11 b mode is reported only.

PASS

Detailed information please see the following page.

802.11b:

N:


Conducted Emission Measurement

File : ALL IN ONE

Data : #3

Date: 2016-11-17

Time: 16:11:21

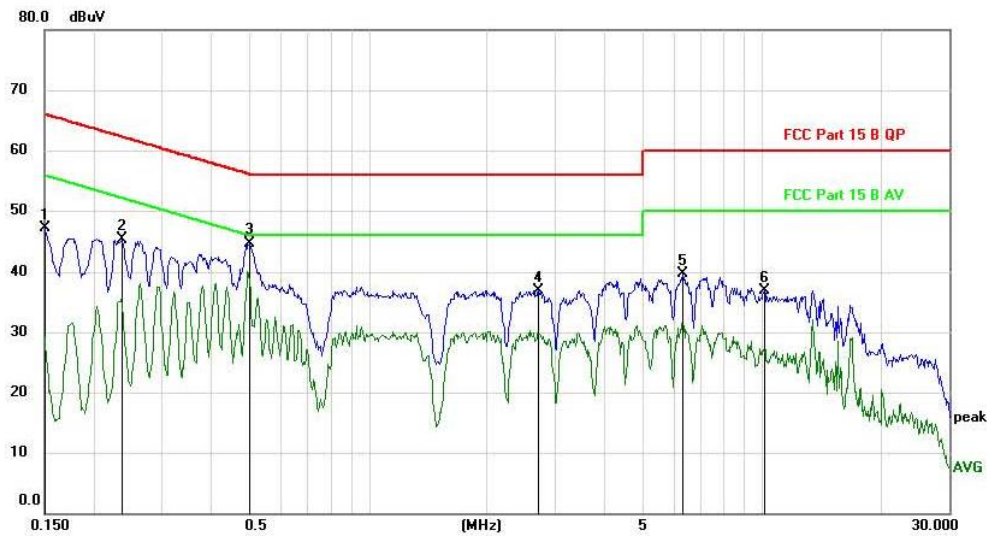

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1508	37.47	9.73	47.20	65.96	-18.76	peak	
2		0.2366	35.51	9.75	45.26	62.21	-16.95	peak	
3	*	0.4994	34.91	9.78	44.69	56.01	-11.32	peak	
4		2.7068	26.87	10.02	36.89	56.00	-19.11	peak	
5		6.3186	29.51	10.27	39.78	60.00	-20.22	peak	
6		10.1254	26.51	10.35	36.86	60.00	-23.14	peak	

L:


Conducted Emission Measurement

File :ALL IN ONE

Data :#4

Date: 2016-11-17

Time: 16:14:07

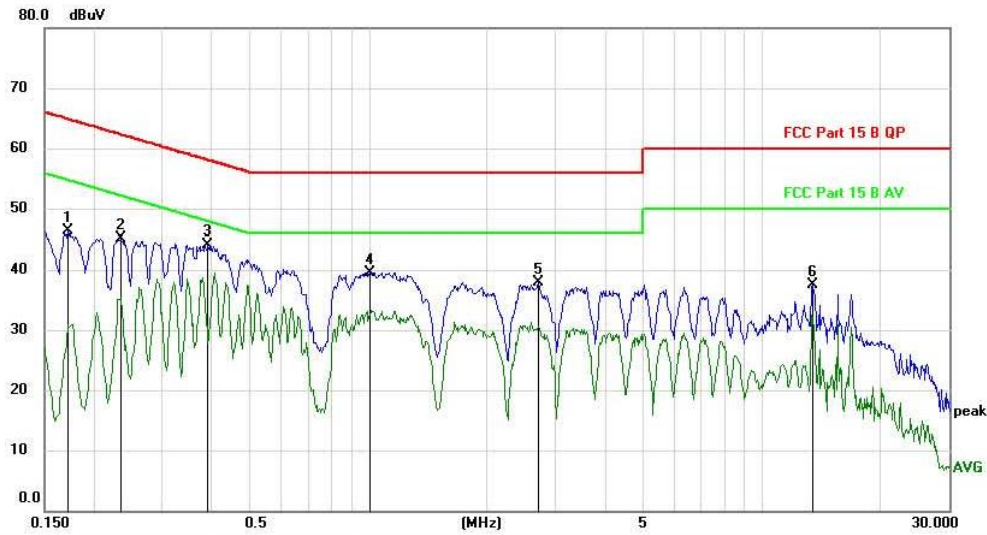

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1720	36.53	9.73	46.26	64.86	-18.60	peak	
2		0.2353	35.29	9.75	45.04	62.26	-17.22	peak	
3	*	0.3914	34.28	9.77	44.05	58.03	-13.98	peak	
4		1.0048	29.76	9.83	39.59	56.00	-16.41	peak	
5		2.7067	27.80	10.02	37.82	56.00	-18.18	peak	
6		13.4079	27.15	10.34	37.49	60.00	-22.51	peak	

7 Conducted Maximum Output Power

7.1 Test limit

Please refer section RSS-247 & 15.247.

7.2 Test Procedure

Details see the KDB558074 Meas Guidance V03


7.2.1 Place the EUT on the table and set it in transmitting mode.

7.2.2 Measure out each mode and each bands peak output power of EUT.

Note: The cable loss and attenuator loss were offset into measure device as amplitude offset.

Details see the KDB558074 DTS Meas Guidance V03

7.3 Test Setup



7.4 Test Results

PASS

Detailed information please see the following page.

EUT: All in one PCS	M/N: BVS-ZR215	
Test date: 2016-12-14	Test site: RF site	Tested by: Reak Yang
Conclusion: PASS		

Mode	Frequency (MHz)	PK Output power (dBm)	Limit (dBm)	Margin (dB)
IEEE 802.11 b	CH1: 2412	18.35	30	11.65
	CH6: 2437	18.27	30	11.73
	CH11: 2462	18.24	30	11.76
IEEE 802.11 g	CH1: 2412	15.74	30	14.26
	CH6: 2437	15.42	30	14.58
	CH11: 2462	15.26	30	14.74
IEEE 802.11 n/HT20 with 2.4G	CH1: 2412	14.98	30	15.02
	CH6: 2437	14.76	30	15.24
	CH11: 2462	14.62	30	15.38
IEEE 802.11 n/HT40 with 2.4G	CH3: 2422	12.37	30	17.63
	CH6: 2437	12.26	30	17.74
	CH9: 2452	12.18	30	17.82
Conclusion: PASS				

8 PEAK POWER SPECTRAL DENSITY

8.1 Test limit

8.1.1 Please refer section RSS-247 & 15.247.

8.1.2 For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

8.1.3 The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

8.2 Method of measurement

Details see the KDB558074 DTS Meas Guidance V03

8.2.1 Place the EUT on the table and set it in transmitting mode.


8.2.2 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

8.2.3 Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, span=5-30%EBW, detail see the test plot.

8.2.4 Record the max reading.

8.2.5 Repeat the above procedure until the measurements for all frequencies are completed.

8.3 Test Setup



8.4 Test Results

PASS.

Detailed information please see the following page.

Mode	Frequency (MHz)	PK Output power(dBm)	Limit (dBm)	Result
IEEE 802.11 b	CH1: 2412	-6.668	8	PASS
	CH6: 2437	-6.688	8	PASS
	CH11: 2462	-4.604	8	PASS
IEEE 802.11 g	CH1: 2412	-11.820	8	PASS
	CH6: 2437	-10.277	8	PASS
	CH11: 2462	-11.838	8	PASS
IEEE 802.11 n/HT20 with 2.4G	CH1: 2412	-10.635	8	PASS
	CH6: 2437	-9.094	8	PASS
	CH11: 2462	-12.602	8	PASS
IEEE 802.11 n/HT40 with 2.4G	CH3: 2422	-17.954	8	PASS
	CH6: 2437	-16.105	8	PASS
	CH9: 2452	-16.624	8	PASS

IEEE 802.11b :
CH Low :



CH Mid:




CH High:




IEEE 802.11g :


CH Low

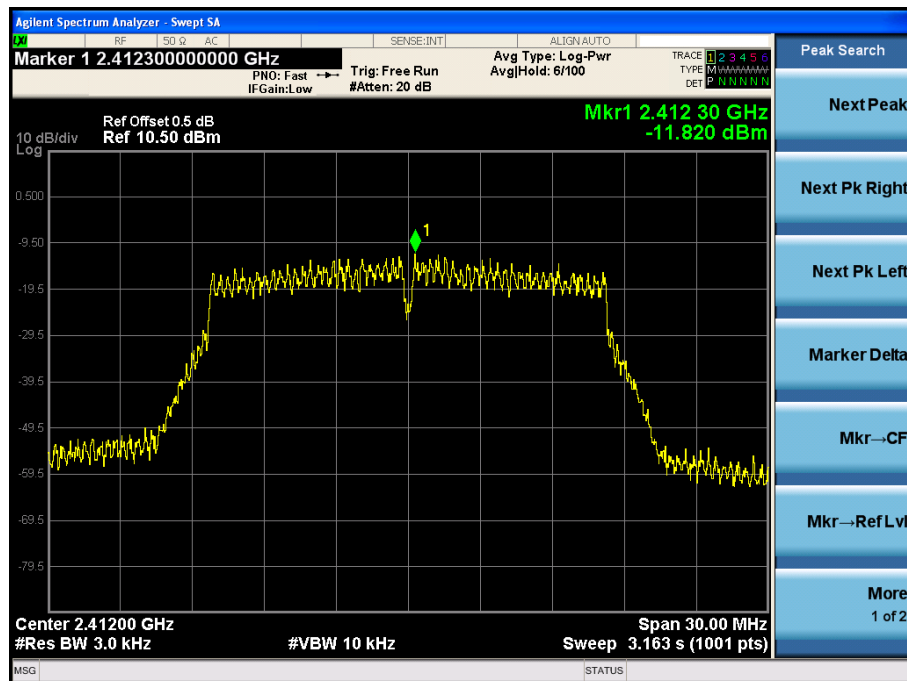


CH Mid:

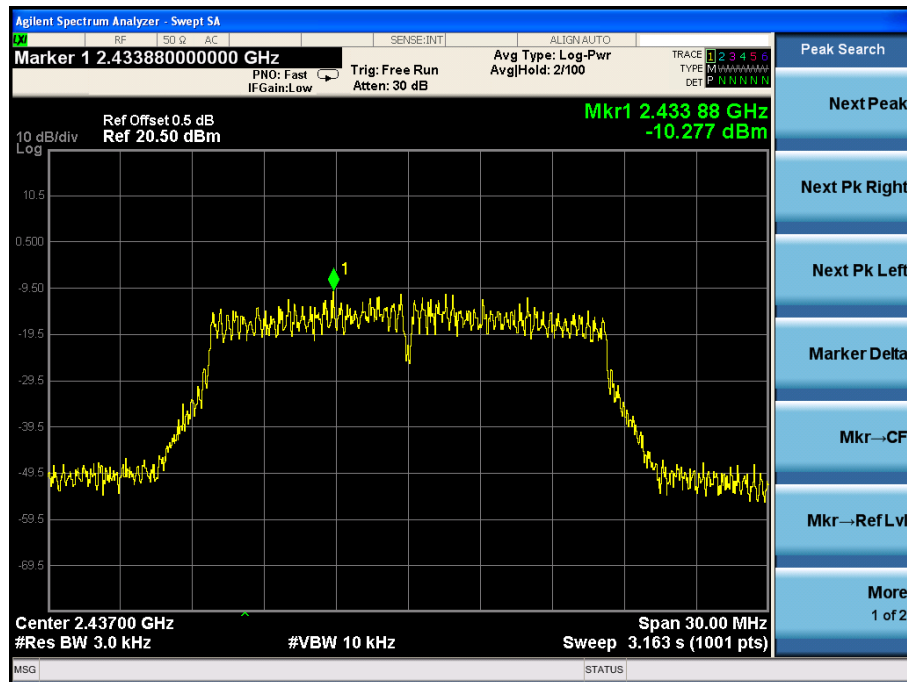


CH High:

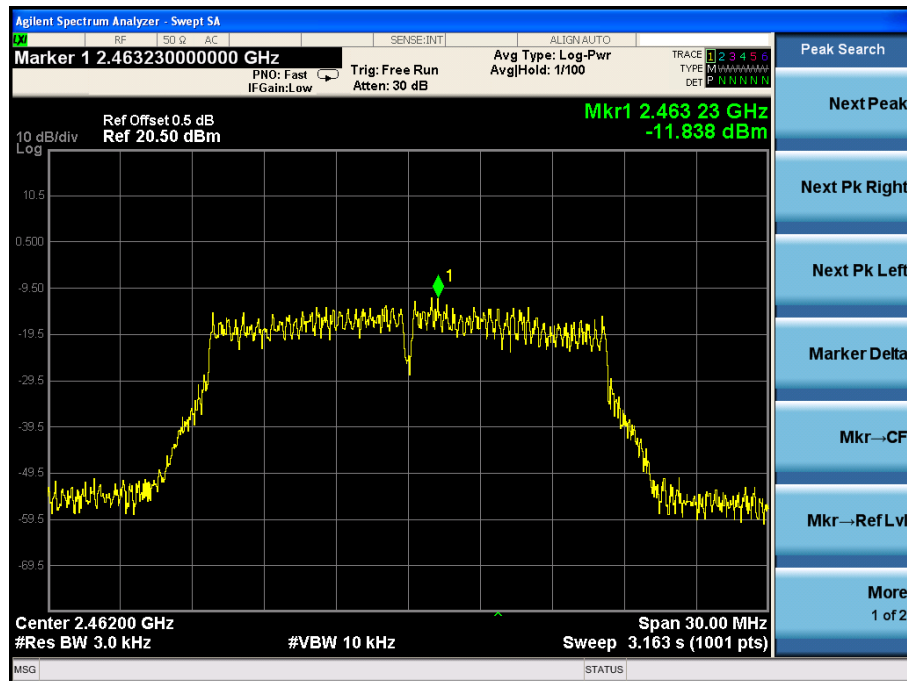


IEEE 802.11n HT20 :
CH Low :

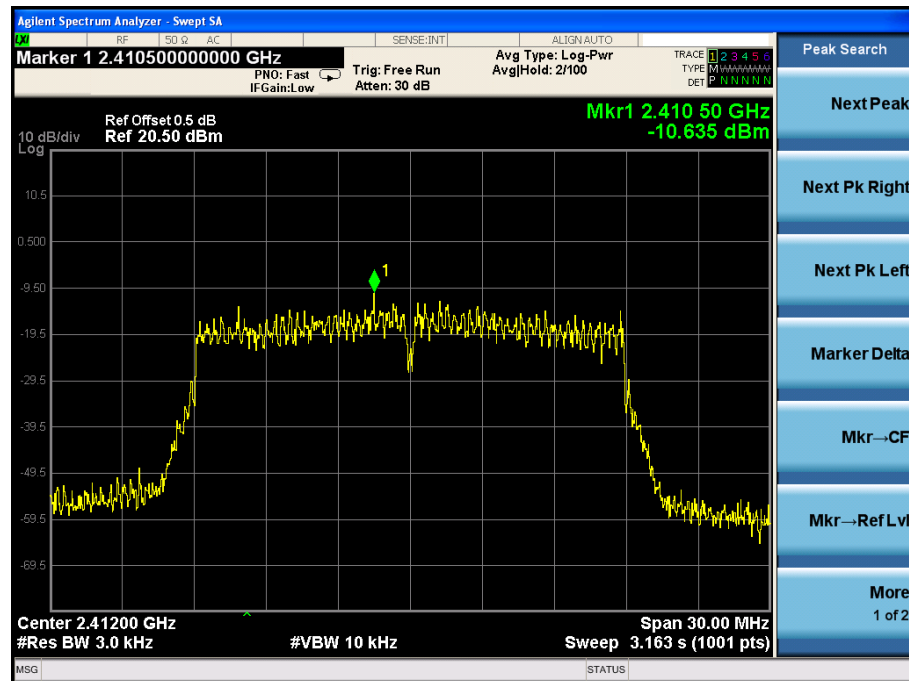

CH Mid:

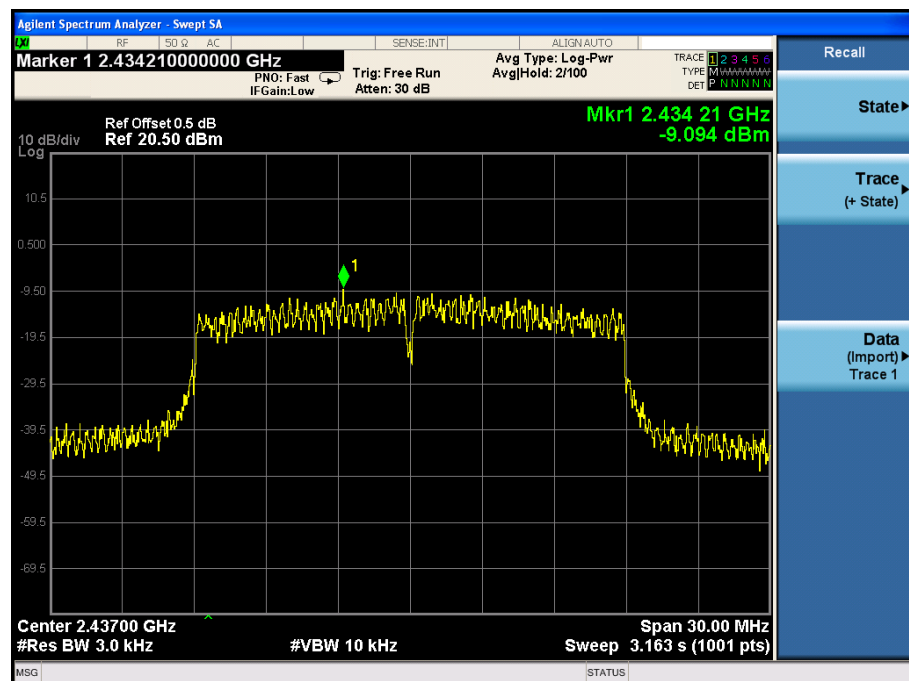


CH High:

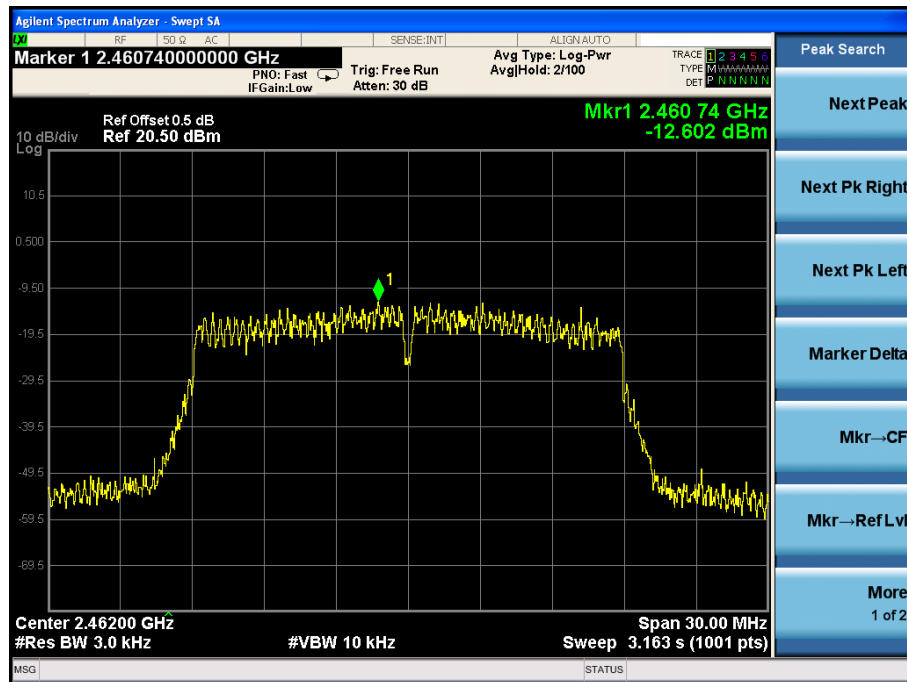


IEEE 802.11n HT40 :


CH Low :

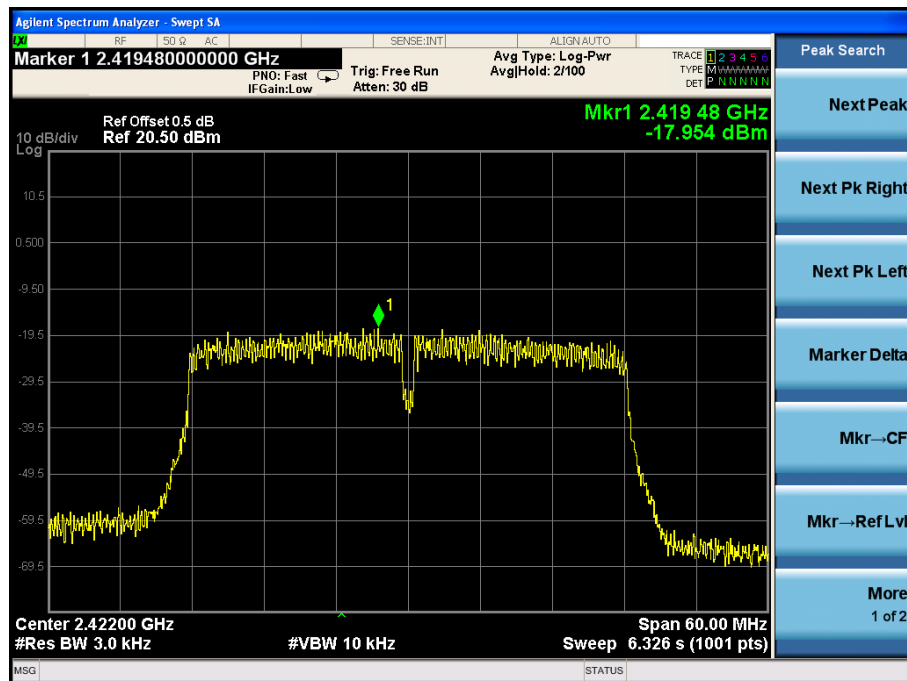

CH Mid:

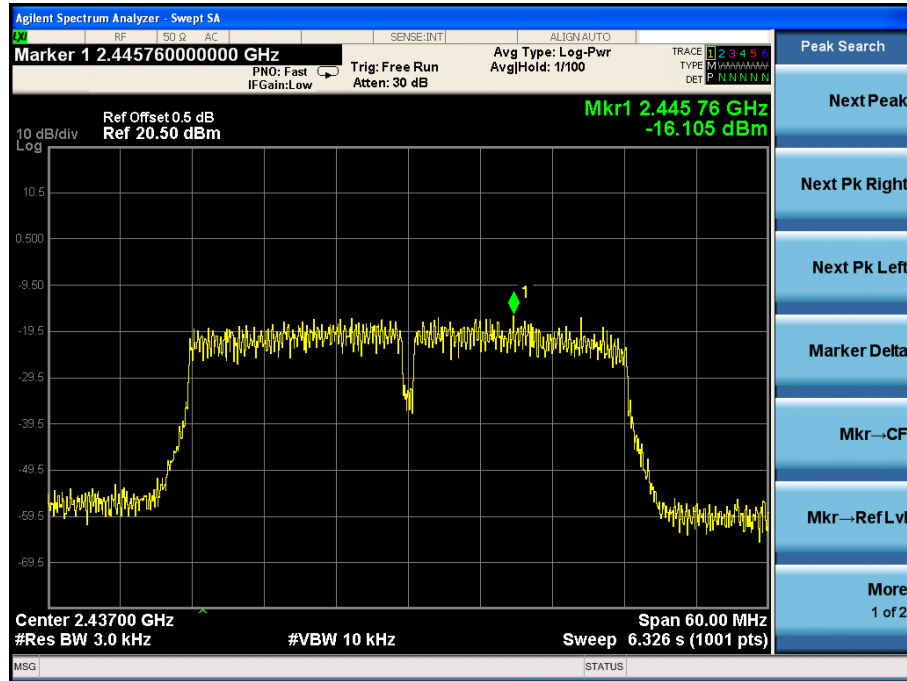

CH High:

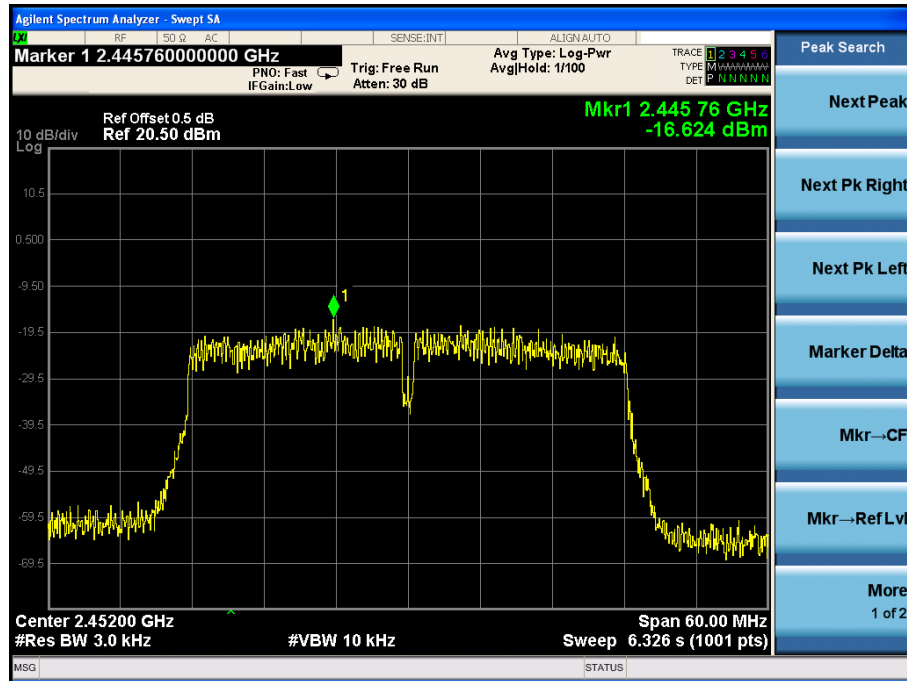

9 Bandwidth

9.1 Test limit

Please refer section RSS-247 & 15.247


For direct sequence systems, the minimum 6dB bandwidth shall be at least 500 kHz.

9.2 Method of measurement

Details see the KDB558074 D01 Meas Guidance

- a) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.
- b) The test receiver set RBW = 100KHz, VBW $\geq$ 300KHz, Sweep time set auto, PEAK Detector, detail see the test plot.

9.3 Test Setup




9.4 Test Results

PASS.


Detailed information please see the following page.

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)	Result
IEEE 802.11b:					
Low	2412	9.604	/	0.5	PASS
Mid	2437	10.05	/	0.5	PASS
High	2462	9.586	/	0.5	PASS
IEEE 802.11g					
Low	2412	15.14	/	0.5	PASS
Mid	2437	15.71	/	0.5	PASS
High	2462	15.15	/	0.5	PASS
IEEE 802.11n/HT20:					
Low	2412	15.16	/	0.5	PASS
Mid	2437	15.13	/	0.5	PASS
High	2462	15.33	/	0.5	PASS
IEEE 802.11n/HT40:					
Low	2422	35.24	/	0.5	PASS
Mid	2437	35.25	/	0.5	PASS
High	2452	35.25	/	0.5	PASS


IEEE 802.11b:
CH Low :

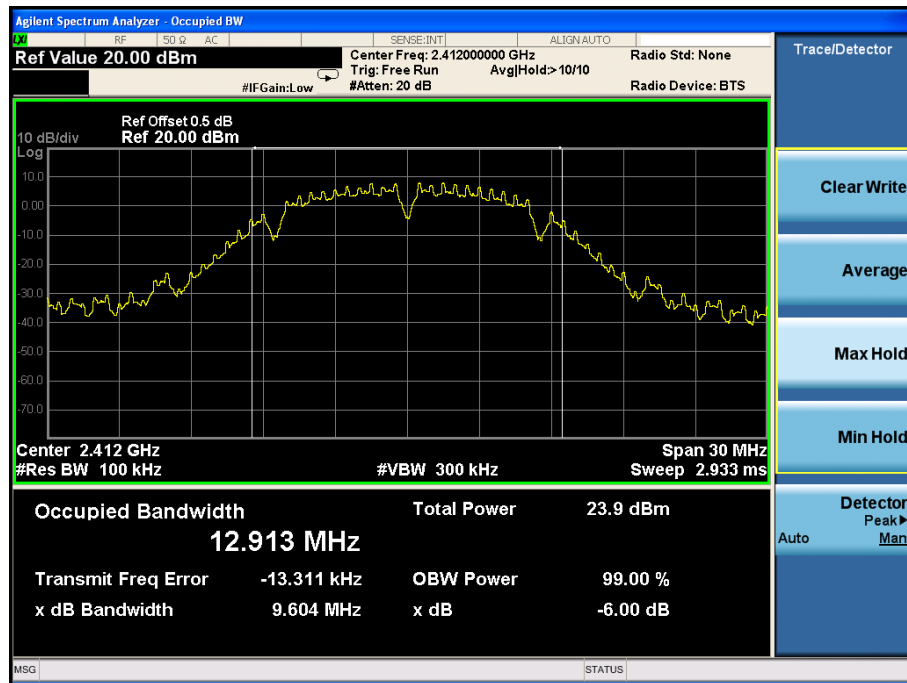

CH Mid :

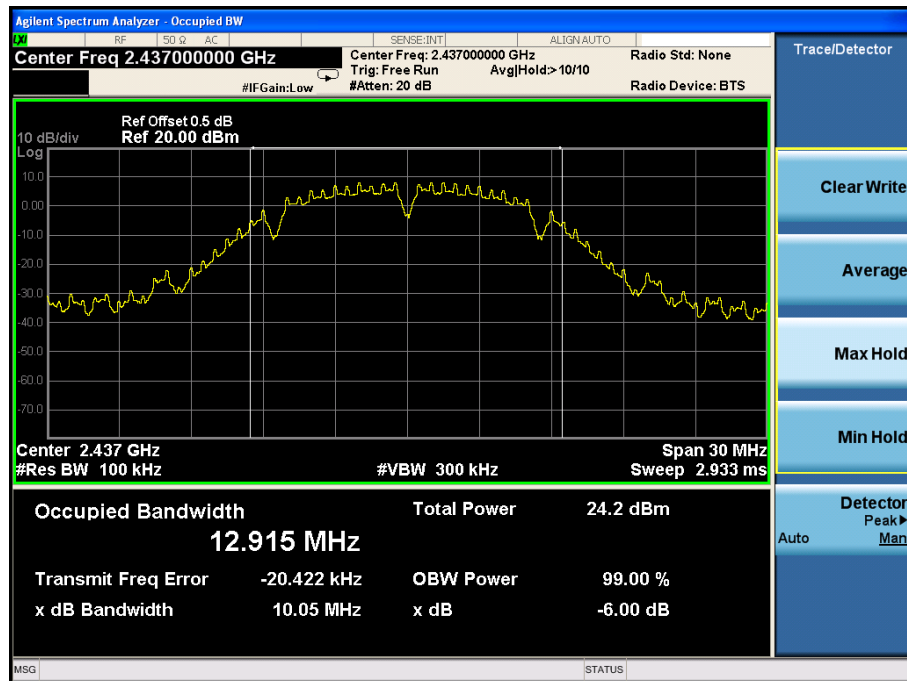


CH High :

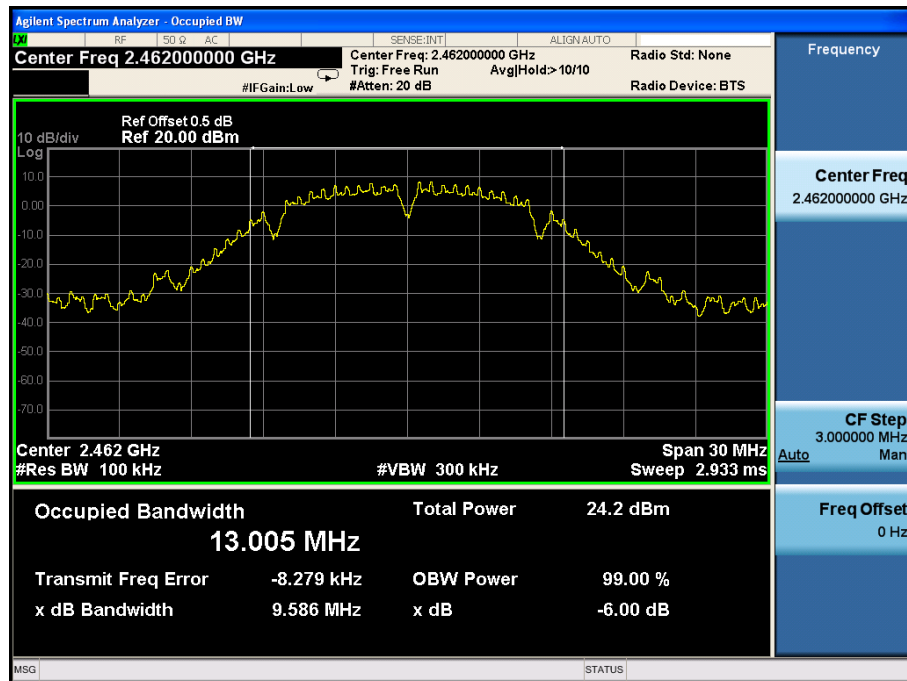


IEEE 802.11g:


CH Low :

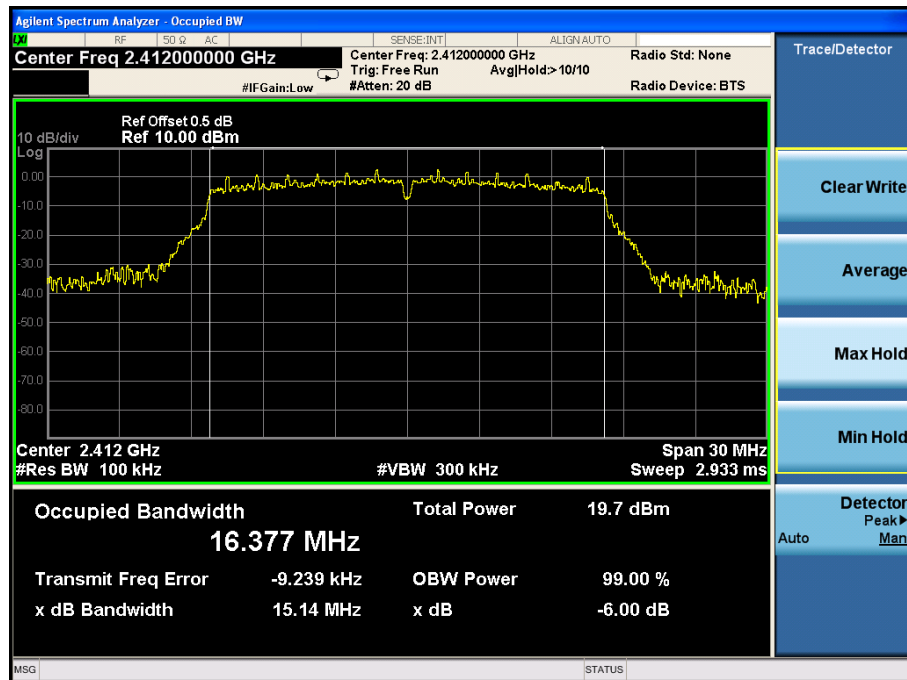


CH Mid:

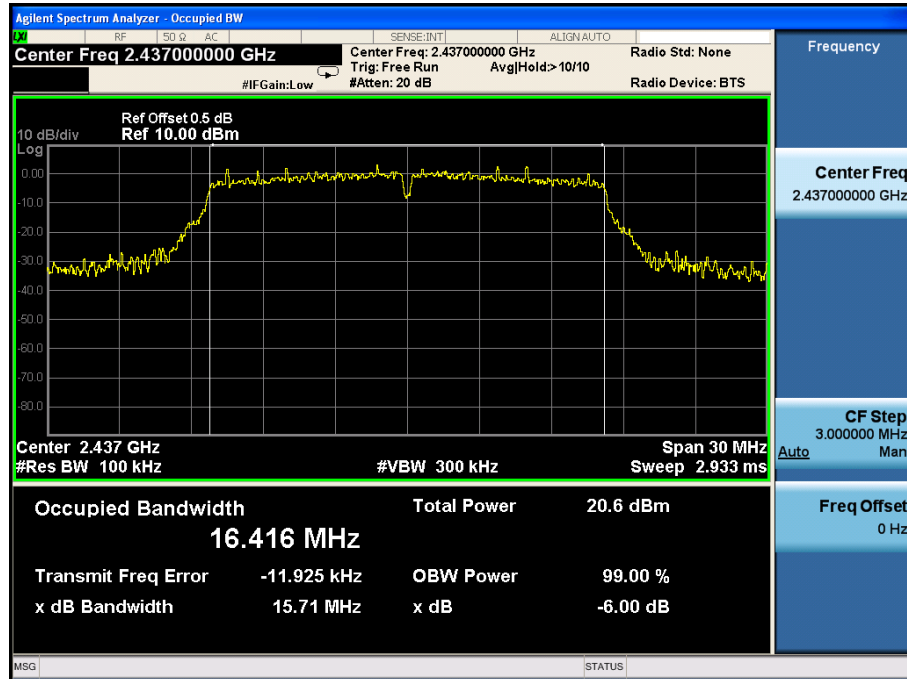


CH High:

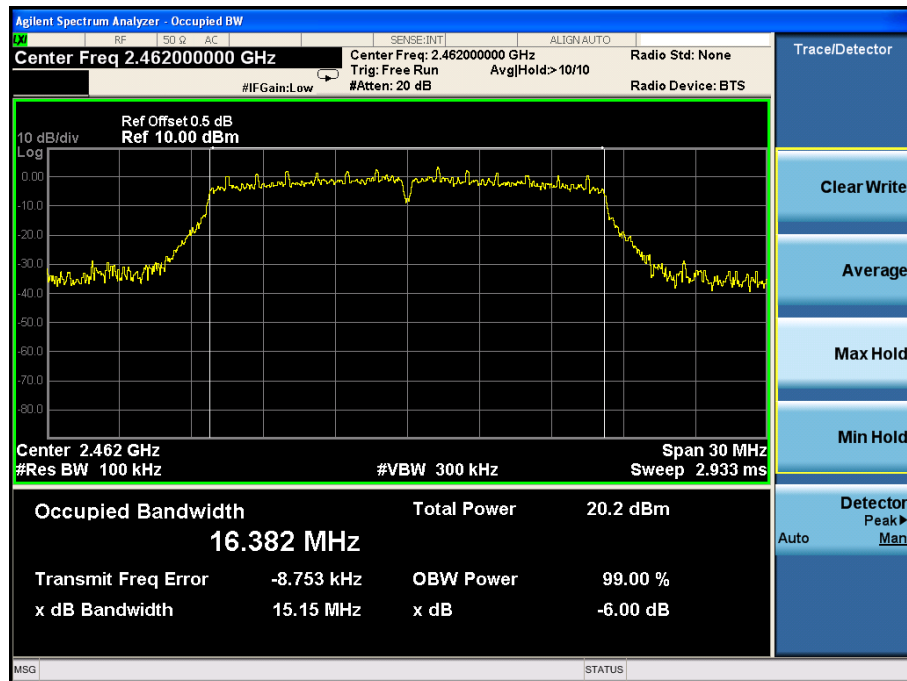


IEEE 802.11n HT20:
CH Low :

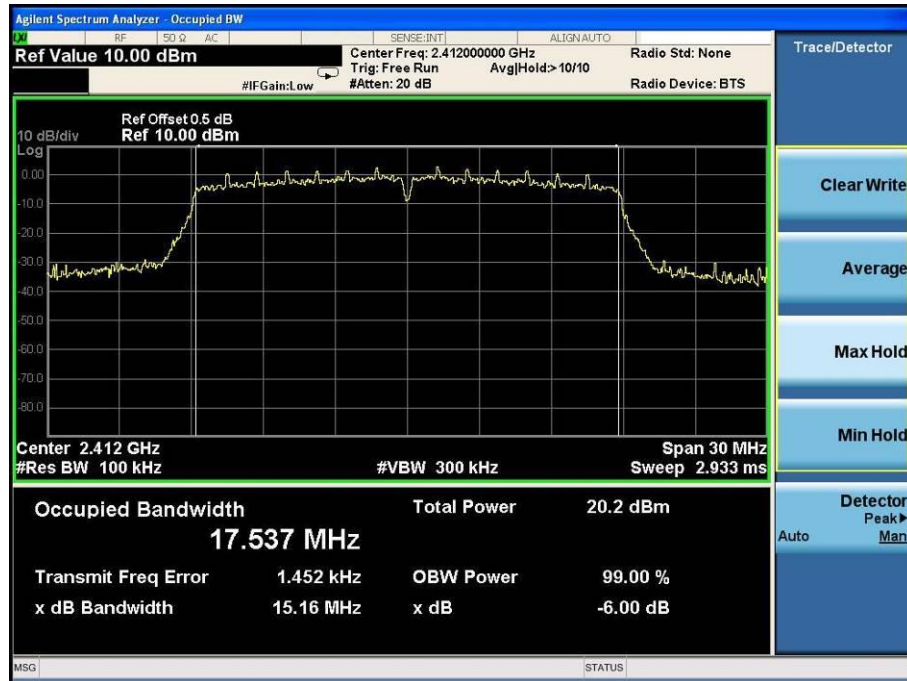

CH Mid :

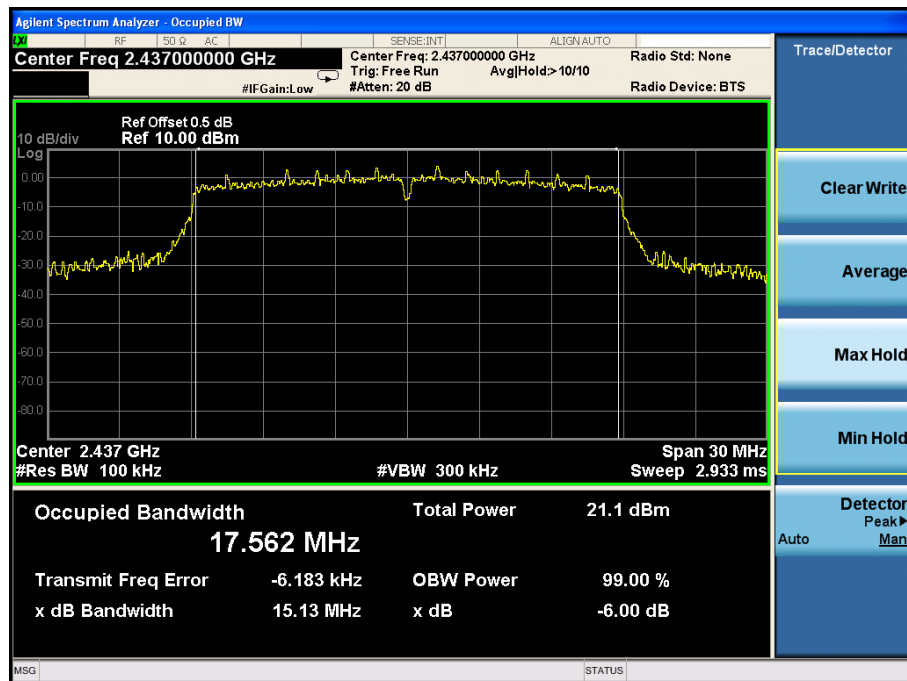


CH High :

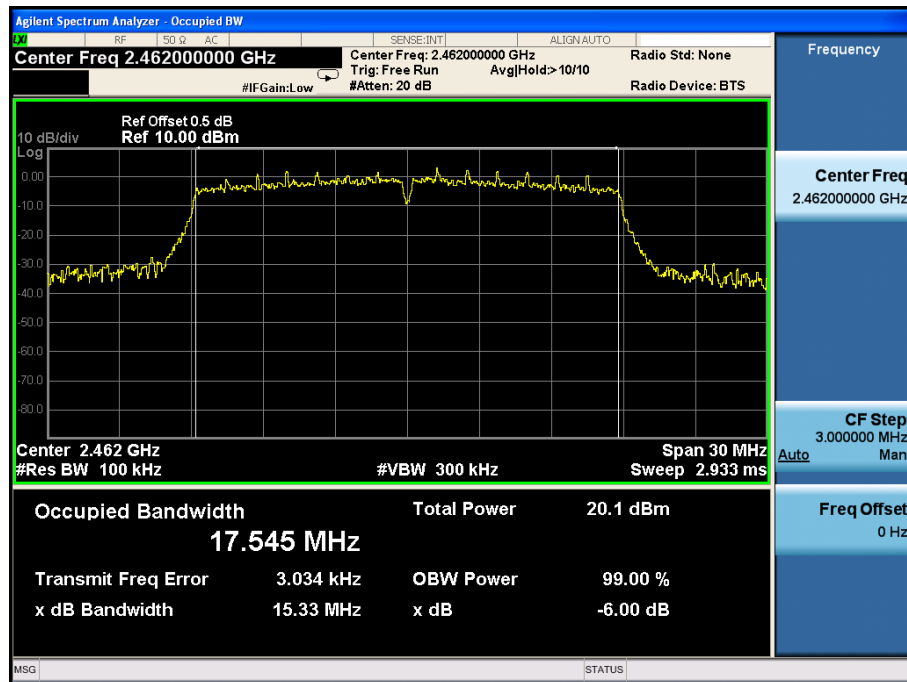


IEEE 802.11n/HT40:


CH Low :

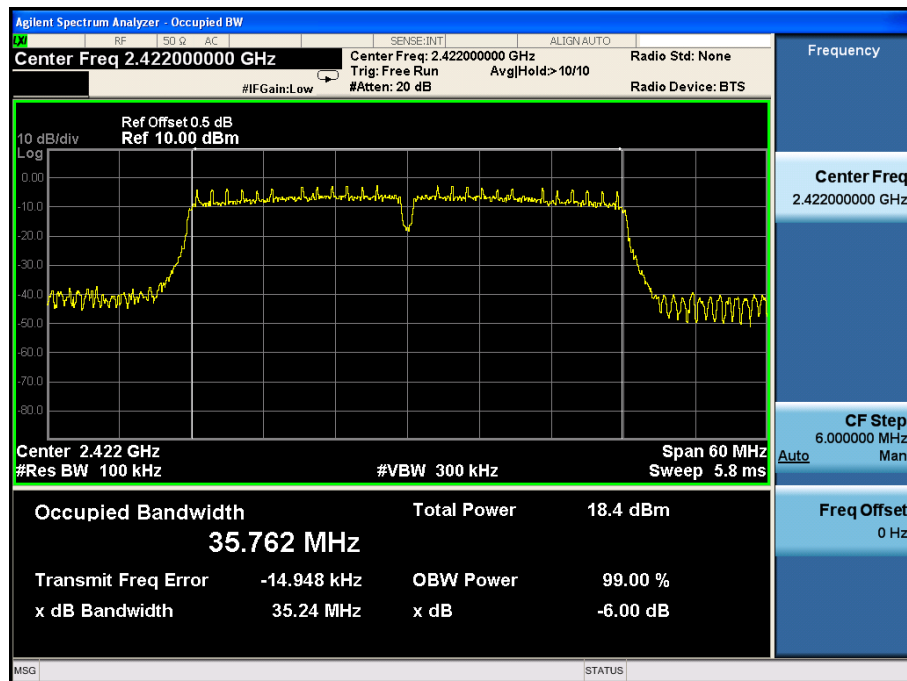

CH Mid:

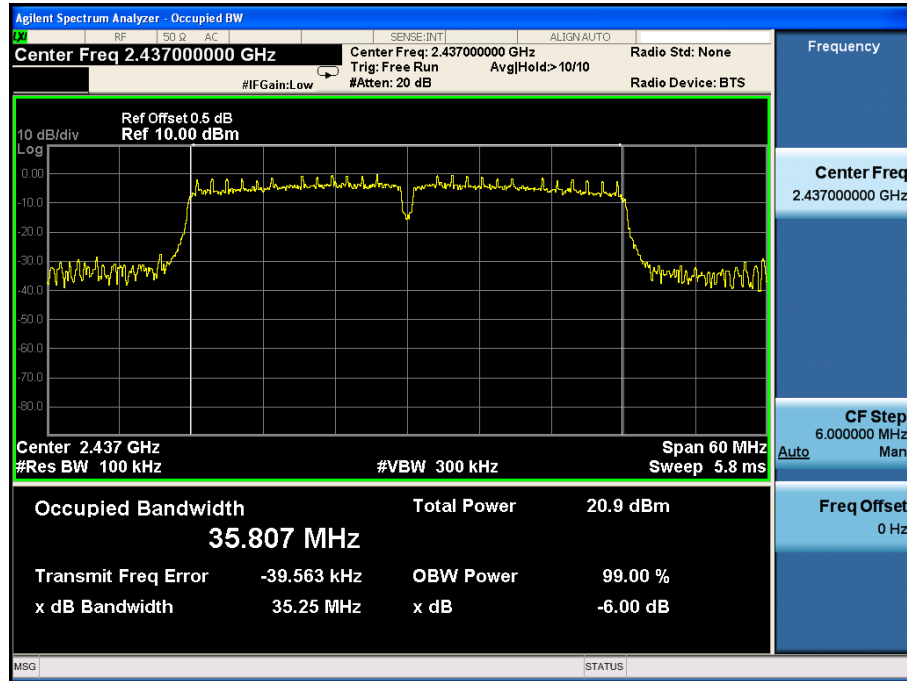

CH High :

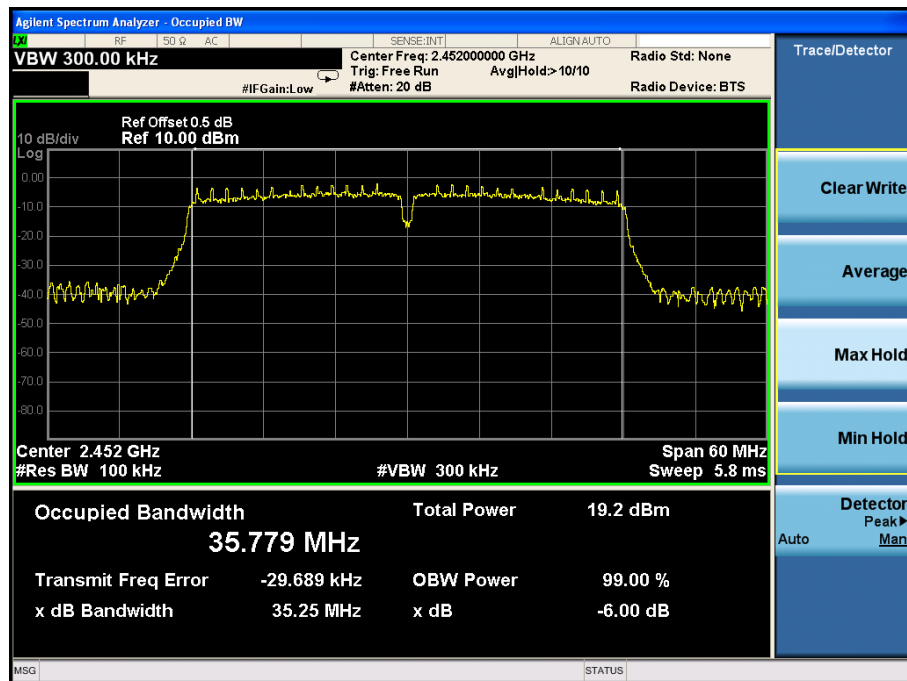

10 Band Edge Check

10.1 Test limit

Please refer section RSS-GEN&15.247.

10.2 Test Procedure

12.2.1 Put the EUT on a 0.8m high table, power on the EUT. Emissions were scanned and measured rotating the EUT to 360 degrees, Find the maximum Emission

12.2.2 Check the spurious emissions out of band.

12.2.3 RBW 1MHz ,VBW 3MHz ,Peak detector for peak value , RBW 1MHz ,VBW 3MHz ,RMS detector for AV value.

10.3 Test Setup

Same as 5.2.2.

10.4 Test Result

PASS.

Detailed information please see the following page.

Radiated Method:
802.11b

Band Edge Test result								
EUT: All in one PCS			M/N: BVS-ZR215					
Power: DC 12V From Adapter with AC 120V/60Hz								
Test date: 2016-12-15			Test site: 3m Chamber			Tested by: Reak Yang		
Test mode: Tx Low								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	41.46	27.62	3.92	34.97	38.03	74	35.97	PK
--	--	--	--	--	--	--	--	--
Antenna Polarity: Horizontal								
2390	41.58	27.62	3.92	34.97	38.15	74	35.85	PK
--	--	--	--	--	--	--	--	--
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

Band Edge Test result								
EUT: All in one PCS			M/N: BVS-ZR215					
Power: DC 12V From Adapter with AC 120V/60Hz								
Test date: 2016-12-15			Test site: 3m Chamber			Tested by: Reak Yang		
Test mode: Tx High								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	40.77	27.89	4	34.97	37.69	74	36.31	PK
--	--	--	--	--	--	--	--	--
Antenna Polarity: Horizontal								
2483.5	41.06	27.89	4	34.97	37.98	74	36.02	PK
--	--	--	--	--	--	--	--	--
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

802.11g

Band Edge Test result								
EUT: All in one PCS				M/N: BVS-ZR215				
Power: DC 12V From Adapter with AC 120V/60Hz								
Test date: 2016-12-15			Test site: 3m Chamber		Tested by: Reak Yang			
Test mode: Tx Low								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	41.04	27.62	3.92	34.97	37.61	74	36.39	PK
--	--	--	--	--	--	--	--	--
Antenna Polarity: Horizontal								
2390	41.66	27.62	3.92	34.97	38.23	74	35.77	PK
--	--	--	--	--	--	--	--	--
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								


Band Edge Test result								
EUT: All in one PCS			M/N: BVS-ZR215					
Power: DC 12V From Adapter with AC 120V/60Hz								
Test date: 2016-12-15			Test site: 3m Chamber			Tested by: Reak Yang		
Test mode: Tx High								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	40.92	27.89	4	34.97	37.84	74	36.16	PK
--	--	--	--	--	--	--	--	--
Antenna Polarity: Horizontal								
2483.5	41.59	27.89	4	34.97	38.51	74	35.49	PK
--	--	--	--	--	--	--	--	--
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

Band Edge Test result								
EUT: All in one PCS			M/N: BVS-ZR215					
Power: DC 12V From Adapter with AC 120V/60Hz								
Test date: 2016-12-15			Test site: 3m Chamber			Tested by: Reak Yang		
Test mode: Tx High								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	41.23	27.89	4	34.97	38.15	74	35.85	PK
--	--	--	--	--	--	--	--	--
Antenna Polarity: Horizontal								
2483.5	41.64	27.89	4	34.97	38.56	74	35.44	PK
--	--	--	--	--	--	--	--	--
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								


Band Edge Test result								
EUT: All in one PCS			M/N: BVS-ZR215					
Power: DC 12V From Adapter with AC 120V/60Hz								
Test date: 2016-12-15			Test site: 3m Chamber			Tested by: Reak Yang		
Test mode: Tx Low								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2390	41.01	27.62	3.92	34.97	37.58	74	36.42	PK
--	--	--	--	--	--	--	--	--
Antenna Polarity: Horizontal								
2390	41.63	27.62	3.92	34.97	38.2	74	35.8	PK
--	--	--	--	--	--	--	--	--
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								

Band Edge Test result								
EUT: All in one PCS			M/N: BVS-ZR215					
Power: DC 12V From Adapter with AC 120V/60Hz								
Test date: 2016-12-15			Test site: 3m Chamber			Tested by: Reak Yang		
Test mode: Tx High								
Antenna polarity: Vertical								
Freq (MHz)	Read Level (dBuV/m)	Antenna Factor (dB/m)	Cable loss(dB)	Amp Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
2483.5	41.17	27.89	4	34.97	38.09	74	35.91	PK
--	--	--	--	--	--	--	--	--
Antenna Polarity: Horizontal								
2483.5	41.76	27.89	4	34.97	38.68	74	35.32	PK
--	--	--	--	--	--	--	--	--
Note:								
1, Spectrum Set for PK measure: RBW=1MHz, VBW=1MHz, Sweep time=Auto, Detector: PK								
2, Spectrum Set for AV measure: RBW=1MHz, VBW=3MHz, Sweep time=Auto, Detector: RMS								
3, Result = Read level + Antenna factor + cable loss-Amp factor								
4, All the other emissions not reported were too low to read and deemed to comply with FCC limit.								



802.11g

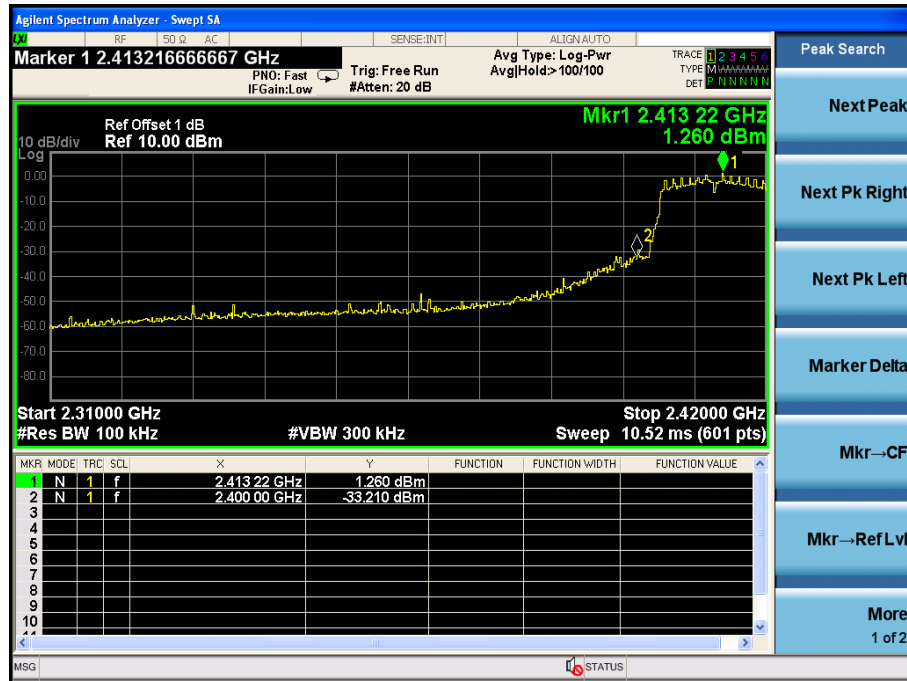

802.11n HT20

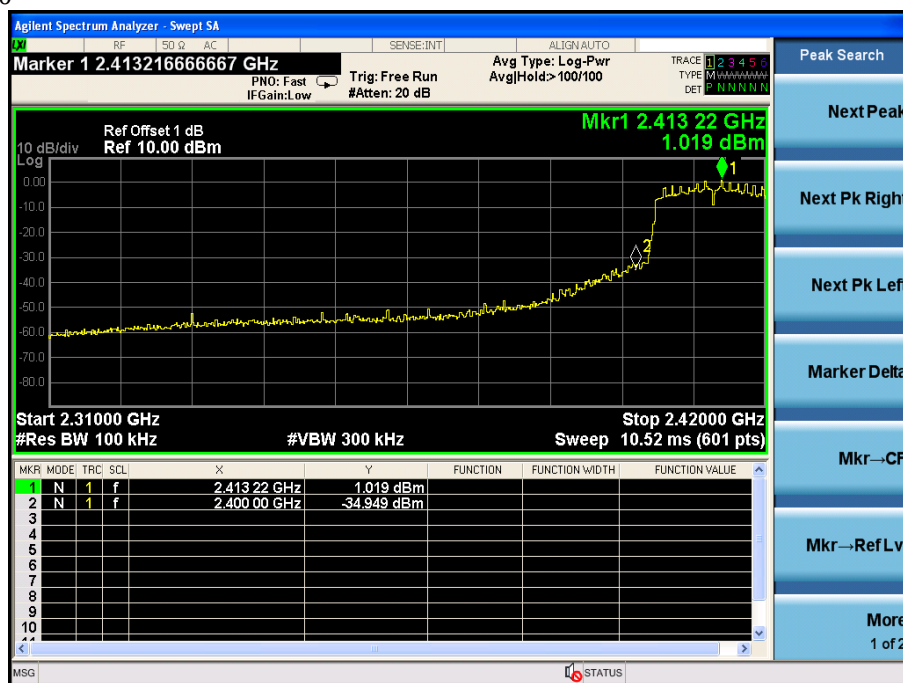

802.11n HT40

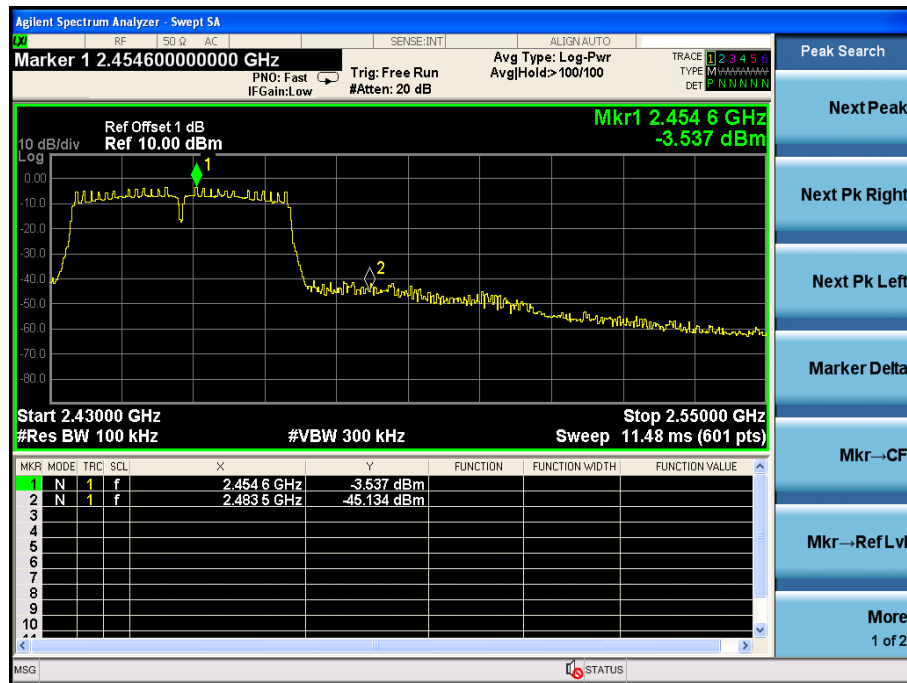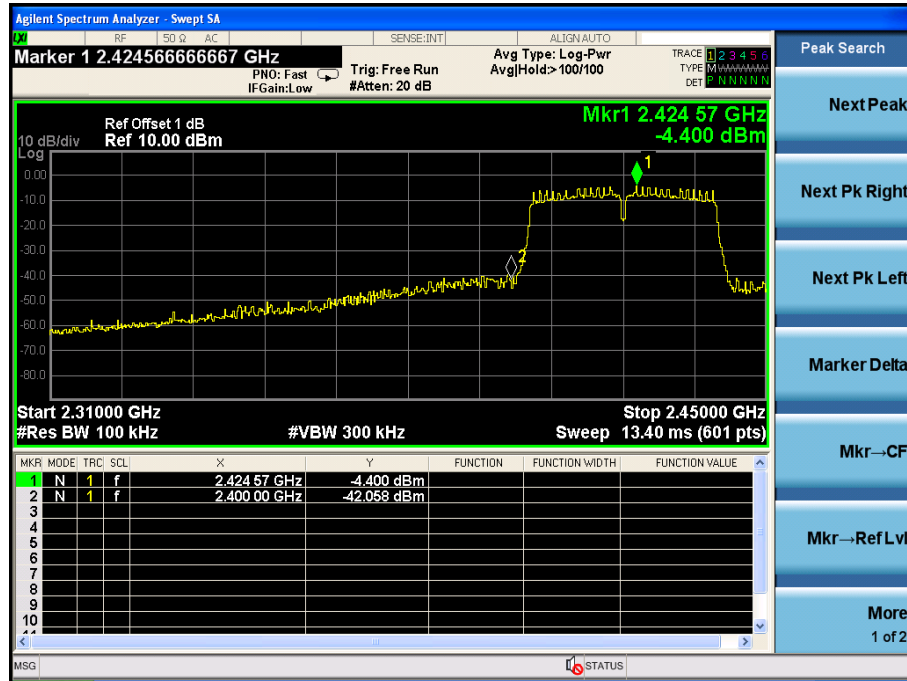

11 Antenna Requirement

11.1 Standard Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

11.2 Antenna Connected Construction

The antenna is PCB antenna and no consideration of replacement. Please see EUT photo for details.

11.3 Result


The EUT antenna is PCB Antenna. It comply with the standard requirement.


12 Photographs of Test Setup

12.1 Photos of Conducted Emission test




12.2 Photos of Radiated emission

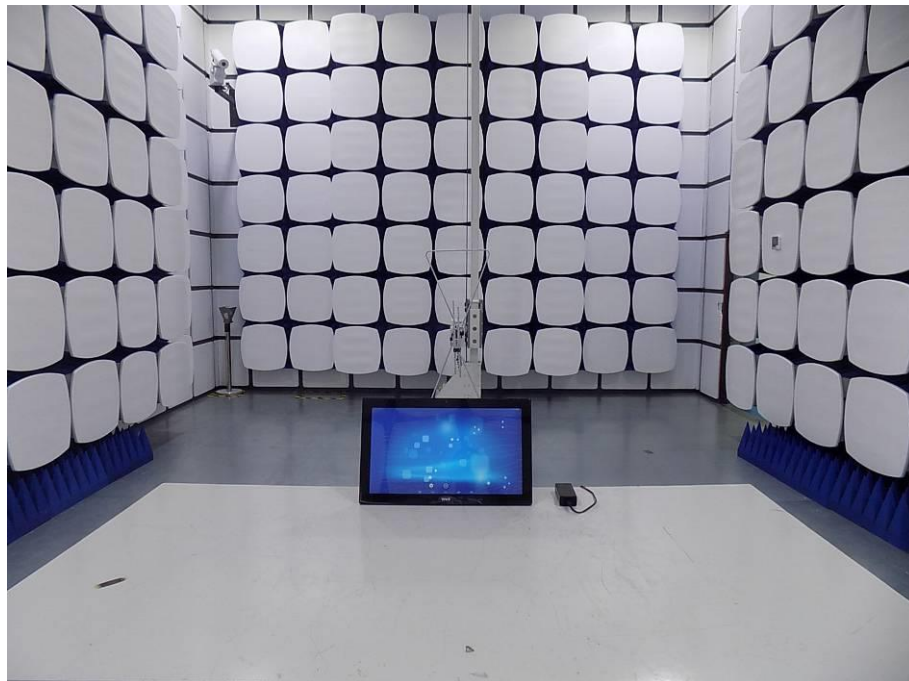


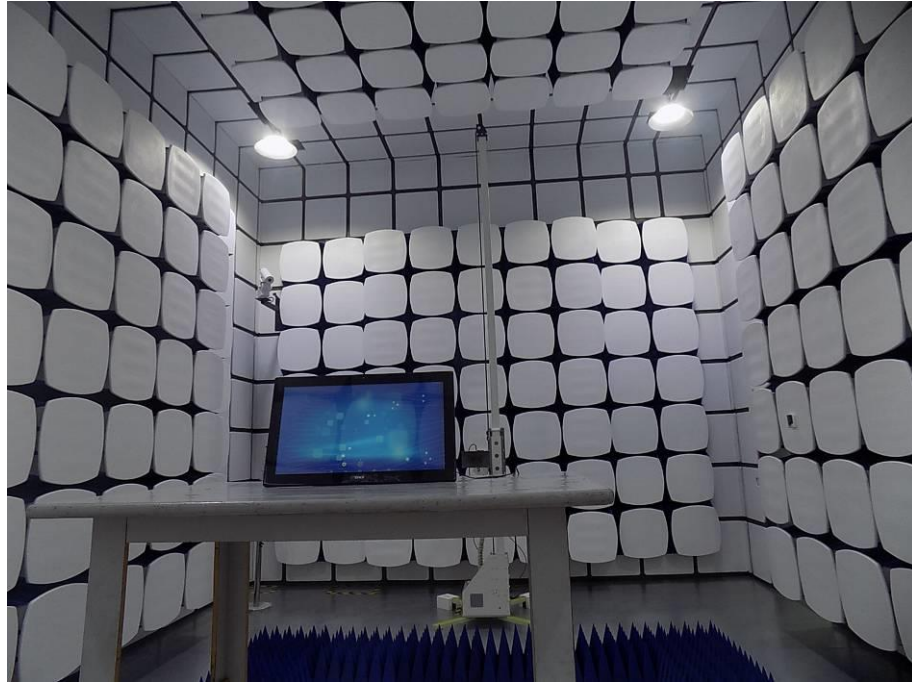


13 Photographs of EUT

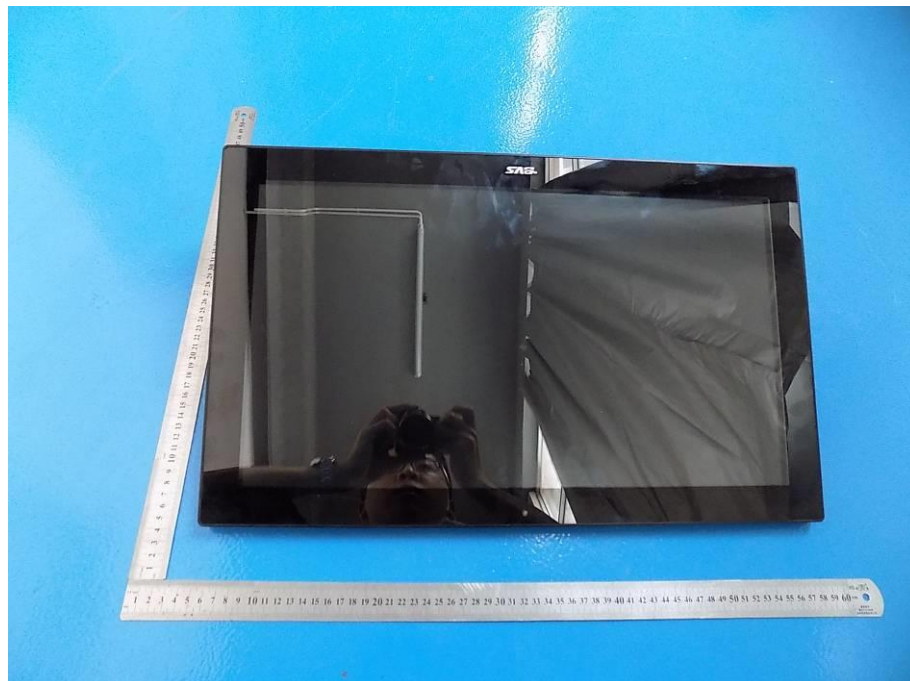





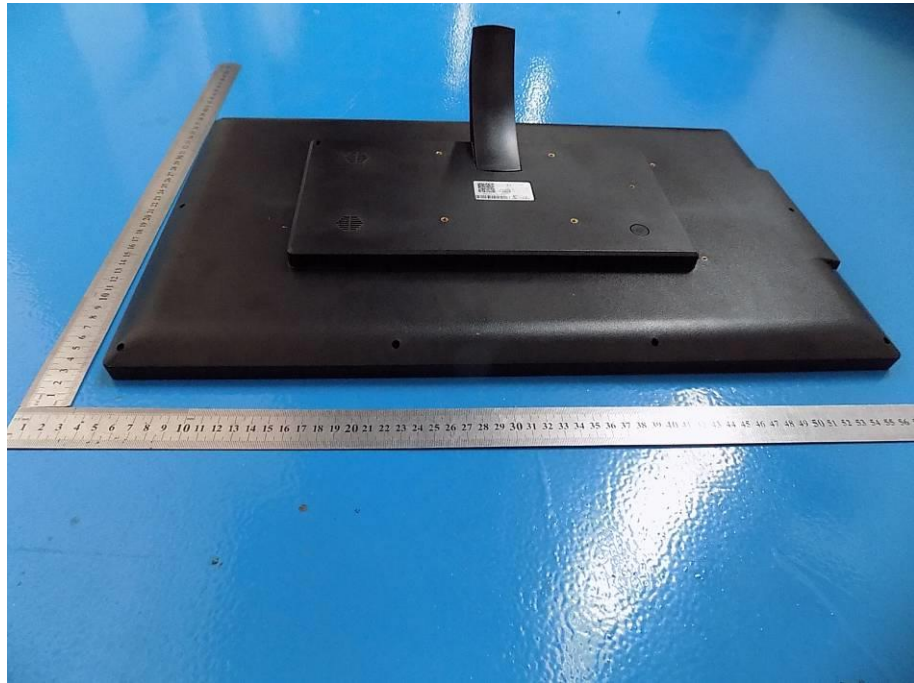







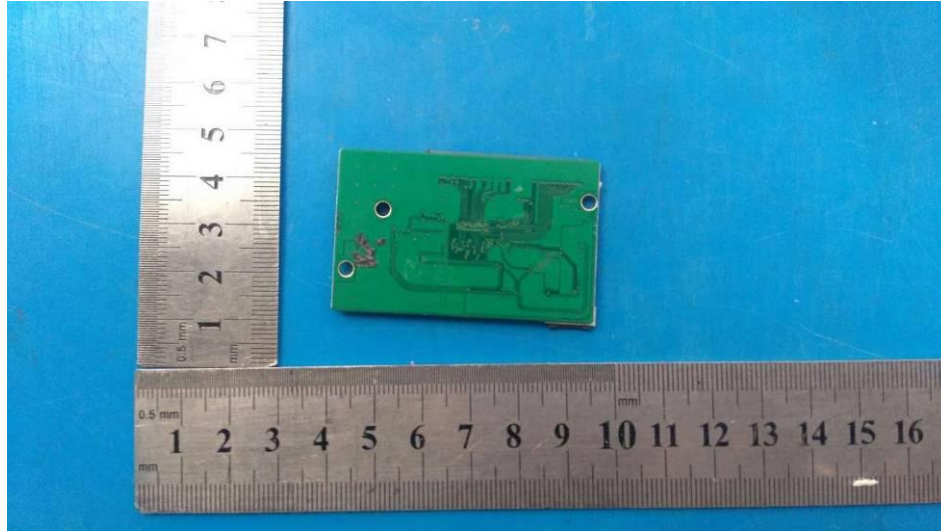


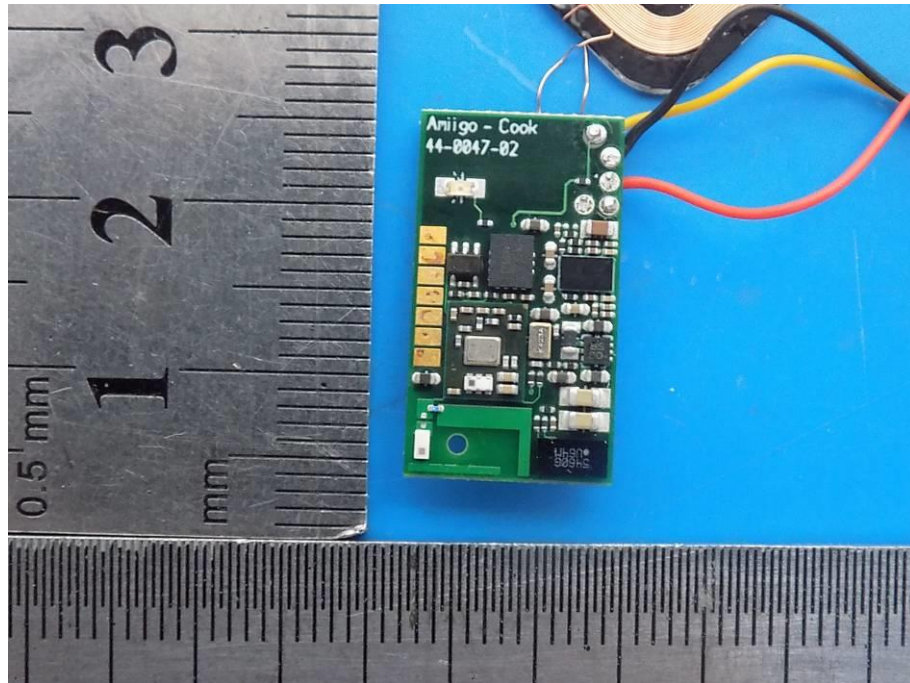



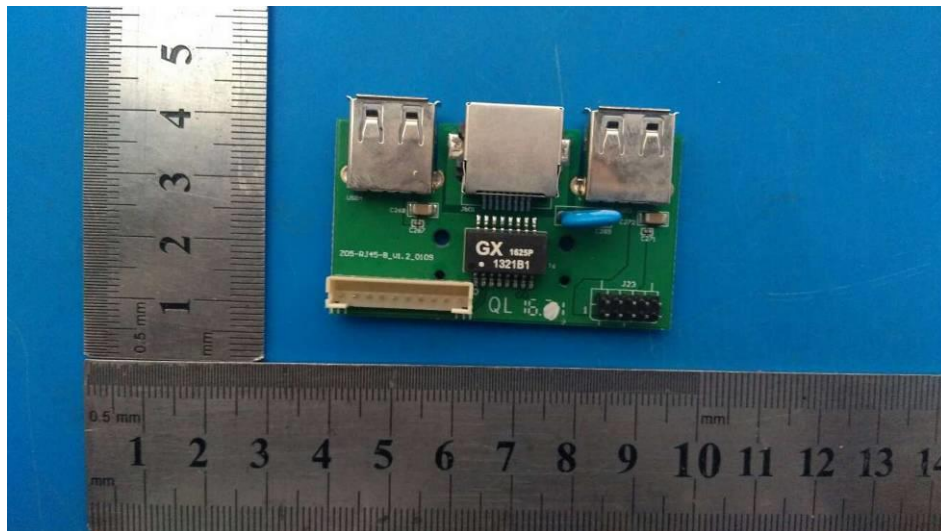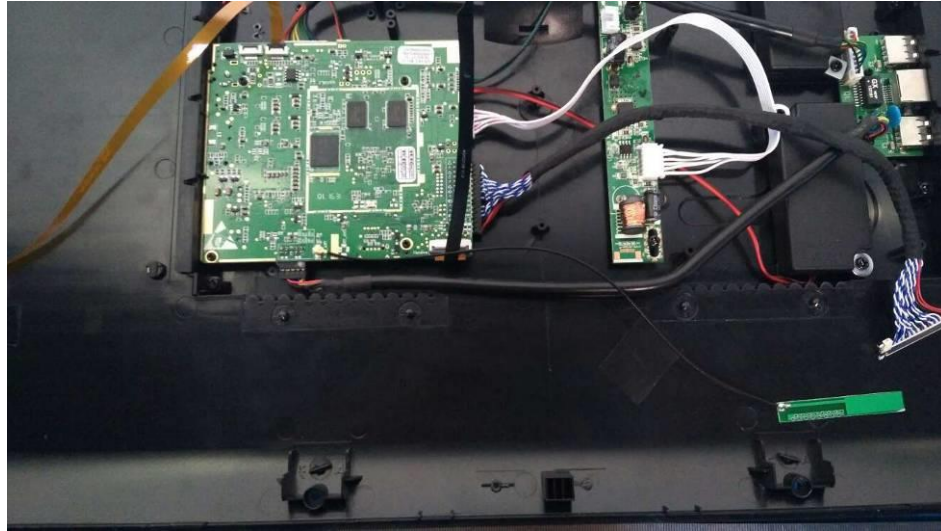

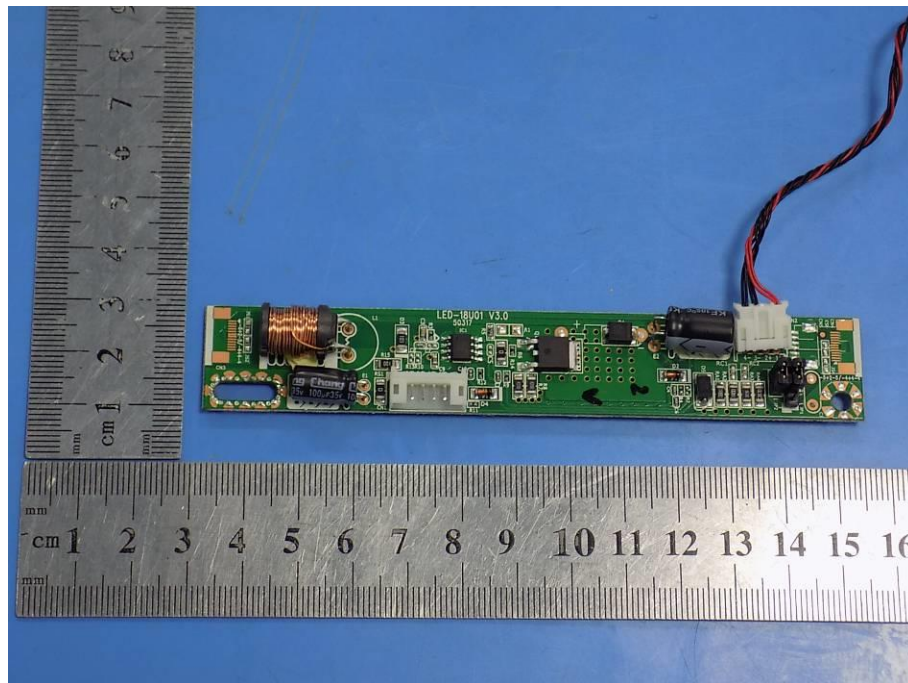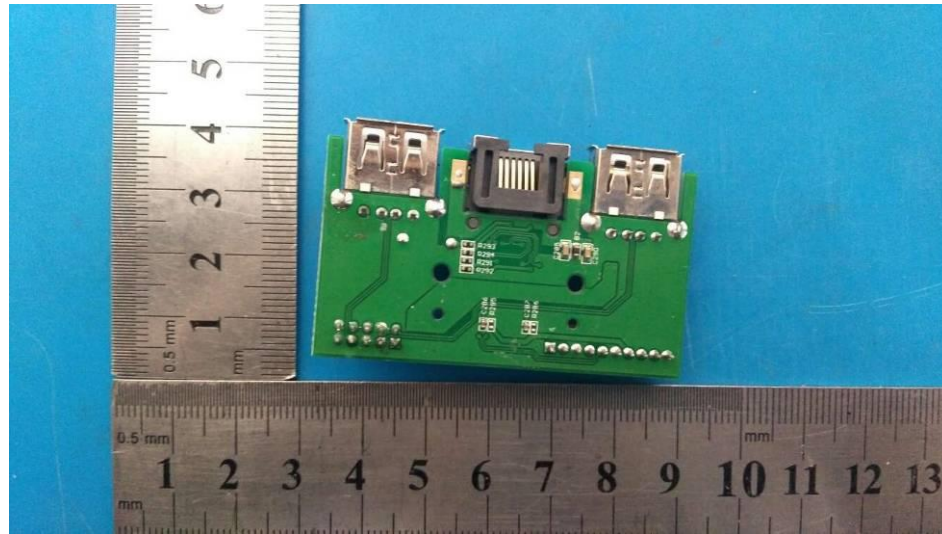

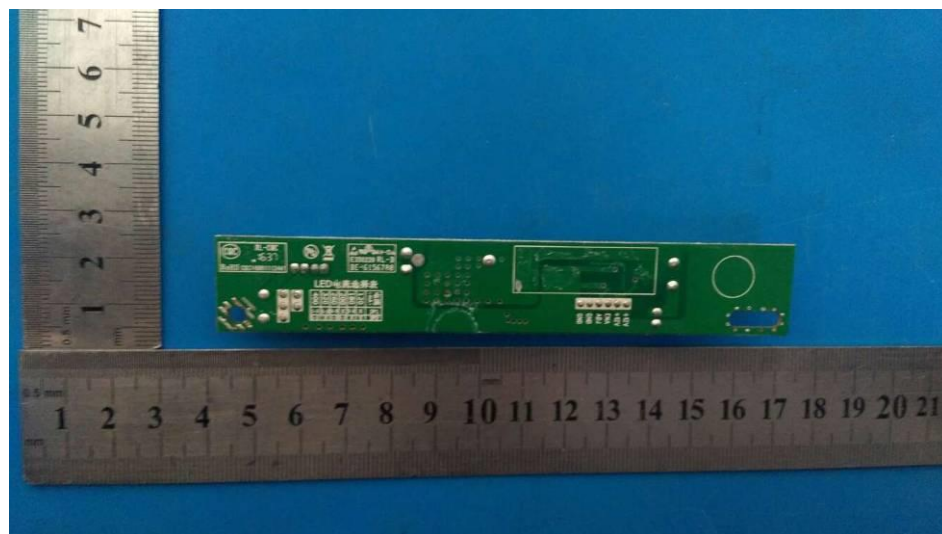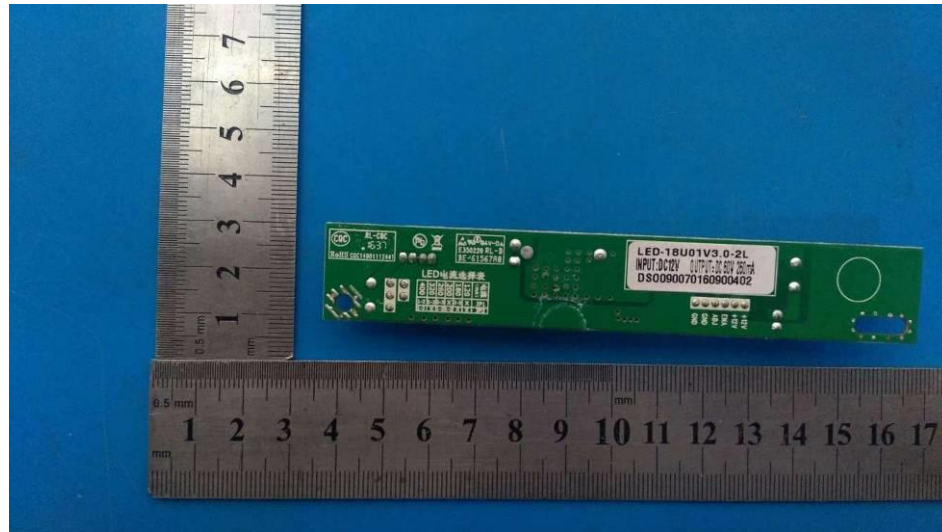





Annex I

BVS-SA070	BVS-SA080	BVS-SA970	BVS-SA102
BVS-YA101	BVS-YA101-3G	BVS-YA101-IPS	BVS-YR101-IPS
BVS-SA126	BVS-ZA133	BVS-ZR133	BVS-ZA140
BVS-ZR140	BVS-ZA156	BVS-ZR156	BVS-SA156
BVS-SR156	BVS-PR156	BVS-PW156	BVS-ZA185
BVS-ZR185	BVS-PR185	BVS-PW185	BVS-AC185
BVS-PR19	BVS-PW19	BVS-YR215	BVS-ZR215
BVS-PR215	BVS-PW215	BVS-AC215	BVS-ZPR215
BVS-PR22	BVS-PW22	BVS-ZR236	BVS-ZR270
BVS-ZR320	BVS-GR370	BVS-GW370	BVS-GR40
BVS-GW40	BVS-GR420	BVS-GW420	BVS-GR460
BVS-GW460	BVS-GR470	BVS-GW470	BVS-GR490
BVS-GW490	BVS-GR50	BVS-GW50	BVS-GR60
BVS-GW60	BVS-GR650	BVS-GW650	BVS-GR70
BVS-GW7	BVS-GR75	BVS-GW75	BVS-GR80
BVS-GW80	BVS-GR82	BVS-GW82	BVS-GR85
BVS-GW85	BVS-GR86	BVS-GW86	BVS-056D
BVS-070M1	BVS-070M1T	BVS-070M2	BVS-070M2T
BVS-070M3	BVS-070M3T	BVS-070M4	BVS-070M4T
BVS-070M5	BVS-070M5T	BVS-070M6	BVS-070M6T
BVS-070M7	BVS-070M7T	BVS-070M8	BVS-070M8T
BVS-070A9	BVS-080A1	BVS-080A2	BVS-080A5
BVS-080M1	BVS-080M1T	BVS-080M2	BVS-080M2T
BVS-080M3	BVS-080M3T	BVS-080M4	BVS-080M4T
BVS-080M5	BVS-080M5T	BVS-080M6	BVS-080M6T
BVS-080M7	BVS-080M7T	BVS-080M8	BVS-080M8T
BVS-080M9	BVS-080M9T	BVS-080M9	BVS-080M9
TBVS-080M10	BVS-080M10T	BVS-080M11	BVS-080M11T

Annex II

BVS-080M12	BVS-080M12T	BVS-080A1	BVS-080A2
BVS-080A3	BVS-080A5	BVS-080A6	BVS-080A8
BVS-080A9	BVS-10M1	BVS-10M1T	BVS-10M2
BVS-10M2T	BVS-10M3	BVS-10M3T	BVS-10M4
BVS-10M4T	BVS-10M5	BVS-10M5T	BVS-10M6
BVS-10M6T	BVS-10M7	BVS-10M7T	BVS-10M9
BVS-10M9T	BVS-12A1	BVS-12A2	BVS-12A3
BVS-12A4	BVS-12A5	BVS-12A6	BVS-12A7
BVS-12A8	BVS-121M1	BVS-121M1T	BVS-121M2
BVS-121M2T	BVS-121M3	BVS-121M3T	BVS-121M4U
BVS-15M1	BVS-15M1T	BVS-15M2	BVS-15M2T
BVS-15M3	BVS-15M3T	BVS-15M5	BVS-15M5T
BVS-17A2	BVS-17M1	BVS-17M1T	BVS-17M2
BVS-17M2T	BVS-19A1	BVS-19A2	BVS-19M1
BVS-19M1T	BVS-19M2	BVS-19M2T	BVS-19M3
BVS-19M3T	BVS-19M5	BVS-19M5T	BVS-215M1
BVS-215M1T	BVS-YR121	BVS-YR125	BVS-YR133
BVS-YR140	BVS-YR156	BVS-YR185	BVS-YR19
BVS-YR22	BVS-YR236	BVS-YR270	BVS-YR320
BVS-YRM101	BVS-YRM121	BVS-YRM125	BVS-YRM133
BVS-YRM140	BVS-YRM156	BVS-YRM185	BVS-YRM215
BVS-YRM236	BVS-YRM27	BVS-YRM32	BVS-M080
BVS-M101	BVS-M104	BVS-M121	BVS-M125
BVS-M133	BVS-M140	BVS-M150	BVS-M156
BVS-M170	BVS-M185	BVS-M190	BVS-M19.5
BVS-M215	BVS-M220	BVS-M230	BVS-M236
BVS-M240	BVS-M270		

-----END OF REPORT-----