

TEST REPORT

FCC ID: 2AKSAMOVIC-A

Product: Mobile phone

Model No.: A4001, A4002, A4003, A4004, A4005, A4501, A4502, A4503, A4504, A4505, A5001, A5002, A5003, A5004, A5005, A5501, A5502, A5503, A5504, A5505, A6001, A6002, A6003, A6004, A6005

Trade mark: MOVIC

Report No.: TCT170810E006

Issued Date: Aug. 14, 2017

Issued for:

Shenzhen YLWD Technology co., LTD

RM1002.A.Haisong BLD.RDTairan. FuTian District Shenzhen, China

Issued By:

Shenzhen Tongce Testing Lab

1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District, Shenzhen, Guangdong, China

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab. This document may be altered or revised by Shenzhen Tongce Testing Lab personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary	4
3. EUT Description.....	5
4. Test Methodology	6
4.1. Decision of Final Test Mode	6
4.2. EUT System Operation.....	6
5. Setup of Equipment under Test	7
5.1. Description of Support Units	7
5.2. Configuration of System Under Test	8
6. Facilities and Accreditations	9
6.1. Facilities.....	9
6.2. Measurement Uncertainty.....	9
7. Emission Test	10
7.1. Conducted Emission at Mains Terminals	10
7.2. Radiated Emission.....	14
8. Photographs of Test Configuration	21
9. Photographs of EUT	23

1. Test Certification

Product:	Mobile phone
Model No.:	A4001, A4002, A4003, A4004, A4005, A4501, A4502, A4503, A4504, A4505, A5001, A5002, A5003, A5004, A5005, A5501, A5502, A5503, A5504, A5505, A6001, A6002, A6003, A6004, A6005
Applicant:	Shenzhen YLWD Technology co., LTD
Address:	RM1002.A.Haisong BLD.RDTairan. FuTian District Shenzhen, China
Manufacturer:	Shenzhen YLWD Technology co., LTD
Address:	RM1002.A.Haisong BLD.RDTairan. FuTian District Shenzhen, China
Test Voltage:	AC 120 V/ 60 Hz, DC 5 V (PC Input AC 120 V/ 60 Hz)
Date of Test:	Aug. 09, 2017 ~ Aug. 11, 2017
Applicable Standards:	47 CFR FCC Part 15 Subpart B: 2016 ANSI C63.4: 2014

The above equipment has been tested by Shenzhen Tongce Testing Lab and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Jerry

Date: Aug. 11, 2017

Check By:

Zen Zhou

Date: Aug. 14, 2017

Approved By:

Tomsin

Date: Aug. 14, 2017

2. Test Result Summary

Emission		
Test Method	Item	Result
FCC 47 CFR Part 15 Subpart B	Conducted Emission at Mains Terminals	Pass
	Radiated Emission	Pass

Note:

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. The information of measurement uncertainty is available upon the customer's request.

3. EUT Description

Product Name:	Mobile phone
Model No.:	A4001
Product Parameter:	Input: AC 100-240 V, 50/60 Hz, 0.15 A Output: DC 5.0 V --- 1.0 A
AC Mains:	<input type="checkbox"/> Shielded <input type="checkbox"/> Unshielded, <input type="checkbox"/> Detachable <input type="checkbox"/> Un-detachable <input checked="" type="checkbox"/> Not applicable <input type="checkbox"/> Length:
USB Line:	<input type="checkbox"/> Shielded <input checked="" type="checkbox"/> Unshielded, <input checked="" type="checkbox"/> Detachable <input type="checkbox"/> Un-detachable <input type="checkbox"/> Not applicable <input checked="" type="checkbox"/> Length: 1 m

Model(s) List

No.	Model Number	Tested With
1	A4001	<input checked="" type="checkbox"/>
Other models	A4002, A4003, A4004, A4005, A4501, A4502, A4503, A4504, A4505, A5001, A5002, A5003, A5004, A5005, A5501, A5502, A5503, A5504, A5505, A6001, A6002, A6003, A6004, A6005	<input type="checkbox"/>

Note: A4001 is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names. So the test data of A4001 can represent the remaining models.

4. Test Methodology

4.1. Decision of Final Test Mode

The EUT was tested together with the thereafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed:

Test Mode
Mode 1: Charging + Camera Shooting
Mode 2: Charging + TF Card Playing
Mode 3: Charging + Memory Card Playing
Mode 4: Data Transmitting

The following test mode was found to produce the highest emission level.

The Worst Test Mode		
Emission	Conducted Emission	Radiated Emission
	Mode 4: Data Transmitting	Mode 4: Data Transmitting

4.2. EUT System Operation

1. Set up EUT with the support equipments.
2. Make sure the EUT work normally during the test.

5. Setup of Equipment under Test

5.1. Description of Support Units




The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
PC	Inspiron 3668	CN-04T4P2-C13 32-26C-0013	/	Dell
Monitor	SE1918HV	CN-0YVJCX-FCC 00-75D-AUAB-A0 0	/	Dell
Mouse	MS116p	CN-009NK2-7382 6-74M-0QI9	/	Dell
Keyboard	KB216t	CN-0RKR0N-716 16-75I-0CYQ-A0 3	/	Dell
TF Card	SDSDU-016G	/	/	SanDisk

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. Configuration of System Under Test

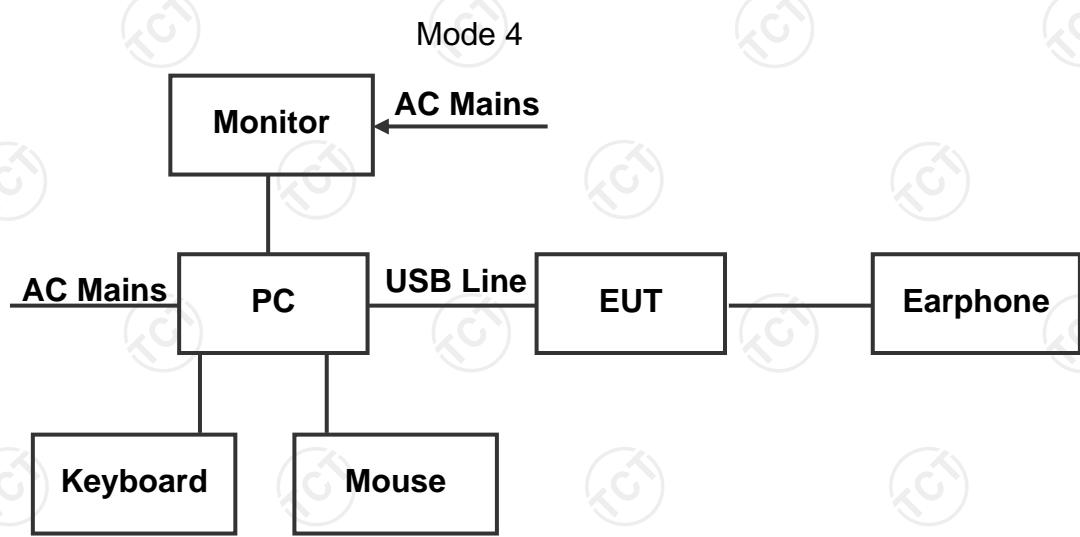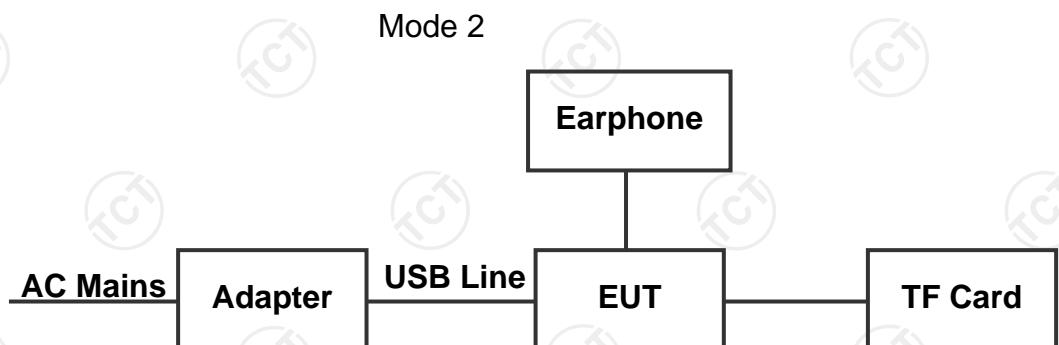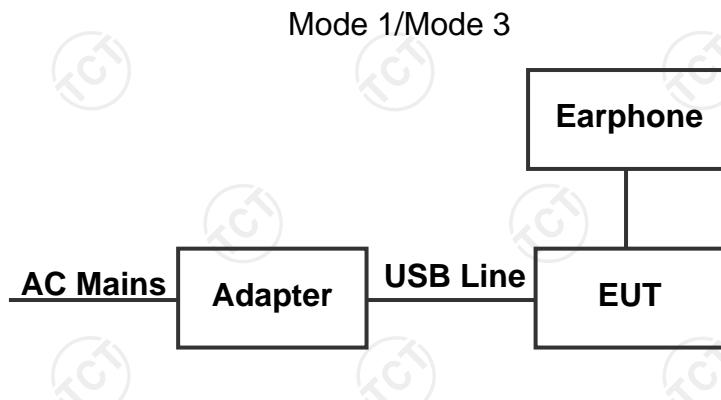

(EUT: Mobile phone)

6. Facilities and Accreditations

6.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

Test Firm Registration Number: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	MU
1.	Temperature	±0.1 °C
2.	Humidity	±1.0 %
3.	Spurious Emissions, Conducted	±2.56 dB
4.	All Emissions, Radiated	±4.28 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

7. Emission Test

7.1. Conducted Emission at Mains Terminals

7.1.1. Test Specification

Test Requirement:	FCC 47 CFR Part 15 Subpart B
Test Method:	ANSI C63.4: 2014
Frequency Range:	150 kHz to 30 MHz

7.1.2. Limits

Frequency (MHz)	Class B dB(uV)	
	Quasi-peak	Average
0.15 - 0.5	66 – 56 ^a	56 – 46 ^a
0.50 - 5.0	56	46
5.0 - 30.0	60	50

a. Decreases with the logarithm of the frequency

7.1.3. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100139	Oct. 13, 2017
LISN	Schwarzbeck	NSLK 8126	8126453	Oct. 13, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.1.4. Test Method

The AMN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN

7.1.5. Block Diagram of Test Setup

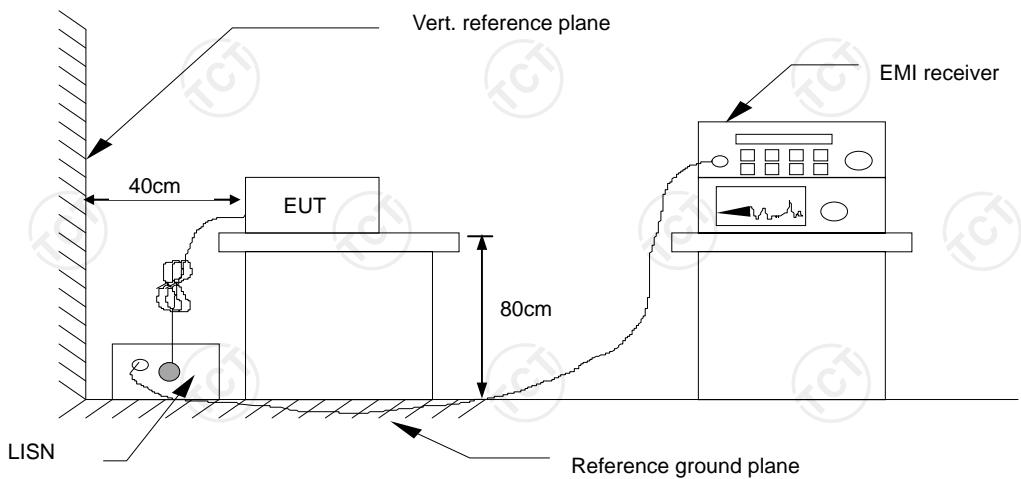

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.6. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 55 %	Press.: 96 kPa
Test Mode:	Mode 1, Mode 2, Mode 3, Mode 4		
Test Voltage:	AC 120 V/ 60 Hz, DC 5 V (PC Input AC 120 V/ 60 Hz)		
Test Result:	Pass		

Note:

L1 = Live Line / N = Neutral Line

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Correct Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)


Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. =Quasi-Peak AVG =average


* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Please refer to following diagram for individual

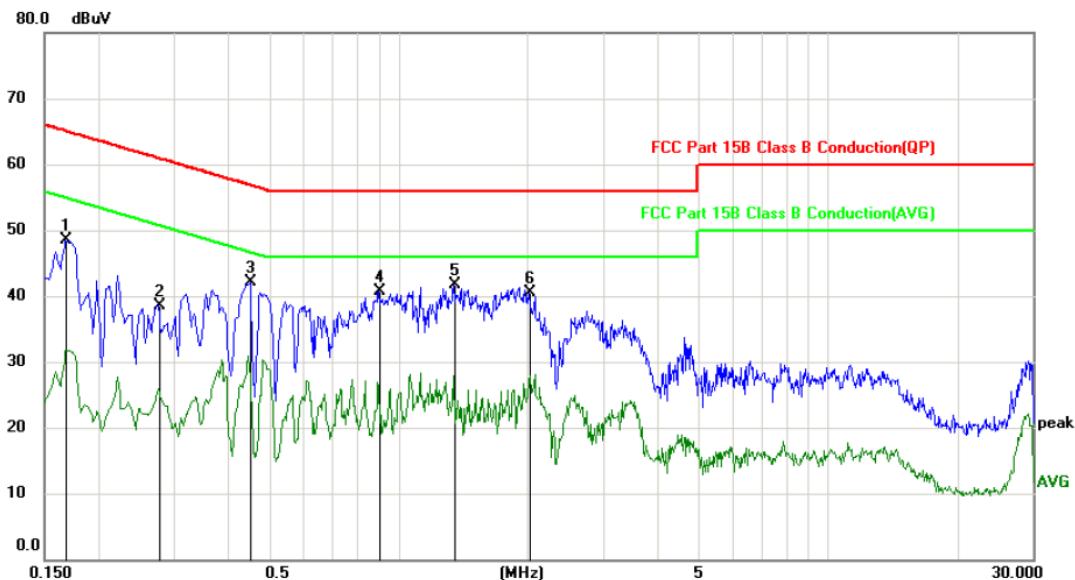

Site: **L1** Phase: **L1** Temperature: 25
 Limit: FCC Part 15B Class B Conduction(QP) Power: Humidity: 55%
 Mode: Data Transmitting
 Note: DC 5V(PC Input AC 120V/60Hz)

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV	Limit dBuV	Over	
							Detector	Comment
1	0.1680	46.95	1.47	48.42	65.06	-16.64	peak	
2	0.2760	37.02	1.41	38.43	60.94	-22.51	peak	
3	0.4515	40.77	1.32	42.09	56.85	-14.76	peak	
4	0.9015	39.40	1.21	40.61	56.00	-15.39	peak	
5 *	1.3515	40.37	1.37	41.74	56.00	-14.26	peak	
6	2.0175	38.83	1.68	40.51	56.00	-15.49	peak	

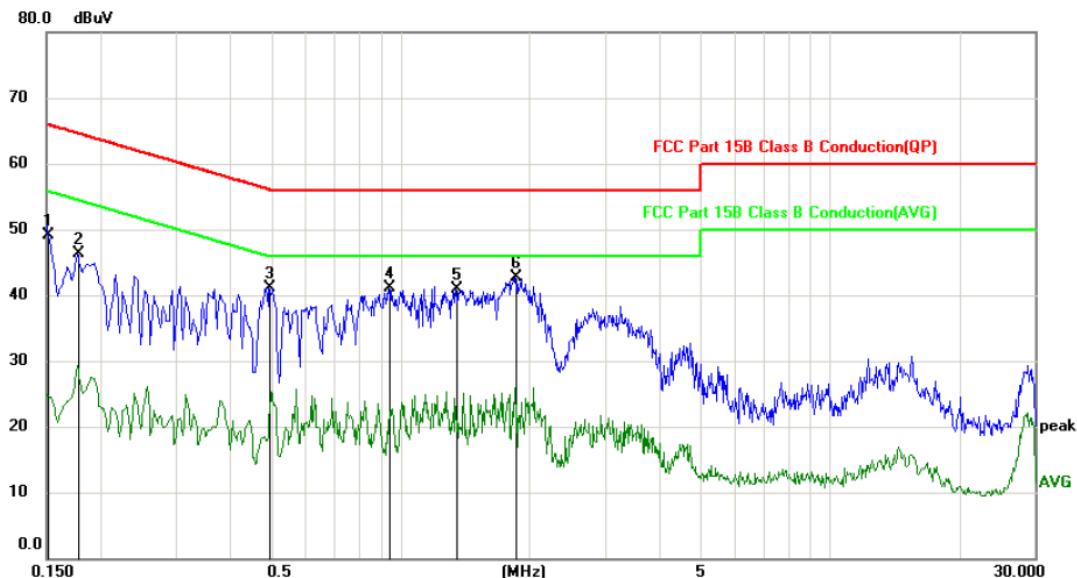

Site: Phase: **N** Temperature: 25
 Limit: FCC Part 15B Class B Conduction(QP) Power: Humidity: 55 %
 Mode: Data Transmitting
 Note: DC 5V(PC Input AC 120V/60Hz)

No.	Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Over	Comment
			dBuV	dB	dBuV	dB	Detector	
1	0.1516	47.66	1.47	49.13	65.91	-16.78	peak	
2	0.1770	44.78	1.46	46.24	64.63	-18.39	peak	
3	0.4965	39.83	1.30	41.13	56.06	-14.93	peak	
4	0.9420	39.92	1.21	41.13	56.00	-14.87	peak	
5	1.3515	39.62	1.37	40.99	56.00	-15.01	peak	
6 *	1.8510	41.13	1.62	42.75	56.00	-13.25	peak	

7.2. Radiated Emission

7.2.1. Test Specification

Test Requirement:	FCC 47 CFR Part 15 Subpart B
Test Method:	ANSI C63.4: 2014
Frequency Range:	30 MHz to 6000 MHz
Measurement Distance:	3 m
Antenna Polarization:	Horizontal & Vertical

7.2.2. Limits

Below 1 GHz

Frequency (MHz)	Class B (at 3m)	
	dBuV/m	
30 ~ 88		40.0
88 ~ 216		43.5
216 ~ 960		46.0
960 ~ 1000		54.0

Above 1 GHz

Frequency (MHz)	Peak Value (at 3m)	Average (at 3m)
	dBuV/m	dBuV/m
Above 1GHz	74.0	54.0

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level $\text{dB}(\mu\text{V}/\text{m}) = 20 \log \text{Emission level } (\mu\text{V}/\text{m})$.

7.2.3. Test Instruments


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESVD	100008	Oct. 13, 2017
Spectrum Analyzer	R&S	FSEM	848597-001	Oct. 13, 2017
Amplifier	HP	8447D	2727A05017	Oct. 13, 2017
Amplifier	EM	EM30265	07032613	Oct. 13, 2017
Broadband Antenna	Schwarzbeck	VULB9163	340	Oct. 13, 2017
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Oct. 13, 2017

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.2.4. Test Method

Measurements were made in a 3-meter semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. Block Diagram of Test Setup.

7.2.5. Block Diagram of Test Setup

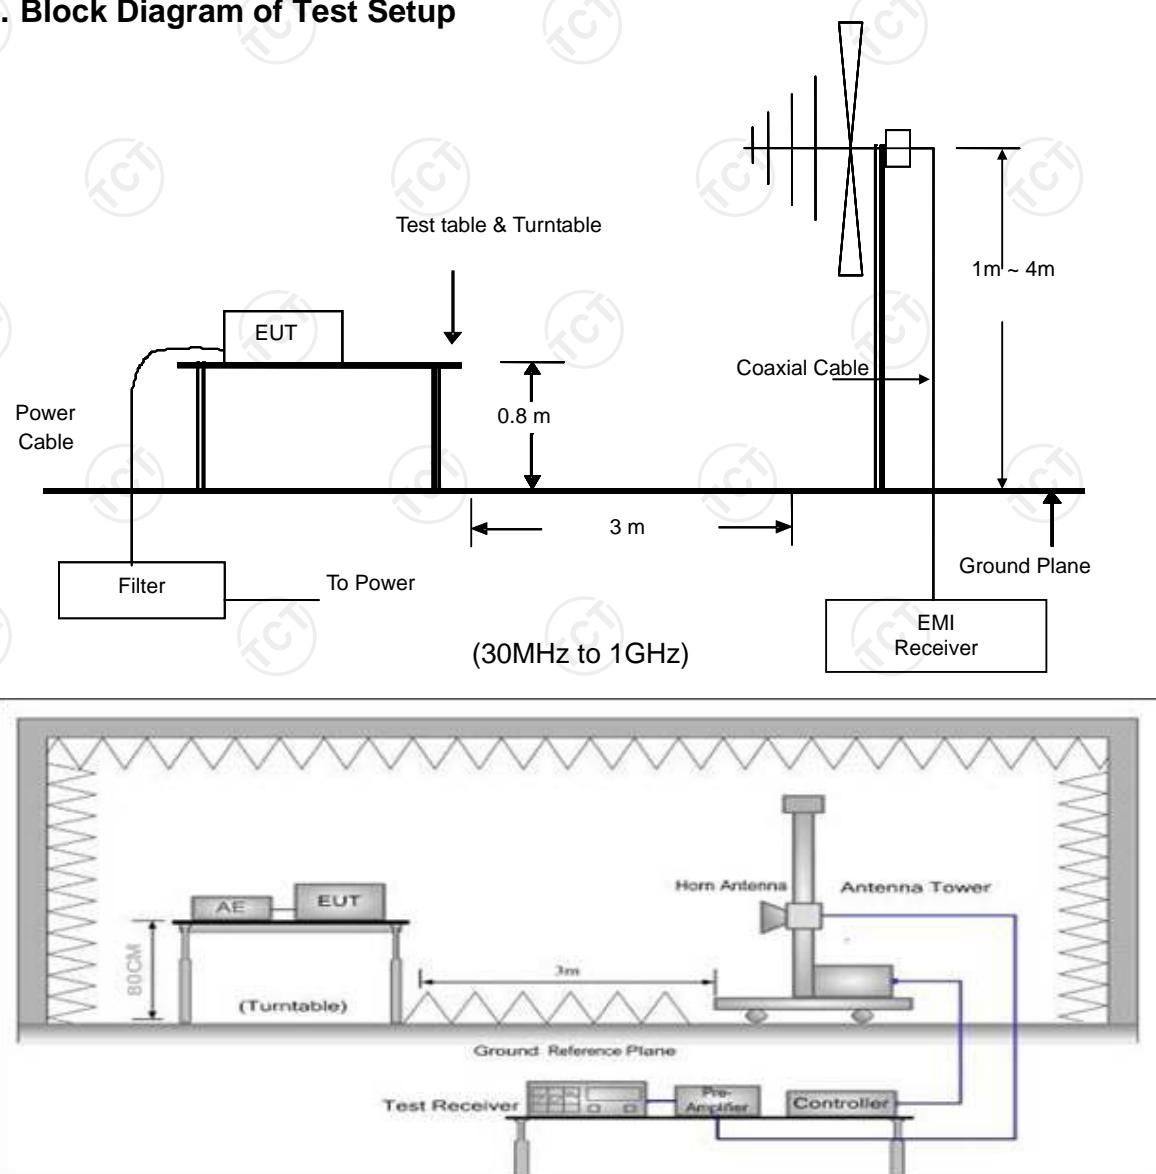

(Above 1GHz)
For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

7.2.6. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 55 %	Press.: 96 kPa
Test Mode:	Mode 1, Mode 2, Mode 3, Mode 4		
Test Voltage:	AC 120 V/ 60 Hz, DC 5 V (PC Input AC 120 V/ 60 Hz)		
Test Result:	Pass		

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss-AMP factor


Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

* is meaning the worst frequency has been tested in the test frequency range

Please refer to following diagram for individual

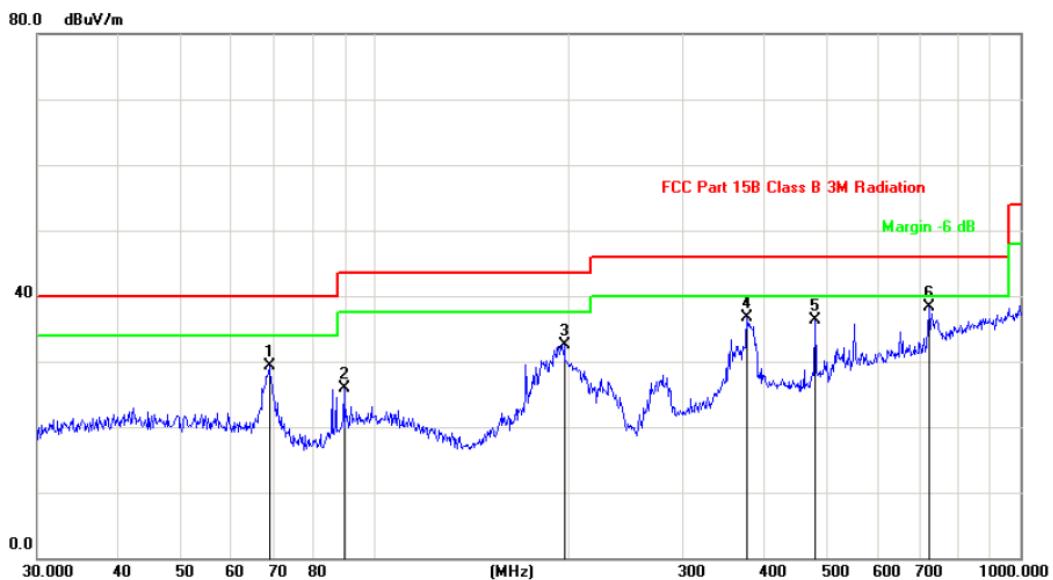

Site

Polarization: **Horizontal**

Temperature: 25

Limit: FCC Part 15B Class B 3M Radiation


Power:

Humidity: 55 %

Mode: Data Transmitting


Note: DC 5V(PC Input AC 120V/60Hz)

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table			
			Level	Factor	ment							
			MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree	Comment
1		68.6310	39.89	-10.60	29.29	40.00	-10.71	peak				
2		89.5899	33.84	-7.98	25.86	43.50	-17.64	peak				
3		196.5098	41.79	-9.24	32.55	43.50	-10.95	peak				
4		377.2590	39.04	-2.33	36.71	46.00	-9.29	peak				
5		480.5276	37.70	-1.38	36.32	46.00	-9.68	peak				
6	*	721.7259	34.18	4.13	38.31	46.00	-7.69	peak				

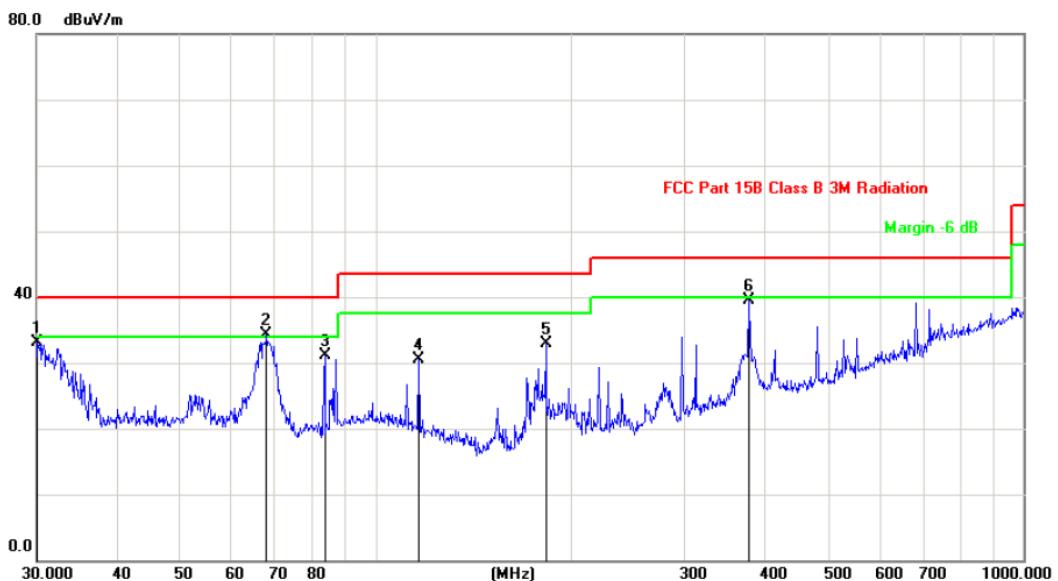


Site: Polarization: **Vertical** Temperature: 25
 Limit: FCC Part 15B Class B 3M Radiation Power: Humidity: 55 %
 Mode: Data Transmitting
 Note: DC 5V(PC Input AC 120V/60Hz)

No.	Mk.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1	30.1053	41.15	-8.01	33.14	40.00	-6.86	peak			
2 *	67.9128	44.74	-10.34	34.40	40.00	-5.60	peak			
3	83.5221	40.95	-9.94	31.01	40.00	-8.99	peak			
4	116.5400	38.99	-8.47	30.52	43.50	-12.98	peak			
5	183.2005	42.82	-9.83	32.99	43.50	-10.51	peak			
6	377.2590	41.80	-2.33	39.47	46.00	-6.53	peak			

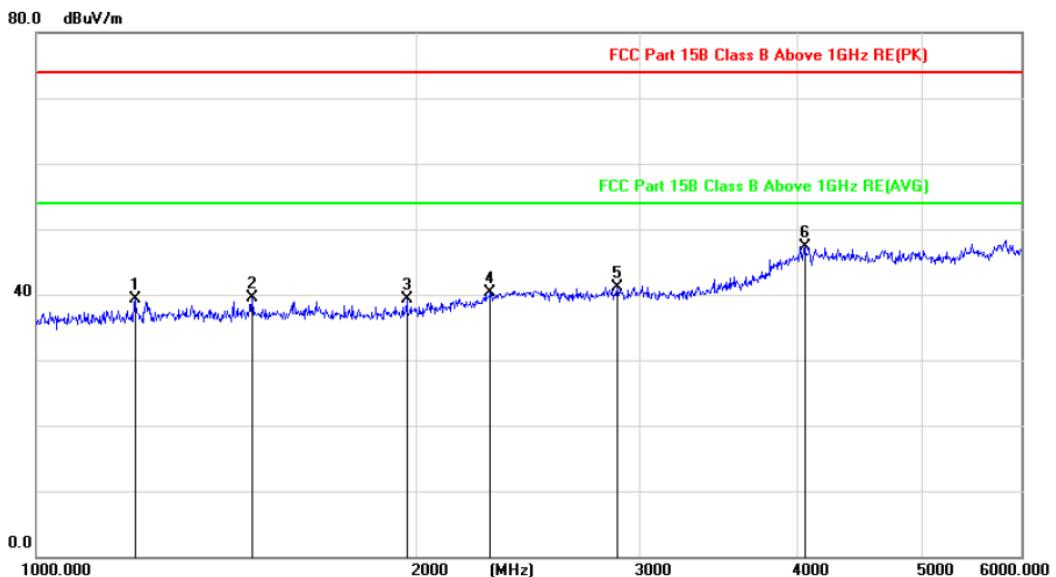

Site: Polarization: **Horizontal** Temperature: 25
 Limit: FCC Part 15B Class B Above 1GHz RE(PK) Power: Humidity: 55 %
 Mode: Data Transmitting
 Note: DC 5V(PC Input AC 120V/60Hz)

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		1196.231	51.41	-12.20	39.21	74.00	-34.79	peak		
2		1480.523	51.29	-11.74	39.55	74.00	-34.45	peak		
3		1961.485	51.00	-11.73	39.27	74.00	-34.73	peak		
4		2284.166	50.54	-10.32	40.22	74.00	-33.78	peak		
5		2878.122	50.36	-9.26	41.10	74.00	-32.90	peak		
6	*	4045.367	49.84	-2.49	47.35	74.00	-26.65	peak		

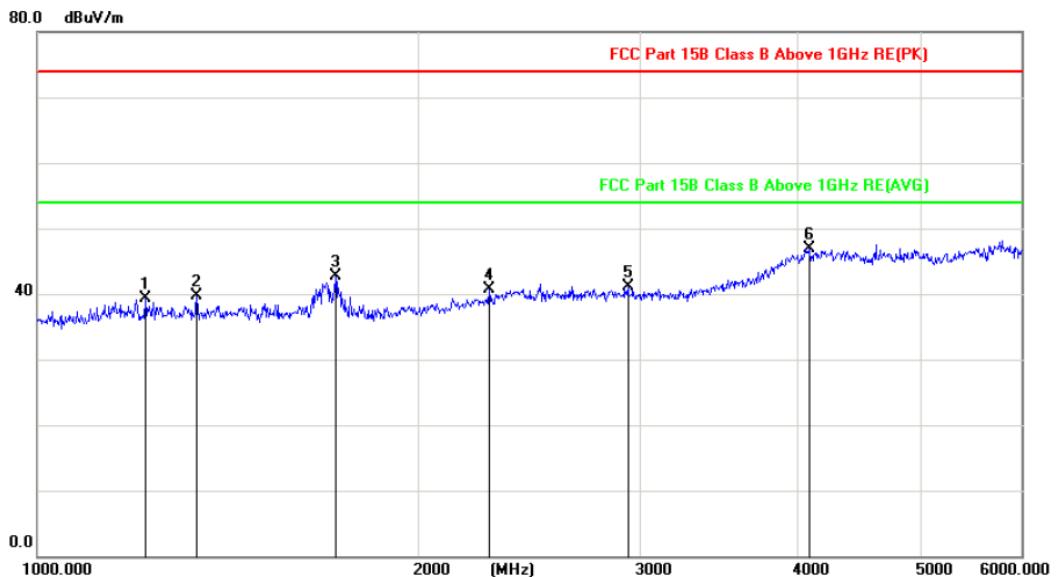

Site: Polarization: *Vertical* Temperature: 25
 Limit: FCC Part 15B Class B Above 1GHz RE(PK) Power: Humidity: 55 %
 Mode: Data Transmitting
 Note: DC 5V(PC Input AC 120V/60Hz)


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector	cm	degree
1		1217.858	51.37	-12.15	39.22	74.00	-34.78	peak		
2		1336.782	51.62	-11.86	39.76	74.00	-34.24	peak		
3		1720.996	54.76	-12.11	42.65	74.00	-31.35	peak		
4		2275.996	50.98	-10.36	40.62	74.00	-33.38	peak		
5		2930.156	50.39	-9.23	41.16	74.00	-32.84	peak		
6	*	4074.465	49.46	-2.49	46.97	74.00	-27.03	peak		


8. Photographs of Test Configuration

Conducted Emission Test View




Radiated Emission Test View

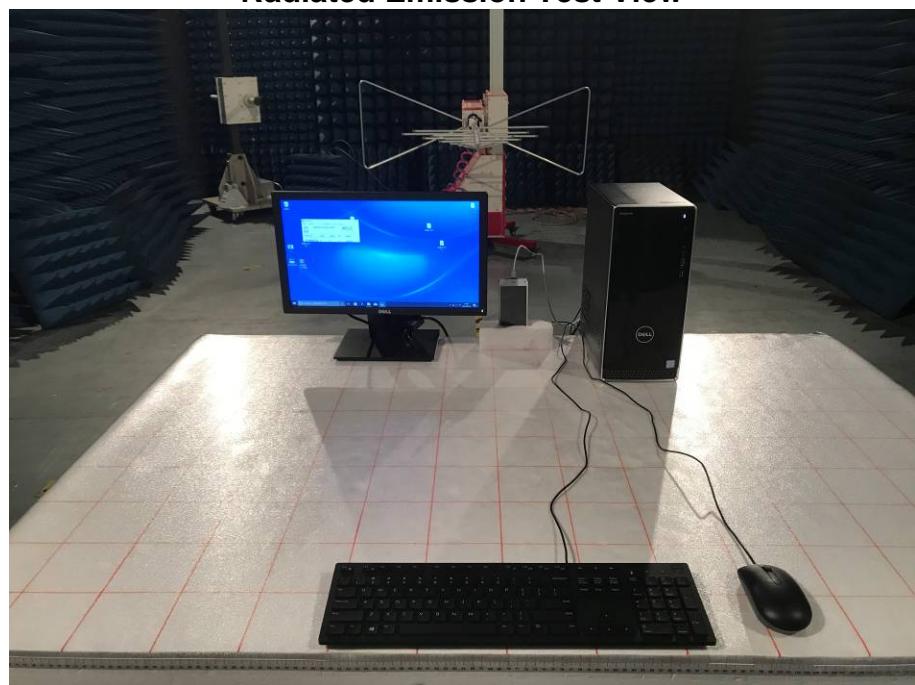


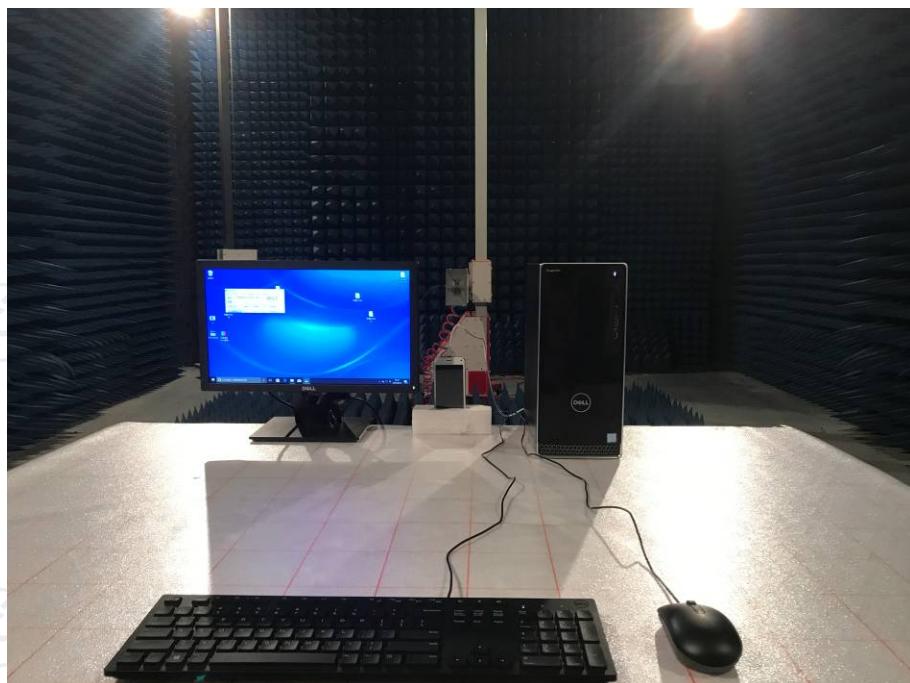


9. Photographs of EUT

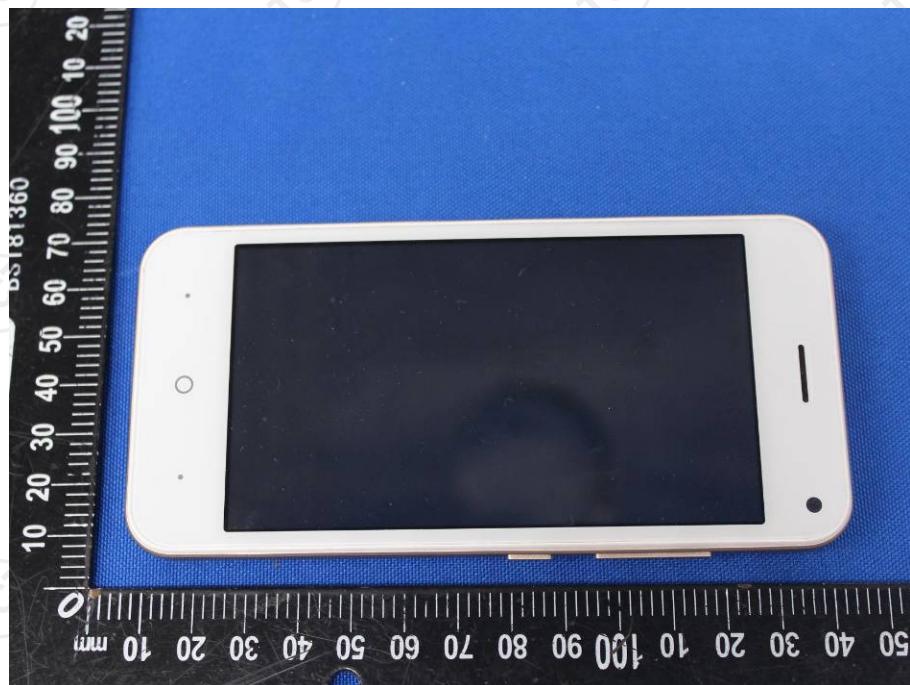







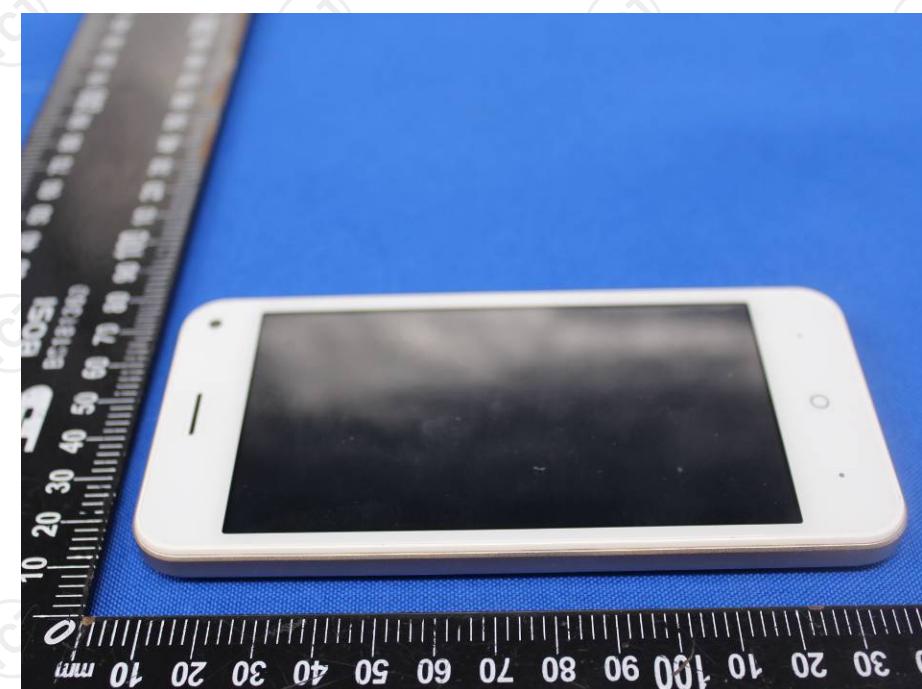



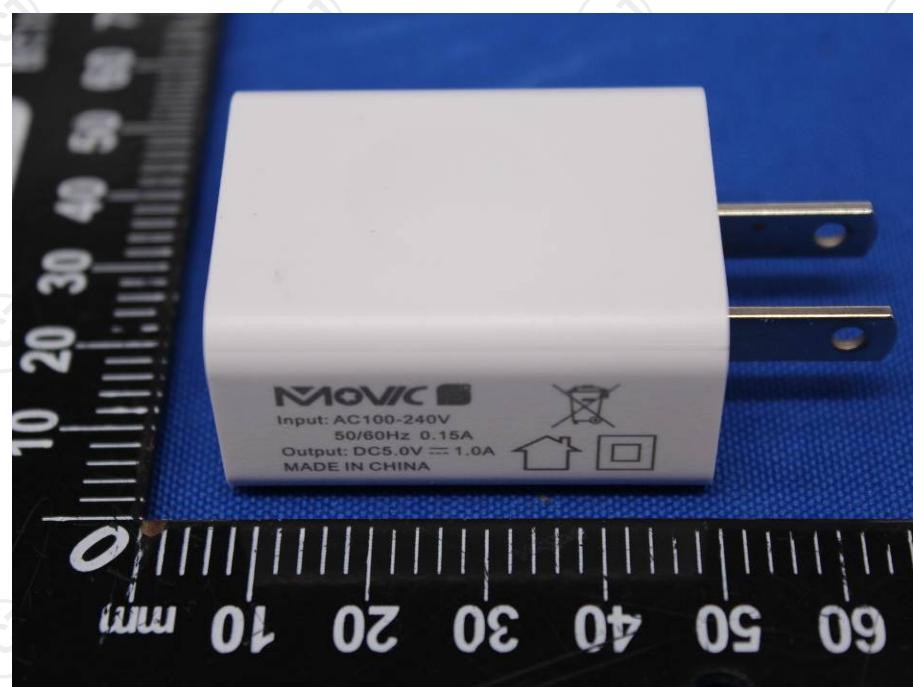




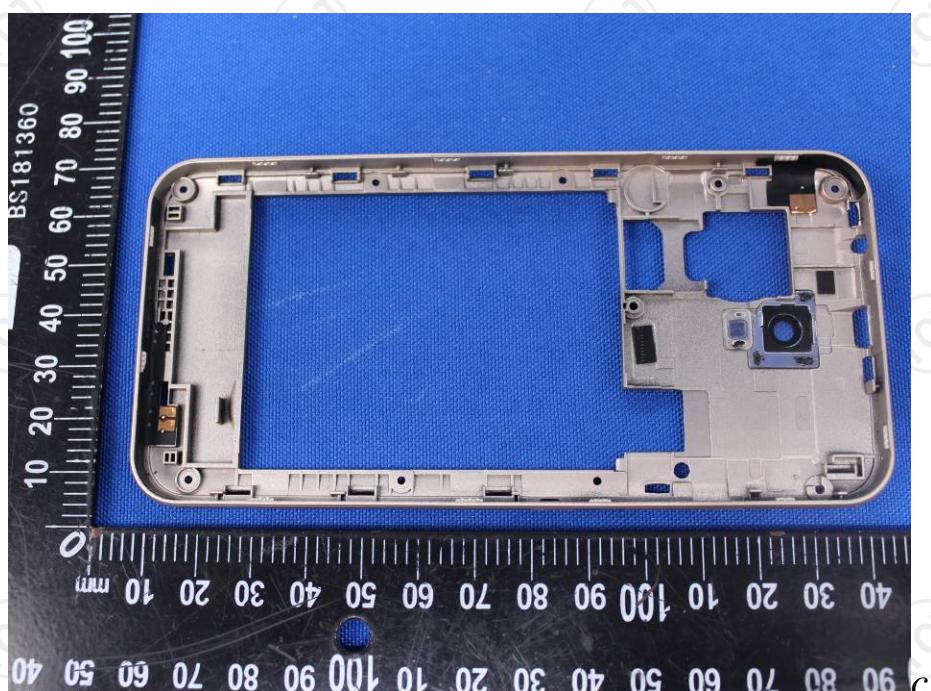

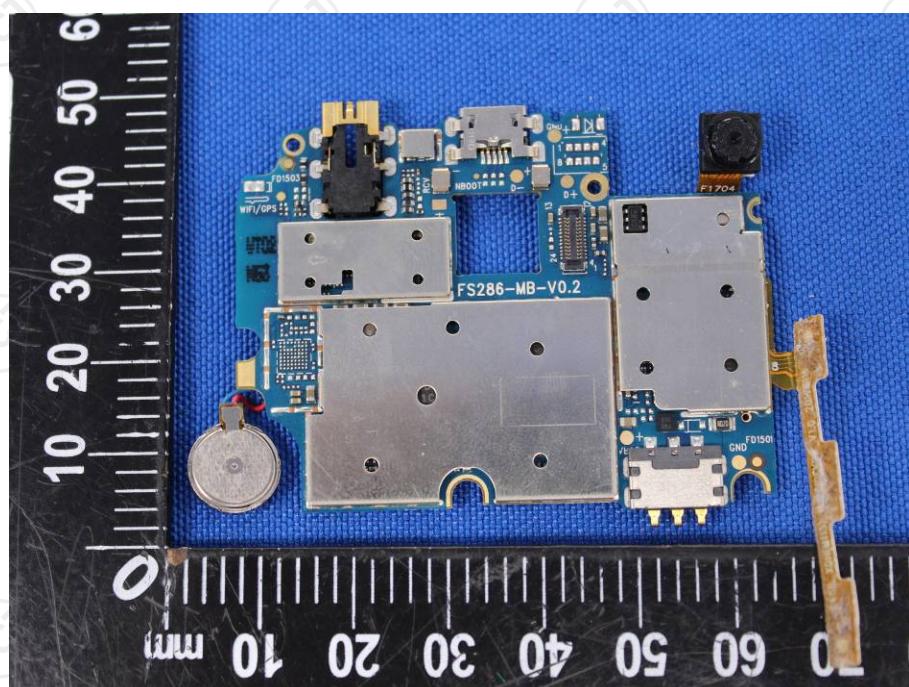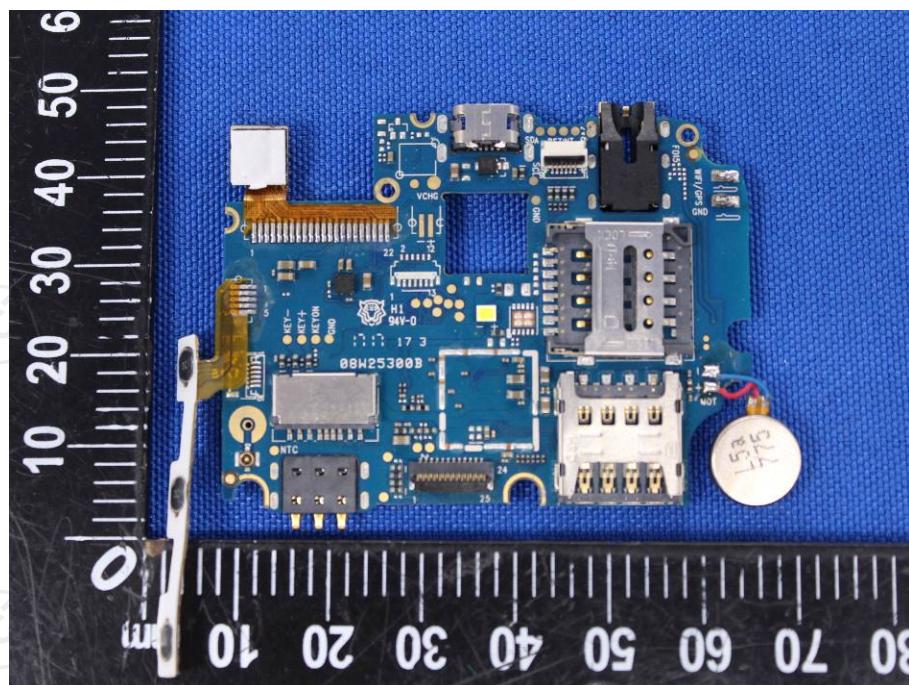

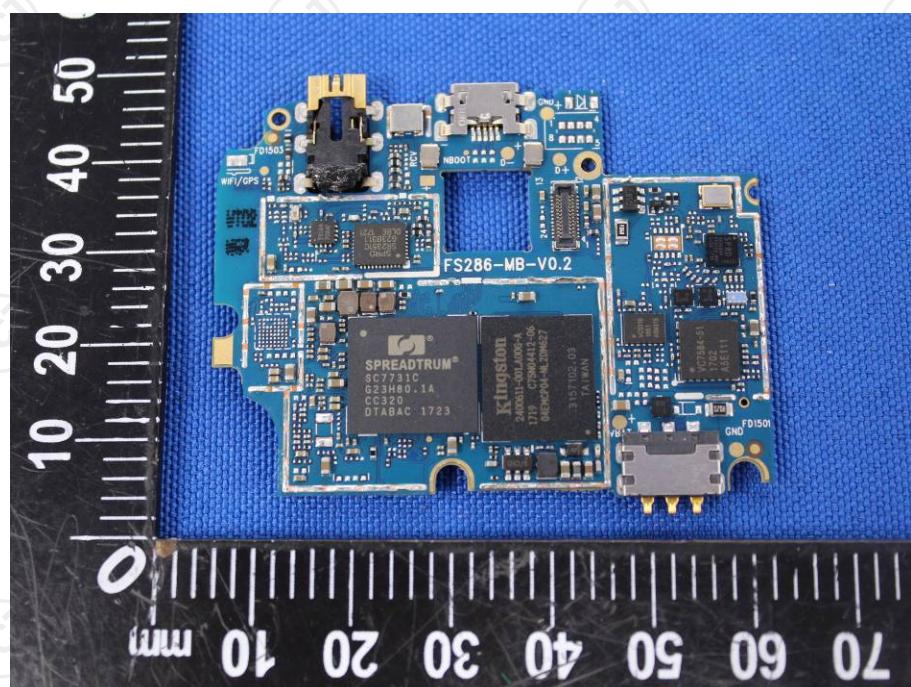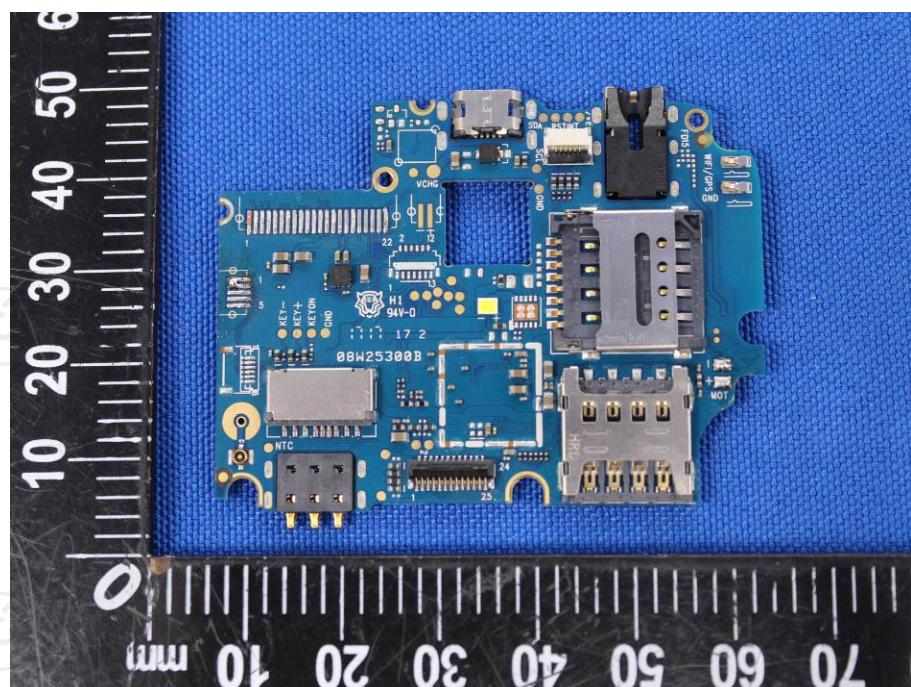

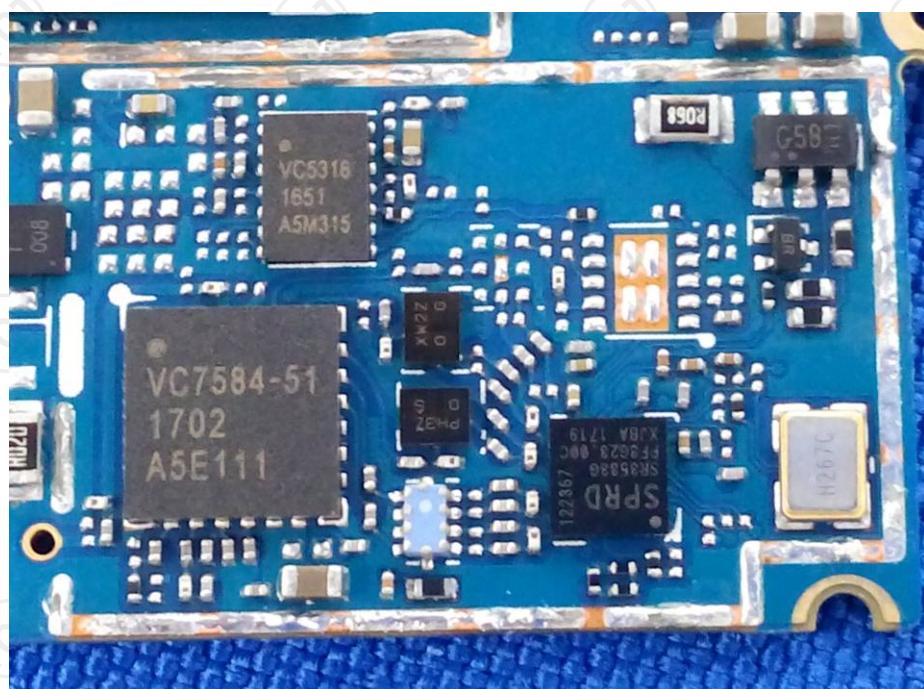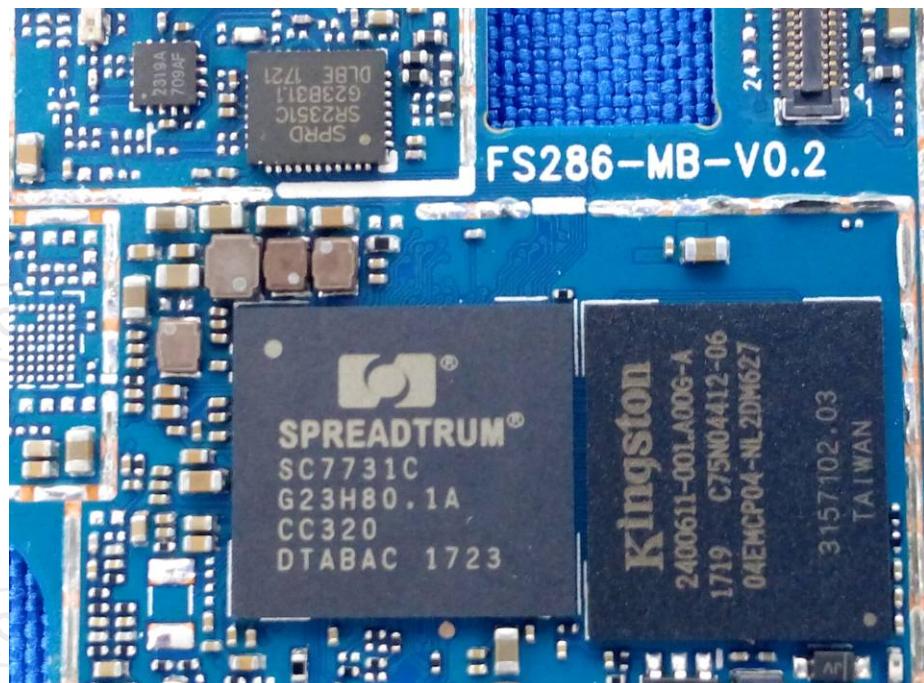



*****END OF REPORT*****