



## Shenzhen Huaxia Testing Technology Co., Ltd

1F., BlockA of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640  
Fax: +86-755-26648637  
Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V03  
Report Template Revision Date: Mar.1st, 2017

# Test Report

**Report No.:** CQASZ20190300201E-01  
**Applicant:** Innovation Sound Technology Co.,Ltd.  
**Address of Applicant:** Building 2nd/3rd/4th, Industrial Area of Huaide Cuihai Fengtang Road, Fuyong Town, Shenzhen, China  
**Manufacturer:** Innovation Sound Technology Co.,Ltd.  
**Address of Manufacturer:** Building 2nd/3rd/4th, Industrial Area of Huaide Cuihai Fengtang Road, Fuyong Town, Shenzhen, China  
**Equipment Under Test (EUT):**  
**Product:** AmazonBasics Over-Ear Bluetooth Wireless Headset  
**Model No.:** B07LBYLM7B, B07LBX3K5F  
**Brand Name:** N/A  
**FCC ID:** 2AKSL-PBH89366  
**IC:** 7540A-PBH89366  
**Standards:** 47 CFR Part 15, Subpart C  
RSS-247 Issue 2 February 2017  
RSS-Gen Issue 5 April 2018  
**Date of Test:** 2019-03-24 to 2019-04-19  
**Date of Issue:** 2019-04-19  
**Test Result :** PASS\*

**Tested By:**

*Daisy Qin*

(Daisy Qin)

**Reviewed By:**

*Aaron Ma*

(Aaron Ma)

**Approved By:**

*Jack Ai*

( Jack Ai)



\* In the configuration tested, the EUT complied with the standards specified above.

## 2 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20190300201E-01	Rev.01	Initial report	2019-04-19

### 3 Test Summary

Test Item	FCC Test Requirement	IC Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	RSS-Gen Issue 5	ANSI C63.10 2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15, Subpart C Section 15.207	RSS-Gen Issue 5	ANSI C63.10 2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	RSS 247 5.4(4)	ANSI C63.10 2013 & RSS-Gen Issue 5	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	RSS 247 5.2(1)	ANSI C63.10 2013 & RSS-Gen Issue 5	PASS
<b>99% Occupied Bandwidth</b>	/	RSS-Gen Issue 5	RSS-Gen Issue 5	PASS
<b>Power Spectral Density</b>	47 CFR Part 15, Subpart C Section 15.247 (e)	RSS 247 5.2(2)	ANSI C63.10 2013	PASS
<b>Band-edge for RF Conducted Emissions</b>	47 CFR Part 15, Subpart C Section 15.247(d)	RSS 247 5.5	ANSI C63.10 2013	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.247(d)	RSS 247 5.5	ANSI C63.10 2013	PASS
<b>Radiated Spurious Emissions</b>	47 CFR Part 15, Subpart C Section 15.205/15.209	RSS-Gen Issue 5	ANSI C63.10 2013 & RSS-Gen Issue 5	PASS
<b>Restricted bands around fundamental frequency (Radiated Emission)</b>	47 CFR Part 15, Subpart C Section 15.205/15.209	RSS-Gen Issue 5	ANSI C63.10 2013 & RSS-Gen Issue 5	PASS

## 4 Contents

	Page
1	.....
<b>2 VERSION</b>	<b>2</b>
<b>3 TEST SUMMARY</b>	<b>3</b>
<b>4 CONTENTS</b>	<b>4</b>
<b>5 GENERAL INFORMATION</b>	<b>5</b>
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF EUT .....	5
5.3 ADDITIONAL INSTRUCTIONS .....	7
5.4 TEST ENVIRONMENT .....	8
5.5 DESCRIPTION OF SUPPORT UNITS.....	8
5.6 TEST LOCATION.....	8
5.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....	9
5.8 TEST FACILITY.....	10
5.9 DEVIATION FROM STANDARDS .....	10
5.10 ABNORMALITIES FROM STANDARD CONDITIONS .....	10
5.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	10
5.12 EQUIPMENT LIST.....	11
<b>6 TEST RESULTS AND MEASUREMENT DATA</b>	<b>12</b>
6.1 ANTENNA REQUIREMENT.....	12
6.2 CONDUCTED EMISSIONS.....	13
6.3 CONDUCTED PEAK OUTPUT POWER.....	16
6.4 6dB OCCUPY BANDWIDTH .....	19
6.5 99% OCCUPY BANDWIDTH.....	22
6.6 POWER SPECTRAL DENSITY.....	25
6.7 BAND-EDGE FOR RF CONDUCTED EMISSIONS .....	28
6.8 SPURIOUS RF CONDUCTED EMISSIONS .....	30
6.9 RADIATED SPURIOUS EMISSION.....	36
6.10 RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY.....	42
<b>7 PHOTOGRAPHS - EUT TEST SETUP</b>	<b>49</b>
7.1 RADIATED SPURIOUS EMISSION.....	49
7.2 CONDUCTED EMISSION .....	50
<b>8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS</b>	<b>51</b>

## 5 General Information

### 5.1 Client Information

Applicant:	Innovation Sound Technology Co.,Ltd.
Address of Applicant:	Building 2nd/3rd/4th, Industrial Area of Huaide Cuihai Fengtang Road, Fuyong Town, Shenzhen, China
Manufacturer:	Innovation Sound Technology Co.,Ltd.
Address of Manufacturer:	Building 2nd/3rd/4th, Industrial Area of Huaide Cuihai Fengtang Road, Fuyong Town, Shenzhen, China

### 5.2 General Description of EUT

Product Name:	AmazonBasics Over-Ear Bluetooth Wireless Headset
Model No.:	B07LBYLM7B, B07LBX3K5F
Trade Mark:	N/A
Hardware Version:	SPEC-BTH-1192-01A
Software Version:	SPEC-BTH-1192-01A
Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	5.0
Modulation Type:	GFSK
Transfer Rate:	1Mbps
Number of Channel:	40
Product Type:	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Test Software of EUT:	Bluetooth test 3(manufacturer declare )
Antenna Type:	PCB antenna
Antenna Gain:	3.3dBi
EUT Power Supply:	lithium battery:DC3.7V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz

### 5.3 Additional Instructions

**EUT Test Software Settings:**

Mode:	<input checked="" type="checkbox"/> Special software is used. <input type="checkbox"/> Through engineering command into the engineering mode. engineering command: *#*#3646633#*#*
EUT Power level:	Class1 (Power level is built-in set parameters and cannot be changed and selected)

Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.

Test Mode		Channel	Frequency(MHz)
Mode a	GFSK_1Mbps	CH0	2402
Mode b	GFSK_1Mbps	CH19	2440
Mode c	GFSK_1Mbps	CH39	2480

## 5.4 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	53 % RH
Atmospheric Pressure:	1010mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT. Note: In the process of transmitting of EUT, the duty cycle >98%.

## 5.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
PC	Lenovo	ThinkPad E450c	Provide by lab	ID
AC/DC Adapter	Lenovo	ADLX65NLC3A	Provide by lab	DOC

## 5.6 Test Location

All tests were performed at:

**Shenzhen Huaxia Testing Technology Co., Ltd.,**

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua New District, Shenzhen, Guangdong, China

## 5.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	$3 \times 10^{-8}$	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## **5.8 Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

**ISED#:** 22984

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements

- **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

- **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## **5.9 Deviation from Standards**

None.

## **5.10 Abnormalities from Standard Conditions**

None.

## **5.11 Other Information Requested by the Customer**

None.

## 5.12 Equipment List

Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2018/9/26	2019/9/25
Spectrum analyzer	R&S	FSU26	CQA-038	2018/10/28	2019/10/27
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2018/9/26	2019/9/25
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2018/11/2	2019/11/1
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2018/10/28	2020/10/27
Bilog Antenna	R&S	HL562	CQA-011	2018/9/26	2020/9/25
Horn Antenna	R&S	HF906	CQA-012	2018/9/26	2020/9/25
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2018/9/26	2020/9/25
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2018/9/26	2019/9/25
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2018/9/26	2019/9/25
Antenna Connector	CQA	RFC-01	CQA-080	2018/9/26	2019/9/25
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2018/9/26	2019/9/25
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2018/9/26	2019/9/25
EMI Test Receiver	R&S	ESPI3	CQA-013	2018/9/26	2019/9/25
LISN	R&S	ENV216	CQA-003	2018/11/5	2019/11/4
Coaxial cable	CQA	N/A	CQA-C009	2018/9/26	2019/9/25

Note:


The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 6 Test results and Measurement Data

### 6.1 Antenna Requirement

<b>Standard requirement:</b>	47 CFR Part 15C Section 15.203 /247(c), RSS-Gen Issue 5
<b>EUT Antenna:</b>	PCB Antenna
The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.3dBi.	

## 6.2 Conducted Emissions

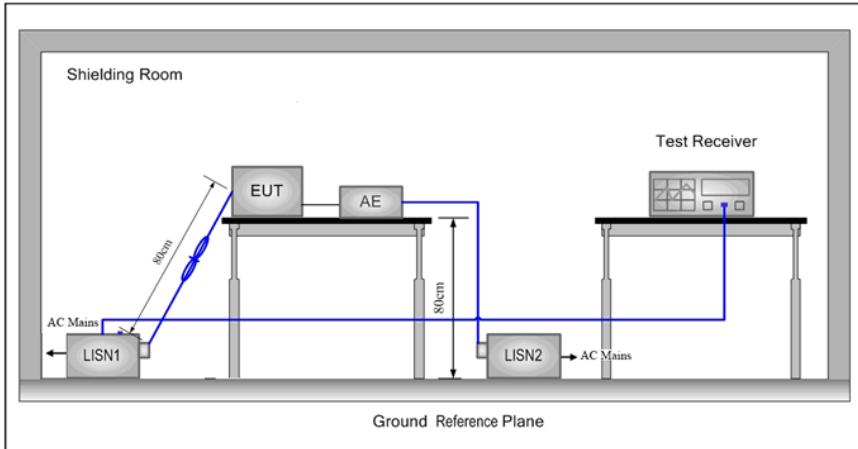
Test Requirement:	47 CFR Part 15C Section 15.207, RSS-Gen Issue 5		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak      Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2014 on conducted measurement.</li> </ol>		
Test Setup:			

Test Mode:	All mode had been tested, only the worst test "mode c" was recorded in the report.
Test Results:	Pass

**Measurement Data**

Mode c:

Live line:

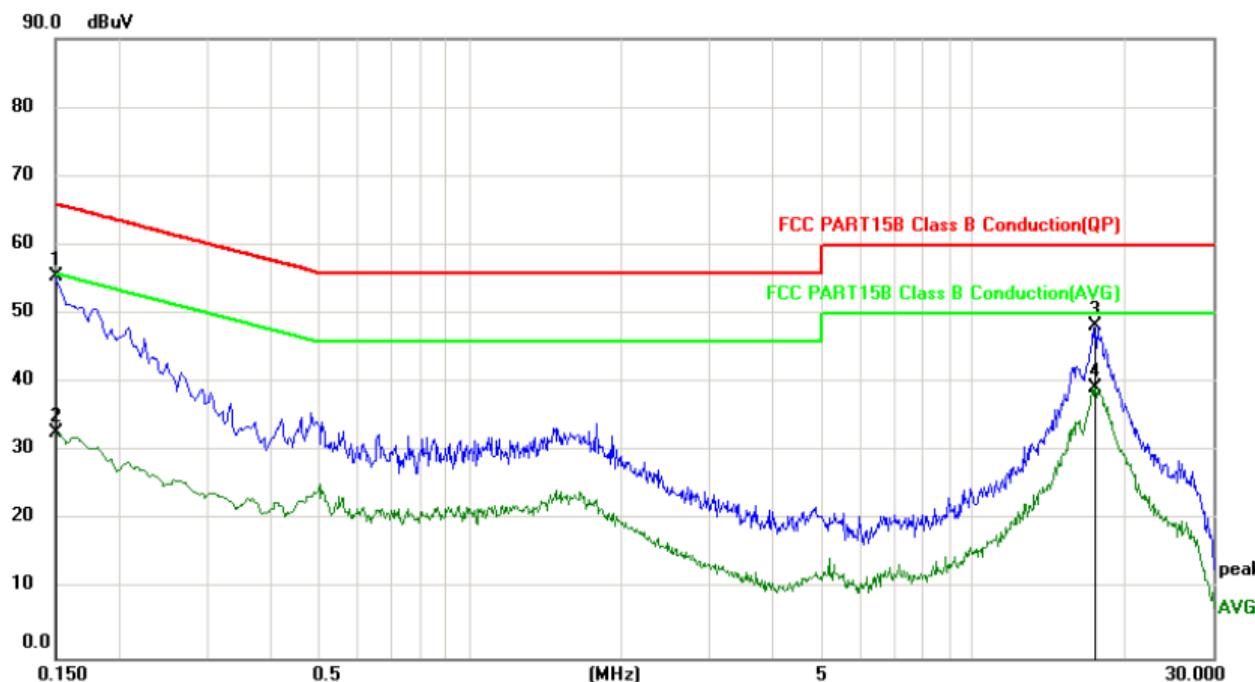


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV	dB	Detector
1	*	0.1500	45.71	9.73	55.44	66.00	-10.56 QP
2		0.1500	23.09	9.73	32.82	56.00	-23.18 AVG
3		17.5500	38.42	9.86	48.28	60.00	-11.72 QP
4		17.5500	29.47	9.86	39.33	50.00	-10.67 AVG

**Remark:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

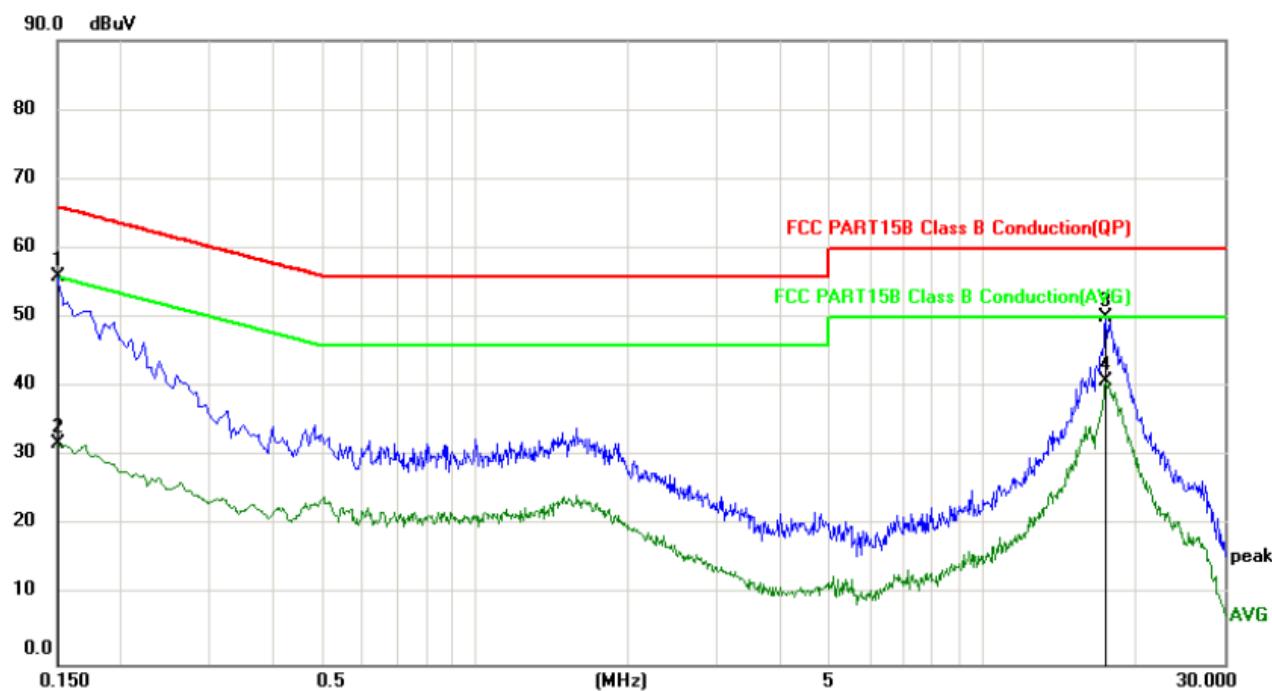


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV	dB	Detector
1		0.1500	46.16	9.79	55.95	66.00	-10.05 QP
2		0.1500	21.96	9.79	31.75	56.00	-24.25 AVG
3		17.4939	40.07	9.88	49.95	60.00	-10.05 QP
4	*	17.4939	30.92	9.88	40.80	50.00	-9.20 AVG

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.


### 6.3 Conducted Peak Output Power

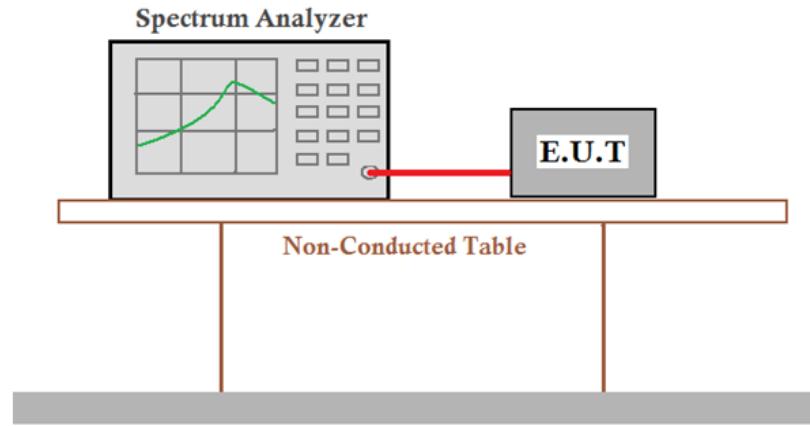Test Requirement:	47 CFR Part 15C Section 15.247 (b)(1), RSS 247 5.4(4)
Test Method:	ANSI C63.10 2013 & RSS-Gen Issue 5
Test Setup:	 <p><b>Spectrum Analyzer</b>  <b>E.U.T</b>  <b>Non-Conducted Table</b>  <b>Ground Reference Plane</b></p> <p><i>Remark: Offset=Cable loss+attenuation factor.</i></p>
Limit:	30dBm
Test Mode:	Transmitting with GFSK modulation.
Test Results:	Pass

#### Measurement Data


GFSK_1Mbps mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.14	30.00	Pass
Middle	0.54	30.00	Pass
Highest	2.42	30.00	Pass

Test plot as follows:

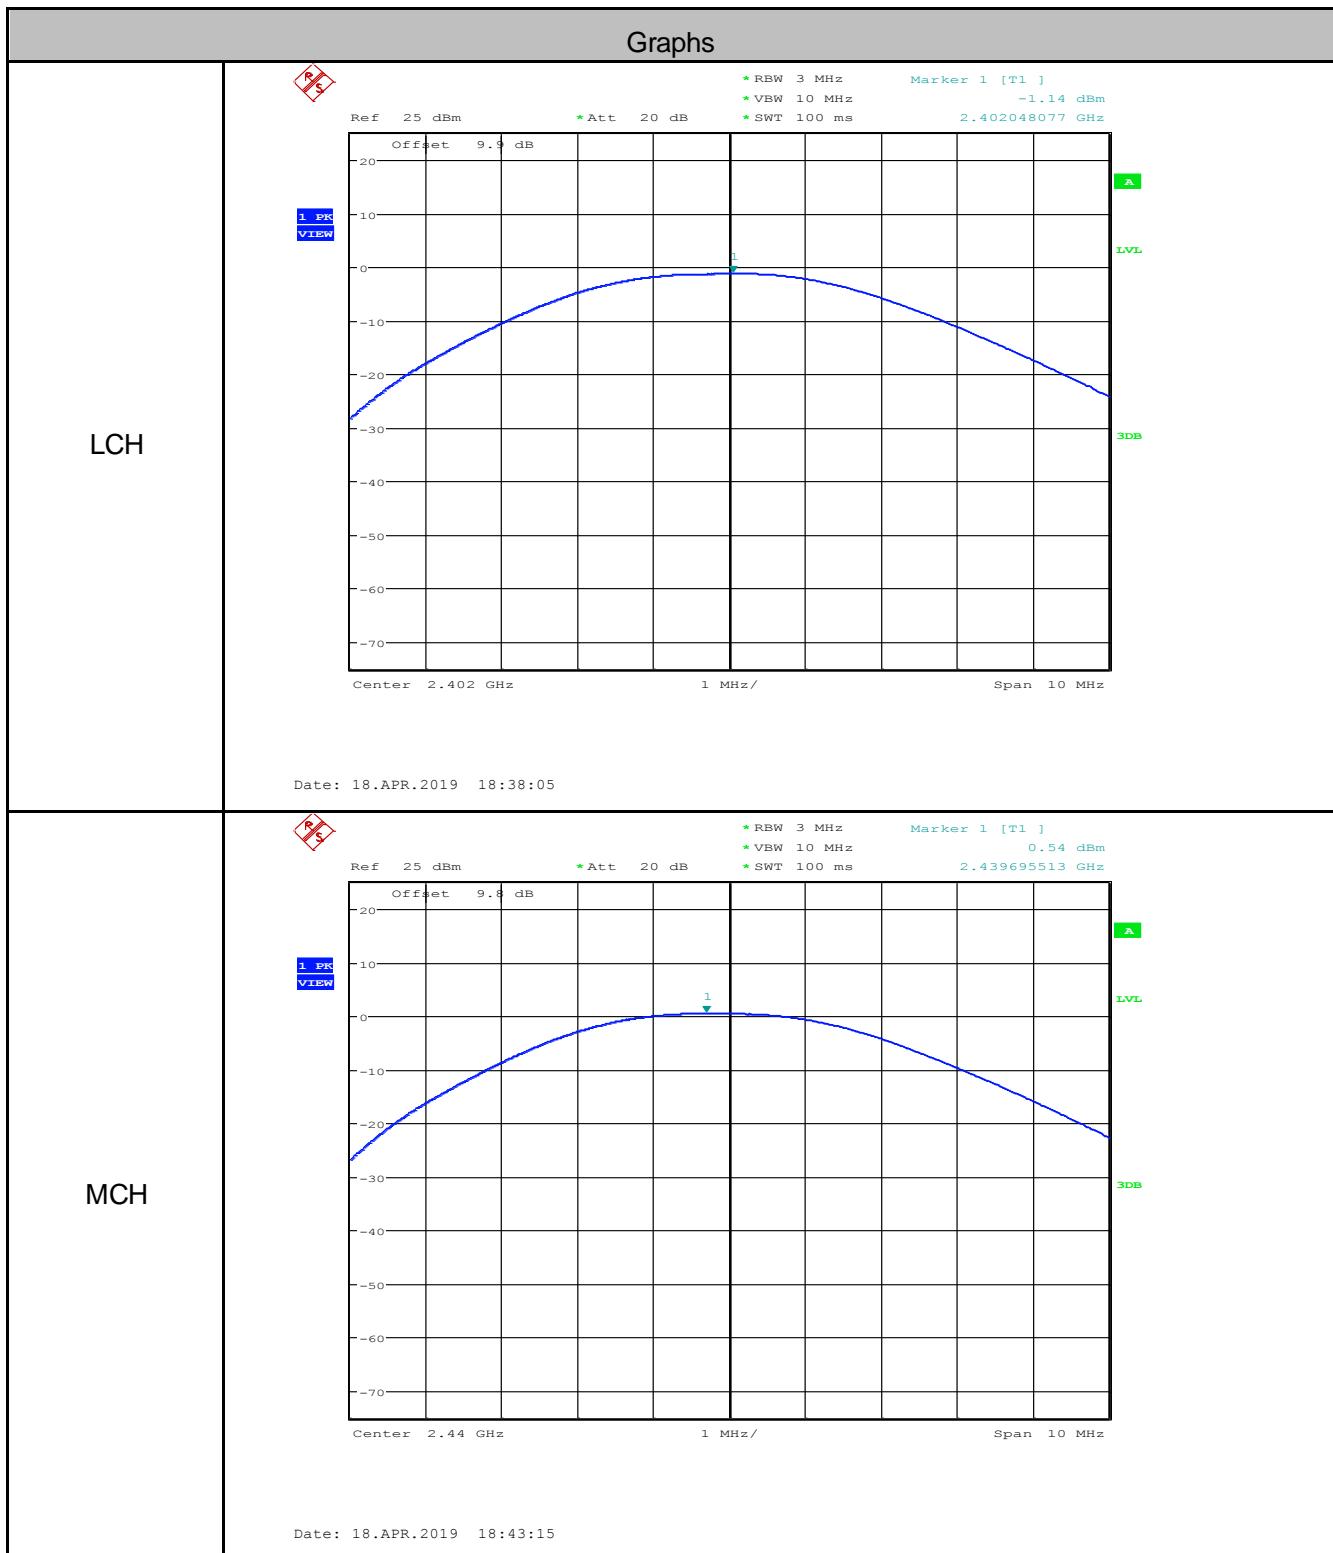




## 6.4 6dB Occupy Bandwidth

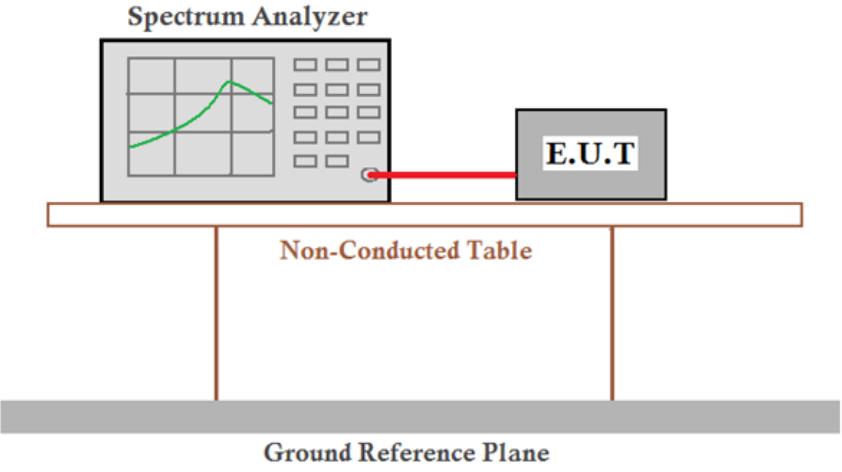
Test Requirement:	47 CFR Part 15C Section 15.247 (a)(2), RSS 247 5.2(1)
Test Method:	ANSI C63.10 2013 & RSS-Gen Issue 5
Test Setup:	 <p><b>Spectrum Analyzer</b></p> <p><b>E.U.T</b></p> <p><b>Non-Conducted Table</b></p> <p><b>Ground Reference Plane</b></p> <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit: $\geq 500$ kHz	
Test Mode: Transmitting with GFSK modulation.	
Test Results: Pass	

### Measurement Data


GFSK_1Mbps mode			
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result
Lowest	0.712	$\geq 500$	Pass
Middle	0.705	$\geq 500$	Pass
Highest	0.705	$\geq 500$	Pass

**Test plot as follows:**

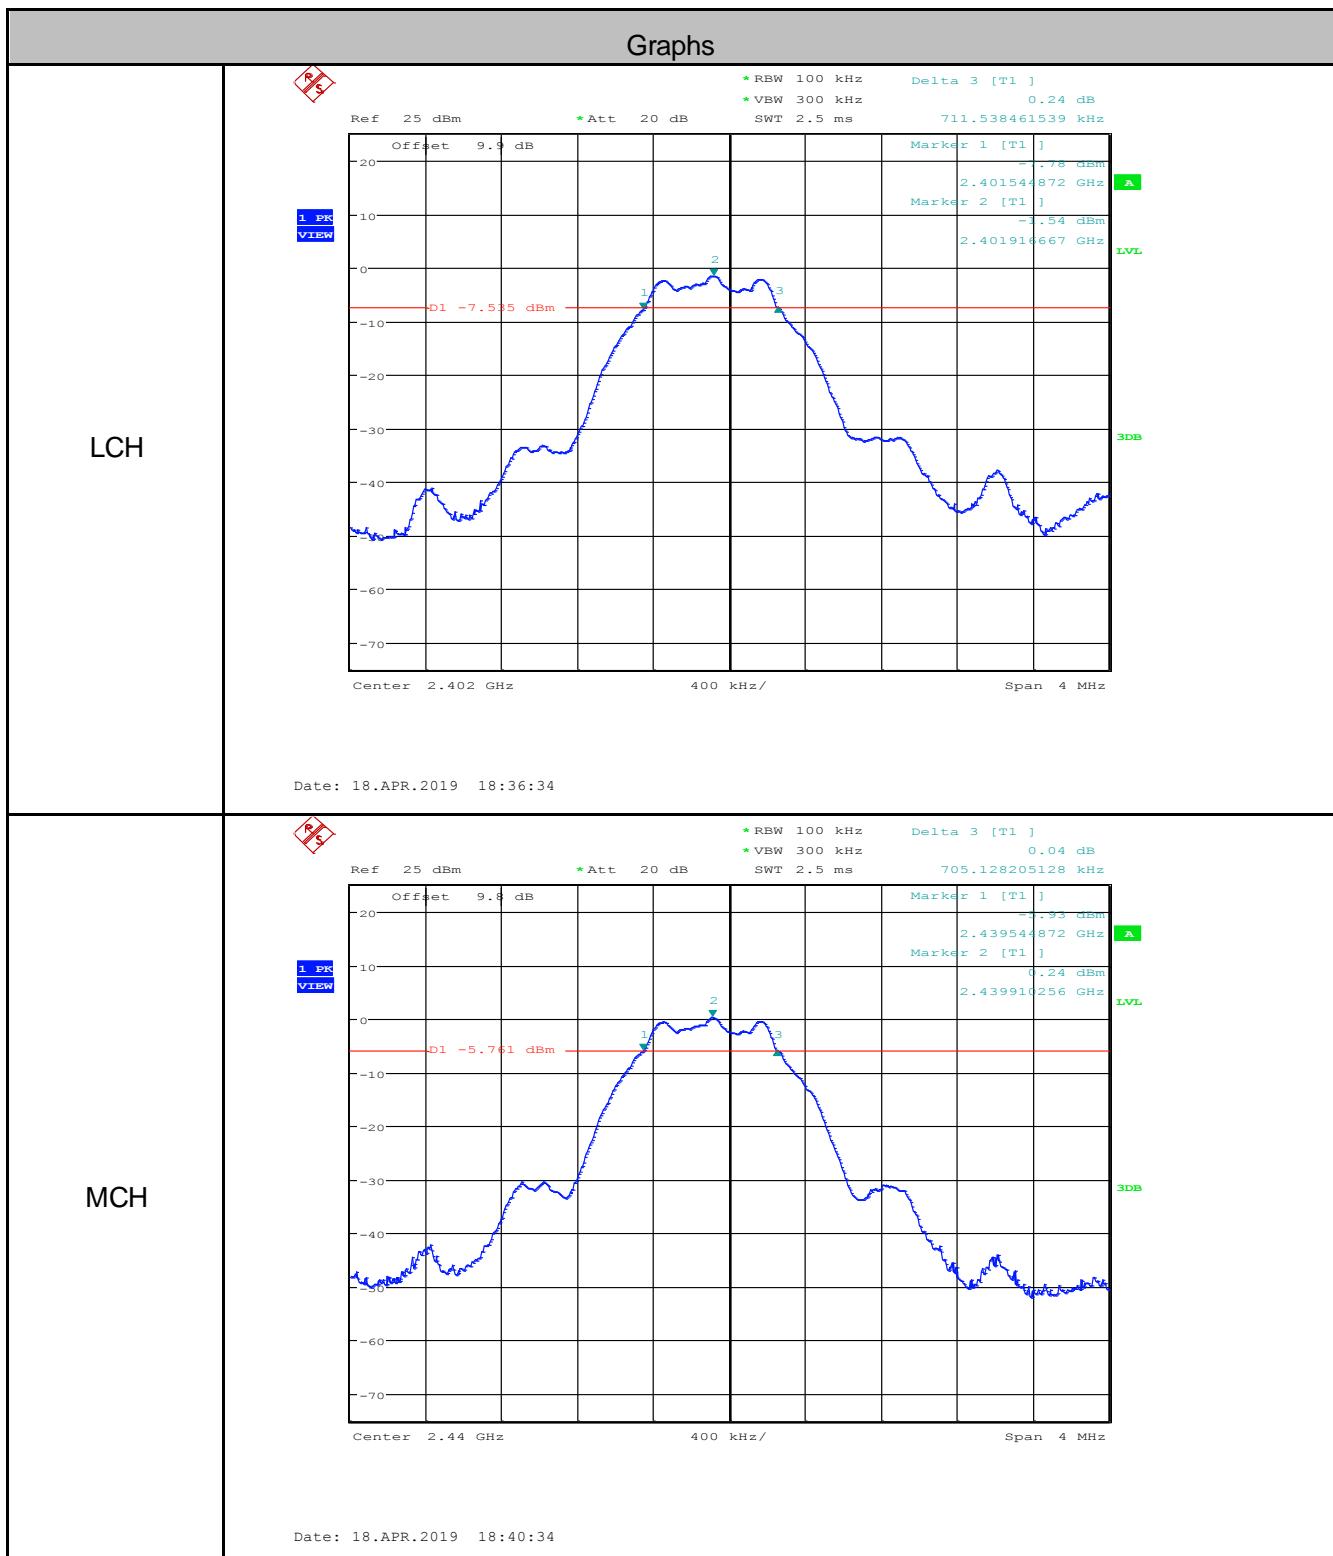

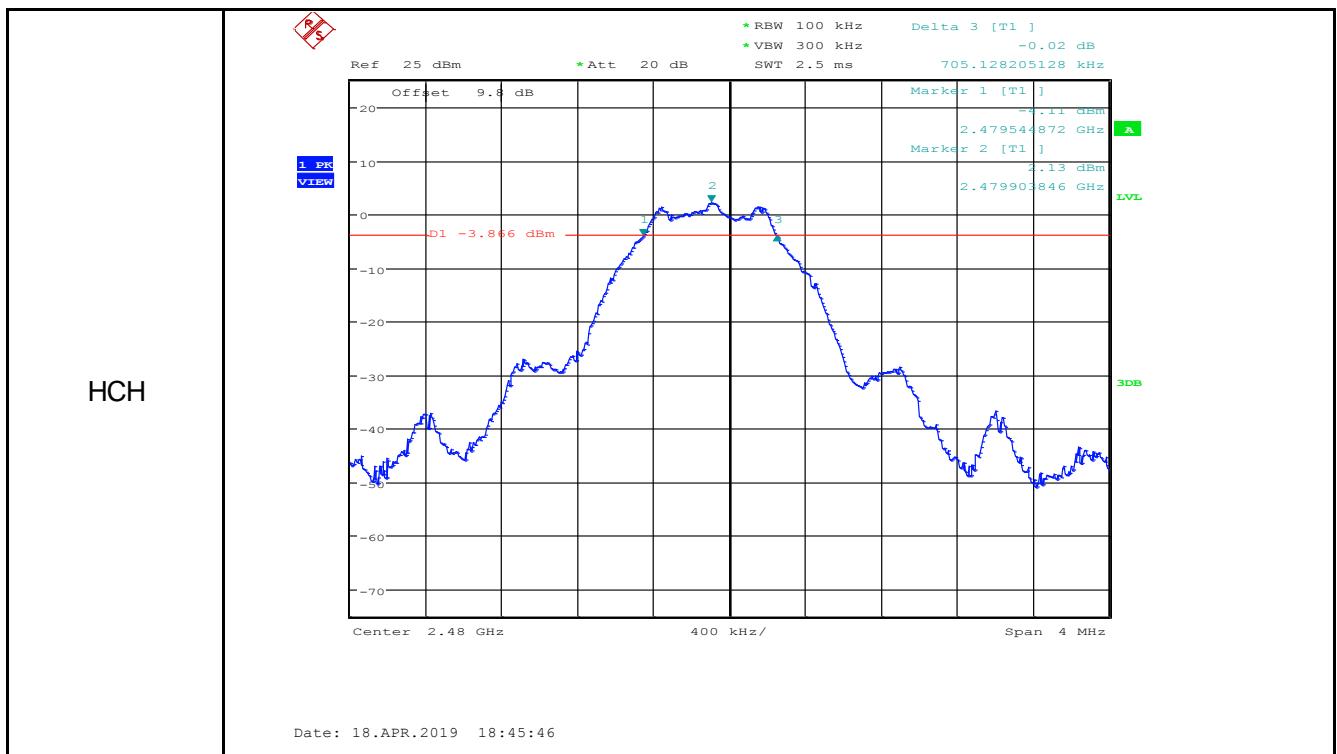


## 6.5 99% Occupy Bandwidth

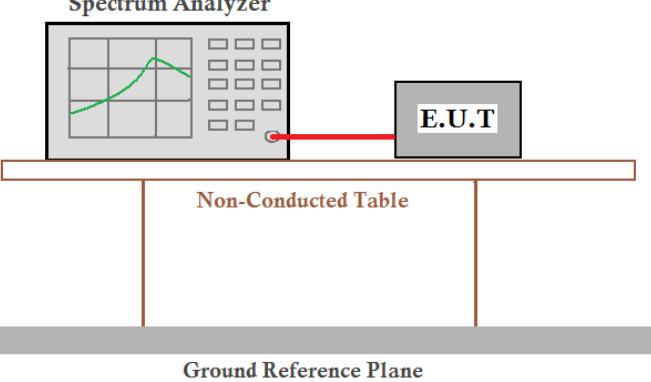
Test Requirement:	RSS-Gen Issue 5
Test Method:	RSS-Gen Issue 5
Test Setup:	<p style="text-align: center;"><b>Spectrum Analyzer</b></p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
<i>Remark: Offset=Cable loss+ attenuation factor.</i>	
Limit:	NA
Test Mode:	Transmitting with GFSK modulation
Test Results:	Pass

### Measurement Data


GFSK_1Mbps mode	
Test channel	99% Occupy Bandwidth (MHz)
Lowest	1.051
Middle	1.051
Highest	1.058

**Test plot as follows:**

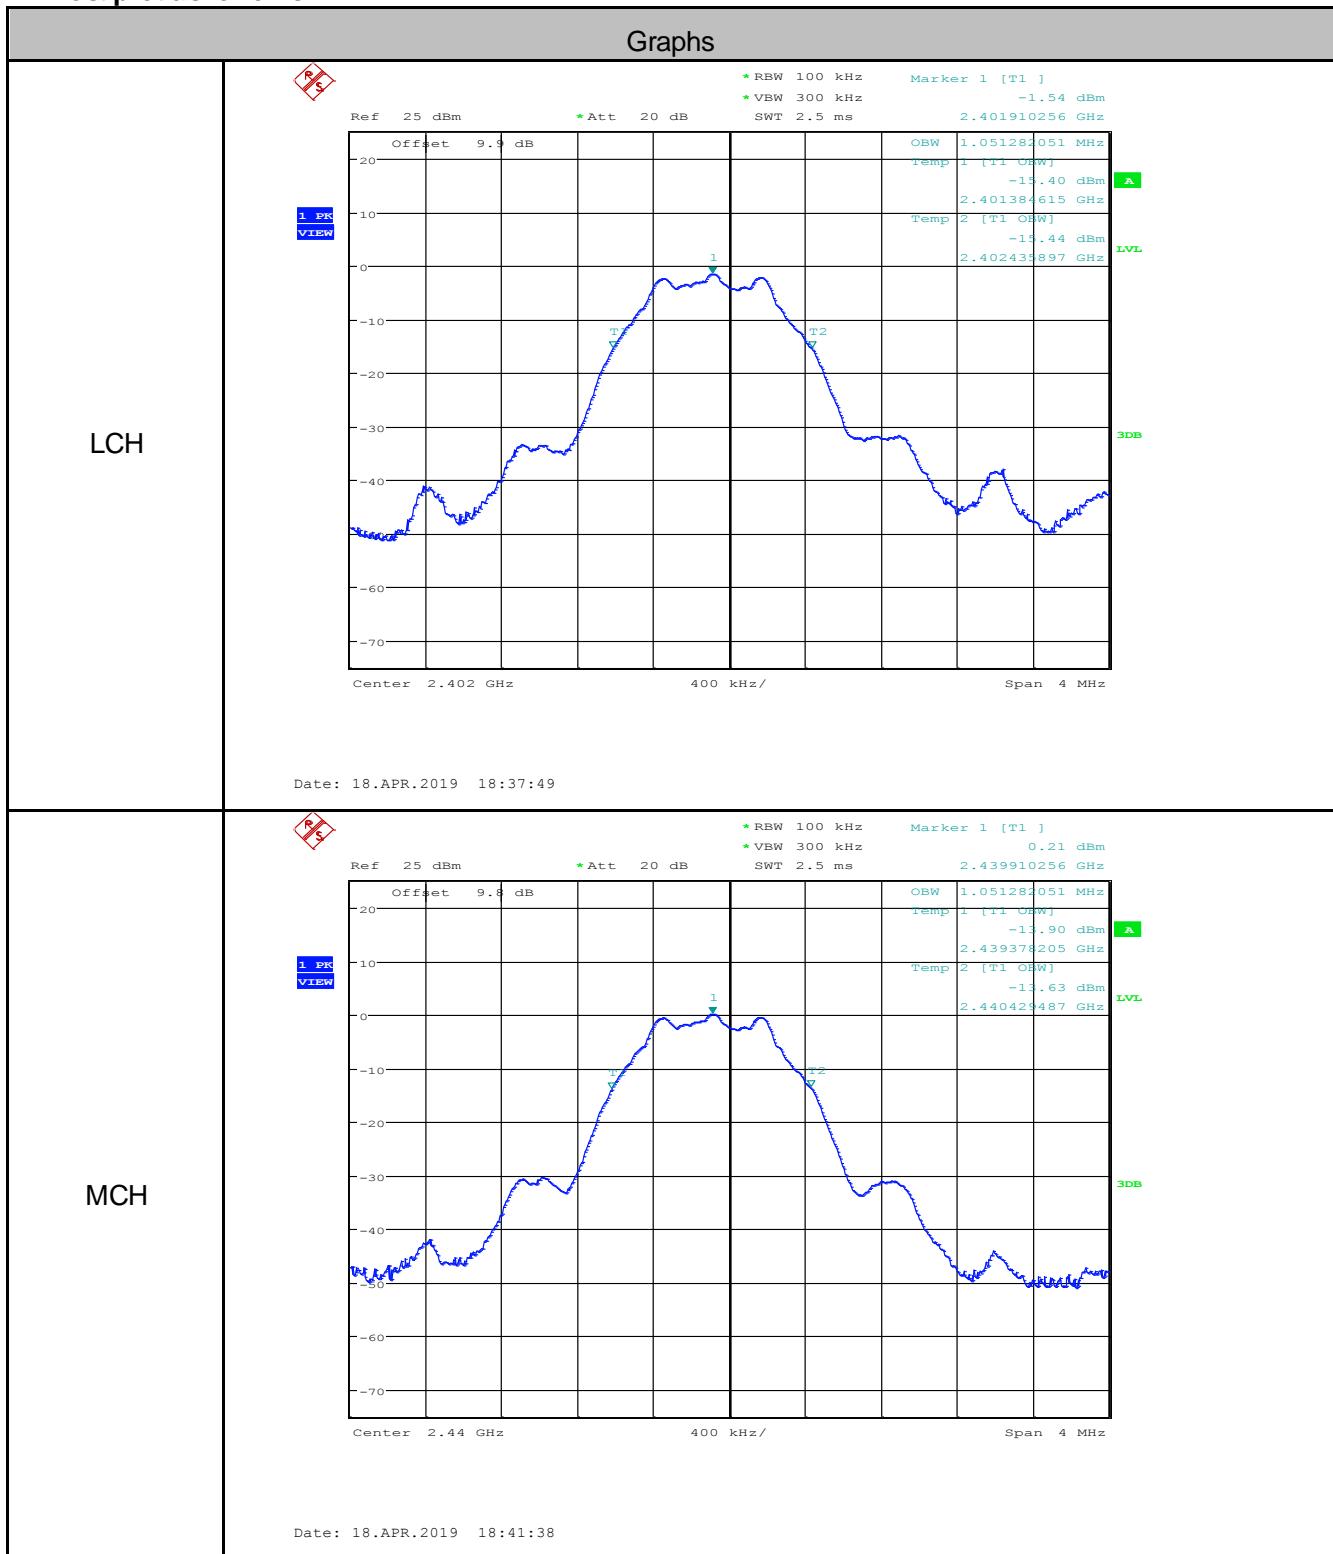

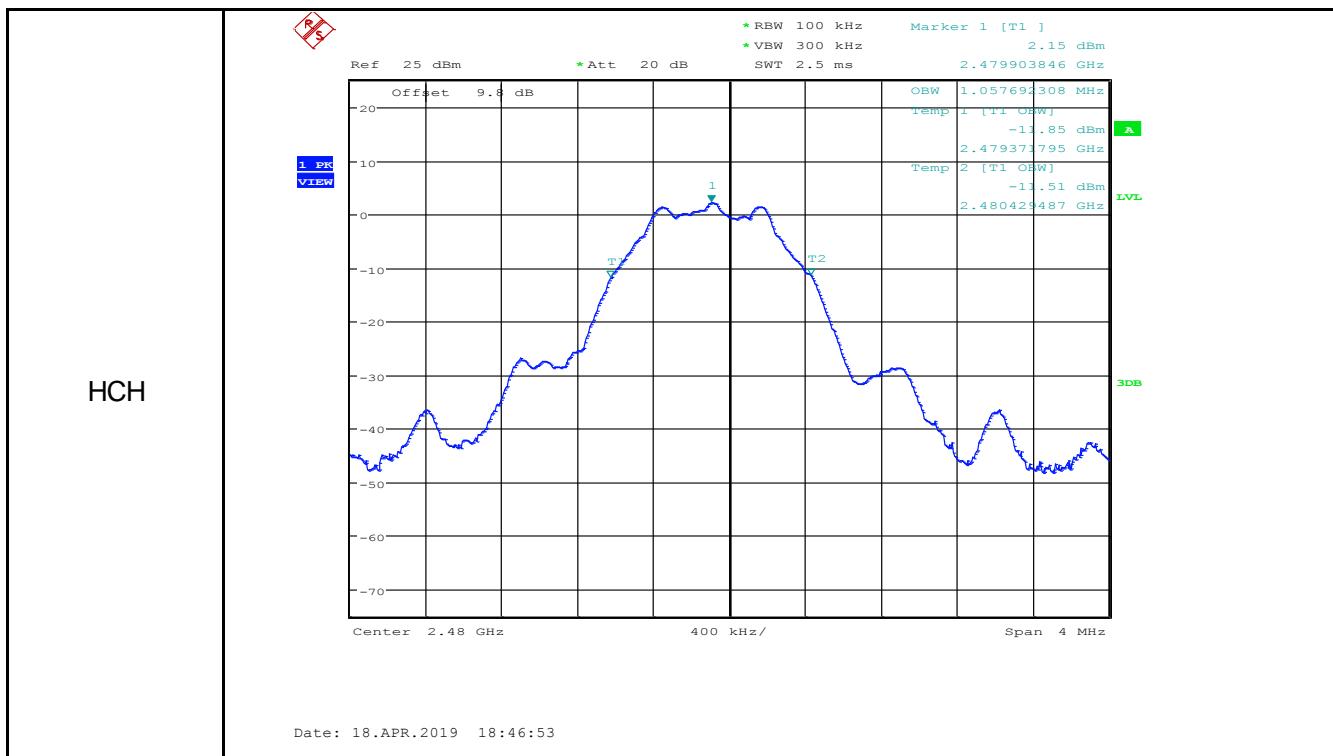


## 6.6 Power Spectral Density

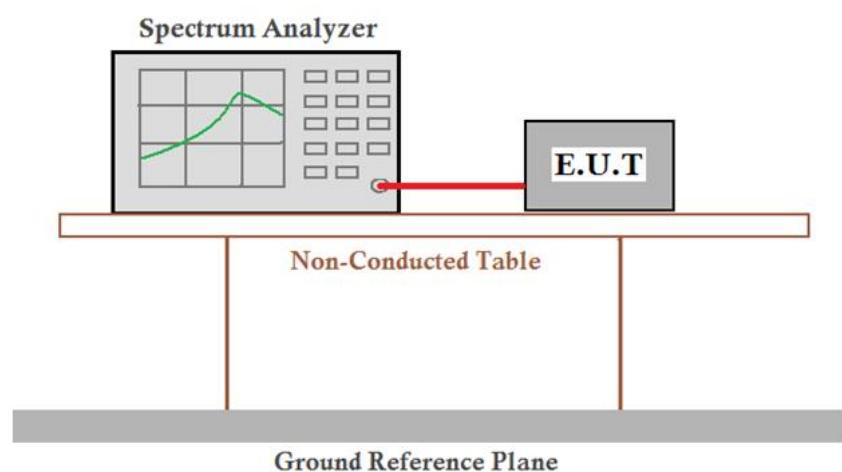
Test Requirement:	47 CFR Part 15C Section 15.247 (e), RSS 247 5.2(2)
Test Method:	ANSI C63.10 2013
Test Setup:	 <p><b>Spectrum Analyzer</b>  <b>E.U.T</b>  <b>Non-Conducted Table</b>  <b>Ground Reference Plane</b></p> <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p>
Limit: $\leq 8.00 \text{dBm}/3\text{kHz}$	
Test Mode: Transmitting with GFSK modulation.	
Test Results: Pass	

### Measurement Data


GFSK_1Mbps mode			
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
Lowest	-17.020	$\leq 8.00$	Pass
Middle	-15.180	$\leq 8.00$	Pass
Highest	-13.410	$\leq 8.00$	Pass

Test plot as follows:

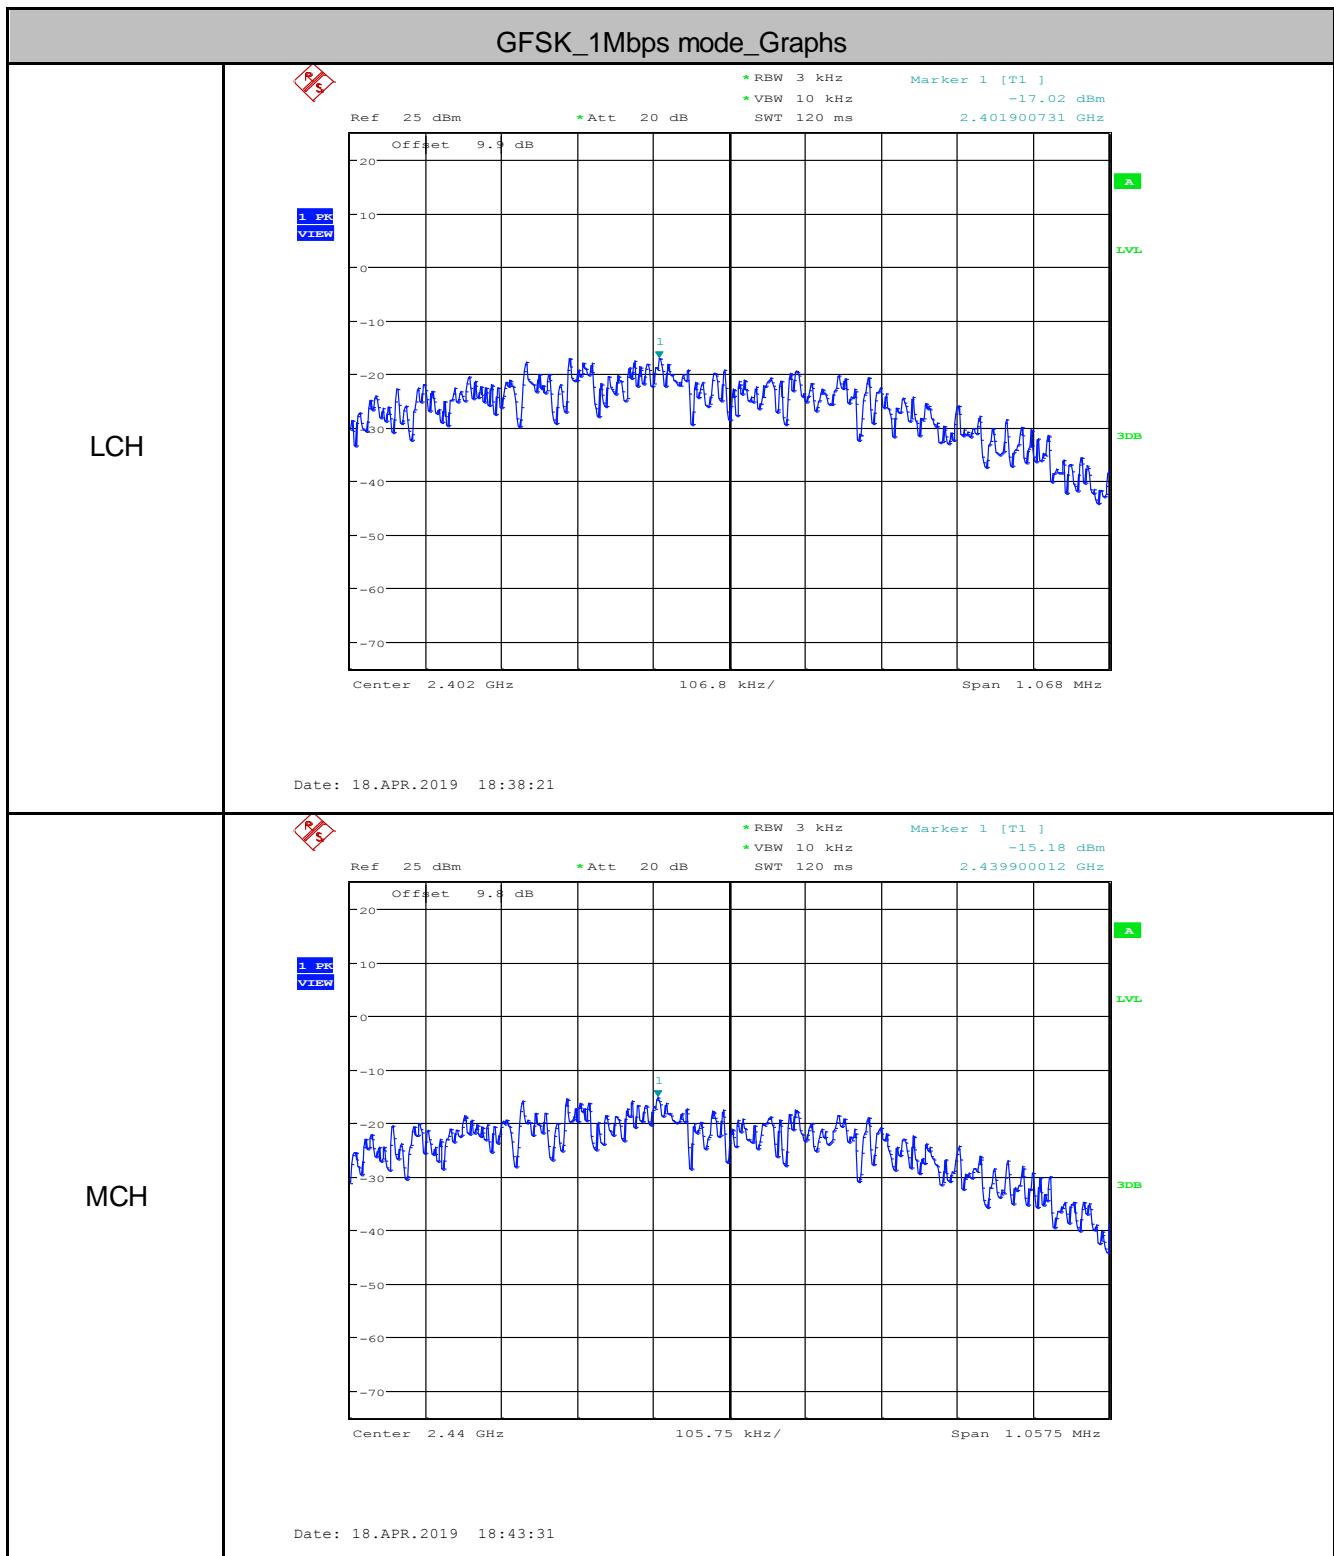

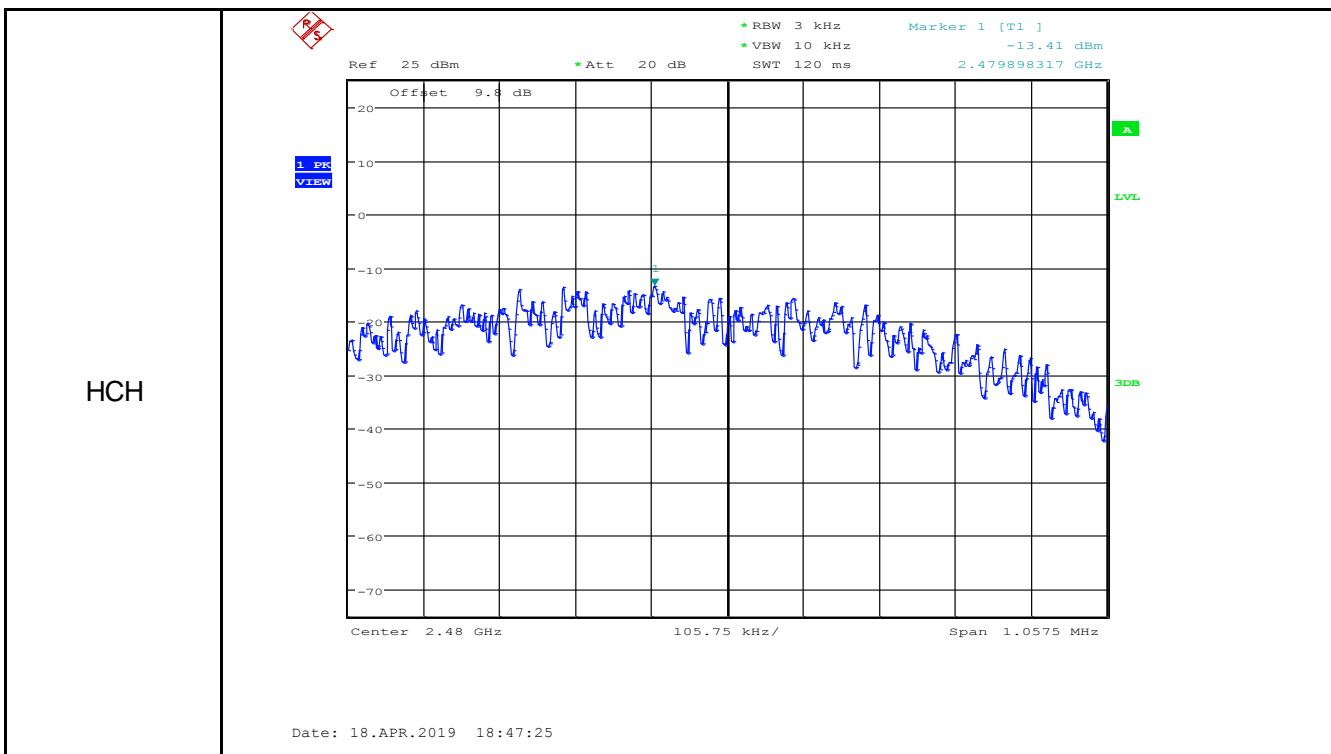


## 6.7 Band-edge for RF Conducted Emissions

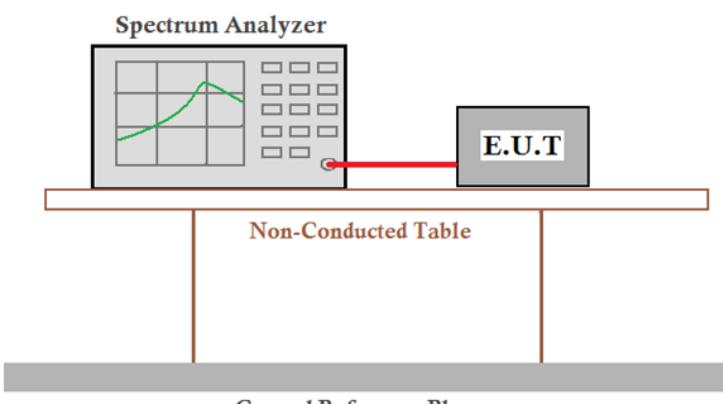
Test Requirement:	47 CFR Part 15C Section 15.247 (d), RSS 247 5.5
Test Method:	ANSI C63.10 2013
Test Setup:	 <p><b>Spectrum Analyzer</b>  <b>E.U.T</b>  <b>Non-Conducted Table</b>  <b>Ground Reference Plane</b></p> <p><i>Remark: Offset=Cable loss+attenuation factor.</i></p>
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test Mode:	Transmitting with GFSK modulation.
Test Results:	Pass

GFSK_1Mbps mode				
Test channel	Frequency(MHz)	Emission Level(dBm)	Limit(dBm)	Result
Lowest	2400	-46.590	-21.77	Pass
Highest	2483.5	-52.490	-17.76	Pass


**Test plot as follows:**


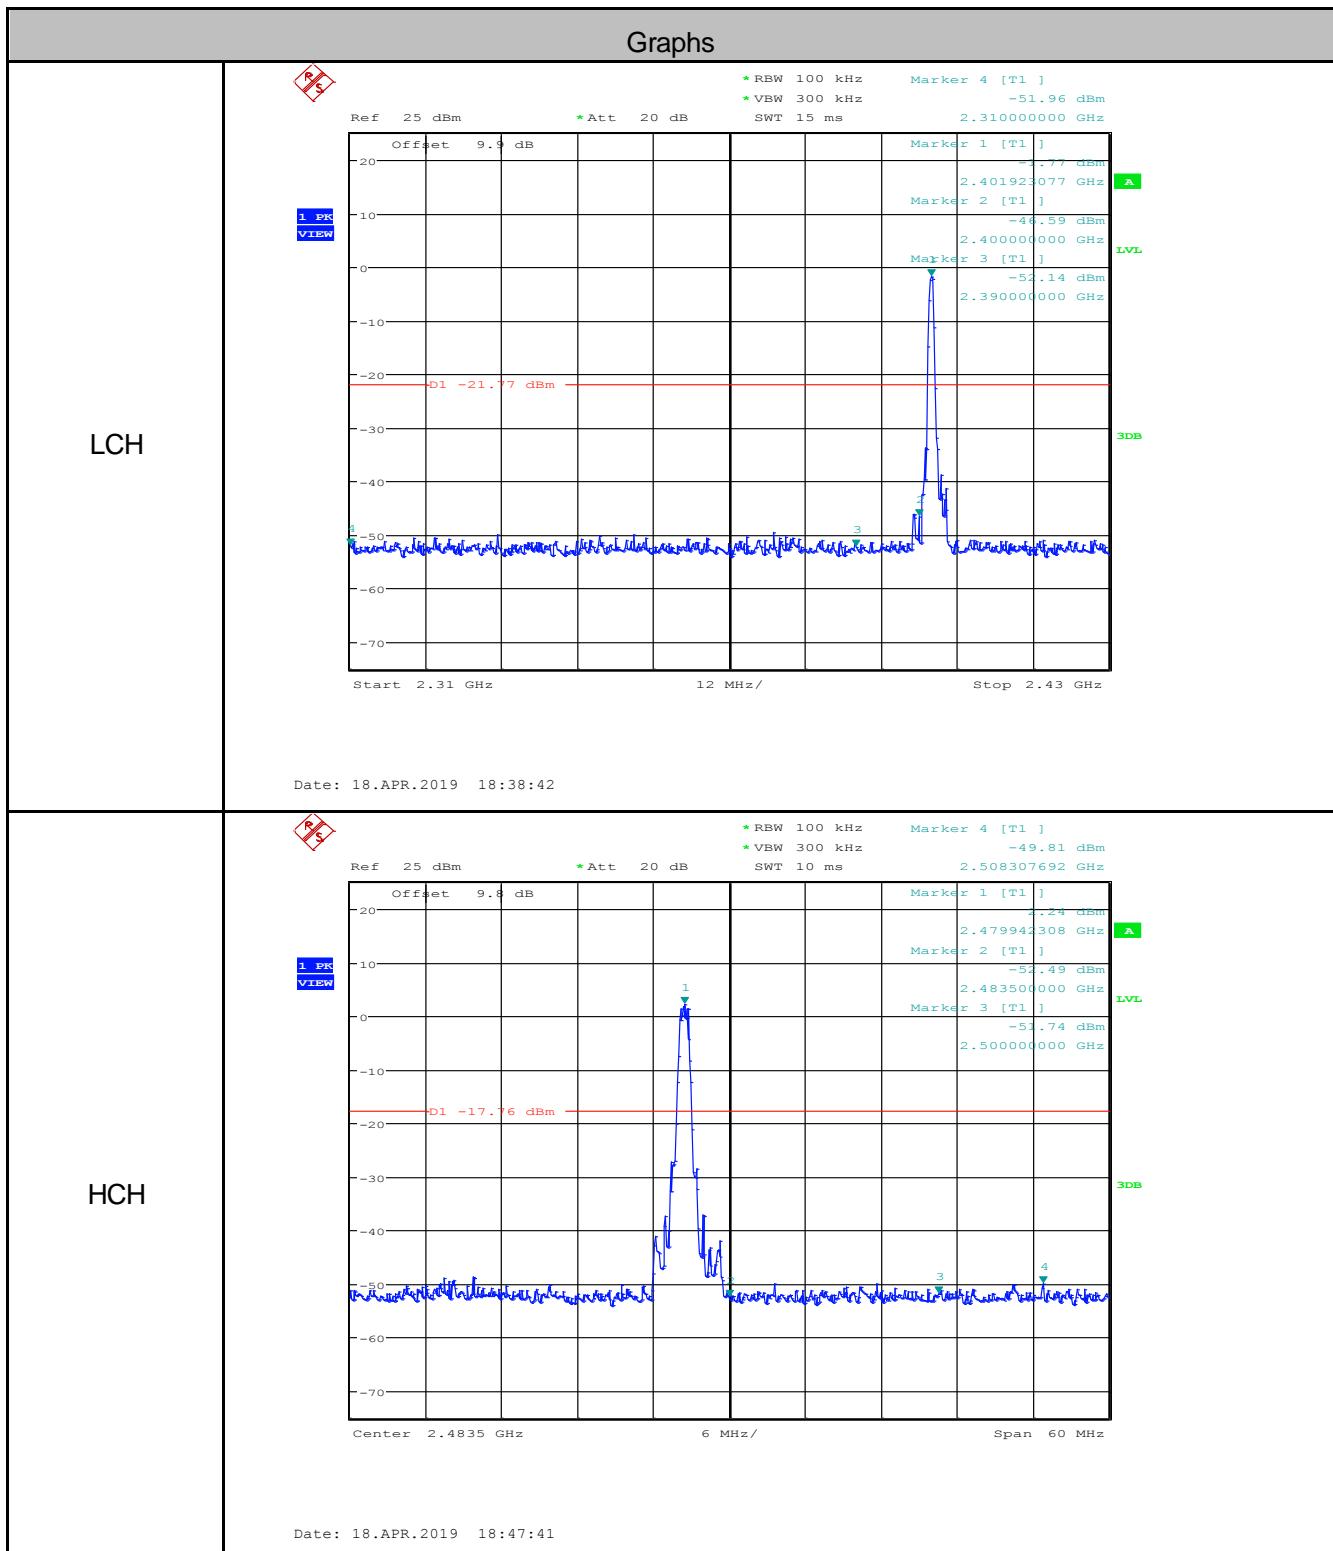



## 6.8 Spurious RF Conducted Emissions

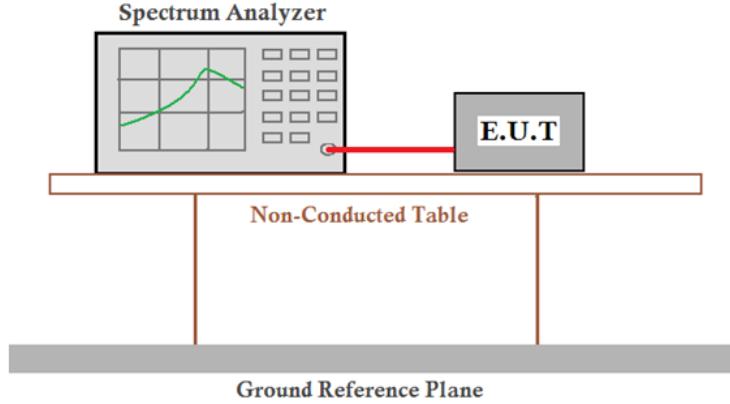Test Requirement:	47 CFR Part 15C Section 15.247 (d), RSS 247 5.5
Test Method:	ANSI C63.10 2013
Test Setup:	<p style="text-align: center;">    <b>Spectrum Analyzer</b>  <b>E.U.T</b>  <b>Non-Conducted Table</b>  <b>Ground Reference Plane</b> </p> <p><i>Remark: Offset= Cable loss+ attenuation factor.</i></p>
<p><b>Limit:</b> In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.</p>	
Test Mode:	Transmitting with GFSK modulation.
Test Results:	Pass


Test plot as follows:

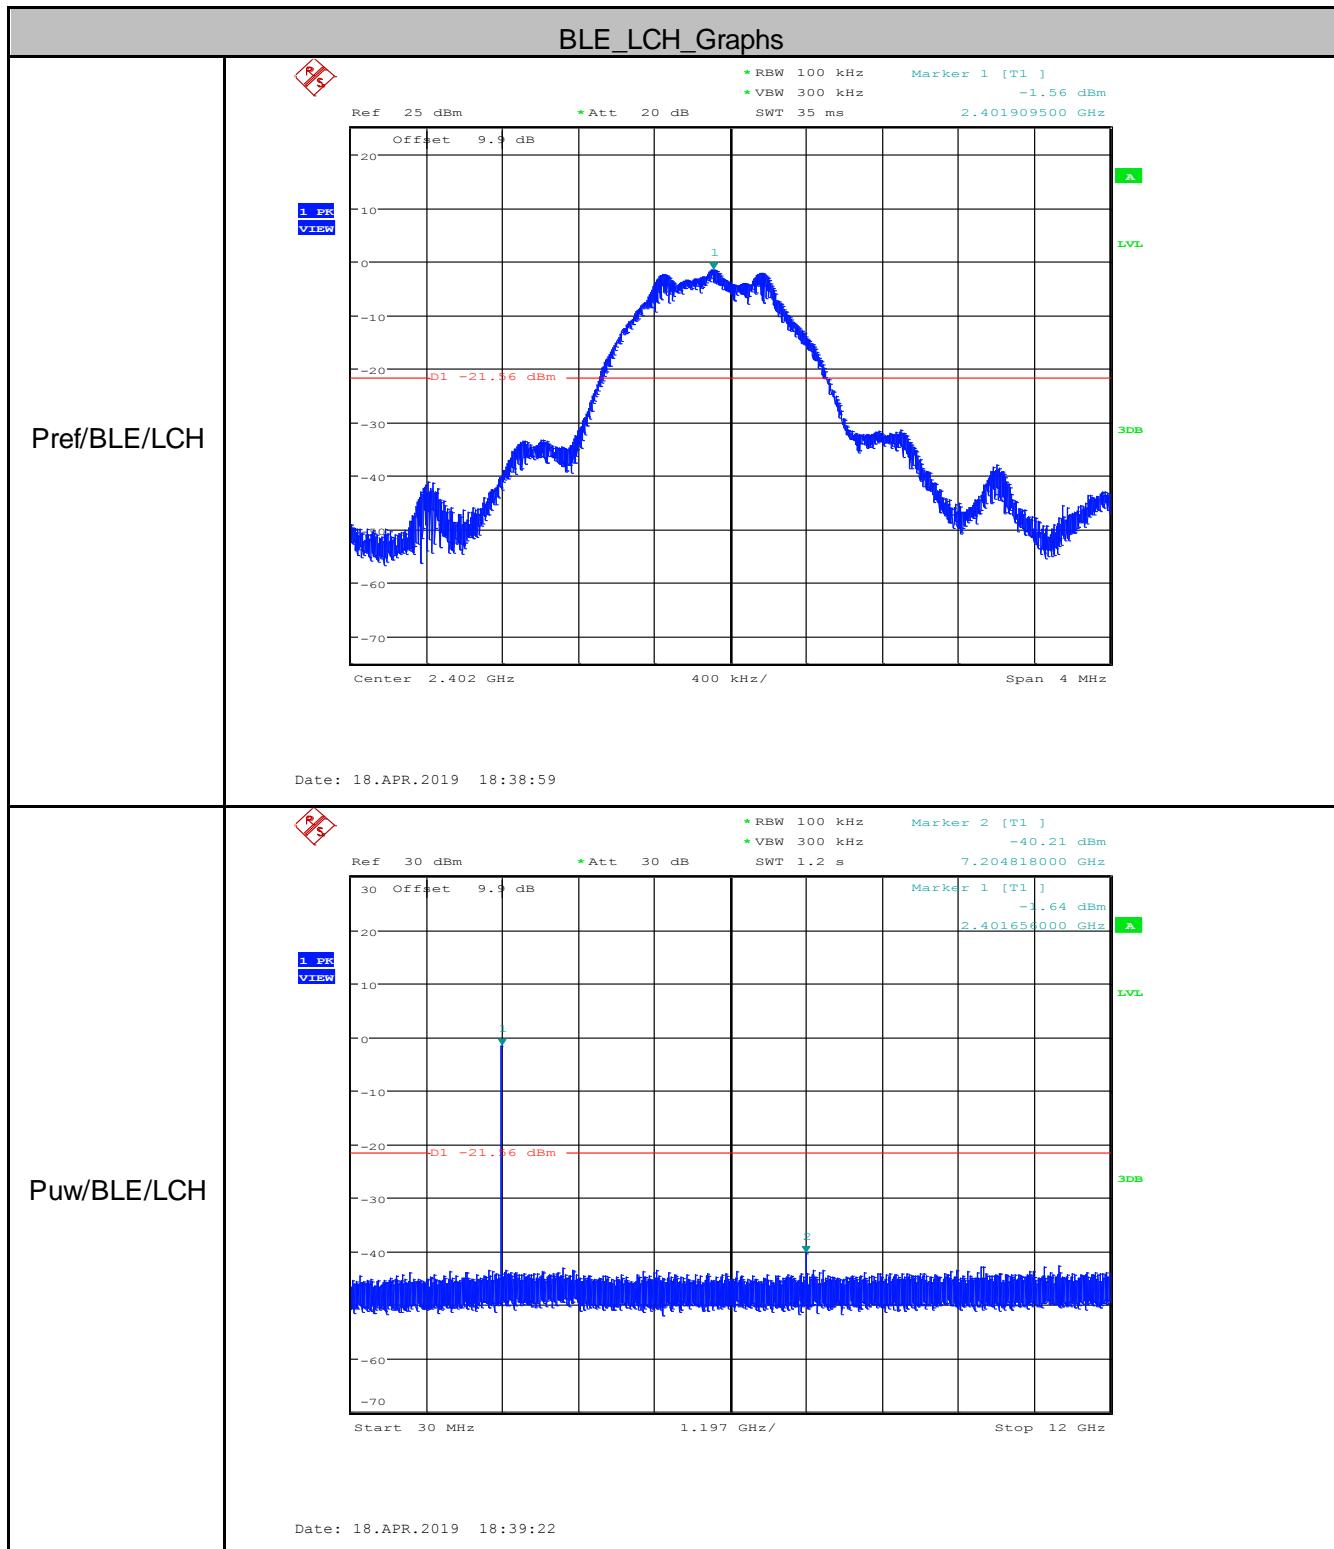


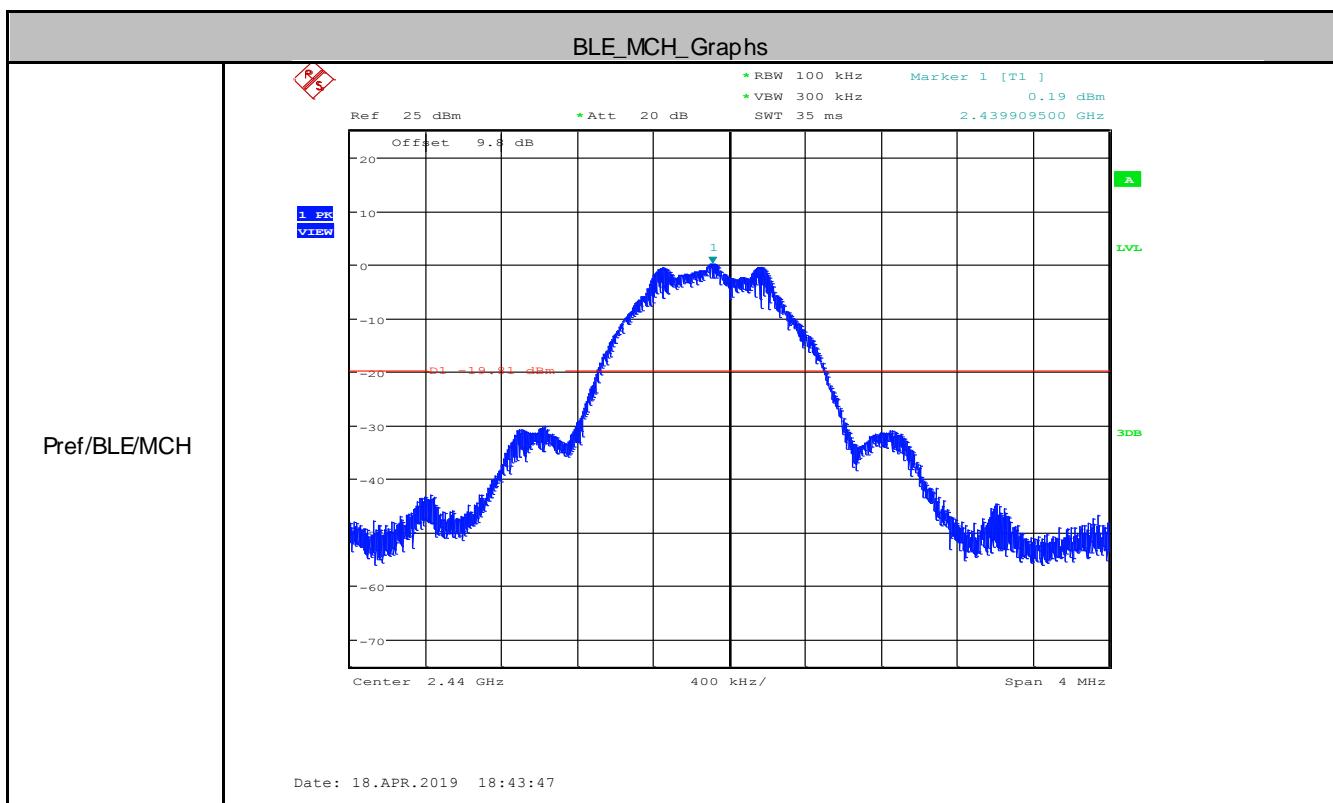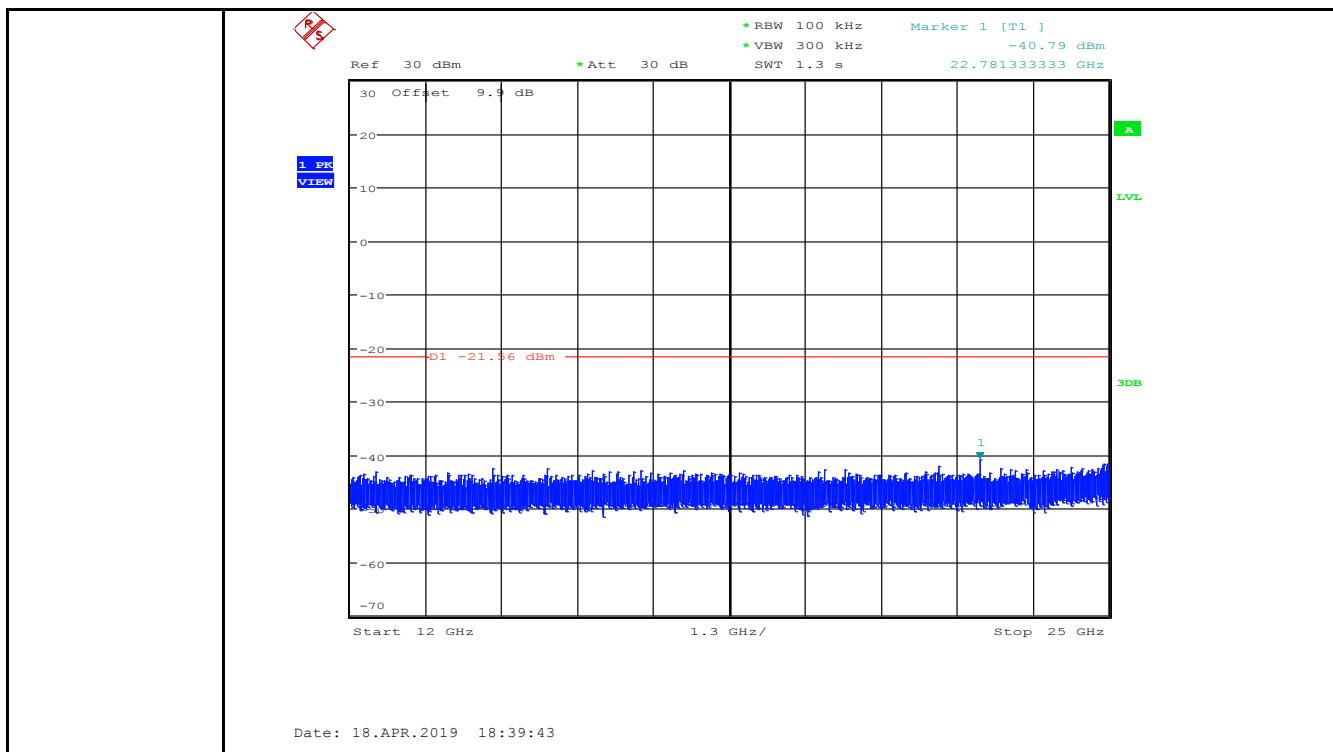

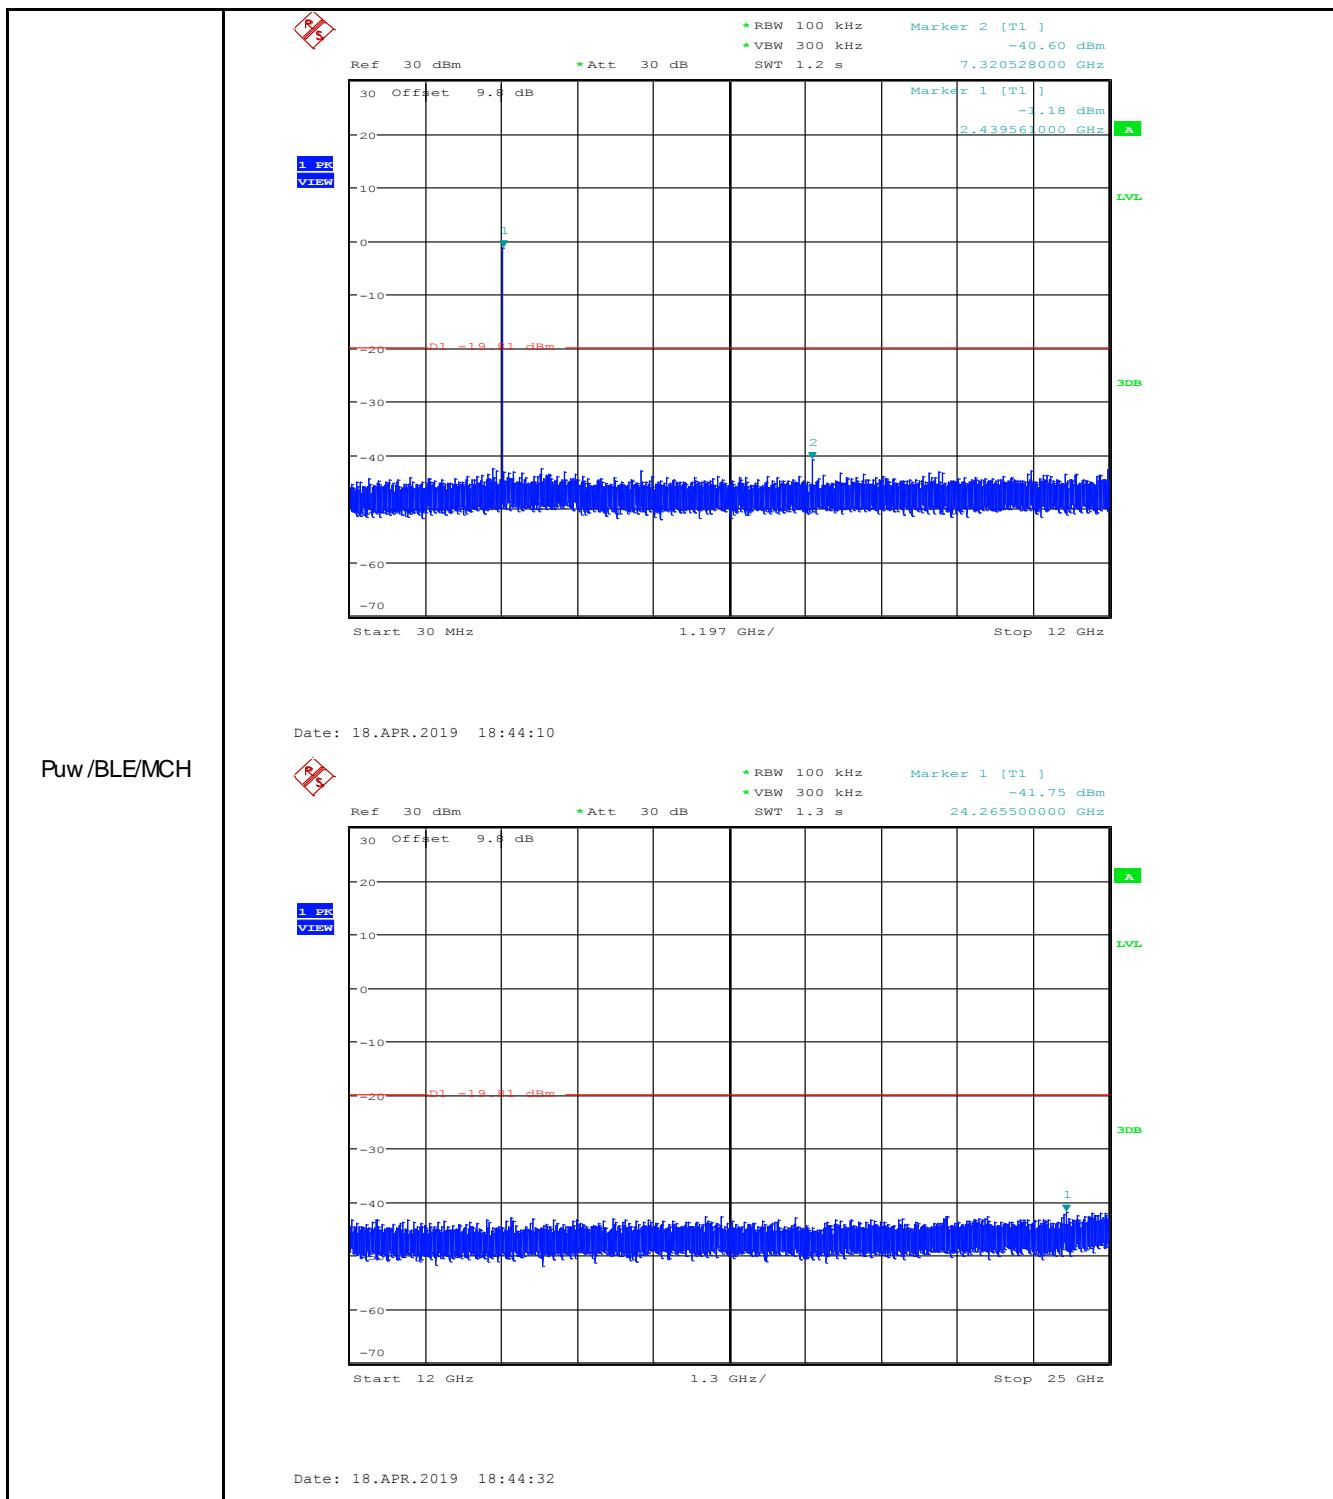

BLE HCH Graphs



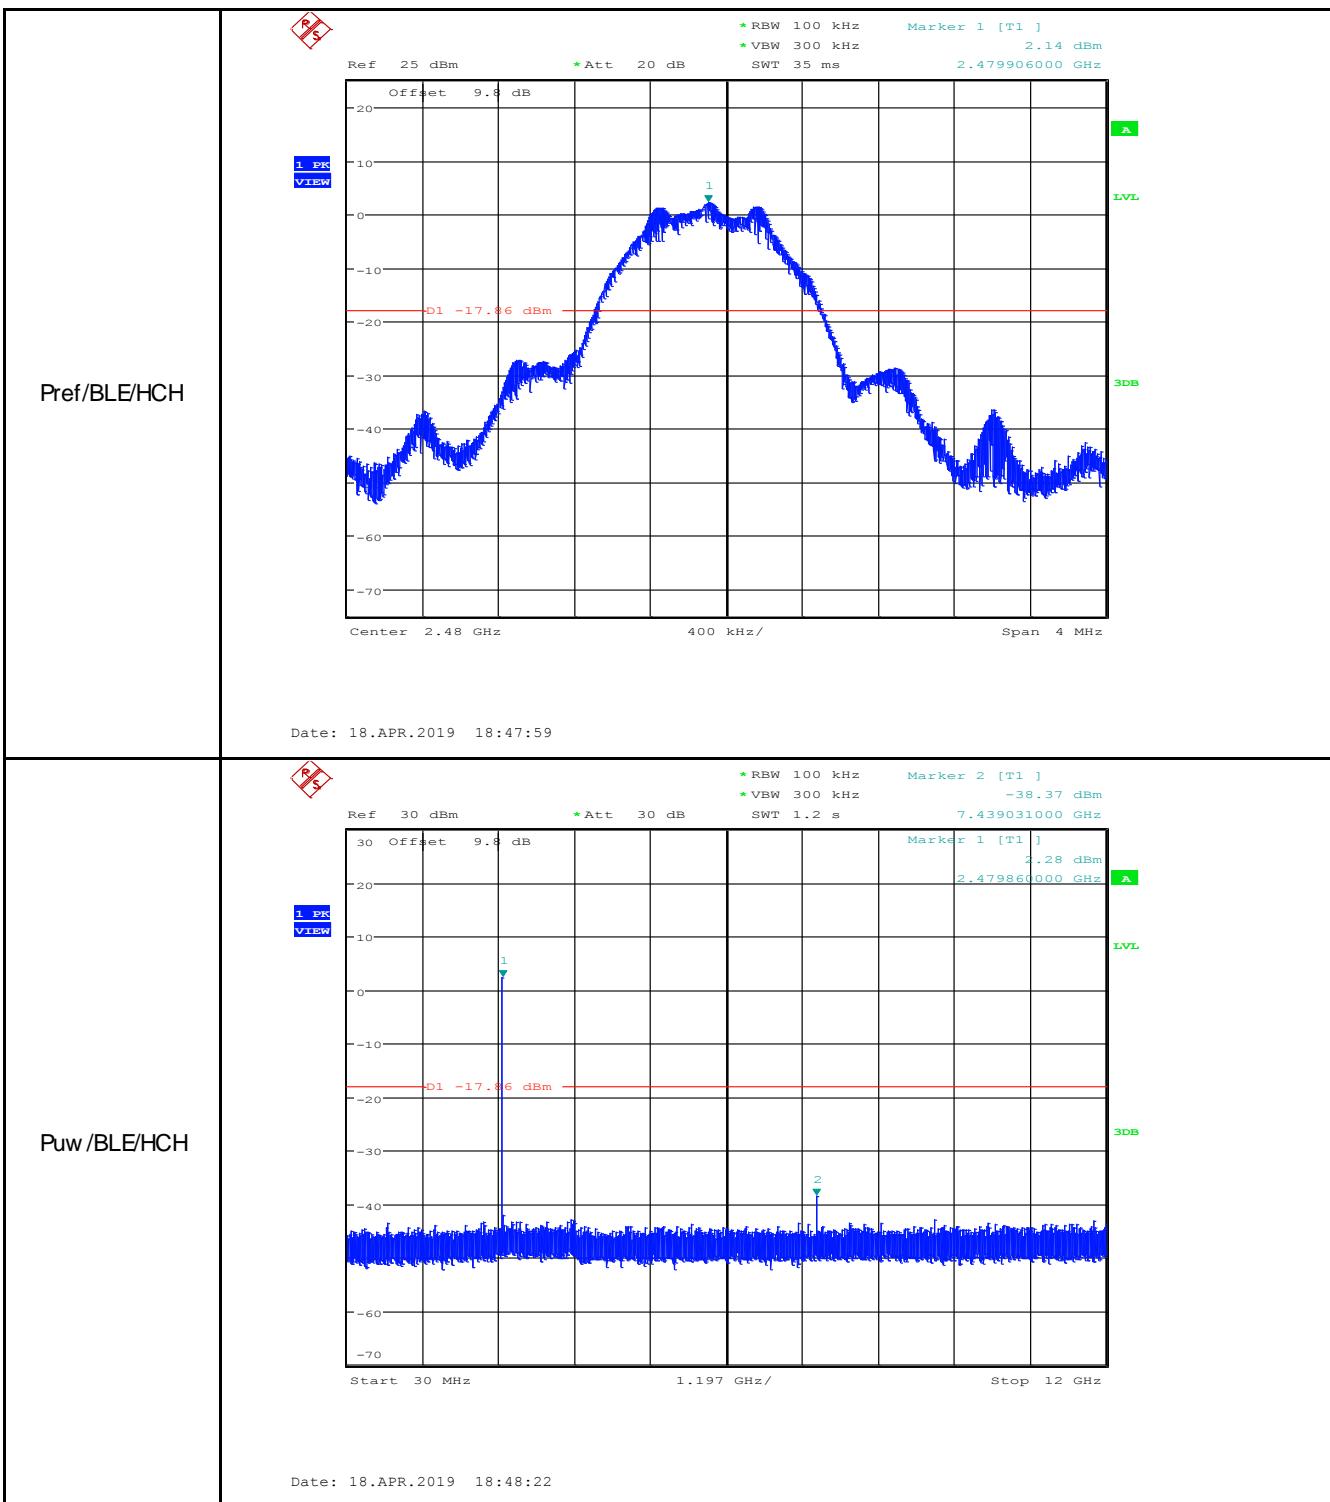


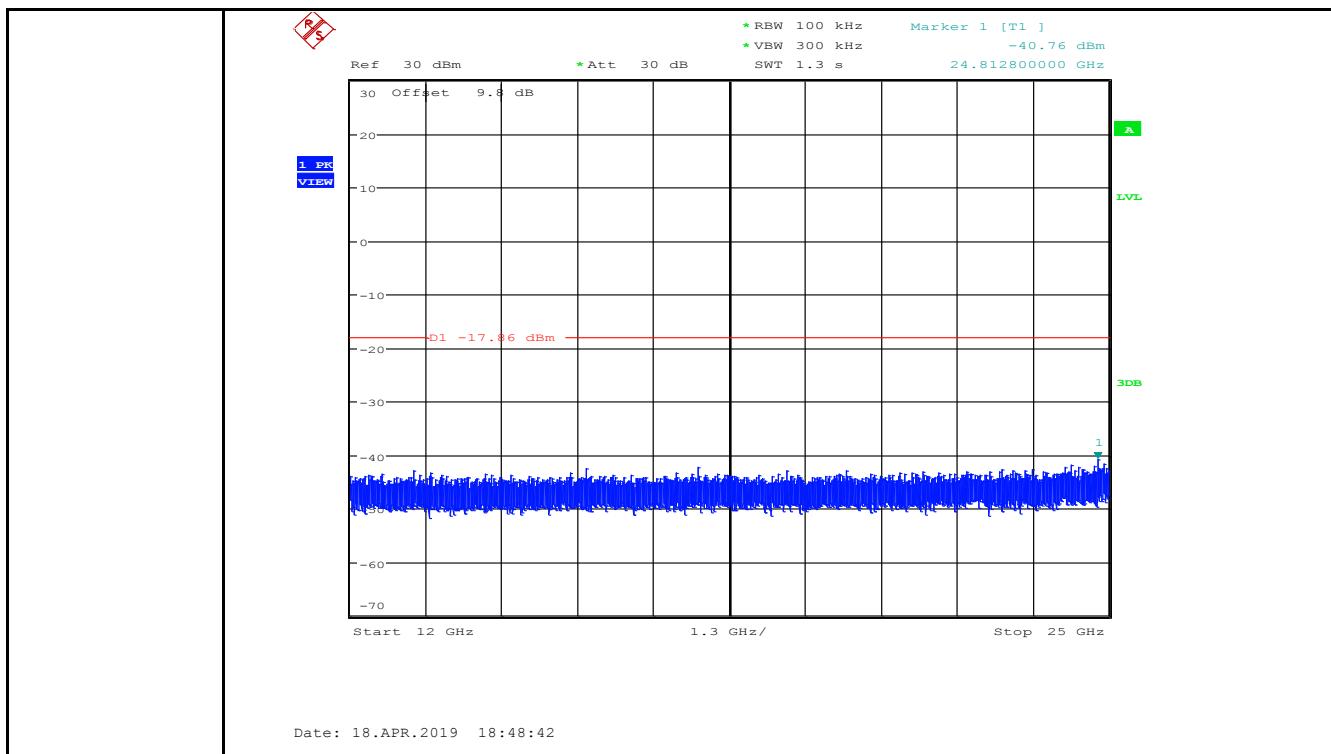
**Remark:**

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

## 6.9 Radiated Spurious Emission

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205, RSS-Gen Issue 5				
Test Method:	ANSI C63.10 2013 & RSS-Gen Issue 5				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3

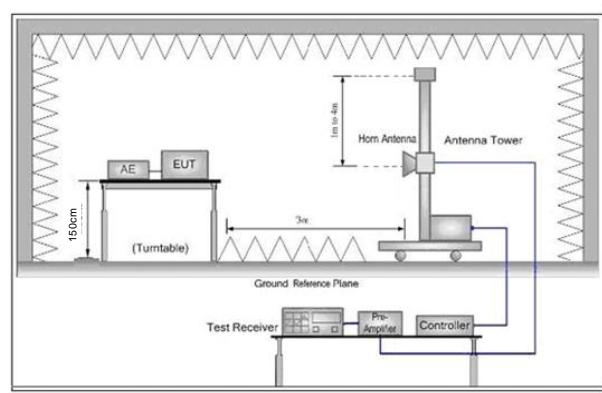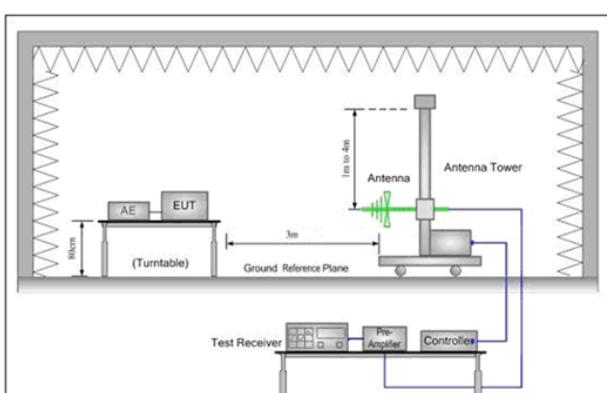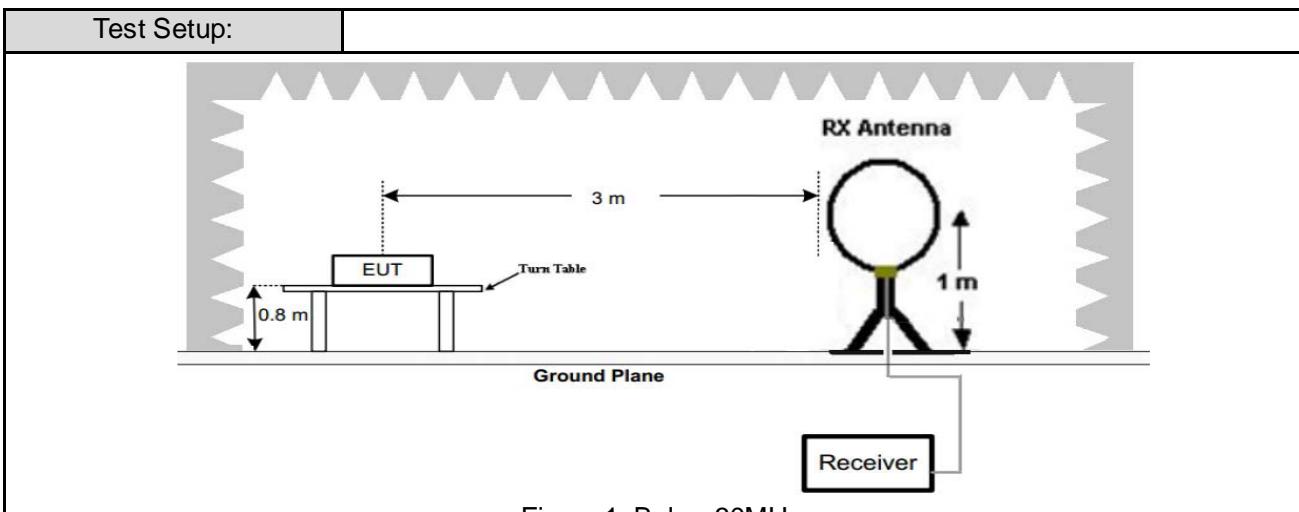

Test Procedure:


- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
Note: For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both

	<p>horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	<p>Transmitting with GFSK modulation.</p> <p>Transmitting mode.</p>
Final Test Mode:	<p>Transmitting with GFSK modulation.</p> <p>Pretest the EUT at Transmitting mode, found Transmitting mode which it is worse case.</p> <p>For below 1GHz part, through pre-scan, the worst case is mode c.</p> <p>Only the worst case is recorded in the report.</p>
Test Results:	Pass

Radiated Emission below 1GHz


30MHz~1GHz\_the worst case

Test mode:	GFSK_1Mbps_TX_2480MHz	Vertical
------------	-----------------------	----------

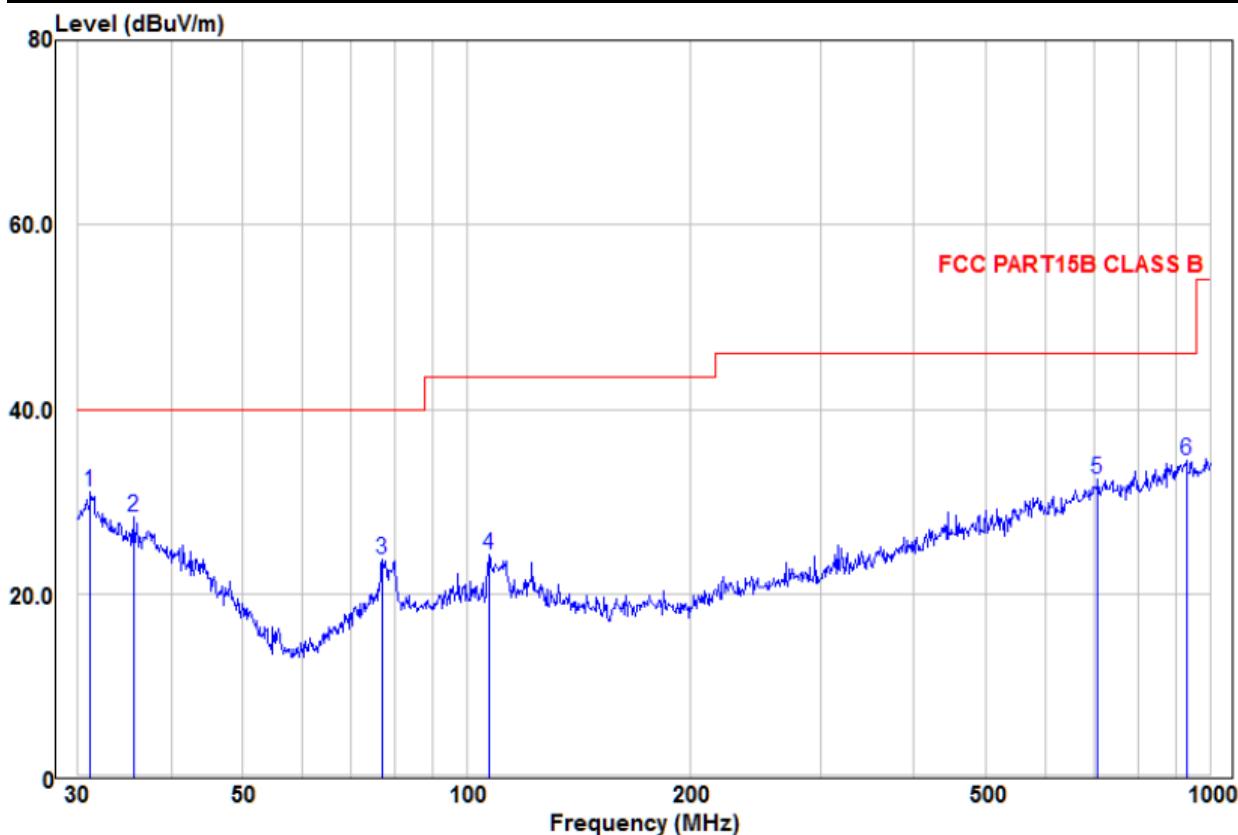

Freq	Read Level	Factor	Limit		Over Line	Over Limit	Remark	Pol/Phase
			MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 pp	31.18	13.40	17.69	31.09	40.00	-8.91	Peak	VERTICAL
2	35.62	11.18	17.14	28.32	40.00	-11.68	Peak	VERTICAL
3	77.05	13.97	9.68	23.65	40.00	-16.35	Peak	VERTICAL
4	107.13	13.52	10.77	24.29	43.50	-19.21	Peak	VERTICAL
5	706.70	11.58	20.89	32.47	46.00	-13.53	Peak	VERTICAL
6	929.01	10.43	23.99	34.42	46.00	-11.58	Peak	VERTICAL

Test mode:	GFSK_1Mbps_TX_2480MHz	Horizontal
------------	-----------------------	------------

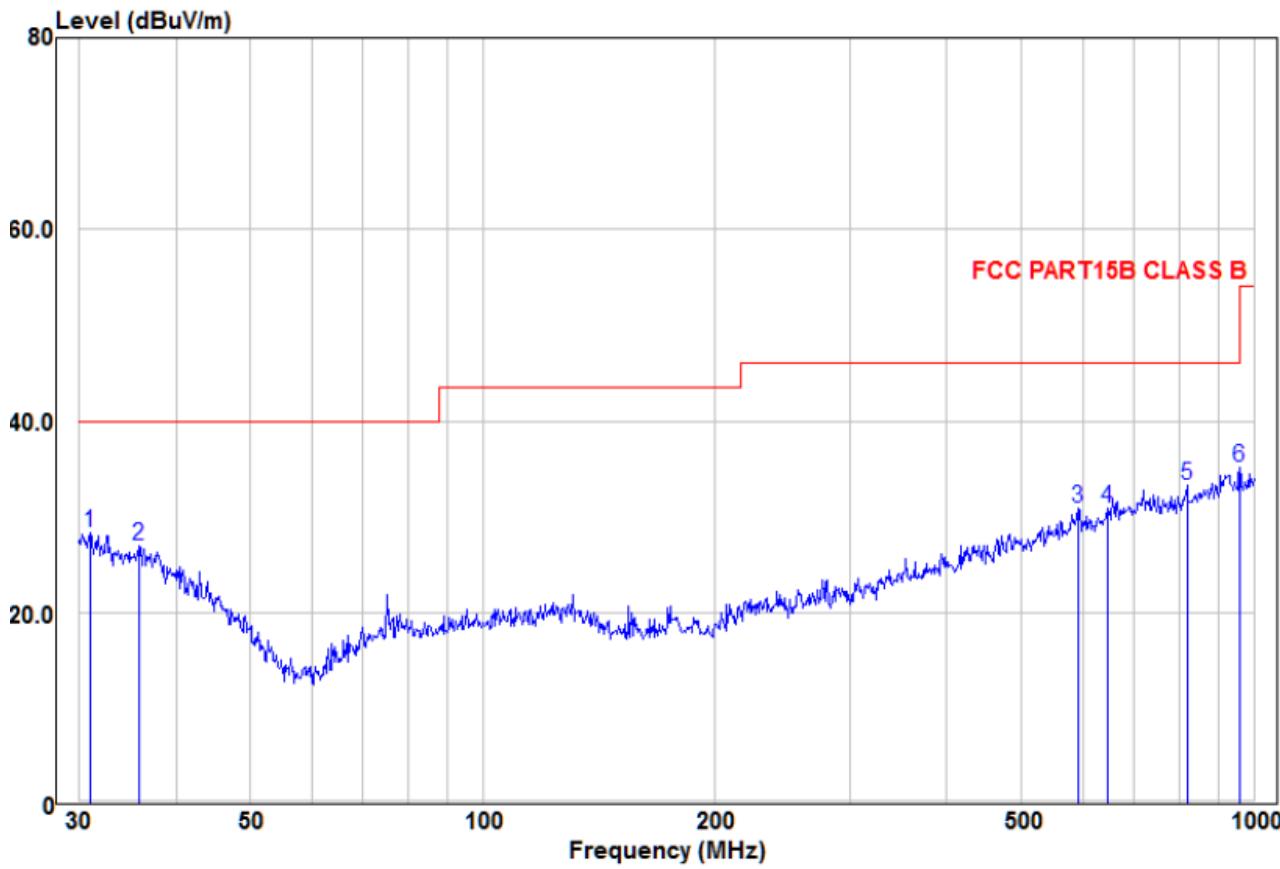

Freq	Read		Limit	Over	Pol/Phase			
	MHz	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
	MHz	dB <sub>uV</sub>	dB/m	dB <sub>uV/m</sub>	dB <sub>uV/m</sub>	dB		
1	30.96	10.56	17.71	28.27	40.00	-11.73	Peak	HORIZONTAL
2	35.87	9.91	17.11	27.02	40.00	-12.98	Peak	HORIZONTAL
3	590.97	11.49	19.37	30.86	46.00	-15.14	Peak	HORIZONTAL
4	645.12	11.02	19.93	30.95	46.00	-15.05	Peak	HORIZONTAL
5	818.83	11.10	22.13	33.23	46.00	-12.77	Peak	HORIZONTAL
6 pp	958.79	11.45	23.70	35.15	46.00	-10.85	Peak	HORIZONTAL

**Transmitter Emission above 1GHz**

Test mode:		GFSK_1Mbps_TX_2402MHz					
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
4804	49.37	-1.33	48.04	74	-25.96	Peak	H
7206	43.47	5.98	49.45	74	-24.55	Peak	H
4802	47.27	-1.34	45.93	74	-28.07	Peak	V
7206	43.15	5.98	49.13	74	-24.87	Peak	V
Test mode:		GFSK_1Mbps_TX_2440MHz					
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
4880	50.64	-0.82	49.82	74	-24.18	Peak	H
7320	46.25	5.91	52.16	74	-21.84	Peak	H
4880	49.71	-0.82	48.89	74	-25.11	Peak	V
7320	45.78	5.91	51.69	74	-22.31	Peak	V
Test mode:		GFSK_1Mbps_TX_2480MHz					
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
4960	47.09	-0.45	46.64	74	-27.36	Peak	H
7440	42.66	5.77	48.43	74	-25.57	Peak	H
4960	45.33	-0.45	44.88	74	-29.12	Peak	V
7440	42.83	5.77	48.6	74	-25.4	Peak	V




**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$
- 2) Scan from 9kHz to 25GHz, the disturbance above 8GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

## 6.10 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205, RSS-Gen Issue 5				
Test Method:	ANSI C63.10 2013 & RSS-Gen Issue 5				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3

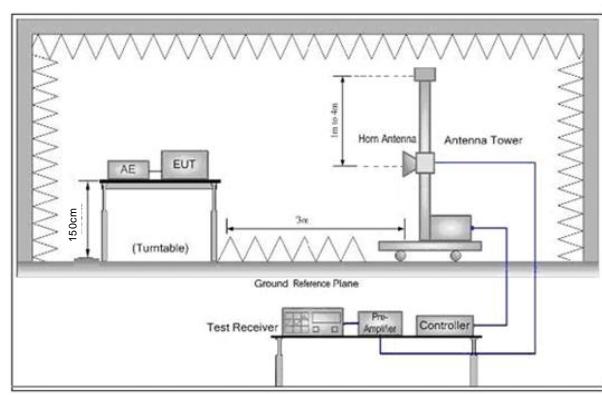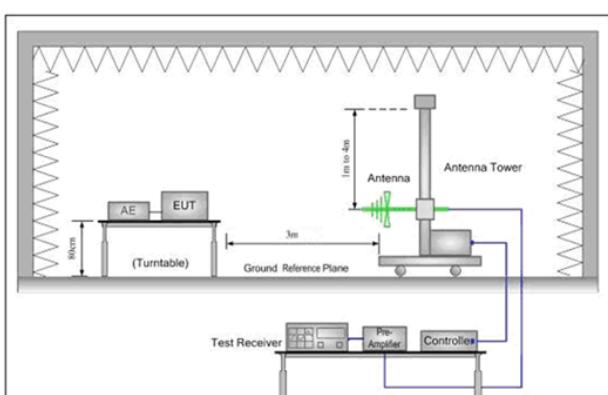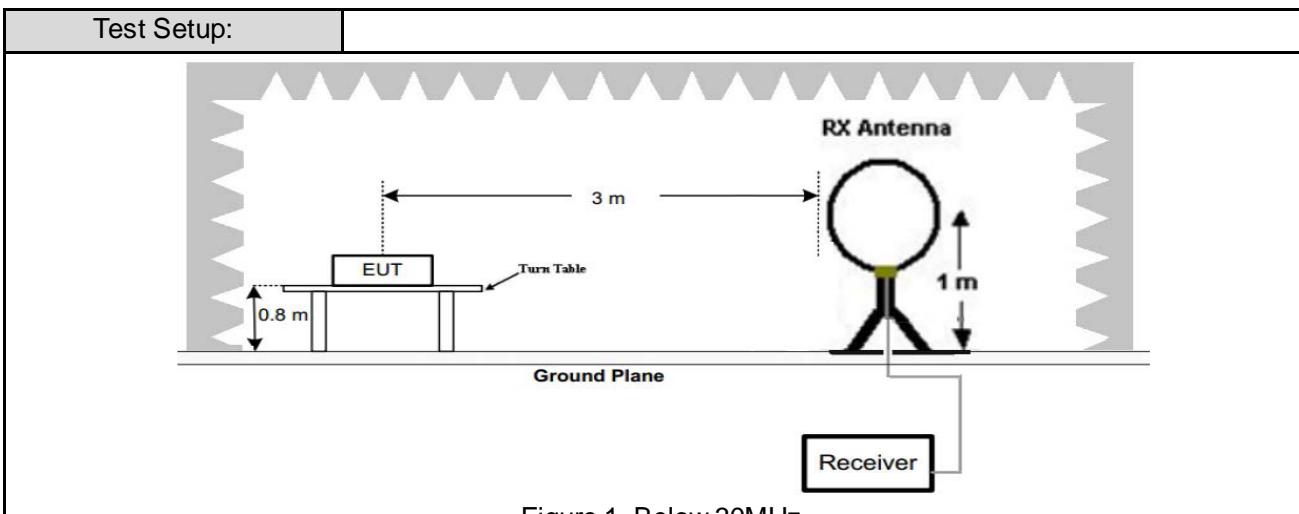


Test Procedure:

- j. 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
Note: For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- k. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- l. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both

	<p>horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>m. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>n. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>o. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>p. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)</p> <p>q. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>r. Repeat above procedures until all frequencies measured was complete.</p>
Test Mode:	Transmitting with GFSK at lowest, middle and highest channel.
Test Results:	Pass

Test mode:	GFSK_1Mbps_TX_2402MHz	Horizontal
------------	-----------------------	------------

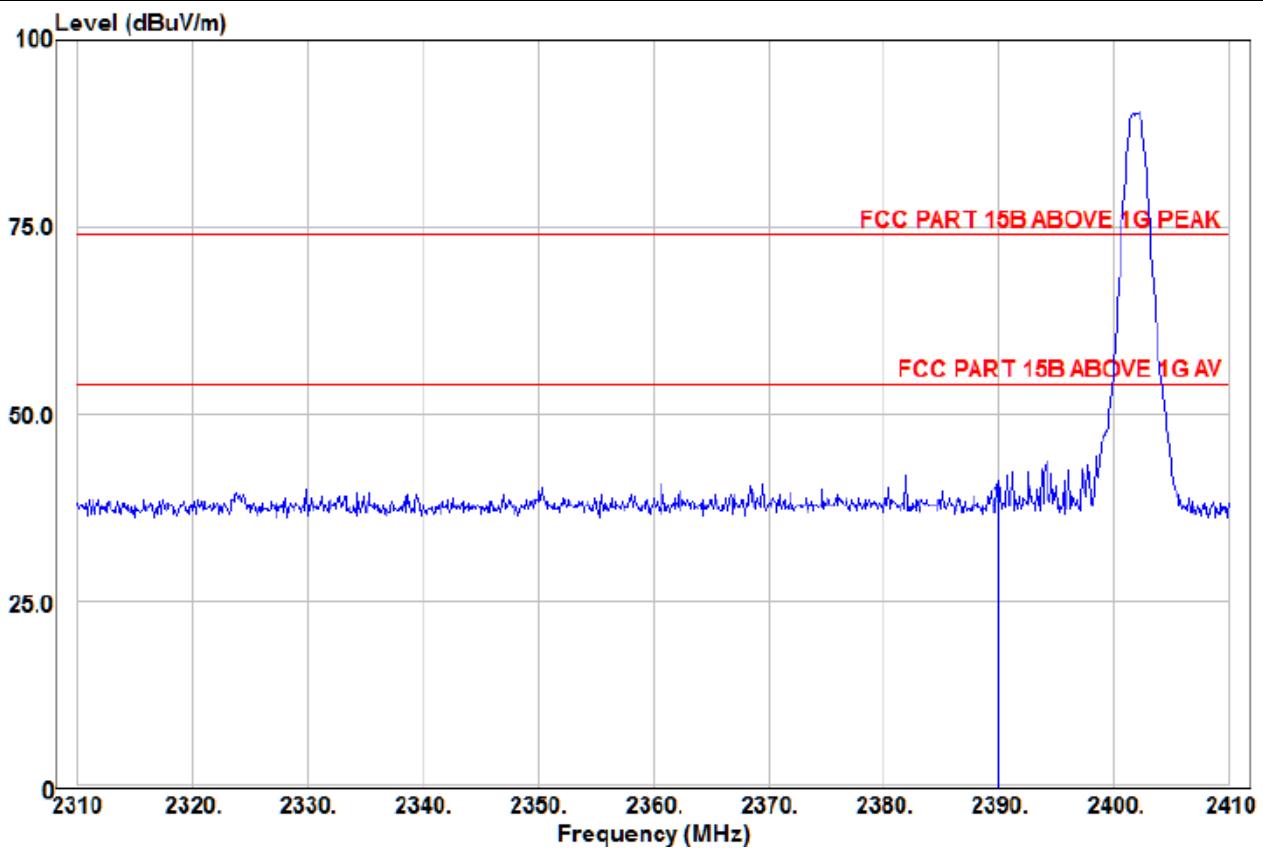


	Read	Limit	Over				
Freq	Level	Factor	Level	Line	Limit	Remark	Pol/Phase
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1 pp	2390.00	46.43	-8.89	37.54	74.00	-36.46	Peak HORIZONTAL

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

Test mode:	GFSK_1Mbps_TX_2402MHz	Vertical
------------	-----------------------	----------

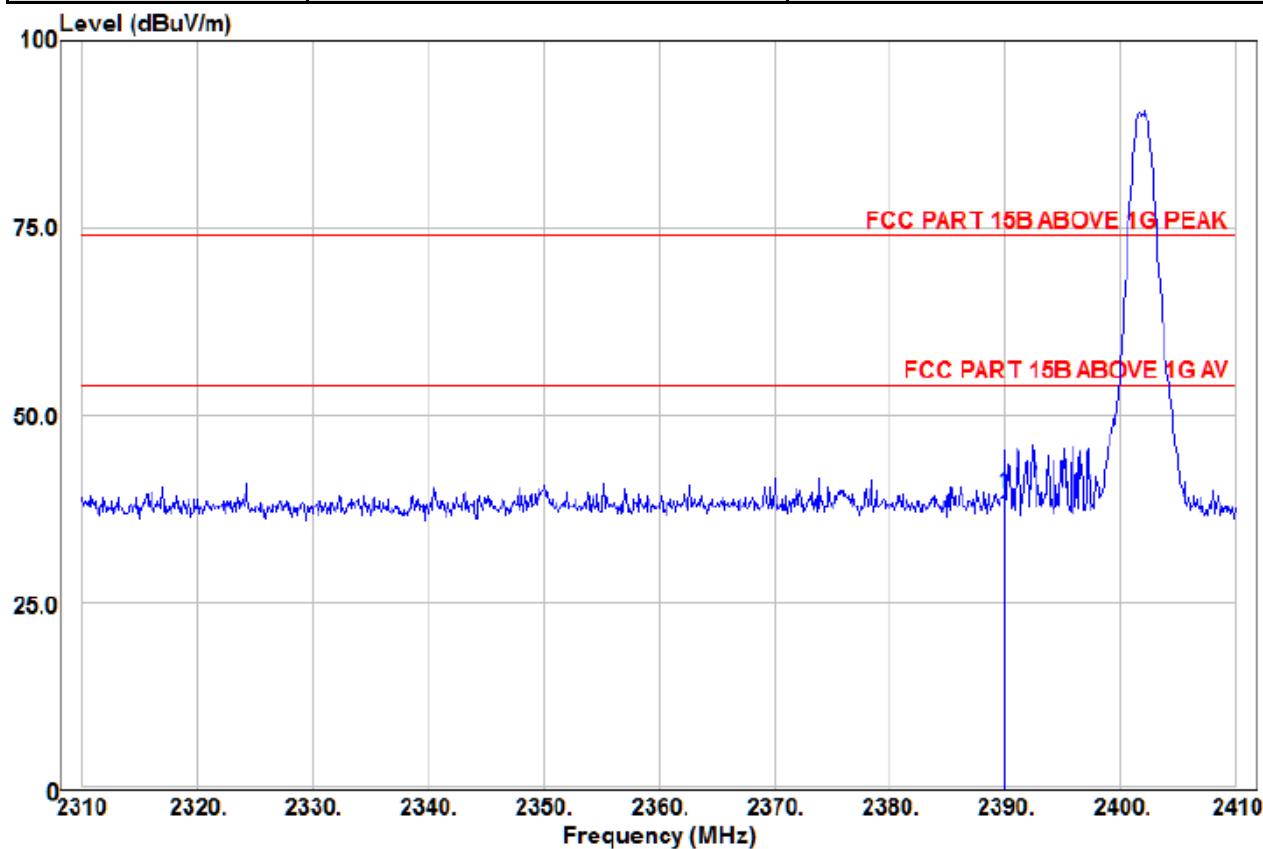


Freq	Read		Limit	Over	Remark	Pol/Phase
	Level	Factor				
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 pp	2390.00	48.33	-8.89	39.44	74.00 -34.56	Peak VERTICAL

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

Test mode:	GFSK_1Mbps_TX_2480MHz	Horizontal
------------	-----------------------	------------

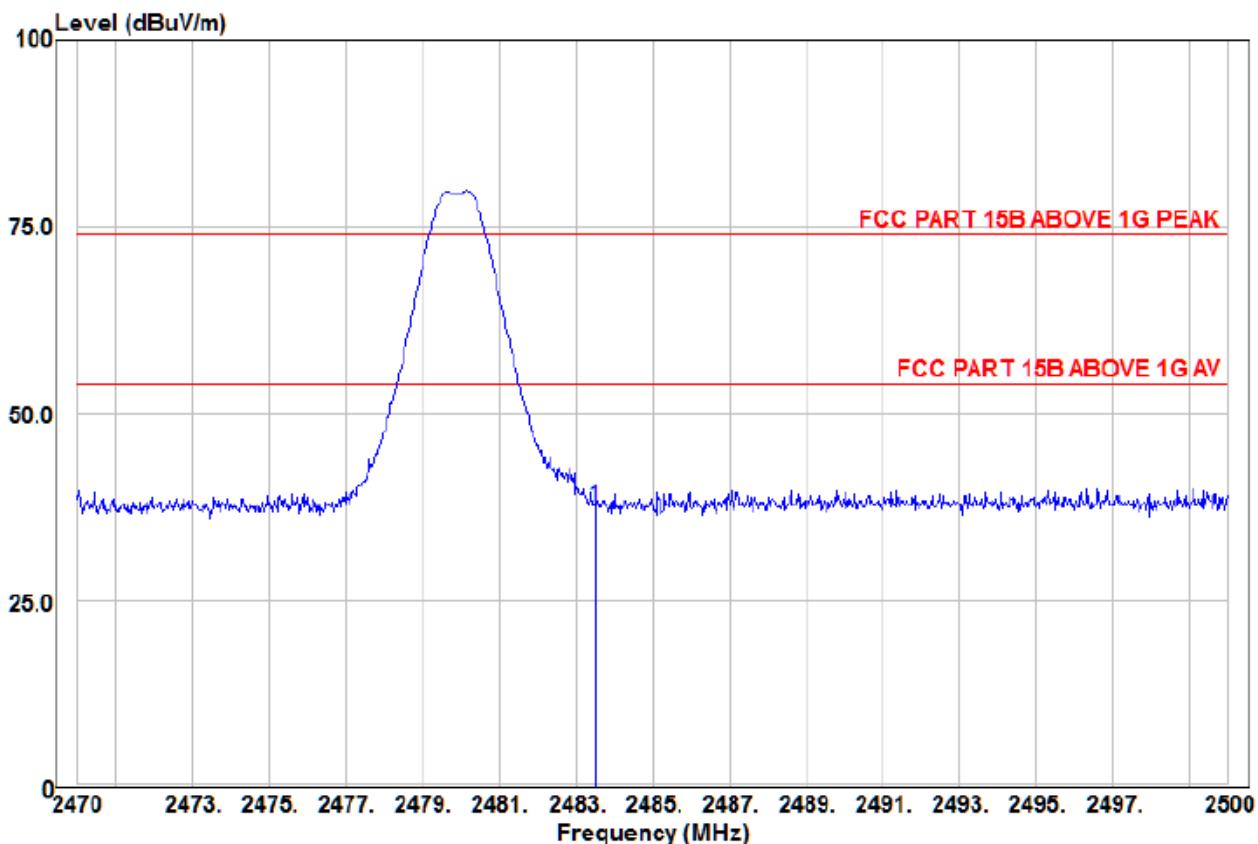


Freq	Read		Limit	Over	Over	Pol/Phase	
	Level	Factor					
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1 pp	2483.50	46.11	-8.68	37.43	74.00	-36.57	Peak HORIZONTAL

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

Test mode:	GFSK_1Mbps_TX_2480MHz	Vertical
------------	-----------------------	----------

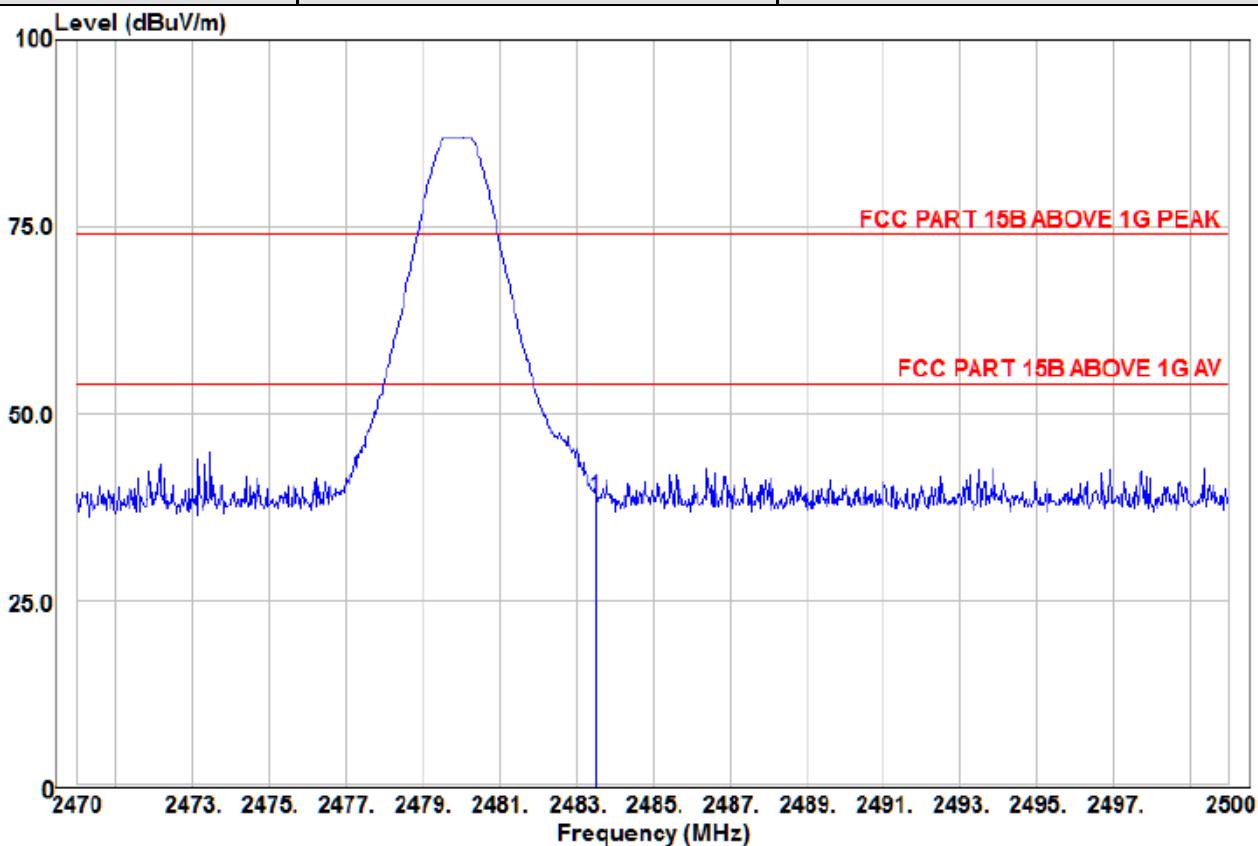

Freq	Read		Limit	Over	Pol/Phase	
	Level	Factor				
MHz	dB <sub>uV</sub>	dB/m	dB <sub>uV/m</sub>	dB <sub>uV/m</sub>	dB	
1 pp	2483.50	47.54	-8.68	38.86	74.00	-35.14 Peak VERTICAL

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor