

Innovation Sound Technology Co.,Ltd

Application For Certification

FCC ID: 2AKSLCECHYA0083

Wireless Stereo Headset

Model: CECHYA-0083

2.4GHz Transceiver

Report No.: 161205020SZN-002

We hereby certify that the sample of the above item is considered to comply with the requirements of FCC Part 15, Subpart C for Intentional Radiator, mention 47 CFR [10-1-15]

Prepared and Checked by:	Approved by:	
Sign on file		
Powell Bao Engineer	Kidd Yang Senior Project Engineer Date: 18 March 2017	

- The test results reported in this test report shall refer only to the sample actually tested and shall not refer or be deemed to refer to bulk from which such a sample
 may be said to have been obtained.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results referenced from this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- For Terms And Conditions of the services, it can be provided upon request.
- The evaluation data of the report will be kept for 3 years from the date of issuance.

TRF No.: FCC 15C_TX_c

LIST OF EXHIBITS

INTRODUCTION

EXHIBIT 1: General Description

EXHIBIT 2: System Test Configuration

EXHIBIT 3: Emission Results

EXHIBIT 4: Equipment Photographs

EXHIBIT 5: Product Labelling

EXHIBIT 6: Technical Specifications

EXHIBIT 7: Instruction Manual

EXHIBIT 8: Miscellaneous Information

EXHIBIT 9: Test Equipment List

MEASUREMENT/TECHNICAL REPORT

Innovation Sound Technology Co.,Ltd

Model: CECHYA-0083

FCC ID: 2AKSLCECHYA0083

This report concerns (check one:)	Original Grant <u>X</u>	Class II Change
Equipment Type: DXX - Part 15 Low Pow	er Communication Devi	ce Transmitter
Deferred grant requested per 47 CFR 0.4	57(d)(1)(ii)? Yes	No <u>X</u>
	If yes, defer until	:
		date
Company Name agrees to notify the Com	mission by:	
		date
of the intended date of announcement of date.	the product so that the	grant can be issued on that
Transition Rules Request per 15.37?	Yes	S No _X
If no, assumed Part 15, Subpart C for Edition] provision.	intentional radiator -	the new 47 CFR [10-1-15
Report prepared by:		
	Powell Bao	
	Intertek Testing Service	es Shenzhen Ltd.
	Guangzhou Branch Block F. No.7-2 Guang	g Dong Software Science
	Park, Caipin Road, Gu	uangzhou Science City,
	GETDD Guangzhou, (Phone: 86-20-8213 9	China 1688
	Fax: 86-20-3205 7	

Table of Contents

1.0 General Description	2
1.1 Product Description 1.2 Related Submittal(s) Grants 1.3 Test Methodology 1.4 Test Facility	2 2
2.0 System Test Configuration	4
2.1 Justification 2.2 EUT Exercising Software. 2.3 Special Accessories 2.4 Equipment Modification 2.5 Measurement Uncertainty 2.6 Support Equipment List and Description	4 4 5
3.0 Emission Results	
3.1 Radiated Test Results	8 8
3.1.2 Radiated Emission Configuration Photograph	9
3.2 Conducted Emissions at Mains Termina	15 15
4.0 Equipment Photographs	19
5.0 Product Labelling	21
6.0 <u>Technical Specifications</u>	23
7.0 Instruction Manual	25
8.0 Miscellaneous Information	27
8.1 Bandedge Plot	
8.2 Discussion of Pulse Desensitization	
8.3 Transmitter Duty Cycle Calculation	
9.0 Test Equipment List	35

List of attached file

Exhibit type	File Description	Filename
Test Report	Test Report	report.pdf
Test Setup Photo	Radiated Emission	radiated photos.pdf
Test Setup Photo	Conducted Emission	conducted photos.pdf
Test Report	Bandedge Plot	bandedge.pdf
Test Report	20dB BW Plot	bw.pdf
External Photo	External Photo	external photos.pdf
Internal Photo	Internal Photo	internal photos.pdf
Block Diagram	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
Operation Description	Technical Description	descri.pdf
ID Label/Location	Label Artwork and Location	label.pdf
User Manual	User Manual	manual.pdf
Cover Letter	Confidentiality Letter	request.pdf
Cover Letter	Letter of Agency	agency.pdf

EXHIBIT 1 GENERAL DESCRIPTION

1.0 General Description

1.1 Product Description

The equipment under test (EUT) is a Wireless Stereo Headset with 2.4G wireless function operating in 2403.35-2479.35MHz. The EUT is powered by DC3.7V rechargeable battery. And the USB port is used for charging. There are two identical antennas inside and they can't not transmit simultaneously. For more detail information pls. refer to the user manual.

Antenna type: Integral antenna Modulation Type: π/4DQPSK

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is an application for certification of a transceiver for 2.4G wireless stereo headset, and the corresponding wireless adaptor is in the process of being filed under FCC ID:2AKSLCECHYA0082 at the same time. For the other digital functions were tested and demonstrated in report 161205022SZN-001.

1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in Semi-anechoic chamber and conducted emission measurement was performed in shield room. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

1.4 Test Facility

The Semi-anechoic chamber and shielding room used to collect the radiated data and conducted data are **EMTEK** (Shenzhen) Co., Ltd. and located at Bldg. 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, 518052, China. This test facility and site measurement data have been fully placed on file with the FCC (Registration Number: 406365).

EXHIBIT 2 SYSTEM TEST CONFIGURATION

2.0 System Test Configuration

2.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The EUT was powered by DC3.7V rechargeable battery or charged by USB port from PC with AC 120V/60Hz during the test.

Two antennas with modulation type $\pi/4DQPSK$ were tested and only the worst data was reported in this report.

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was placed on a turn table, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

The EUT exercise program (provided by client) used during testing was designed to exercise the various system components in a manner similar to a typical use.

2.3 Special Accessories

USB Cable with one ferrite.

2.4 Equipment Modification

Any modifications installed previous to testing by Innovation Sound Technology Co.,Ltd will be incorporated in each production model sold / leased in the United States.

No modifications were installed by Intertek Testing Services Shenzhen Ltd Guangzhou Branch.

TRF No.: FCC 15C_TX_c FCC ID: 2AKSLCECHYA0083

4

2.5 Measurement Uncertainty

When determining the test conclusion, the Measurement Uncertainty of test has been considered.

2.6 Support Equipment List and Description

Description	Manufacturer	Model No.	
Laptop	Lenovo	T420	
Hard disk	TOSHIBA	UHYBS-004G-BL	
iPod	Apple	A1442	
Audio In Cable	N/A	Unshielded, Length 120cm	
USB cable	N/A	Unshielded, Length 80cm	
RJ45 cable	N/A	Unshielded, Length 500cm	
USB Cable With one ferrite	Innovation Sound Technology Co.,Ltd	Shielded, Length 50cm	

EXHIBIT 3 EMISSION RESULTS

3.0 Emission Results

Data is included worst-case configuration (the configuration which resulted in the highest emission levels).

3.1 Radiated Test Results

A sample calculation, configuration photographs and data tables of the emissions are included.

3.1.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

FS = RA + AF + CF - AG + PD + AV

Where FS = Field Strength in dBµV/m

RA = Receiver Amplitude (including preamplifier) in dBµV

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Assume a receiver reading of 62.0 dBµV is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dBµV/m. This value in dBµV/m was converted to its corresponding level in µV/m.

 $RA = 62.0 dB\mu V$ AF = 7.4 dB

CF = 1.6 dB

 $AG = 29.0 \, dB$

PD = 0 dB

AV = -10 dB

 $FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 dB\mu V/m$

Level in μ V/m = Common Antilogarithm [(32 dB μ V/m)/20] = 39.8 μ V/m

3.1.2 Radiated Emission Configuration Photograph

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

3.1.3 Radiated Emissions

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Worst Case Radiated Emission at 276.865 MHz

Judgement: Passed by 7.3 dB

TEST PERSONNEL:

Sign on file

Powell Bao, Engineer
Typed/Printed Name

16 December 2016

Date

Applicant: Innovation Sound Technology Co.,Ltd Date of Test: 16 December 2016

Model: CECHYA-0083

Sample: 1/1

Worst Case Operating Mode: Transmitting

Modulation type: $\pi/4DQPSK$

Table 1

Radiated Emissions

Polarization	Frequency	Reading	Pre-	Antenna	Net	Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(dBµV/m)	(dBµV/m)	
			(dB)				
Horizontal	117.300	37.3	20.0	14.9	32.2	43.5	-11.3
Horizontal	276.865	41.3	20.0	17.4	38.7	46.0	-7.3
Horizontal	344.765	29.5	20.0	27.7	37.2	46.0	-8.8
Vertical	31.455	41.0	20.0	8.3	29.3	40.0	-10.7
Vertical	126.030	39.6	20.0	13.0	32.6	43.5	-10.9
Vertical	418.000	40.8	20.0	17.3	38.1	46.0	-7.9

NOTES: 1. Quasi-Peak detector is used except for others stated.

- 2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- 3. Negative value in the margin column shows emission below limit.
- 4. All emissions are below the QP limit.

TRF No.: FCC 15C_TX_c FCC ID: 2AKSLCECHYA0083

10

3.1.4 Transmitter Spurious Emissions (Radiated)

Worst Case Radiated Emission at 7438.050 MHz

For electronic filing, the worst case radiated emission configuration photograph is saved with filename: radiated photos. pdf.

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgement: Passed by 11.6 dB

TEST PERSONNEL:

Sign on file

Powell Bao, Engineer
Typed/Printed Name

16 December 2016 Date

Applicant: Innovation Sound Technology Co.,Ltd Date of Test: 16 December 2016

Model: CECHYA-0083

Sample: 1/1

Worst Case Operating Mode: Transmitting

Table 2

Radiated Emissions

(2403.350MHz)

Polarization	Frequency	Reading	Pre-	Antenna	Net	Peak Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(dBµV/m)	(dBµV/m)	
			(dB)				
Horizontal	2403.350	99.0	36.7	28.5	90.8	114.0	-23.2
Horizontal	4806.700	56.3	36.7	35.0	54.6	74.0	-19.4
Horizontal	7210.050	57.8	36.1	37.0	58.7	74.0	-15.3

Polarization	Frequency	Reading	Pre-	Antenna	Net	Average Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(dBµV/m)	(dBµV/m)	
			(dB)				
Horizontal	2403.350	73.6	36.7	28.5	65.4	94.0	-28.6
Horizontal	4806.700	36.3	36.7	35.0	34.6	54.0	-19.4
Horizontal	7210.050	34.6	36.1	37.0	35.5	54.0	-18.5

- Notes: 1. Peak detector is used for the emission measurement (RBW=1MHz / VBW=3MHz for Peak value, and RBW=1MHz / VBW=10Hz for Average value; RBW=3MHz is used for fundamental emission measurement).
 - 2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
 - 3. Negative value in the margin column shows emission below limit.
 - 4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Powell Bao

Applicant: Innovation Sound Technology Co.,Ltd Date of Test: 16 December 2016

Model: CECHYA-0083

Sample: 1/1

Worst Case Operating Mode: Transmitting

Table 3

Radiated Emissions

(2441.350MHz)

Polarization	Frequency	Reading	Pre-	Antenna	Net	Peak Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(dBµV/m)	(dBµV/m)	
			(dB)				
Horizontal	2441.350	98.7	36.7	28.5	90.5	114.0	-23.5
Horizontal	4882.700	58.2	36.7	35.0	56.5	74.0	-17.5
Horizontal	7324.050	60.7	36.1	37.0	61.6	74.0	-12.4

Polarization	Frequency	Reading	Pre-	Antenna	Net	Average Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(dBµV/m)	(dBµV/m)	
			(dB)				
Horizontal	2441.350	80.7	36.7	28.5	72.5	94.0	-21.5
Horizontal	4882.700	35.3	36.7	35.0	33.6	54.0	-20.4
Horizontal	7324.050	35.4	36.1	37.0	36.3	54.0	-17.7

Notes: 1. Peak detector is used for the emission measurement (RBW=1MHz / VBW=3MHz for Peak value, and RBW=1MHz / VBW=10Hz for Average value; RBW=3MHz is used for fundamental emission measurement).

- 2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- 3. Negative value in the margin column shows emission below limit.
- 4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Powell Bao

Applicant: Innovation Sound Technology Co.,Ltd Date of Test: 16 December 2016

Model: CECHYA-0083

Sample: 1/1

Worst Case Operating Mode: Transmitting

Table 4

Radiated Emissions

(2479.350MHz)

Polarization	Frequency	Reading	Pre-	Antenna	Net	Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(dBµV/m)	(dBµV/m)	
			(dB)				
Horizontal	2479.350	97.9	36.7	28.3	89.5	114.0	-24.5
Horizontal	4958.700	55.2	36.7	35.3	53.8	74.0	-20.2
Horizontal	7438.050	61.5	36.1	37.0	62.4	74.0	-11.6

Polarization	Frequency	Reading	Pre-	Antenna	Net	Average Limit	Margin
	(MHz)	(dBµV)	Amp	Factor	at 3m	at 3m	(dB)
			Gain	(dB)	(dBµV/m)	(dBµV/m)	
			(dB)				
Horizontal	2479.350	77.1	36.7	28.3	68.7	94.0	-25.3
Horizontal	4958.700	32.2	36.7	35.3	30.8	54.0	-23.2
Horizontal	7438.050	41.3	36.1	37.0	42.2	54.0	-11.8

Notes: 1. Peak detector is used for the emission measurement (RBW=1MHz / VBW=3MHz for Peak value, and RBW=1MHz / VBW=10Hz for Average value; RBW=3MHz is used for fundamental emission measurement).

- 2. All measurements were made at 3 meter. Harmonic emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
- 3. Negative value in the margin column shows emission below limit.
- 4. Horn antenna is used for the emission over 1000MHz.

Test Engineer: Powell Bao

- 3.2 Conducted Emission at Mains Terminal
- 3.2.1 Conducted Emissions Configuration Photograph

For electronic filing, the worst case conducted emission configuration photograph is saved with filename: conducted photos.pdf.

3.2.2 Conducted Emissions

Worst Case Conducted Configuration
At

0.638 MHz

Judgement: Passed by 12.3 dB margin

TEST PERSONNEL:

Sign on file

Powell Bao, Engineer
Typed/Printed Name

16 December 2016 Date

Date of Test: 16 December 2016

Applicant: Innovation Sound Technology Co.,Ltd


Model: CECHYA-0083

Sample: 1/1

Worst Case Operating Mode: Wireless Link

Phase: Live

Conducted Emission Test - FCC

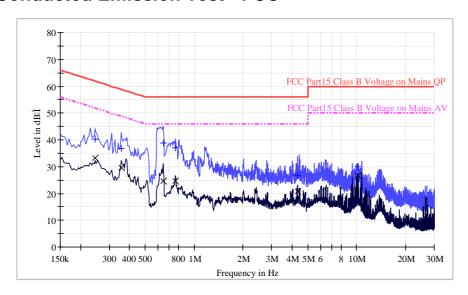

Result Table QP

Frequency	QuasiPeak	Line	Corr.	Margin	Limit
(MHz)	(dB µ V)		(dB)	(dB)	(dB µ V)
0.246	40.4	L	9.7	21.5	61.9
0.358	36.8	L	9.7	22.0	58.8
0.646	38.9	L	9.7	17.1	56.0
0.770	37.1	L	9.7	18.9	56.0
4.314	26.7	L	9.8	29.3	56.0
10.246	29.9	L	9.9	30.1	60.0

Result Table AV

Frequency	Average	Line	Corr.	Margin	Limit
(MHz)	(dB µ V)		(dB)	(dB)	(dB µ V)
0.246	33.0	L	9.7	18.9	51.9
0.358	29.5	L	9.7	19.3	48.8
0.646	24.7	L	9.7	21.3	46.0
0.770	24.5	L	9.7	21.5	46.0
4.314	20.8	L	9.8	25.2	46.0
10.246	26.8	L	9.9	23.2	50.0

TRF No.: FCC 15C_TX_c FCC ID: 2AKSLCECHYA0083

16

Date of Test: 16 December 2016

Applicant: Innovation Sound Technology Co.,Ltd


Model: CECHYA-0083

Sample: 1/1

Worst Case Operating Mode: Wireless Link

Phase: Neutral

Conducted Emission Test - FCC

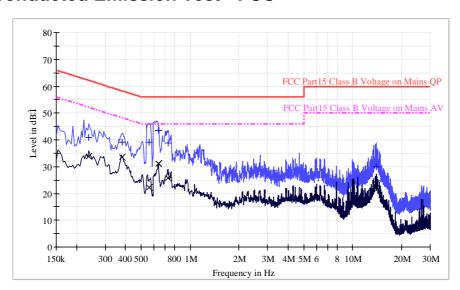

Result Table QP

Frequency	QuasiPeak	Line	Corr.	Margin	Limit
(MHz)	(dB µ V)		(dB)	(dB)	(dB µ V)
0.238	40.9	L	9.7	21.3	62.2
0.382	39.2	L	9.7	19.0	58.2
0.562	39.0	L	9.7	17.0	56.0
0.638	43.7	L	9.7	12.3	56.0
0.639	43.7	L	9.7	12.4	56.0
0.730	38.8	L	9.7	17.2	56.0

Result Table AV

Frequency	Average	Line	Corr.	Margin	Limit
(MHz)	(dB µ V)		(dB)	(dB)	(dB µ V)
0.238	33.7	L	9.7	18.5	52.2
0.382	33.5	L	9.7	14.7	48.2
0.562	22.2	L	9.7	23.8	46.0
0.638	31.1	L	9.7	14.9	46.0
0.638	31.1	L	9.7	14.9	46.0
0.730	25.7	L	9.7	20.3	46.0

TRF No.: FCC 15C_TX_c FCC ID: 2AKSLCECHYA0083

17

EXHIBIT 4 EQUIPMENT PHOTOGRAPHS

4.0 **Equipment Photographs**

For electronic filing, the photographs of the tested EUT are saved with filename: external photos.pdf & internal photos.pdf.

EXHIBIT 5

PRODUCT LABELLING

5.0 **Product Labelling**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

EXHIBIT 6 TECHNICAL SPECIFICATIONS

6.0 <u>Technical Specifications</u>

For electronic filing, the block diagram and schematics of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

EXHIBIT 7 INSTRUCTION MANUAL

7.0 <u>Instruction Manual</u>

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

EXHIBIT 8

MISCELLANEOUS INFORMATION

8.0 <u>Miscellaneous Information</u>

This miscellaneous information includes details of the measured bandedge, the test procedure and calculation of factor such as pulse desensitization.

8.1 Bandedge Plot

For electronic filing, the plot shows the fundamental emission when modulated is saved with filename: bandedge.pdf. From the plot, the field strength of any emissions outside of the specified frequency band are attenuated to the general radiated emission limits in section 15.209. It fulfils the requirement of 15.249(d).

Peak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e (Bandedge Plot).

(i) Lower channel 2403.350MHz:

Peak Resultant field strength = Fundamental emissions (peak value) - delta from the bandedge plot

= $90.8 \text{ dB}\mu\text{v/m}-37.2 \text{ dB}$ = $53.6 \text{ dB}\mu\text{v/m}$

(ii) Upper channel 2479.350MHz:

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the bandedge plot

 $= 89.5 \text{ dB}\mu\text{v/m-44.5 dB}$ = 45.0 dB $\mu\text{v/m}$

The resultant field strength meets the general radiated emission limit in section 15.209, which does not exceed 74dBµv/m (Peak Limit) and 54dBµv/m (Average Limit).

TRF No.: FCC 15C_TX_c FCC ID: 2AKSLCECHYA0083

28

8.1 Bandedge Plot (cont'd)

Pursuant to FCC part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over excepted variations in temperature and supply voltage were considered.

Figure 8.1 Bandwidth

8.2 Discussion of Pulse Desensitization

Pulse desensitivity is not applicable for this device since the transmitter transmits the RF signal continuously.

8.3 Transmitter Duty Cycle Calculation, FCC Rule 15.35 (b, c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The Transmitter ON time was determined from the resultant time-amplitude display:

	See attached spectrum analyzer chart (s) for Transmitter timing
	See Transmitter timing diagram provided by manufacturer
Х	Not applicable, duty cycle was not used.

8.4 Emissions Test Procedures

The following is a description of the test procedure used by Intertek Testing Services in the measurements of transmitters operating under Part 15, Subpart C rules.

The test set-up and procedures described below are designed to meet the requirements of ANSI C63.10 - 2013.

The transmitting equipment under test (EUT) is placed on a styrene turntable which is four feet in diameter, up to 1GHz 0.8m and above 1GHz 1.5m in height above the ground plane. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusting through all three orthogonal axes to obtain maximum emission levels. The antenna height and polarization are varied during the testing to search for maximum signal levels.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

Detector function for conducted emissions is in QP & AV mode and IFBW setting is 9 kHz from the frequency band 150 kHz to 30MHz.

TRF No.: FCC 15C_TX_c FCC ID: 2AKSLCECHYA0083

32

8.4 Emissions Test Procedures (cont'd)

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements are made as described in ANSI C63.10 - 2013.

The IF bandwidth used for measurement of radiated signal strength was 10 kHz for emission below 30 MHz and 120 kHz for emission from 30 MHz to 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. Above 1000 MHz, a resolution bandwidth of 1 MHz is used (RBW 3MHz used for fundamental emission).

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the restricted bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, but those measurements taken at a closer distance are so marked.

EXHIBIT9

TEST EQUIPMENT LIST

9.0 <u>Test Equipment List</u>

Equipment No.	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
EE089	EMI Test Receiver	Rohde & Schwarz	ESU	1302.600 5.26	17-May-2016	17-May-2017
EE040	Pre-Amplifier	HP	8447F	2944A07 999	17-May-2016	17-May-2017
EE043	Bilog Antenna	Schwarzbeck	VULB916 3	142	17-May-2016	17-May-2017
EE147	Cable	Schwarzbeck	AK9513	ACRX1	17-May-2016	17-May-2017
EE169	Cable	Rosenberger	N/A	FP2RX2	17-May-2016	17-May-2017
EE168	Cable	Schwarzbeck	AK9513	CRPX1	29-May-2016	29-May-2017
EE170	Cable	Schwarzbeck	AK9513	CRRX2	29-May-2016	29-May-2017
EE096	Pre-Amplifier	A.H.	PAM- 0126	1415261	17-May-2016	17-May-2017
EE094	Horn Antenna	Schwarzbeck	BBHA 9120	707	29-May-2016	29-May-2017
EE097	Cable	H+B	0.5M SF104- 26.5	289147/4	29-May-2016	29-May-2017
EE100	Cable	H+B	3M SF104- 26.5	295838/4	29-May-2016	29-May-2017
EE101	Cable	H+B	6M SF104- 26.5	295840/4	29-May-2016	29-May-2017
EE095	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA917 0399	17-May-2016	17-May-2017
EE343	EMI Test Receiver	Rohde & Schwarz	FSV40	132.1- 3008K39- 100967- AP	29-May-2016	29-May-2017
EE240	Pre-Amplifier	Lunar EM	LNA26G4 0-40	J1013131 028001	17-May-2016	17-May-2017
EE234	Horn Antenna	AHS/USA	SAS-573	184	17-May-2016	17-May-2017
EE312	Cable	A.H	SAC- 40G-1	414	17-May-2016	17-May-2017
EE313	Cable	A.H	SAC- 40G-1	413	17-May-2016	17-May-2017
EE023	Test Receiver	Rohde & Schwarz	ESCS30	879	29-May-2016	29-May-2017
EE145	L.I.S.N.	Rohde & Schwarz	ENV216	590	29-May-2016	29-May-2017
EE021	L.I.S.N.	ROHDE & SCHWARZ	ESH2-Z5	236	29-May-2016	29-May-2017