

Testing Tomorrow's Technology

**CFR 47 FCC Part 2, Subpart J, and FCC Part 90, Subpart I
Certification for Private Land Mobile Radio Services,
Part 90.219 Use of signal boosters**

And

**ANSI/TIA-603-E (2016), Equipment Measurement and Performance
Standards**

And

**Innovation, Science and Economic Development Canada, RSS-131,
Spectrum Management and Telecommunications Radio Standards
Specification, Zone Enhancers,
Clause 6 Equipment Standard specifications for zone enhancers
working with equipment certified under RSS-119**


For the

**Safe-Com Wireless
Model: SAFE-0002**

**FCC ID: 2AKSM-SAFE4
IC: 22303-SAFE4**

**UST Project No: 24-0123
August 1, 2024**

**3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com**

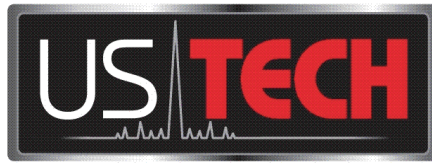

Testing Tomorrow's Technology

I certify that I am authorized to sign for the Test Agency and that the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US Tech (Agent Responsible for Test):

By:

Name: Alan Ghasiani

Title: Consulting Engineer/President


Date: August 1, 2024



NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of U.S. Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

3505 Francis Circle Alpharetta, GA 30004
PH: 770-740-0717 Fax: 770-740-1508
www.ustech-lab.com

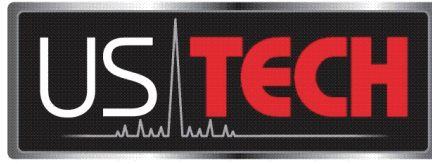

Testing Tomorrow's Technology

MEASUREMENT/TECHNICAL REPORT

This report concerns (check one): Original grant ☒ X ☐
Class II change ☐

Reevaluation ☐

Equipment type: Part 90.219 Amplifier/Signal Booster (Class B)

Applicant /Manufacturer Name and Address:

Safe-Com Wireless
21 Longview Drive
Holmdel, NJ 07733
USA

Report prepared by:

US Tech
3505 Francis Circle
Alpharetta, GA 30004

Phone Number: (770) 740-0717

Fax Number: (770) 740-1508

TABLE OF CONTENTS

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
1	General Information	15
1.1	Product Description.....	15
1.2	Related Submittal(s)/Grant(s)	15
1.3	Summary of Tests	15
2	Test and Measurements	16
2.1	Configuration of Tested System.....	16
2.2	Characterization of Tested System	16
2.3	Test Facility	16
2.4	Test Equipment.....	16
2.5	Modifications to Equipment under Test (EUT)	16
2.6	Noise (FCC Section 90.219(e)(2) and RSS-131, 6.4).....	20
2.7	Retransmitted Signals (FCC Section 90.219(e)(4) and RSS-131, 6.6)	20
2.8	Emission Mask Definitions (FCC Section 2.1049, 90.219(e)(4iii), 90.210, RSS-131, 6.5, RSS-119, 5.8)	21
2.8.1	Emission Mask B (FCC Part 90.210, 2.1051, RSS-119, 5.8).....	21
2.8.2	Emission Mask D (FCC Part 90.210, 2.1051, RSS-119, 5.8).....	21
2.8.3	Emission Mask E (FCC Part 90.210, 2.1051, RSS-119, 5.8).....	22
2.8.4	Emission Mask I (FCC Part 90.210, 2.1051, RSS-119, 5.8)	22
2.9	RF Power Output (FCC Section 2.1046, 90.219(e)(1), RSS-131, 6.2).....	23
2.10	Output Power Plots	24
2.11	Emission Mask and Retransmitted Signal Measurements	35
2.11.1	VHF Channels	35
2.11.2	UHF Channels	50
2.11.3	700 MHz Channels	62
2.11.4	800 MHz Channel	89
2.12	Spurious Emissions (FCC Section 90.219(d)(e)(3) and RSS-131, 6.5)	99
2.12.1	Radiated Spurious Emissions Measurement	99
2.12.2	Conducted Spurious Emissions Measurement (90.219(e)(4), RSS-131, 6.5) 162	
2.13	AGC Threshold (KDB 935210 D05 v01r04 4.2)	224
2.13.1	Measuring AGC Threshold	224
2.14	Out-of-Band Rejection (KDB 935210 D05 v01r04 4.3)	225
2.14.1	Out-of-Band Rejection Measurement.....	225
2.15	Measurement Uncertainty	228
2.15.1	Radiated Spurious Emissions Measurement Uncertainty	228
2.15.2	Conducted Radio Emissions Measurement Uncertainty	228
3	Conclusions.....	228
3.1	Test Outcome	228

List of Figures

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

<u>Figure</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration.....	17
Figure 2.	150 MHz Output Power Plot.....	24
Figure 3.	162 MHz Output Power Plot.....	24
Figure 4.	174 MHz Output Power Plot.....	25
Figure 5.	407 MHz Output Power Plot.....	25
Figure 6.	421 MHz Output Power Plot.....	26
Figure 7.	480 MHz Output Power Plot.....	26
Figure 8.	512 MHz Output Power Plot.....	27
Figure 9.	758 MHz Output Power Plot.....	27
Figure 10.	763 MHz Output Power Plot.....	28
Figure 11.	768 MHz Output Power Plot.....	28
Figure 12.	769 MHz Output Power Plot.....	29
Figure 13.	775 MHz Output Power Plot.....	29
Figure 14.	788 MHz Output Power Plot.....	30
Figure 15.	798 MHz Output Power Plot.....	30
Figure 16.	799 MHz Output Power Plot.....	31
Figure 17.	805 MHz Output Power Plot.....	31
Figure 18.	806 MHz Output Power Plot.....	32
Figure 19.	815 MHz Output Power Plot.....	32
Figure 20.	824 MHz Output Power Plot.....	33
Figure 21.	851 MHz Output Power Plot.....	33
Figure 22.	860 MHz Output Power Plot.....	34
Figure 23.	869 MHz Output Power Plot.....	34
Figure 24.	Input 150 MHz @ 6.25 kHz	35
Figure 25.	150 MHz @ 6.25 kHz, Mask E	36
Figure 26.	150 MHz@ 6.25 kHz + 3.0 dB, Mask E.....	37
Figure 27.	Input 150 MHz @ 12.5 kHz	38
Figure 28.	150 MHz @ 12.5 kHz, Mask D	38
Figure 29.	150 MHz @ 12.5 kHz + 3.0 dB, Mask D.....	39
Figure 30.	Input 150 MHz @ 25 kHz	39
Figure 31.	150 MHz @ 25 kHz, Mask B	40
Figure 32.	150 MHz @ 25 kHz + 3.0 dB, Mask B	40
Figure 33.	Input 162 MHz @ 6.25 kHz	41
Figure 34.	162 MHz @ 6.25 kHz, Mask E	41
Figure 35.	162 MHz @ 6.25 kHz + 3.0 dB, Mask E.....	42
Figure 36.	Input 162 MHz @ 12.5 kHz	42
Figure 37.	162 MHz @ 12.5 kHz, Mask D	43
Figure 38.	162 MHz @ 12.5 kHz + 3.0 dB, Mask D.....	43
Figure 39.	Input 162 MHz @ 25 kHz	44
Figure 40.	162 MHz @ 25 kHz, Mask B	44
Figure 41.	162 MHz @ 25 kHz + 3.0 dB, Mask B	45
Figure 42.	Input 174 MHz @ 6.25 kHz	45
Figure 43.	174 MHz @ 6.25 kHz, Mask E	46
Figure 44.	174 MHz @ 6.25 kHz + 3.0 dB, Mask E.....	46

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

Figure 45. Input 174 MHz @ 12.5 kHz	47
Figure 46. 174 MHz @ 12.5 kHz, Mask D	47
Figure 47. 174 MHz @ 12.5 kHz + 3.0 dB, Mask D	48
Figure 48. Input 174 MHz @ 25	48
Figure 49. 174 MHz @ 25 kHz, Mask B	49
Figure 50. 174 MHz @ 25 kHz + 3.0 dB, Mask B	49
Figure 51. Input 407 MHz @ 12.5 kHz	50
Figure 52. 407 MHz @ 12.5 kHz, Mask B	50
Figure 53. 407 MHz @ 12.5 kHz + 3.0 dB, Mask B	51
Figure 54. Input 407 MHz @ 25 kHz	51
Figure 55. 407 MHz @ 25 kHz, Mask B	52
Figure 56. 407 MHz @ 25 kHz + 3.0 dB, Mask B	52
Figure 57. Input 421 MHz @ 12.5 kHz	53
Figure 58. 421 MHz @ 12.5 kHz, Mask D	53
Figure 59. 421 MHz @ 12.5 kHz, +3 dB, Mask D	54
Figure 60. Input 421 MHz @ 25 kHz	54
Figure 61. Input 421 MHz @ 25 kHz, Mask B	55
Figure 62. Input 421 MHz @ 25 kHz, +3 dB, Mask B	55
Figure 63. Input 480 MHz @ 12.5 kHz	56
Figure 64. 480 MHz @ 12.5 kHz, Mask D	56
Figure 65. 480 MHz @ 12.5 kHz + 3.0 dB, Mask D	57
Figure 66. Input 480 MHz @ 25 kHz	57
Figure 67. 480 MHz @ 25 kHz, Mask B	58
Figure 68. 480 MHz @ 25 kHz + 3.0 dB, Mask B	58
Figure 69. Input 512 MHz @ 12.5 kHz	59
Figure 70. 512 MHz @ 12.5 kHz, Mask D	59
Figure 71. 512 MHz @ 12.5 kHz +3 dB, Mask D	60
Figure 72. Input 512 MHz @ 25 kHz	60
Figure 73. 512 MHz @ 25 kHz, Mask B	61
Figure 74. 512 MHz @ 25 kHz + 3.0, Mask B	61
Figure 75. Input 758 MHz @ 12.5 kHz	62
Figure 76. 758 MHz @ 12.5 kHz, Mask B	62
Figure 77. 758 MHz @ 12.5 kHz +3 dB, Mask B	63
Figure 78. Input 758 MHz @ 25 kHz	63
Figure 79. 758 MHz @ 25 kHz, Mask B	64
Figure 80. 758 MHz @ 25 kHz + 3 dB, Mask B	64
Figure 81. Input 763 MHz @ 12.5 kHz	65
Figure 82. 763 MHz @ 12.5 kHz, Mask B	65
Figure 83. 763 MHz @ 12.5 kHz +3.0 dB, Mask B	66
Figure 84. Input 763 MHz @ 25 kHz	66
Figure 85. 763 MHz @ 25 kHz, Mask B	67
Figure 86. 763 MHz @ 25 kHz +3.0 dB, Mask B	67
Figure 87. Input 768 MHz @ 12.5 kHz	68
Figure 88. 768 MHz @ 12.5 kHz, Mask B	68
Figure 89. 768 MHz @ 12.5 kHz +3.0 dB, Mask B	69

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

Figure 90. Input 768 MHz @ 25 kHz	70
Figure 91. 768 MHz @ 25 kHz, Mask B	70
Figure 92. 768 MHz @ 25 kHz +3.0 dB, Mask B	71
Figure 93. Input 769 MHz @ 12.5 kHz	71
Figure 94. 769 MHz @ 12.5 kHz, Mask B	72
Figure 95. 769 MHz @ 12.5 kHz +3.0 dB, Mask B	72
Figure 96. Input 769 MHz @ 25 kHz	73
Figure 97. 769 MHz @ 25 kHz, Mask B	73
Figure 98. 769 MHz @ 25 kHz +3.0 dB, Mask B	74
Figure 99. Input 775 MHz @ 12.5 kHz	74
Figure 100. 775 MHz @ 12.5 MHz, Mask B	75
Figure 101. 775 MHz @ 12.5 kHz +3.0 dB, Mask B	75
Figure 102. Input 775 MHz @ 25 kHz	76
Figure 103. 775 MHz @ 25 kHz, Mask B	76
Figure 104. 775 MHz @ 25 kHz +3.0 dB, Mask B	77
Figure 105. Input 788 MHz @ 12.5 kHz	77
Figure 106. 788 MHz @ 12.5 kHz, Mask B	78
Figure 107. 788 MHz @ 12.5 kHz + 3.0 dB, Mask B	78
Figure 108. Input 788 MHz @ 25 kHz	79
Figure 109. 788 MHz @ 25 kHz, Mask B	79
Figure 110. 788 MHz @ 25 kHz + 3.0 dB, Mask B	80
Figure 111. Input 798 MHz @ 12.5 kHz	80
Figure 112. 798 MHz @ 12.5 kHz, Mask B	81
Figure 113. 798 MHz @ 12.5 kHz + 3.0 dB, Mask B	81
Figure 114. Input 798 MHz @ 25 kHz	82
Figure 115. 798 MHz @ 25 kHz, Mask B	82
Figure 116. 798 MHz @ 25 kHz + 3.0 dB, Mask B	83
Figure 117. Input 799 MHz @ 12.5 kHz	83
Figure 118. 799 MHz @ 12.5 MHz, Mask B	84
Figure 119. 799 MHz @ 12.5 kHz + 3.0 dB, Mask B	84
Figure 120. Input 799 MHz @ 25 kHz	85
Figure 121. 799 MHz @ 25 kHz, Mask B	85
Figure 122. 799 MHz @ 25 kHz + 3.0 dB, Mask B	86
Figure 123. Input 805 MHz @ 12.5 kHz	86
Figure 124. 805 MHz @ 12.5 kHz, Mask B	87
Figure 125. 805 MHz @ 12.5 kHz + 3.0 dB, Mask B	87
Figure 126. Input 805 MHz @ 25 kHz	88
Figure 127. 805 MHz @ 25 kHz, Mask B	88
Figure 128. 805 MHz @ 25 kHz + 3.0 dB, Mask B	89
Figure 129. Input 806 MHz @ 12.5 kHz	89
Figure 130. 806 MHz @ 12.5 kHz, Mask B	90
Figure 131. 806 MHz @ 12.5 kHz + 3.0 dB, Mask B	90
Figure 132. Input 806 MHz @ 25 kHz	91
Figure 133. 806 MHz @ 25 kHz, Mask B	91
Figure 134. 806 MHz @ 25 kHz + 3.0 dB, Mask B	92

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

Figure 135. Input 815 MHz @ 12.5 kHz	92
Figure 136. 815 MHz @ 12.5 kHz, Mask B	93
Figure 137. 815 MHz @ 12.5 kHz + 3.0 dB, Mask B	93
Figure 138. Input 815 MHz @ 25 kHz	94
Figure 139. 815 MHz @ 25 kHz, Mask B	94
Figure 140. 815 MHz @ 25 kHz +3.0 dB, Mask B	95
Figure 141. Input 824 MHz @ 12.5 kHz	95
Figure 142. 824 MHz @ 12.5 kHz, Mask B	96
Figure 143. 824 MHz @ 12.5 kHz + 3.0 dB, Mask B	96
Figure 144. Input 824 MHz @ 25 kHz	97
Figure 145. 824 MHz @ 25 kHz, Mask B	97
Figure 146. 824 MHz @ 25 kHz + 3.0 dB, Mask B	98
Figure 147. 150 MHz Horizontal, 30 – 200 MHz	100
Figure 148. 150 MHz Vertical, 30 – 200 MHz	100
Figure 149. 150 MHz Horizontal, 200-600 MHz	101
Figure 150. 150 MHz Vertical, 200-600 MHz	101
Figure 151. 150 MHz Horizontal, 600-1000 MHz	102
Figure 152. 150 MHz Vertical, 600-1000 MHz	102
Figure 153. 150 MHz Horizontal, 1000-2000 MHz	103
Figure 154. 150 MHz Vertical, 1000-2000 MHz	103
Figure 155. 162 MHz Horizontal, 30 – 200 MHz	104
Figure 156. 162 MHz Vertical, 30 - 200 MHz	104
Figure 157. 162 MHz Horizontal, 200 - 600 MHz	105
Figure 158. 162 MHz Vertical, 200 – 600 MHz	105
Figure 159. 162 MHz Horizontal, 600-1000 MHz	106
Figure 160. 162 MHz Vertical, 600-1000 MHz	106
Figure 161. 162 MHz Horizontal, 1 - 2 GHz	107
Figure 162. 162 MHz Vertical, 1 – 2 GHz	107
Figure 163. 174 MHz Horizontal, 30 – 200 MHz	108
Figure 164. 174 MHz Vertical, 30 – 200 MHz	108
Figure 165. 174 MHz Horizontal, 200 – 600 MHz	109
Figure 166. 174 MHz Vertical, 200 - 600 MHz	109
Figure 167. 174 MHz Horizontal, 600 – 1000 MHz	110
Figure 168. 174 MHz Vertical, 600 – 1000 MHz	110
Figure 169. 174 MHz Horizontal, 1 – 2 GHz	111
Figure 170. 174 MHz Vertical, 1 – 2 GHz	111
Figure 171. 407 MHz Horizontal, 30 – 200 MHz	112
Figure 172. 407 MHz Vertical, 30 – 200 MHz	112
Figure 173. 407 MHz Horizontal, 200 – 600 MHz	113
Figure 174. 407 MHz Vertical, 200 – 600 MHz	113
Figure 175. 407 MHz Horizontal, 600 – 1000 MHz	114
Figure 176. 407 MHz Vertical, 600 – 1000 MHz	114
Figure 177. 407 MHz Horizontal, 1 - 3 GHz	115
Figure 178. 407 MHz Vertical, 1 - 3 GHz	115
Figure 179. 407 MHz Horizontal, 3 - 6 GHz	116

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

Figure 180. 407 MHz Vertical, 3 - 6 GHz.....	116
Figure 181. 421 MHz Horizontal, 30 - 200 MHz.....	117
Figure 182. 421 MHz Vertical, 30 - 200 MHz	117
Figure 183. 421 MHz Horizontal, 200 – 600 MHz	118
Figure 184. 421 MHz Vertical, 200 – 600 MHz.....	118
Figure 185. 421 MHz Horizontal, 600 – 1000 MHz	119
Figure 186. 421 MHz Vertical, 600 – 1000 MHz.....	119
Figure 187. 421 MHz Horizontal, 1 - 3 GHz	120
Figure 188. 421 MHz Vertical, 1 - 3 GHz.....	120
Figure 189. 421 MHz Horizontal, 3 - 6 GHz	121
Figure 190. 421 MHz Vertical, 3 - 6 GHz.....	121
Figure 191. 480 MHz Horizontal, 30 – 200 MHz	122
Figure 192. 480 MHz Vertical, 30 – 200 MHz.....	122
Figure 193. 480 MHz Horizontal, 200 – 600 MHz	123
Figure 194. 480 MHz Vertical, 200 – 600 MHz.....	123
Figure 195. 480 MHz Horizontal, 600 – 1000 MHz	124
Figure 196. 480 MHz Vertical, 600 – 1000 MHz.....	124
Figure 197. 480 MHz Horizontal, 1 - 3 GHz	125
Figure 198. 480 MHz Vertical, 1 - 3 GHz.....	125
Figure 199. 480 MHz Horizontal, 3 - 6 GHz	126
Figure 200. 480 MHz Vertical, 3 - 6 GHz.....	126
Figure 201. 512 MHz Horizontal, 30 - 200 MHz	127
Figure 202. 512 MHz Vertical, 30 - 200 MHz	127
Figure 203. 512 MHz Horizontal, 200 – 600 MHz	128
Figure 204. 512 MHz Vertical, 200 – 600 MHz.....	128
Figure 205. 512 MHz Horizontal, 600 – 1000 MHz	129
Figure 206. 512 MHz Vertical, 600 – 1000 MHz.....	129
Figure 207. 512 MHz Horizontal, 1 - 3 GHz	130
Figure 208. 512 MHz Vertical, 1 - 3 GHz.....	130
Figure 209. 512 MHz Horizontal, 3 - 6 GHz	131
Figure 210. 512 MHz Vertical, 3 - 6 GHz.....	131
Figure 211. 788 MHz Horizontal, 30 – 200 MHz	132
Figure 212. 788 MHz Vertical, 30 - 200 MHz	132
Figure 213. 788 MHz Horizontal, 200 – 600 MHz	133
Figure 214. 788 MHz Vertical, 200 – 600 MHz.....	133
Figure 215. 788 MHz Horizontal, 600 – 1000 MHz	134
Figure 216. 788 MHz Vertical, 600 – 1000 MHz.....	134
Figure 217. 788 MHz Horizontal, 1 - 3 GHz	135
Figure 218. 788 MHz Vertical, 1 - 3 GHz.....	135
Figure 219. 788 MHz Horizontal, 3 - 6 GHz	136
Figure 220. 788 MHz Vertical, 3 - 6 GHz.....	136
Figure 221. 788 MHz Horizontal, 6 - 9 GHz	137
Figure 222. 788 MHz Vertical, 6 – 9 GHz.....	137
Figure 223. 798 MHz Horizontal, 30 – 200 MHz	138
Figure 224. 798 MHz Vertical, 30 – 200 MHz.....	138

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

Figure 225. 798 MHz Horizontal, 200 – 600 MHz	139
Figure 226. 798 MHz Vertical, 200 – 600 MHz.....	139
Figure 227. 798 MHz Horizontal, 600 – 1000 MHz	140
Figure 228. 798 MHz Vertical, 600 – 1000 MHz.....	140
Figure 229. 798 MHz Horizontal, 1 - 3 GHz	141
Figure 230. 798 MHz Vertical, 1 - 3 GHz.....	141
Figure 231. 798 MHz Horizontal, 3 - 6 GHz	142
Figure 232. 798 MHz Vertical, 3 - 6 GHz.....	142
Figure 233. 798 MHz Horizontal, 6 - 9 GHz	143
Figure 234. 798 MHz Vertical, 6 – 9 GHz.....	143
Figure 235. 799 MHz Horizontal, 30 – 200 MHz	144
Figure 236. 799 MHz Vertical, 30 – 200 MHz.....	144
Figure 237. 799 MHz Horizontal, 200 – 600 MHz	145
Figure 238. 799 MHz Vertical, 200 – 600 MHz.....	145
Figure 239. 799 MHz Horizontal, 600 – 1000 MHz	146
Figure 240. 799 MHz Vertical, 600 – 1000 MHz.....	146
Figure 241. 799 MHz Horizontal, 1 - 3 GHz	147
Figure 242. 799 MHz Vertical, 1 - 3 GHz.....	147
Figure 243. 799 MHz Horizontal, 3 - 6 GHz	148
Figure 244. 799 MHz Vertical, 3 - 6 GHz.....	148
Figure 245. 799 MHz Horizontal, 6 - 9 GHz	149
Figure 246. 799 MHz Vertical, 6 – 9 GHz.....	149
Figure 247. 805 MHz, Horizontal, 30 – 200 MHz	150
Figure 248. 805 MHz, Vertical, 30 – 200 MHz.....	150
Figure 249. 805 MHz Horizontal, 200 – 600 MHz	151
Figure 250. 805 MHz Vertical, 200 – 600 MHz.....	151
Figure 251. 805 MHz Horizontal, 600 – 1000 MHz	152
Figure 252. 805 MHz Vertical, 600 – 1000 MHz.....	152
Figure 253. 805 MHz Horizontal, 1 - 3 GHz	153
Figure 254. 805 MHz Vertical, 1 - 3 GHz.....	153
Figure 255. 805 MHz Horizontal, 3 - 6 GHz	154
Figure 256. 805 MHz Vertical, 3 - 6 GHz.....	154
Figure 257. 805 MHz Horizontal, 6 - 9 GHz	155
Figure 258. 805 MHz Vertical, 6 – 9 GHz.....	155
Figure 259. 824 MHz Horizontal, 30 – 200 MHz	156
Figure 260. 824 MHz Vertical, 30 - 200 MHz	156
Figure 261. 824 MHz Horizontal, 200 – 600 MHz	157
Figure 262. 824 MHz Vertical, 200 – 600 MHz.....	157
Figure 263. 824 MHz Horizontal, 600 – 1000 MHz	158
Figure 264. 824 MHz Vertical, 600 – 1000 MHz.....	158
Figure 265. 824 MHz Horizontal, 1 - 3 GHz	159
Figure 266. 824 MHz Vertical, 1 - 3 GHz.....	159
Figure 267. 824 MHz Horizontal, 3 - 6 GHz	160
Figure 268. 824 MHz Vertical, 3 - 6 GHz.....	160
Figure 269. 824 MHz Horizontal, 6 - 9 GHz	161

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

Figure 270. 824 MHz Vertical, 6 – 9 GHz.....	161
Figure 271. 150 MHz 30 - 200 MHz	163
Figure 272. 150 MHz, 200 – 600 MHz.....	163
Figure 273. 150 MHz 600 - 1000 MHz	164
Figure 274. 150 MHz, 1 - 2 GHz	164
Figure 275. 162 MHz 30 - 200 MHz	165
Figure 276. 162 MHz, 200 – 600 MHz.....	165
Figure 277. 162 MHz 600 - 1000 MHz	166
Figure 278. 162 MHz, 1 - 2 GHz	166
Figure 279. 174 MHz 30 - 200 MHz	167
Figure 280. 174 MHz, 200 – 600 MHz.....	167
Figure 281. 174 MHz 600 - 1000 MHz	168
Figure 282. 174 MHz, 1 - 2 GHz	168
Figure 283. 407 MHz 30 - 200 MHz	169
Figure 284. 407 MHz, 200 – 600 MHz.....	169
Figure 285. 407 MHz 600 - 1000 MHz	170
Figure 286. 407 MHz, 1 - 3 GHz	170
Figure 287. 407 MHz, 3 - 6 GHz	171
Figure 288. 421 MHz 30 - 200 MHz	171
Figure 289. 421 MHz, 200 – 600 MHz.....	172
Figure 290. 421 MHz 600 - 1000 MHz	172
Figure 291. 421 MHz, 1 - 3 GHz	173
Figure 292. 421 MHz, 3 - 6 GHz	173
Figure 293. 480 MHz 30 - 200 MHz	174
Figure 294. 480 MHz, 200 – 600 MHz.....	174
Figure 295. 480 MHz 600 - 1000 MHz	175
Figure 296. 480 MHz, 1 - 3 GHz	175
Figure 297. 480 MHz, 3 - 6 GHz	176
Figure 298. 512 MHz 30 - 200 MHz	176
Figure 299. 512 MHz, 200 – 600 MHz.....	177
Figure 300. 512 MHz 600 - 1000 MHz	177
Figure 301. 512 MHz, 1 - 3 GHz	178
Figure 302. 512 MHz, 3 - 6 GHz	178
Figure 303. 758 MHz 30 - 200 MHz	179
Figure 304. 758 MHz, 200 – 600 MHz.....	179
Figure 305. 758 MHz 600 - 1000 MHz	180
Figure 306. 758 MHz, 1 - 3 GHz	180
Figure 307. 758 MHz, 3 - 6 GHz	181
Figure 308. 758 MHz, 6 – 9 GHz.....	181
Figure 309. 763 MHz 30 - 200 MHz	182
Figure 310. 763 MHz, 200 – 600 MHz.....	182
Figure 311. 763 MHz 600 - 1000 MHz	183
Figure 312. 763 MHz, 1 - 3 GHz	183
Figure 313. 763 MHz, 3 - 6 GHz	184
Figure 314. 763 MHz, 6 – 9 GHz.....	184

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

Figure 315. 768 MHz 30 - 200 MHz	185
Figure 316. 768 MHz, 200 – 600 MHz.....	185
Figure 317. 768 MHz 600 - 1000 MHz	186
Figure 318. 768 MHz, 1 - 3 GHz	186
Figure 319. 768 MHz, 3 - 6 GHz	187
Figure 320. 768 MHz, 6 – 9 GHz.....	187
Figure 321. 769 MHz 30 - 200 MHz	188
Figure 322. 769 MHz, 200 – 600 MHz.....	188
Figure 323. 769 MHz 600 - 1000 MHz	189
Figure 324. 769 MHz, 1 - 3 GHz	189
Figure 325. 769 MHz, 3 - 6 GHz	190
Figure 326. 769 MHz, 6 – 9 GHz.....	190
Figure 327. 775 MHz 30 - 200 MHz	191
Figure 328. 775 MHz, 200 – 600 MHz.....	191
Figure 329. 775 MHz 600 - 1000 MHz	192
Figure 330. 775 MHz, 1 - 3 GHz	192
Figure 331. 775 MHz, 3 - 6 GHz	193
Figure 332. 775 MHz, 6 – 9 GHz.....	193
Figure 333. 788 MHz 30 - 200 MHz	194
Figure 334. 788 MHz, 200 – 600 MHz.....	194
Figure 335. 788 MHz 600 - 1000 MHz	195
Figure 336. 788 MHz, 1 - 3 GHz	195
Figure 337. 788 MHz, 3 - 6 GHz	196
Figure 338. 788 MHz, 6 – 9 GHz.....	196
Figure 339. 798 MHz 30 - 200 MHz	197
Figure 340. 798 MHz, 200 – 600 MHz.....	197
Figure 341. 798 MHz 600 - 1000 MHz	198
Figure 342. 798 MHz, 1 - 3 GHz	198
Figure 343. 798 MHz, 3 - 6 GHz	199
Figure 344. 798 MHz, 6 – 9 GHz.....	199
Figure 345. 799 MHz 30 - 200 MHz	200
Figure 346. 799 MHz, 200 – 600 MHz.....	200
Figure 347. 799 MHz 600 - 1000 MHz	201
Figure 348. 799 MHz, 1 - 3 GHz	201
Figure 349. 799 MHz, 3 - 6 GHz	202
Figure 350. 799 MHz, 6 – 9 GHz.....	202
Figure 351. 805 MHz 30 - 200 MHz	203
Figure 352. 805 MHz, 200 – 600 MHz.....	203
Figure 353. 805 MHz 600 - 1000 MHz	204
Figure 354. 805 MHz, 1 - 3 GHz	204
Figure 355. 805 MHz, 3 - 6 GHz	205
Figure 356. 805 MHz, 6 – 9 GHz.....	205
Figure 357. 806 MHz 30 - 200 MHz	206
Figure 358. 806 MHz, 200 – 600 MHz.....	206
Figure 359. 806 MHz 600 - 1000 MHz	207

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

Figure 360. 806 MHz, 1 - 3 GHz	207
Figure 361. 806 MHz, 3 - 6 GHz	208
Figure 362. 806 MHz, 6 – 9 GHz.....	208
Figure 363. 815 MHz 30 - 200 MHz	209
Figure 364. 815 MHz, 200 – 600 MHz.....	209
Figure 365. 815 MHz 600 - 1000 MHz	210
Figure 366. 815 MHz, 1 - 3 GHz	210
Figure 367. 815 MHz, 3 - 6 GHz	211
Figure 368. 815 MHz, 6 – 9 GHz.....	211
Figure 369. 824 MHz 30 - 200 MHz	212
Figure 370. 824 MHz, 200 – 600 MHz.....	212
Figure 371. 824 MHz 600 - 1000 MHz	213
Figure 372. 824 MHz, 1 - 3 GHz	213
Figure 373. 824 MHz, 3 - 6 GHz	214
Figure 374. 824 MHz, 6 – 9 GHz.....	214
Figure 375. 851 MHz 30 - 200 MHz	215
Figure 376. 851 MHz, 200 – 600 MHz.....	215
Figure 377. 851 MHz 600 - 1000 MHz	216
Figure 378. 851 MHz, 1 - 3 GHz	216
Figure 379. 851 MHz, 3 - 6 GHz	217
Figure 380. 851 MHz, 6 – 9 GHz.....	217
Figure 381. 860 MHz 30 - 200 MHz	218
Figure 382. 860 MHz, 200 – 600 MHz.....	218
Figure 383. 860 MHz 600 - 1000 MHz	219
Figure 384. 860 MHz, 1 - 3 GHz	219
Figure 385. 860 MHz, 3 - 6 GHz	220
Figure 386. 860 MHz, 6 – 9 GHz.....	220
Figure 387. 869 MHz 30 - 200 MHz	221
Figure 388. 869 MHz, 200 – 600 MHz.....	221
Figure 389. 869 MHz 600 - 1000 MHz	222
Figure 390. 869 MHz, 1 - 3 GHz	222
Figure 391. 869 MHz, 3 - 6 GHz	223
Figure 392. 869 MHz, 6 – 9 GHz.....	223
Figure 393. VHF Out-of-Band Rejection.....	225
Figure 394. UHF Out-of-Band Rejection	226
Figure 395. 700 MHz Out-of-Band Rejection	226
Figure 396. 800 MHz Out-of-Band Rejection	227

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals	18
Table 2.	Test Instruments.....	19
Table 3.	Test Signals for PLMRS Devices	35

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

1 General Information

1.1 Product Description

The Equipment under Test (EUT) is the Safe-Com Wireless model SAFE-0002. The EUT is a signal booster and extends the radio coverage in areas where the propagation losses prevent reliable communication. The amplifier is designed to be used with already approved DSA systems. The model number will be followed by a defining character: A, B, Ca or Cb. This defines the tuning for that the amp has been configured to operate in.

“A” is tuned for 138-175 MHz, “B” tuning for 380-512 MHz, “Ca” is tuned for 769-814 MHz, and “Cb” is tuned for 799-862 MHz.

For FCC Part 90.219

150.8-156.2475 MHz
157.1875-161.575 MHz
161.775-161.96 MHz
162.04-173.40 MHz
406.1-454.0 MHz
456.0-462.5375 MHz
467.74-512.0 MHz
758.0-775.0 MHz
788.0-805.0 MHz
806.0-849.0 MHz
851.0-869.0 MHz

For ISSED RSS-131

150.05-174.0 MHz
406.1-430.0MHz
450.0-470.0 MHz
768.0-776.0 MHz
798.0-806.0 MHz
806.0-821.0 MHz
851.0-866.0 MHz
866.0-869.0 MHz

1.2 Related Submittal(s)/Grant(s)

There are no related submittals or grants associated with this project.

1.3 Summary of Tests

The following tests were performed:

Part	Test Description	Verdict
90.219(e)(1), 90.205(j)	RF Output Power	Pass
90.219(e)(3)	Conducted Spurious	Pass
90.219(e)(3)	Radiated Spurious	Pass
90.219(e)(4)	Input Output	Pass
KDB 935210 D05 v01r03 4.2	AGC Threshold	Recorded
KDB 935210 D05 v01r03 4.3	Out of band rejection	Recorded
90.219(e)(2)	Noise Figure	N/A

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

2 Test and Measurements

2.1 Configuration of Tested System

A Block Diagram of the tested system is shown in Figure 1. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off or set to 3x the resolution bandwidth throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions.

2.2 Characterization of Tested System

The samples used for testing were received by US Tech on April 28, 2024 in good condition.

2.3 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. All radiated measurements were performed at US Tech's 3-meter EMC chamber measurement facility. Additional tests such as bench testing were also performed at US Tech's facility in Alpharetta, GA. This site has been fully described and registered by the FCC under Registration Number US5301. Additionally, this site has been fully described and submitted to Industry Canada (IC) and has been approved under file number 9900A-1. NVLAP code: 200162-0

2.4 Test Equipment

The test equipment used for this evaluation is listed in Table 2 below.

2.5 Modifications to Equipment under Test (EUT)

No modifications were made by US Tech to bring the EUT into compliance with the FCC limits for the transmitter portion of the EUT.

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

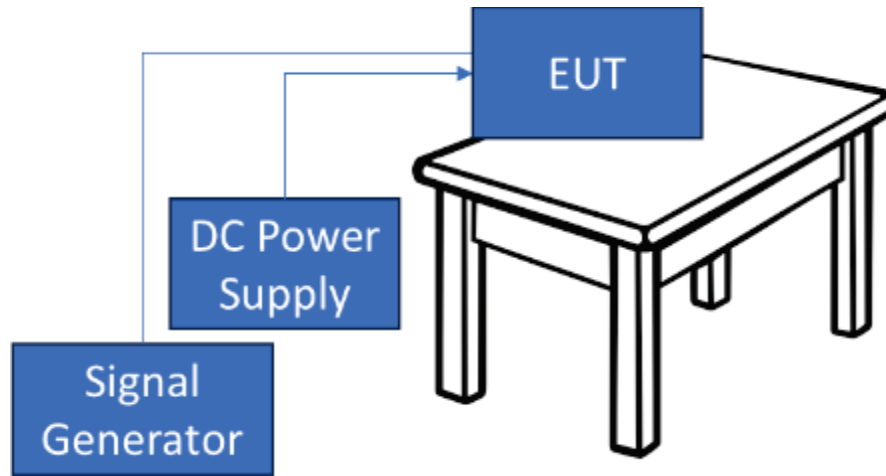


Figure 1. Block Diagram of Test Configuration

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

Table 1. EUT and Peripherals

EUT MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID/ IC ID	CABLES P/D
Tuning A	SAFE-0002 - A	Engineering Sample	FCC ID: 2AKSM-SAFE4 (Pending) IC: 22303-SAFE4 (Pending)	PU
Tuning B	SAFE-0002 - B	Engineering Sample	FCC ID: 2AKSM-SAFE4 (Pending) IC: 22303-SAFE4 (Pending)	PU
Tuning Ca	SAFE-0002 - Ca	Engineering Sample	FCC ID: 2AKSM-SAFE4 (Pending) IC: 22303-SAFE4 (Pending)	PU
Tuning Cb	SAFE-0002 - Cb	Engineering Sample	FCC ID: 2AKSM-SAFE4 (Pending) IC: 22303-SAFE4 (Pending)	PU
Peripherals MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID/ IC ID	CABLES P/D
DC Bench Supply Tekpower	TP3005T	218311	None	P
Signal Generator Rohde & Schwarz	SMJ100A	*101567	None	P

U= Unshielded, S= Shielded, P= Power cable, D= Data cable

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

Table 2. Test Instruments

EQUIPMENT	MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DUE DATE
Spectrum Analyzer	Agilent	E4407B	US41442935	9/21/2024
Spectrum Analyzer	Agilent	E4440A	MY45304803	7/21/2025
Spectrum Analyzer	Hewlett-Packard	8593E	3205A00124	3/4/2026 2yr cal
Rf Preamp 100 kHz to 1.3 GHz	Hewlett-Packard	8447D	1937A01611	7/20/2024
Rf Preamp > 1 GHz	Hewlett Packard	8449B	3008A00914	3/4/2025
Log Periodic	EMCO	3146	9305-3600	3/13/2026 2yr
Biconical	EMCO	3110B	9307-1431	1/13/2025 2yr
Horn Antenna	EMCO	3115	9107-3723	3/13/2025 2yr
Signal Generator	Rohde & Schwarz	SMJ100A	101567	3/29/2026
20 dB Attenuator	Meca	604-20-1	None	3/4/2025
20 dB Attenuator	US Tech	AT145	AT145	3/4/2025
Terminator	ALAN	50LH25	101771	Verified With Network Analyzer
Network Analyzer	Agilent	N5230A	MY45000829	12/14/2024

Note: The calibration interval of the above test instruments is 12 months, and all calibrations are traceable to NIST/USA.

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

2.6 Noise (FCC Section 90.219(e)(2) and RSS-131, 6.4)

The noise figure of a signal booster must not exceed 9 dB in either direction.

The EUT is a bi-directional amplifier designed for use with approved DAS systems; this test was deemed not applicable.

2.7 Retransmitted Signals (FCC Section 90.219(e)(4) and RSS-131, 6.6)

A signal booster must be designed such that all signals when retransmitted meet the following requirements:

1. The signals are re-transmitted on the same channels as received. Minor departures from the exact provider or reference frequencies of the input signals are allowed provided that the re-transmitted signals meet the requirements of 90.213.

In this case, the EUT is exempt from meeting these requirements.

2. There is no change in the occupied bandwidth of the retransmitted signals.

The EUT meets this requirement; see the plots in the following section which show the input signal compared to the retransmitted signal.

3. The retransmitted signals continue to meet the unwanted emissions limits of Part 90.210 applicable to the corresponding received signal.

The EUT meets this requirement; see the emissions mask test data presented in the next section.

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

2.8 Emission Mask Definitions (FCC Section 2.1049, 90.219(e)(4iii), 90.210, RSS-131, 6.5, RSS-119, 5.8)

The EUT is equipped with a low pass filter. Therefore, the emissions masks for equipment utilizing a low pass filter were applied.

2.8.1 Emission Mask B (FCC Part 90.210, 2.1051, RSS-119, 5.8)

Emission Mask B. For transmitters that are equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as follows:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3) On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43 + 10 \log (P)$ dB.

2.8.2 Emission Mask D (FCC Part 90.210, 2.1051, RSS-119, 5.8)

Emission Mask D—12.5 kHz channel bandwidth equipment. For transmitters designed to operate with a 12.5 kHz channel bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

- (1) On any frequency from the center of the authorized bandwidth f_0 to 5.625 kHz removed from f_0 : Zero dB.
- (2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 5.625 kHz but no more than 12.5 kHz: At least $7.27(f_d - 2.88 \text{ kHz})$ dB.
- (3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 12.5 kHz: At least $50 + 10 \log (P)$ dB or 70 dB, whichever is the lesser attenuation.

2.8.3 Emission Mask E (FCC Part 90.210, 2.1051, RSS-119, 5.8)

Emission Mask E—6.25 kHz or less channel bandwidth equipment. For transmitters designed to operate with a 6.25 kHz or less bandwidth, any emission must be attenuated below the power (P) of the highest emission contained within the authorized bandwidth as follows:

(1) On any frequency from the center of the authorized bandwidth f_0 to 3.0 kHz removed from f_0 : Zero dB.

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in kHz) of more than 3.0 kHz but no more than 4.6 kHz: At least $30 + 16.67(f_d - 3 \text{ kHz})$ or $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.

(3) On any frequency removed from the center of the authorized bandwidth by more than 4.6 kHz: At least $55 + 10 \log (P)$ or 65 dB, whichever is the lesser attenuation.

2.8.4 Emission Mask I (FCC Part 90.210, 2.1051, RSS-119, 5.8)

Emission Mask I. For transmitters that are equipped with an audio low pass filter, the power of any emission must be attenuated below the unmodulated carrier power of the transmitter (P) as follows:

(1) On any frequency removed from the center of the authorized bandwidth by a displacement frequency of more than 6.8 kHz, but no more than 9.0 kHz: At least 25 dB;

(2) On any frequency removed from the center of the authorized bandwidth by a displacement frequency of more than 9.0 kHz, but no more than 15 kHz: At least 35 dB;

(3) On any frequency removed from the center of the authorized bandwidth by a displacement frequency of more than 15 kHz: At least $43 + 10 \log (P)$ dB, or 70 dB, whichever is the lesser attenuation.

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

2.9 RF Power Output (FCC Section 2.1046, 90.219(e)(1), RSS-131, 6.2)

The output power capability of a signal booster must be designed for deployments providing a radiated power not exceeding 5 Watts ERP for each retransmitted channel.

The EUT was connected to a spectrum analyzer through a 20 dB power attenuator. All cables and attenuator losses were input into the spectrum analyzer as either a reference level offset or an external preamp gain correction to ensure that accurate readings were obtained.

A CW signal was utilized and transmitted through the EUT. The RF input signal was set at least 0.2 dB below the AGC threshold. The spectrum analyzer was set to the following settings: RBW= 100 kHz, Video= 3x RBW, Span of 1 MHz.

The output power levels are recorded below:

Band	Tuned Frequency	Measured Output power (dBm)	FCC max Output Power limit (5 Watt)	Margin (dB) From the output limit
VHF	*150.00 MHz	35.13	37 dBm	1.87
	*162.00 MHz	36.23	37 dBm	0.77
	**174.00 MHz	36.41	37 dBm	0.59
UHF	407.00 MHz	36.83	37 dBm	0.17
	421.00 MHz	36.96	37 dBm	0.04
	***480.00 MHz	32.75	37 dBm	4.25
	**512.00 MHz	33.32	37 dBm	3.68
700/800 MHz	**758.00 MHz	35.68	37 dBm	1.32
	***763.00 MHz	35.12	37 dBm	1.88
	768.00 MHz	35.74	37 dBm	1.26
	769.00 MHz	35.73	37 dBm	1.27
	775.00 MHz	35.87	37 dBm	1.13
	**788.00 MHz	35.87	37 dBm	1.13
	798.00 MHz	36.13	37 dBm	0.87
	799.00 MHz	36.15	37 dBm	0.85
	805.00 MHz	36.15	37 dBm	0.85
	806.00 MHz	36.15	37 dBm	0.85
	815.00 MHz	35.98	37 dBm	1.02
	824.00 MHz	36.10	37 dBm	0.9
	851.00 MHz	34.18	37 dBm	2.82
	860.00 MHz	34.03	37 dBm	2.97
	869.00 MHz	33.79	37 dBm	3.21

(*) = Frequencies were selected as the representative frequency to cover channels that are less than 1 MHz apart. For example, 150 MHz was used to represent 150.05 MHz (ISED) and 150.80 MHz (FCC). However, only the permitted frequency will be listed for each respective market.

(**) = Frequency selected because either ISED or FCC market permits this use.

(***) = Selected as representative middle channel for FCC permitted operation.

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

2.10 Output Power Plots

The following are the Uplink Output Power Plots.

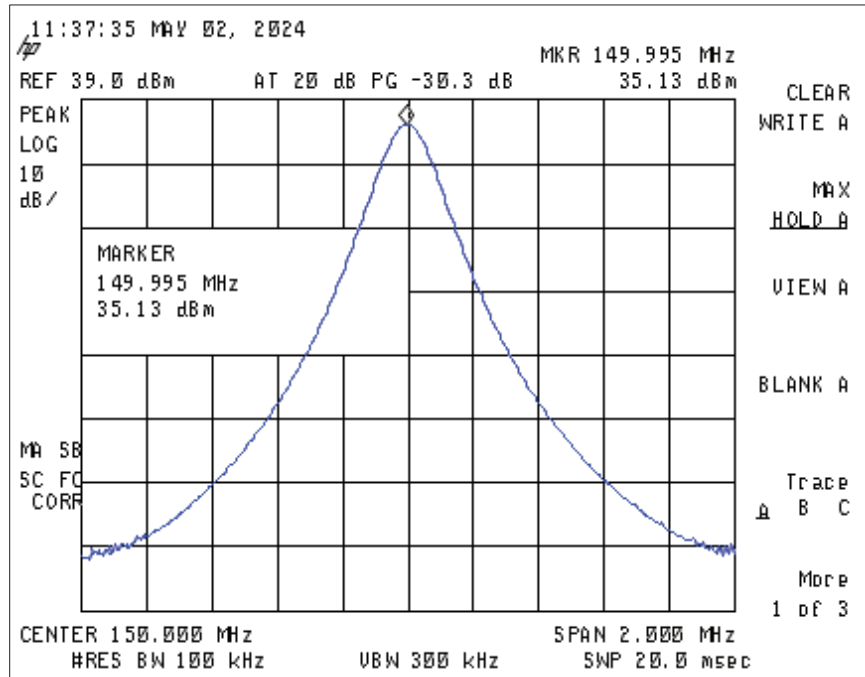


Figure 2. 150 MHz Output Power Plot

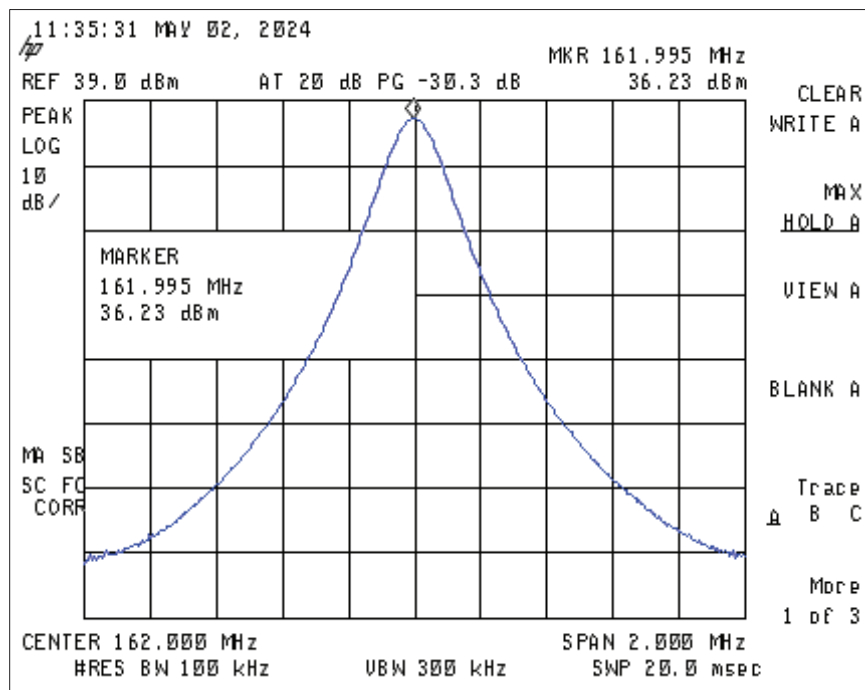


Figure 3. 162 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

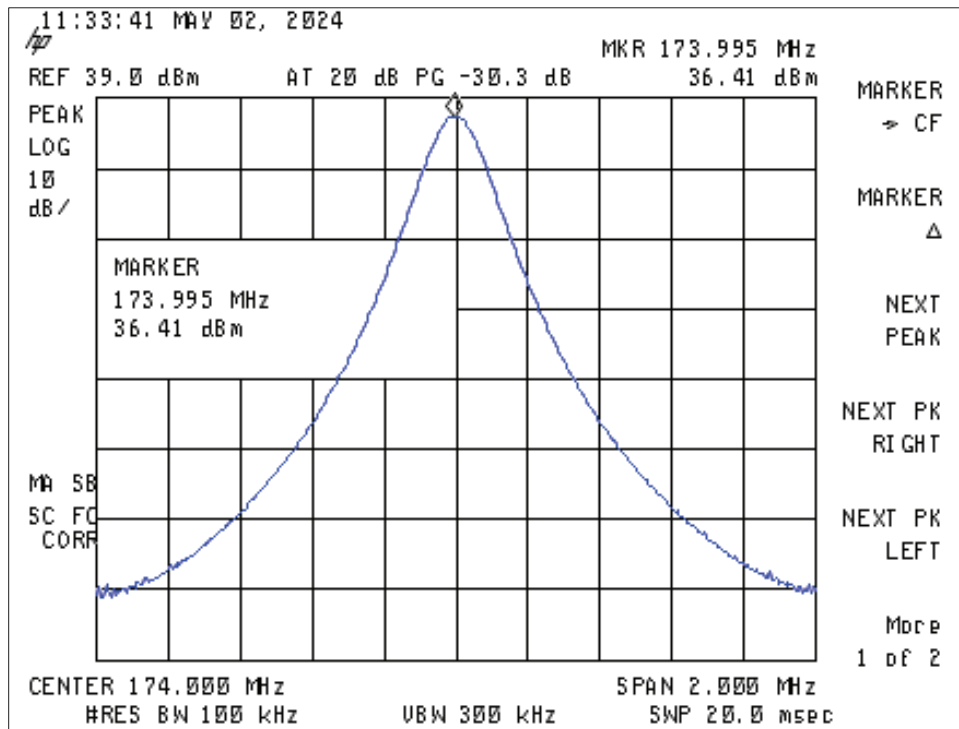


Figure 4. 174 MHz Output Power Plot

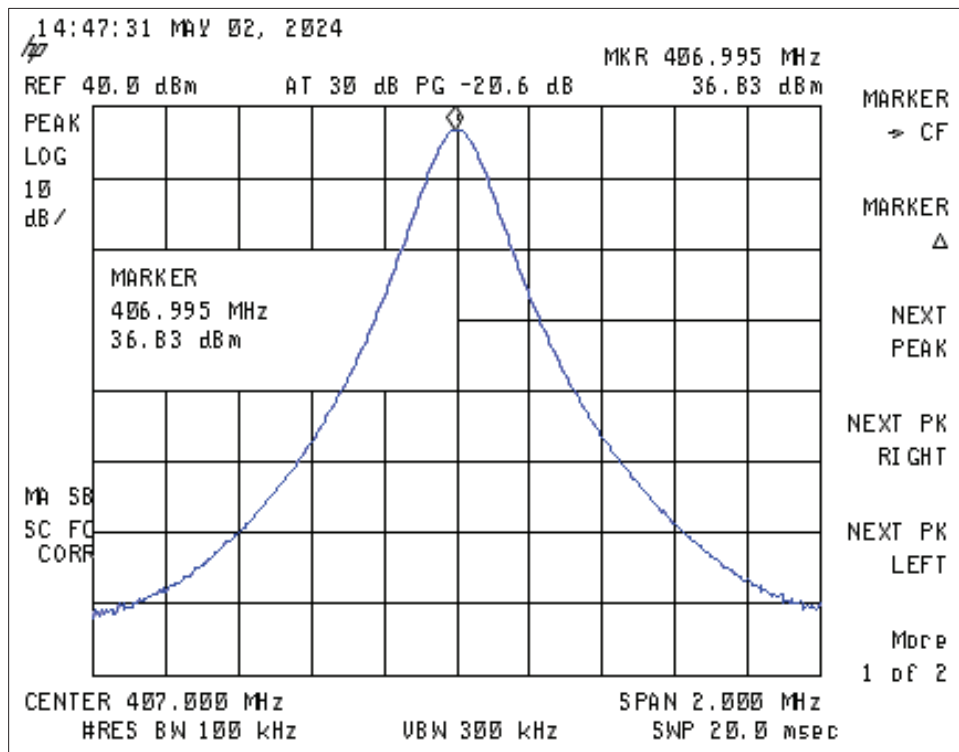


Figure 5. 407 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

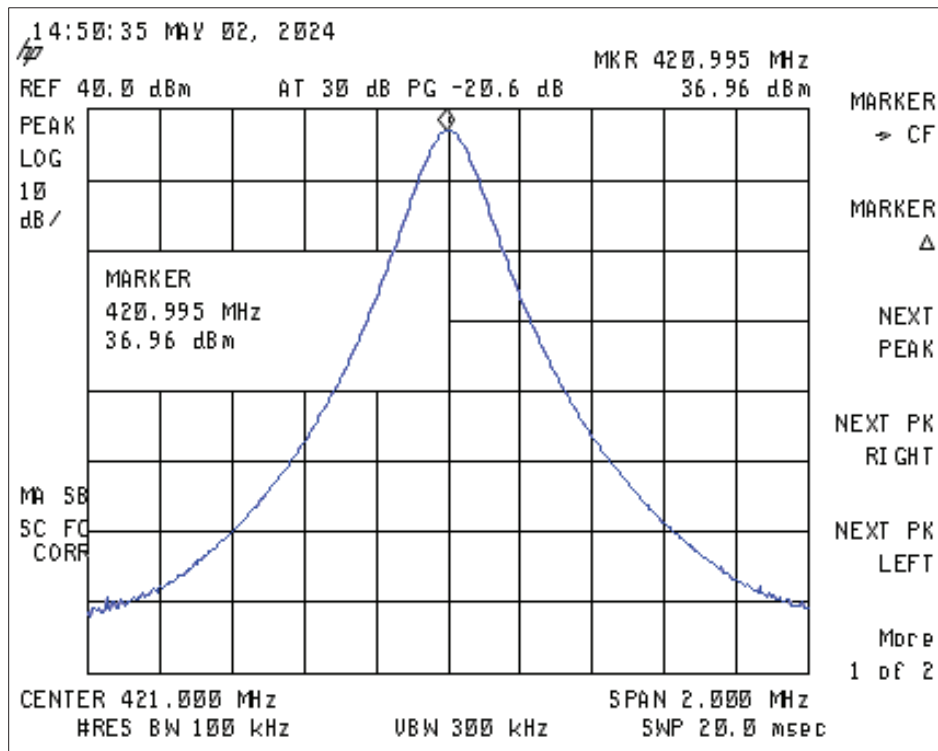


Figure 6. 421 MHz Output Power Plot

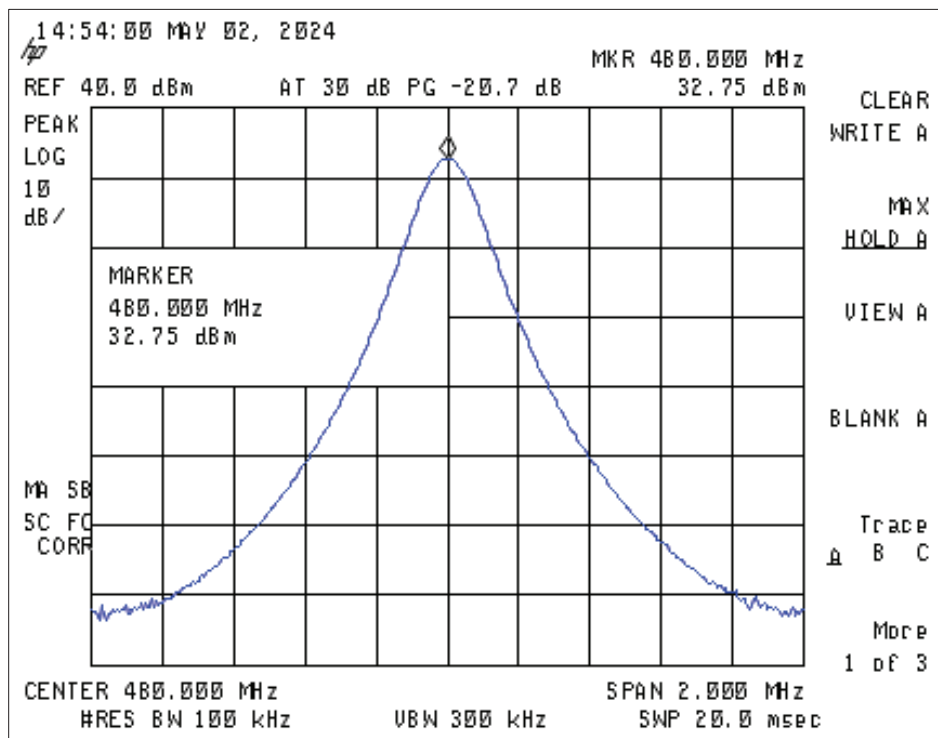


Figure 7. 480 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

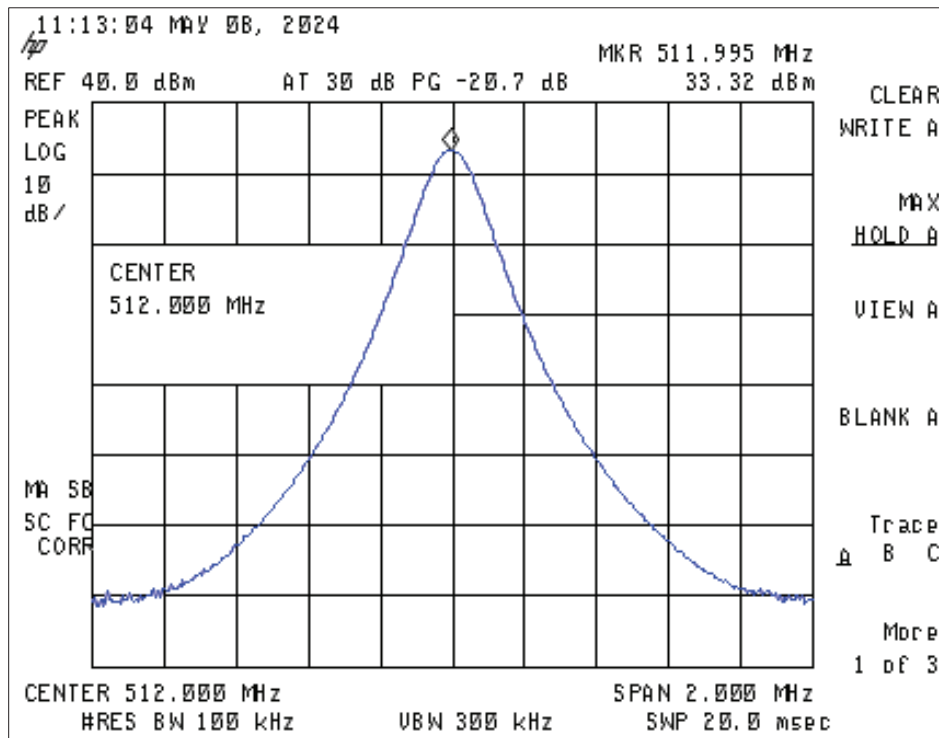


Figure 8. 512 MHz Output Power Plot

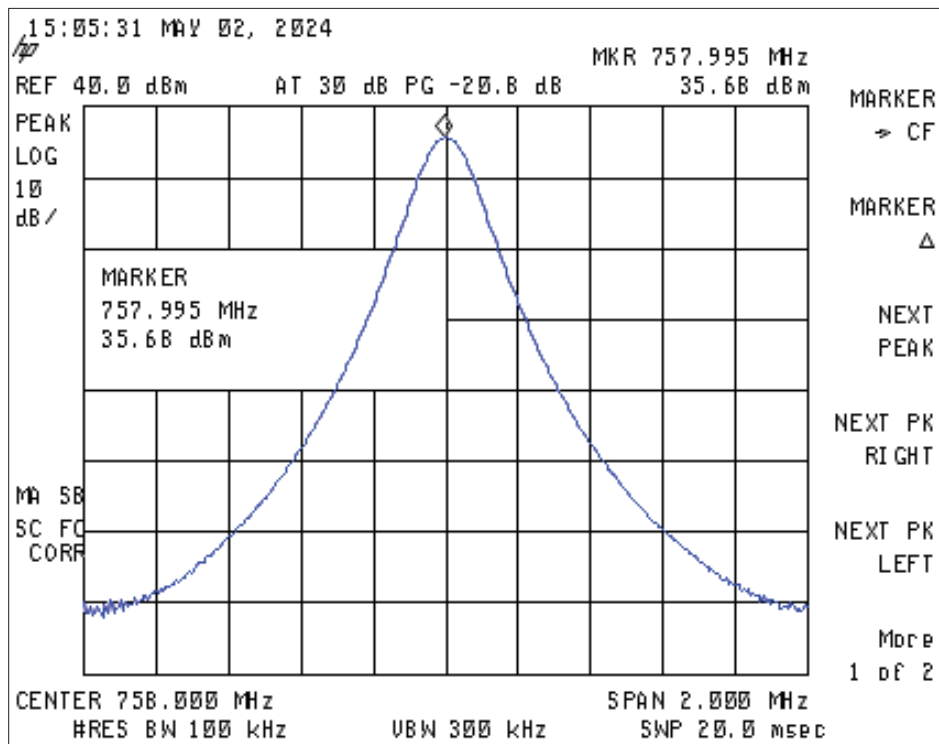


Figure 9. 758 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

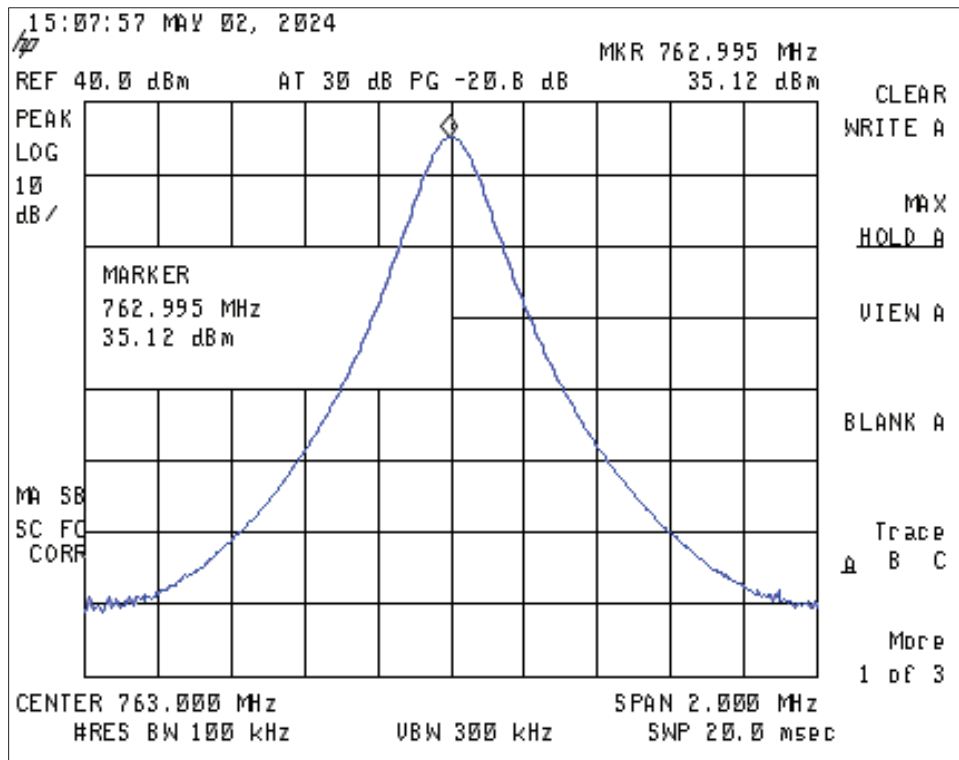


Figure 10. 763 MHz Output Power Plot

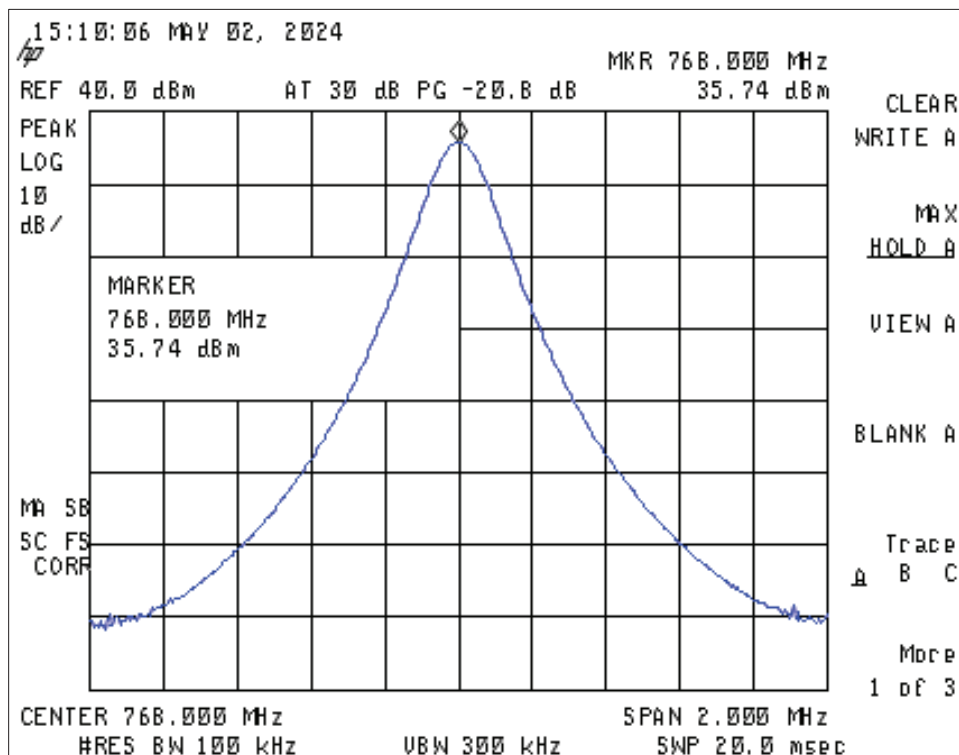


Figure 11. 768 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

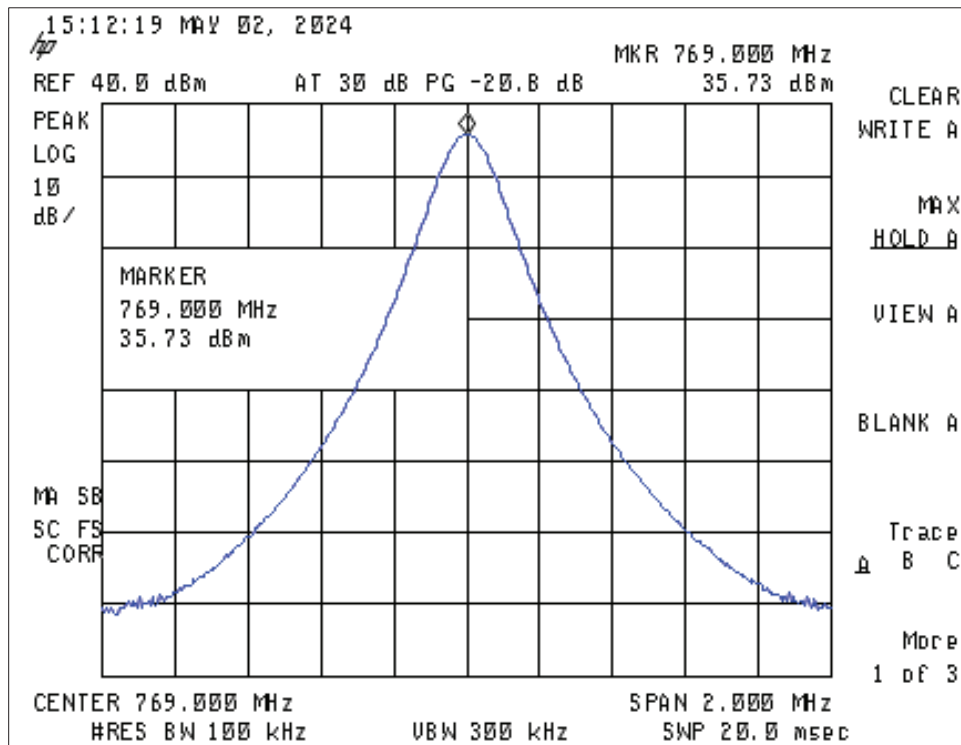


Figure 12. 769 MHz Output Power Plot

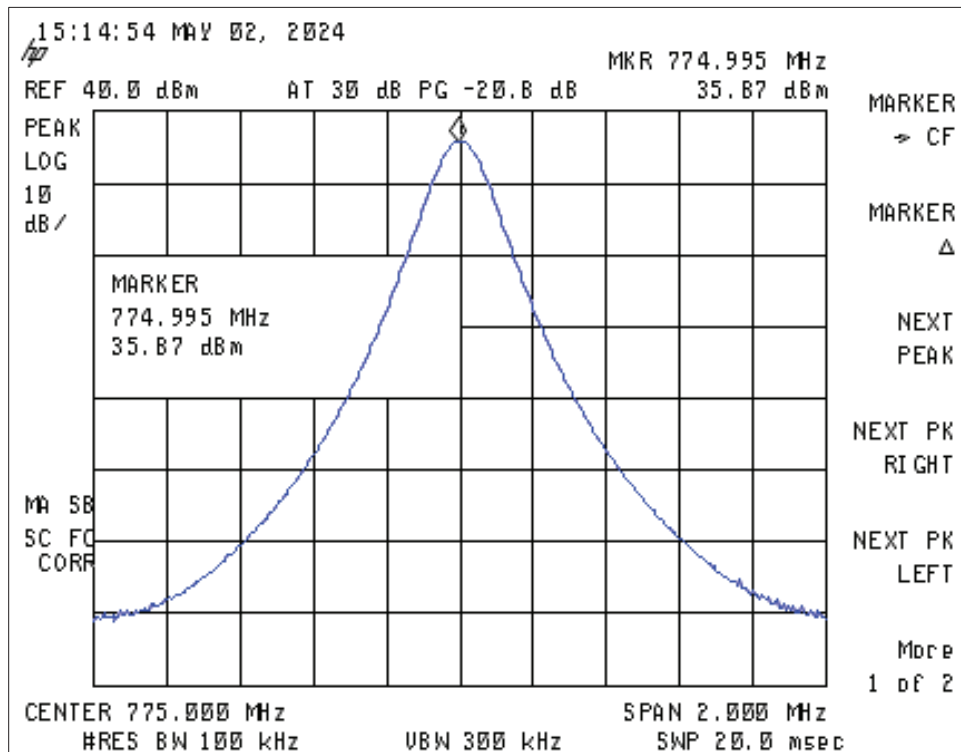


Figure 13. 775 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

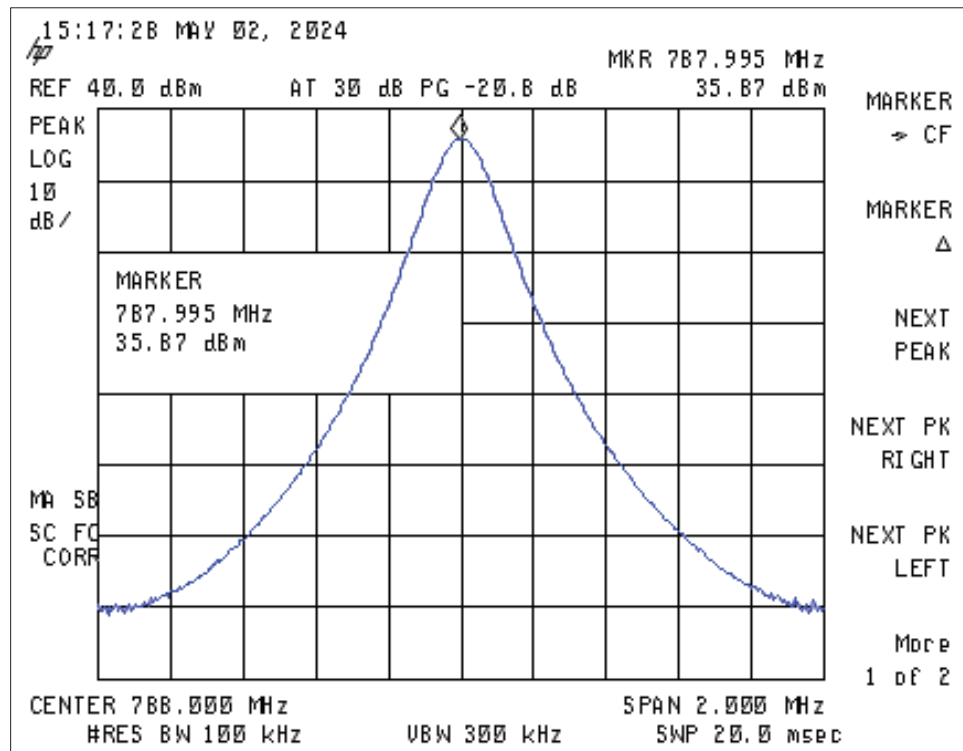


Figure 14. 788 MHz Output Power Plot

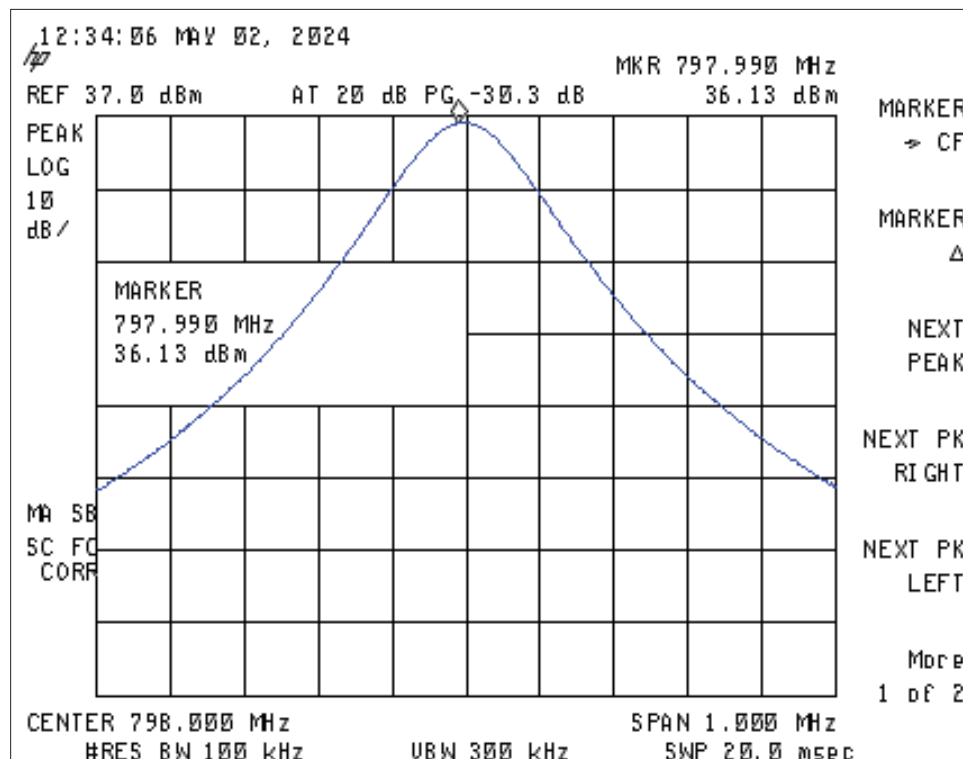


Figure 15. 798 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

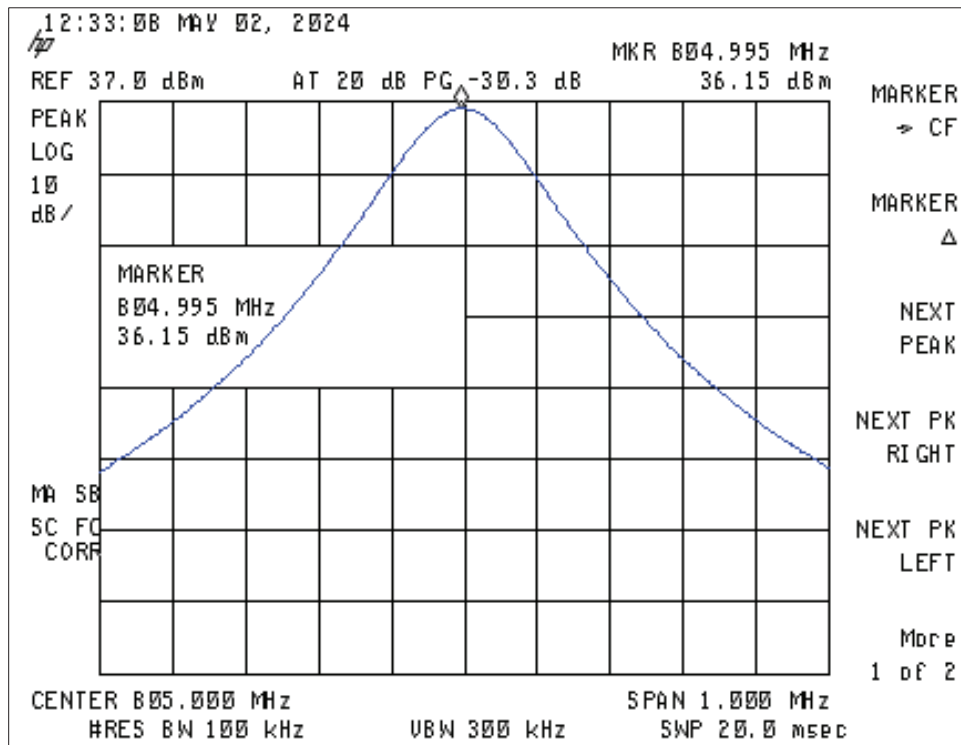


Figure 16. 799 MHz Output Power Plot

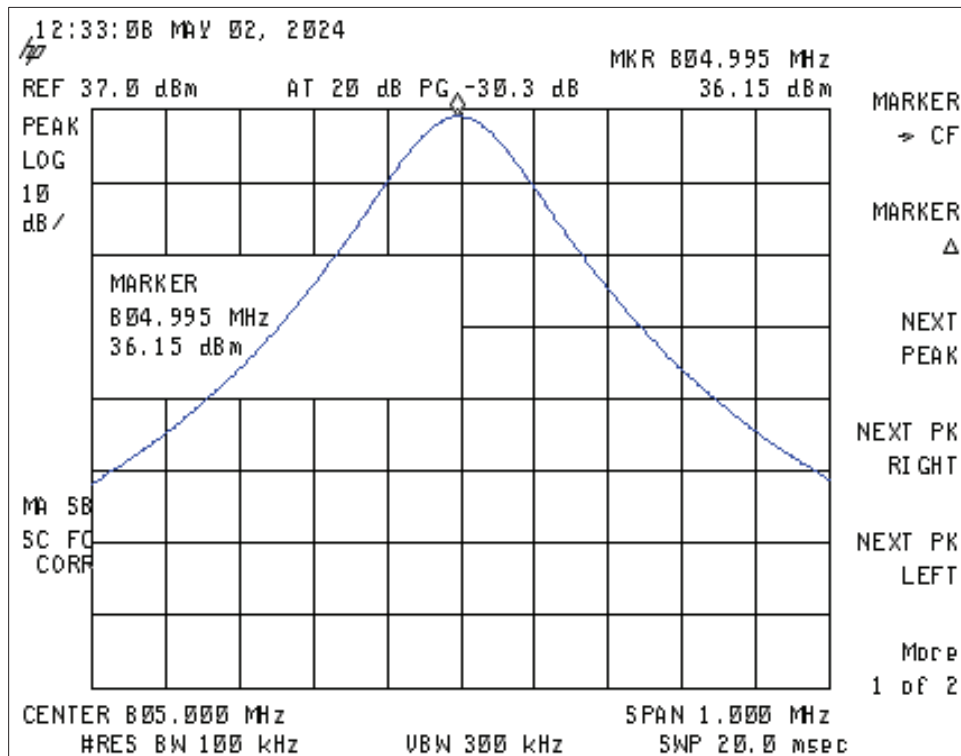


Figure 17. 805 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

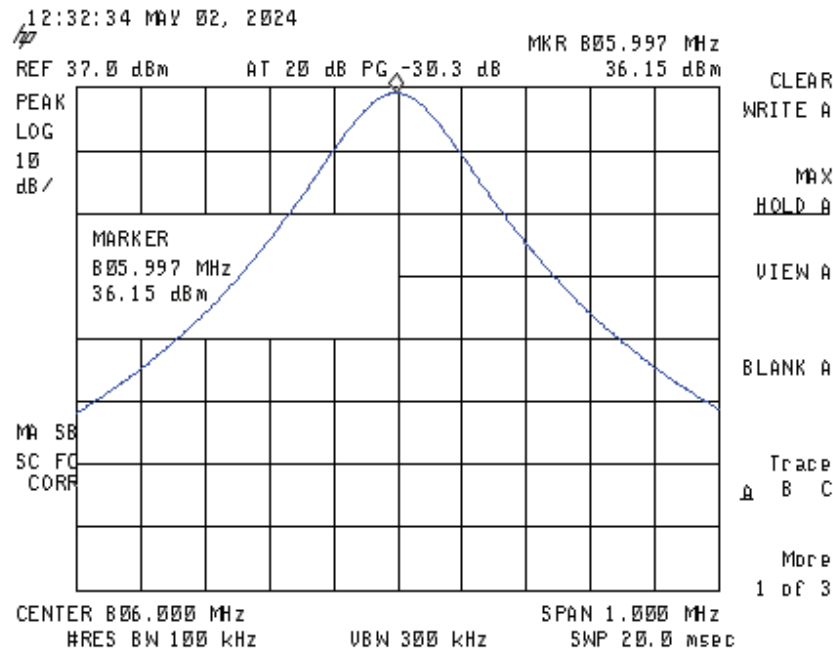


Figure 18. 806 MHz Output Power Plot

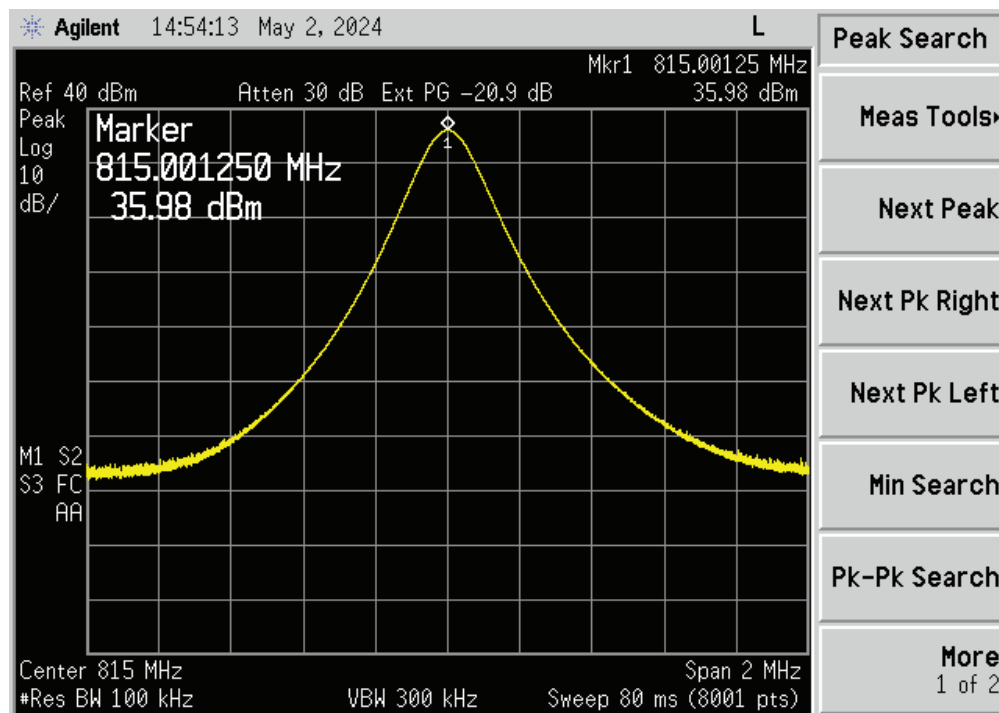


Figure 19. 815 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

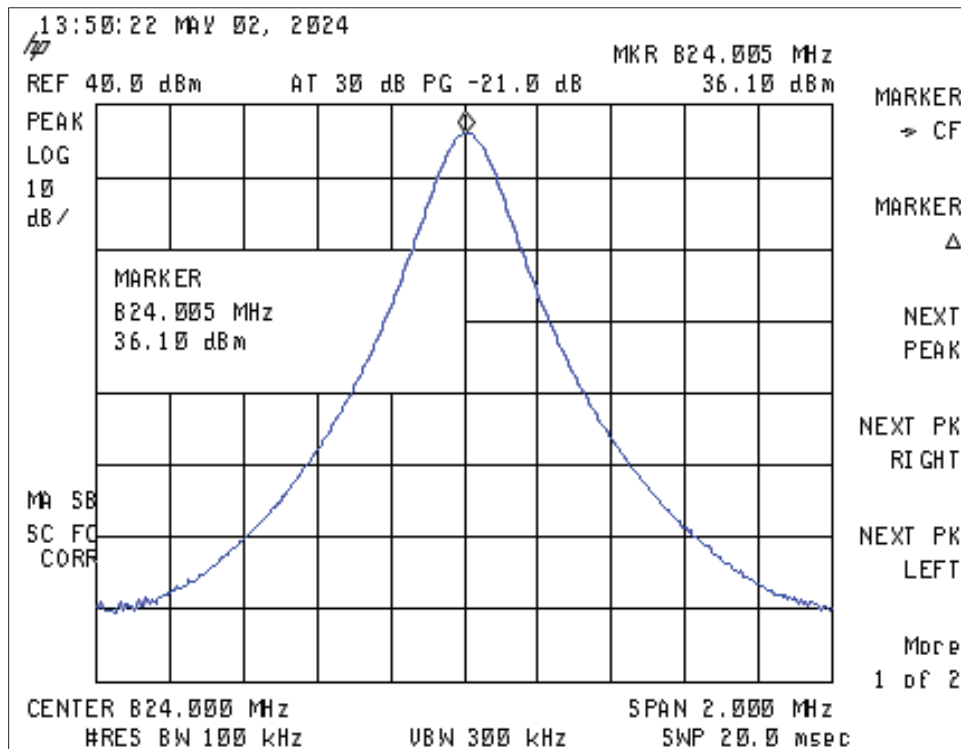


Figure 20. 824 MHz Output Power Plot

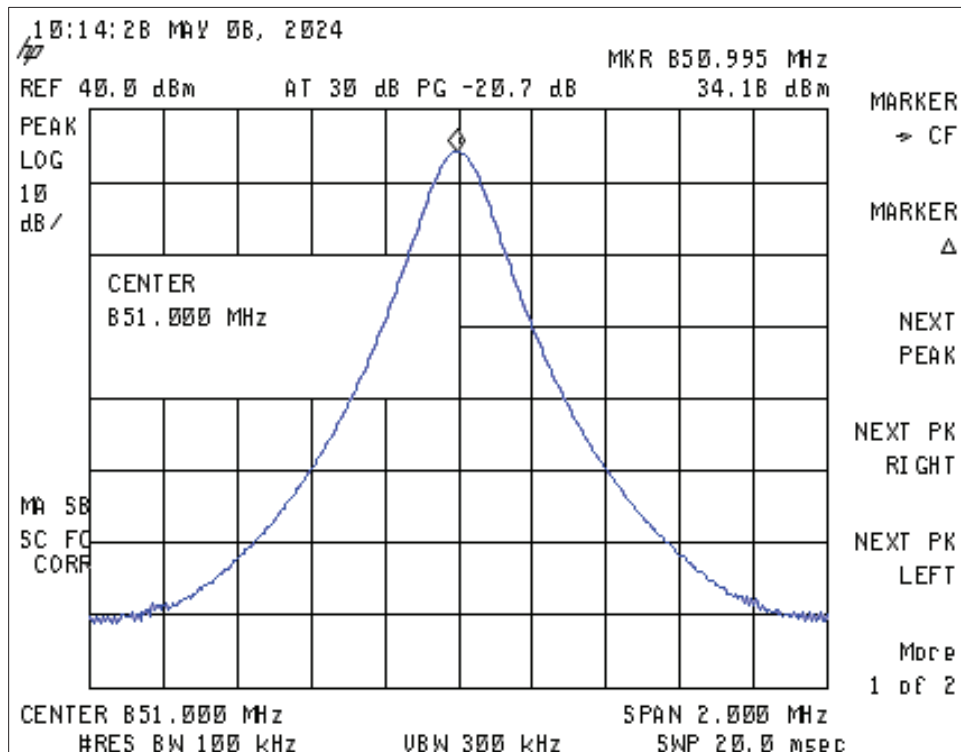


Figure 21. 851 MHz Output Power Plot

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

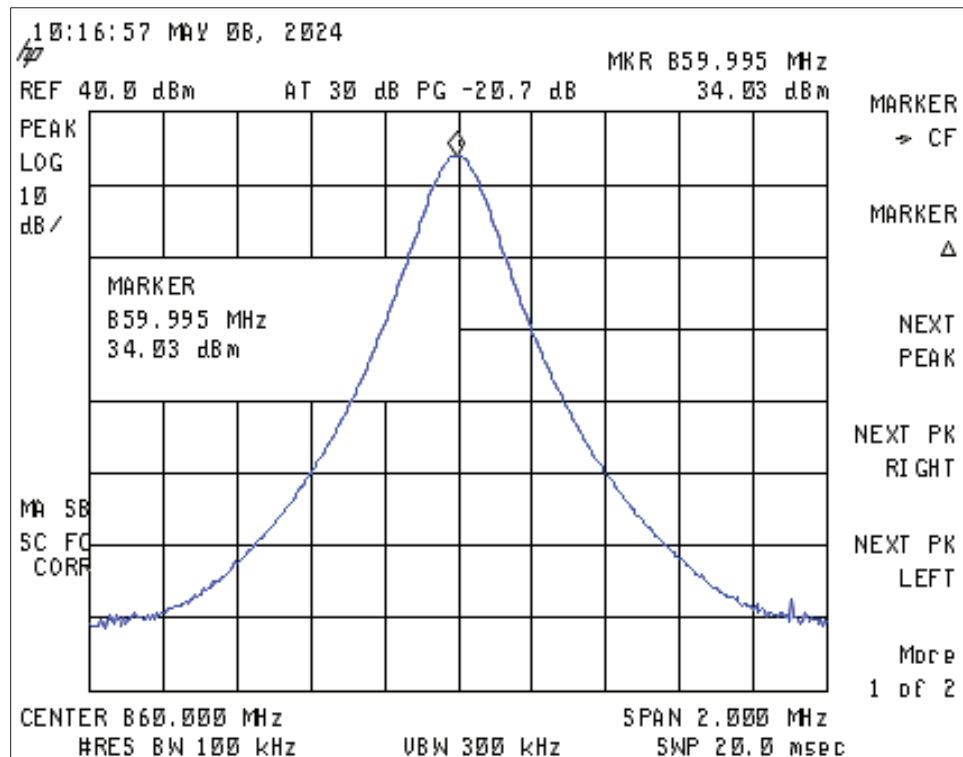


Figure 22. 860 MHz Output Power Plot

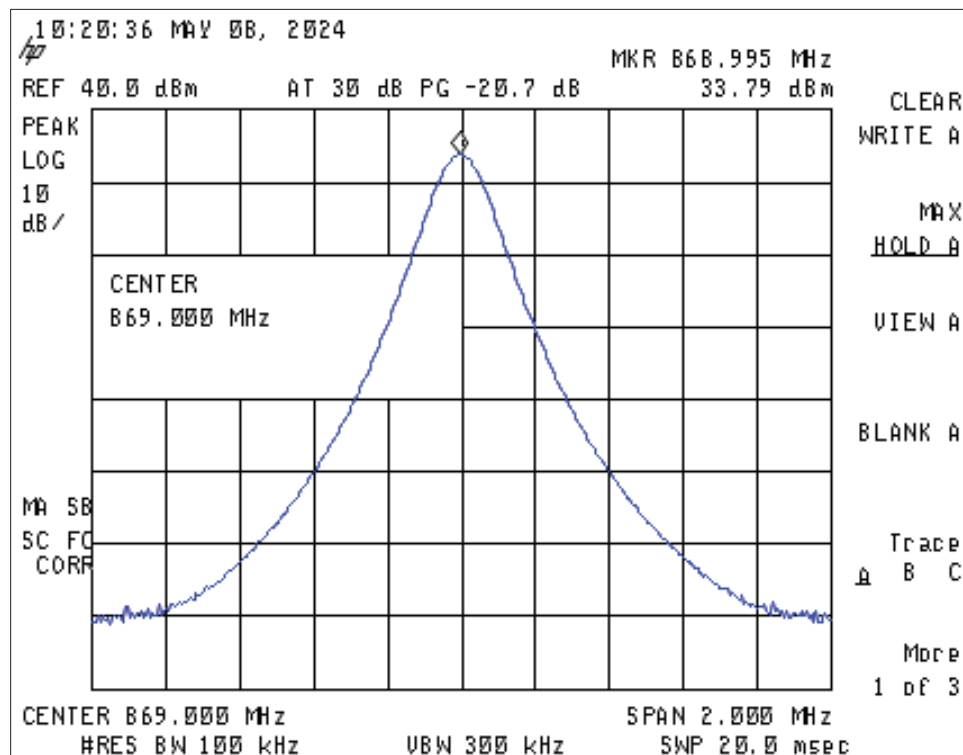


Figure 23. 869 MHz Output Power Plot

2.11 Emission Mask and Retransmitted Signal Measurements

The EUT was connected to a spectrum analyzer through a 20 dB attenuator. All cable and attenuator losses were input into the spectrum analyzer as a combination of reference level offset and/or external correction factor offset to ensure accurate readings were obtained. Measurements were collected to verify that the EUT meets the required emissions mask parameters as cited in section 2.10 of this test report. A reference level plot is provided to show that the retransmitted signal meets the parameters as cited in section 2.10 of this test report.

The Emissions Mask were measured with the RF input set to at least 0.2 dB below the AGC level and then at +3.0 dB above the AGC level per KDB 935210 D03 V04.

Table 3. Test Signals for PLMRS Devices

Emissions Desinator	Modulation	Occupied Bandwidth	Channel Bandwidth	Audio Frequency
16K0F3E	FM	16 kHz	25 kHz	1 kHz
11K3F3E	FM	11.3 kHz	12.5 kHz	1 kHz
4K00F1E	FM	4 kHz	6.25 kHz	1 kHz
N/A	CW	N/A	N/A	N/A

2.11.1 VHF Channels

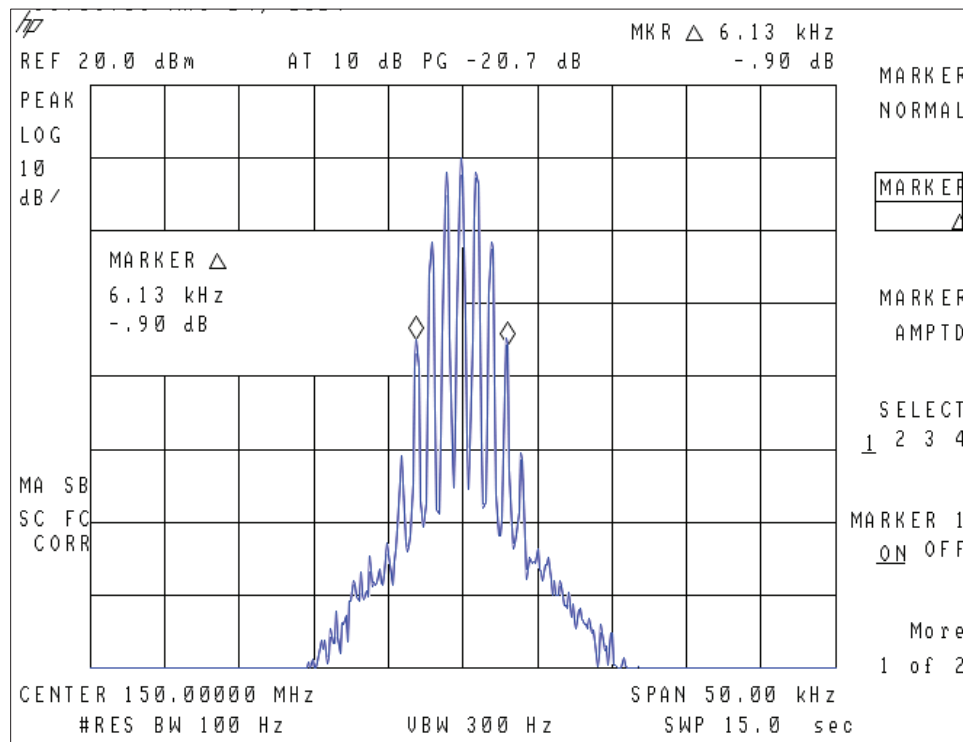


Figure 24. Input 150 MHz @ 6.25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

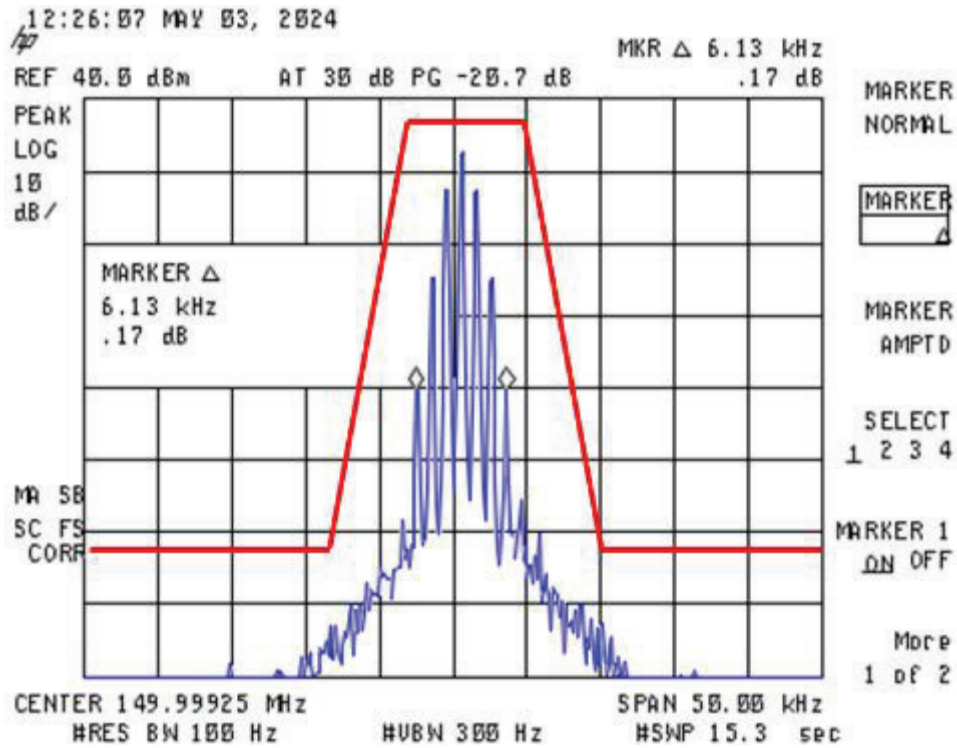


Figure 25. 150 MHz @ 6.25 kHz, Mask E

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

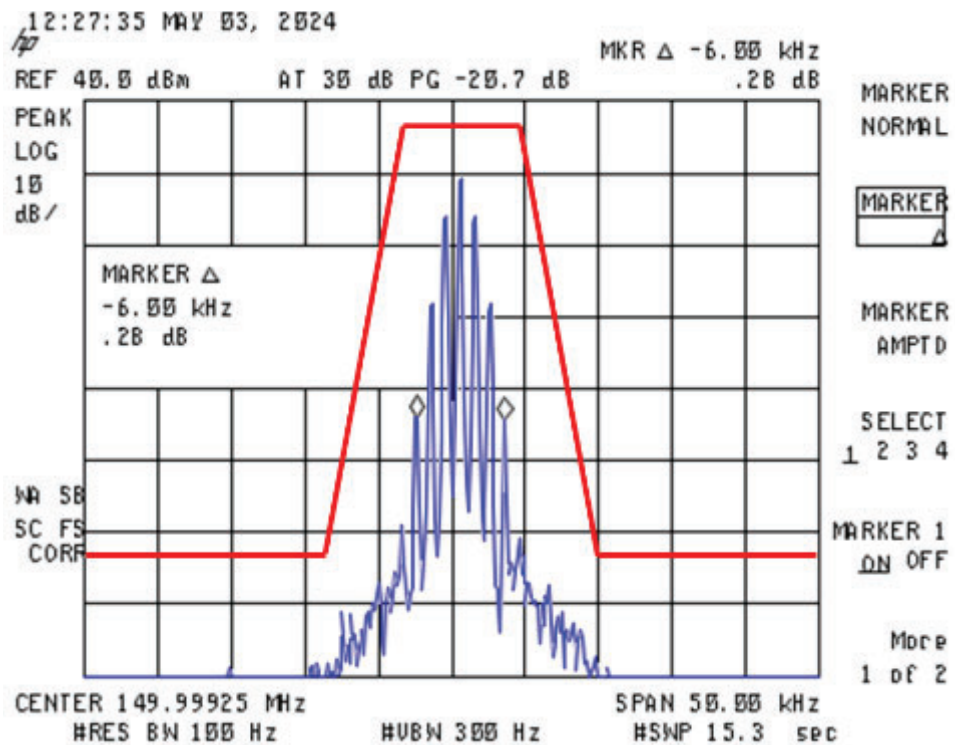


Figure 26. 150 MHz@ 6.25 kHz + 3.0 dB, Mask E

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

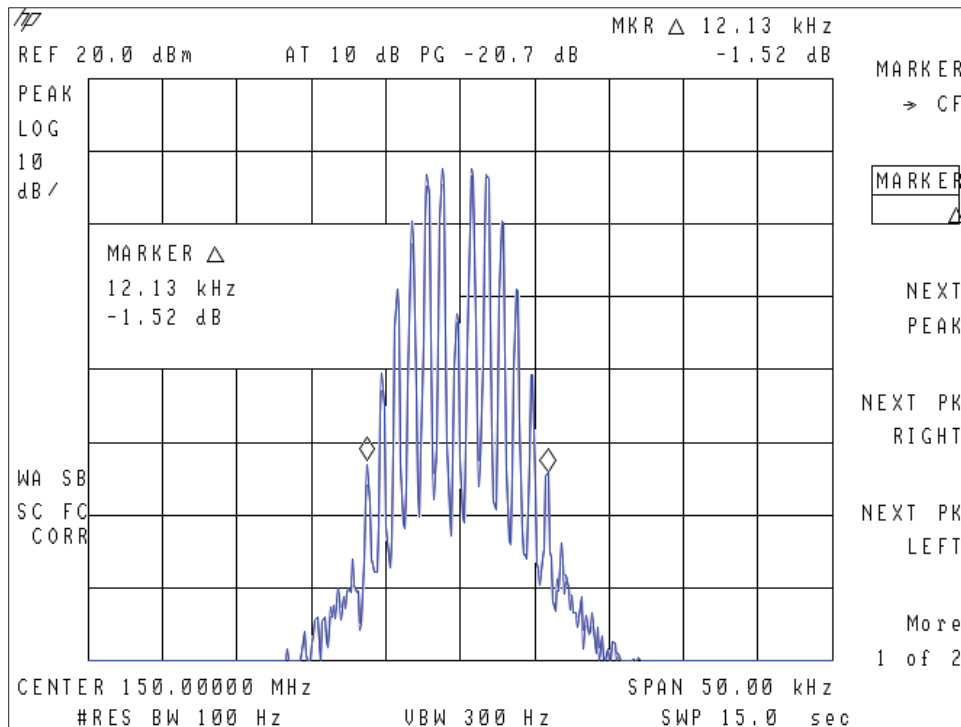


Figure 27. Input 150 MHz @ 12.5 kHz

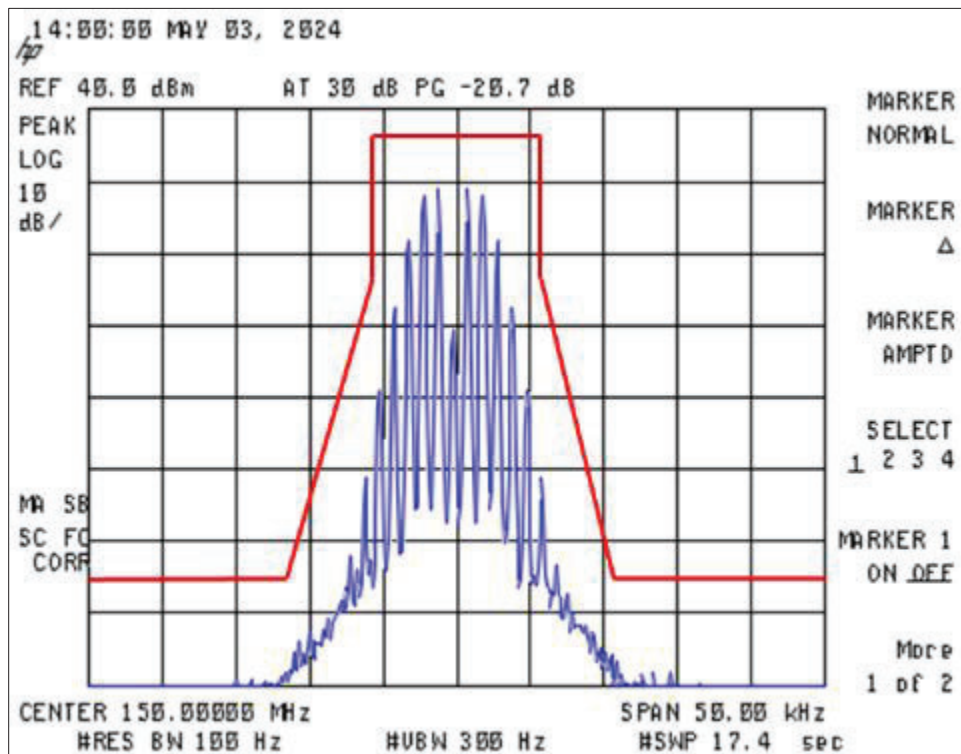


Figure 28. 150 MHz @ 12.5 kHz, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

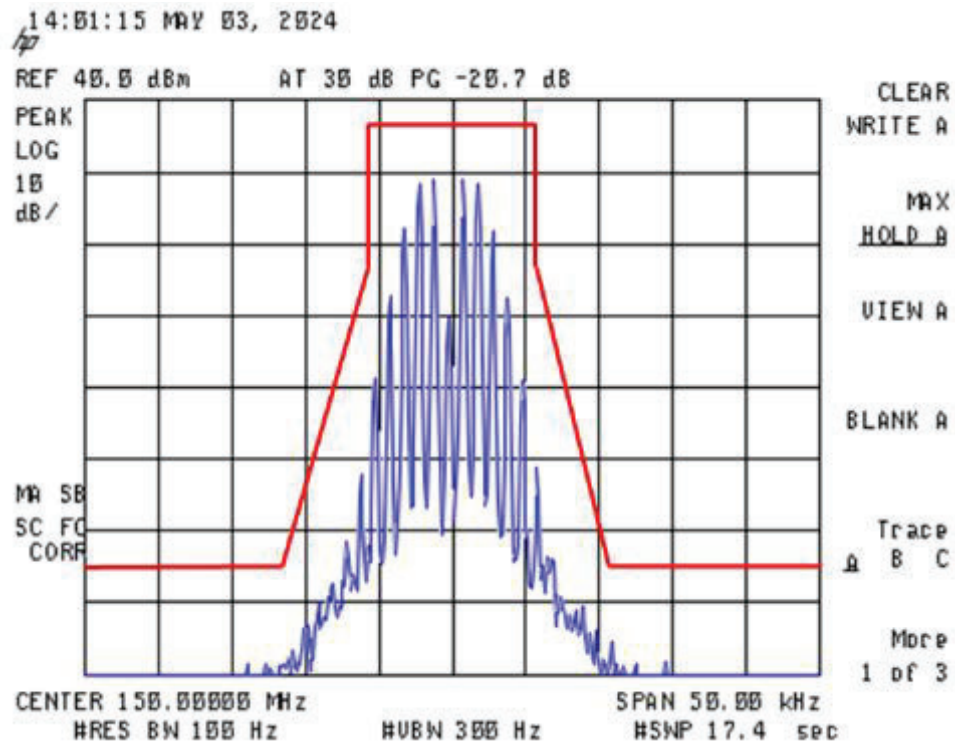


Figure 29. 150 MHz @ 12.5 kHz + 3.0 dB, Mask D

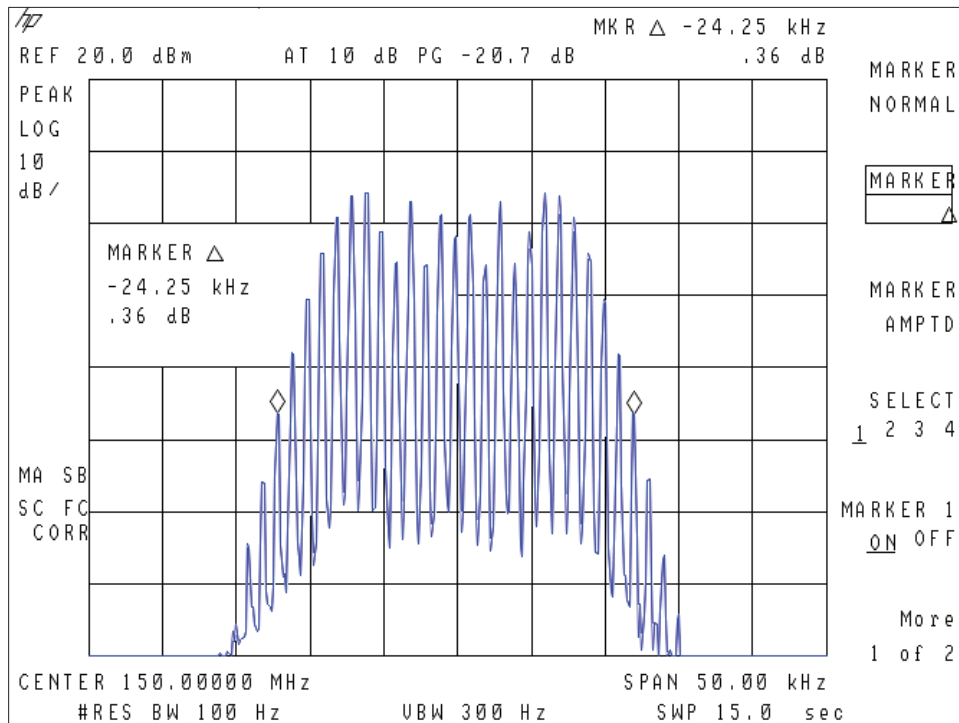


Figure 30. Input 150 MHz @ 25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

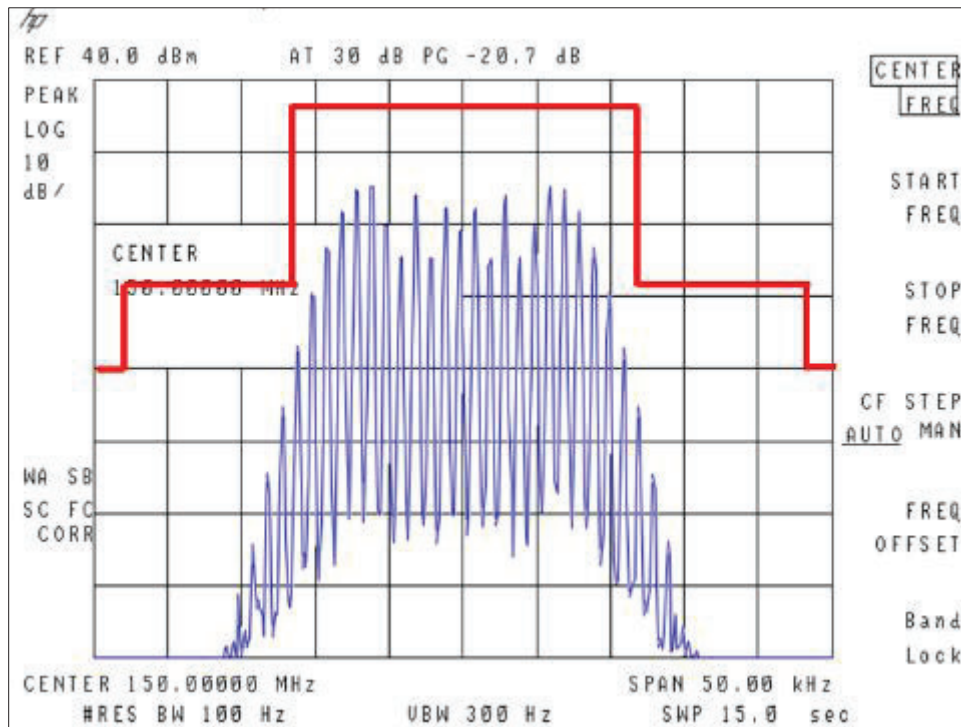


Figure 31. 150 MHz @ 25 kHz, Mask B

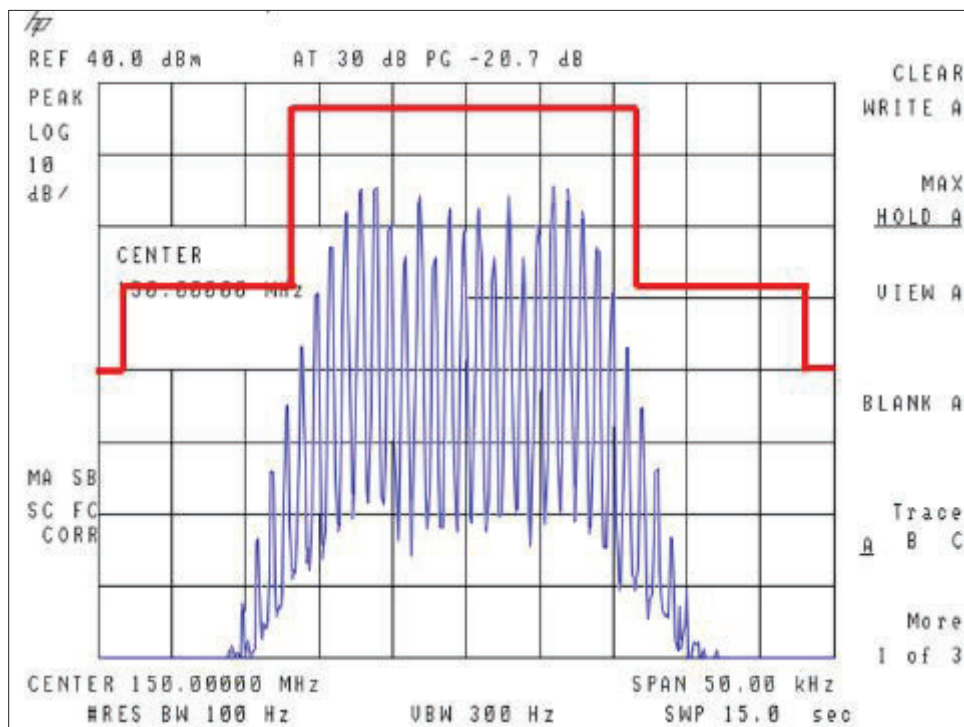


Figure 32. 150 MHz @ 25 kHz + 3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

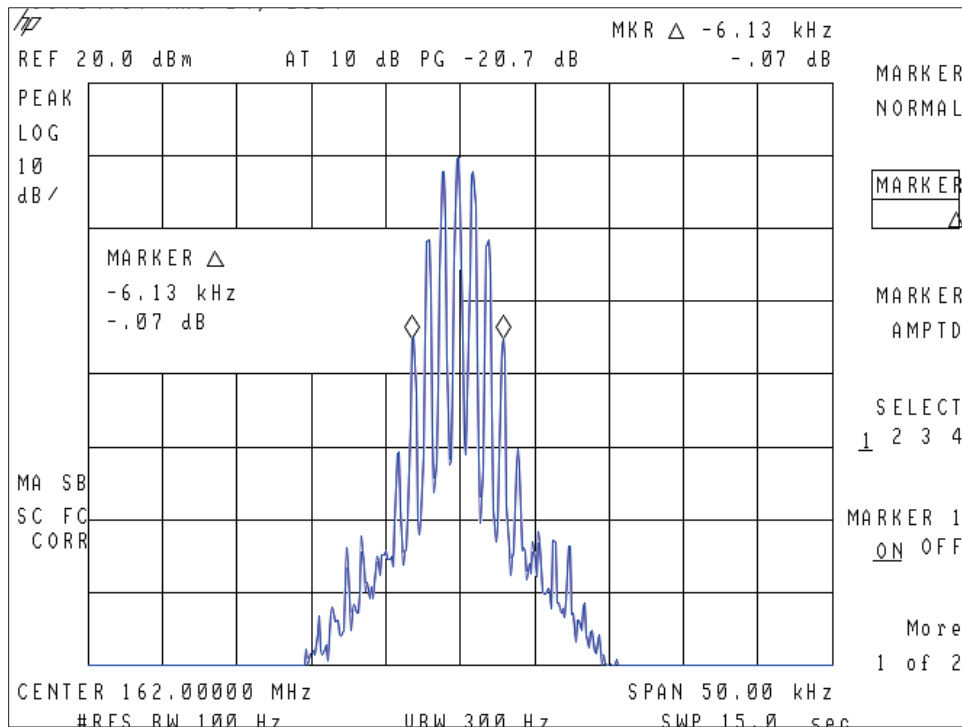


Figure 33. Input 162 MHz @ 6.25 kHz

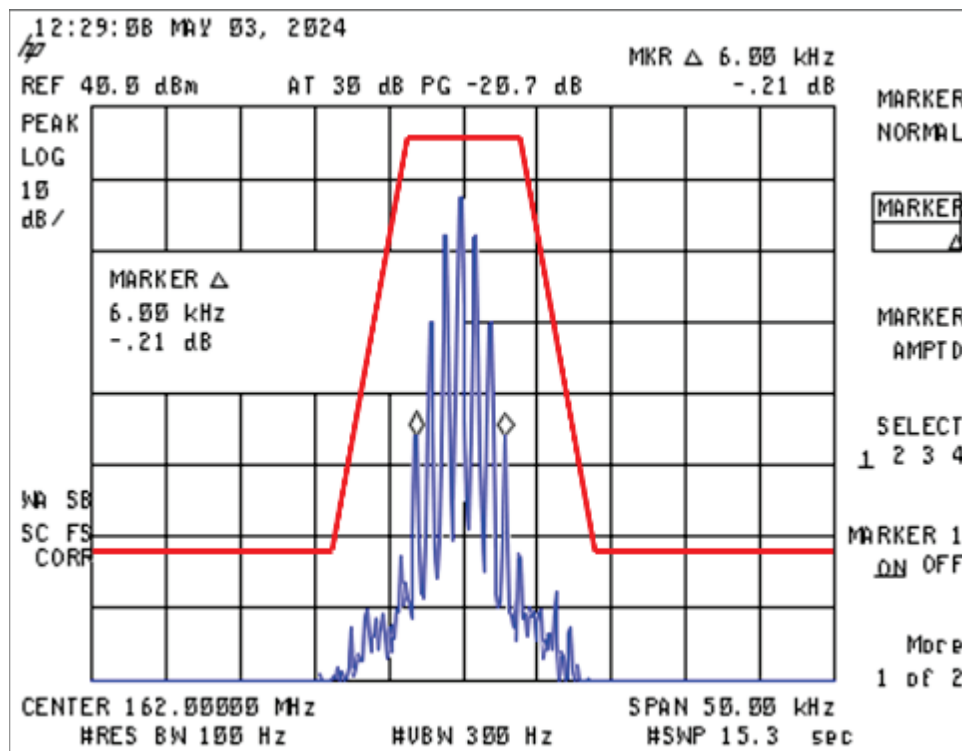


Figure 34. 162 MHz @ 6.25 kHz, Mask E

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

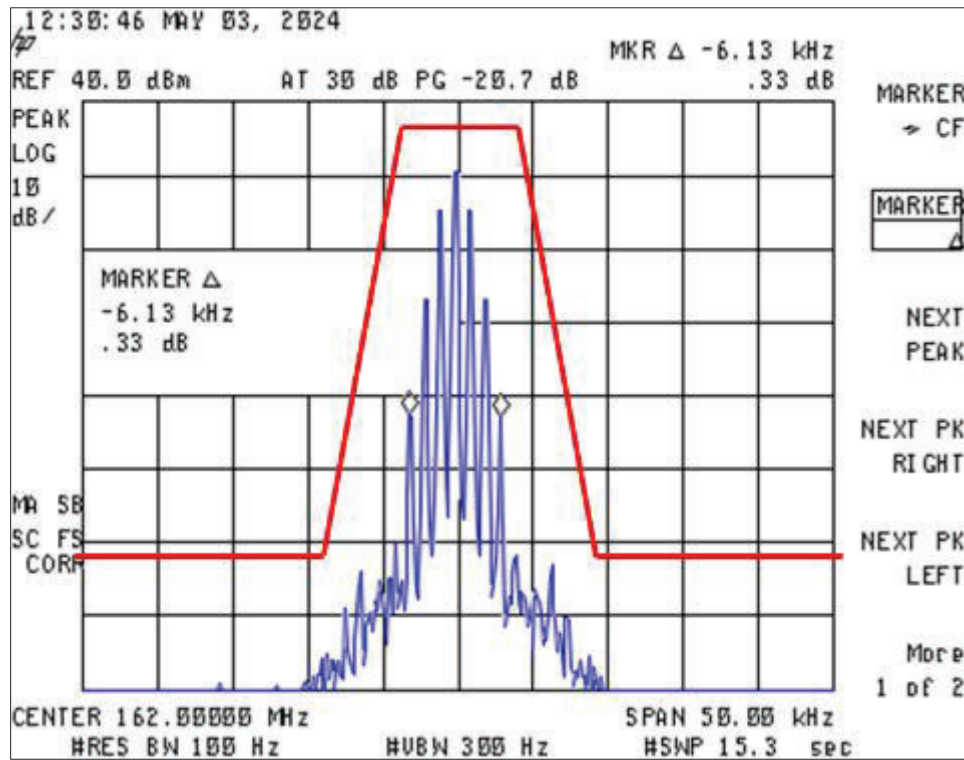


Figure 35. 162 MHz @ 6.25 kHz + 3.0 dB, Mask E

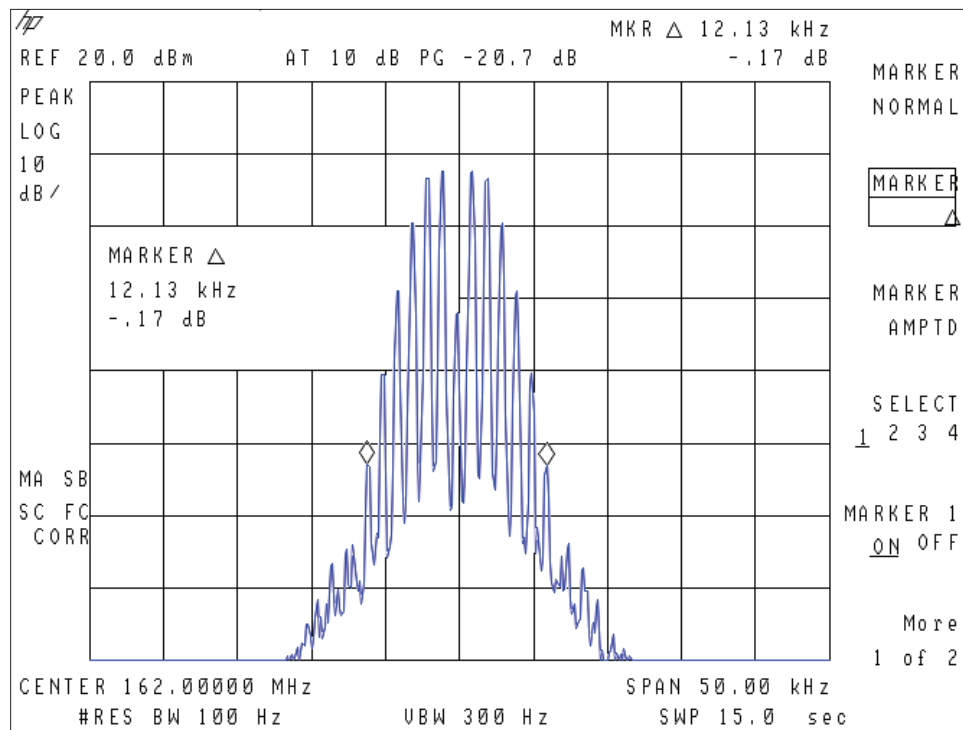


Figure 36. Input 162 MHz @ 12.5 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

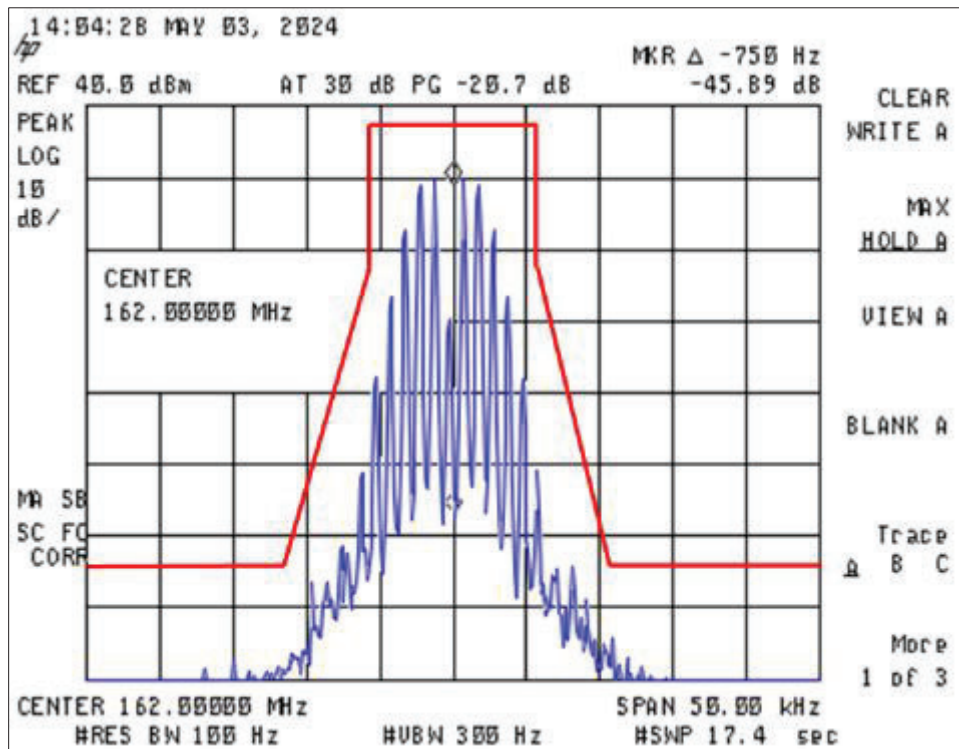


Figure 37. 162 MHz @ 12.5 kHz, Mask D

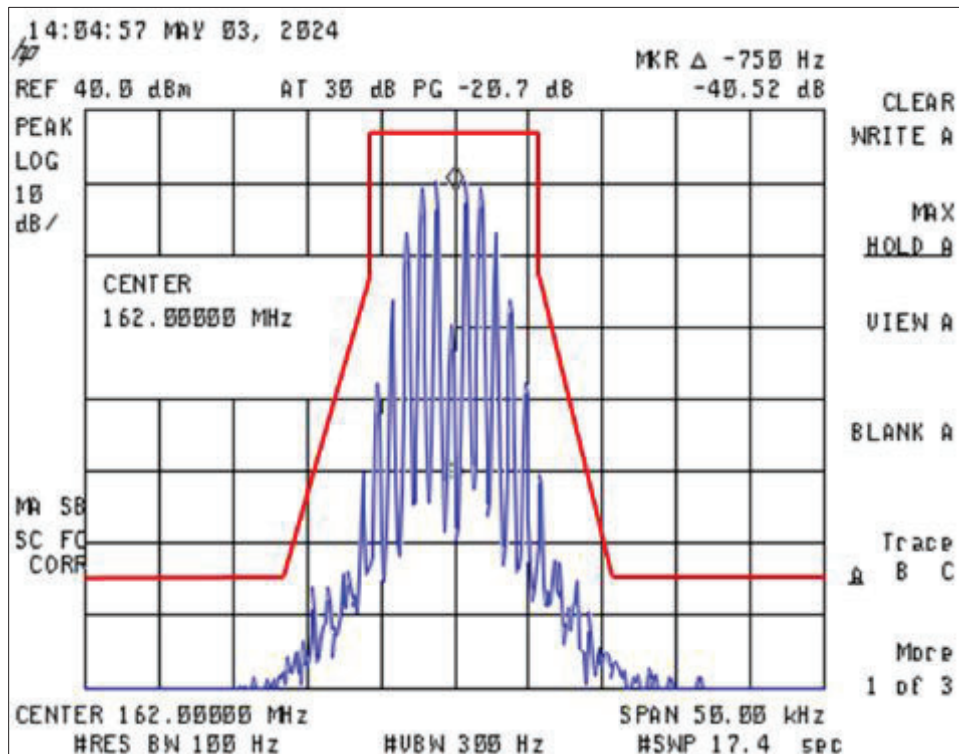


Figure 38. 162 MHz @ 12.5 kHz + 3.0 dB, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

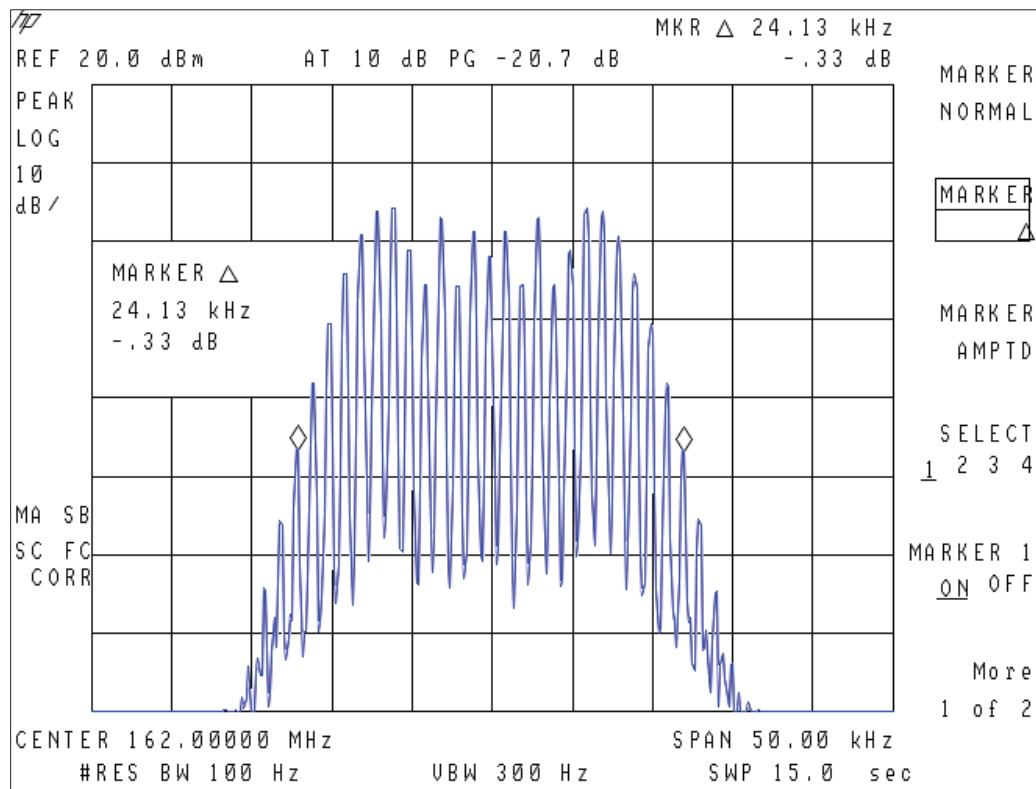


Figure 39. Input 162 MHz @ 25 kHz

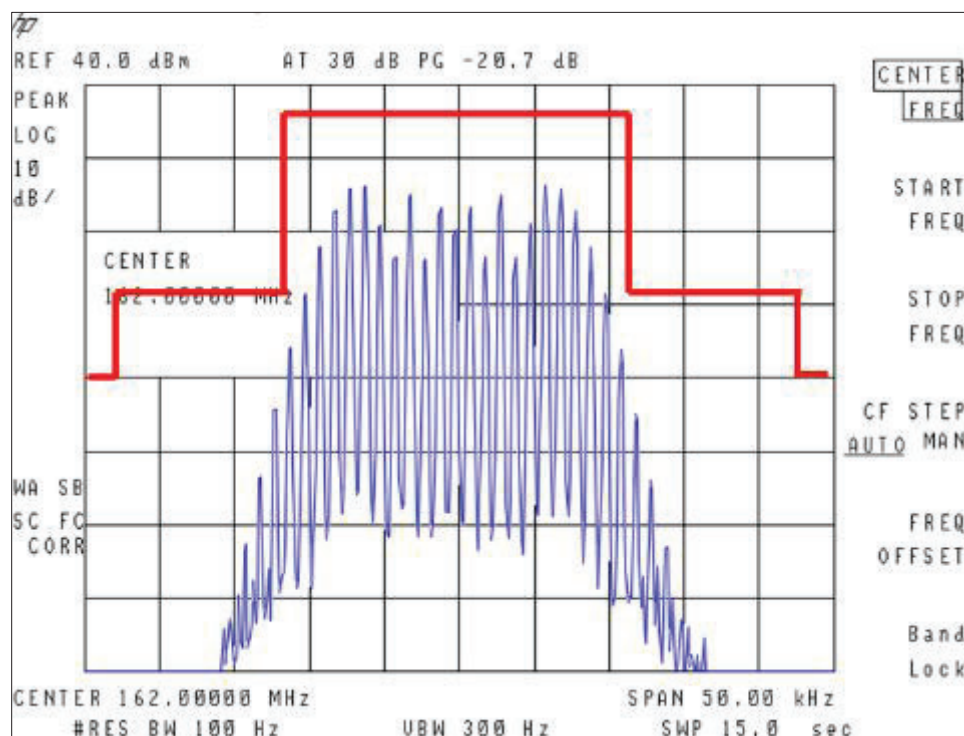


Figure 40. 162 MHz @ 25 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

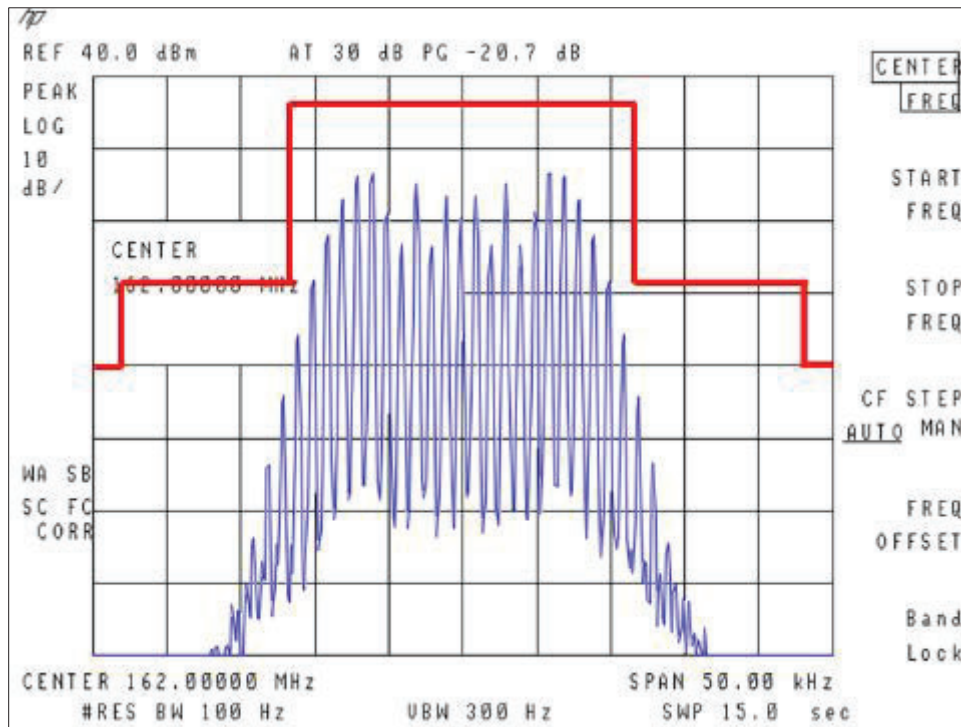


Figure 41. 162 MHz @ 25 kHz + 3.0 dB, Mask B

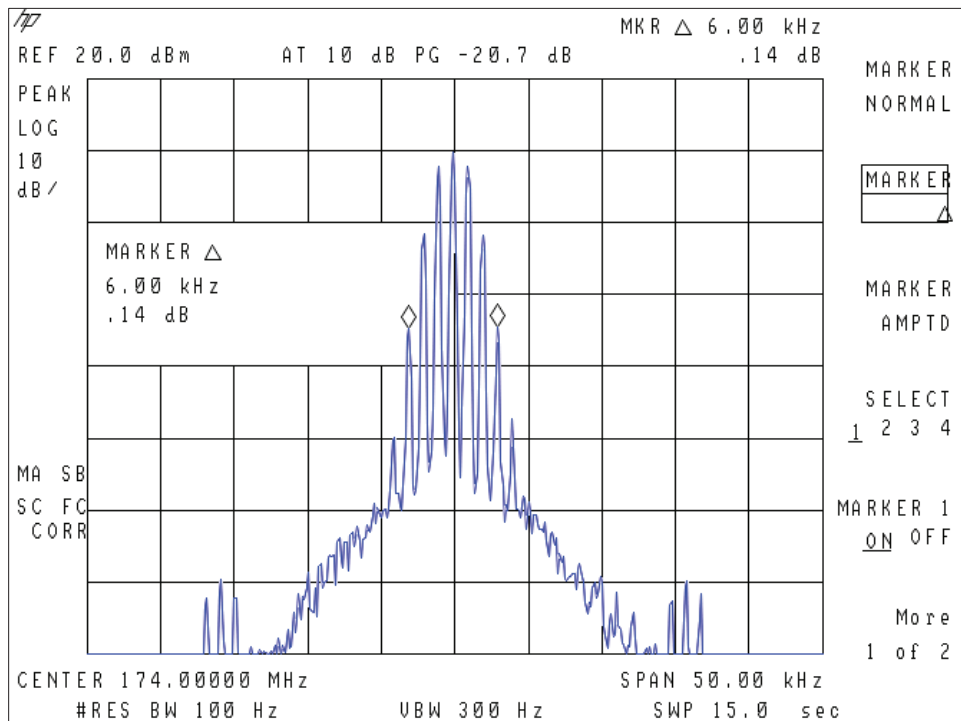


Figure 42. Input 174 MHz @ 6.25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

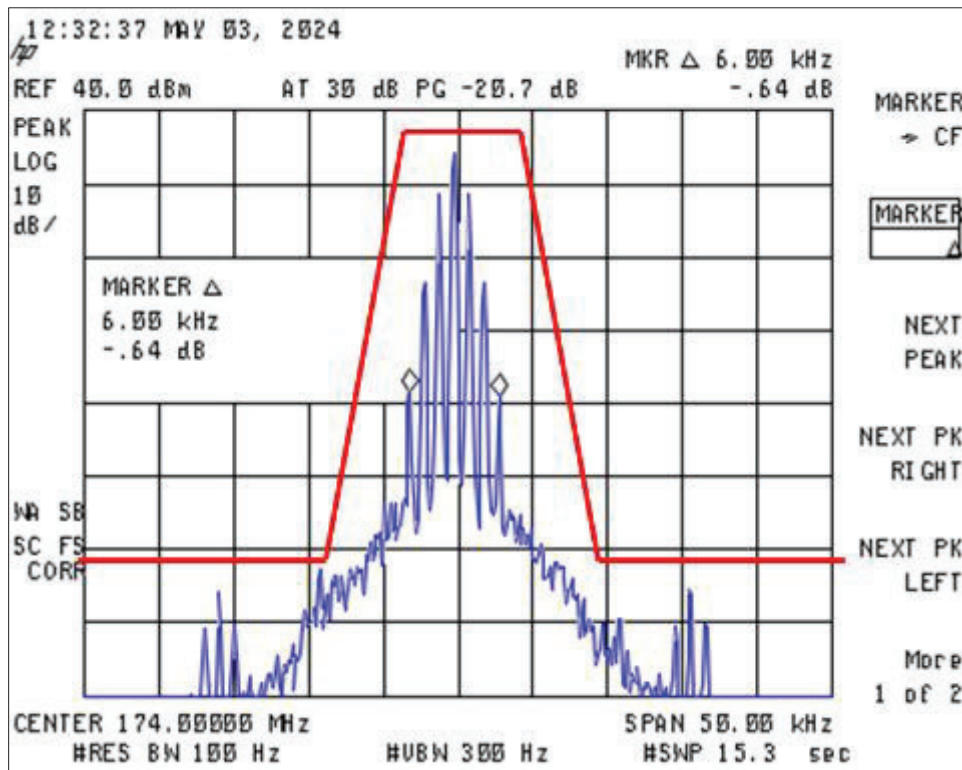


Figure 43. 174 MHz @ 6.25 kHz, Mask E

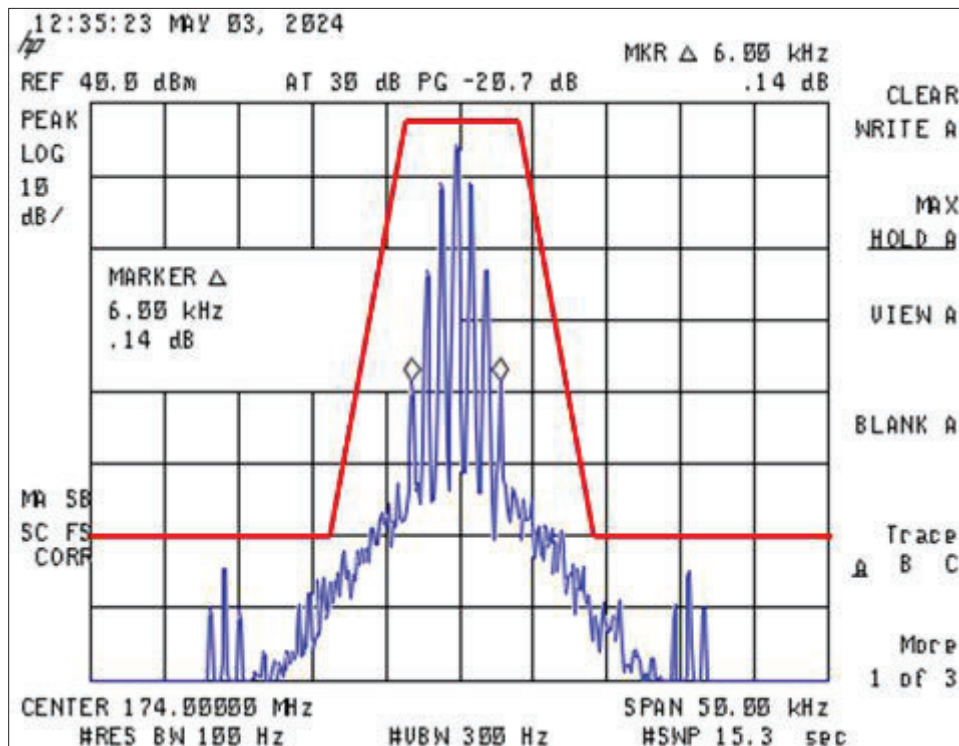


Figure 44. 174 MHz @ 6.25 kHz + 3.0 dB, Mask E

U.S. Tech Test Report:
 FCC ID:
 IC:
 Report Number:
 Issue Date:
 Customer:
 Model:

FCC Part 90 Certification
 2AKSM-SAFE4
 22303-SAFE4
 24-0123
 August 1, 2024
 Safe-Com Wireless
 SAFE-0002

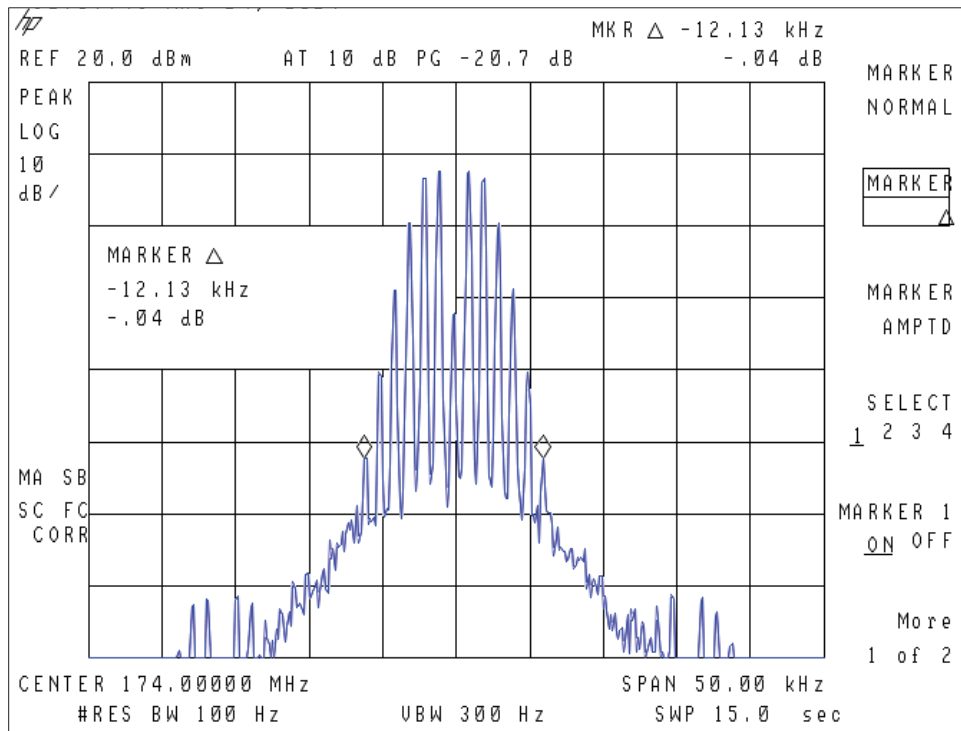


Figure 45. Input 174 MHz @ 12.5 kHz

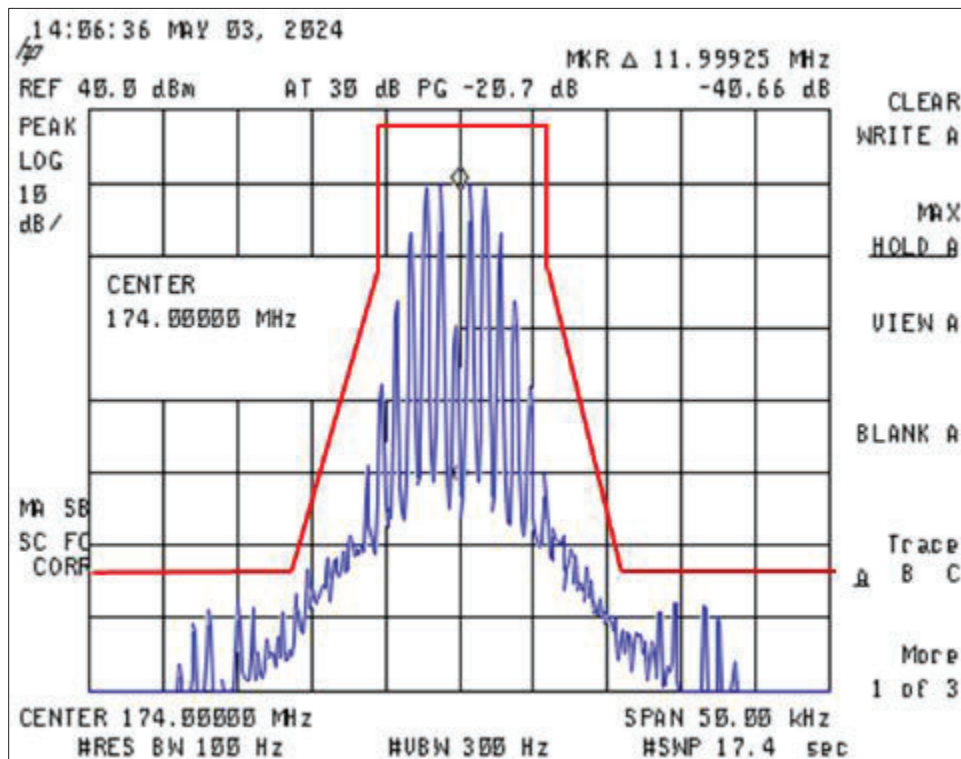


Figure 46. 174 MHz @ 12.5 kHz, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

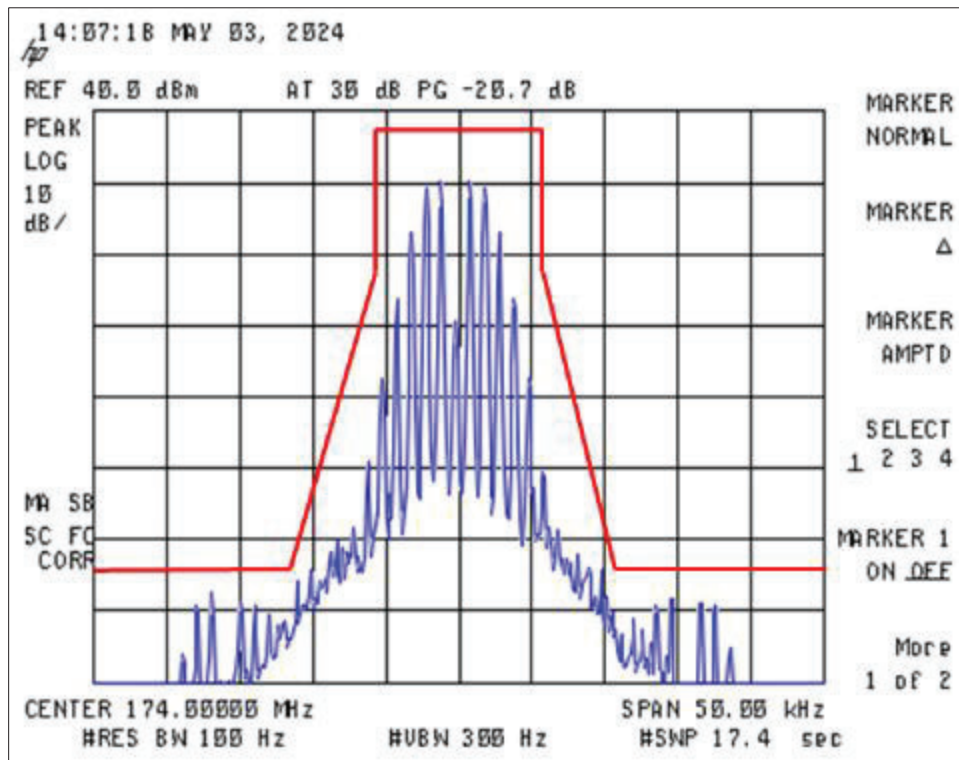


Figure 47. 174 MHz @ 12.5 kHz + 3.0 dB, Mask D

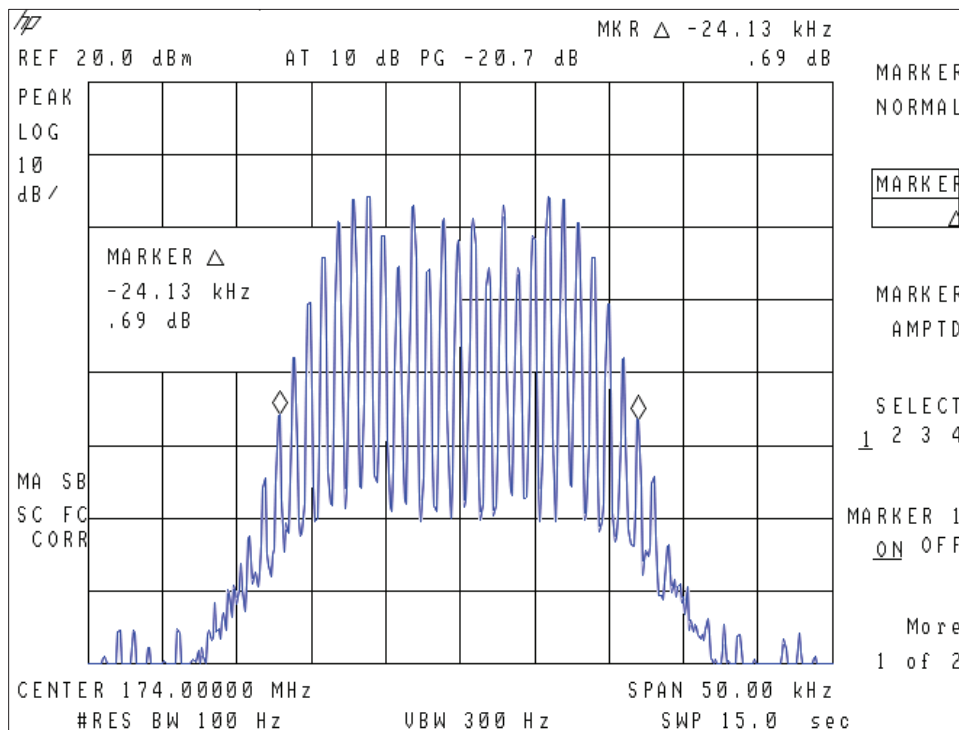


Figure 48. Input 174 MHz @ 25

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

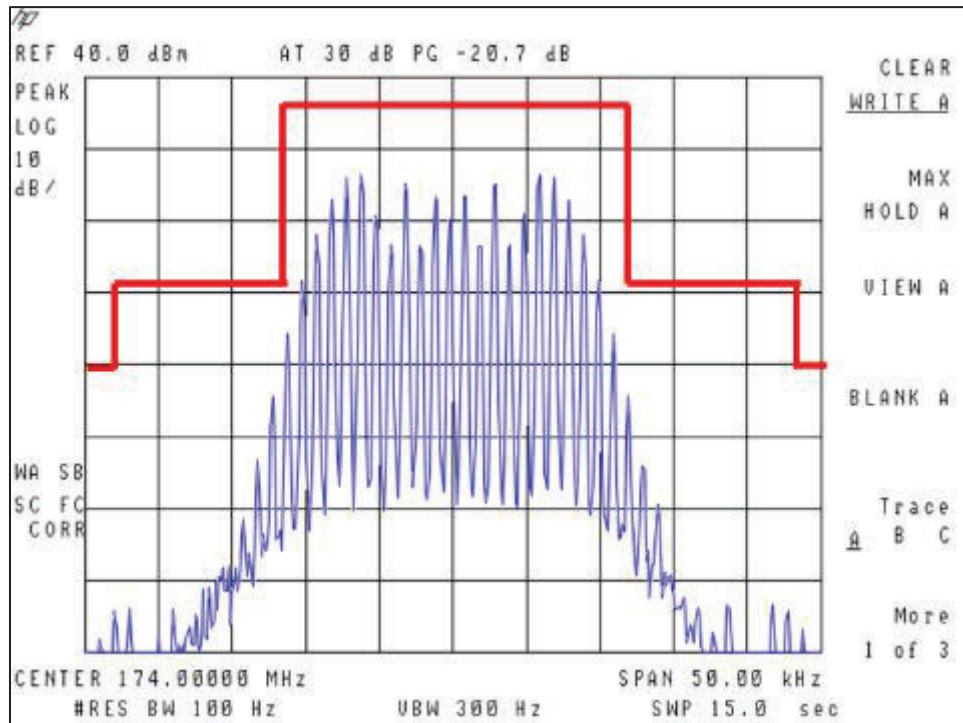


Figure 49. 174 MHz @ 25 kHz, Mask B

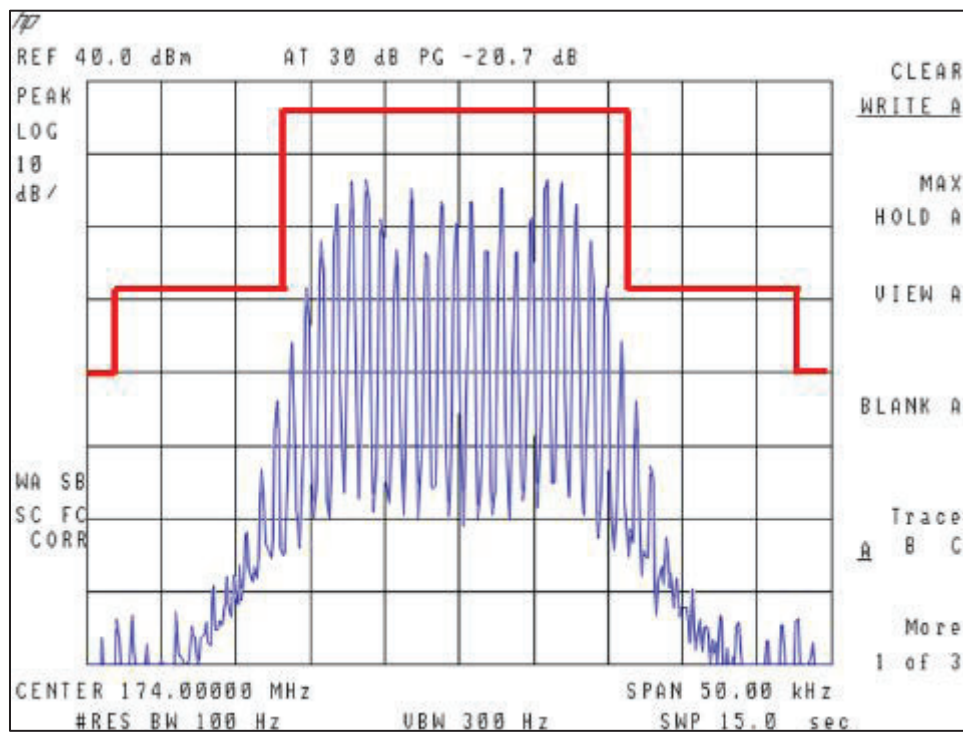


Figure 50. 174 MHz @ 25 kHz + 3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

2.11.2 UHF Channels

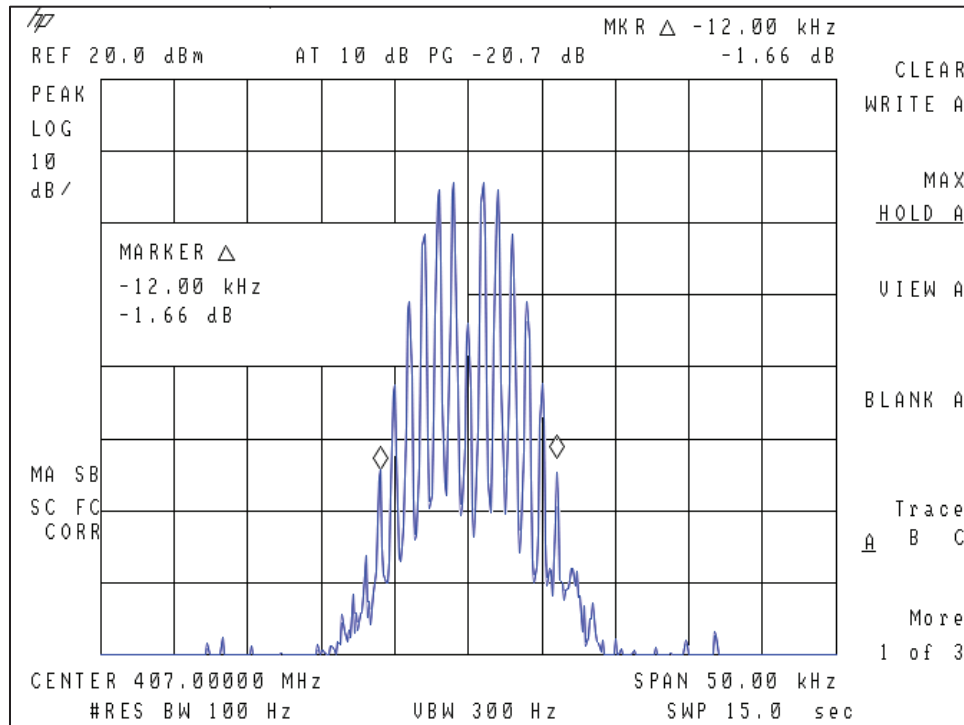


Figure 51. Input 407 MHz @ 12.5 kHz

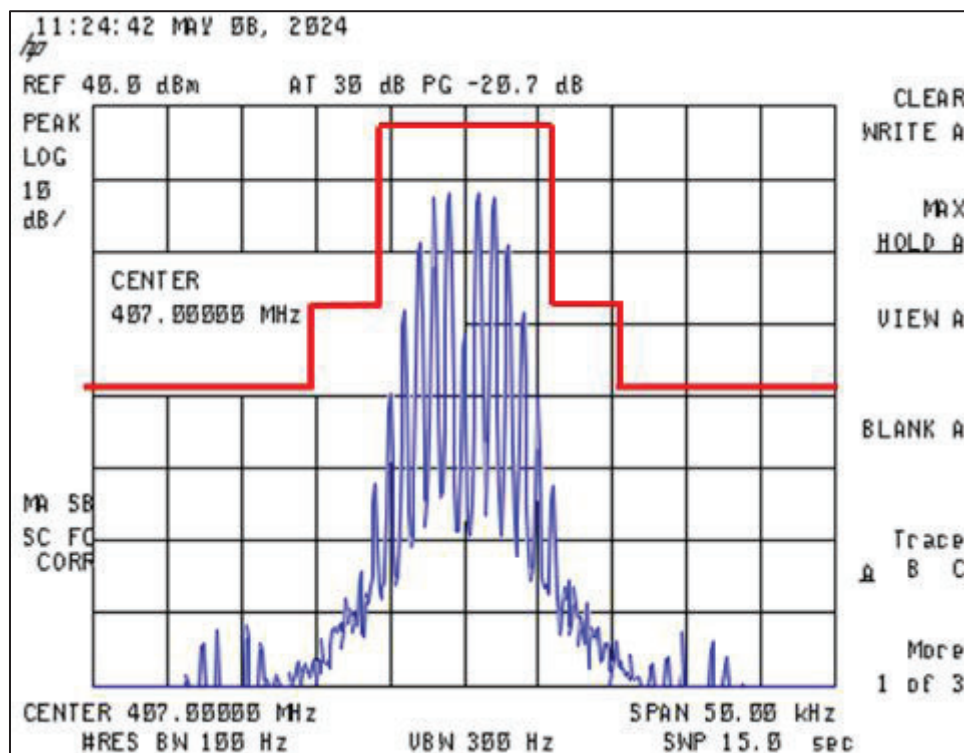


Figure 52. 407 MHz @ 12.5 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

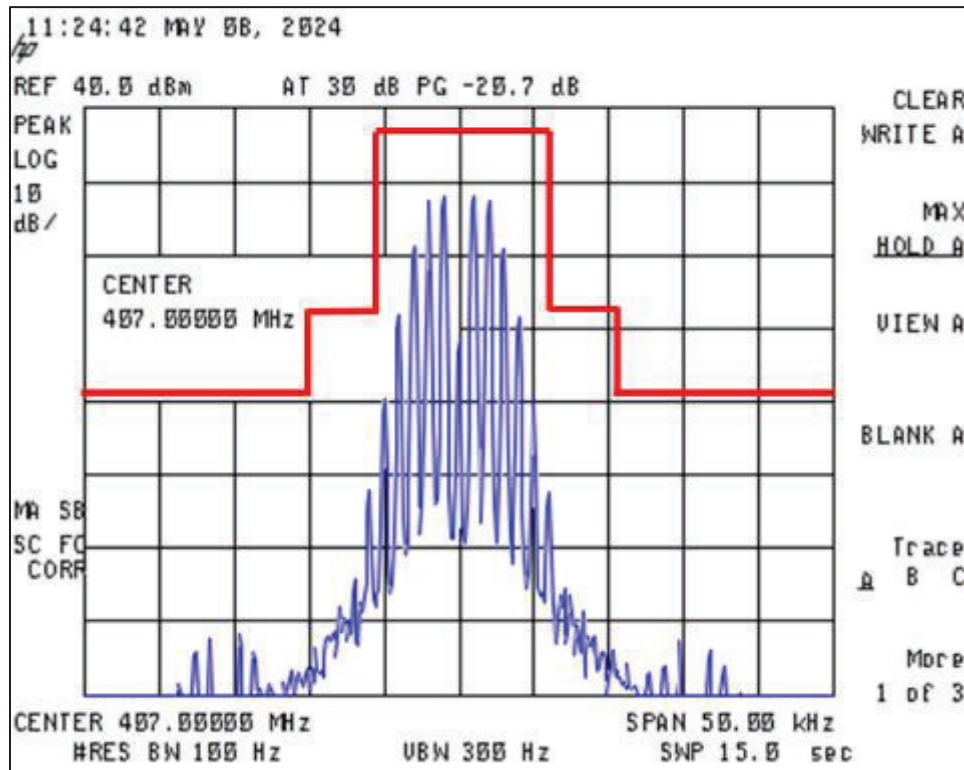


Figure 53. 407 MHz @ 12.5 kHz + 3.0 dB, Mask B

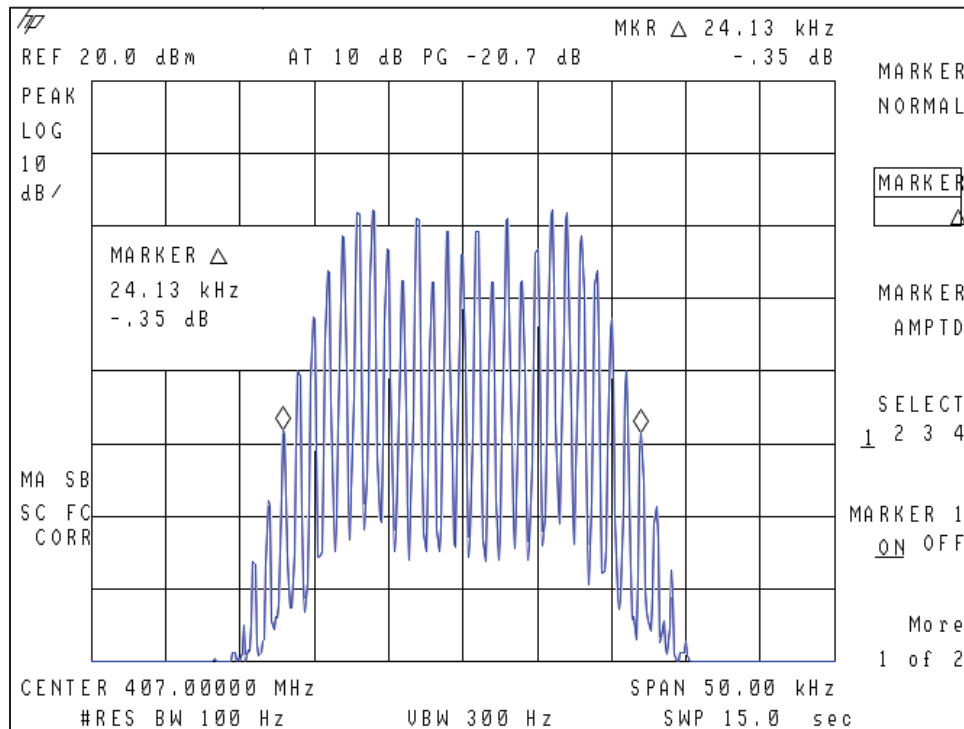


Figure 54. Input 407 MHz @ 25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

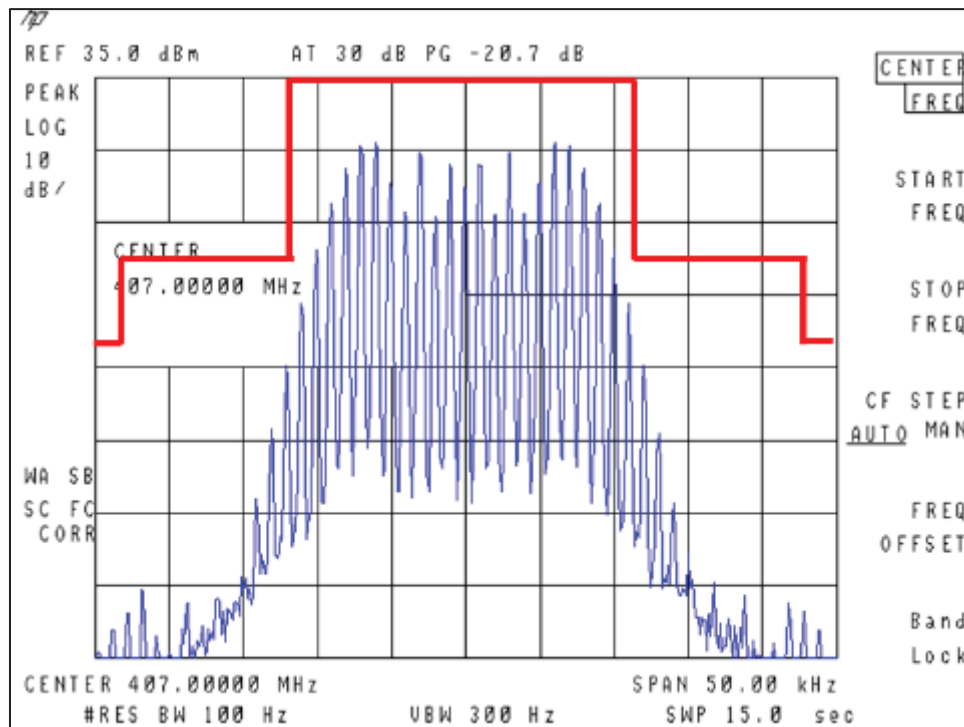


Figure 55. 407 MHz @ 25 kHz, Mask B

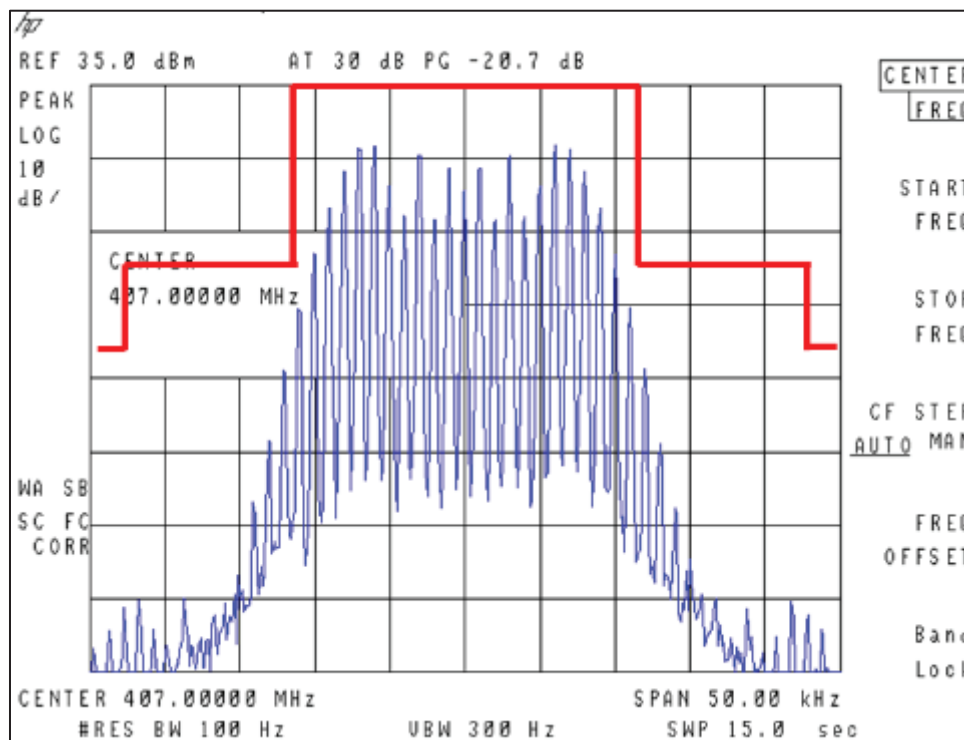


Figure 56. 407 MHz @ 25 kHz + 3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

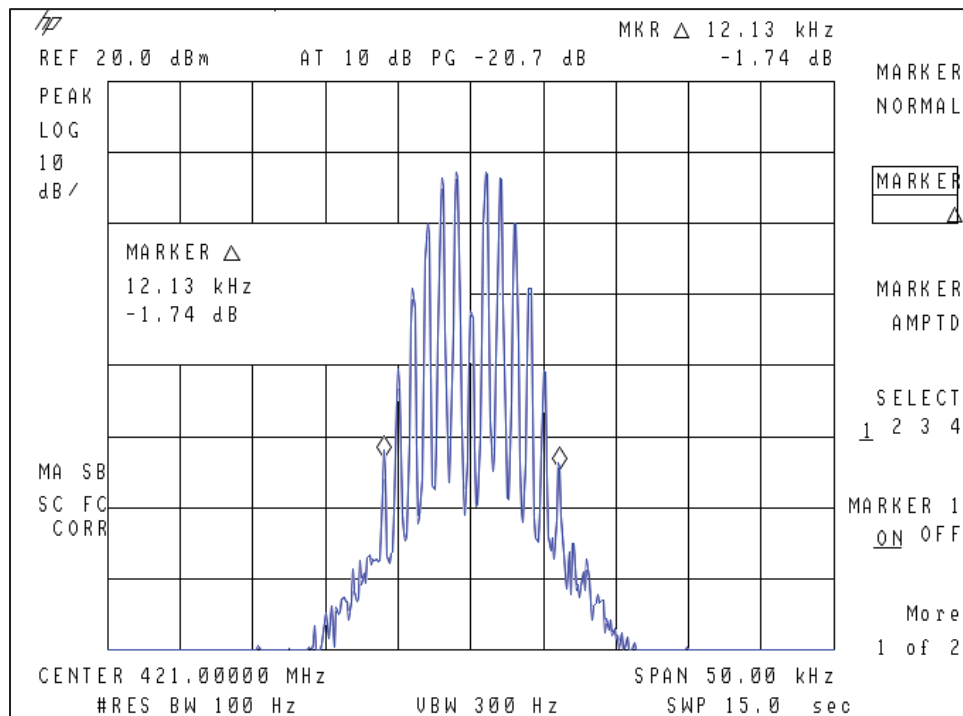


Figure 57. Input 421 MHz @ 12.5 kHz

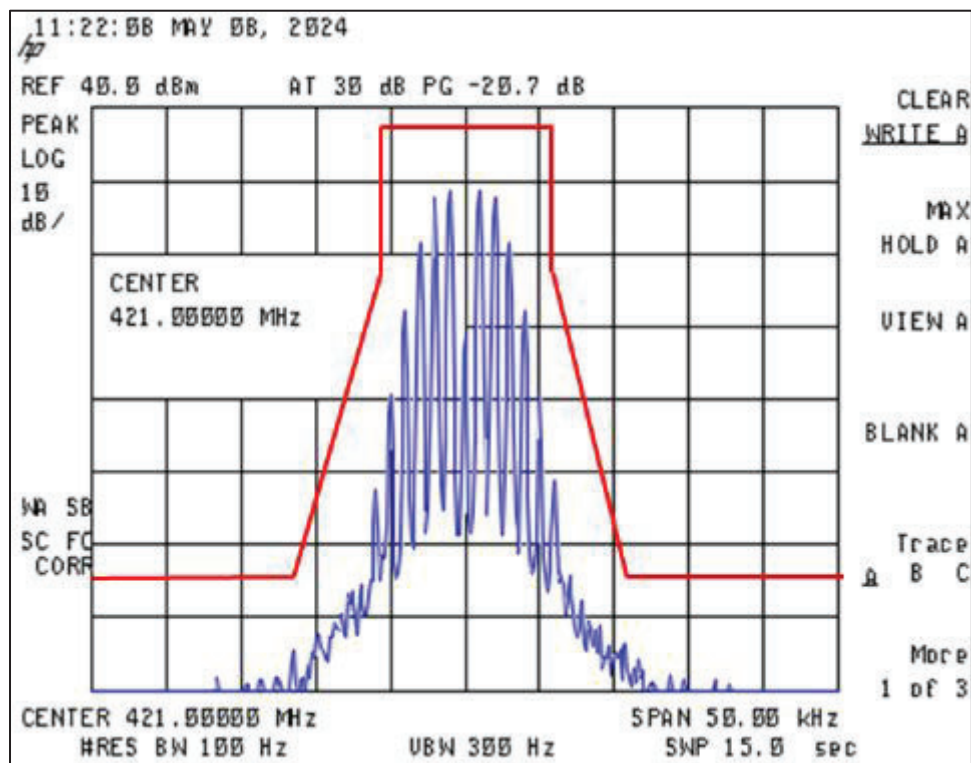


Figure 58. 421 MHz @ 12.5 kHz, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

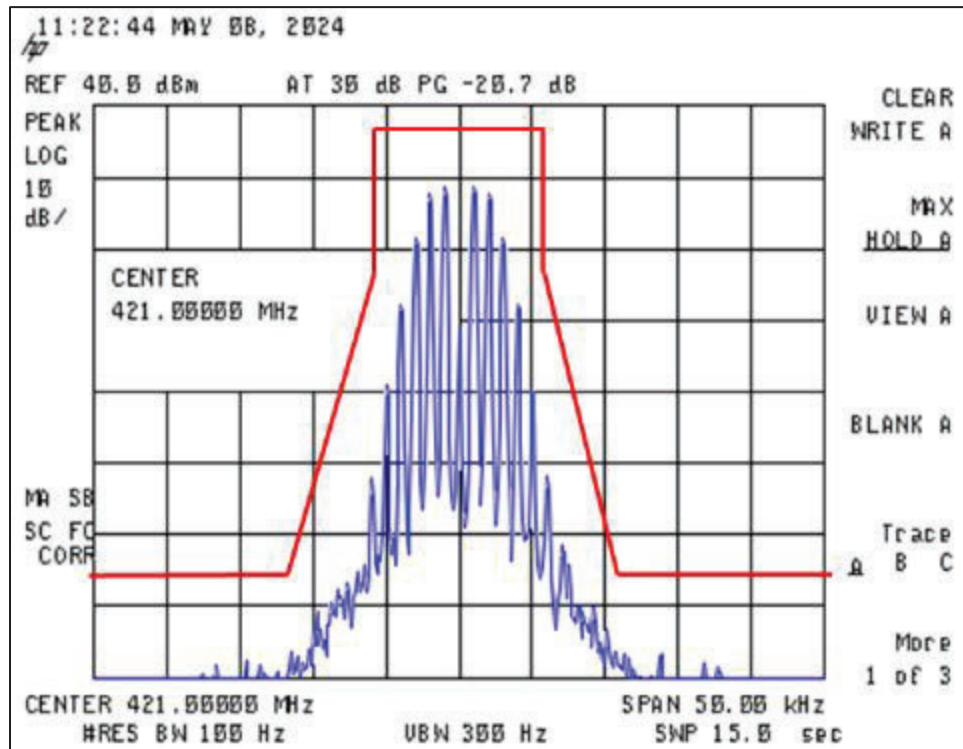


Figure 59. 421 MHz @ 12.5 kHz, +3 dB, Mask D

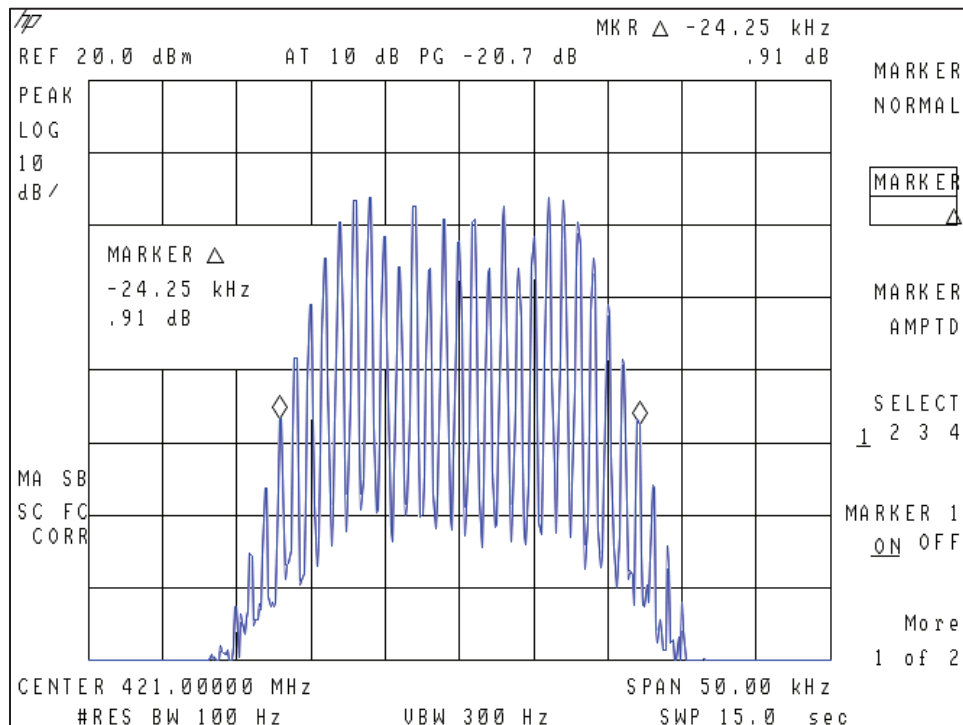


Figure 60. Input 421 MHz @ 25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

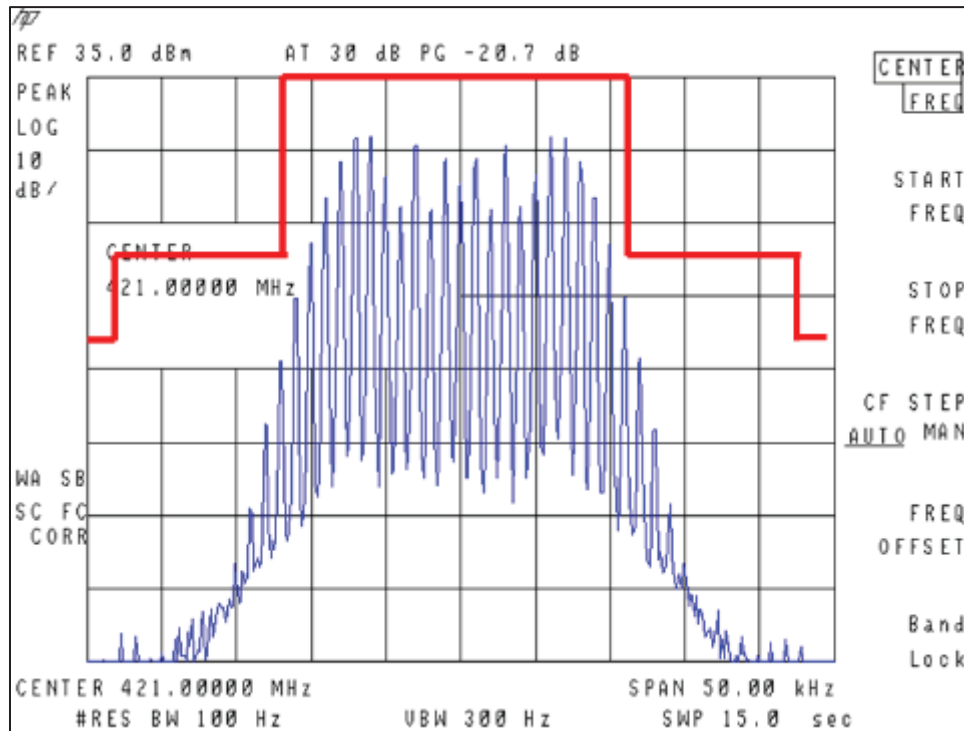


Figure 61. Input 421 MHz @ 25 kHz, Mask B

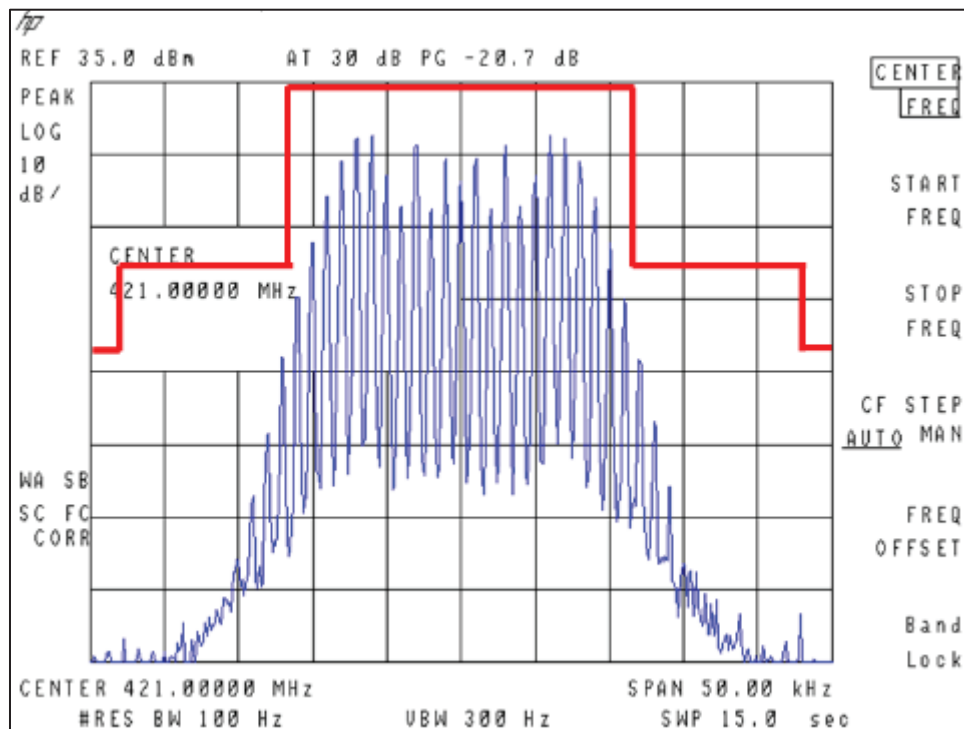


Figure 62. Input 421 MHz @ 25 kHz, +3 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

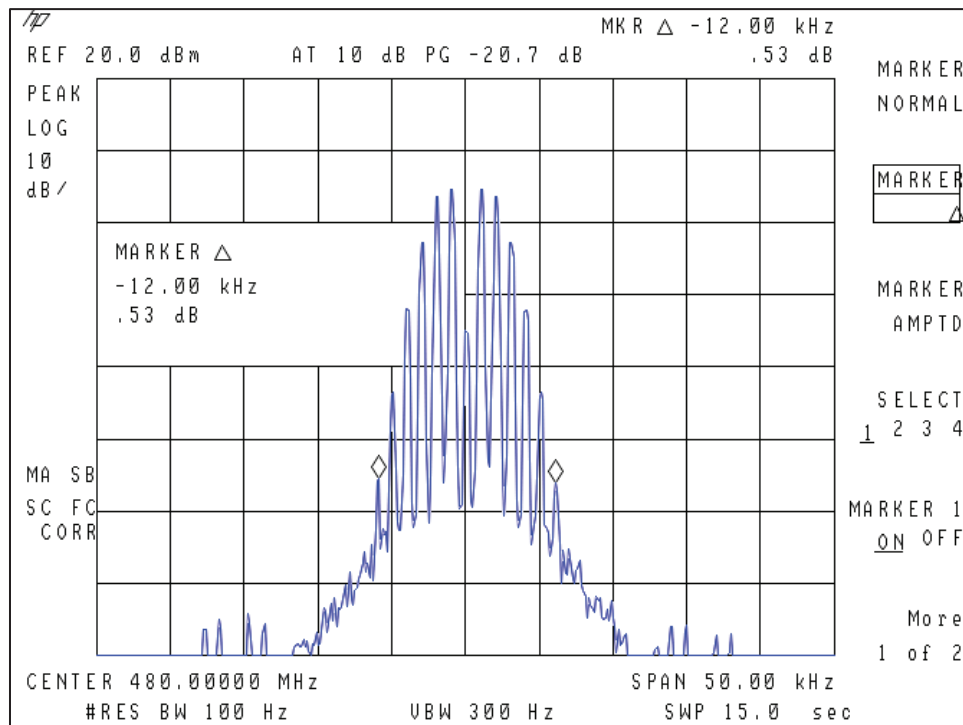


Figure 63. Input 480 MHz @ 12.5 kHz

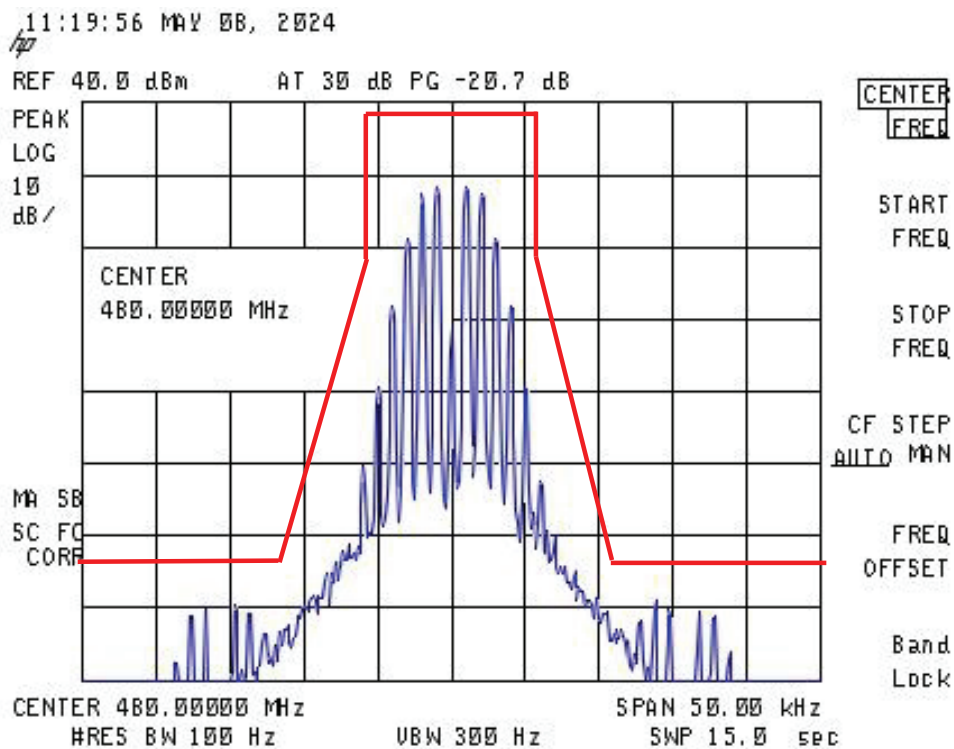


Figure 64. 480 MHz @ 12.5 kHz, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

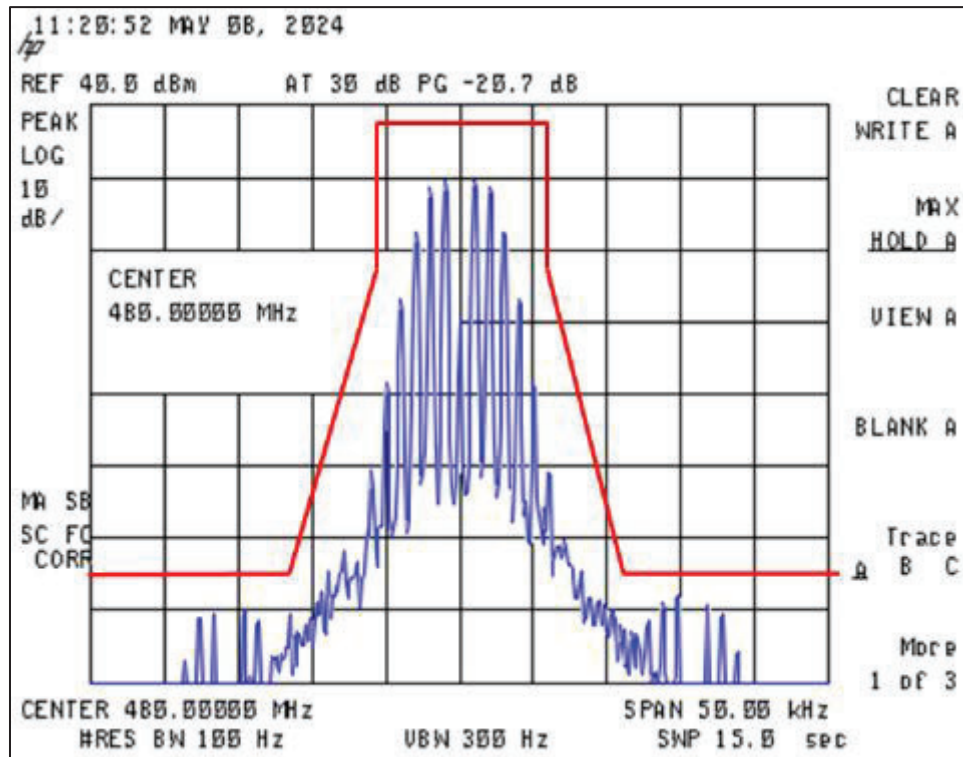


Figure 65. 480 MHz @ 12.5 kHz + 3.0 dB, Mask D

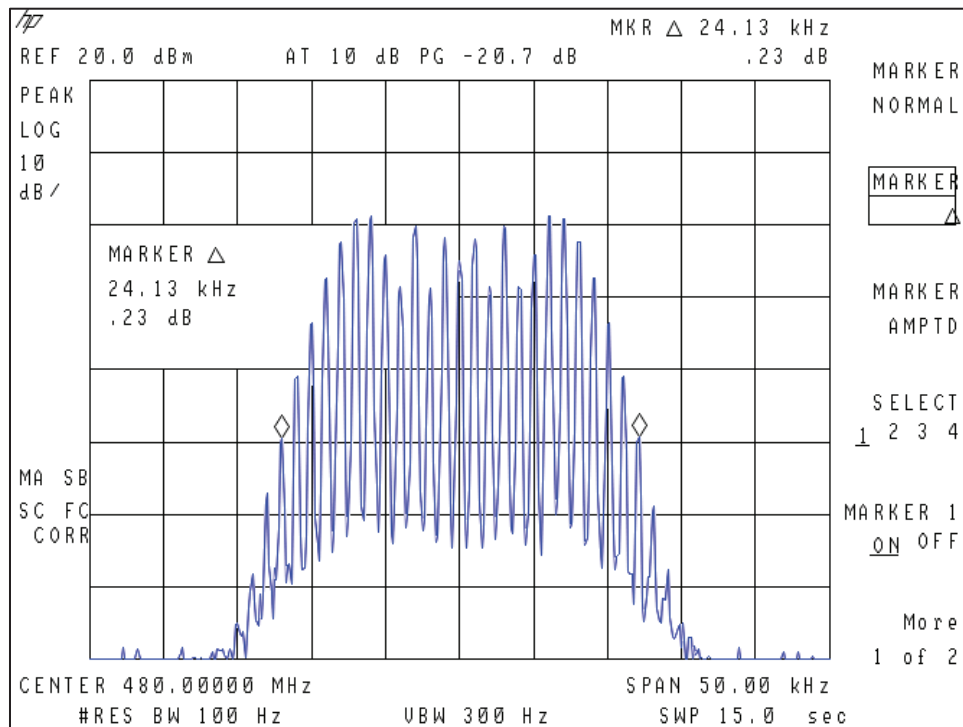


Figure 66. Input 480 MHz @ 25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

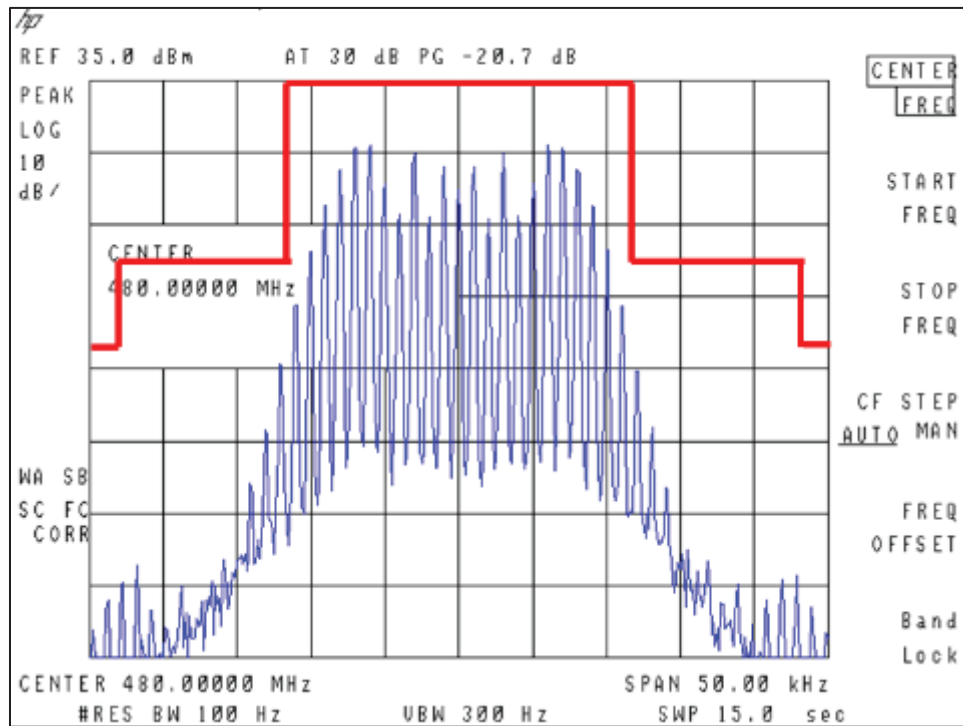


Figure 67. 480 MHz @ 25 kHz, Mask B

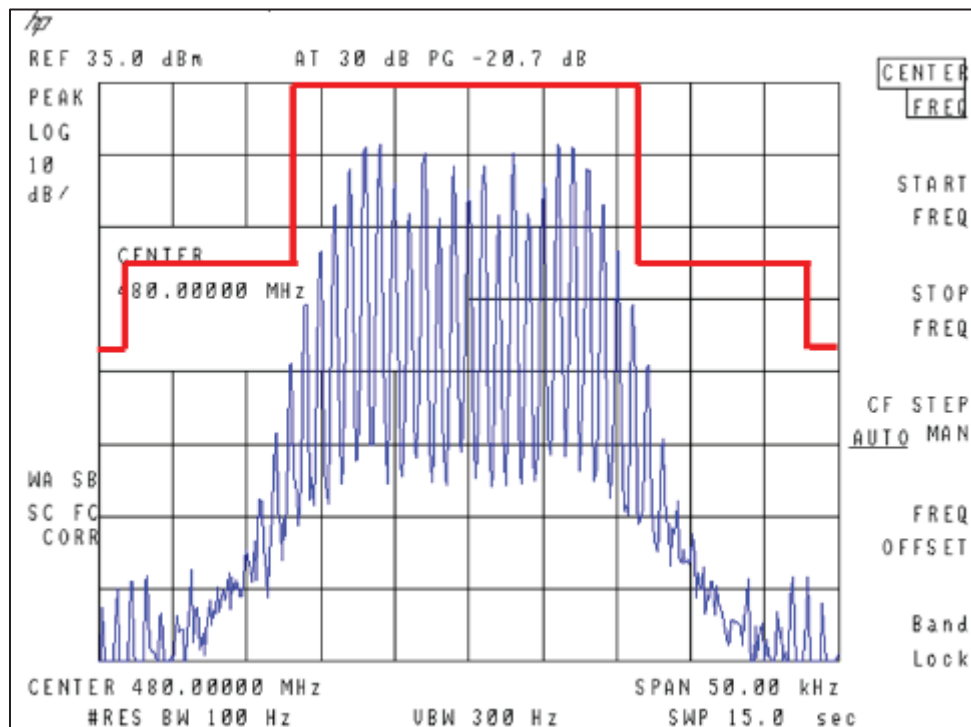


Figure 68. 480 MHz @ 25 kHz + 3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

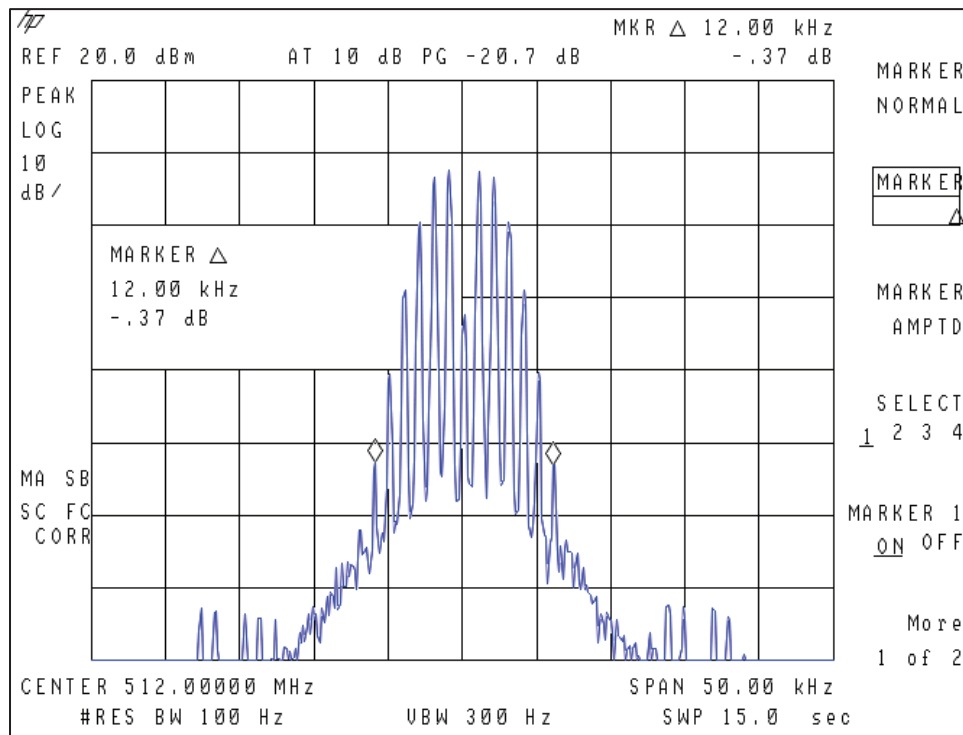


Figure 69. Input 512 MHz @ 12.5 kHz

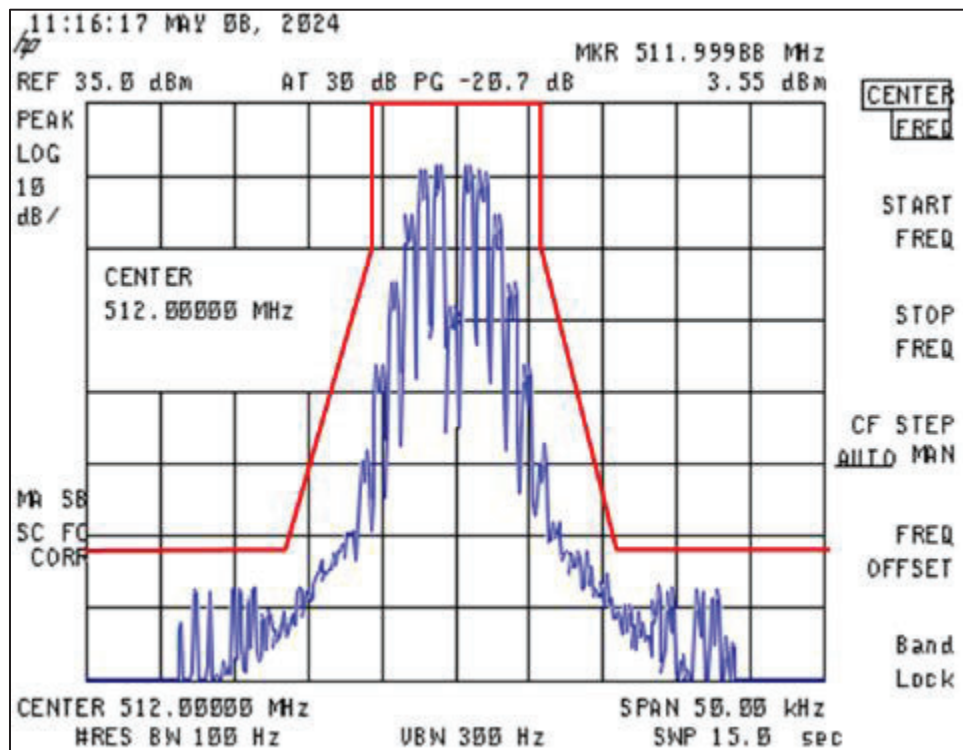


Figure 70. 512 MHz @ 12.5 kHz, Mask D

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

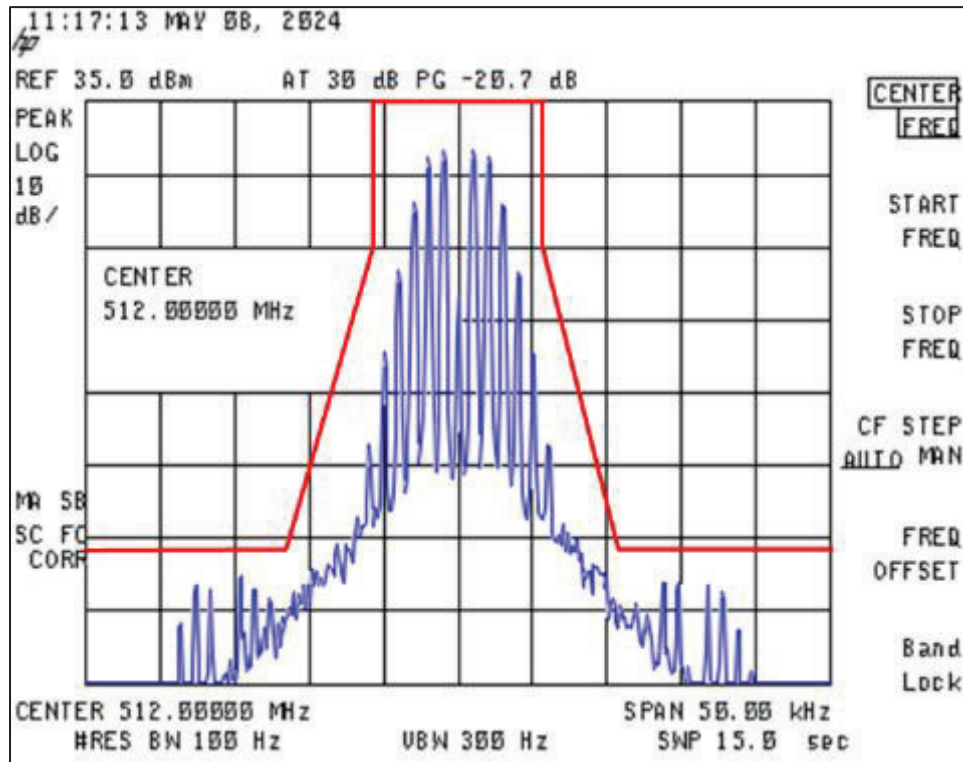


Figure 71. 512 MHz @ 12.5 kHz +3 dB, Mask D

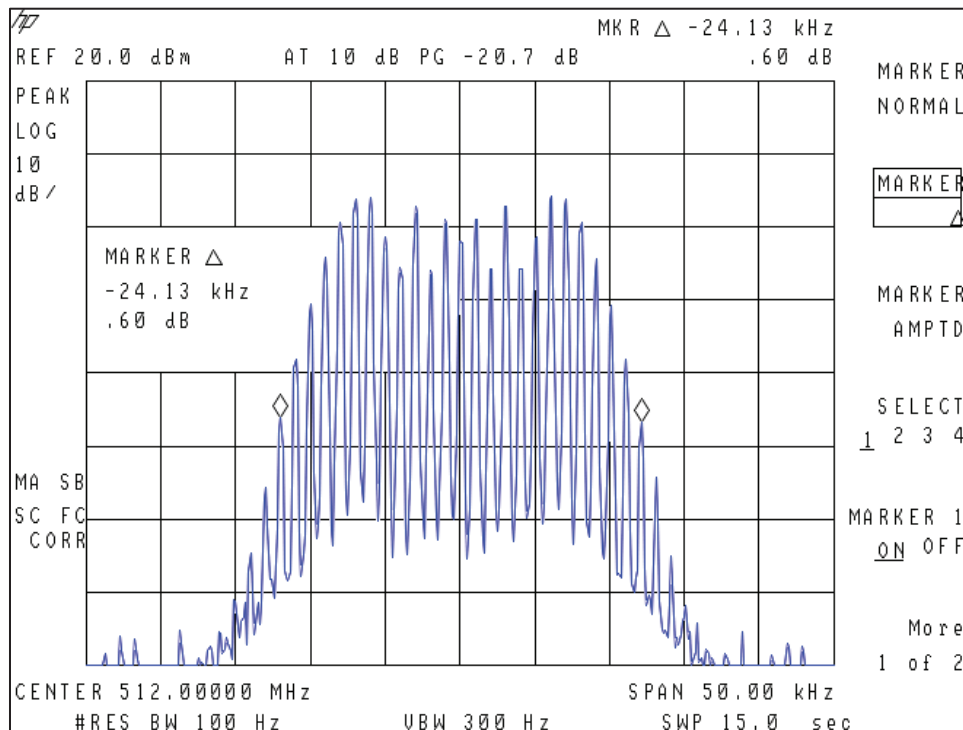


Figure 72. Input 512 MHz @ 25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

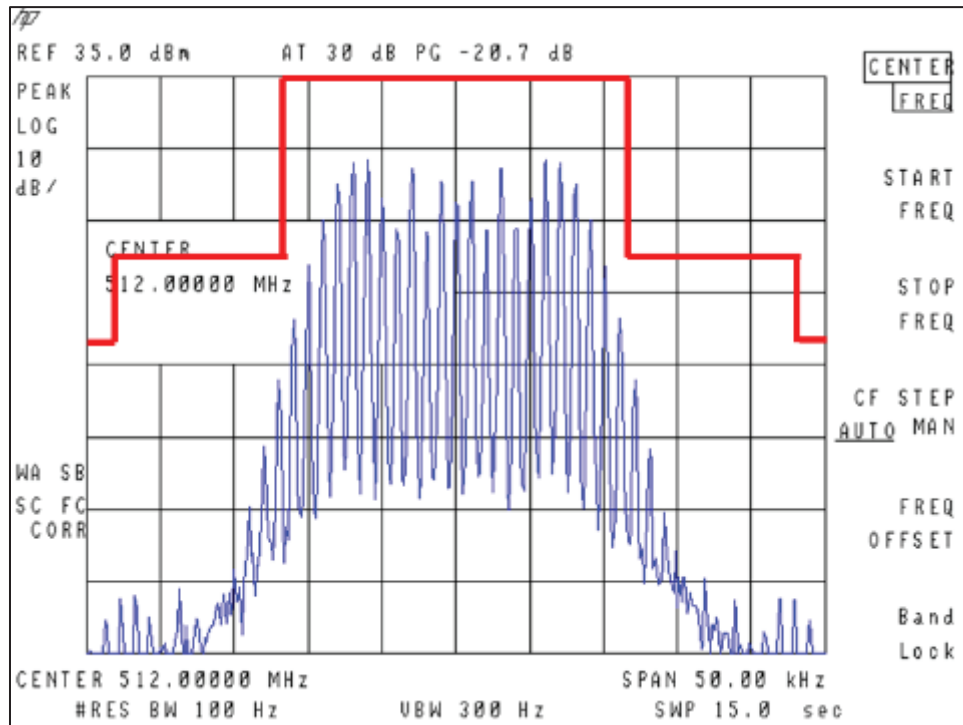


Figure 73. 512 MHz @ 25 kHz, Mask B

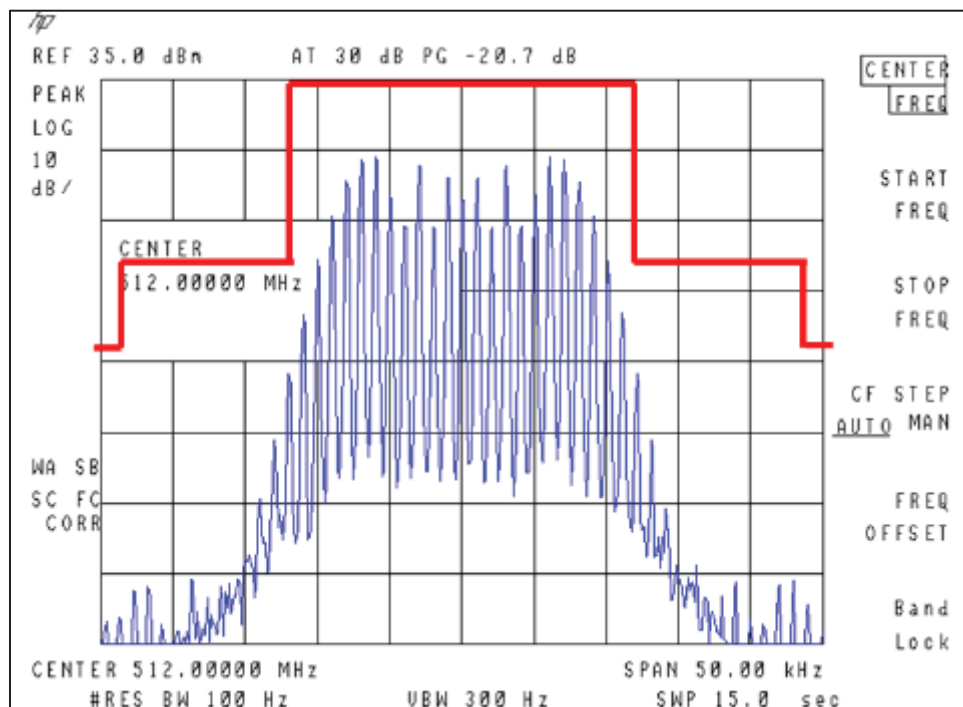


Figure 74. 512 MHz @ 25 kHz + 3.0, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

2.11.3 700 MHz Channels

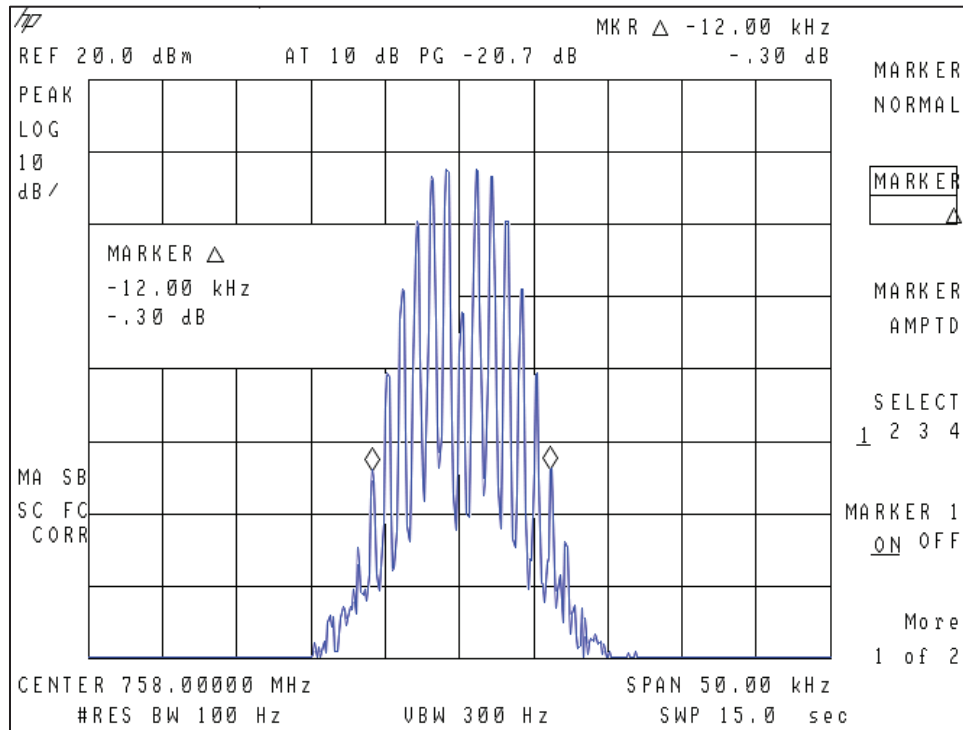


Figure 75. Input 758 MHz @ 12.5 kHz

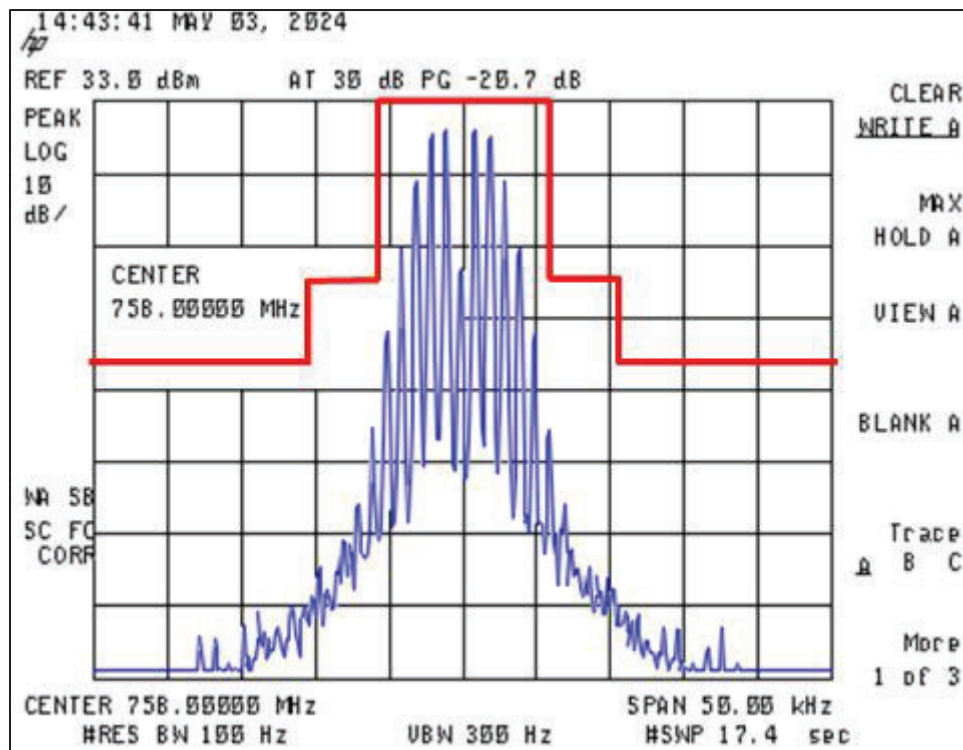


Figure 76. 758 MHz @ 12.5 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

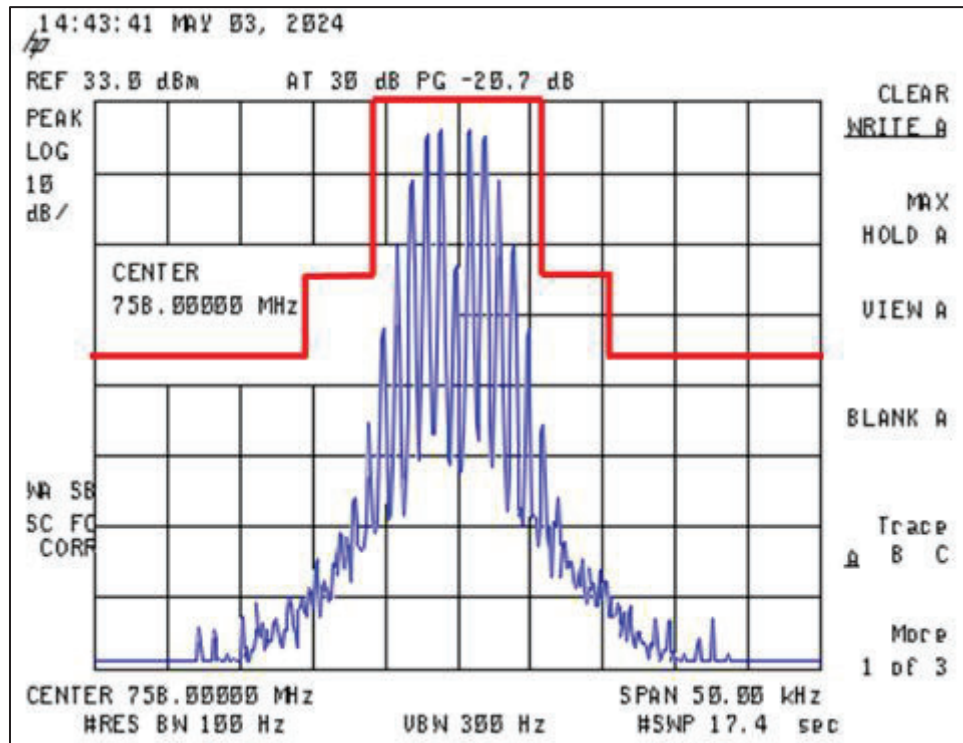


Figure 77. 758 MHz @ 12.5 kHz +3 dB, Mask B

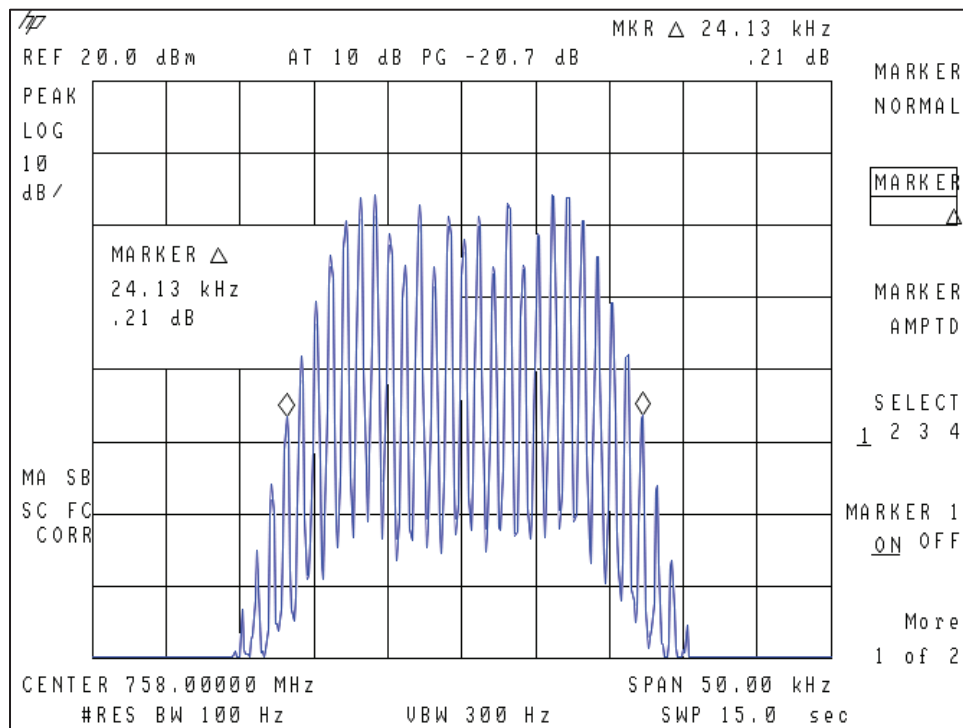


Figure 78. Input 758 MHz @ 25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

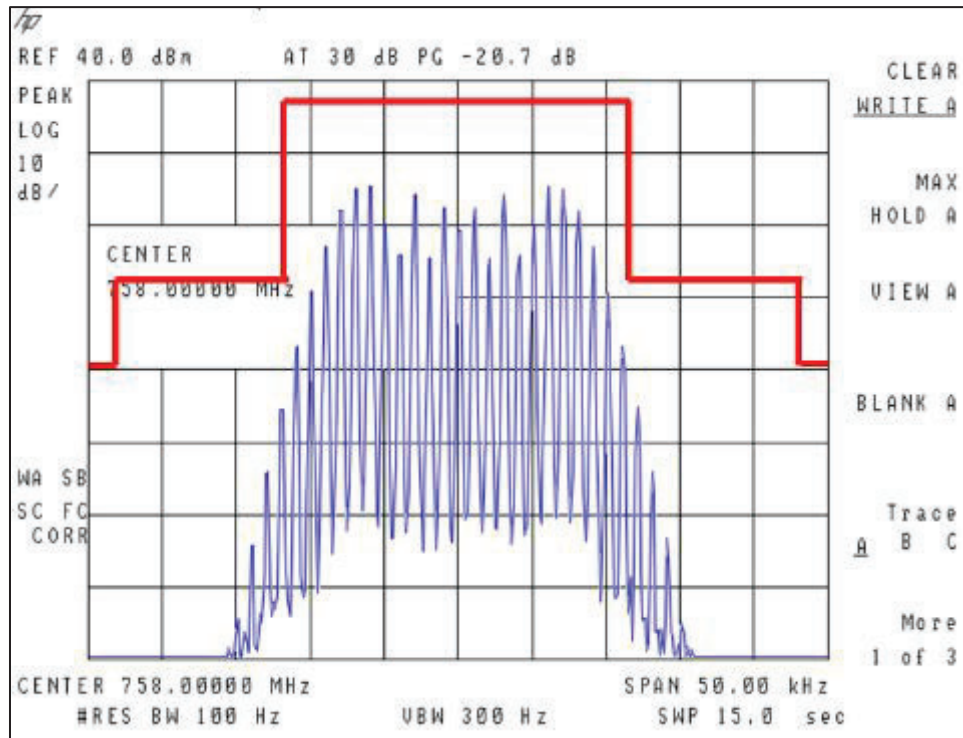


Figure 79. 758 MHz @ 25 kHz, Mask B

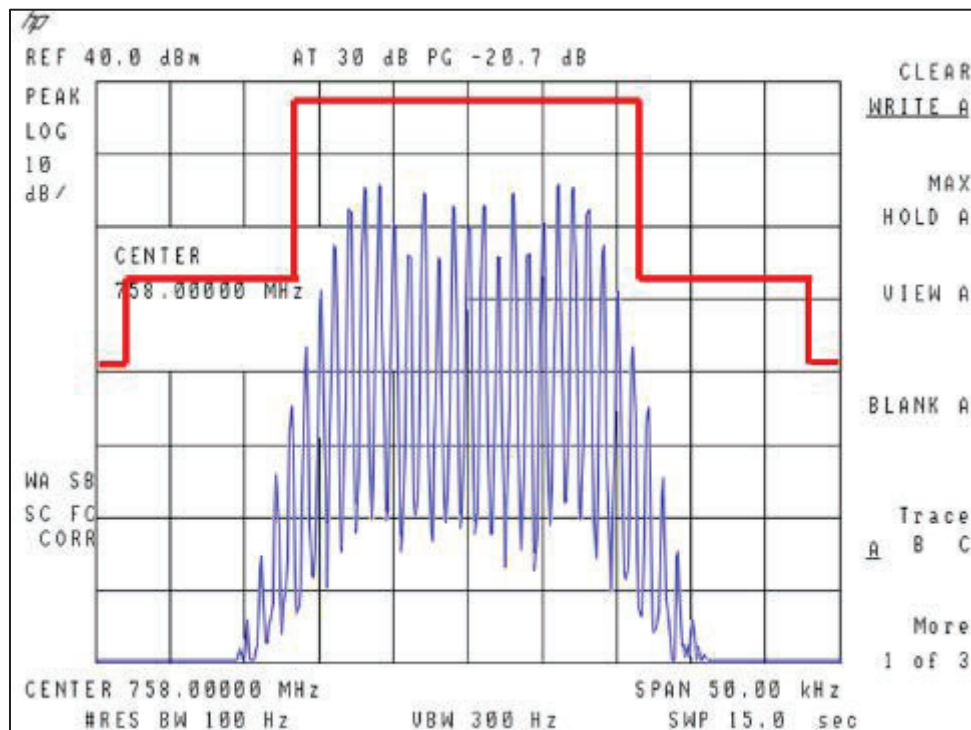


Figure 80. 758 MHz @ 25 kHz + 3 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

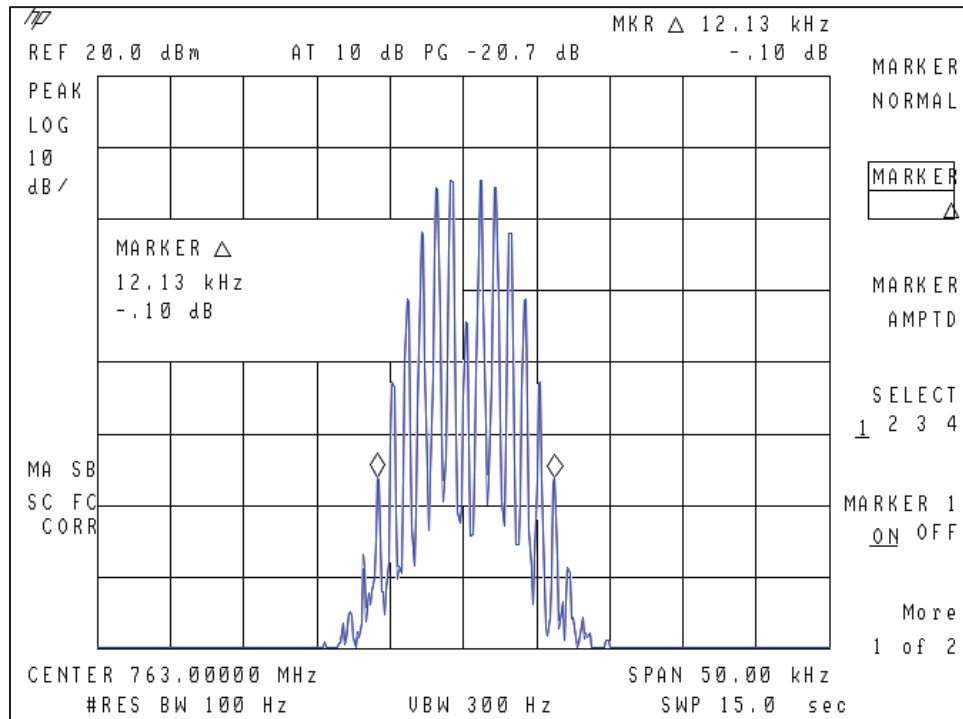


Figure 81. Input 763 MHz @ 12.5 kHz

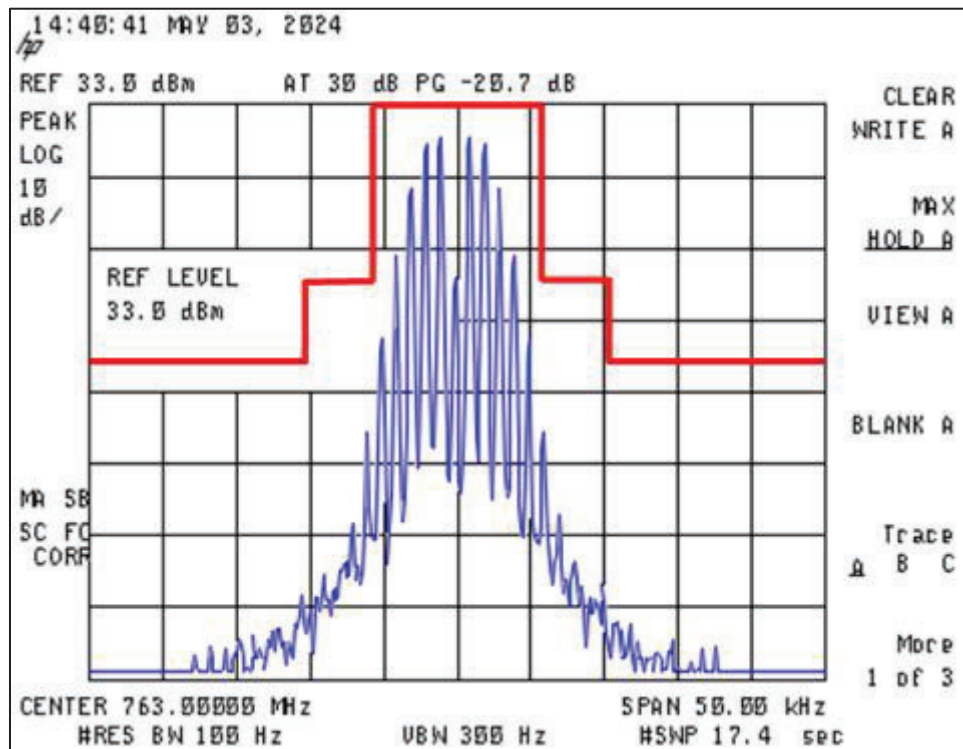


Figure 82. 763 MHz @ 12.5 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

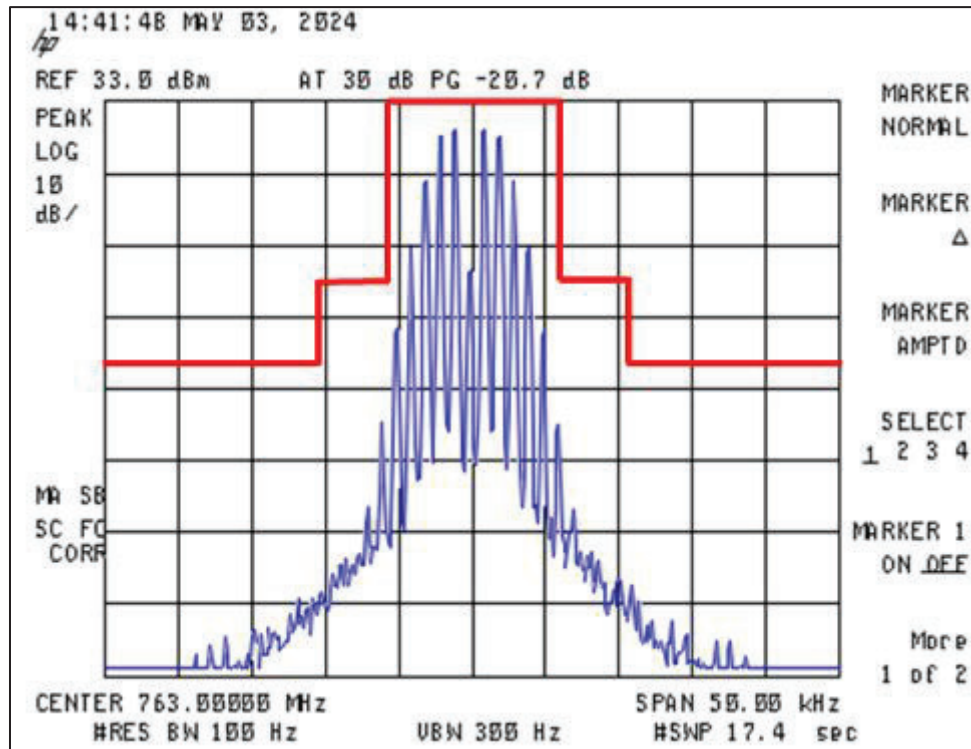


Figure 83. 763 MHz @ 12.5 kHz +3.0 dB, Mask B

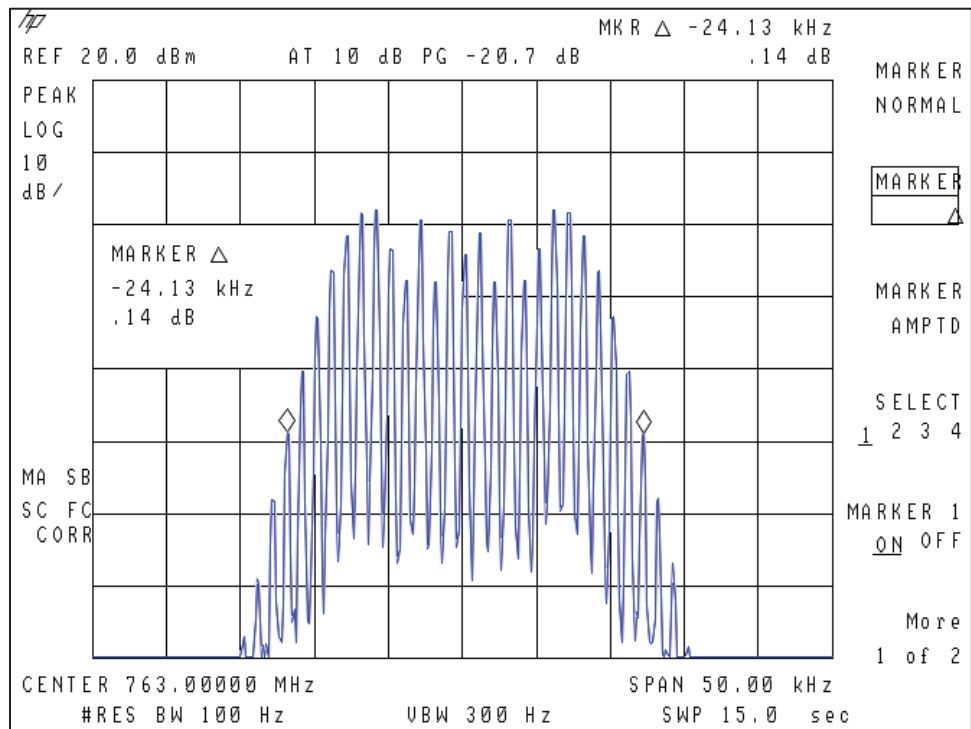


Figure 84. Input 763 MHz @ 25 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

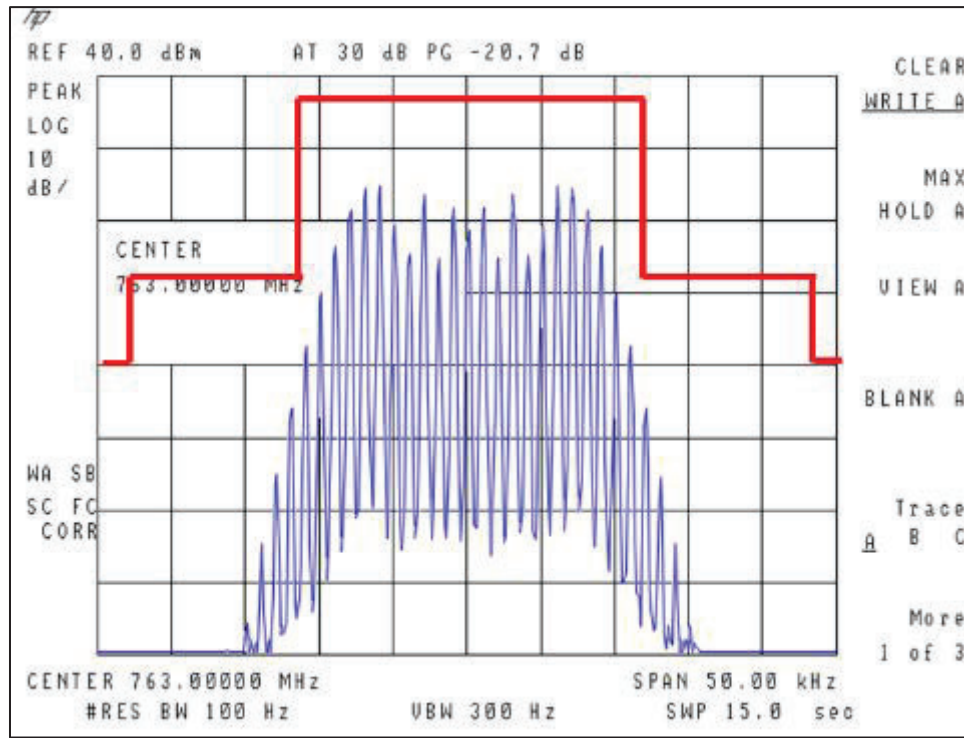


Figure 85. 763 MHz @ 25 kHz, Mask B

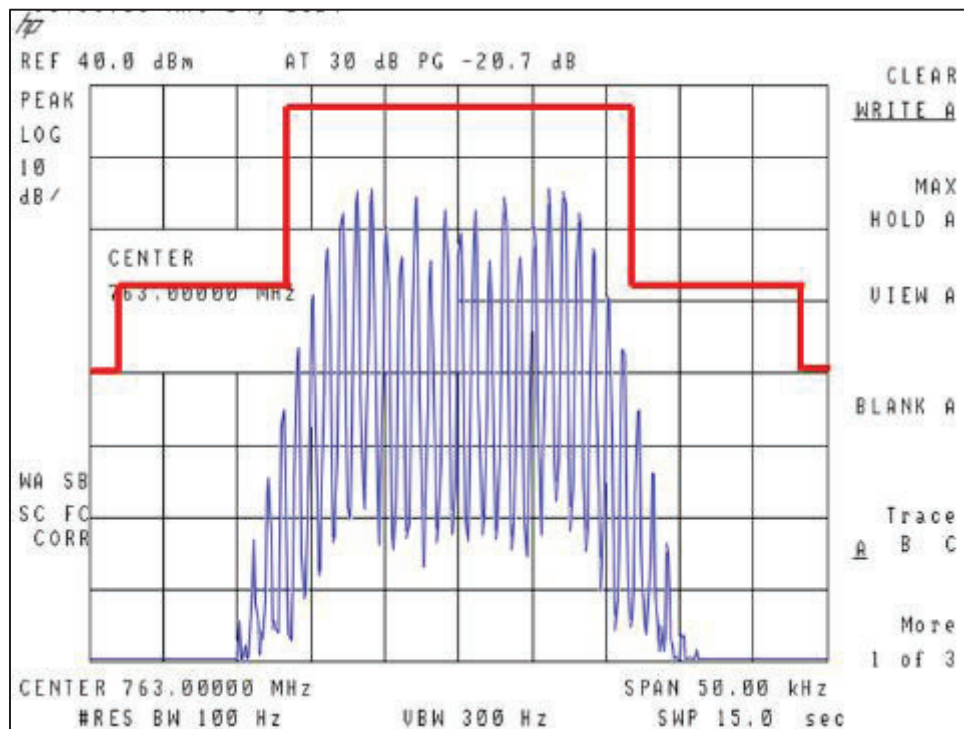


Figure 86. 763 MHz @ 25 kHz +3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

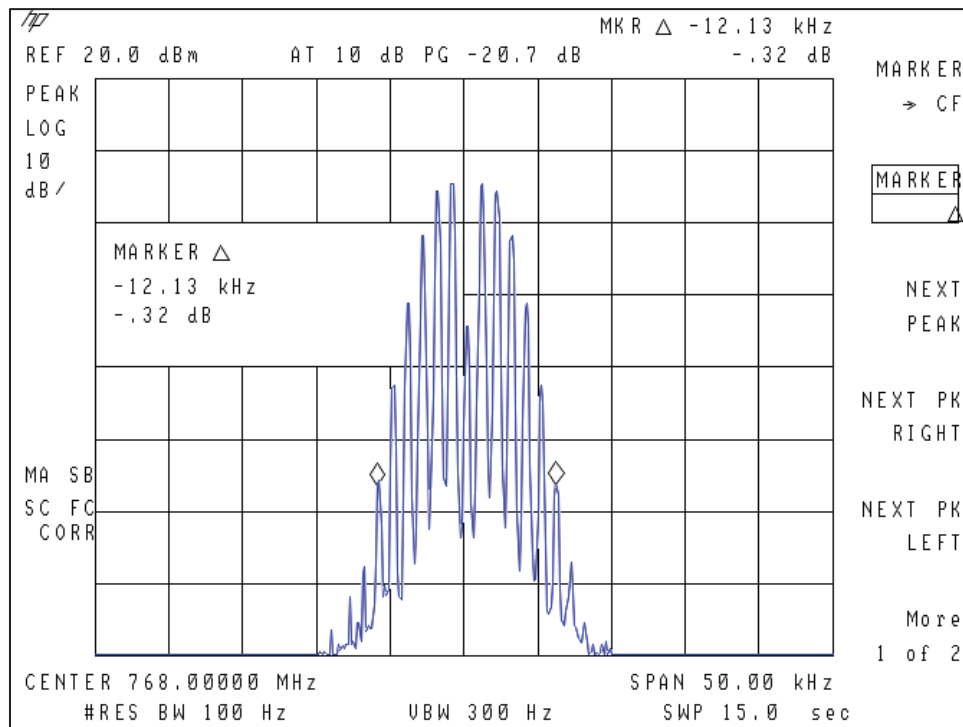


Figure 87. Input 768 MHz @ 12.5 kHz

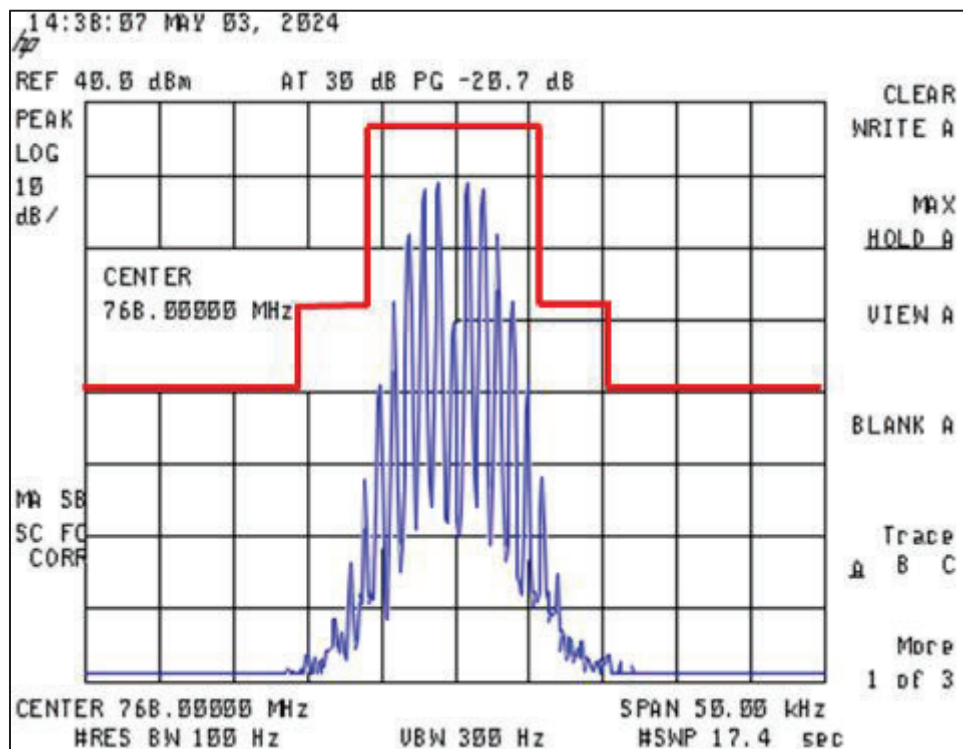


Figure 88. 768 MHz @ 12.5 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

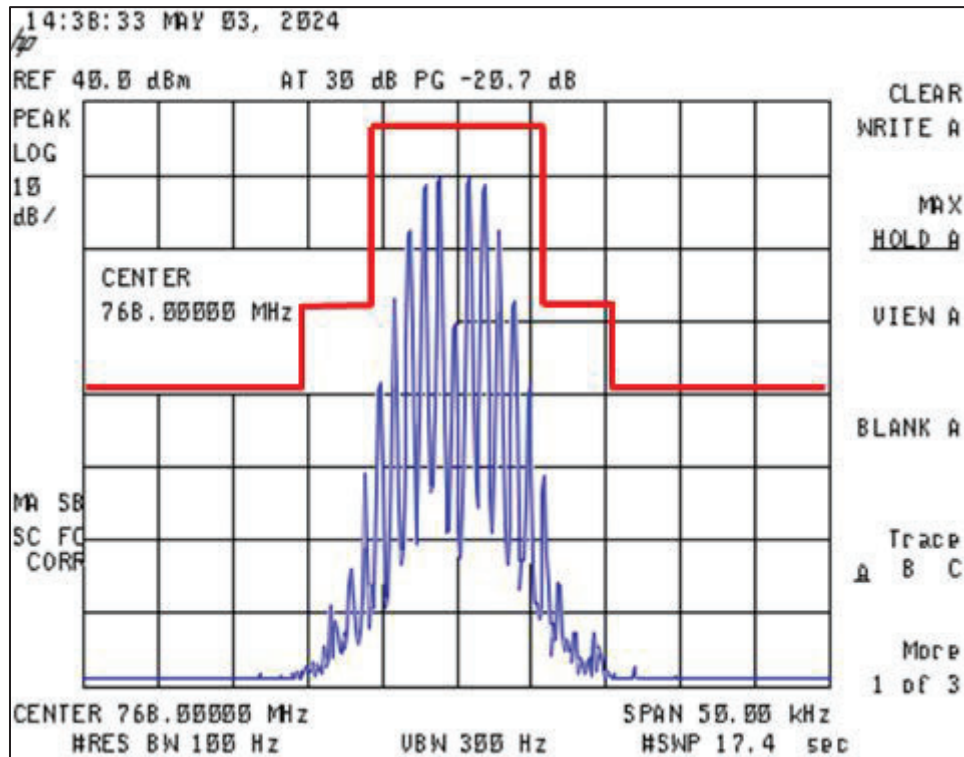


Figure 89. 768 MHz @ 12.5 kHz +3.0 dB, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

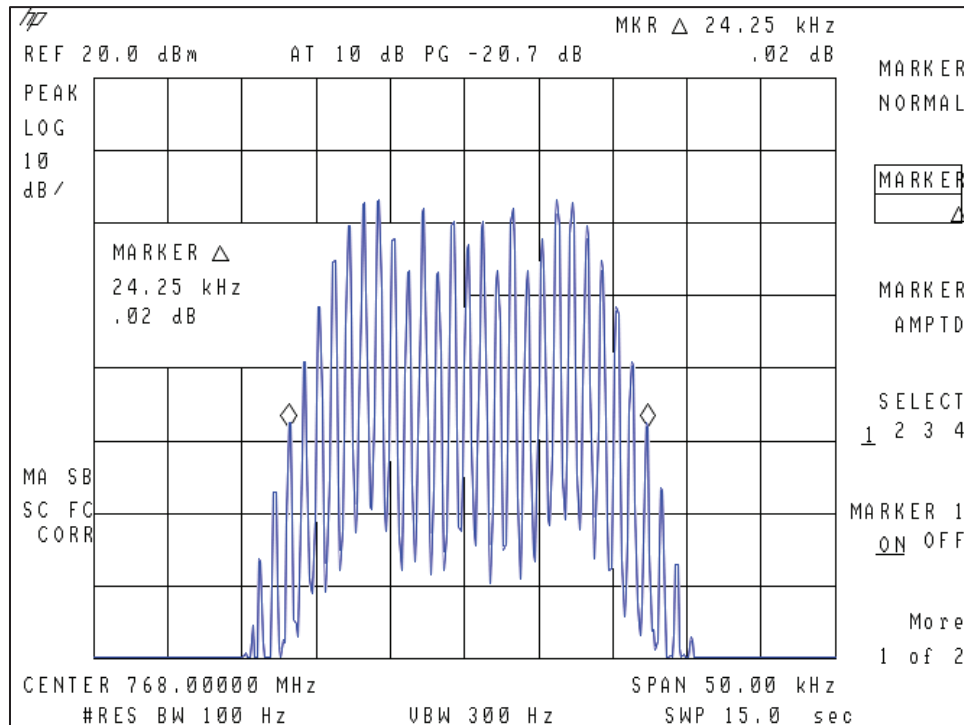


Figure 90. Input 768 MHz @ 25 kHz

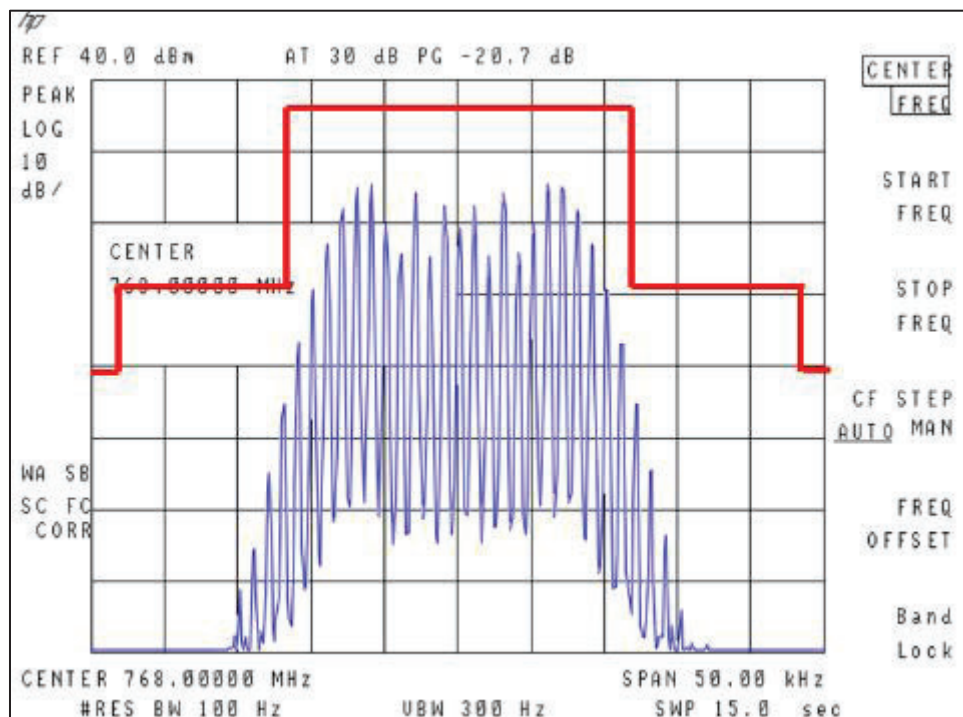


Figure 91. 768 MHz @ 25 kHz, Mask B

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

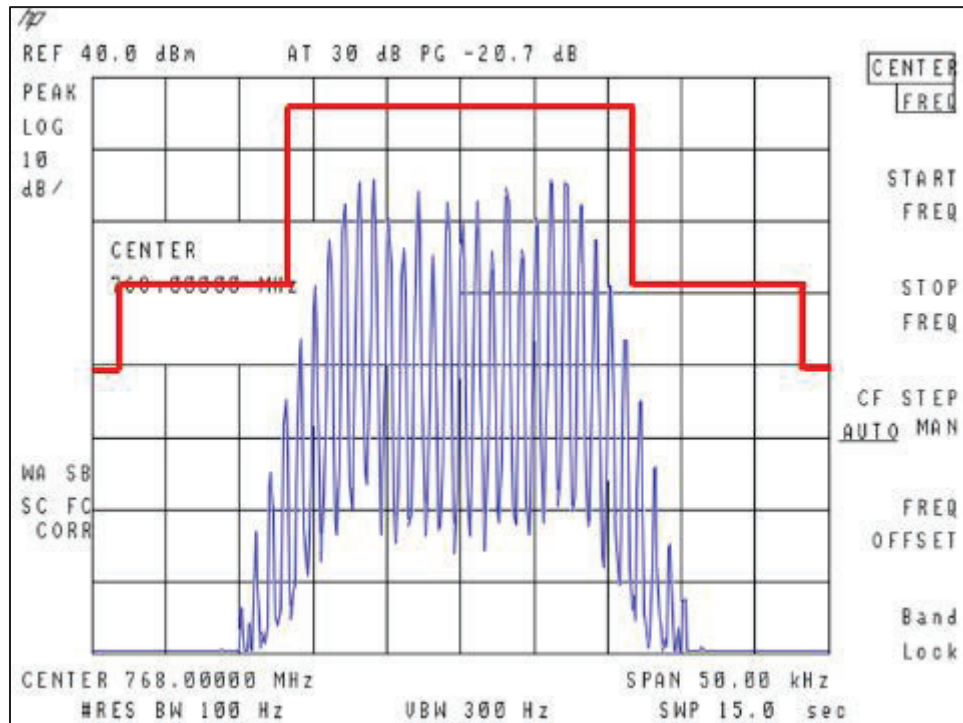


Figure 92. 768 MHz @ 25 kHz +3.0 dB, Mask B

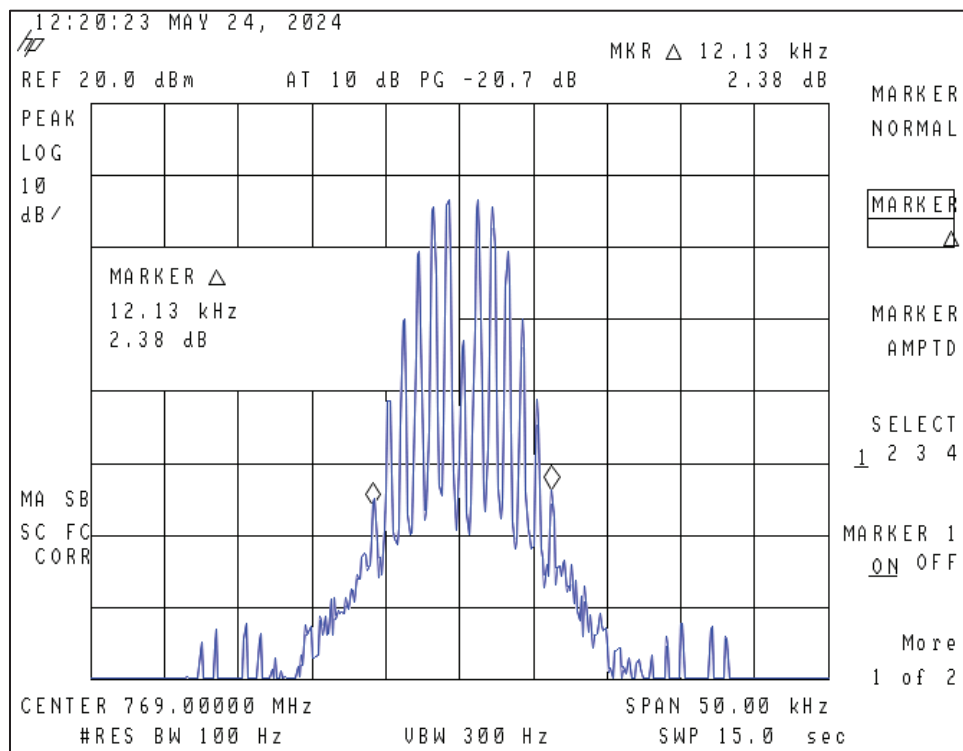


Figure 93. Input 769 MHz @ 12.5 kHz

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

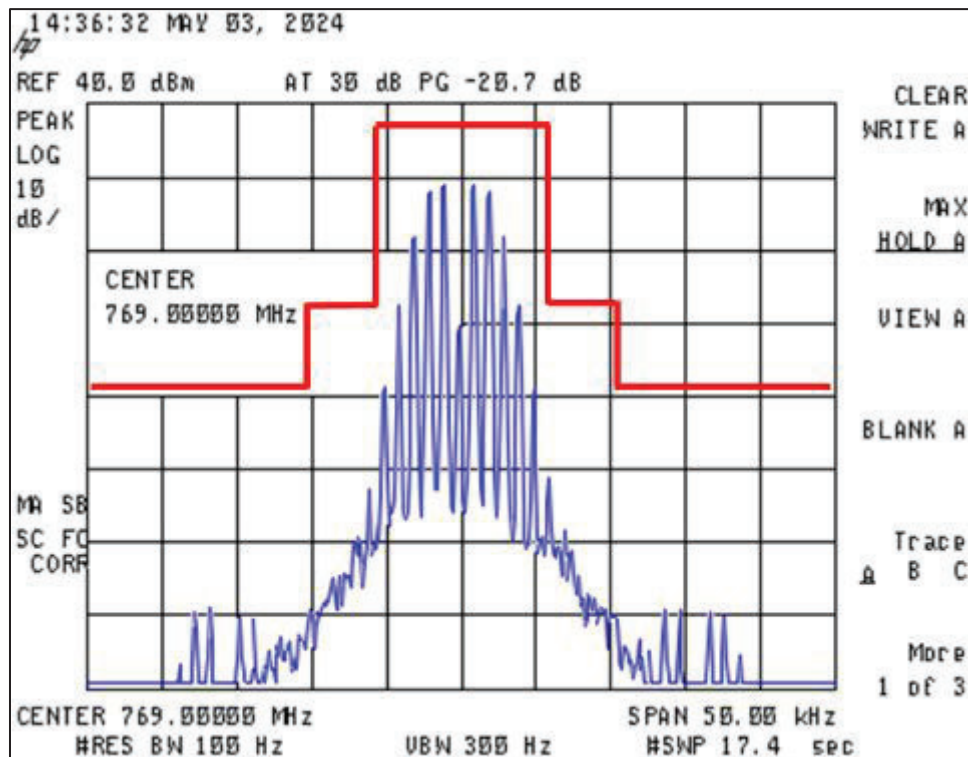


Figure 94. 769 MHz @ 12.5 kHz, Mask B



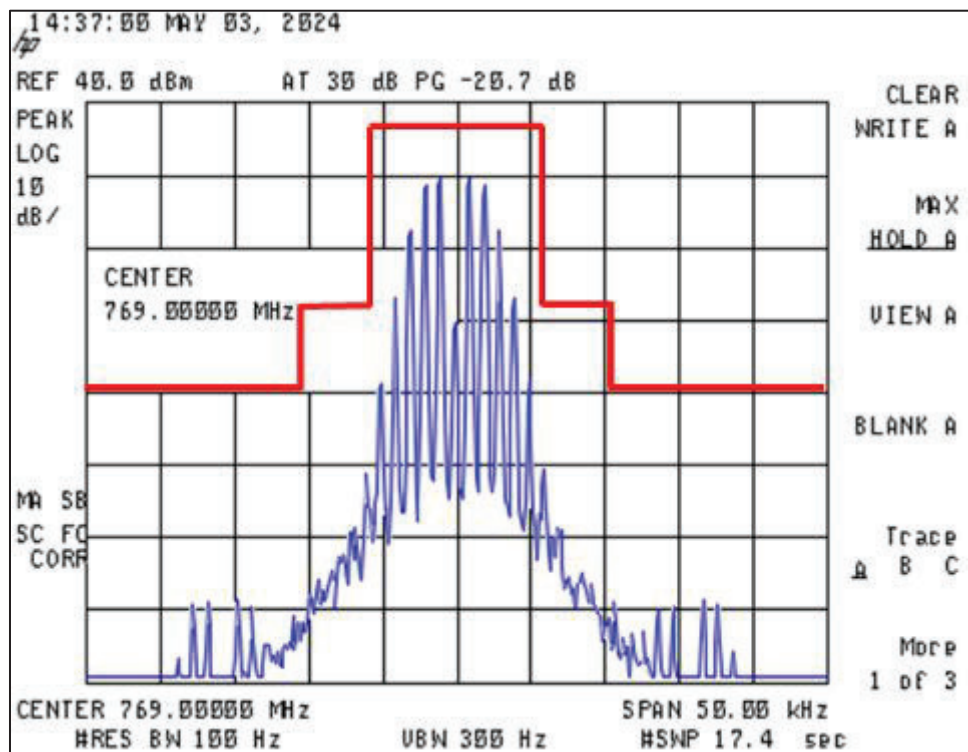


Figure 95. 769 MHz @ 12.5 kHz +3.0 dB, Mask B

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Corn Wireless
SAFE-0002

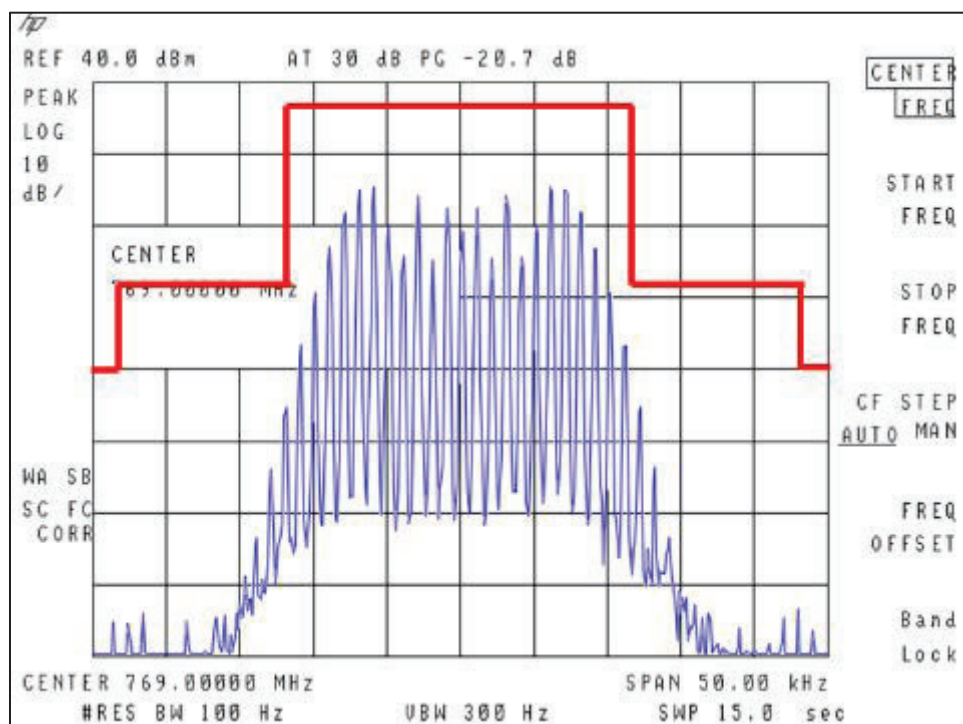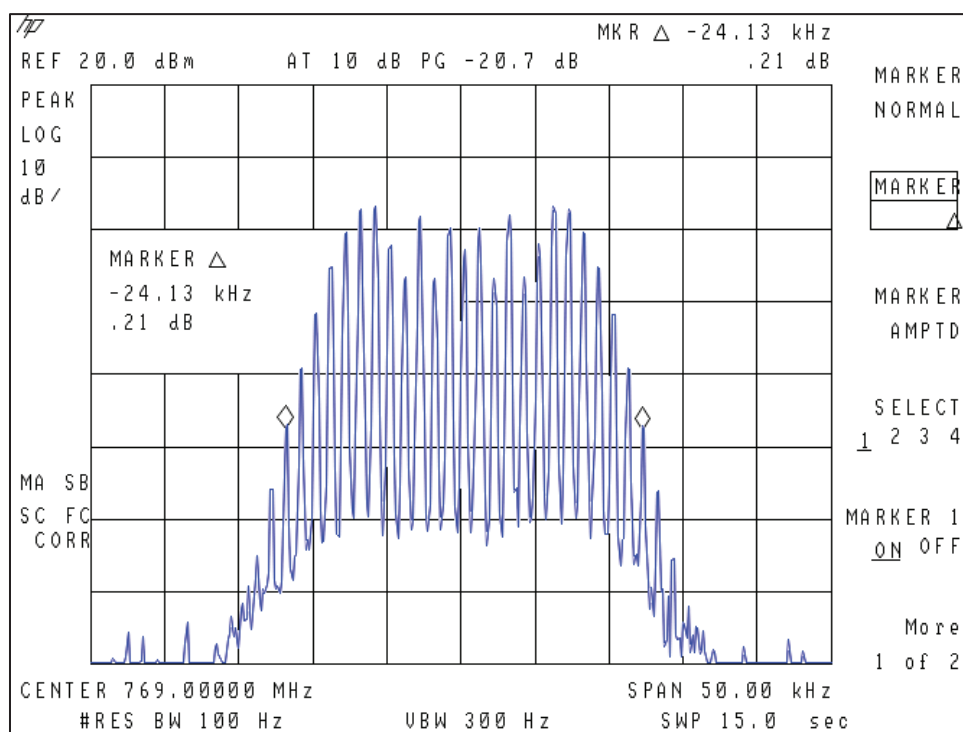

U.S. Tech Test Report:
FCC ID:
IC:
Report Number:
Issue Date:
Customer:
Model:

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

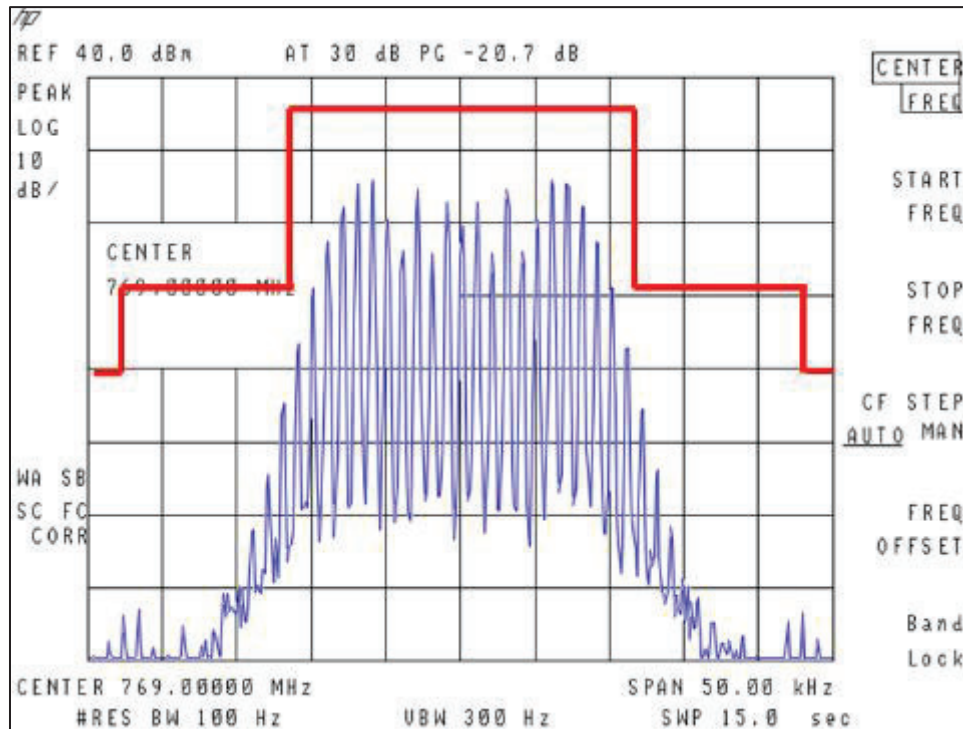


Figure 98. 769 MHz @ 25 kHz +3.0 dB, Mask B

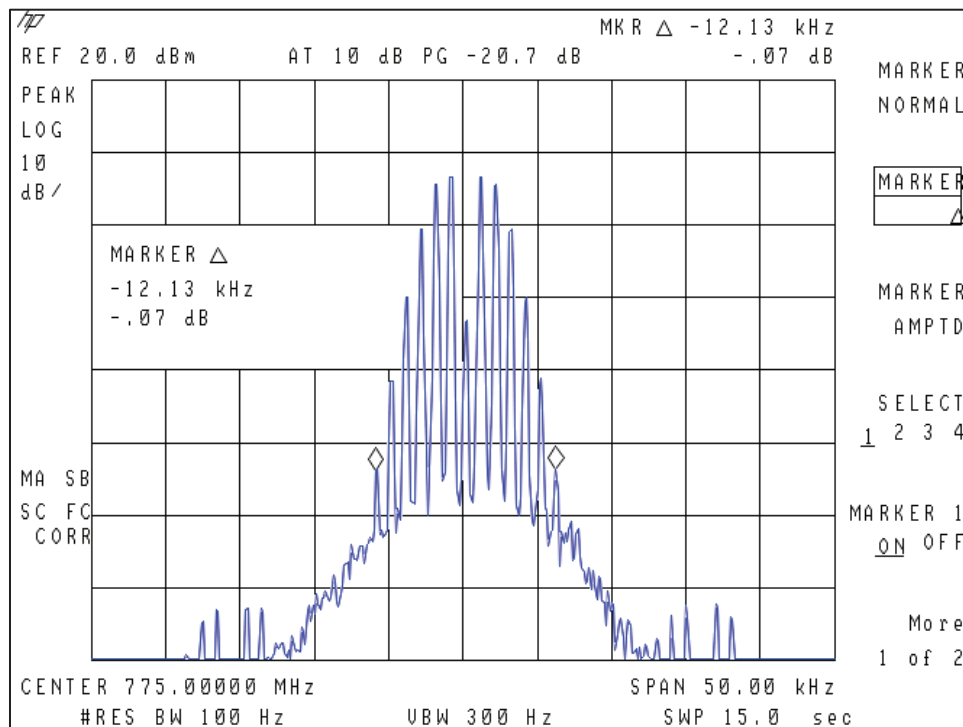


Figure 99. Input 775 MHz @ 12.5 kHz

FCC Part 90 Certification
2AKSM-SAFE4
22303-SAFE4
24-0123
August 1, 2024
Safe-Com Wireless
SAFE-0002

