





**Conducted Spurious Emission**


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	Reference	5.12	5.12	---	PASS
			30~1000	5.12	-78.97	$\leq$ -14.88	PASS
			1000~26500	5.12	-50.7	$\leq$ -14.88	PASS
		2441	Reference	4.87	4.87	---	PASS
			30~1000	4.87	-77.89	$\leq$ -15.13	PASS
			1000~26500	4.87	-50.41	$\leq$ -15.13	PASS
		2480	Reference	5.72	5.72	---	PASS
			30~1000	5.72	-77.49	$\leq$ -14.28	PASS
			1000~26500	5.72	-48.91	$\leq$ -14.28	PASS
2DH5	Ant1	2402	Reference	-1.20	-1.20	---	PASS
			30~1000	-1.20	-77.65	$\leq$ -21.2	PASS
			1000~26500	-1.20	-50.88	$\leq$ -21.2	PASS
		2441	Reference	-0.39	-0.39	---	PASS
			30~1000	-0.39	-77.27	$\leq$ -20.39	PASS
			1000~26500	-0.39	-50.33	$\leq$ -20.39	PASS
		2480	Reference	0.35	0.35	---	PASS
			30~1000	0.35	-78.17	$\leq$ -19.65	PASS
			1000~26500	0.35	-50.93	$\leq$ -19.65	PASS
3DH5	Ant1	2402	Reference	2.83	2.83	---	PASS
			30~1000	2.83	-78.09	$\leq$ -17.17	PASS
			1000~26500	2.83	-43.1	$\leq$ -17.17	PASS
		2441	Reference	-0.09	-0.09	---	PASS
			30~1000	-0.09	-78.41	$\leq$ -20.09	PASS
			1000~26500	-0.09	-50.67	$\leq$ -20.09	PASS
		2480	Reference	3.04	3.04	---	PASS
			30~1000	3.04	-76.9	$\leq$ -16.96	PASS
			1000~26500	3.04	-50.95	$\leq$ -16.96	PASS

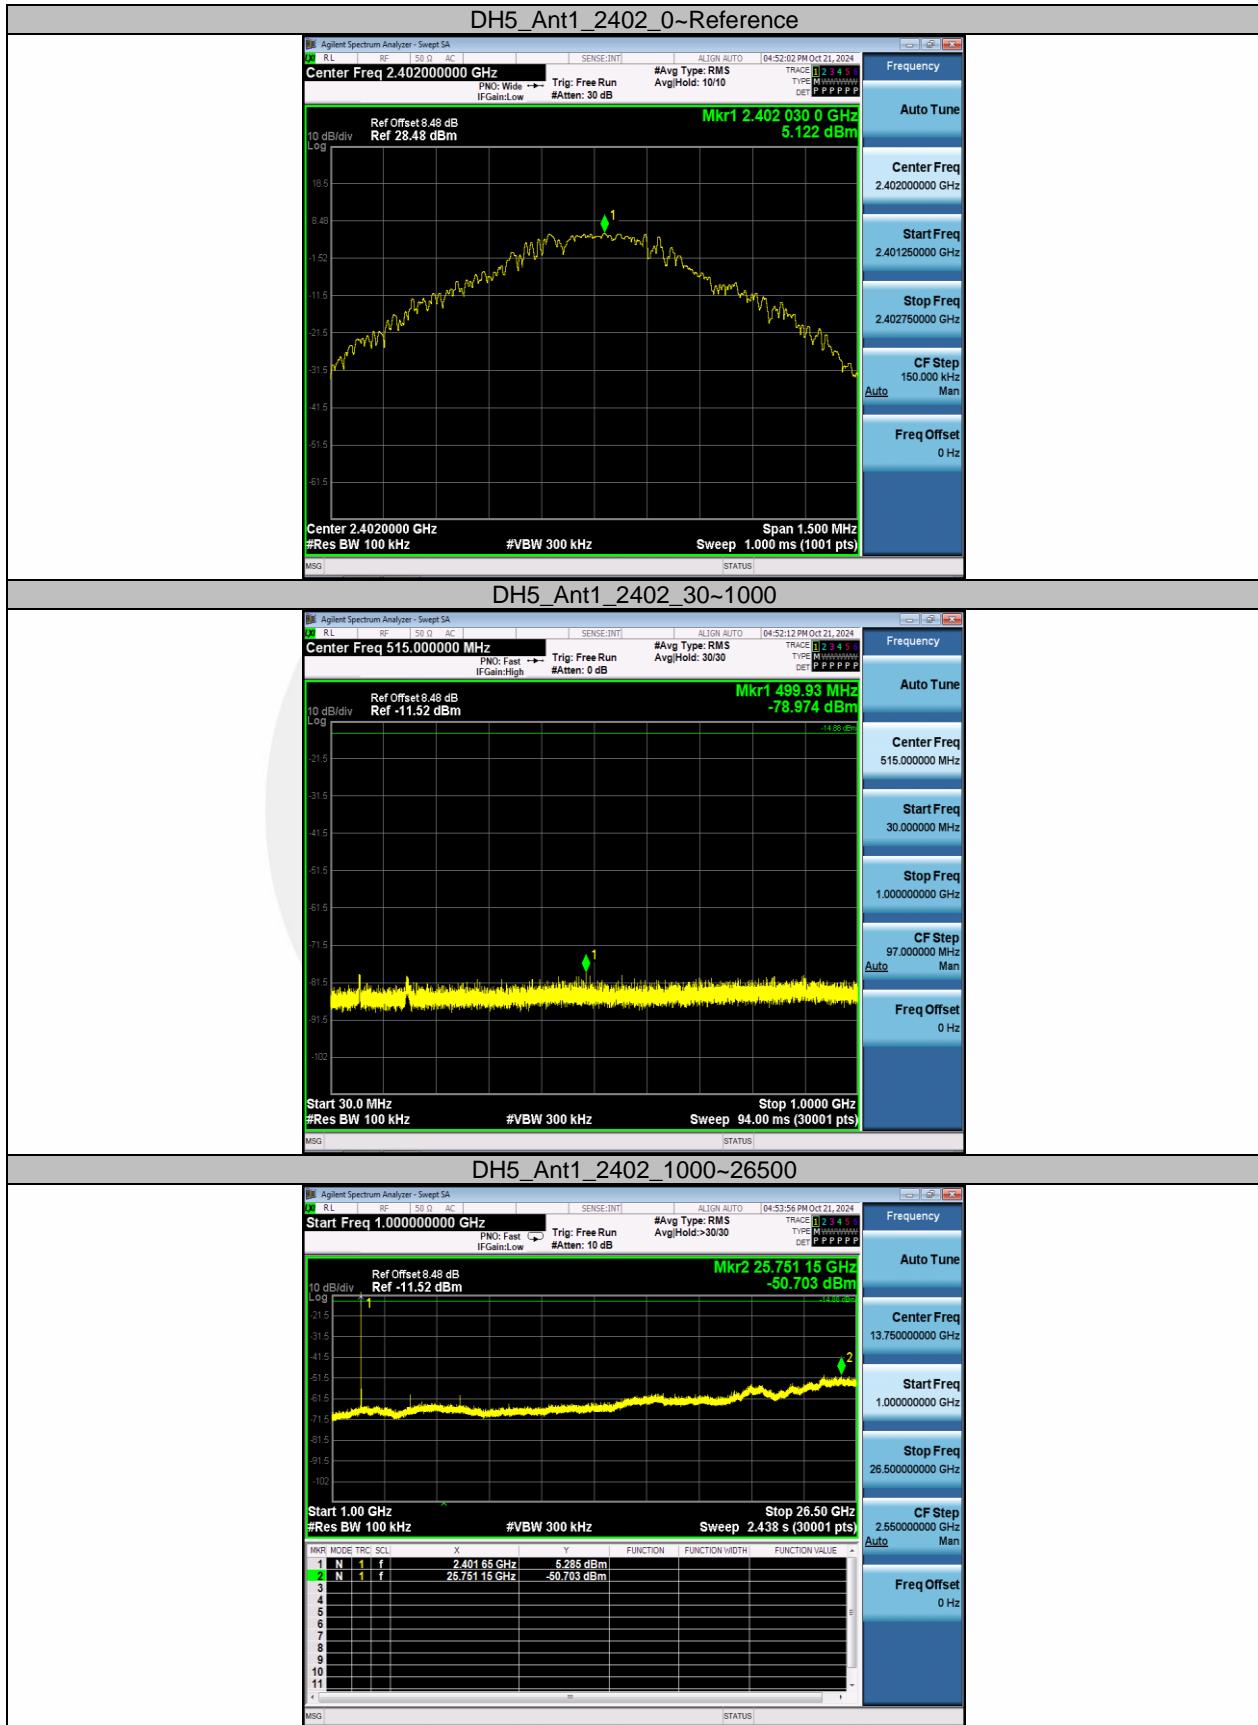


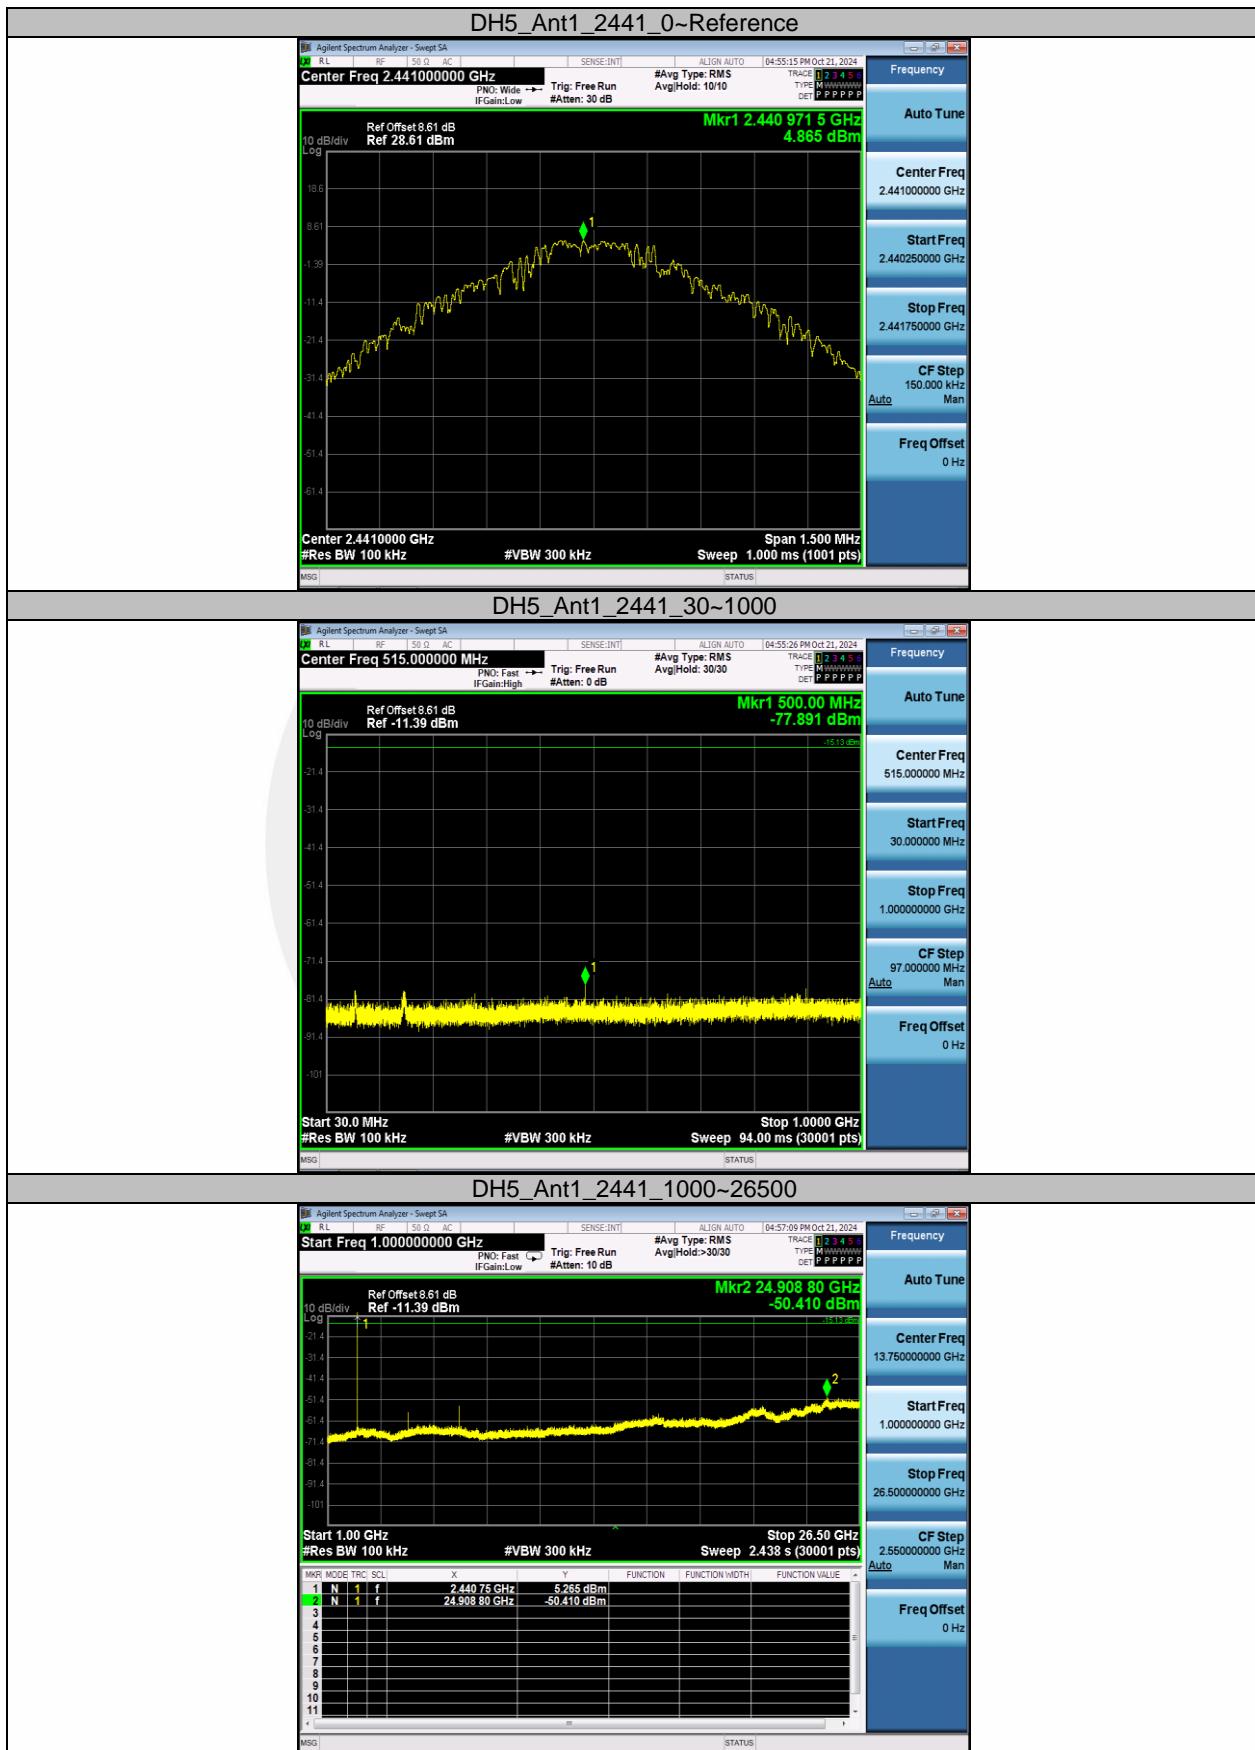


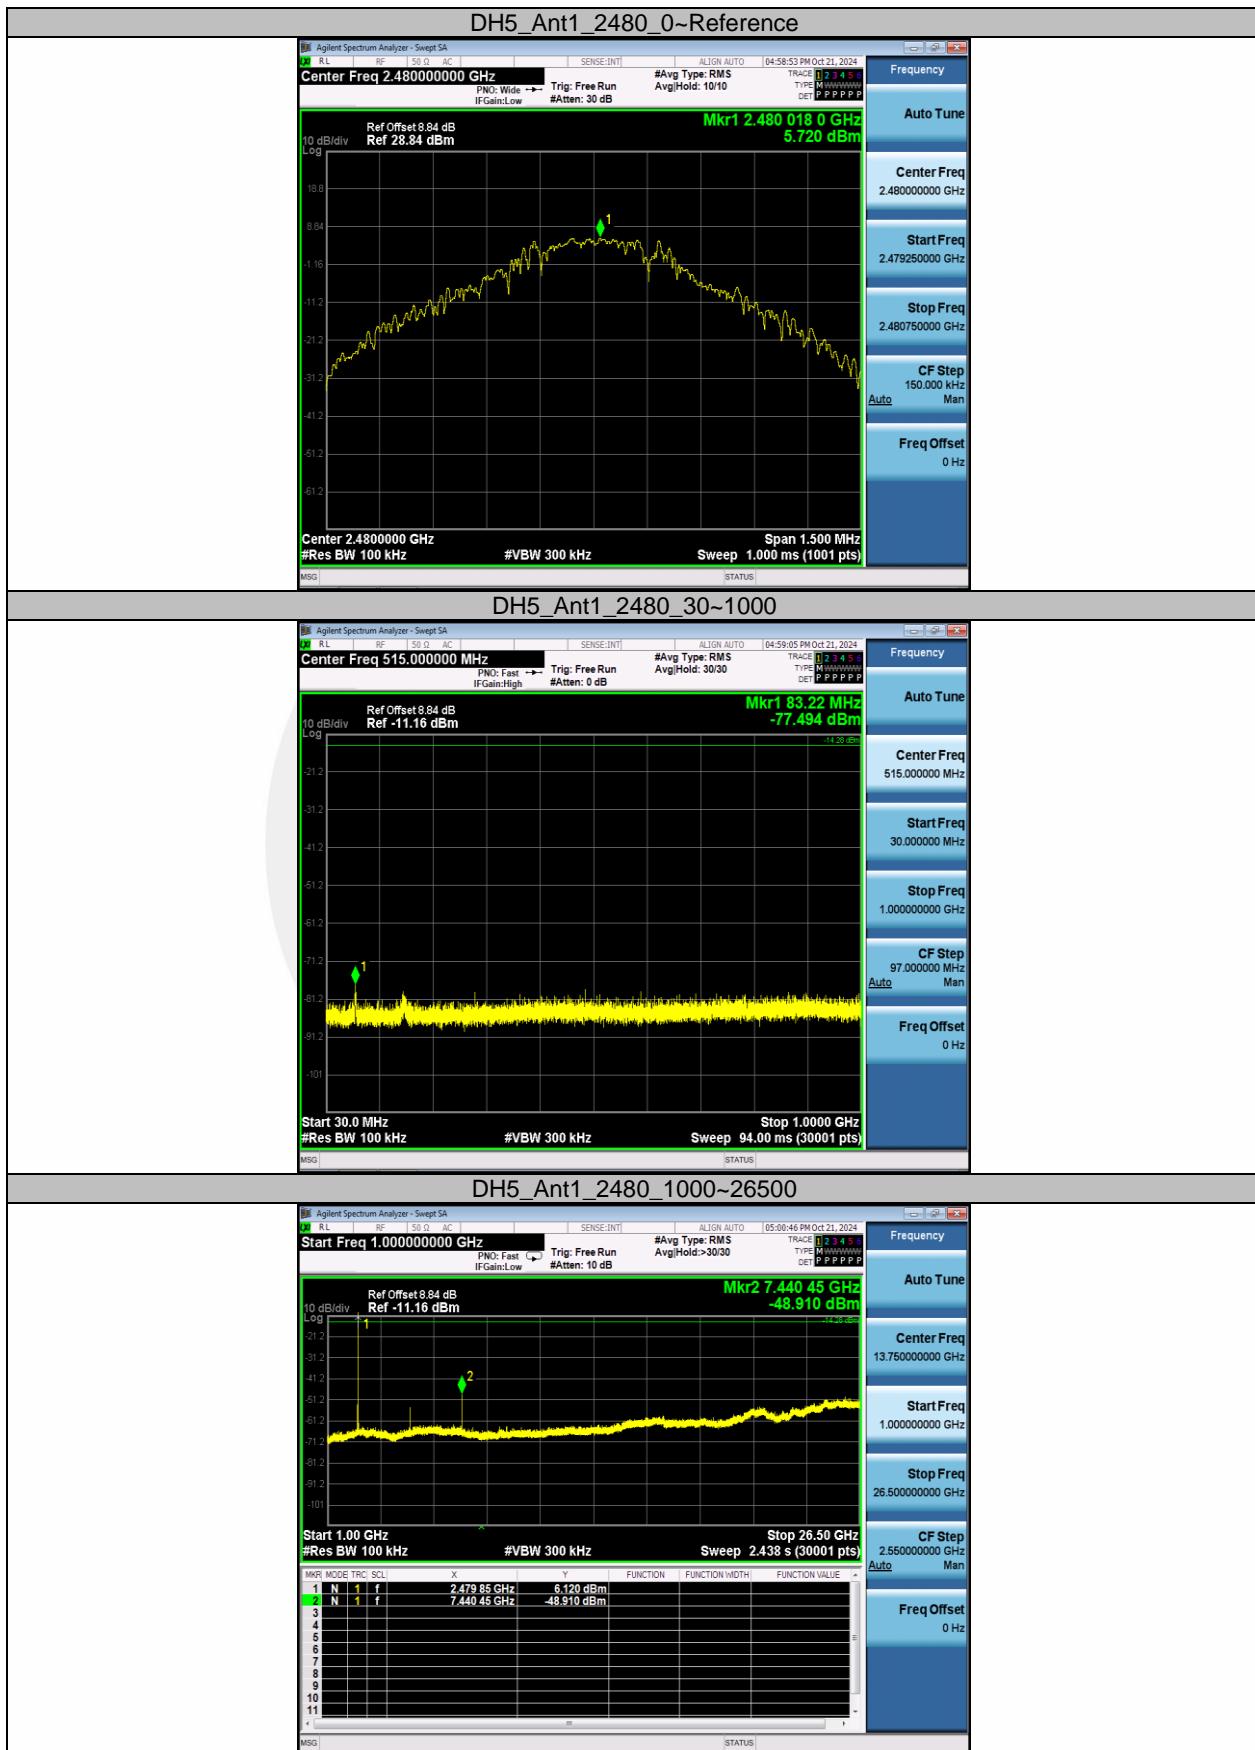


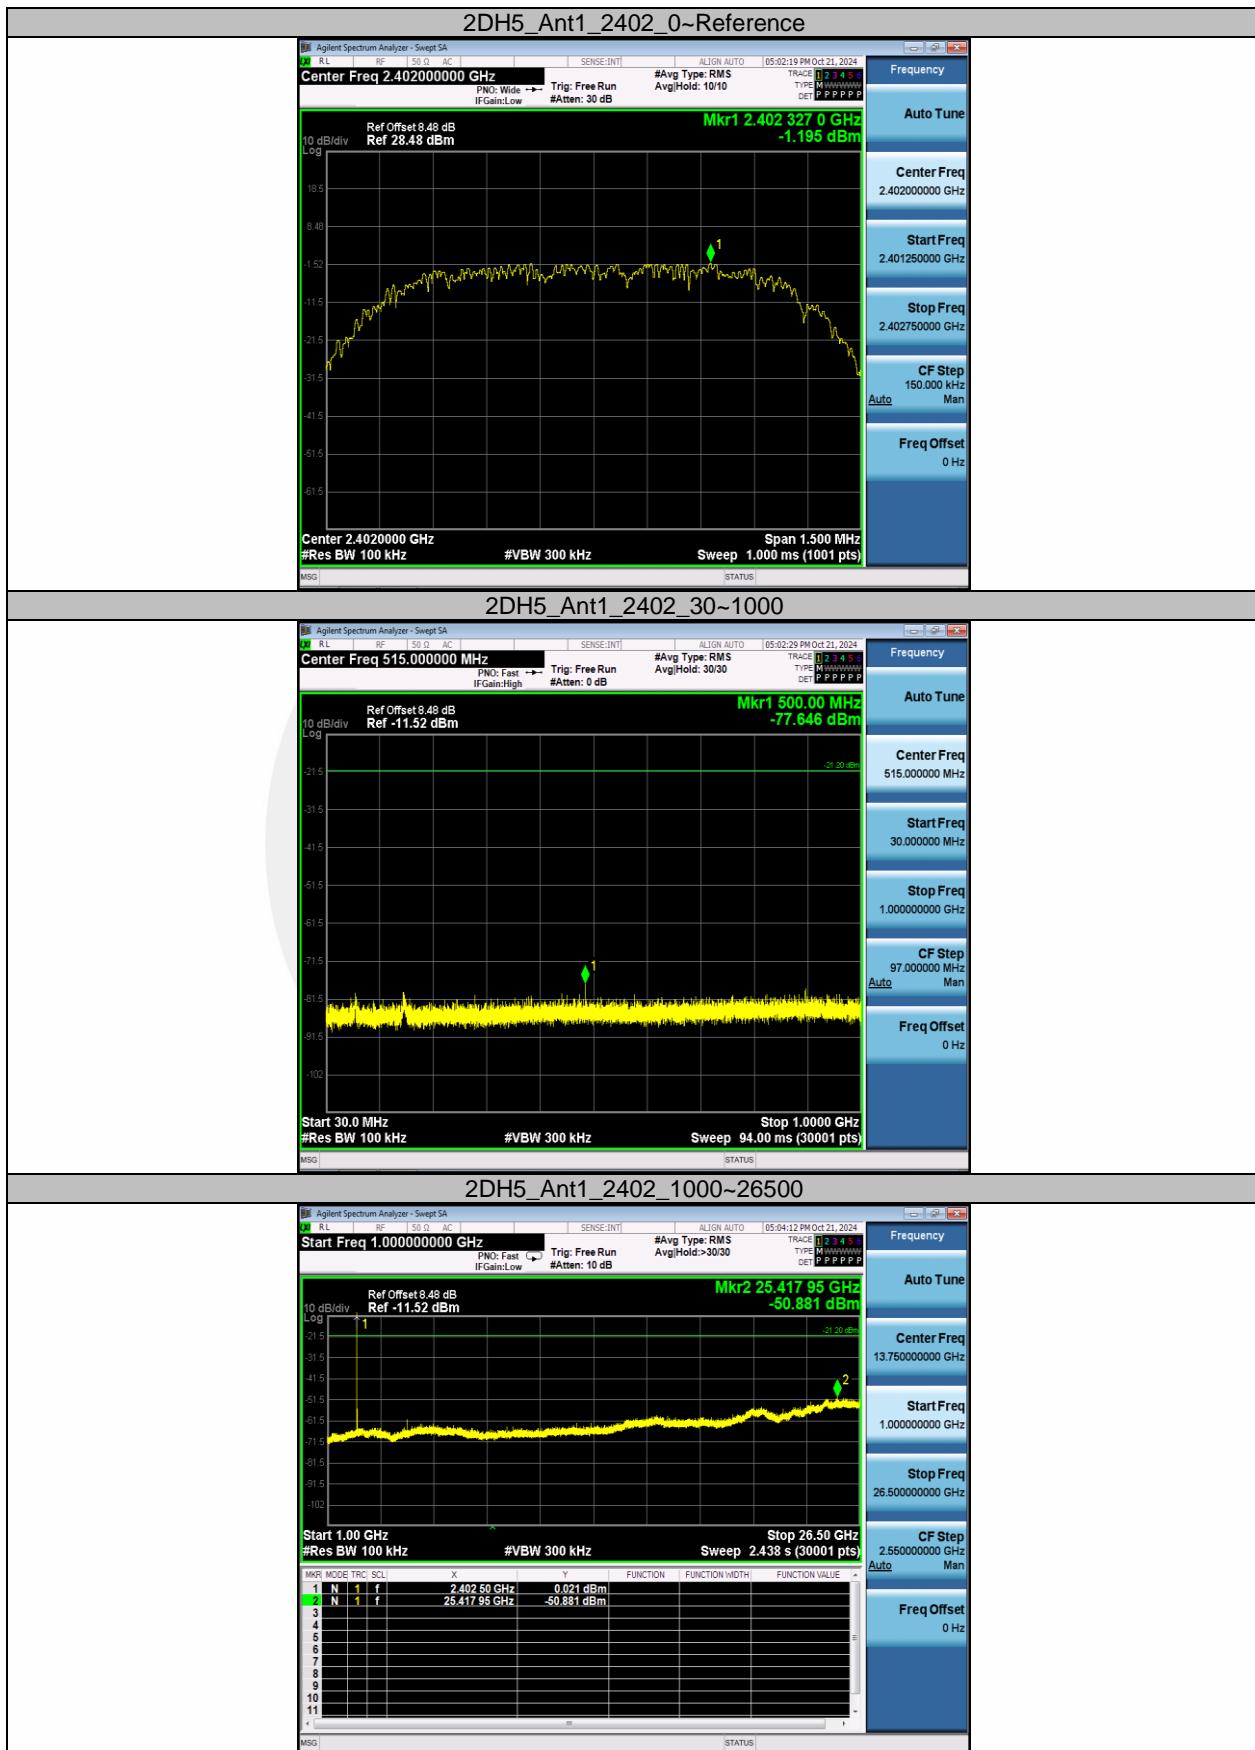


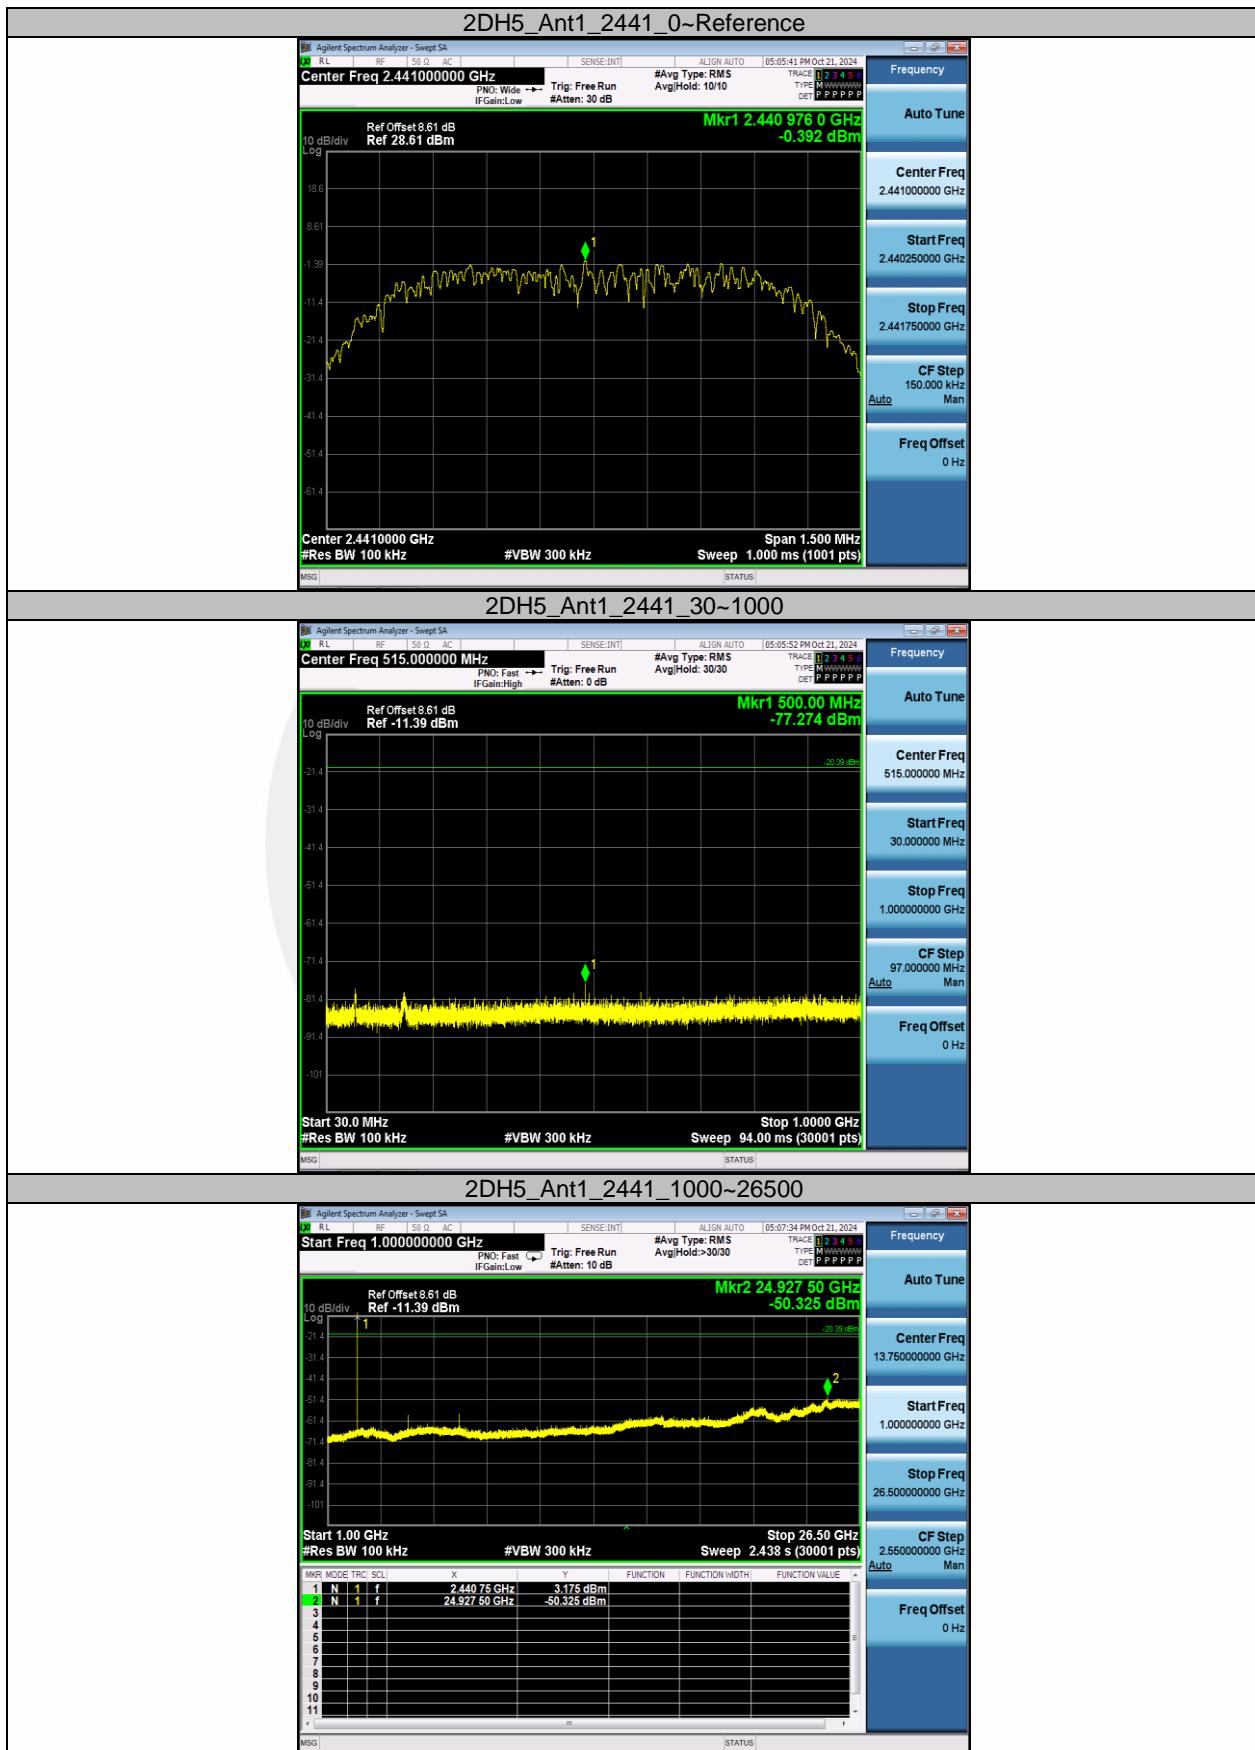

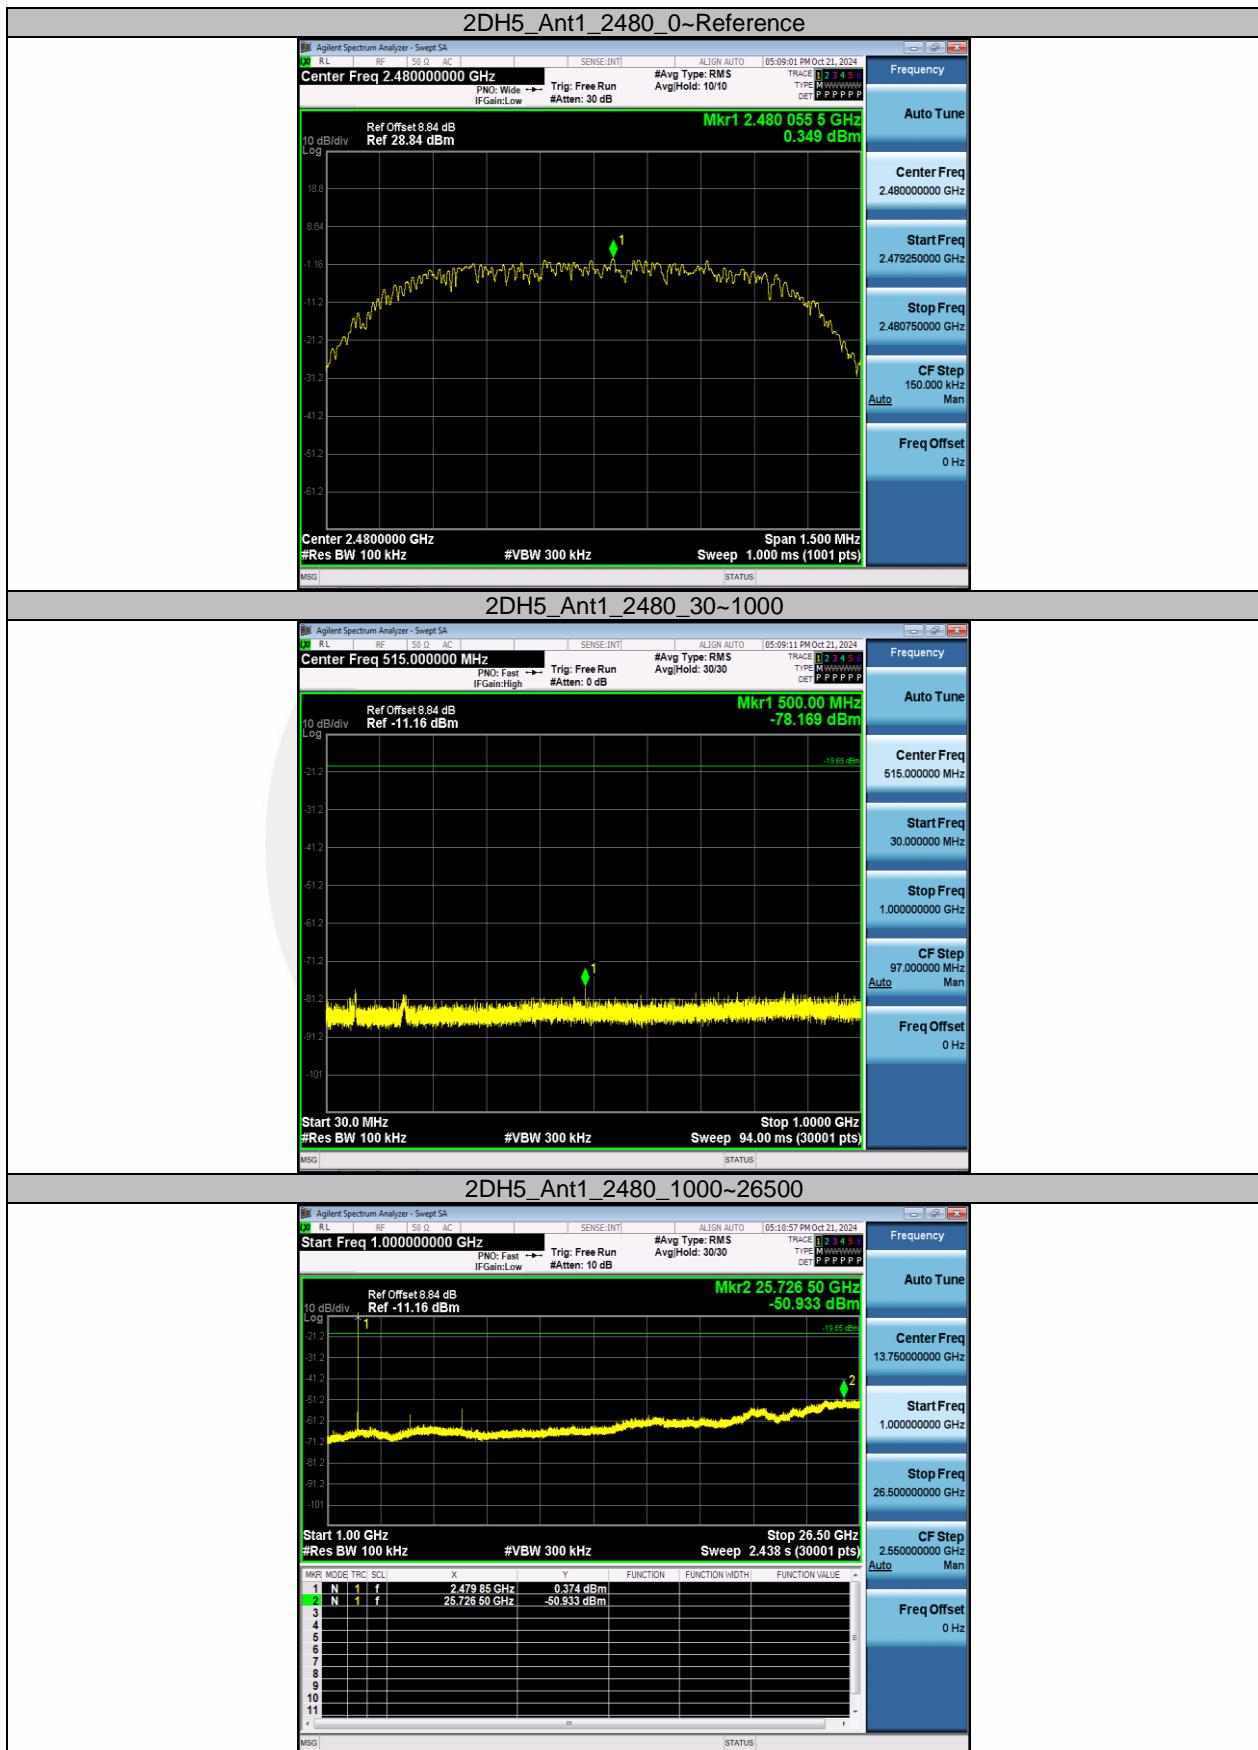

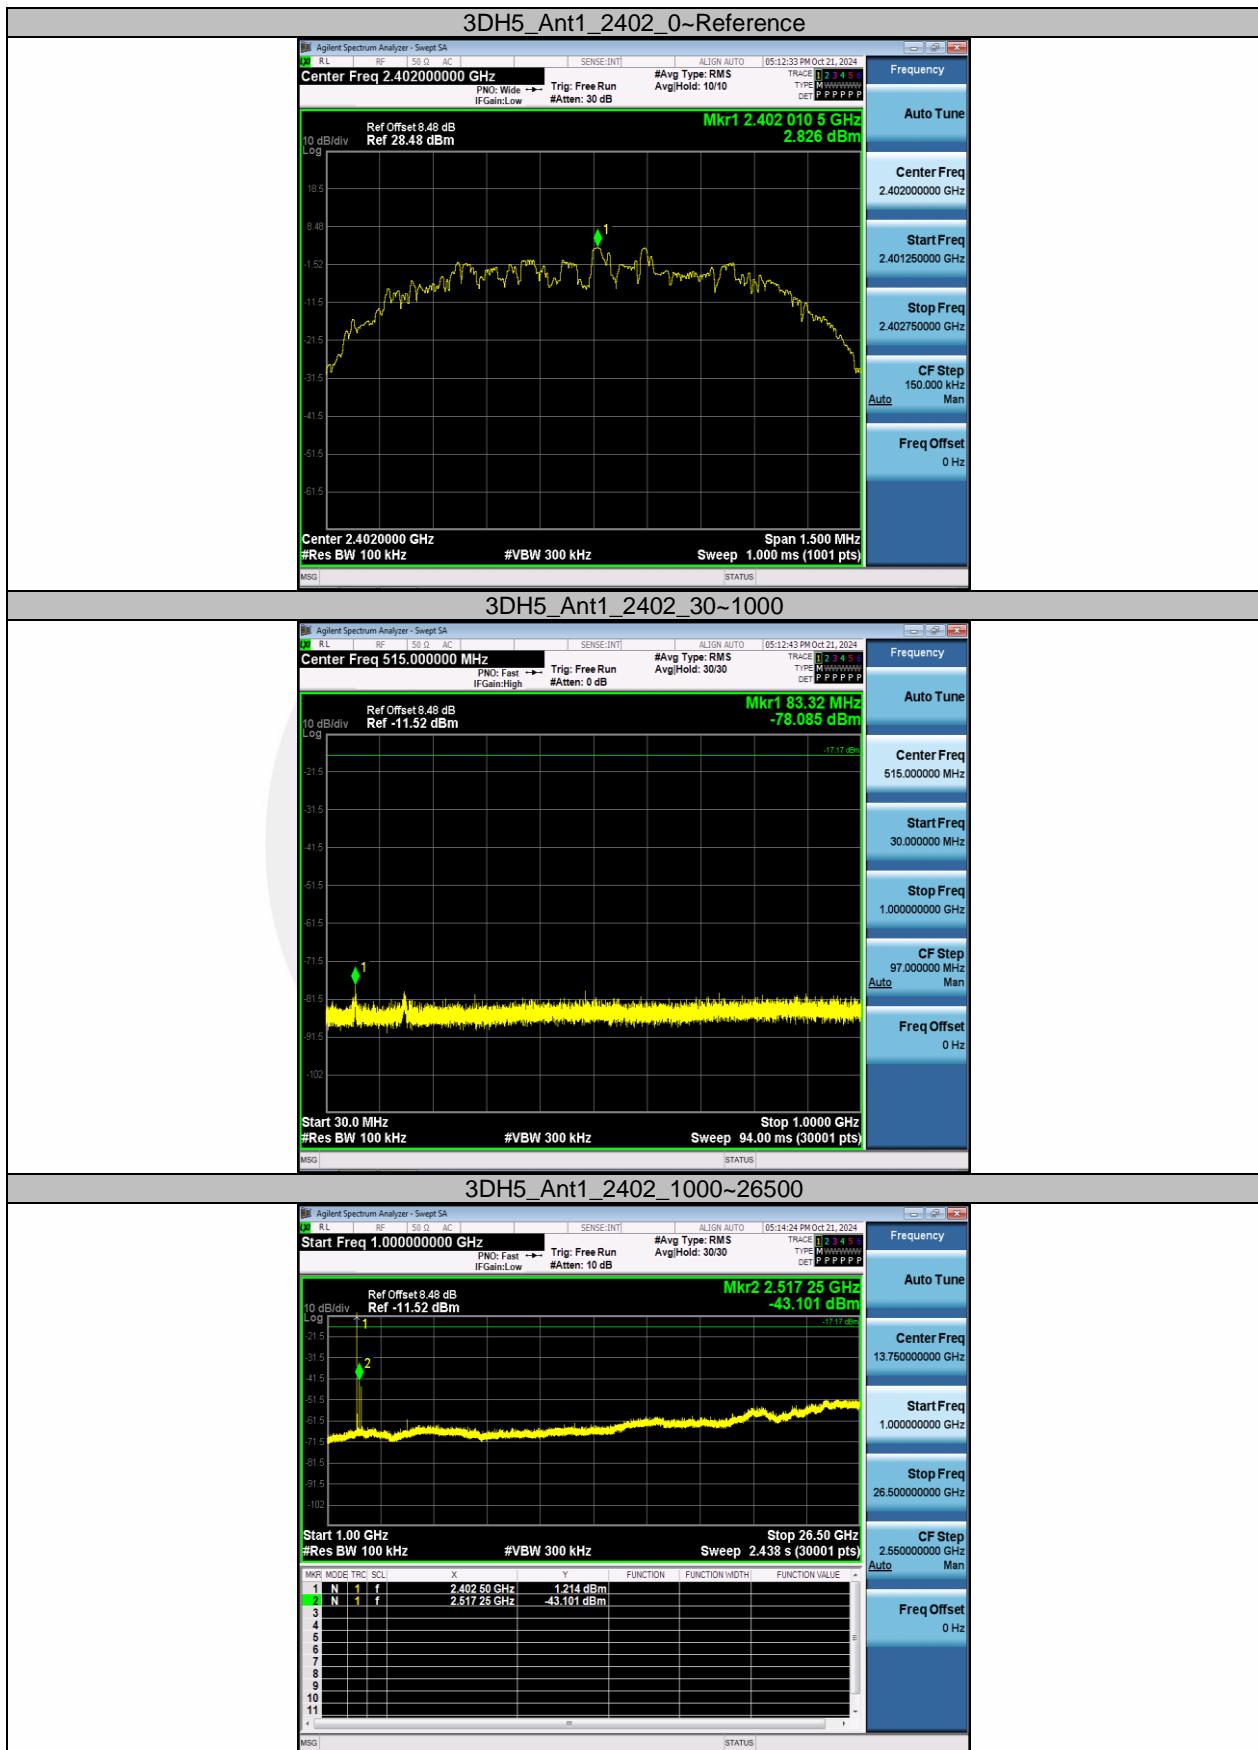

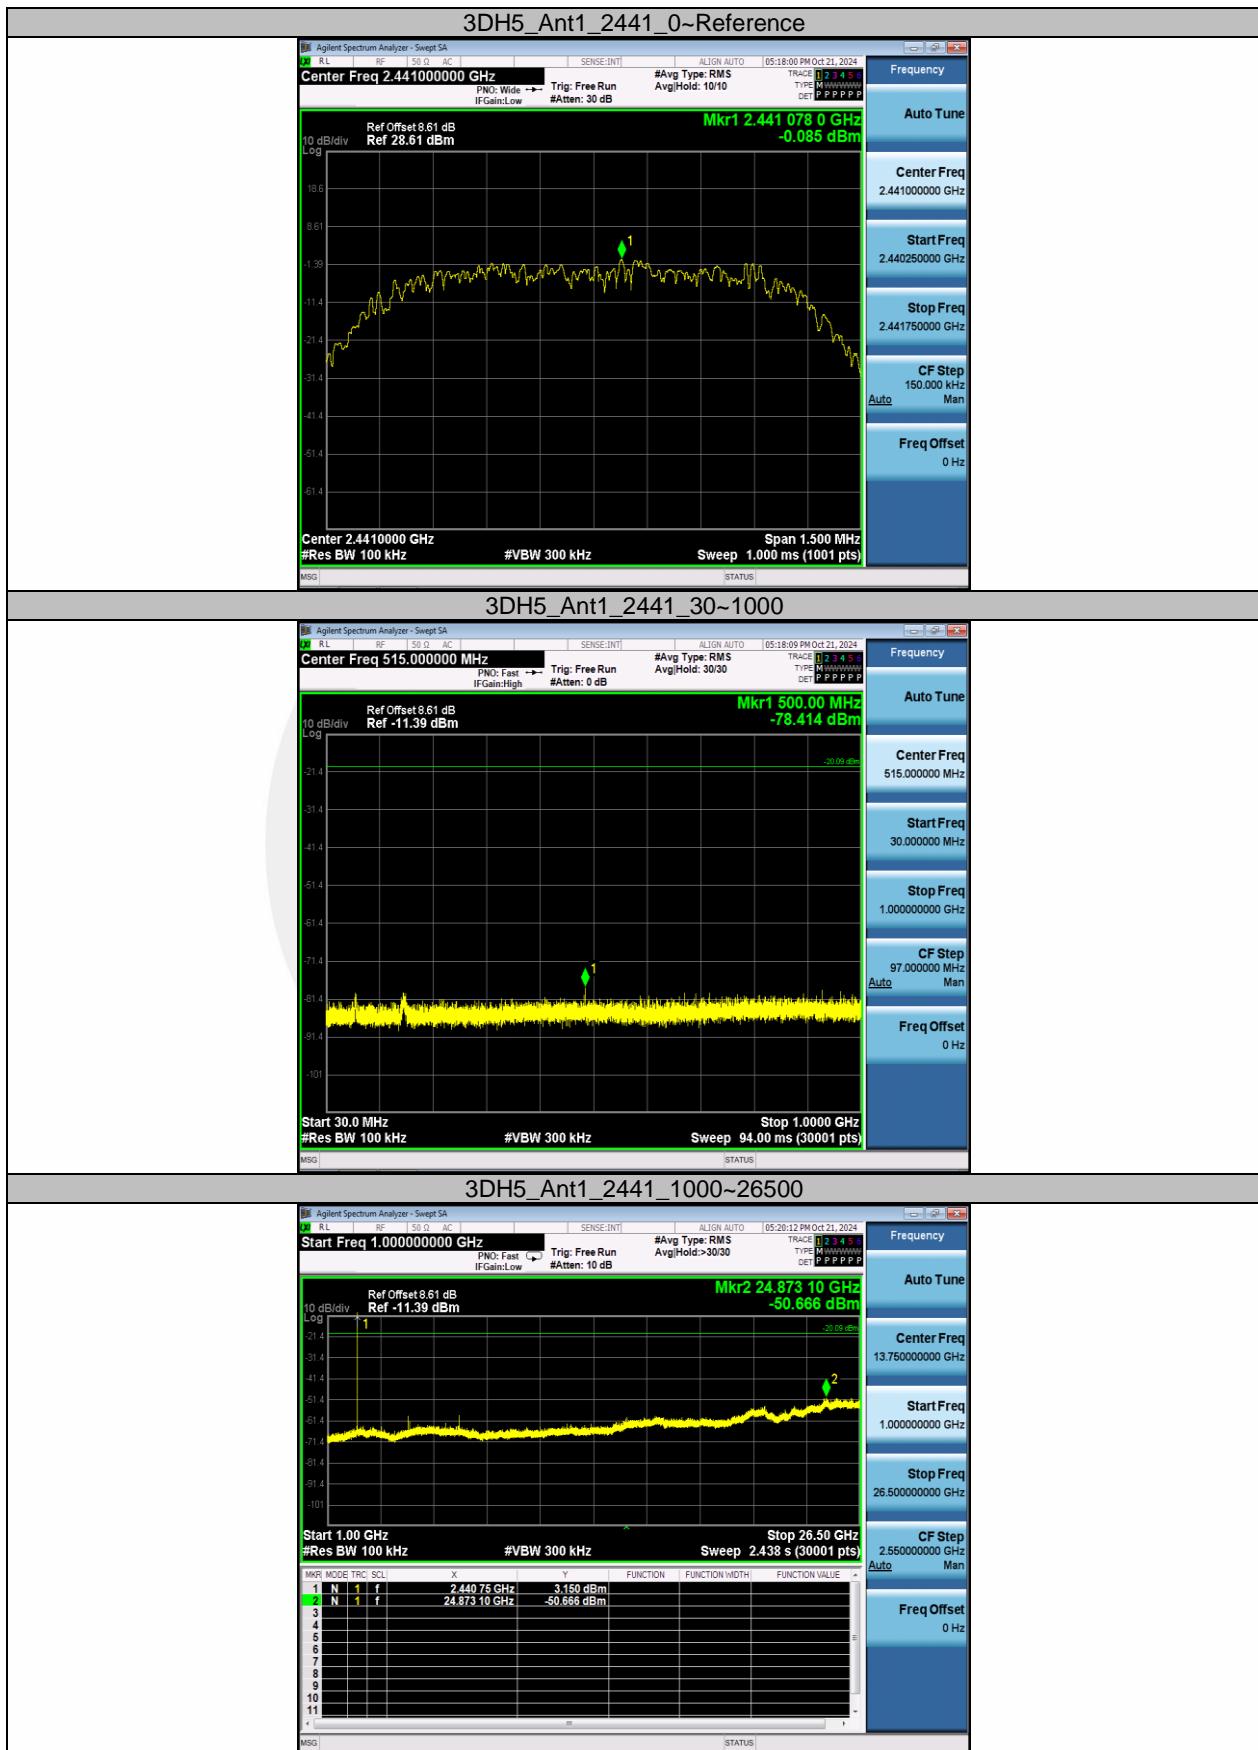

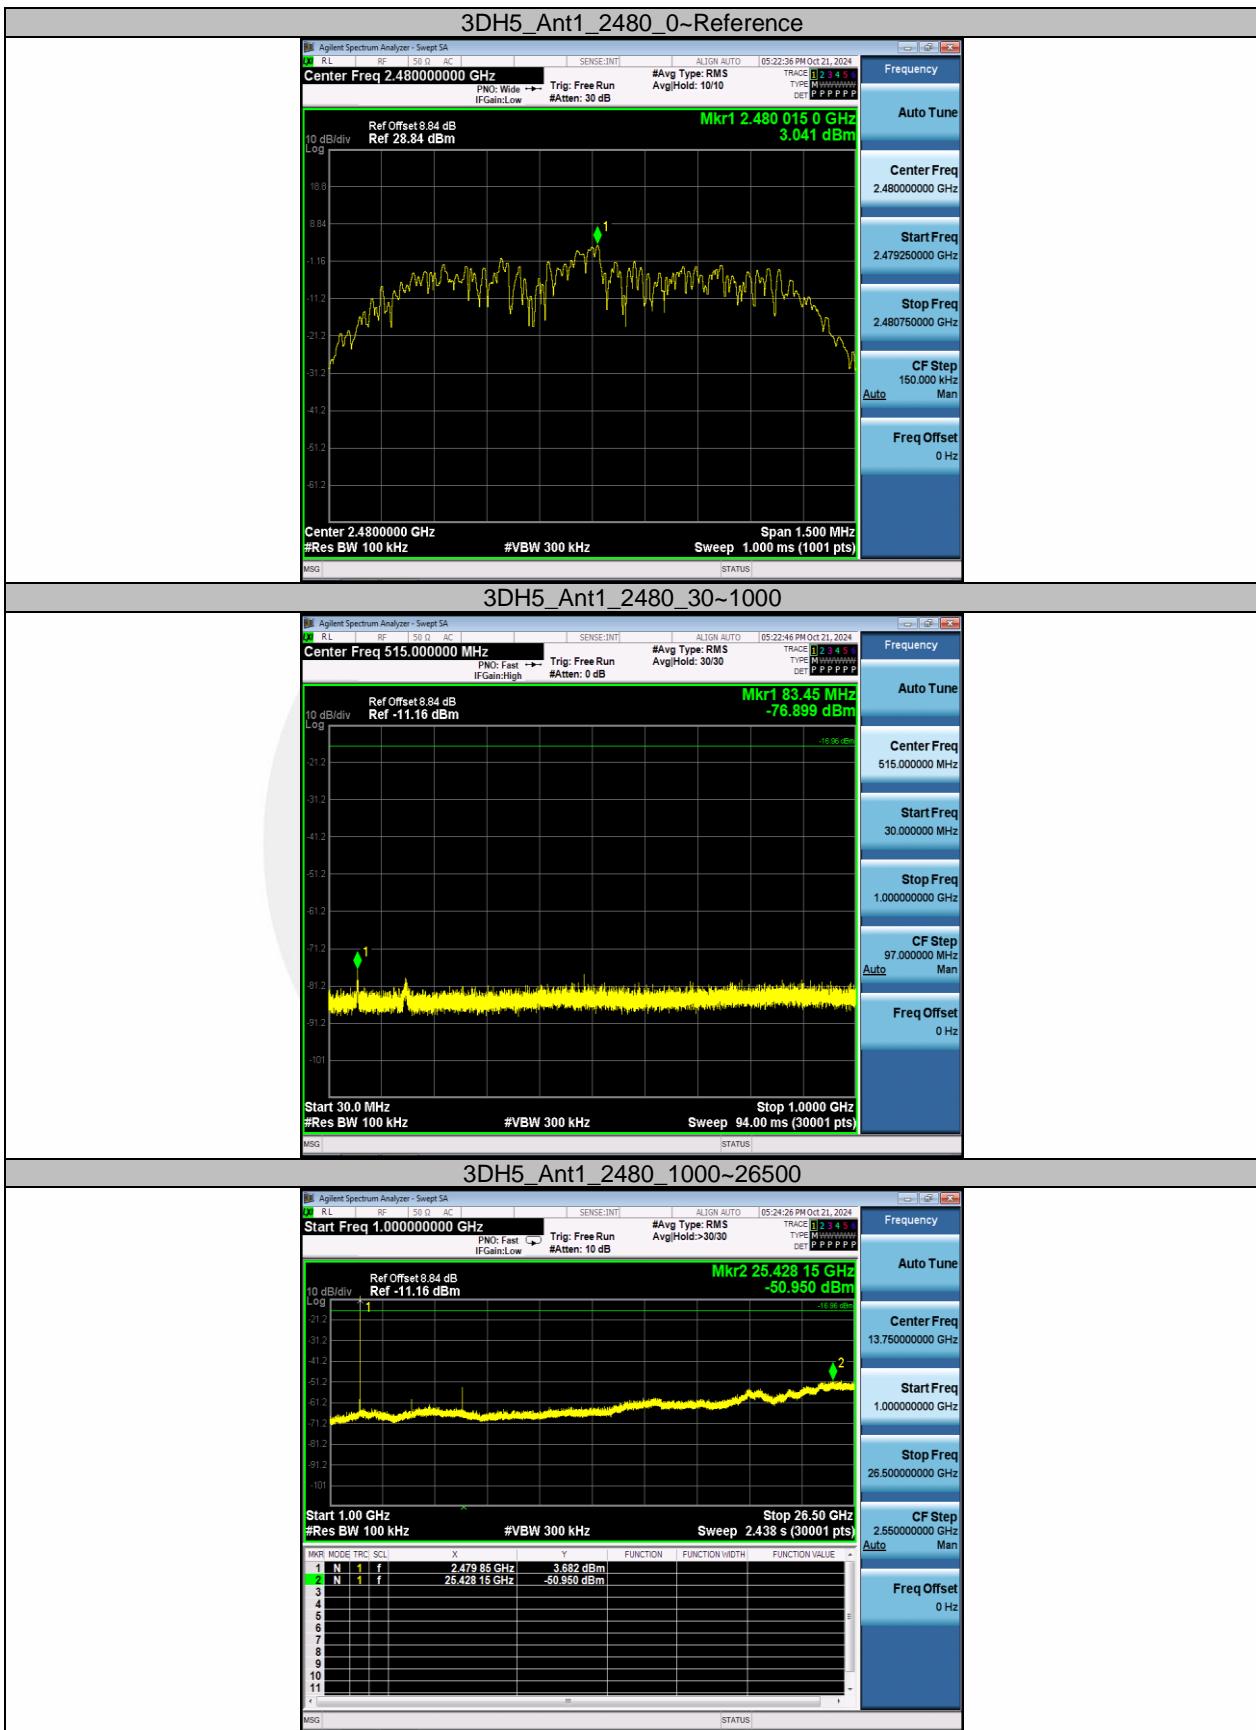

## 9.7 RADIATED SPURIOUS EMISSION

### 9.7.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02

### 9.7.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ( $\mu$ V/m)	Field Strength ( $\text{dB}\mu$ V/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ( $\mu$ V/m)	300
0.490-1.705	24000/F(KHz)	20 log ( $\mu$ V/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

### 9.7.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

### 9.7.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 9kHz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

VBW  $\geq$  RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from  $20\log(\text{dwell time}/100 \text{ ms})$ , in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

### 9.7.5 Test Results

#### ■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature:	25° C
Relative Humidity:	60%
ATM Pressure:	1011 mbar

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ ( dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Bluetooth (GFSK,  $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Test mode:	GFSK	Frequency:	Channel 0: 2402MHz
------------	------	------------	--------------------

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
7951.87	V	58.44	74.00	15.56	peak
9888.75	V	61.47	74.00	12.53	peak
17981.2	V	63.95	74.00	10.05	peak
7951.87	V	41.97	54.00	12.03	AVG
9888.75	V	42.57	54.00	11.43	AVG
17981.2	V	47.13	54.00	6.87	AVG
7886.25	H	58.45	74.00	15.55	peak
9888.75	H	61.91	74.00	12.09	peak
17523.7	H	63.96	74.00	10.04	peak
7886.25	H	41.86	54.00	12.14	AVG
9888.75	H	42.40	54.00	11.60	AVG
17523.7	H	44.93	54.00	9.07	AVG

Test mode:	GFSK	Frequency:	Channel 39: 2441MHz
------------	------	------------	---------------------

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
7899.37	V	59.18	74.00	14.82	peak
9984.37	V	61.94	74.00	12.06	peak
17070	V	63.74	74.00	10.26	peak
7899.37	V	42.12	54.00	11.88	AVG
9984.37	V	41.89	54.00	12.11	AVG
17070	V	43.68	54.00	10.32	AVG
7908.75	H	58.79	74.00	15.21	peak
9888.75	H	62.26	74.00	11.74	peak
16293.7	H	64.28	74.00	9.72	peak
7908.75	H	41.87	54.00	12.13	AVG
9888.75	H	42.05	54.00	11.95	AVG
16293.7	H	43.60	54.00	10.40	AVG

**Test mode:**
**GFSK**
**Frequency:**
**Channel 78: 2480MHz**

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
7899.37	V	58.60	74.00	15.40	peak
9990	V	61.82	74.00	12.18	peak
17893.1	V	63.93	74.00	10.07	peak
7899.37	V	41.90	54.00	12.10	AVG
9990	V	42.16	54.00	11.84	AVG
17893.1	V	42.84	54.00	11.16	AVG
7899.37	H	59.20	74.00	14.80	peak
9883.12	H	62.05	74.00	11.95	peak
17857.5	H	63.44	74.00	10.56	peak
7899.37	H	41.80	54.00	12.20	AVG
9883.12	H	42.70	54.00	11.30	AVG
17857.5	H	42.54	54.00	11.46	AVG

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz  
 Bluetooth (GFSK,  $\pi/4$ -DQPSK, 8DPSK, Hopping) mode have been tested, and the worst result(GFSK, Hopping) was report as below:

Test mode: GFSK Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2386.37	V	49.59	74.00	24.41	peak
2386.37	V	42.92	54.00	11.08	AVG
2386.29	H	49.65	74.00	24.35	peak
2386.29	H	42.28	54.00	11.72	AVG



Test mode: GFSK Frequency: Channel 78: 2480MHz



Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2484.39	V	50.74	74.00	23.26	peak
2484.39	V	43.03	54.00	10.97	AVG
2483.56	H	50.15	74.00	23.85	peak
2483.56	H	42.61	54.00	11.39	AVG

Test mode: GFSK Frequency: Hopping


Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2384.25	V	45.13	54.00	8.87	peak
2489.73	V	45.06	54.00	8.94	peak
2384.25	V	38.16	54.00	15.84	AVG
2489.73	V	37.88	54.00	16.12	AVG
2386.53	H	42.52	54.00	11.48	peak
2487.70	H	43.76	54.00	10.24	peak
2386.53	H	38.14	54.00	15.86	AVG
2487.70	H	38.55	54.00	15.45	AVG

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).  
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.  
 (3) Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

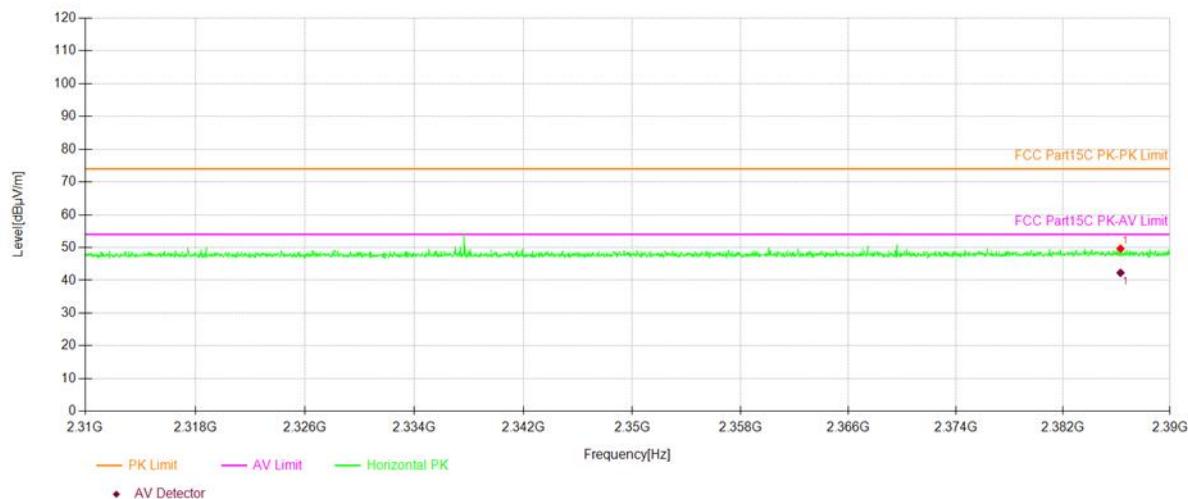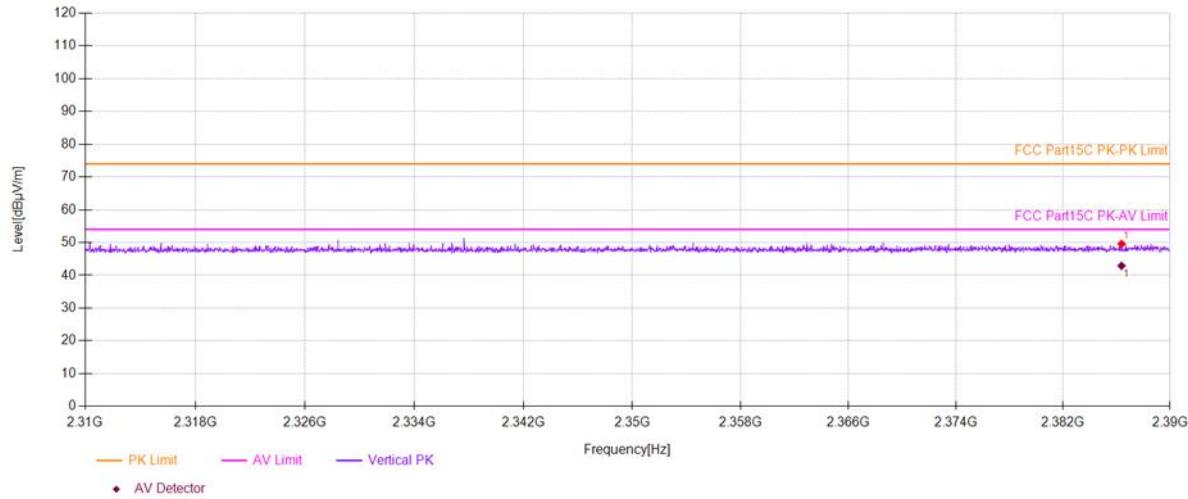
**Test Model**
**Spurious Emission in Restricted Band 2310-2390MHz**
**BT**
**Channel 0: 2402MHz**
**GFSK**
**H**
**Test By: CZF**

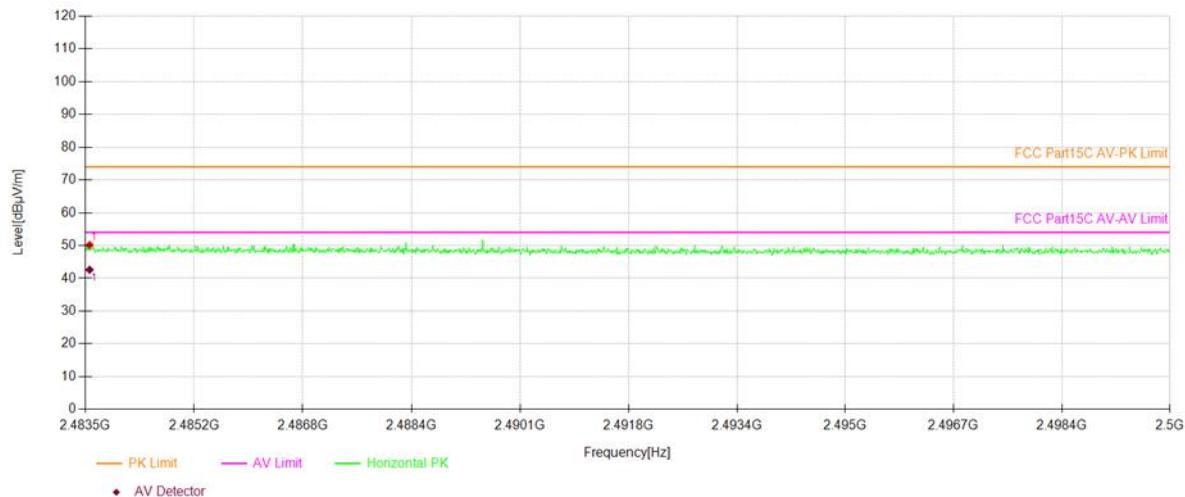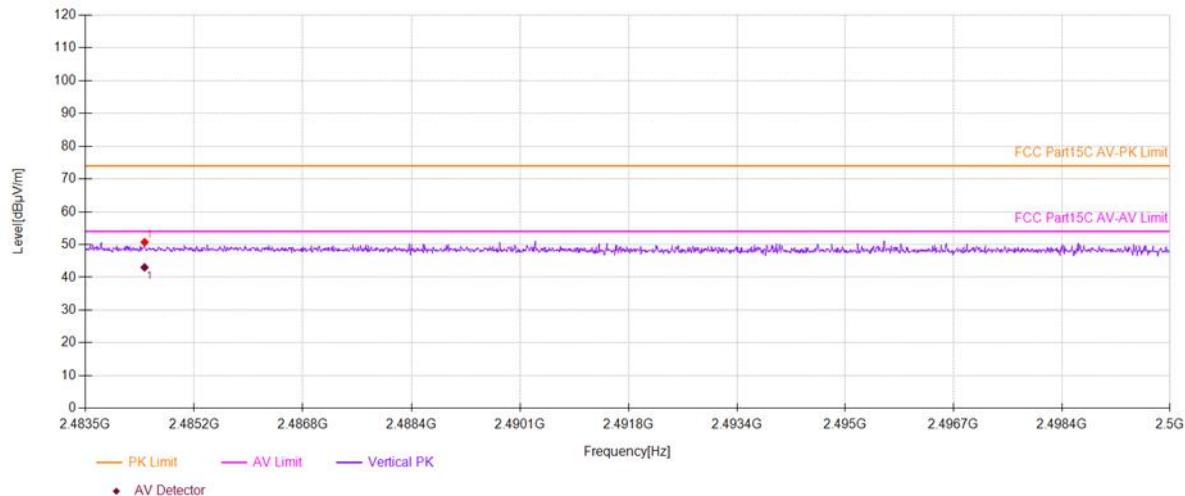**Test Model**
**Spurious Emission in Restricted Band 2310-2390MHz**
**BT**
**Channel 0: 2402MHz**
**GFSK**
**V**
**Test By: CZF**


**Test Model**
**Spurious Emission in Restricted Band 2483.5-2500MHz**
**BT**
**Channel 78: 2480MHz**
**GFSK**
**H**
**Test By: CZF**

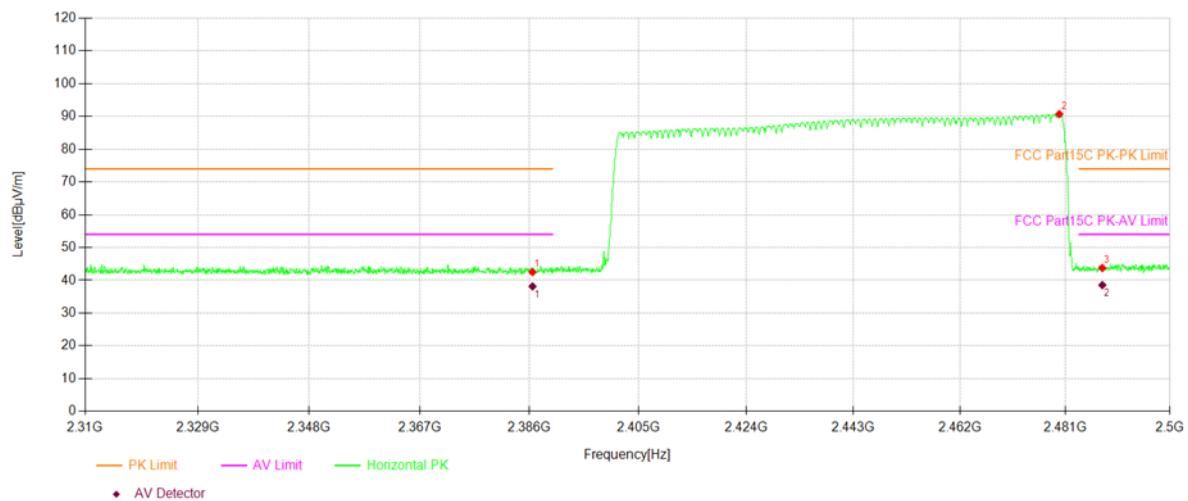**Test Model**
**Spurious Emission in Restricted Band 2483.5-2500MHz**
**BT**
**Channel 78: 2480MHz**
**GFSK**
**V**
**Test By: CZF**


Test Model	Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz		
	BT	GFSK	H
	Hopping	Test By: CZF	

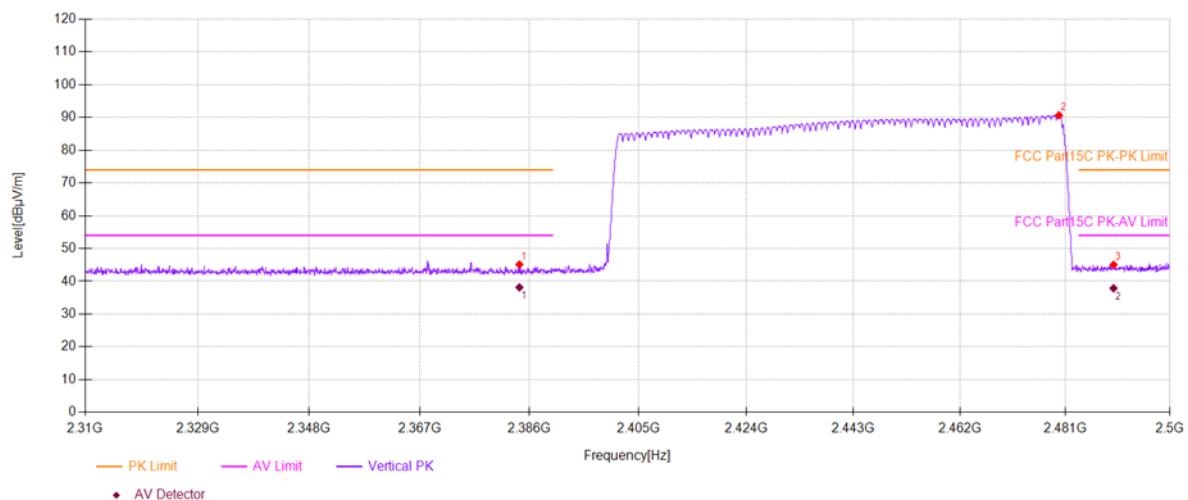


Test Model	Spurious Emission in Restricted Band 2310-2390MHz and 2400-2483.5MHz		
	BT	GFSK	V
	Hopping	Test By: CZF	




■ Spurious Emission below 1GHz (30MHz to 1GHz)

Bluetooth (GFSK,  $\pi/4$ -DQPSK, 8DPSK) mode have been tested, and the worst result(GFSK) was report as below:

Test mode: GFSK      Frequency: Channel 0: 2402MHz

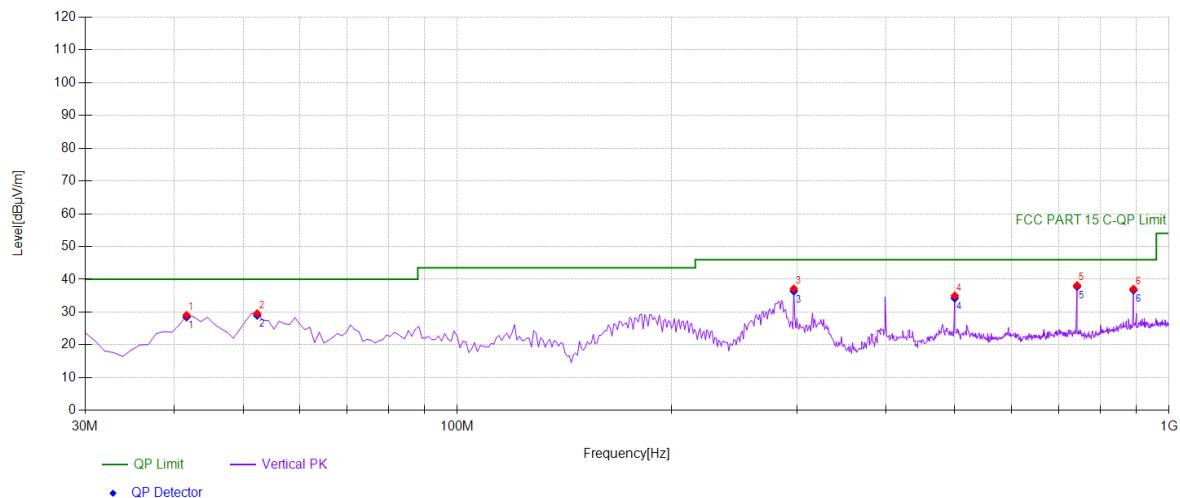

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	41.6517	46.23	-17.18	29.05	PK	40.00	10.95	Vertical
2	52.3323	45.88	-16.31	29.57	PK	40.00	10.43	Vertical
3	297.017	51.21	-14.07	37.14	PK	46.00	8.86	Vertical
4	499.95	45.05	-10.06	34.99	PK	46.00	11.01	Vertical
5	742.692	43.94	-5.79	38.15	PK	46.00	7.85	Vertical
6	891.251	40.47	-3.40	37.07	PK	46.00	8.93	Vertical

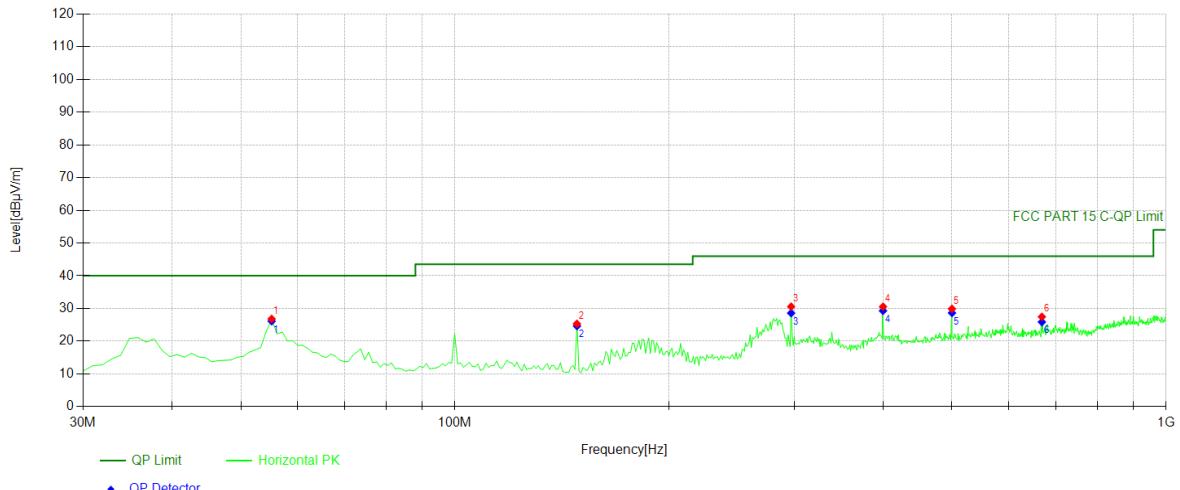


Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	55.2452	43.51	-16.69	26.82	PK	40.00	13.18	Horizontal
2	148.458	44.88	-19.55	25.33	PK	43.50	18.17	Horizontal
3	297.017	44.66	-14.07	30.59	PK	46.00	15.41	Horizontal
4	399.939	41.85	-11.29	30.56	PK	46.00	15.44	Horizontal
5	499.95	39.96	-10.06	29.90	PK	46.00	16.10	Horizontal
6	668.898	34.47	-7.00	27.47	PK	46.00	18.53	Horizontal

Test mode:


GFSK

Frequency:

Channel 39: 2441MHz

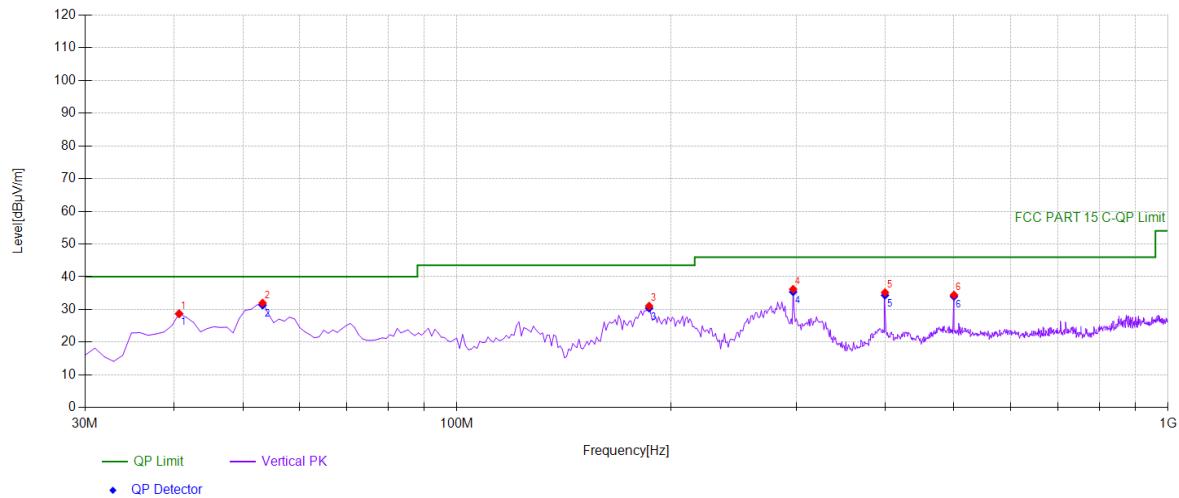

Suspected Data List									
NO.	Freq. [MHz]	Reading [dB $\mu$ V]	Factor [dB/m]	Level [dB $\mu$ V/m]	Detector	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	
1	40.6807	46.02	-17.31	28.71	PK	40.00	11.29	Vertical	
2	53.3033	48.43	-16.44	31.99	PK	40.00	8.01	Vertical	
3	186.326	49.25	-18.18	31.07	PK	43.50	12.43	Vertical	
4	297.017	50.28	-14.07	36.21	PK	46.00	9.79	Vertical	
5	399.939	46.48	-11.29	35.19	PK	46.00	10.81	Vertical	
6	499.95	44.51	-10.06	34.45	PK	46.00	11.55	Vertical	

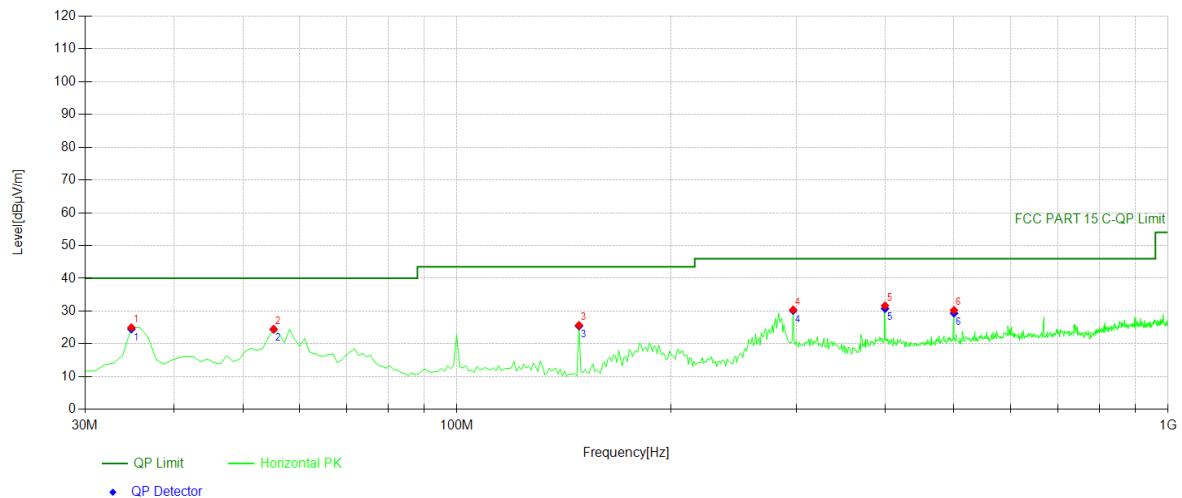
**Suspected Data List**


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	34.8549	43.07	-18.09	24.98	PK	40.00	15.02	Horizontal
2	55.2452	41.20	-16.69	24.51	PK	40.00	15.49	Horizontal
3	148.458	45.25	-19.55	25.70	PK	43.50	17.80	Horizontal
4	297.017	44.49	-14.07	30.42	PK	46.00	15.58	Horizontal
5	399.939	42.96	-11.29	31.67	PK	46.00	14.33	Horizontal
6	499.95	40.32	-10.06	30.26	PK	46.00	15.74	Horizontal

Test mode:


GFSK

Frequency:

Channel 78: 2480MHz

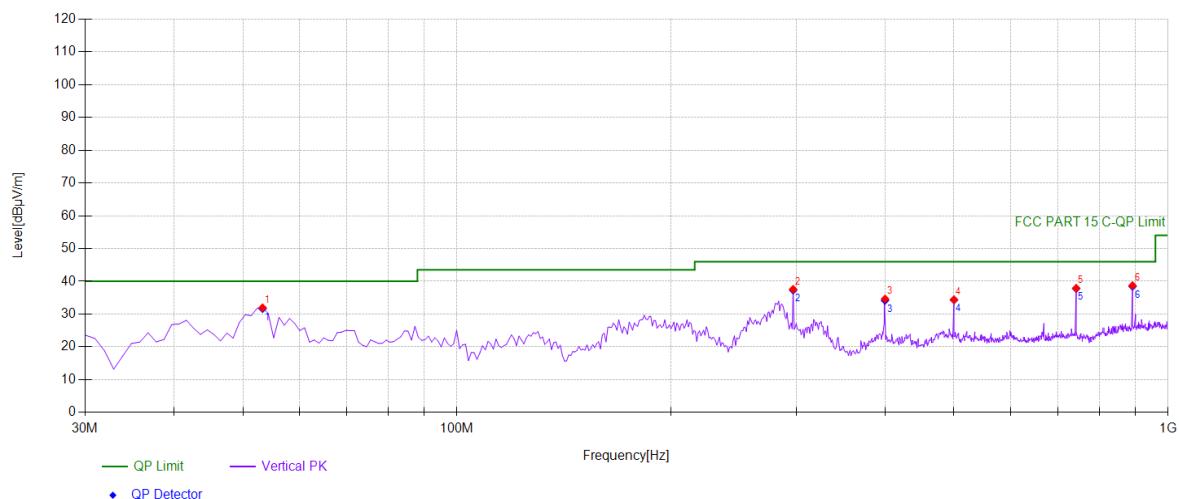

Suspected Data List								
NO.	Freq. [MHz]	Reading [dB $\mu$ V]	Factor [dB/m]	Level [dB $\mu$ V/m]	Detector	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity
1	53.3033	48.41	-16.44	31.97	PK	40.00	8.03	Vertical
2	297.017	51.66	-14.07	37.59	PK	46.00	8.41	Vertical
3	399.939	45.92	-11.29	34.63	PK	46.00	11.37	Vertical
4	499.95	44.48	-10.06	34.42	PK	46.00	11.58	Vertical
5	742.692	43.69	-5.79	37.90	PK	46.00	8.10	Vertical
6	891.251	42.13	-3.40	38.73	PK	46.00	7.27	Vertical

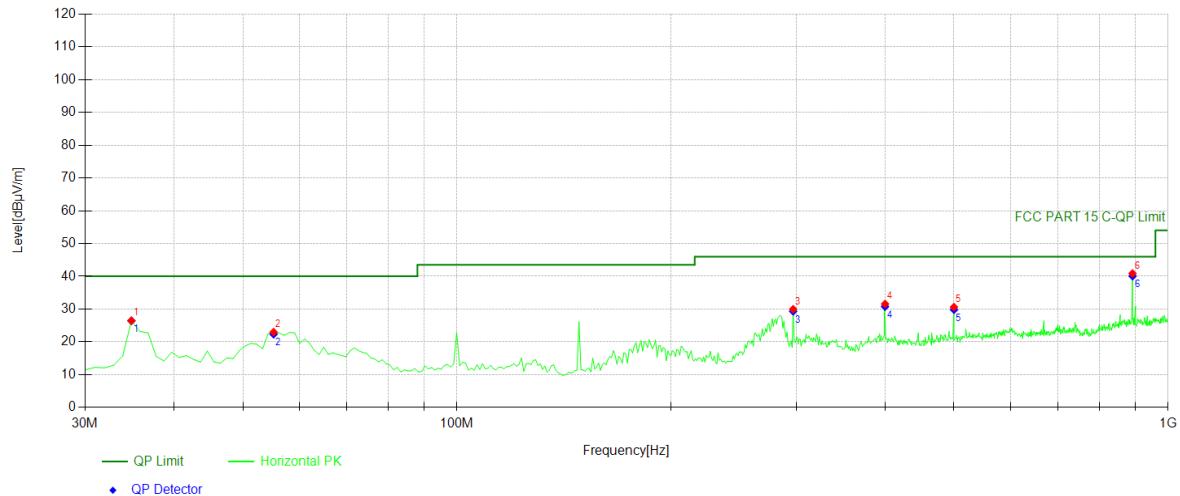

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	34.8549	44.54	-18.09	26.45	PK	40.00	13.55	Horizontal
2	55.2452	39.68	-16.69	22.99	PK	40.00	17.01	Horizontal
3	297.017	44.03	-14.07	29.96	PK	46.00	16.04	Horizontal
4	399.939	42.86	-11.29	31.57	PK	46.00	14.43	Horizontal
5	499.95	40.69	-10.06	30.63	PK	46.00	15.37	Horizontal
6	891.251	44.28	-3.40	40.88	PK	46.00	5.12	Horizontal

## 9.8 CONDUCTED EMISSION TEST

### 9.8.1 Applicable Standard

According to FCC Part 15.207(a)

### 9.8.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies  
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 9.8.3 Test Configuration

Test according to clause 7.3 conducted emission test setup


### 9.8.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.  
Maximum procedure was performed on the highest emissions to ensure EUT compliance.  
Repeat above procedures until all frequency measured were complete.

### 9.8.5 Test Results

Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below:

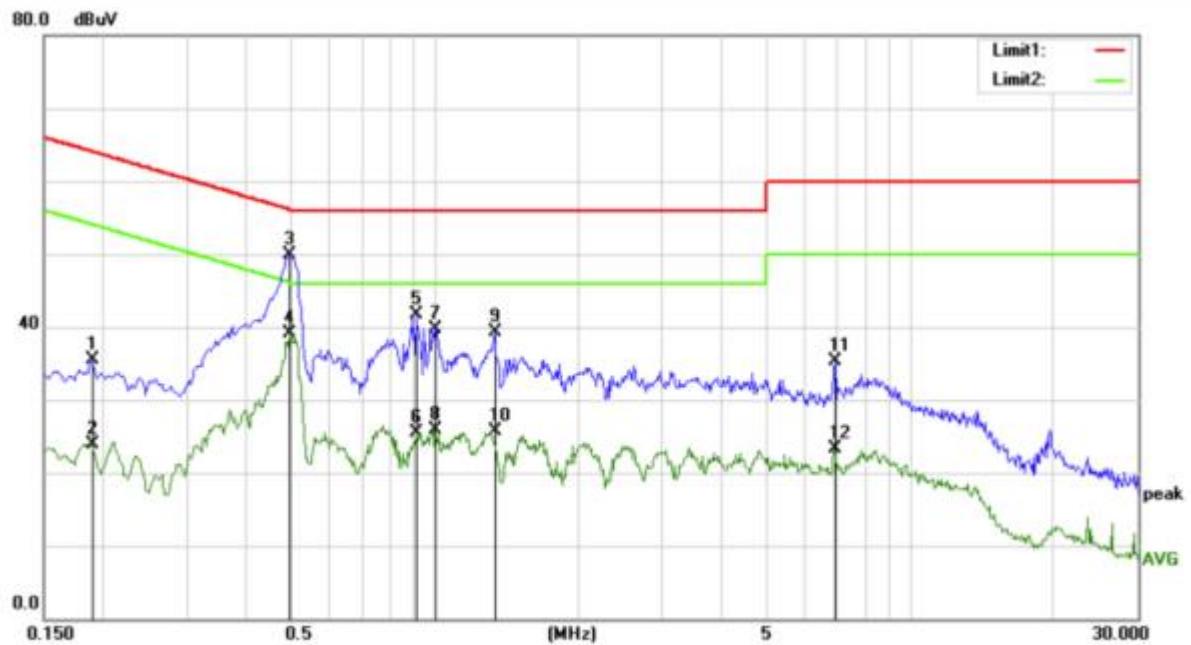

Site Conduction #1

 Phase: **N**

Temperature: 22.5

Limit: (CE)FCC PART 15 class B\_QP


Power: AC 120V/60Hz

Humidity: 48 %

Mode: BLE Mode

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		Comment
			Level	Factor	ment		dBuV	Detector	
1		0.1900	25.68	9.91	35.59	64.04	-28.45	QP	
2		0.1900	14.08	9.91	23.99	54.04	-30.05	AVG	
3 *		0.4940	40.04	9.93	49.97	56.10	-6.13	QP	
4		0.4940	29.21	9.93	39.14	46.10	-6.96	AVG	
5		0.9100	31.74	10.00	41.74	56.00	-14.26	QP	
6		0.9100	15.41	10.00	25.41	46.00	-20.59	AVG	
7		1.0020	29.79	10.01	39.80	56.00	-16.20	QP	
8		1.0020	15.85	10.01	25.86	46.00	-20.14	AVG	
9		1.3340	29.21	10.02	39.23	56.00	-16.77	QP	
10		1.3340	15.77	10.02	25.79	46.00	-20.21	AVG	
11		6.9220	25.22	10.12	35.34	60.00	-24.66	QP	
12		6.9220	13.27	10.12	23.39	50.00	-26.61	AVG	

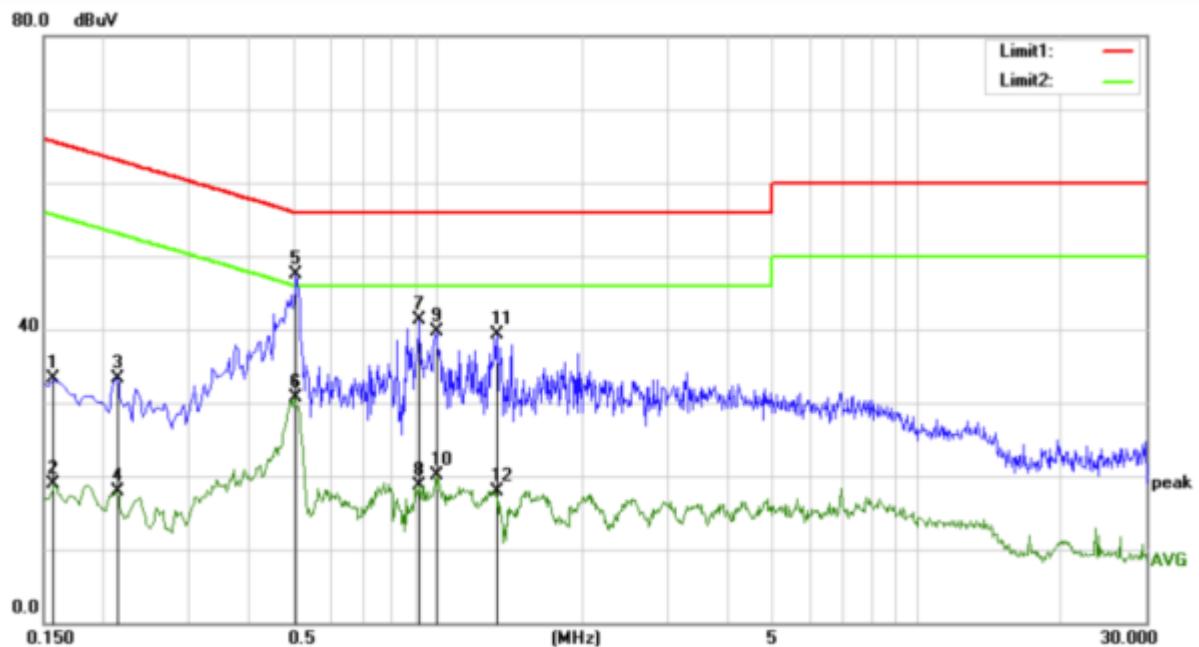

Site Conduction #1

 Phase: **L1**

Temperature: 22.5

Limit: (CE)FCC PART 15 class B\_QP

Power: AC 120V/60Hz

Humidity: 48 %

Mode: BLE Mode

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1580	23.29	9.93	33.22	65.57	-32.35		QP
2		0.1580	8.96	9.93	18.89	55.57	-36.68		AVG
3		0.2140	23.48	9.91	33.39	63.05	-29.66		QP
4		0.2140	8.04	9.91	17.95	53.05	-35.10		AVG
5	*	0.5060	37.59	9.93	47.52	56.00	-8.48		QP
6		0.5060	20.85	9.93	30.78	46.00	-15.22		AVG
7		0.9140	31.29	10.00	41.29	56.00	-14.71		QP
8		0.9140	8.73	10.00	18.73	46.00	-27.27		AVG
9		0.9940	29.73	10.01	39.74	56.00	-16.26		QP
10		0.9940	10.08	10.01	20.09	46.00	-25.91		AVG
11		1.3300	29.35	10.02	39.37	56.00	-16.63		QP
12		1.3300	7.89	10.02	17.91	46.00	-28.09		AVG

## 9.9 ANTENNA APPLICATION

### 9.9.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.9.2 Result

**PASS**

- Antenna use a permanently attached antenna which is not replaceable.
- Not using a standard antenna jack or electrical connector for antenna replacement
- The antenna has to be professionally installed (please provide method of installation)

Note: Please refer to the attached document Internal Photos to show the antenna connector.

## Detail of factor for radiated emission

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

--- End of Report ---