

Annex 1: Measurement diagrams to Test Report 19-1-0069003T27a-A1

Number of pages:	52	Date of Report:	2020-Nov-04
Testing company:	CETECOM GmbH Im Teelbruch 116 45219 Essen Germany Tel. + 49 (0) 20 54 / 95 19-0 Fax: + 49 (0) 20 54 / 95 19-150	Applicant:	WAGO Kontakttechnik GmbH & Co. KG
Test Object / Tested Device(s):	8PORT IOL-B FLD PN DC 24V 2.0A - WideLine 765-4102/0100-0000 WAGO I/O System Field		
FCC ID:	2AKUE-WIDELINE	IC:	22322-WIDELINE
Testing has been carried out in accordance with:	Title 47 CFR, Chapter I FCC Regulations, Subchapter A §15.247 (DTS) ISED-Regulations RSS-Gen, Issue 5 RSS 247, Issue 2 Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		



Table of Contents

1 Measurement diagrams.....3

1.1 Radiated measurements.....3

1.2 Conducted measurements26

1 Measurement diagrams

1.1 Radiated measurements

2.01a_BT_LE_low_standing

Common Information


Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5

Operator:	TFra
Operating Mode:	BLE TX ch2402
Environmental Conditions:	Humidity : 50%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed
Comment:	

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

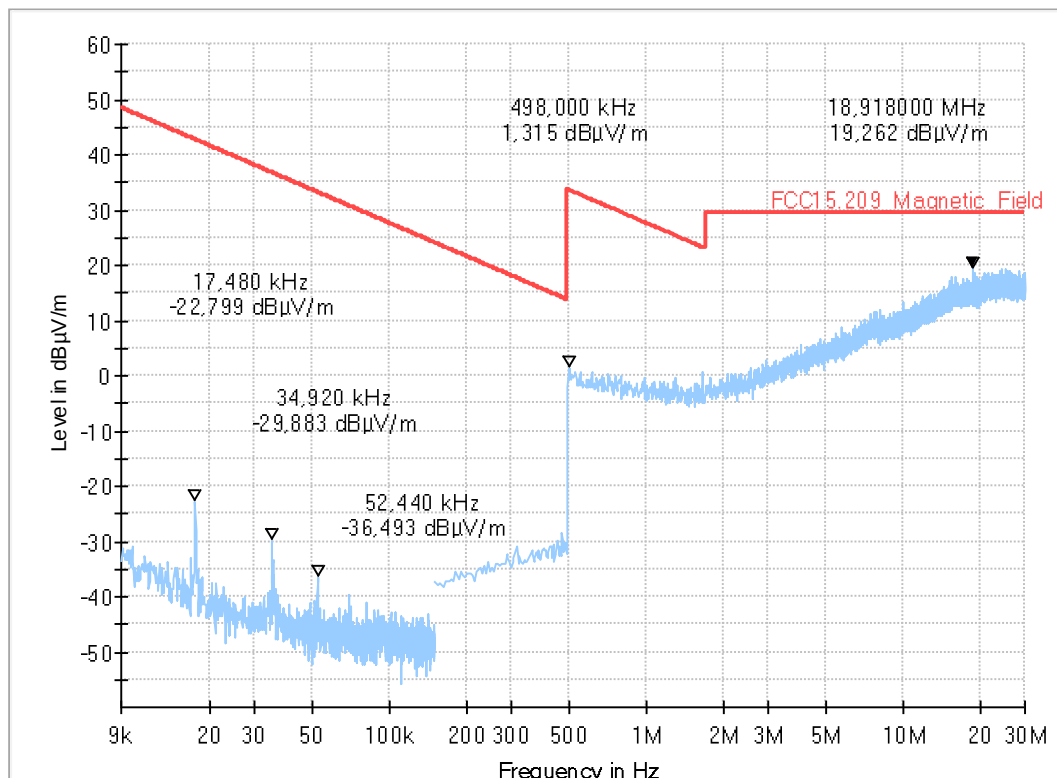

2.01b_BT_LE_low_laying


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	TFra
Operating Mode:	BLE TX ch2402
Environmental Conditions:	Humidity : 51%rH; Temperature: 19°C
EUT Setup:	1
Verdict:	Passed
Comment:	

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

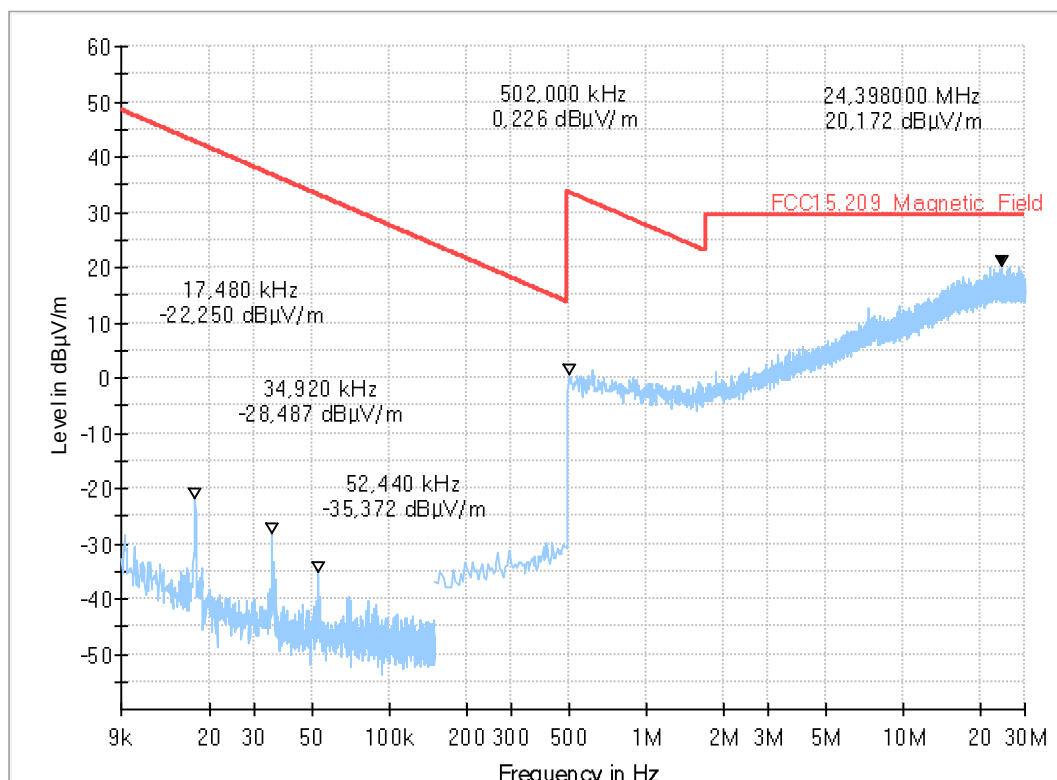

2.02a_BT_LE_mid_standing


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	TFra
Operating Mode:	BLE TX ch2442
Environmental Conditions:	Humidity : 51%rH; Temperature: 19°C
EUT Setup:	1
Verdict:	Passed
Comment:	

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

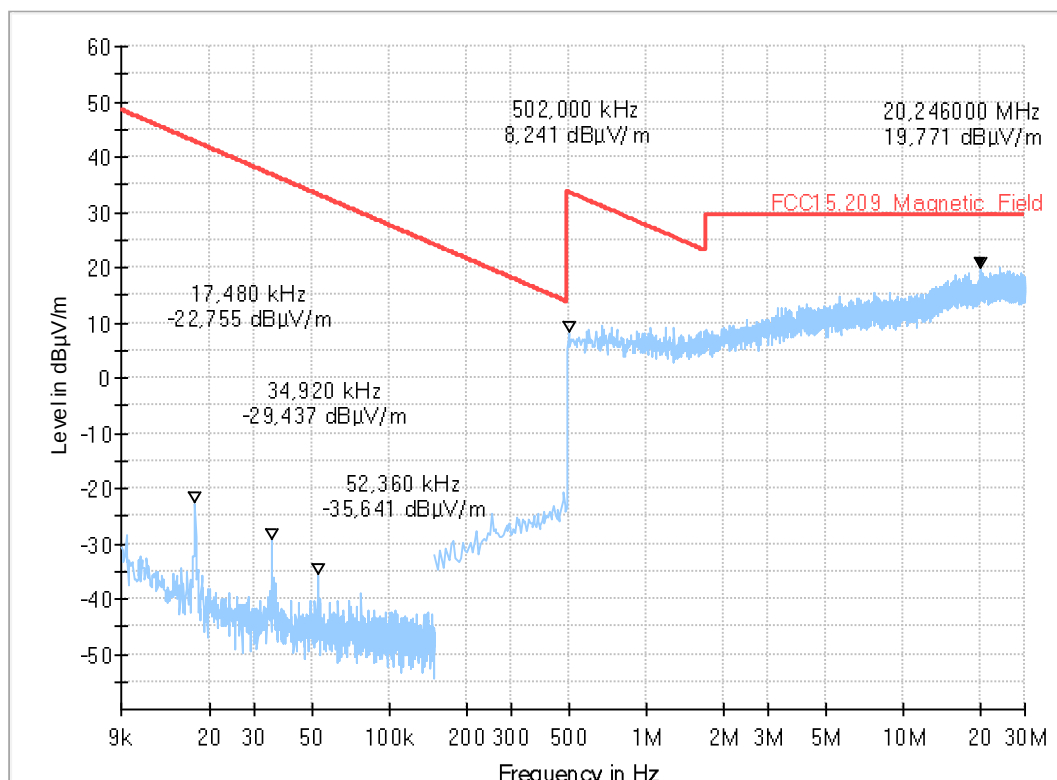

2.02b_BT_LE_mid_laying


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	TFra
Operating Mode:	BLE TX ch2442
Environmental Conditions:	Humidity : 51%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed
Comment:	

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

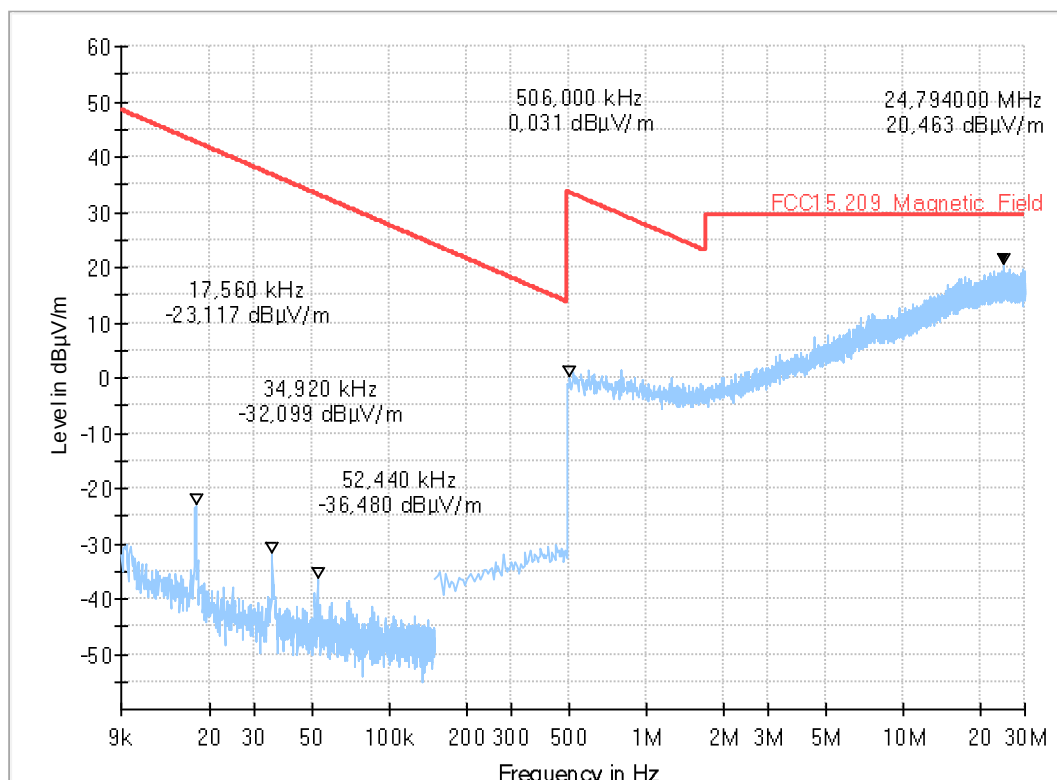

2.03a_BT_LE_high_standing


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	TFra
Operating Mode:	BLE TX ch2480
Environmental Conditions:	Humidity : 51%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed
Comment:	

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

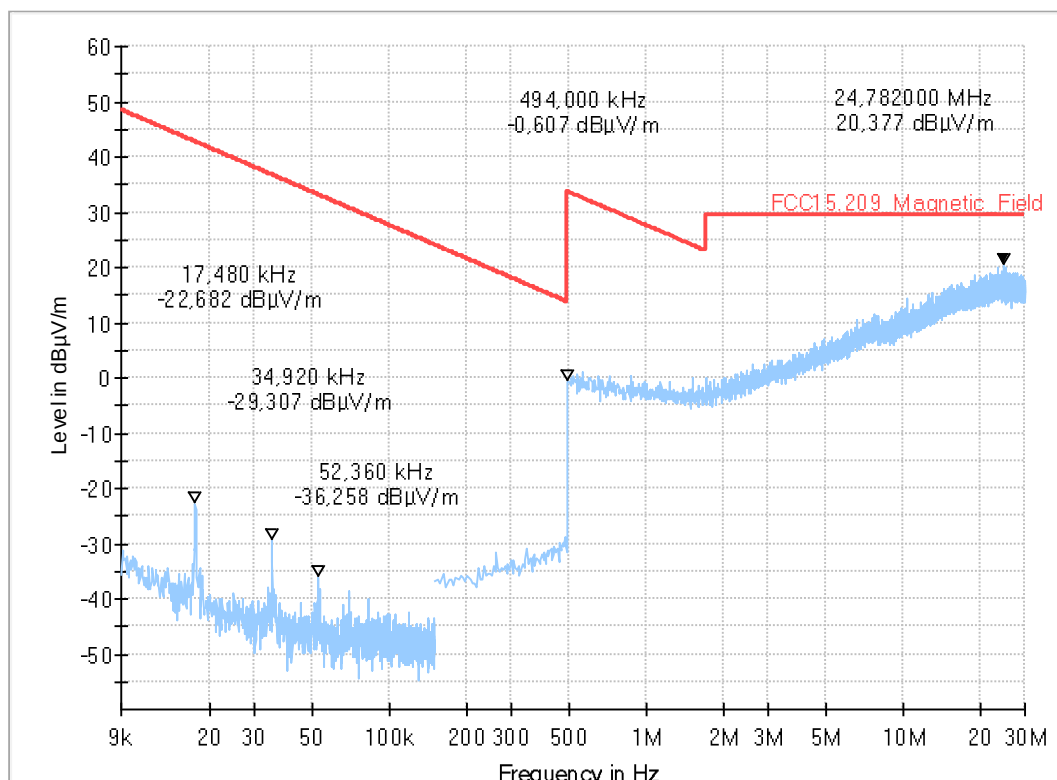

2.03b_BT_LE_high_laying


Common Information

Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5
Operator:	TFra
Operating Mode:	BLE TX ch2480
Environmental Conditions:	Humidity : 50%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed
Comment:	

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

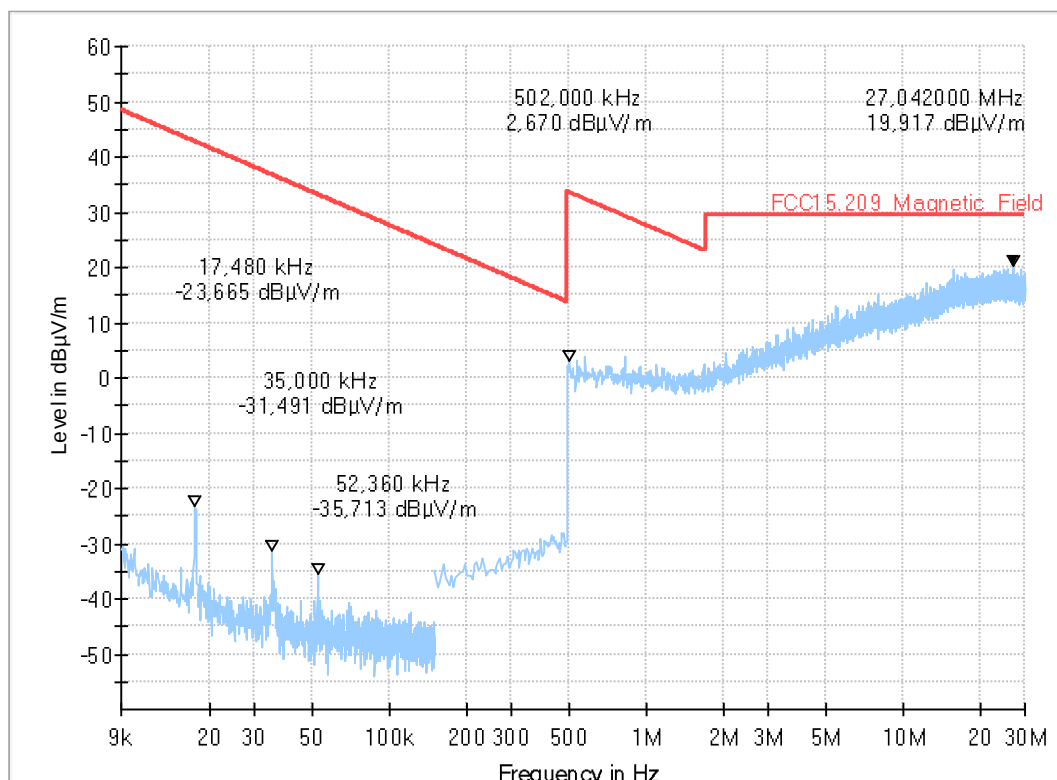

3.01a_BT_LE_low_standing


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 RSS Gen Issue 5 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TCH mode
Operator Name:	
Comment:	Channel no. low
Operating Mode:	TCH mode
Environmental Conditions:	Humidity : 57%rH; Temperature: 21°C
Operator:	PMa
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

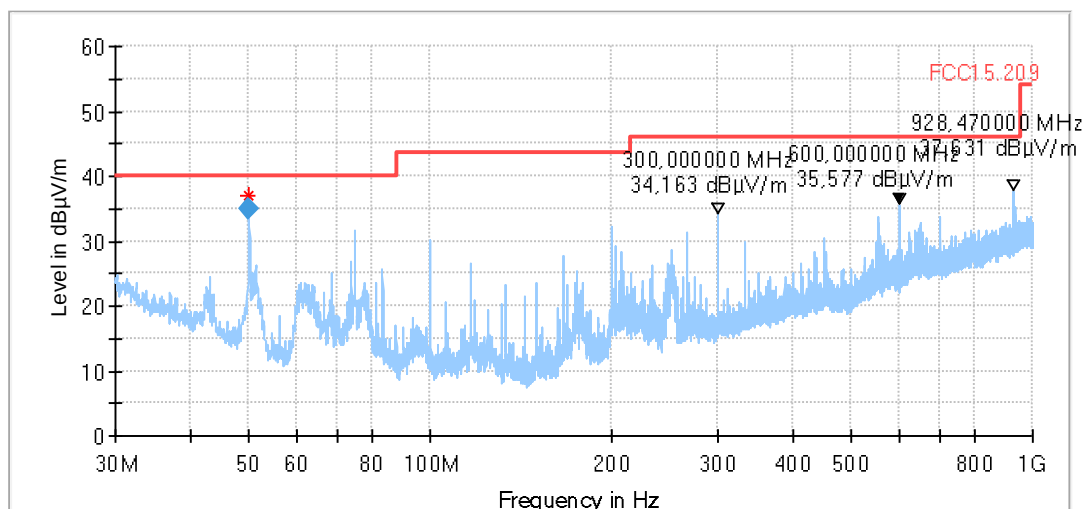

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

3.01b_BT_LE_low_laying


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 RSS Gen Issue 5 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TCH mode
Operator Name:	
Comment:	Channel no. low
Operating Mode:	BLE TX ch2402
Environmental Conditions:	Humidity : 57%rH; Temperature: 21°C
Operator:	PMa
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

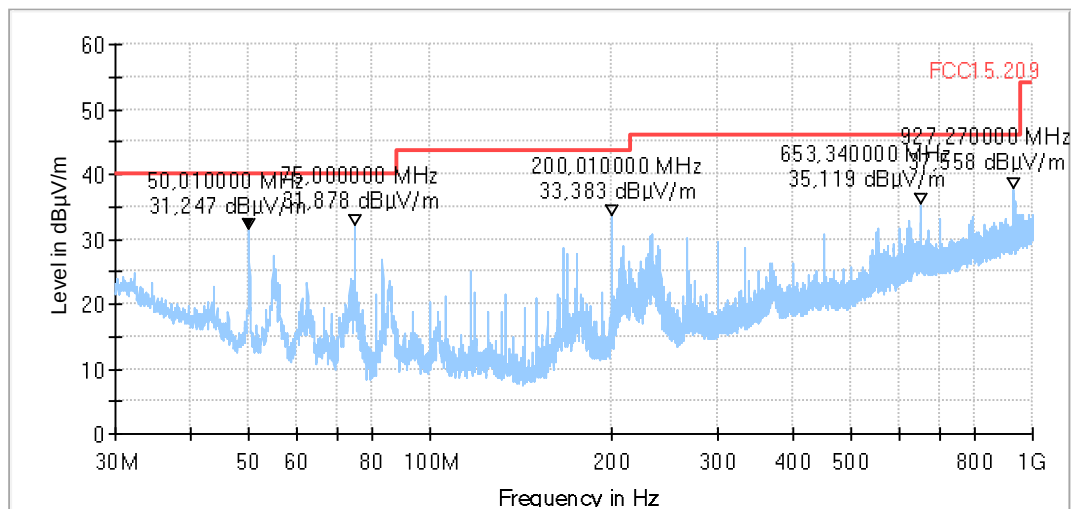

Remark: The peak at 927 MHz is known external disturbance and does not come from EUT.


3.02a_BT_LE_mid_standing

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 RSS Gen Issue 5 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TCH mode
Operator Name:	
Comment:	Channel no. middle
Operating Mode:	BLE TX ch2442
Environmental Conditions:	Humidity : 66%rH; Temperature: 21°C
Operator:	PMa
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH
	Full Spectrum

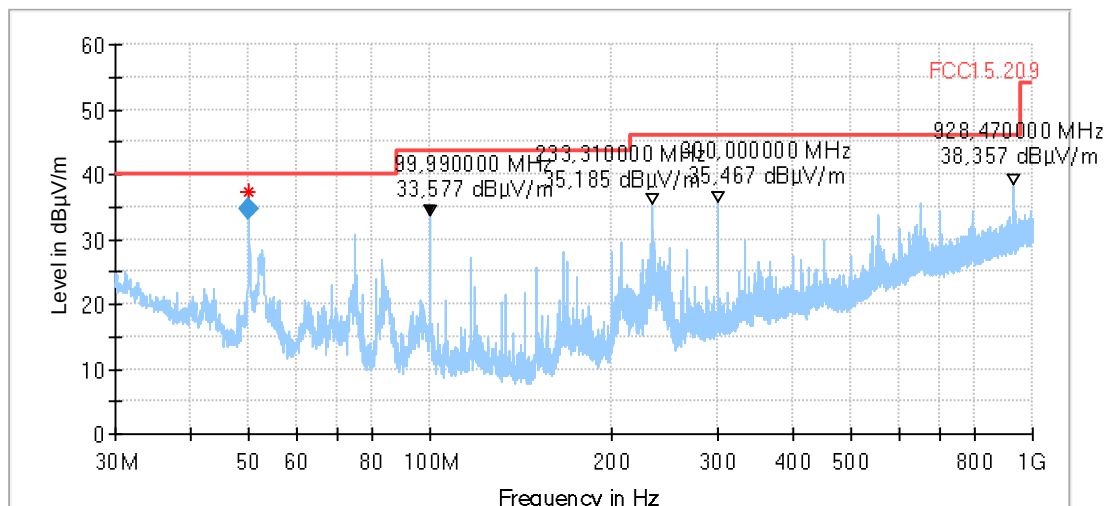

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

3.02b_BT_LE_mid_laying


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 RSS Gen Issue 5 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TCH mode
Operator Name:	
Comment:	Channel no. middle
Operating Mode:	BLE TX ch2442
Environmental Conditions:	Humidity : 66%rH; Temperature: 21°C
Operator:	PMa
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

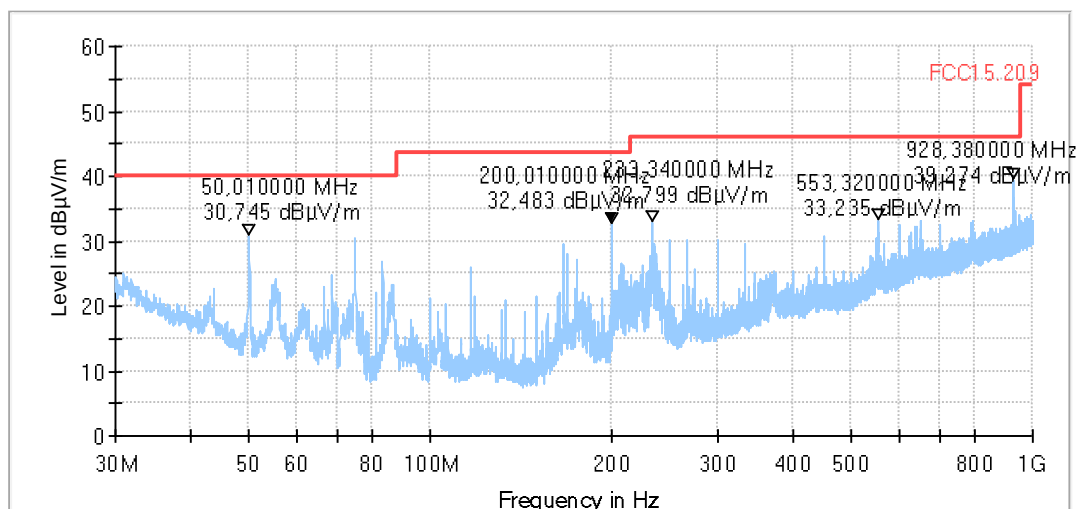

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

3.03a_BT_LE_high_standing


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 RSS Gen Issue 5 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TCH mode
Operator Name:	
Comment:	Channel no. high
Operating Mode:	BLE TX ch2480
Environmental Conditions:	Humidity : 66%rH; Temperature: 21°C
Operator:	PMa
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

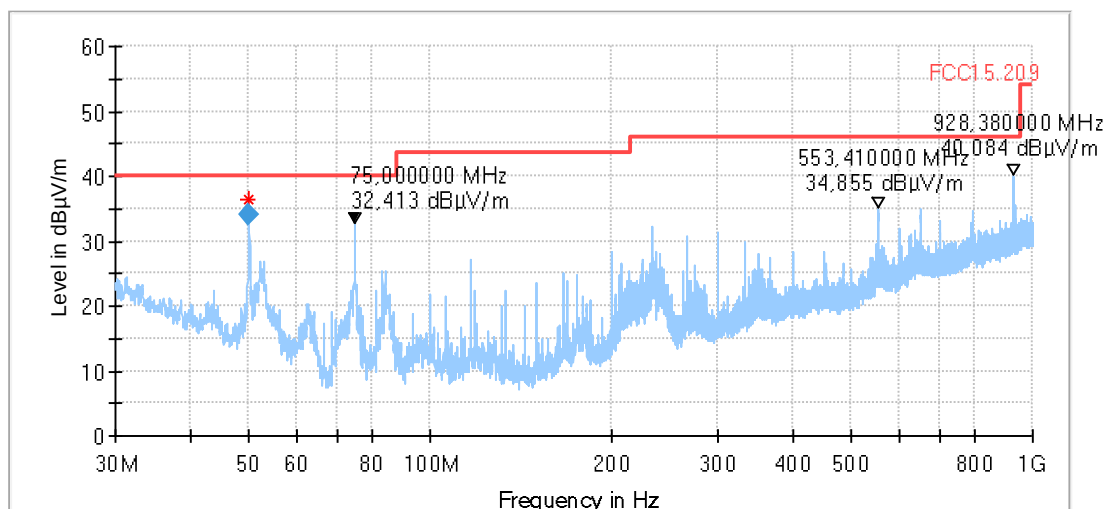

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

3.03b_BT_LE_high_laying


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 RSS Gen Issue 5 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TCH mode
Operator Name:	
Comment:	Channel no. high
Operating Mode:	BLE TX ch2480
Environmental Conditions:	Humidity : 66%rH; Temperature: 21°C
Operator:	PMa
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

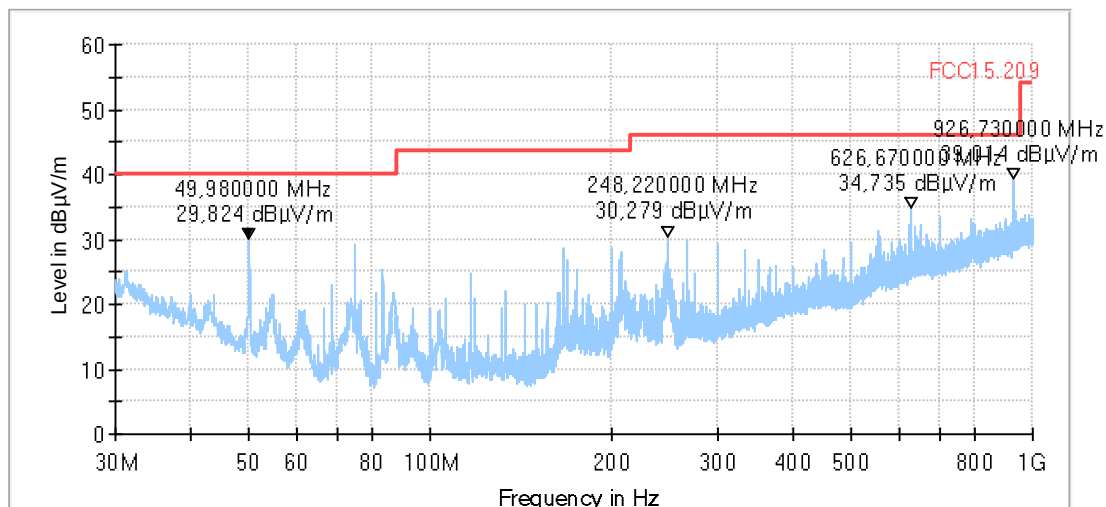

Remark: The peak at 926 MHz is known external disturbance and does not come from EUT.

4.01a_BT_LE_low


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	TX 2402MHz CH 0 GFSK PRBS9
Operator:	TFra
Comment2:	Humidity : 55%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

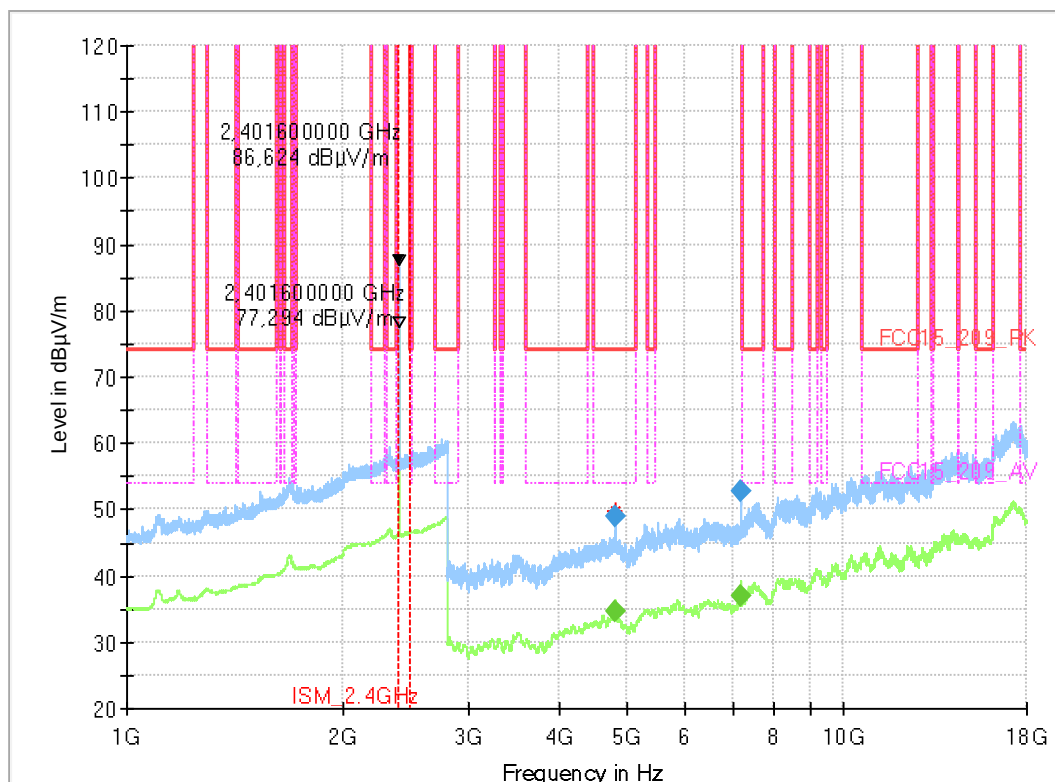

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Elevation
4803.600000	---	34.48	54.00	19.52	100.0	1000.000	155.0	H	307.0	90.0
4804.400000	48.89	---	74.00	25.11	100.0	1000.000	155.0	H	306.0	90.0
7204.800000	---	37.07	150.00	112.93	100.0	1000.000	155.0	V	39.0	0.0
7205.200000	52.62	---	150.00	97.38	100.0	1000.000	155.0	V	38.0	0.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
4803.600000	6	14:52:02 - 11.09.2020
4804.400000	6	14:47:59 - 11.09.2020
7204.800000	12	14:50:03 - 11.09.2020
7205.200000	12	14:46:01 - 11.09.2020

4.02a_BT_LE_mid


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	TX 2440 MHz CH 19 GFSK PRBS9
Operator:	TFra
Comment2:	Humidity : 55%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

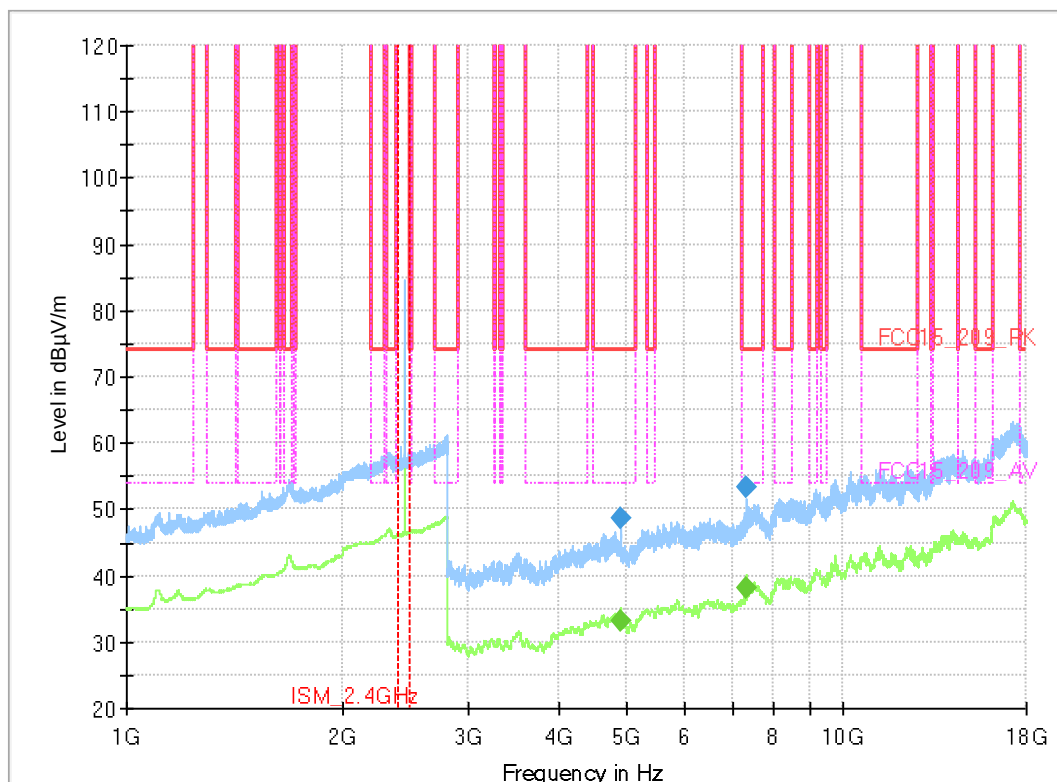

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Elevation
4883.200000	---	33.05	54.00	20.95	100.0	1000.000	155.0	H	312.0	90.0
4883.200000	48.55	---	74.00	25.45	100.0	1000.000	155.0	H	310.0	90.0
7325.200000	---	38.17	54.00	15.83	100.0	1000.000	155.0	V	40.0	0.0
7326.000000	53.40	---	74.00	20.60	100.0	1000.000	155.0	V	39.0	0.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
4883.200000	6	16:30:09 - 11.09.2020
4883.200000	6	16:26:06 - 11.09.2020
7325.200000	13	16:28:10 - 11.09.2020
7326.000000	13	16:24:08 - 11.09.2020

4.03a_BT_LE_high


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	TX 2480MHz CH 39 GFSK PRBS9
Operator:	TFra
Comment2:	Humidity : 55%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

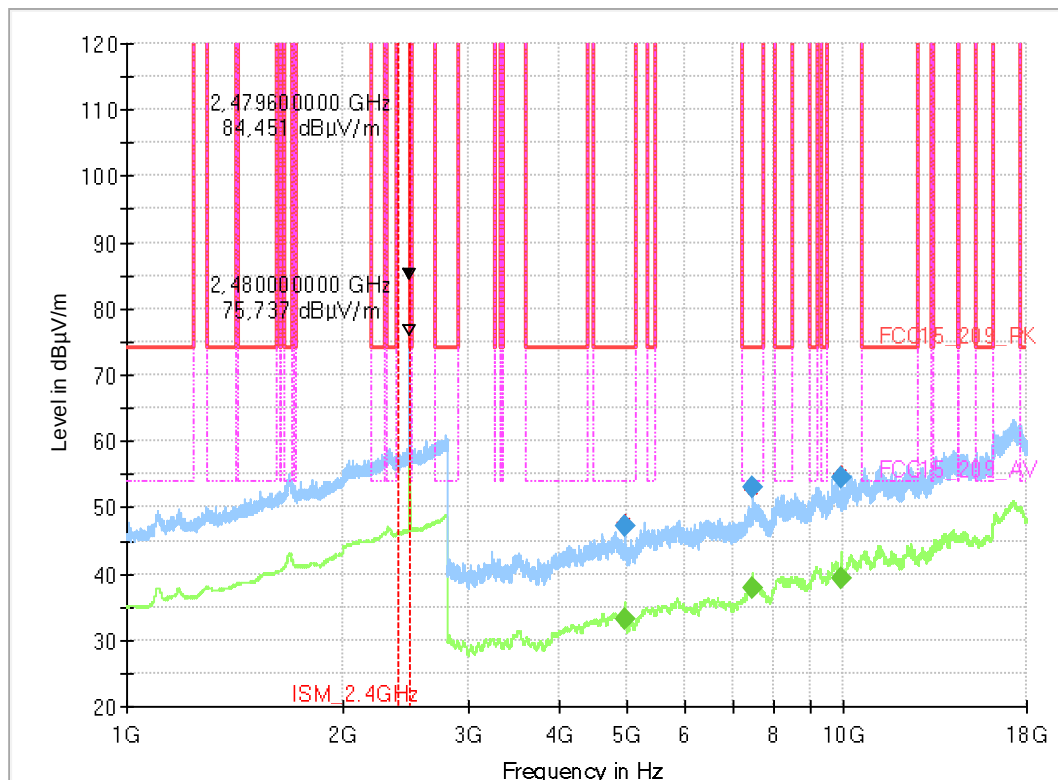

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Elevation
4959.200000	47.17	---	74.00	26.83	100.0	1000.000	155.0	H	135.0	90.0
4959.600000	---	33.29	54.00	20.71	100.0	1000.000	155.0	H	134.0	90.0
7439.200000	---	37.82	54.00	16.18	100.0	1000.000	155.0	V	179.0	0.0
7439.200000	53.17	---	74.00	20.83	100.0	1000.000	155.0	V	187.0	0.0
9918.800000	---	39.43	150.00	110.57	100.0	1000.000	155.0	V	225.0	90.0
9920.400000	54.62	---	150.00	95.38	100.0	1000.000	155.0	V	224.0	90.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
4959.200000	5	17:42:39 - 11.09.2020
4959.600000	5	17:47:33 - 11.09.2020
7439.200000	13	17:45:46 - 11.09.2020
7439.200000	13	17:40:52 - 11.09.2020
9918.800000	17	17:49:09 - 11.09.2020
9920.400000	17	17:44:15 - 11.09.2020

4.01b_BT_LE_low

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	TX 2402MHz CH 0 GFSK PRBS9
Operator:	TFra
Comment2:	Humidity : 55%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH




4.02b_BT_LE_mid

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	TX 2440 MHz CH 20 GFSK PRBS9
Operator:	TFra
Comment2:	Humidity : 55%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

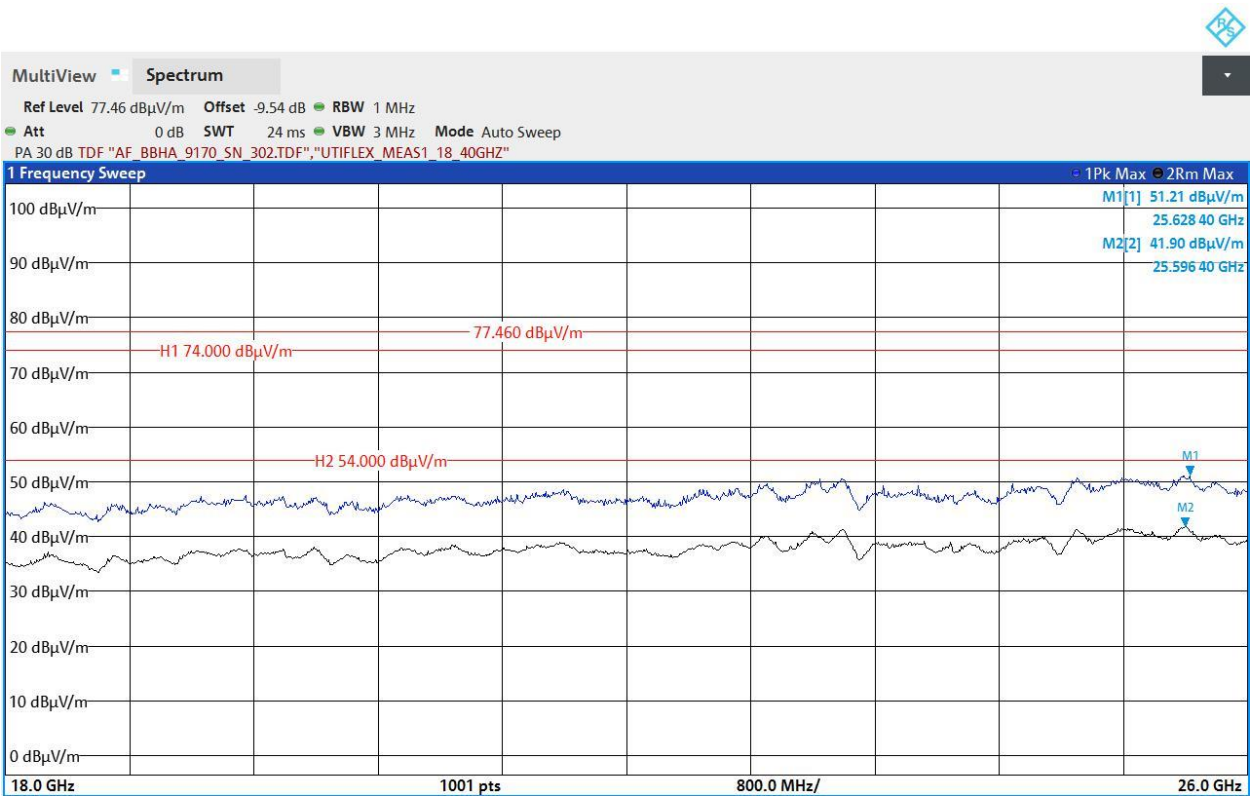


4.03b_BT_LE_high

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	TX 2480MHz CH 39 GFSK PRBS9
Operator:	TFra
Comment2:	Humidity : 55%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

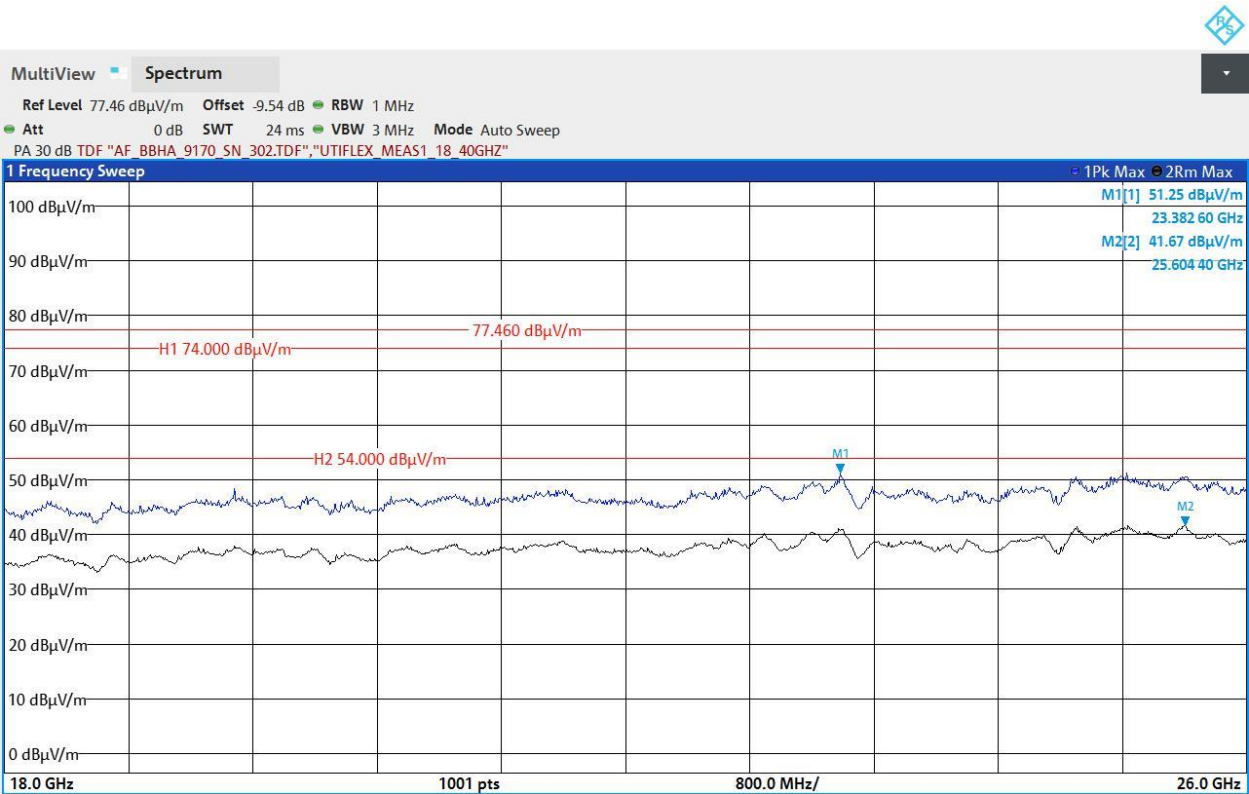

9.01a_BE_BT_LE_low


Common Information

Test Description:	Band-Edge: Radiated Field Strength Emissions Emissions in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	TX 2402MHz CH 0 GFSK PRBS9
Operator:	TFra
Comment:	Channel no. low
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

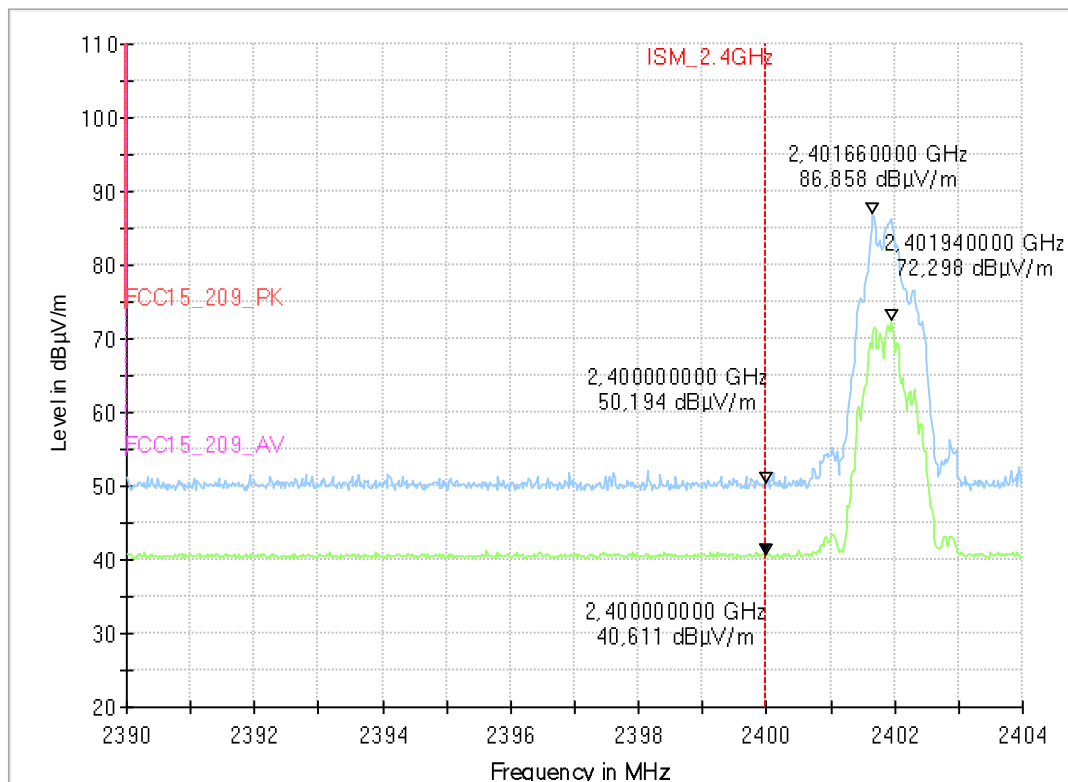

9.01b_BE_BT_LE_high


Common Information

Test Description:	Band-Edge: Radiated Field Strength Emissions Emissions in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	TX 2480MHz CH 39 GFSK PRBS9
Operator:	TFra
Comment:	
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S102_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

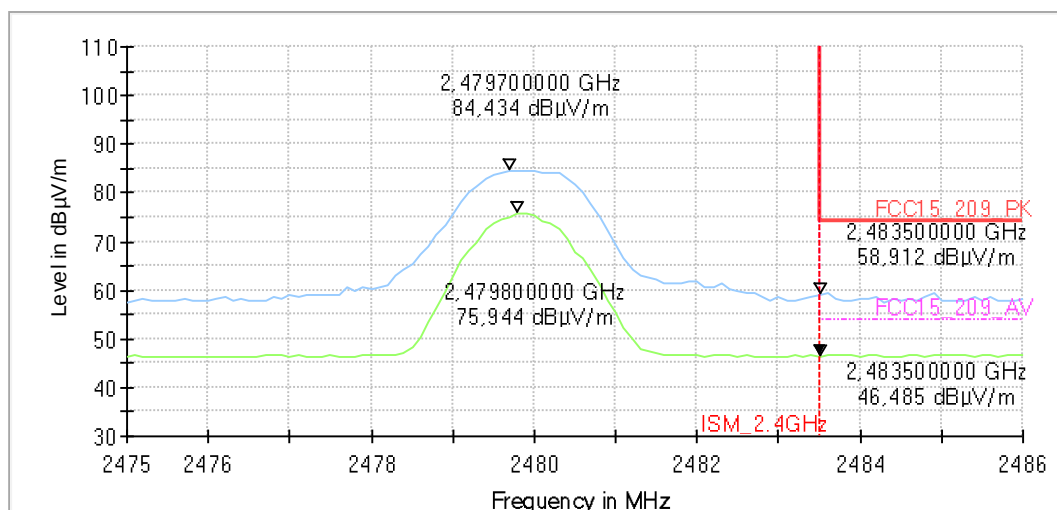

1.2 Conducted measurements

Minimum Emission Bandwidth 6 dB

Mode	DUT Frequency	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left	Band Edge Right
BT-LE GFSK	2402.0000	0.693070	0.500000	---	2401.5445	2402.2376
BT-LE GFSK	2440.0000	0.693070	0.500000	---	2439.5445	2440.2376
BT-LE GFSK	2480.0000	0.693070	0.500000	---	2479.5445	2480.2376

Peak output power (Sweep)

Mode	DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
BT-LE GFSK	2402.000000	7.2	30.0	PASS
BT-LE GFSK	2440.000000	7.2	30.0	PASS
BT-LE GFSK	2480.000000	7.0	30.0	PASS

RF output power

Mode	DUT Frequency	Gated RMS	Limit Max (dBm)	Gated EIRP	DutyCycle (%)	Result
BT-LE GFSK	2402.0000	6.8	30.0	6.8	65.458	PASS
BT-LE GFSK	2440.0000	6.7	30.0	6.7	65.468	PASS
BT-LE GFSK	2480.0000	6.6	30.0	6.6	65.467	PASS

Peak Power Spectral Density

Mode	DUT Frequency	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
BT-LE GFSK	2402.000000	2401.862500	-2.631	8.0	PASS
BT-LE GFSK	2440.000000	2439.892500	-2.590	8.0	PASS
BT-LE GFSK	2480.000000	2479.857500	-2.731	8.0	PASS

Occupied Channel Bandwidth 99%

Mode	DUT Frequency	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left	Band Edge Right
BT-LE GFSK	2402.0000	1.025000	---	---	2401.3975	2402.4225
BT-LE GFSK	2440.0000	1.030000	---	---	2439.3925	2440.4225
BT-LE GFSK	2480.0000	1.025000	---	---	2479.3925	2480.4175

Tx Spurious Emission

Mode	DUT Frequency (MHz)	Result
BT-LE GFSK	2402.000000	PASS
BT-LE GFSK	2440.000000	PASS
BT-LE GFSK	2480.000000	PASS

Minimum Emission Bandwidth 6 dB (2402 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.693070	0.500000	---	2401.544554	2402.237624

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	7.1	PASS



Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.03 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2440 MHz; 10,000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.693070	0.500000	---	2439.544554	2440.237624

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	7.0	PASS

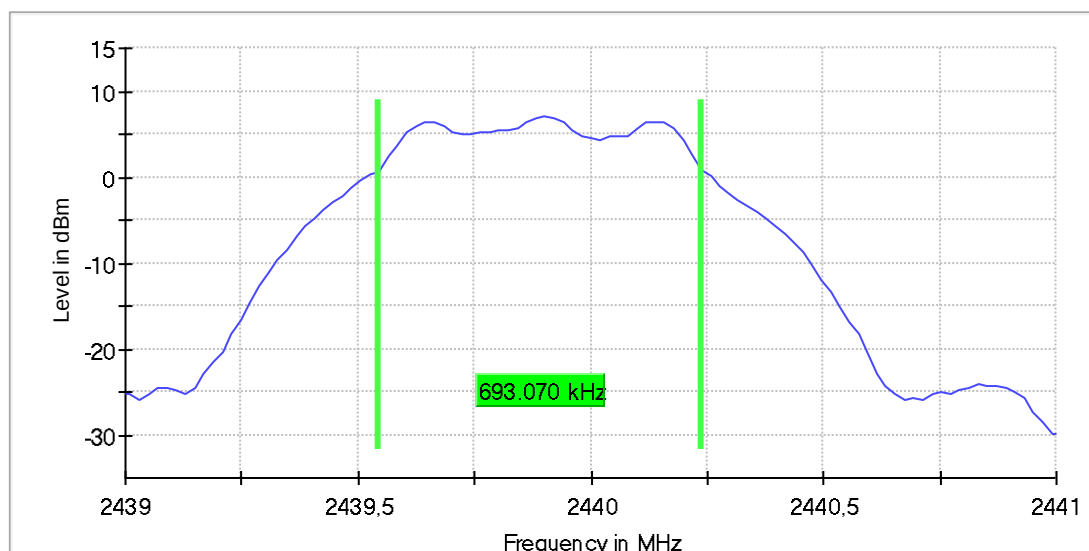

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.01 dB	0.50 dB

Minimum Emission Bandwidth 6 dB (2480 MHz; 10,000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.693070	0.500000	---	2479.544554	2480.237624

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	6.9	PASS

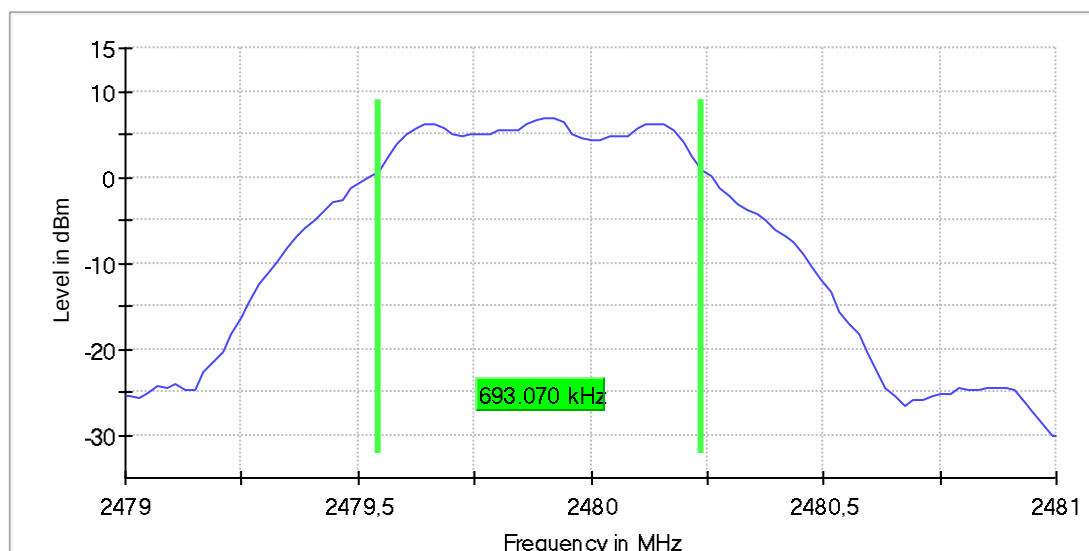

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	1.000 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.08 dB	0.50 dB

Peak output power (Sweep) (2402 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	7.2	30.0	PASS

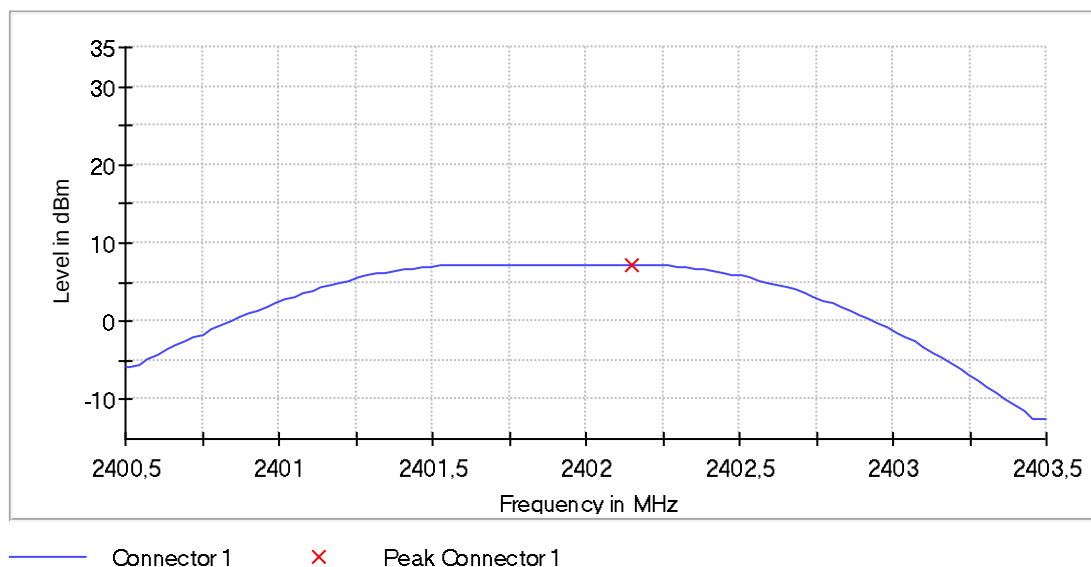

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40050 GHz	2.40050 GHz
Stop Frequency	2.40350 GHz	2.40350 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 693.071 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.05 dB	0.50 dB

Peak output power (Sweep) (2440 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2440.000000	7.2	30.0	PASS

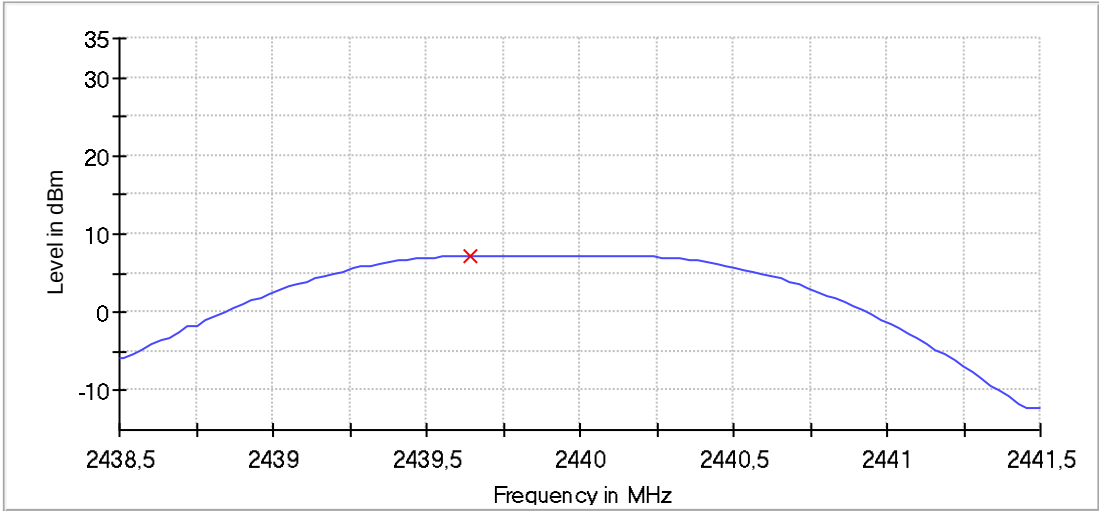

Connector 1 X Peak Connector 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.43850 GHz	2.43850 GHz
Stop Frequency	2.44150 GHz	2.44150 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 693.071 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.08 dB	0.50 dB

Peak output power (Sweep) (2480 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2480.000000	7.0	30.0	PASS

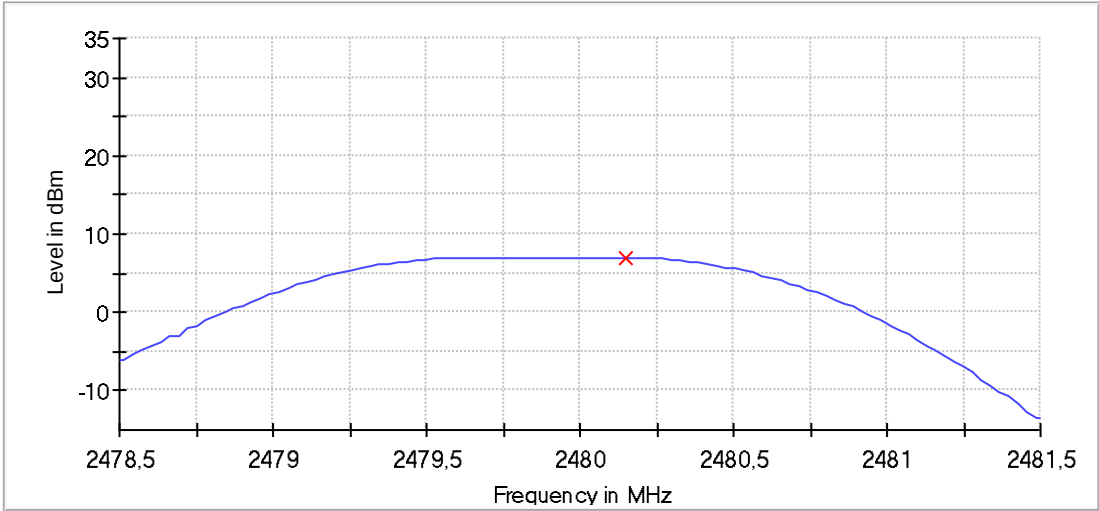

Connector 1 X Peak Connector 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.47850 GHz	2.47850 GHz
Stop Frequency	2.48150 GHz	2.48150 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 693.071 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.16 dB	0.50 dB

RF output power (2402 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2402.000000	6.8	30.0	6.8	65.458	PASS

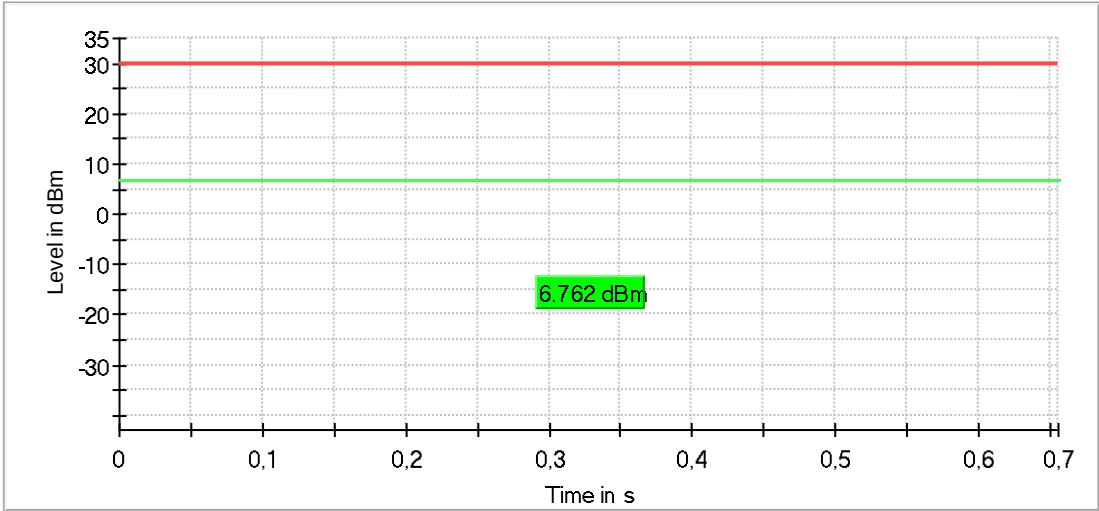

— Gated Trace — Overall — Limit

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (2440 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2440.000000	6.7	30.0	6.7	65.468	PASS

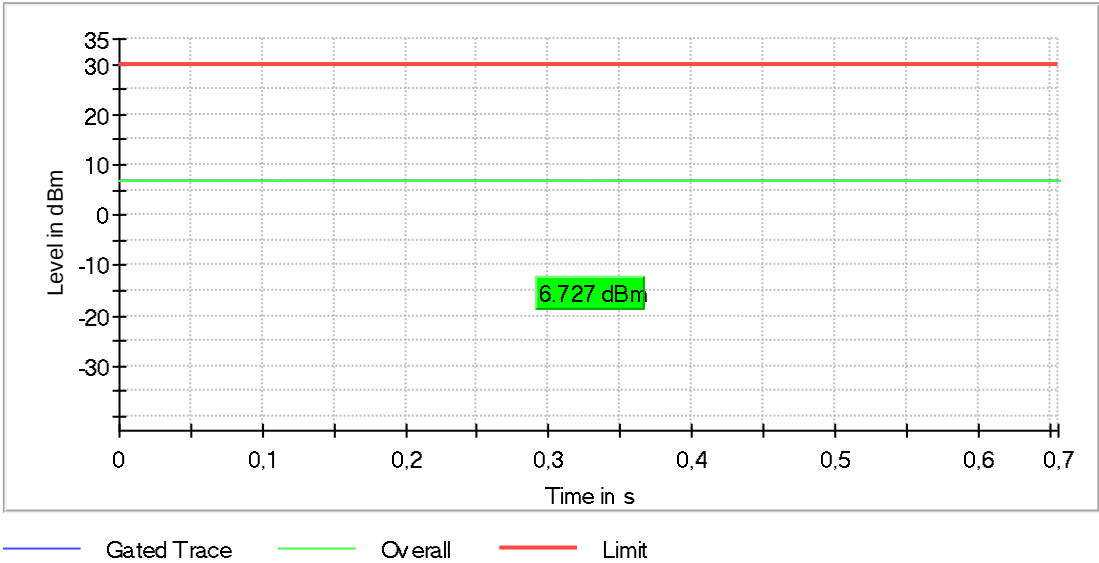

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

RF output power (2480 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2480.000000	6.6	30.0	6.6	65.467	PASS

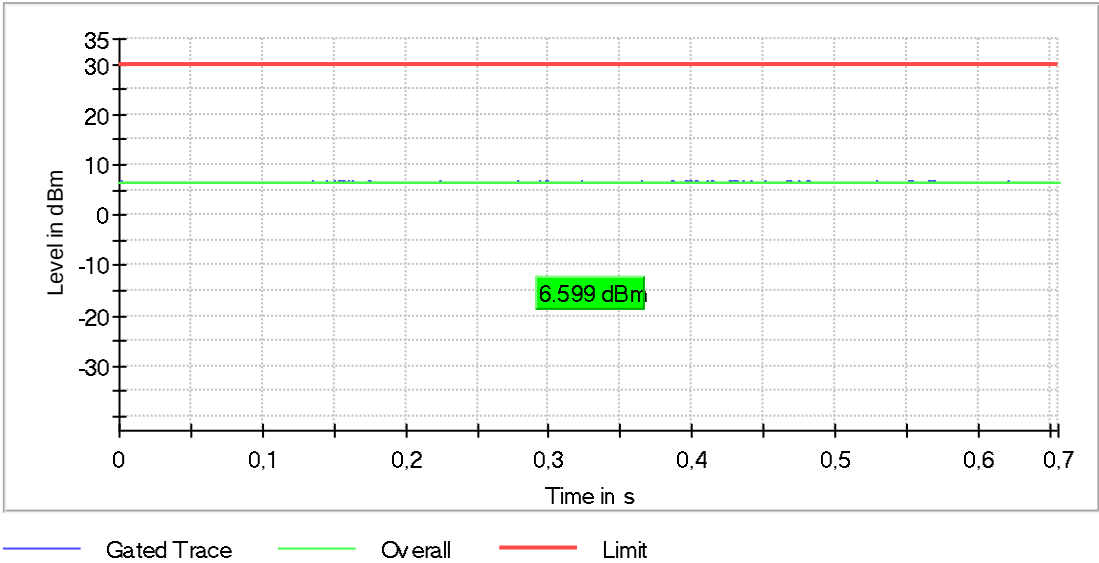

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

Peak Power Spectral Density (2402 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2402.000000	2401.862500	-2.631	8.0	PASS

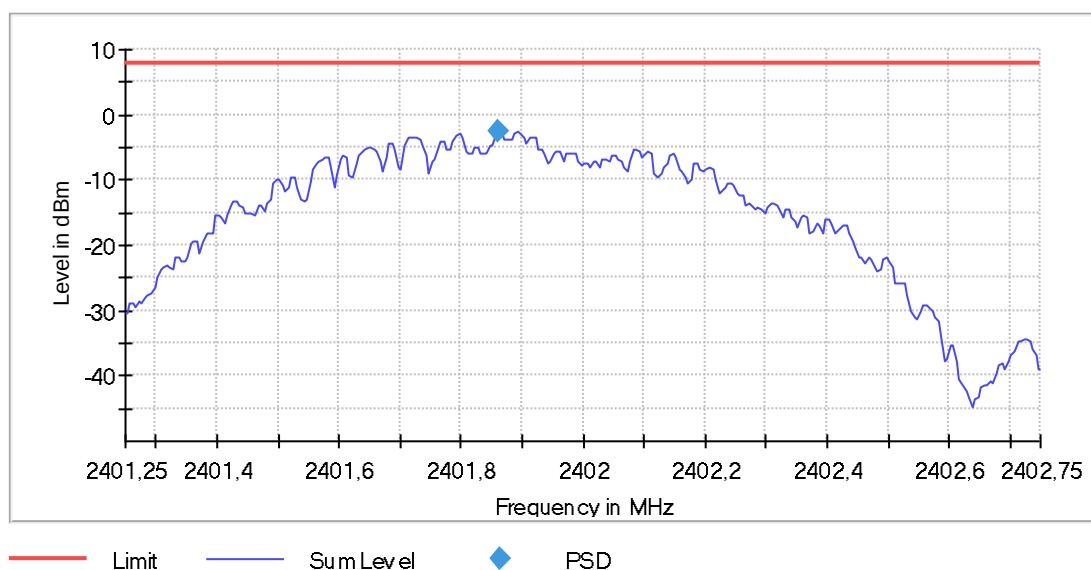

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.40125 GHz	2.40125 GHz
Stop Frequency	2.40275 GHz	2.40275 GHz
Span	1.500 MHz	1.500 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	300	~ 300
SweepTime	1.500 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.28 dB	0.50 dB

Peak Power Spectral Density (2440 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2440.000000	2439.892500	-2.590	8.0	PASS

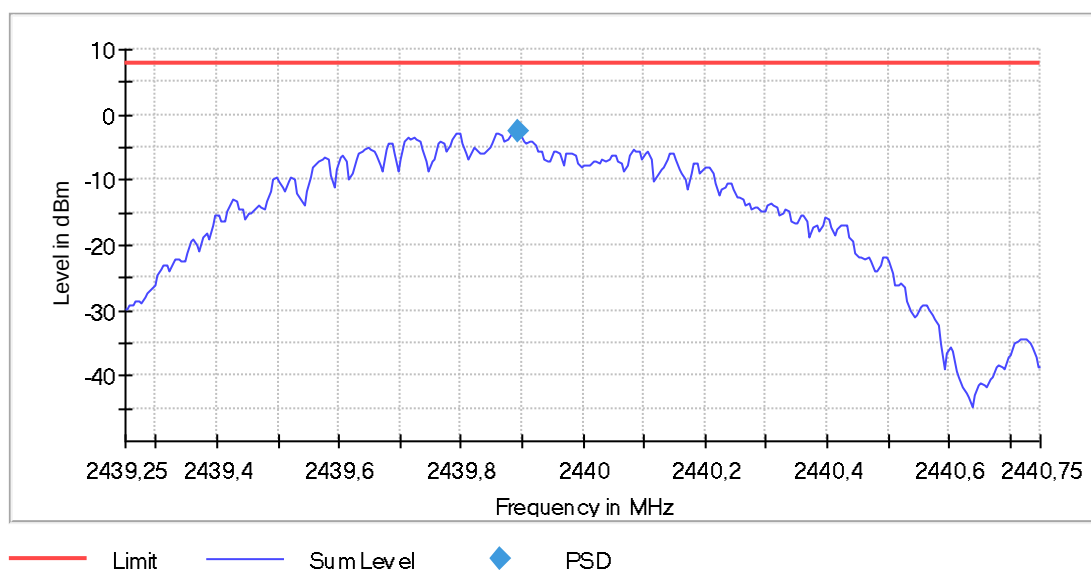

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.43925 GHz	2.43925 GHz
Stop Frequency	2.44075 GHz	2.44075 GHz
Span	1.500 MHz	1.500 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	300	~ 300
SweepTime	1.500 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.26 dB	0.50 dB

Peak Power Spectral Density (2480 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a),(e), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2480.000000	2479.857500	-2.731	8.0	PASS

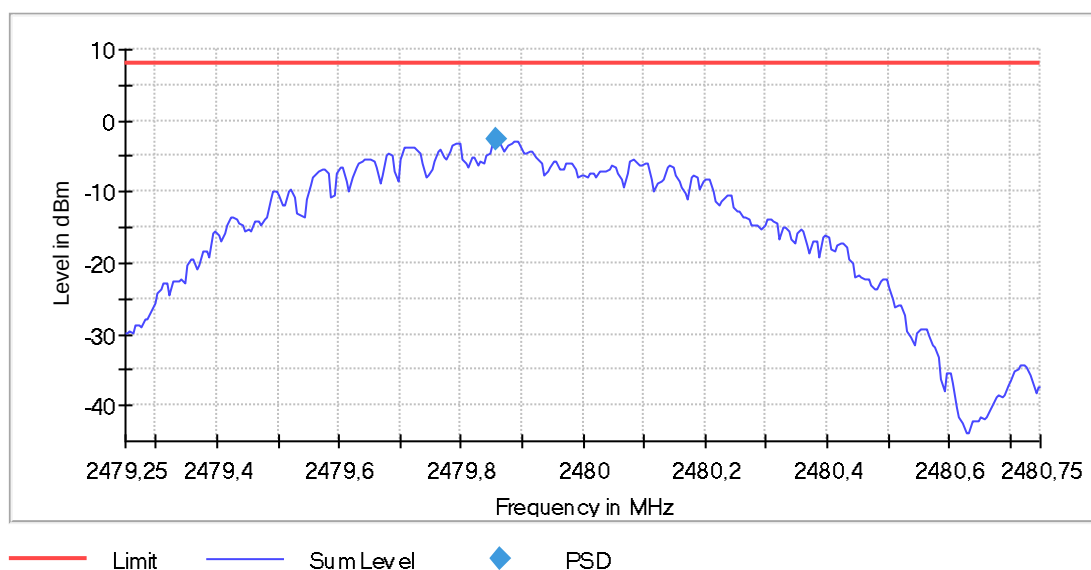

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47925 GHz	2.47925 GHz
Stop Frequency	2.48075 GHz	2.48075 GHz
Span	1.500 MHz	1.500 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	300	~ 300
SweepTime	1.500 ms	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.19 dB	0.50 dB

Occupied Channel Bandwidth 99% (2402 MHz; 10,000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.025000	---	---	2401.397500	2402.422500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

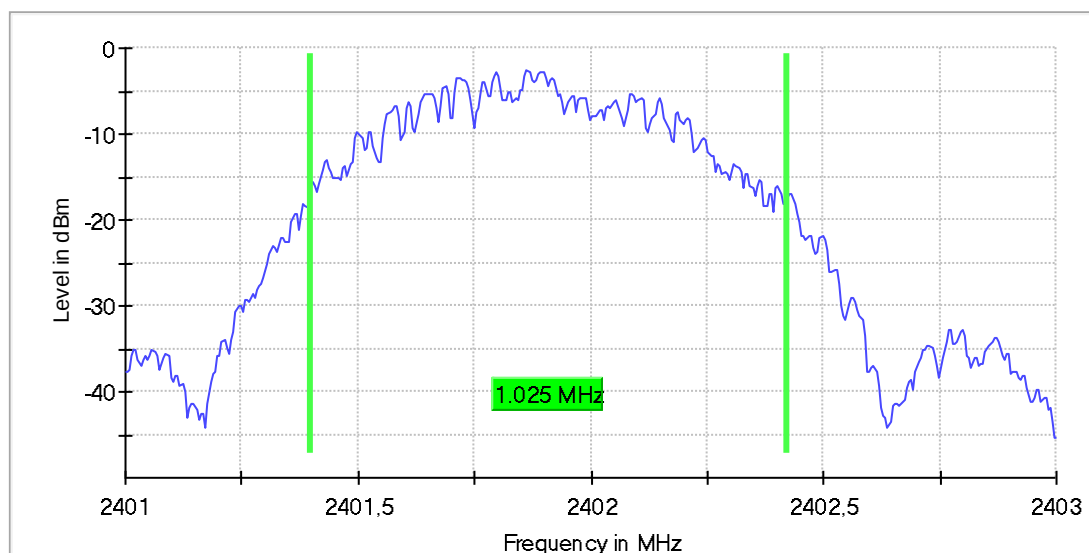

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	419.000 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	5 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.20 dB	0.30 dB

Occupied Channel Bandwidth 99% (2440 MHz; 10,000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.030000	---	---	2439.392500	2440.422500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

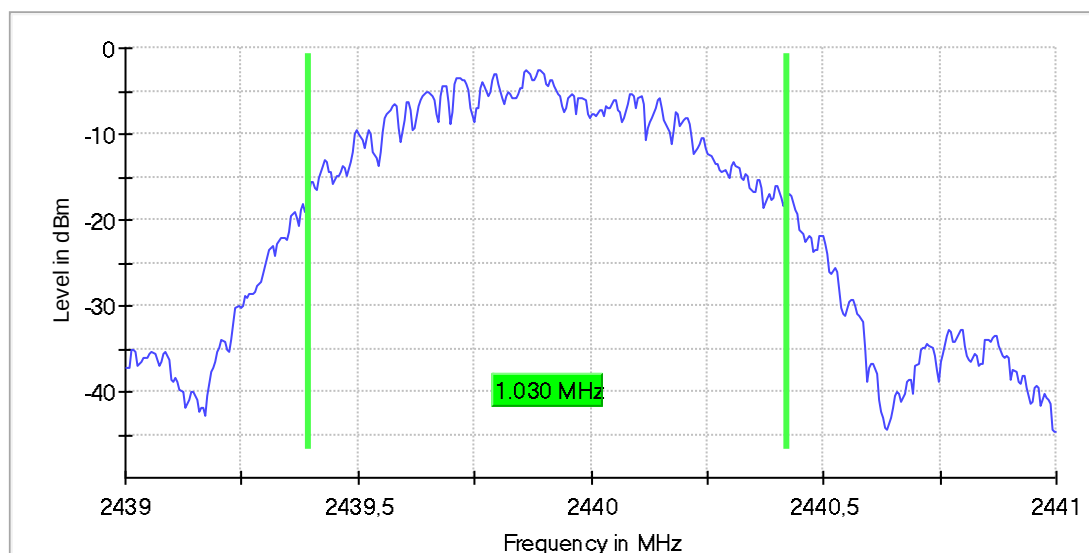

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	419.000 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.28 dB	0.30 dB

Occupied Channel Bandwidth 99% (2480 MHz; 10,000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.025000	---	---	2479.392500	2480.417500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

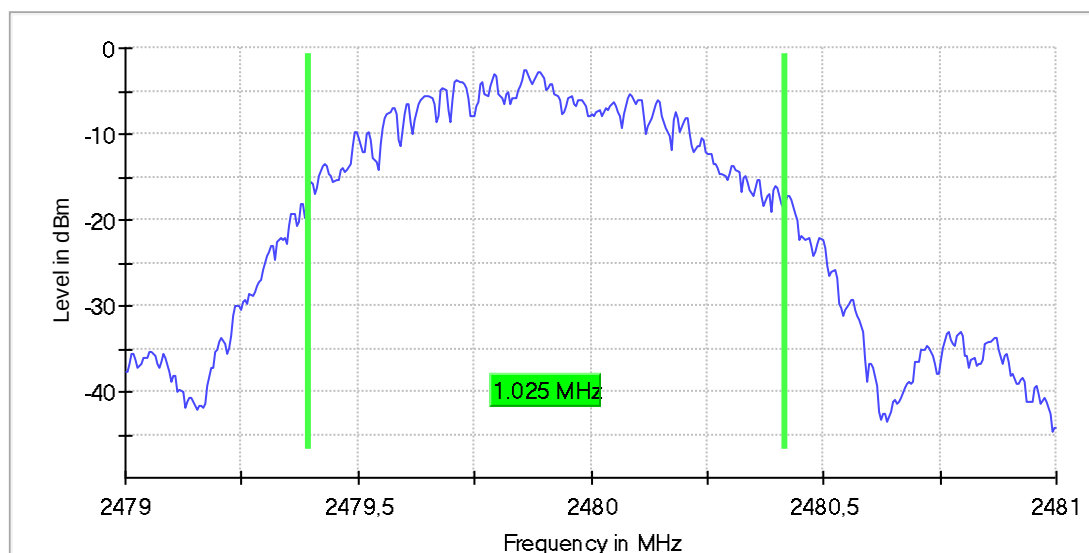

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	419.000 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.18 dB	0.30 dB

Tx Spurious Emission (2402 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
2402.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
2399.908789	5.2	-58.3	-13.9	44.4	PASS


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2395.021008	7.1	-21.0	-13.9
2385.063025	-49.8	35.9	-13.9
14411.652465	-51.3	37.4	-13.9
791.785714	-51.8	38.0	-13.9
2365.147059	-54.2	40.4	-13.9
19208.898534	-54.5	40.6	-13.9
781.827731	-54.6	40.7	-13.9
19218.892796	-54.8	40.9	-13.9
2335.273109	-56.7	42.8	-13.9
2375.105042	-56.9	43.1	-13.9
2355.189076	-57.3	43.4	-13.9
21617.515831	-57.5	43.6	-13.9
4807.166065	-58.3	44.4	-13.9
921.239496	-60.2	46.3	-13.9
1837.373950	-60.3	46.4	-13.9


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	2400.000000	1	1
2400.000000	2483.500000	1	1
2483.500000	26000.000000	1	1

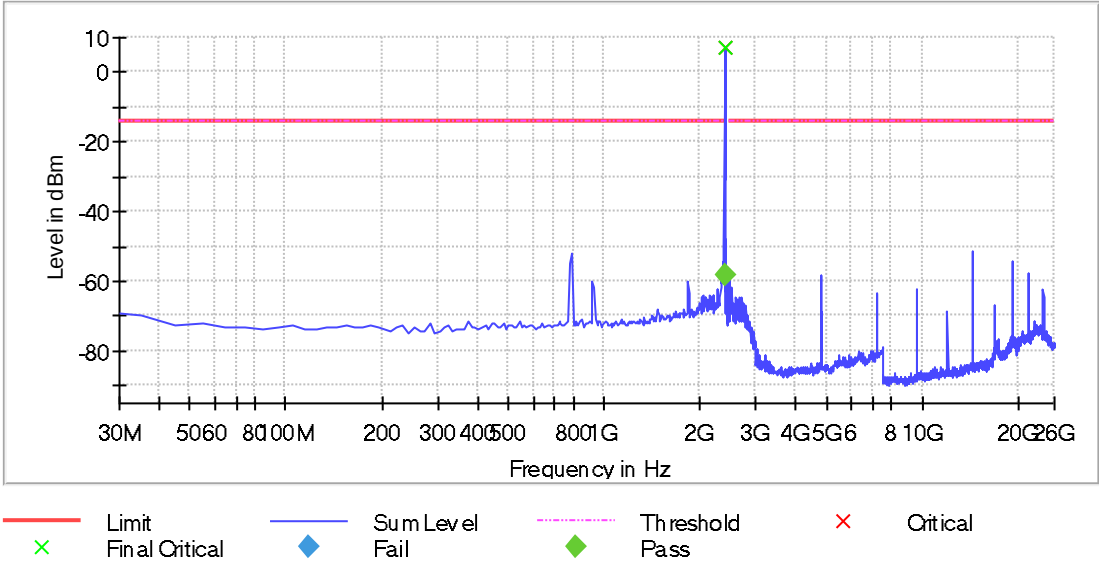


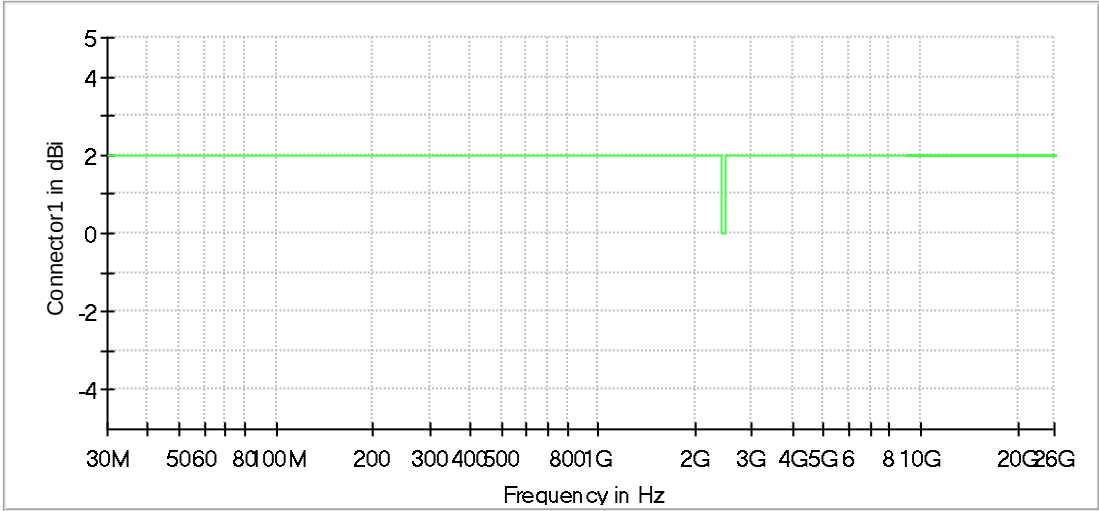

Connector1

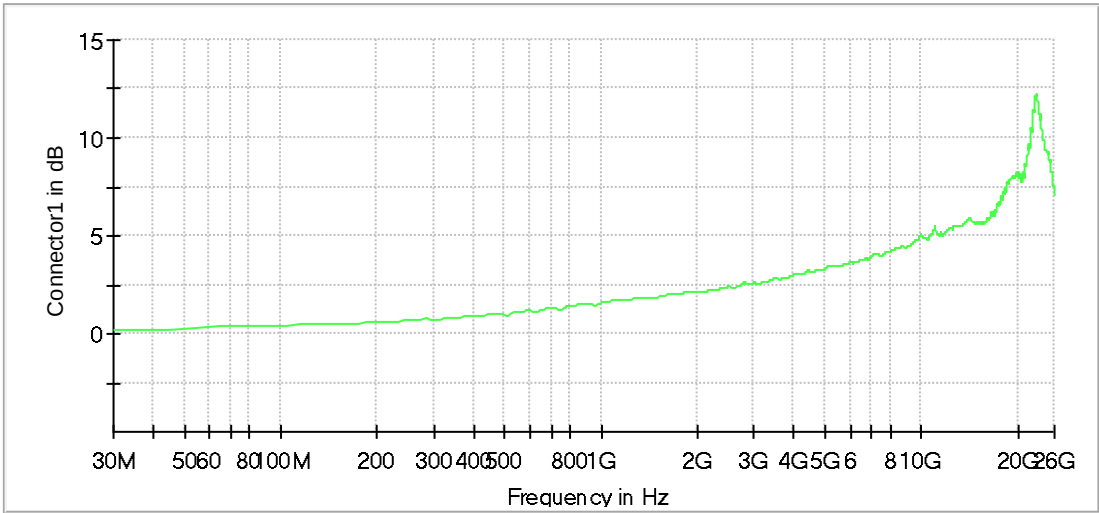

Connector1

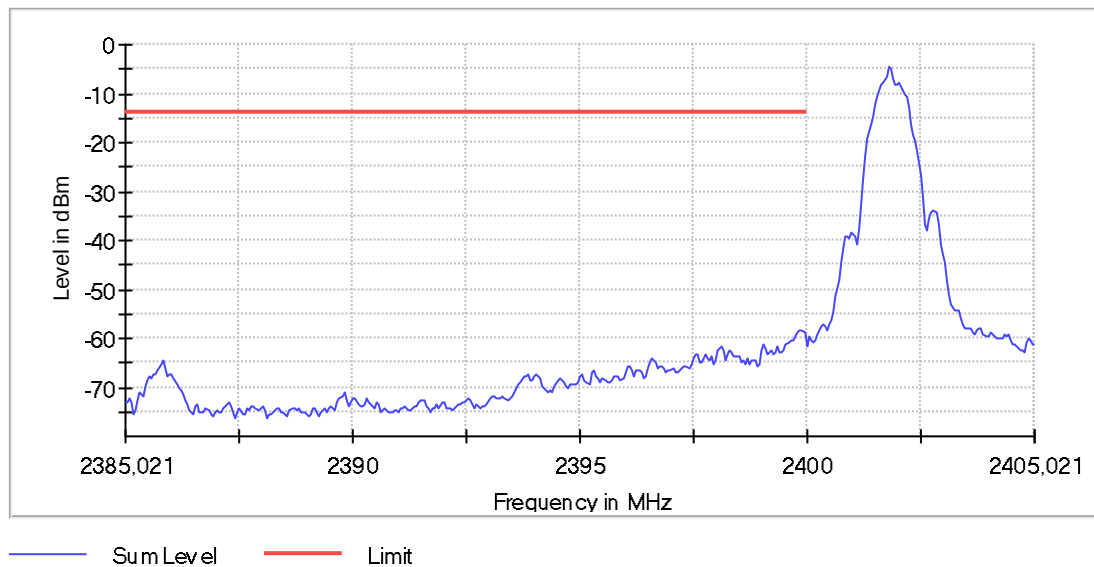

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	238	~ 238
SweepTime	23.700 ms	AUTO
Reference Level	-10.000 dBm	-30.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Final Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	401	~ 401
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	Sample	Sample
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Average Linear	Average Linear
SweepType	Sweep	AUTO
Preamp	off	off

Tx Spurious Emission (2440 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
2440.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
791.785714	-48.6	34.0	-14.6
781.827731	-50.0	35.5	-14.6
14641.520506	-52.8	38.2	-14.6
2508.485657	-54.5	39.9	-14.6
21957.320761	-55.0	40.4	-14.6
19518.720676	-55.6	41.0	-14.6
2375.105042	-55.6	41.0	-14.6
4877.125903	-56.6	42.0	-14.6
2395.021008	-57.0	42.4	-14.6
2488.497131	-58.0	43.4	-14.6
921.239496	-58.5	44.0	-14.6
2385.063025	-58.8	44.2	-14.6
2568.451232	-61.0	46.5	-14.6
931.197479	-61.5	46.9	-14.6
9754.326073	-61.6	47.1	-14.6


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	2400.000000	1	1
2400.000000	2483.500000	1	1
2483.500000	26000.000000	1	1

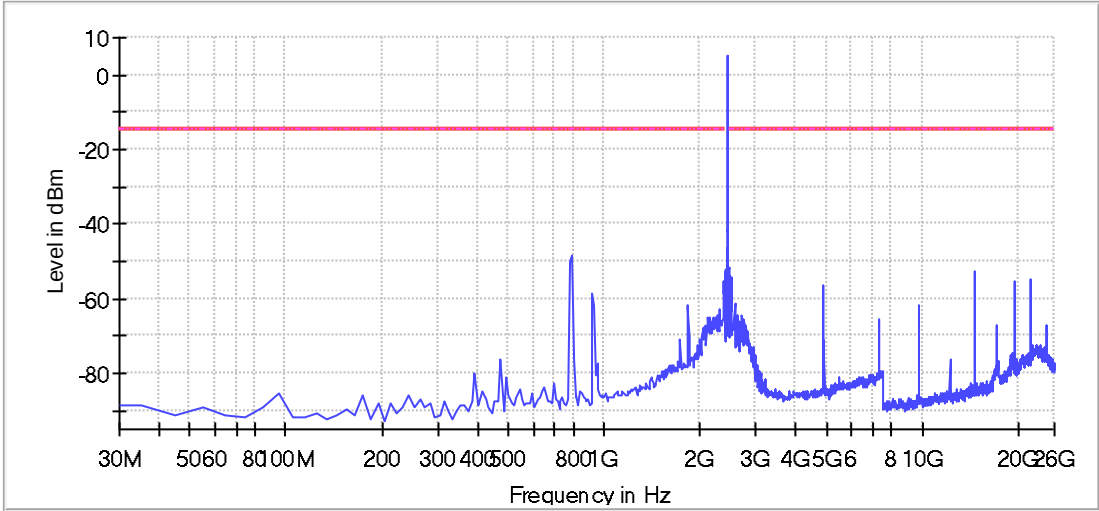

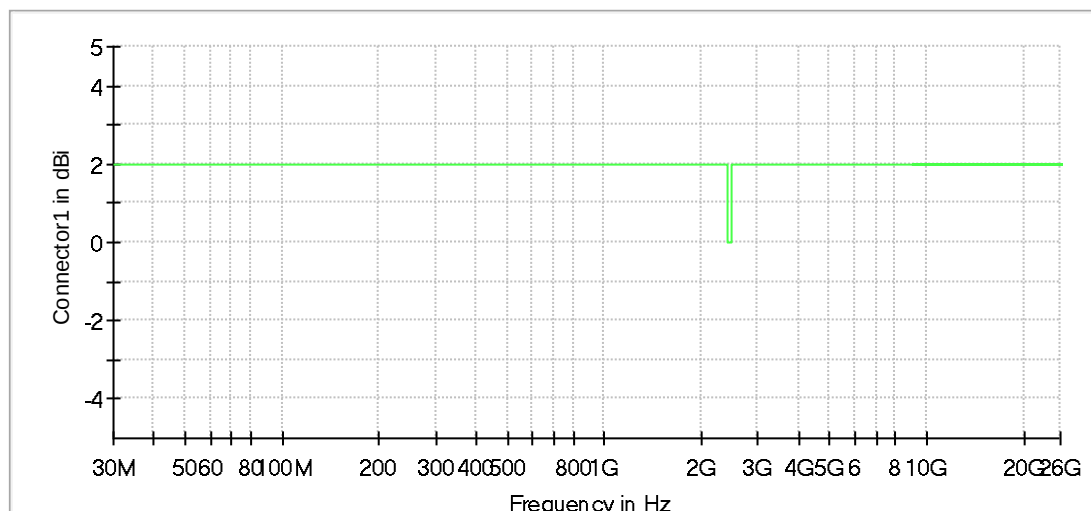

Connector1

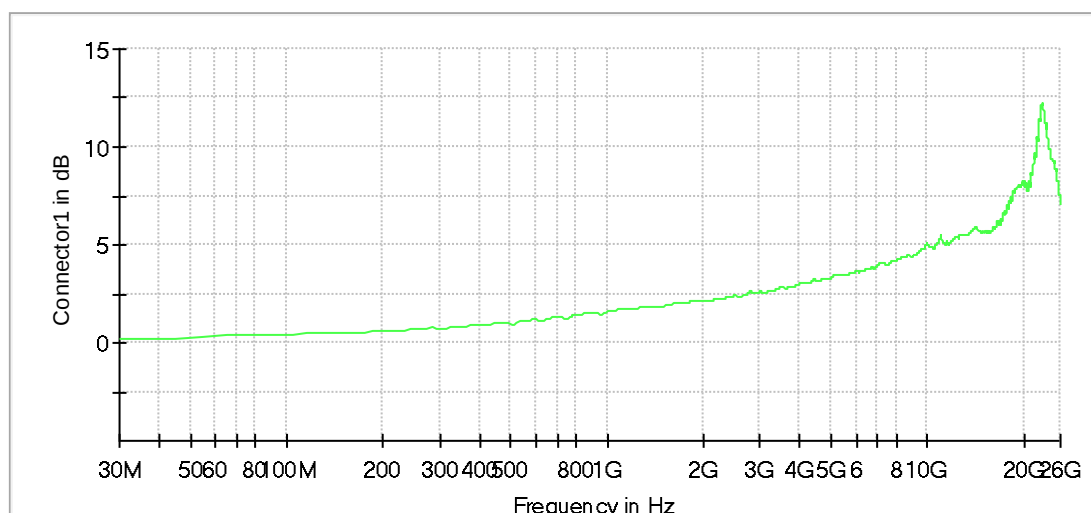

Connector1

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	238	~ 238
SweepTime	23.700 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Tx Spurious Emission (2480 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(d), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Result
2480.000000	PASS

Final measurements


Frequency (MHz)	Level Pre Measurement (dBm)	level (dBm)	Limit (dBm)	Margin (dB)	Result
---	---	---	---	---	---


Pre Measurements

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)
2488.497131	-38.0	24.0	-14.0
2498.491394	-42.8	28.8	-14.0
2508.485657	-49.4	35.4	-14.0
14881.382809	-51.7	37.7	-14.0
23326.534743	-51.8	37.8	-14.0
22826.821611	-52.3	38.3	-14.0
22726.878984	-52.4	38.4	-14.0
22936.758500	-52.5	38.4	-14.0
22846.810136	-52.5	38.5	-14.0
23546.408521	-52.5	38.5	-14.0
791.785714	-52.5	38.5	-14.0
22616.942095	-52.6	38.5	-14.0
23006.718338	-52.6	38.6	-14.0
22966.741288	-52.7	38.7	-14.0
22327.108479	-52.8	38.8	-14.0


Measurement Settings

Start Frequency (MHz)	Stop Frequency (MHz)	Pre Measurement	Final Measurement
30.000000	2400.000000	1	1
2400.000000	2483.500000	1	1
2483.500000	26000.000000	1	1

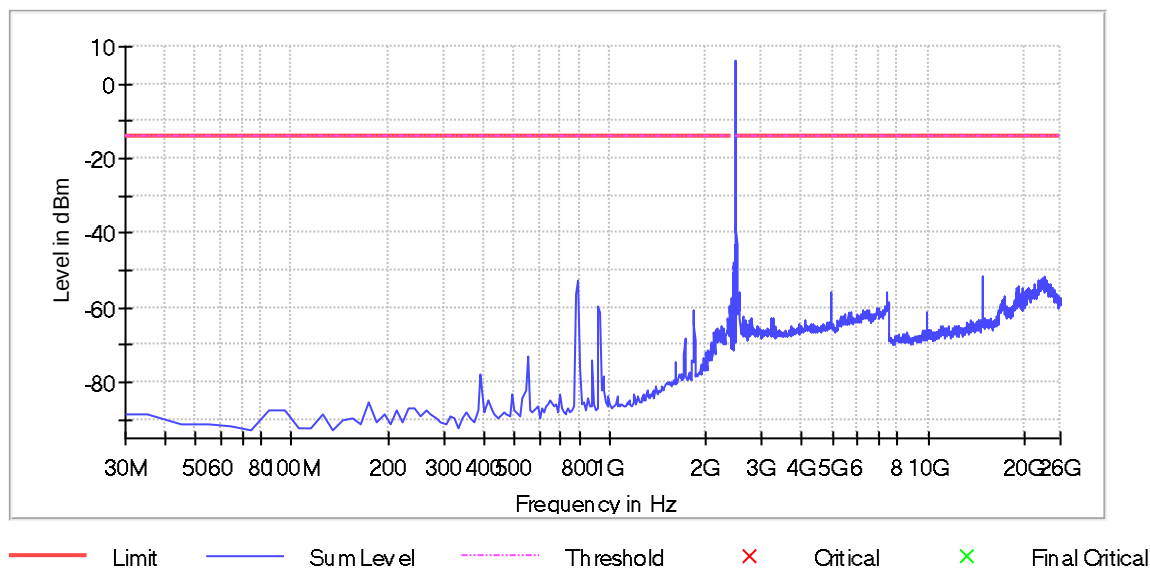

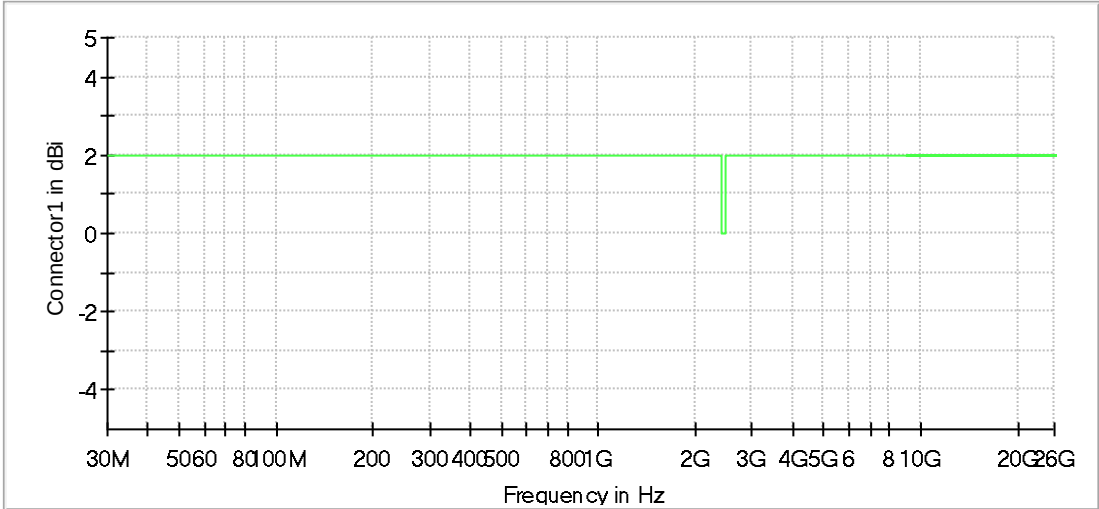

Connector1

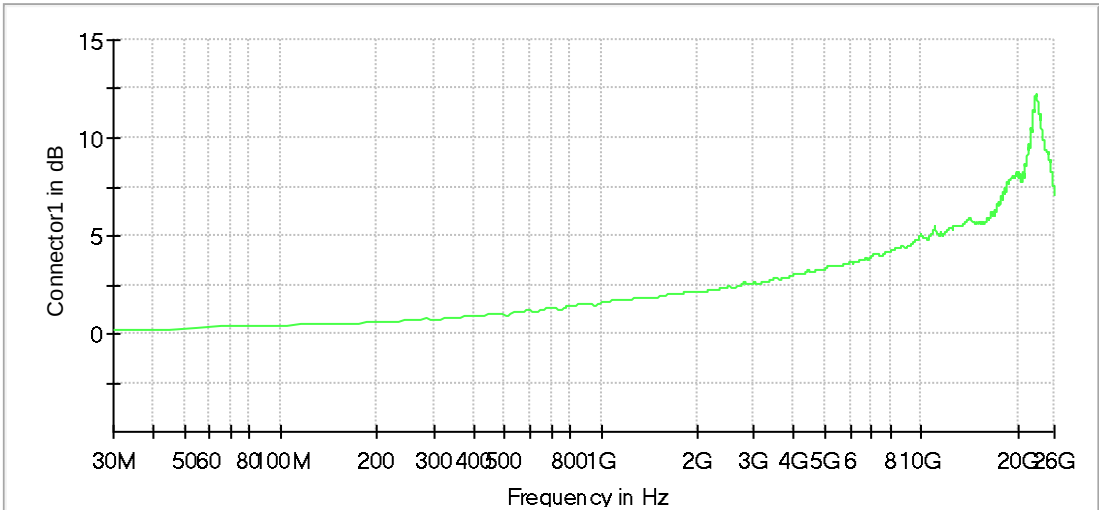

Connector1

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	238	~ 238
SweepTime	23.700 ms	AUTO
Reference Level	-30.000 dBm	-30.000 dBm
Attenuation	0.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

End Of Annex 1