

Annex 1: Measurement diagrams to Test Report 19-1-0069003T28a-A1

Number of pages:	17	Date of Report:	2020-Nov-04
Testing company:	CETECOM GmbH Im Teelbruch 116 45219 Essen Germany Tel. + 49 (0) 20 54 / 95 19-0 Fax: + 49 (0) 20 54 / 95 19-150	Applicant:	WAGO Kontakttechnik GmbH & Co. KG
Test Object / Tested Device(s):	8DIO FLD PN DC 24V 2.0A - SlimLine 765-1104/0100-0000 WAGO I/O System Field		
FCC ID:	2AKUE-SLIMLINE	IC:	22322-SLIMLINE
Testing has been carried out in accordance with:	Title 47 CFR, Chapter I FCC Regulations, Subchapter A §15.247 (DTS) ISED-Regulations RSS-Gen, Issue 5 RSS 247, Issue 2 Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		



Table of Contents

1.1 Radiated measurements.....3

1.2 Conducted measurements12

1 Measurement diagrams

1.1 Radiated measurements

2.01a_BT_LE_low_standing

Common Information


Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5

Operator:	PMa
Operating Mode:	BLE TX ch2402
Comment 1:	Channel low
Comment 2:	
Environmental Conditions:	Humidity : 61%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed
Comment:	

EUT Information

PMT number:	19-1-00690S128_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

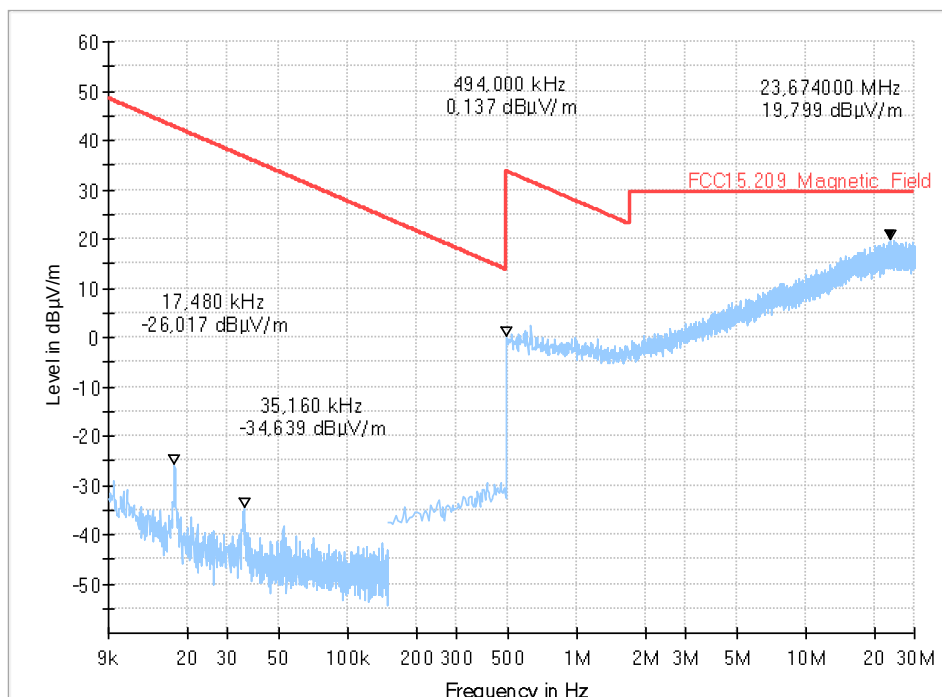

2.01b_BT_LE_low_laying

Common Information


Test Description:	Magnetic Field Strength Measurement related to 30/300 m distance
Test Site Location:	Ref.-Nr. 441 Semi Anechoic Chamber (SAC1) with 3 m measurement distance
Version of Testsoftware:	EMC32 V10.50.0
Distance correction:	used accord. table, pls. see test report
Technical Data:	Please see page 2 for detailed data of measurement setup
Rec. antenna (pre-scan):	height 1.00 m, parallel and 90° to EUT polarisation
Used Filter:	bypass
Test Standard:	FCC 15.205 § 15.209; RSS-Gen: Issue 5

Operator:	PMa
Operating Mode:	BLE TX ch2402
Comment 1:	Channel low
Comment 2:	
Environmental Conditions:	Humidity : 50%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed
Comment:	

EUT Information

PMT number:	19-1-00690S128_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

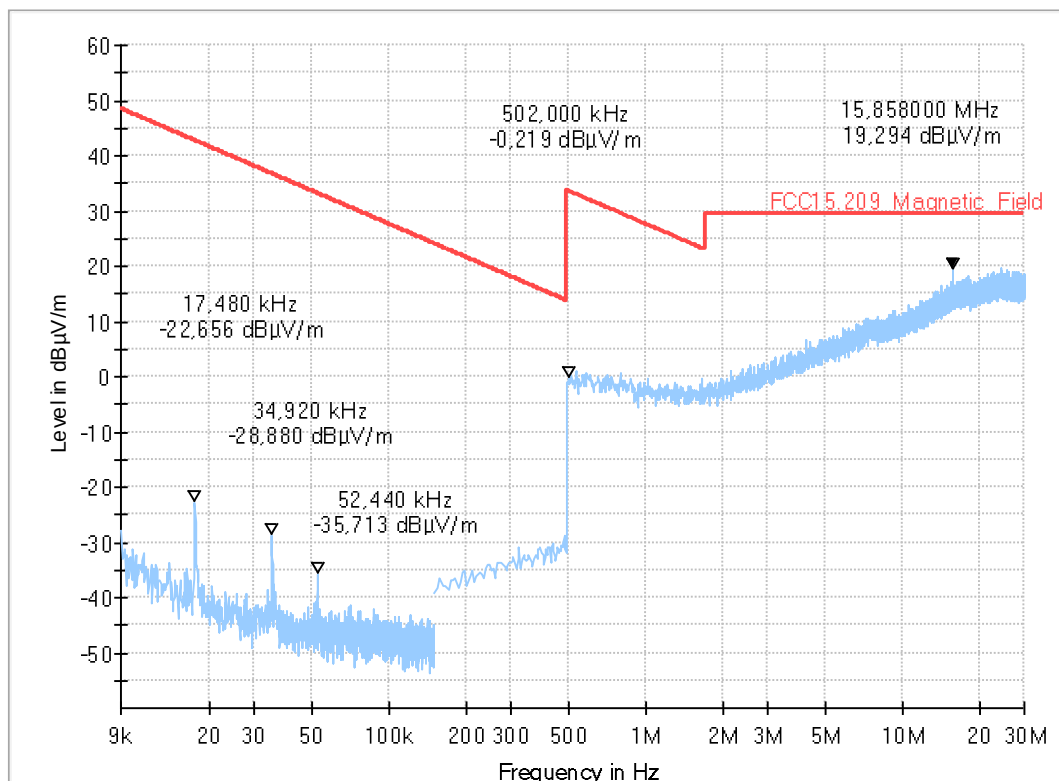

3.01a_BT_LE_low_standing


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 RSS Gen Issue 5 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TCH mode
Operator Name:	
Comment:	Channel no. low
Operating Mode:	BLE TX ch2402
Environmental Conditions::	Humidity : 61%rH; Temperature: 21°C
Operator:	PMA
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S128_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

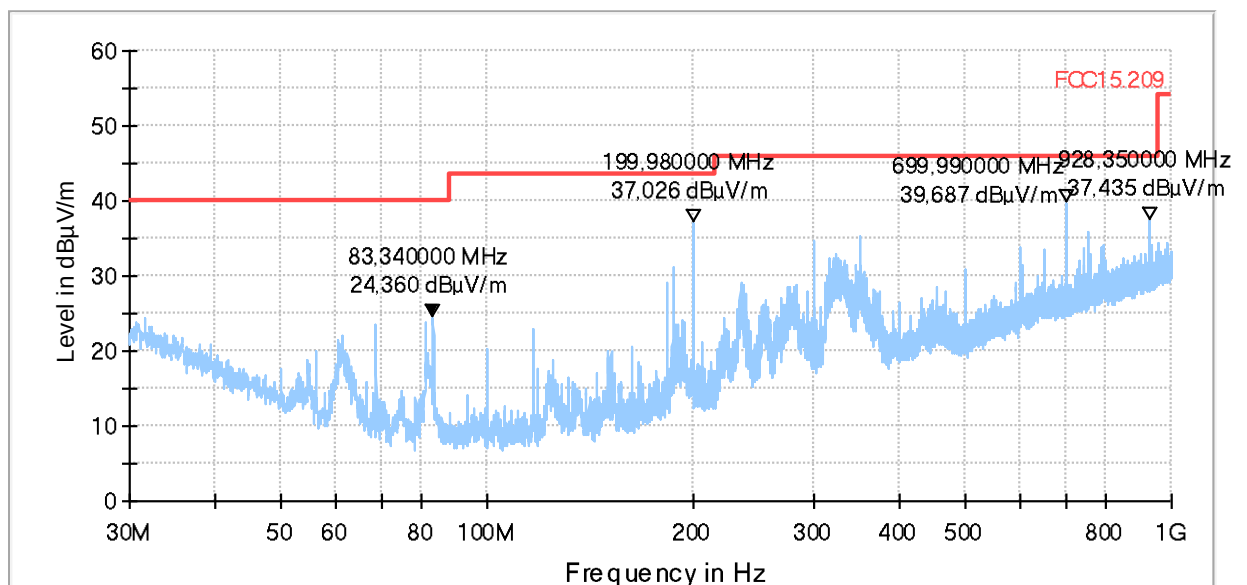

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

3.01b_BT_LE_low_laying


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	CETECOM GmbH Essen
Test Standard:	FCC 15.205&15.209 RSS Gen Issue 5 Intentional Radiator
Antenna polarisation:	horizontal/vertical
Operation mode:	TCH mode
Operator Name:	
Comment:	Channel no. low
Operating Mode:	BLE TX ch2402
Environmental Conditions:	Humidity : 61%rH; Temperature: 21°C
Operator:	PMA
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S128_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

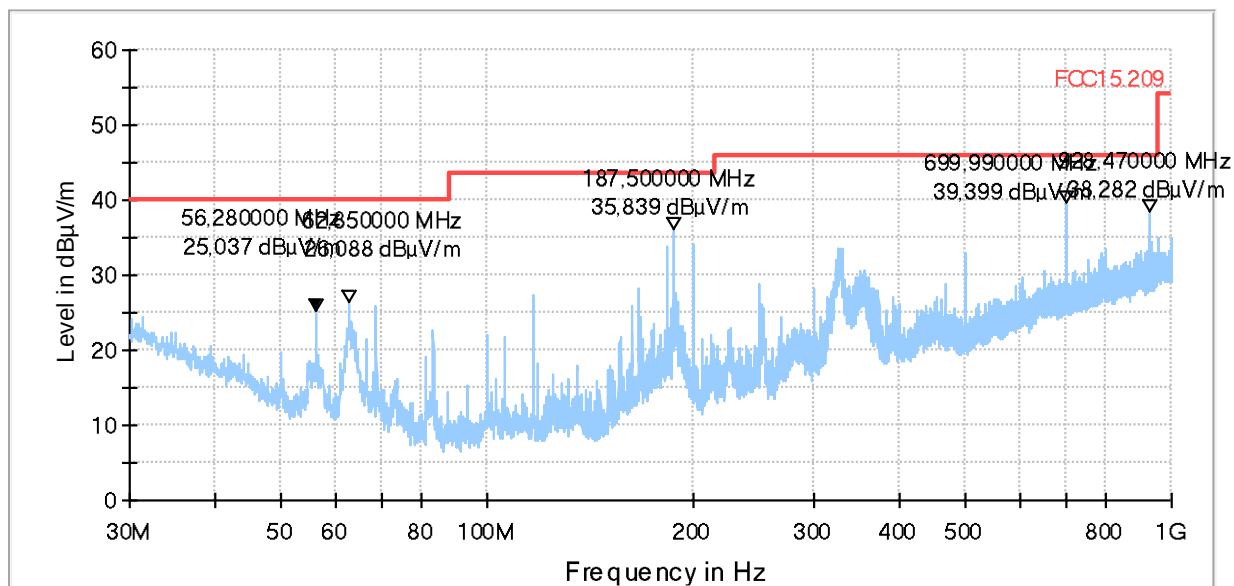

Remark: The peak at 928 MHz is known external disturbance and does not come from EUT.

4.01a_BT_LE_low


Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	TX 2402MHz CH 0 GFSK PRBS9
Operator:	TFra
Comment:	Channel no. low
Environmental Conditions:	Humidity : 60%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S128_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

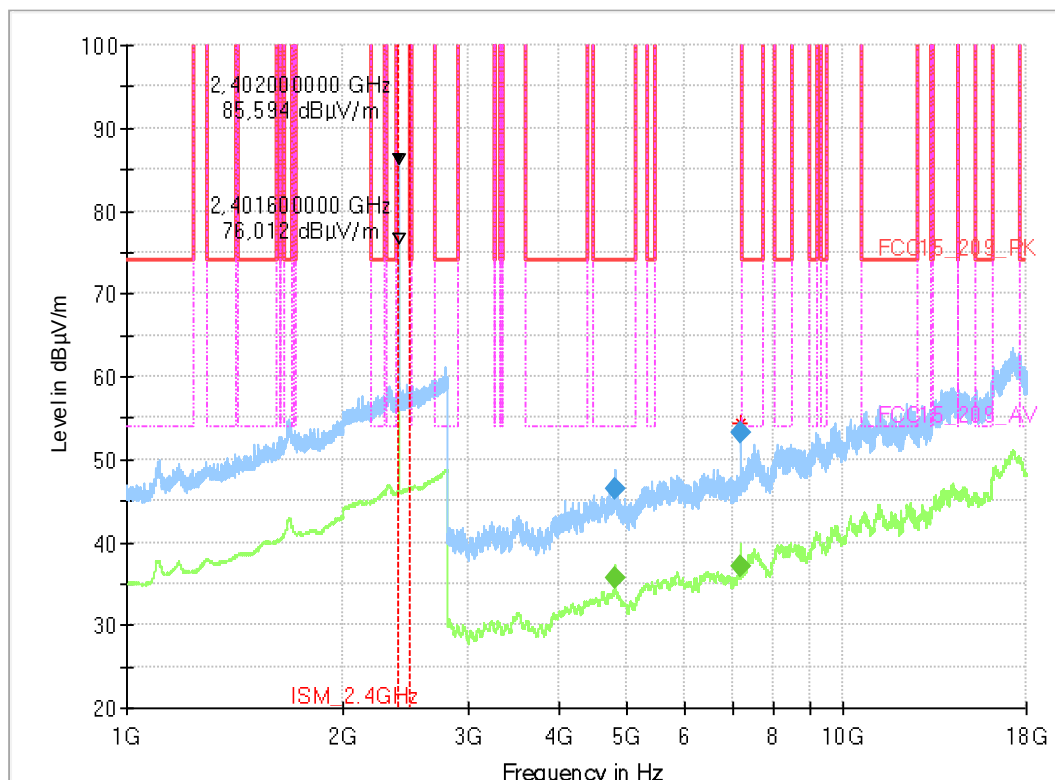

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin	Meas. Time (ms)	Bandwidth	Height	Pol	Azimuth	Elevation
4798.400000	46.43	---	74.00	27.57	100.0	1000.000	155.0	H	297.0	90.0
4803.600000	---	35.60	54.00	18.40	100.0	1000.000	155.0	V	263.0	0.0
7205.200000	---	36.98	150.00	113.02	100.0	1000.000	155.0	H	315.0	90.0
7205.200000	53.22	---	150.00	96.78	100.0	1000.000	155.0	H	313.0	90.0

(continuation of the "Final_Result" table from column 16 ...)

Frequency (MHz)	Corr. (dB/m)	Comment
4798.400000	6	08:32:29 - 14.09.2020
4803.600000	6	08:35:34 - 14.09.2020
7205.200000	12	08:37:12 - 14.09.2020
7205.200000	12	08:33:47 - 14.09.2020


4.01b_BT_LE_low

Common Information

Test Description:	Radiated field strength emission in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	TX 2402MHz CH 0 GFSK PRBS9
Operator:	TFra
Comment:	Channel no. low
Environmental Conditions:	Humidity : 60%rH; Temperature: 20°C
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S128_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

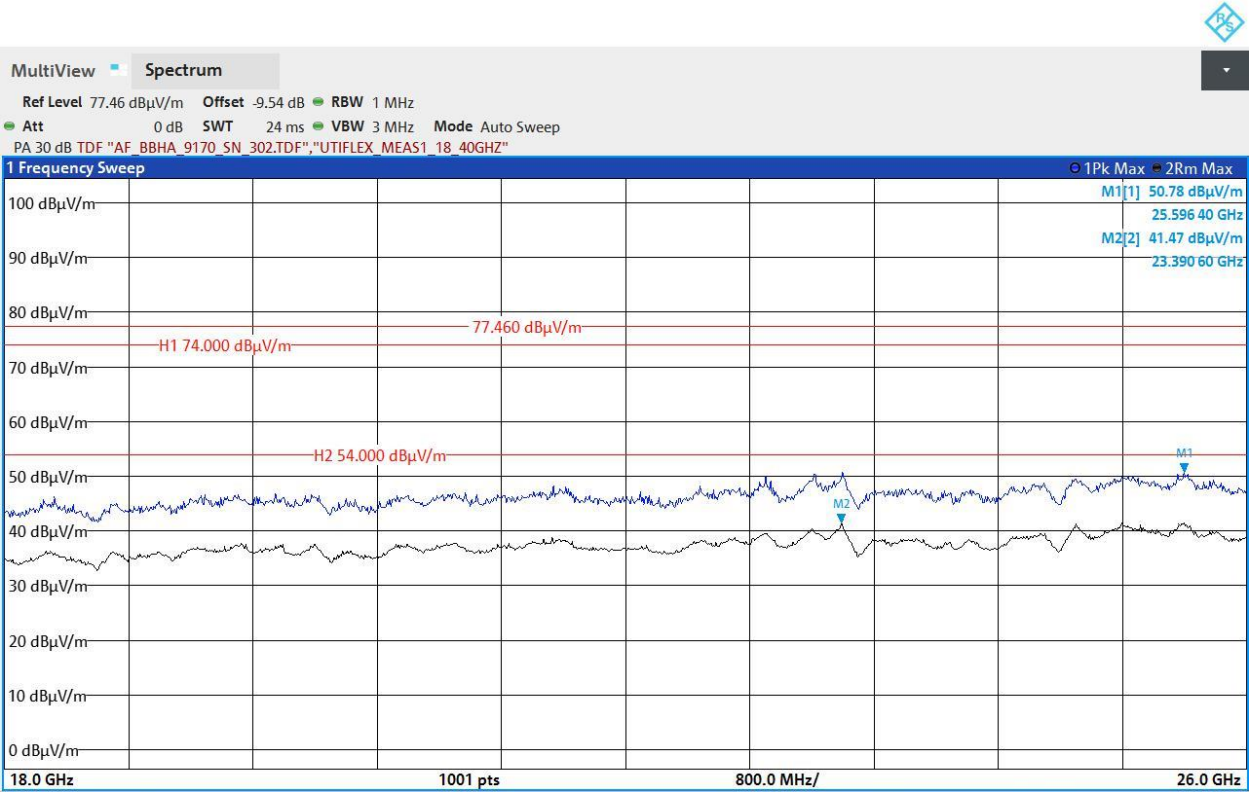

9.01_BE_BT_LE_low


Common Information

Test Description:	Band-Edge: Radiated Field Strength Emissions Emissions in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	TX 2402MHz CH 0 GFSK PRBS9
Operator:	TFra
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S128_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

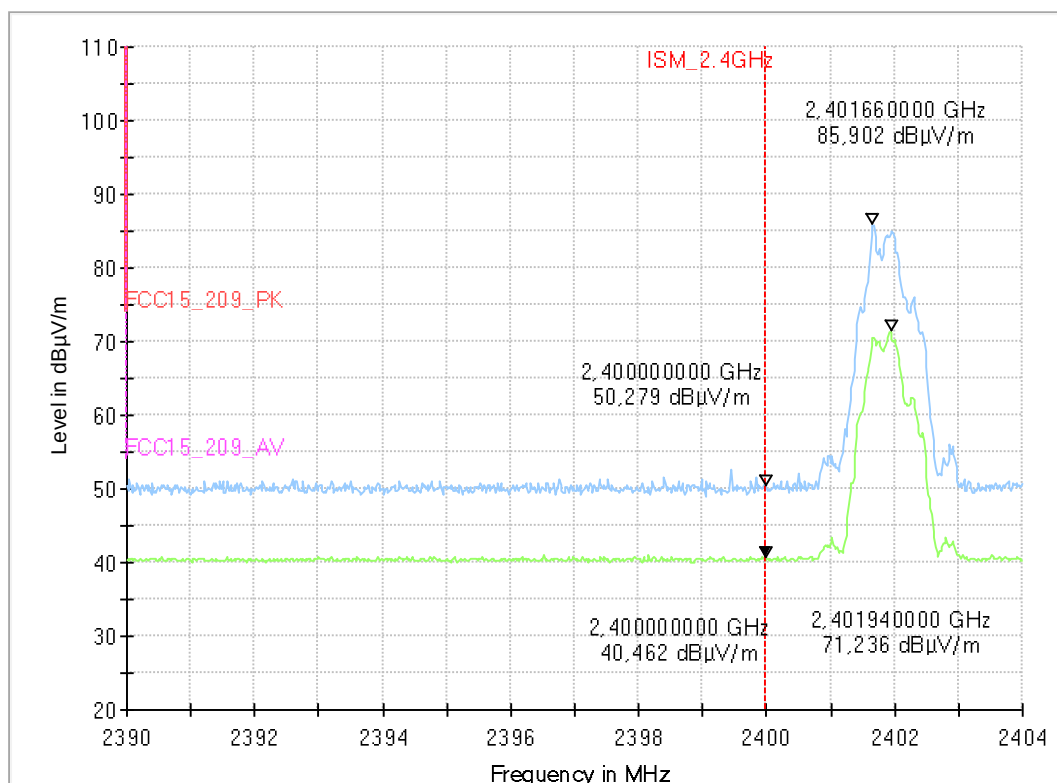

9.02_BE_BT_LE_high


Common Information

Test Description:	Band-Edge: Radiated Field Strength Emissions Emissions in 3m distance
Test Site:	Fully Anechoic Chamber (FAC1) - EMC32 V10.50.0
Test Standard:	FCC 15.247&15.209 Intentional Radiator / RSS-Gen, Issue 5
Antenna polarisation:	horizontal/vertical
Operating Mode:	BTLE ch39 TX
Operator:	PMA
Comment:	Channel no. high
Comment2:	
EUT Setup:	1
Verdict:	Passed

EUT Information

PMT number:	19-1-00690S128_C02
Manufacturer:	Hilscher Gesellschaft für Systemautomation mbH

Full Spectrum

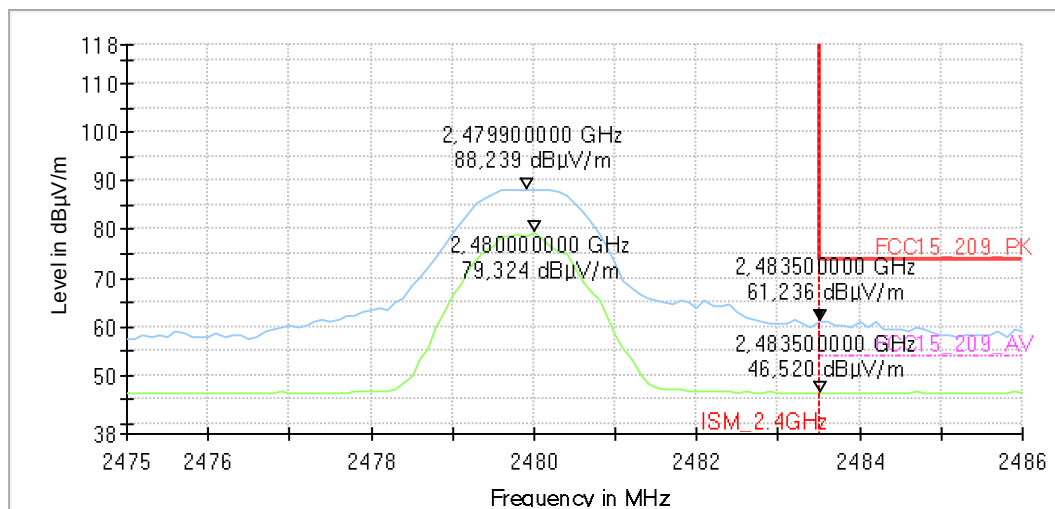


1.2 Conducted measurements

Peak output power (Sweep) (2402 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2402.000000	7.0	30.0	PASS

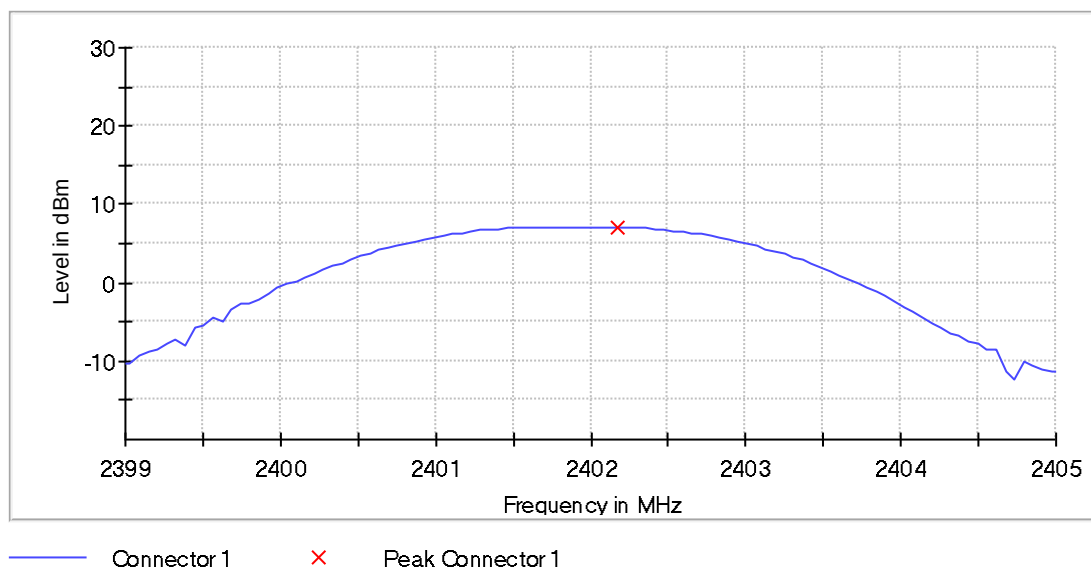

— Connector 1 × Peak Connector 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.39900 GHz	2.39900 GHz
Stop Frequency	2.40500 GHz	2.40500 GHz
Span	6.000 MHz	6.000 MHz
RBW	2.000 MHz	>= 1.000 MHz
VBW	10.000 MHz	>= 6.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.50 dB

RF output power (2402 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2402.000000	6.9	30.0	6.9	85.444	PASS

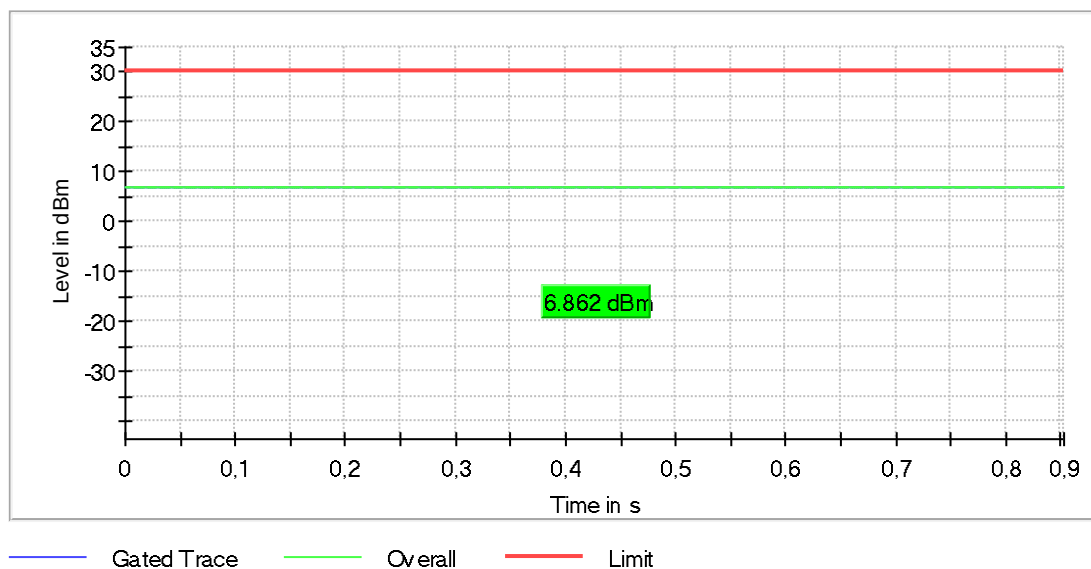

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

Peak output power (Sweep) (2442 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2442.000000	6.4	30.0	PASS

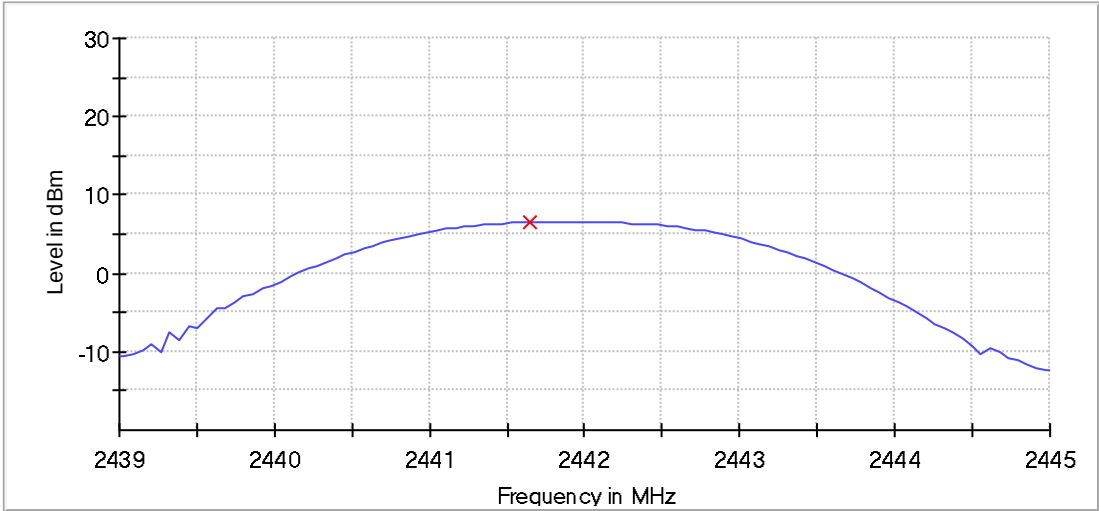

Connector 1 X Peak Connector 1

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44500 GHz	2.44500 GHz
Span	6.000 MHz	6.000 MHz
RBW	2.000 MHz	>= 1.000 MHz
VBW	10.000 MHz	>= 6.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.04 dB	0.50 dB

RF output power (2442 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2442.000000	6.3	30.0	6.3	84.945	PASS

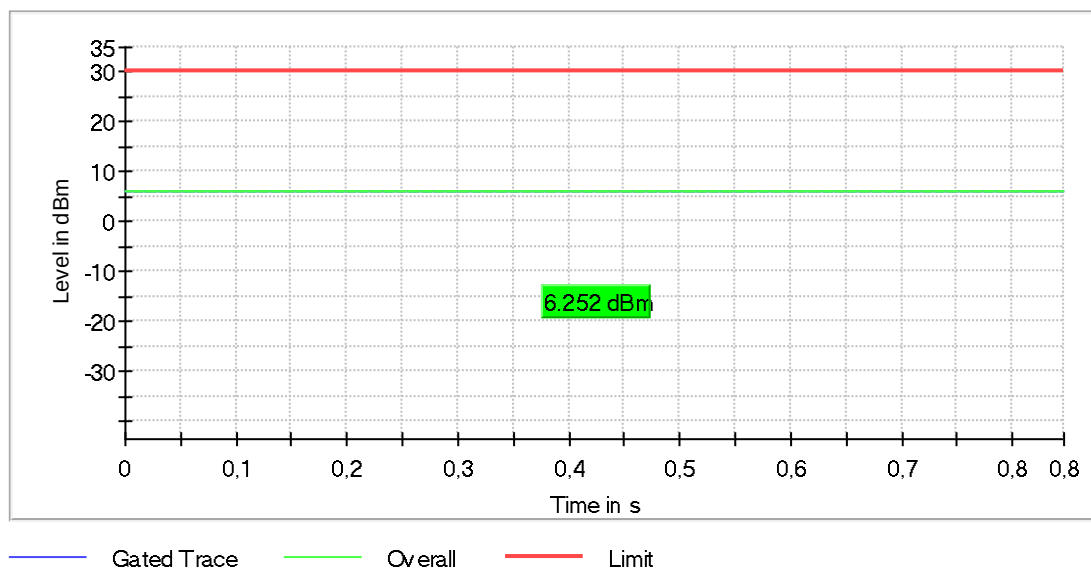

OSP PowerMeter settings


Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 μ s	1.000 μ s

Peak output power (Sweep) (2480 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2480.000000	6.2	30.0	PASS

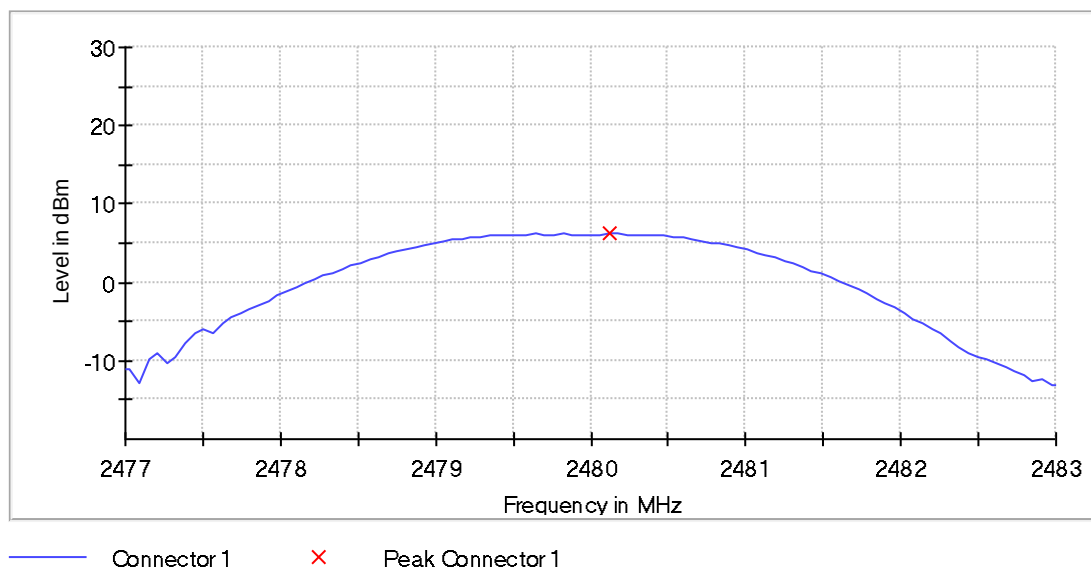

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.47700 GHz	2.47700 GHz
Stop Frequency	2.48300 GHz	2.48300 GHz
Span	6.000 MHz	6.000 MHz
RBW	2.000 MHz	>= 1.000 MHz
VBW	10.000 MHz	>= 6.000 MHz
SweepPoints	101	~ 101
SweepTime	1.000 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.02 dB	0.50 dB

RF output power (2480 MHz; 10,000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(b), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

Result

DUT Frequency (MHz)	Gated RMS (dBm)	Limit Max (dBm)	Gated EIRP (dBm)	DutyCycle (%)	Result
2480.000000	6.1	30.0	6.1	85.468	PASS

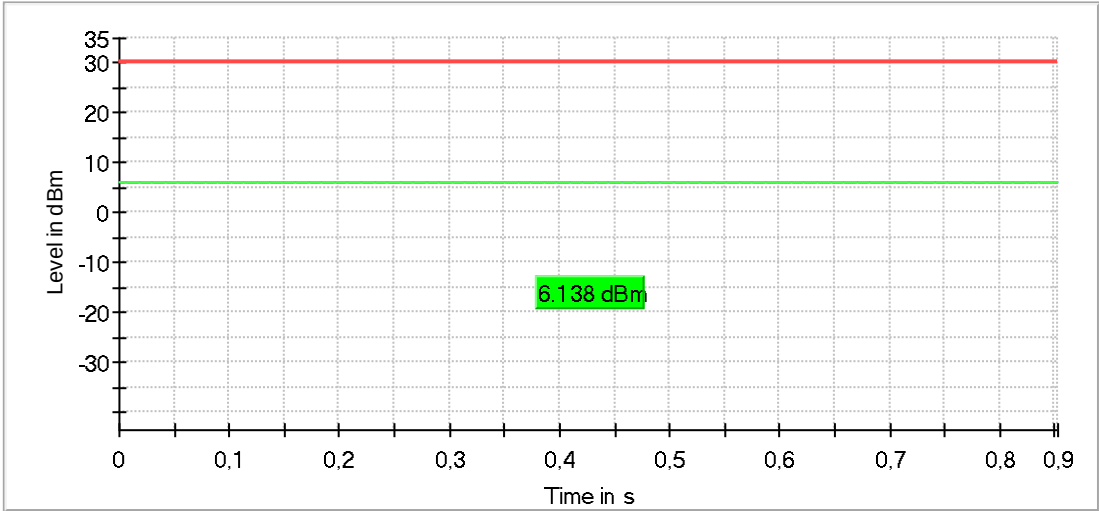

— Gated Trace — Overall — Limit

OSP PowerMeter settings

Setting	Instrument Value	Target Value
Measurement Time	1.000 s	1.000 s
Points	1000000	1000000
Time resolution	1.000 µs	1.000 µs

End Of Annex 1