

## TEST REPORT

**Report Number: 104273165MPK-001A**

**Project Number: G104273165**

**August 11, 2020**

**Testing performed on the  
Proxess CX-Series Cylindrical Lockset  
Model Number: CX Cylindrical  
HVIN: PXH01-CX03-DC  
HVIN: PXHO1-CX03-B**

**FCC ID: 2AKUZPXH01  
IC: 22335-PXH01**

**to**

**FCC Part 15 Subpart C (15.225)  
Industry Canada RSS-210 Issue 10  
FCC Part 15, Subpart B  
Industry Canada ICES-003**

**For**

**Proxess LLC**

Test Performed by:

Intertek  
1365 Adams Court  
Menlo Park, CA 94025 USA

Test Authorized by:

Proxess LLC  
8100 Southpark Way - Suite A4  
Littleton, CO 80120 USA

Prepared by:

  
Todd Moy

Date: August 11, 2020

Reviewed by:

  
Krishna Vemuri


Date: August 11, 2020

*This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.*

**Report No. 104273165MPK-001A**

<b>Equipment Under Test:</b>	Proxess CX-Series Cylindrical Lockset
<b>Trade Name:</b>	Proxess LLC
<b>Model Number:</b>	CX Cylindrical
<b>Serial Number:</b>	104273165-001
<b>Applicant:</b>	Proxess LLC
<b>Contact:</b>	Jeff Cahill
<b>Address:</b>	8100 Southpark Way - Suite A4 Littleton, CO 80120
<b>Country</b>	USA
<b>Email</b>	Jeff.cahill@proxess.com
<b>Applicable Regulation:</b>	FCC Part 15 Subpart C (15.225) Industry Canada RSS-210 Issue 10 FCC Part 15, Subpart B Industry Canada ICES-003 Issue 6
<b>Test Site Location:</b>	ITS – Site 1 1365 Adams Drive Menlo Park, CA 94025
<b>Date of Test:</b>	April 27-August 3, 2020

*We attest to the accuracy of this report:*



---

Todd Moy  
Project Engineer



---

Krishna K Vemuri  
EMC Manager

**TABLE OF CONTENTS**

<b>1.0</b>	<b>Summary of Tests .....</b>	<b>5</b>
<b>2.0</b>	<b>General Description.....</b>	<b>6</b>
2.1	Product Description .....	6
2.2	Related Submittal(s) Grants .....	7
2.3	Test Methodology .....	7
2.4	Test Facility .....	7
2.5	Measurement Uncertainty.....	7
<b>3.0</b>	<b>System Test Configuration.....</b>	<b>8</b>
3.1	Block Diagram of Test Setup.....	8
3.2	Justification.....	9
3.3	Software Exercise Program.....	9
3.4	Mode of Operation during test.....	9
3.5	Modifications required for Compliance.....	9
3.6	Additions, deviations and exclusions from standards.....	9
<b>4.0</b>	<b>Measurement Results.....</b>	<b>10</b>
4.1	Field Strength of Fundamental and Radiated Emissions Outside the band .....	10
4.1.1	Requirements .....	10
4.1.2	Procedure .....	11
4.1.3	Test Result 15.225 (a)(b)(c).....	12
4.1.4	Test Result 15.225 (d) and 15.209.....	14
4.1.5	Test Configuration Photographs .....	19
4.2	Frequency Tolerance.....	20
4.2.1	Requirement.....	20
4.2.2	Procedure .....	20
4.2.3	Test Results 15.225 (e) .....	21
4.3	Occupied Bandwidth.....	22
4.3.1	Requirements .....	22
4.3.2	Procedure .....	22
4.3.3	Test Results.....	23
4.4	AC Line Conducted Emission .....	24
4.4.1	Requirement.....	24
4.4.2	Procedure .....	24
4.4.3	Test Result .....	25
4.5	Radiated Emissions on Digital Parts.....	30
4.5.1	Test Limit.....	30
4.5.2	Procedures.....	30
4.5.3	Test Results.....	31
<b>5.0</b>	<b>List of test equipment .....</b>	<b>36</b>
<b>6.0</b>	<b>Document History .....</b>	<b>37</b>
<b>7. Appendix A: Evaluation for spurious emissions of pre-certified radio module installed inside the</b>		

<b>host equipment per KDB 996369 D04.....</b>	<b>38</b>
A1.0 Radiated Emissions (ANSI C63.10) .....	38
A1.1 Method .....	38
A1.2 Test Equipment Used:.....	40
A1.3 Result: .....	40
A1.4 Photographs: .....	41

## 1.0 Summary of Tests

TEST	REFERENCE FCC 15.225	REFERENCE RSS-210	RESULTS
Field Strength of Fundamental	15.225(a)	B.6	Complies
Radiated Emissions Outside the band	15.225(b), 15.225(c), 15.225(d), 15.209	B.6	Complies
Frequency Tolerance of the Carrier	15.225(e)	B.6	Complies
Line Conducted Emissions	15.207	RSS-GEN	Complies
Occupied Bandwidth	15.215	RSS-GEN	Complies
Antenna requirement	15.203	RSS-GEN	Complies <sup>1</sup>

<sup>1</sup> The EUT utilizes an internal Antenna

## 2.0 General Description

### 2.1 Product Description

Proxess LLC supplied the following description of the EUT:

The Proxess CX cylindrical lock is the centerpiece of the Wireless Lockset Revolution. It is a unique, intelligent, Grade 1 lockset that can be quickly installed in a standard prep door. The lockset can be easily networked through a number of wireless or connected (wired and mobile phone App) means. The cylindrical lock can expand into a system of unlimited doors, sites and credentials, while leveraging unparalleled security in our Mifare DESFire EV2 and Bluetooth credentials and communications

### Overview of the EUT

<b>Applicant name &amp; address</b>	Proxess LLC 8100 Southpark Way - Suite A4 Littleton, CO 80120
<b>Contact info / Email</b>	Jeff Cahill / jeff.cahill@proxess.com
<b>Model</b>	CX Cylindrical
<b>HVIN</b>	PXH01-CX03-DC, PXH01-CX03-B
<b>FCC Identifier</b>	2AKUZPXH01
<b>IC Identifier</b>	22335-PXH01
<b>Operating Frequency</b>	13.56 MHz
<b>Number of Channels</b>	1
<b>Type of Modulation</b>	ASK Modulation (RFID)
<b>Antenna Type</b>	PCB Trace Antenna (13.56 MHz)

**EUT receive date:** April 27, 2020

**EUT receive condition:** The EUT was received in good condition with no apparent damage. As declared by the Applicant it is identical to the production units.

**Test start date:** April 27, 2020

**Test completion date:** August 03, 2020

## 2.2 Related Submittal(s) Grants

None

## 2.3 Test Methodology

Both AC mains line-conducted and radiated emissions measurements were performed according to the procedures in ANSI C63.4: 2014. Radiated tests were performed at an antenna to EUT distance of 10 meters, unless stated otherwise in this test report. All other measurements were made in accordance with the procedures in part 2 of CFR 47 7, ANSI C63.10: 2013, ANSI C63.4-2014 & RSS-GEN Issue 5.

## 2.4 Test Facility

The radiated emission test site and conducted measurement facility used to collect the data is 10m semi-anechoic chamber located in Menlo Park, California. This test facility and site measurement data have been fully placed on file with the FCC and Industry Canada (Site # 2042L-1).

## 2.5 Measurement Uncertainty

Compliance with the limits was based on the results of the measurements and doesn't take into account the measurement uncertainty.

Estimated Measurement Uncertainty

Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 1 GHz	1 GHz – 2.5 GHz	> 2.5 GHz
RF Power and Power Density – antenna conducted	-	0.7 dB	-
Unwanted emissions - antenna conducted	1.1 dB	1.3 dB	1.9 dB
Bandwidth – antenna conducted	-	30 Hz	-

Estimated Measurement Uncertainty

Measurement	Expanded Uncertainty (k=2)		
	0.15 MHz – 30MHz	30 MHz – 1 GHz	1 GHz – 18 GHz
Radiated emissions	-	4.7	5.1 dB
AC mains conducted emissions	2.1 dB	-	-



### 3.0 System Test Configuration

#### 3.1 Block Diagram of Test Setup



The diagram shown below details the interconnection of the EUT and support equipment. For specific layout, refer to the test configuration photograph in the relevant section of this report.

Support Equipment		
Description	Manufacturer	Model No.
DC Power Supply	Extech	EP-3003
DC Power Supply	B&K Precision	1550
Cell Phone	Samsung	SM-J327U

#### Battery Configuration

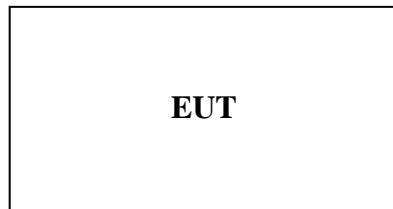

#### DC Supply Configuration

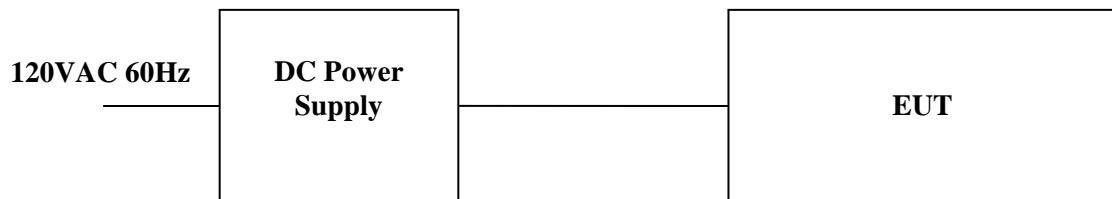

S = Shielded  
U = Unshielded

F = With Ferrite  
m = Length in Meters

### 3.2 Justification

For radiated emission measurements the EUT is placed on a non-conductive table. The EUT was configured to continuously transmit.

Evaluation for spurious emissions of pre-certified radio module installed inside Host equipment was performed. Radio module FCC ID: SH6MDBT50Q. See Appendix A for test data and setup photos.

### 3.3 Software Exercise Program

None

### 3.4 Mode of Operation during test

The CX Cylindrical was set up to continuously transmitting at 13.56MHz. In addition, during tests the EUT was paired and exercised with cell phone for BLE connection.

### 3.5 Modifications required for Compliance

No modifications were made by the manufacturer to bring the EUT into compliance.

### 3.6 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.

## 4.0 Measurement Results

### 4.1 Field Strength of Fundamental and Radiated Emissions Outside the band

#### 4.1.1 Requirements

FCC Rules 15.225, 15.209

- a) The field strength of any emissions within the band 13.553-13.567 MHz shall not exceed 15,848 microvolts/meter (84 dBuV) at 30 meters.
- b) Within the bands 13.410-13.553 MHz and 13.567-13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters.
- c) Within the bands 13.110-13.410 MHz and 13.710-14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters.
- d) The field strength of any emissions appearing outside of the 13.110-14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

§15.209 Radiated emission limits; general requirements.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

#### 4.1.2 Procedure

##### Radiated Measurements Below 30 MHz

During the test the EUT is rotated and the measuring antenna angles are varied during the search for maximum signal level.

Radiated emissions are taken at ten meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Measurements for below 30 MHz were made at 10 meters. Data results below are corrected for distance back to 30 meters.

##### Radiated Measurements Above 30 MHz

During the test the EUT is rotated and the measuring antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at ten meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Measurements for above 30 MHz were made at 10 meters.

Radiated emission measurements were performed from 9kHz to 1 GHz.

Analyzer resolution is:

200Hz or greater for 9kHz to 150kHz

9 kHz or greater for 150kHz to 30 MHz

120 kHz or greater for 30MHz to 1000 MHz

For those frequencies quasi-peak detector applies

Data includes of the worst-case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

##### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation is as follows:

$$FS = RA + AF + CF - AG - DCF$$

Where FS = Field Strength in dB ( $\mu$ V/m)

RA = Receiver Amplitude (including preamplifier) in dB ( $\mu$ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB (1/m)

AG = Amplifier Gain in dB


DCF = Distance Correction Factor

Note: FS was measured with loop antenna below 30MHz

## 4.1.3 Test Result 15.225 (a)(b)(c)

The data below shows the significant emission frequencies, the limit and the margin of compliance. Note: Measurements were performed at parallel and perpendicular orientation of loop antenna. The worst case data was presented below.

## Fundamental, Battery Configuration

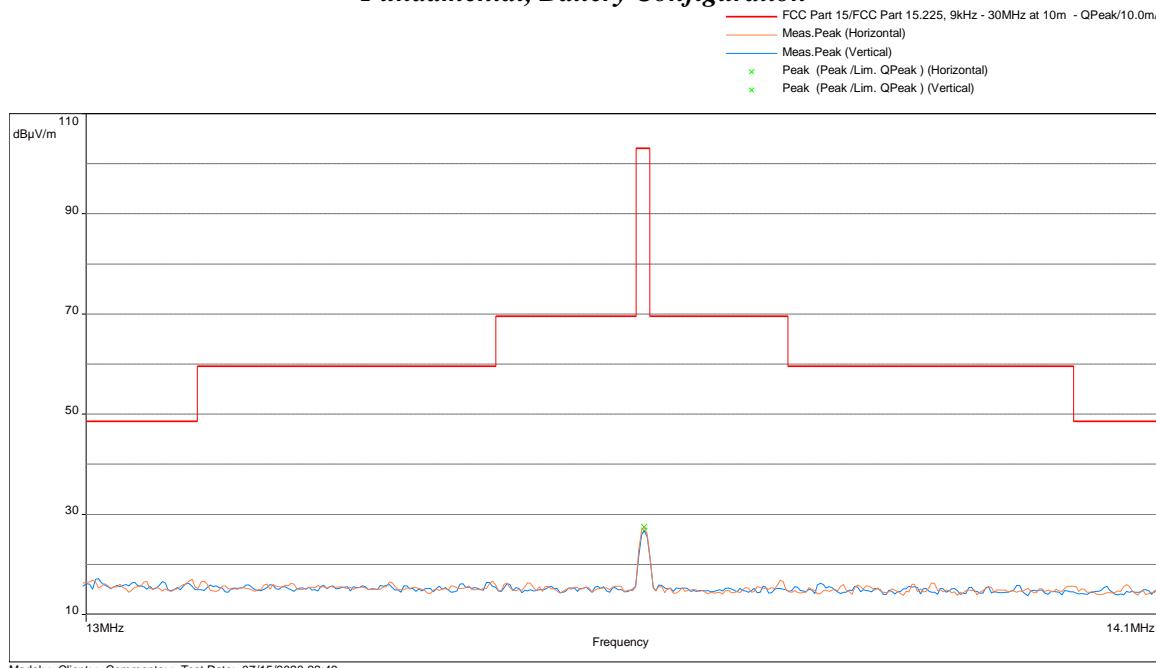


Frequency (MHz)	Peak FS@10m dB(uV/m)	Limit@10m dB(uV/m)	Margin dB	Polarity	RA@10m	Correction
					dB(uV)	dB
13.56	27.5	103.1	-75.6	Parallel	24.8	2.7
13.56	26.8	103.1	-76.3	Perpendicular	24.1	2.7

Note: Correction = AF+CF-AG-distance correction factor

Distance correction factor=40\*log10(limit distance/measured distance)

## Fundamental, DC Power Configuration

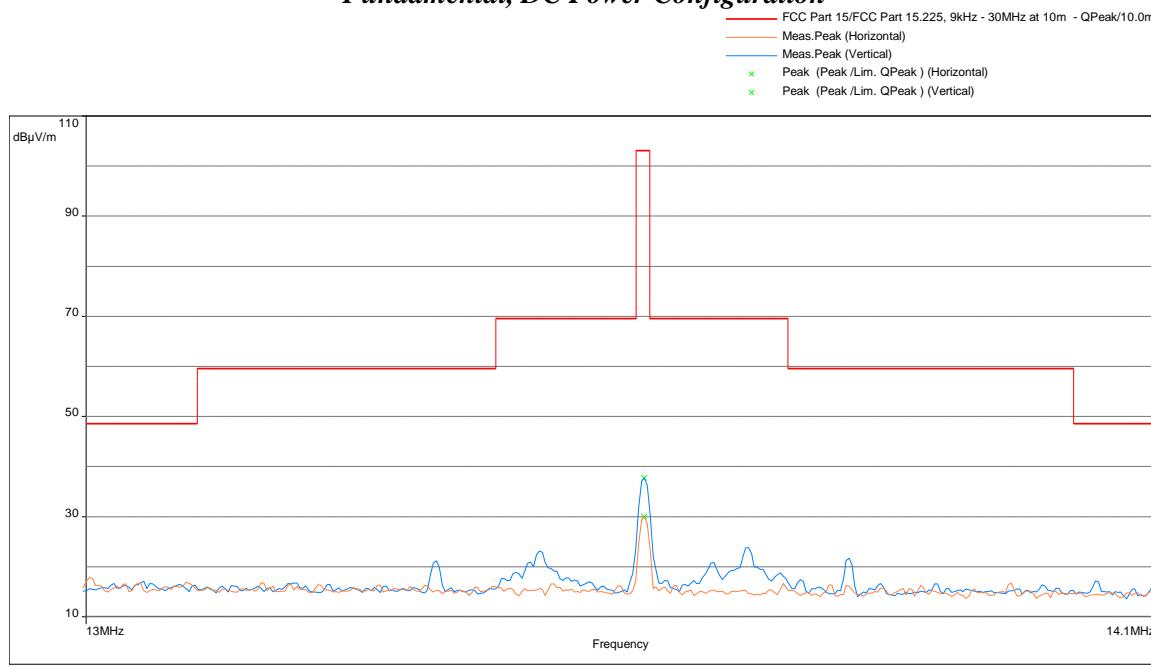


Frequency (MHz)	Peak FS@10m dB(uV/m)	Limit@10m dB(uV/m)	Margin dB	Polarity	RA@10m dB(uV)	Correction dB
13.56	30.0	103.1	-73.1	Parallel	27.3	2.7
13.56	37.7	103.1	-65.4	Perpendicular	35.1	2.7

Note: Correction = AF+CF-AG- distance correction factor


Distance correction factor=40\*log10(limit distance/measured distance)

## 4.1.4 Test Result 15.225 (d) and 15.209


## Radiated Spurious Emissions from 9 kHz to 30MHz, Battery Configuration

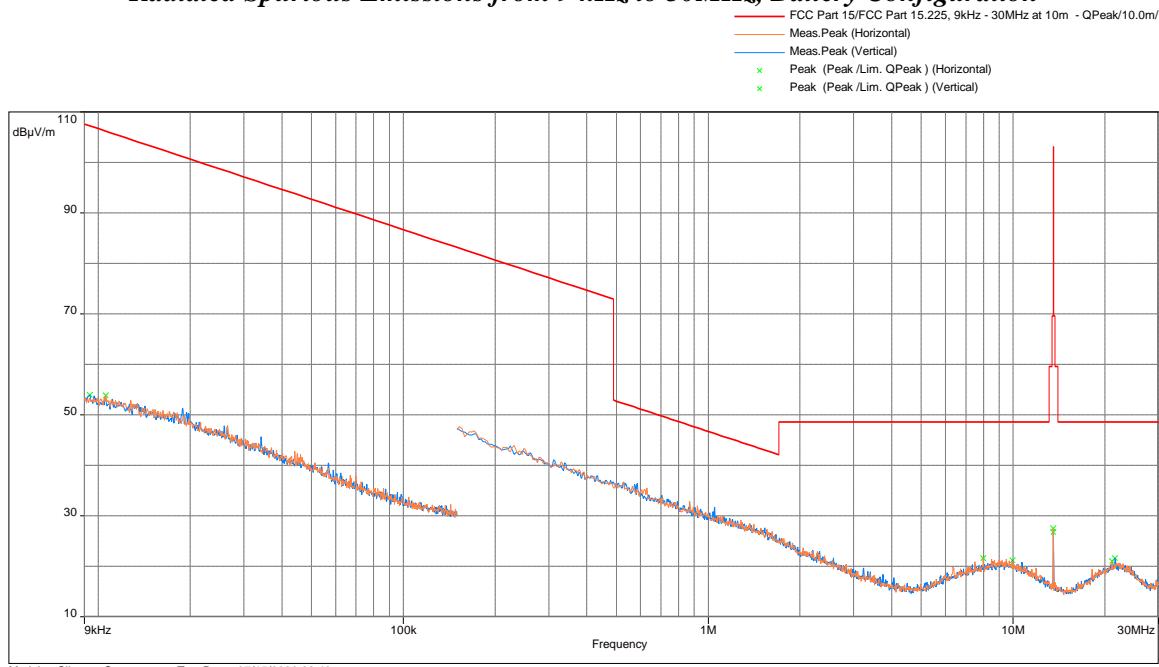

## Radiated Spurious Emissions from 9 kHz to 30MHz, DC Power Configuration

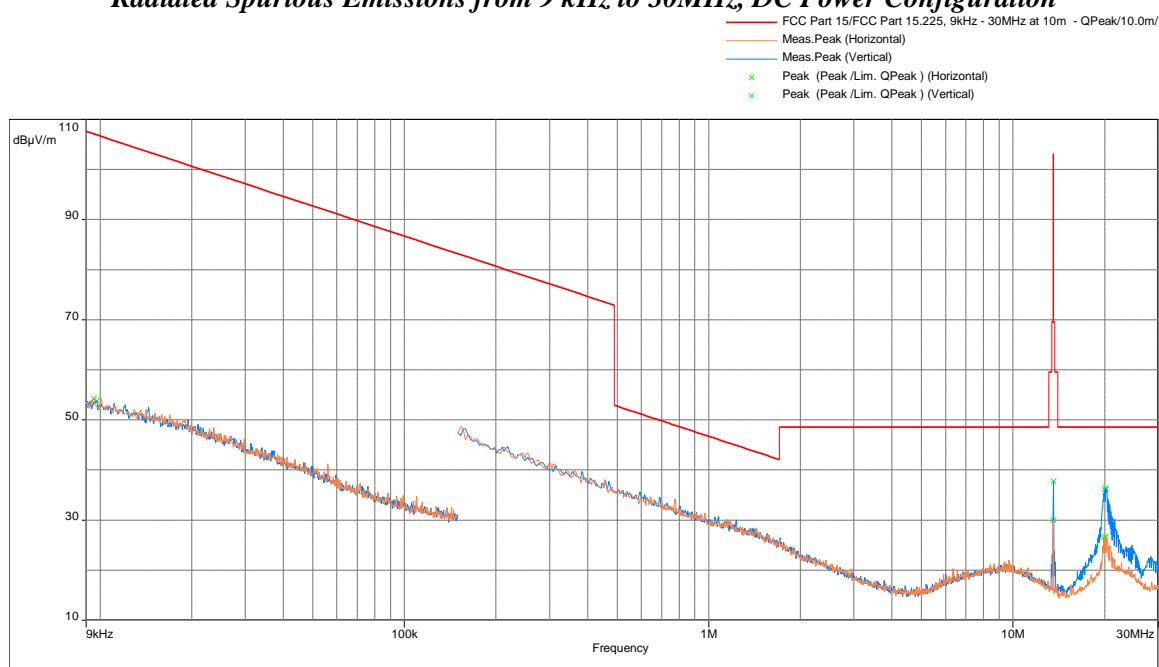

## Radiated Spurious Emissions from 30 MHz to 1000 MHz, Battery Configuration

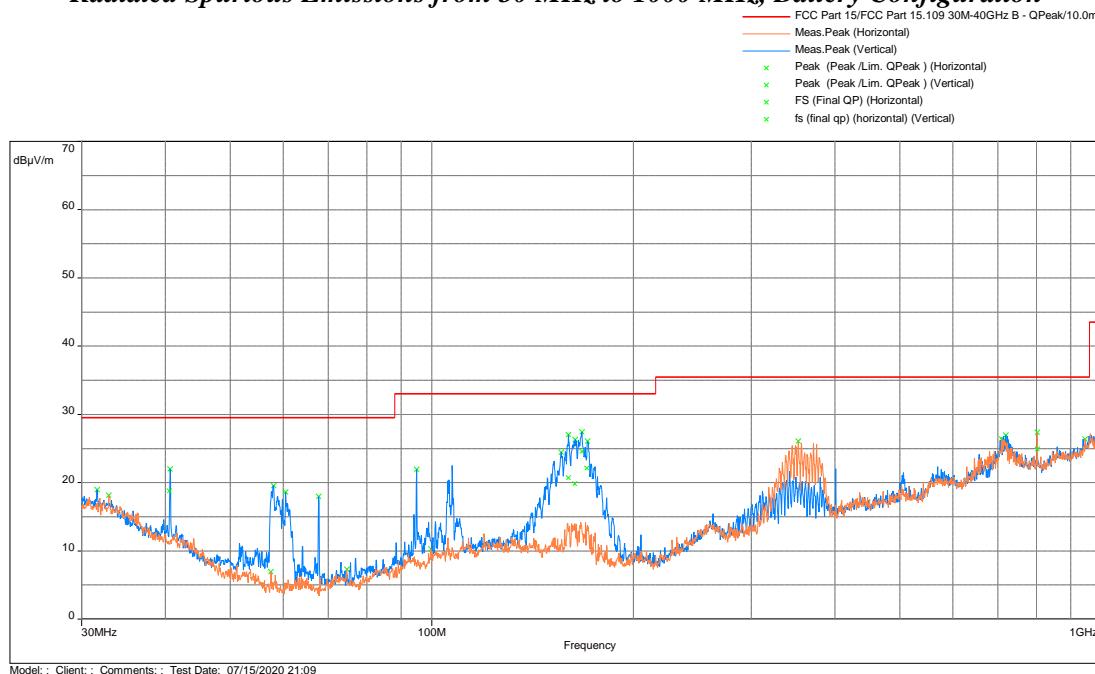


Freq (MHz)	FS @10m dB(uV/m)	Limit dB(uV/m)	Margin (dB)	Azimuth (Deg)	Height (m)	Polarity	RA (dBuV)	Correction (dB)
40.526	18.8	29.5	-10.7	109.25	3.8	Vertical	33.0	-14.1
160.031	20.7	33	-12.3	154	1.1	Vertical	36.9	-16.2
163.635	19.9	33	-13.1	234	1.16	Vertical	36.4	-16.5
167.563	24.6	33	-8.5	318.5	1.1	Vertical	41.4	-16.9
170.340	22.1	33	-10.9	319.25	1.51	Vertical	39.2	-17.1
801.808	24.9	35.5	-10.6	255.5	1.91	Horizontal	27.3	-2.4

Note: FS = RA + Correction

Correction = AF + CF - Preamp

## Radiated Spurious Emissions from 30 MHz to 1000 MHz, DC Power Configuration

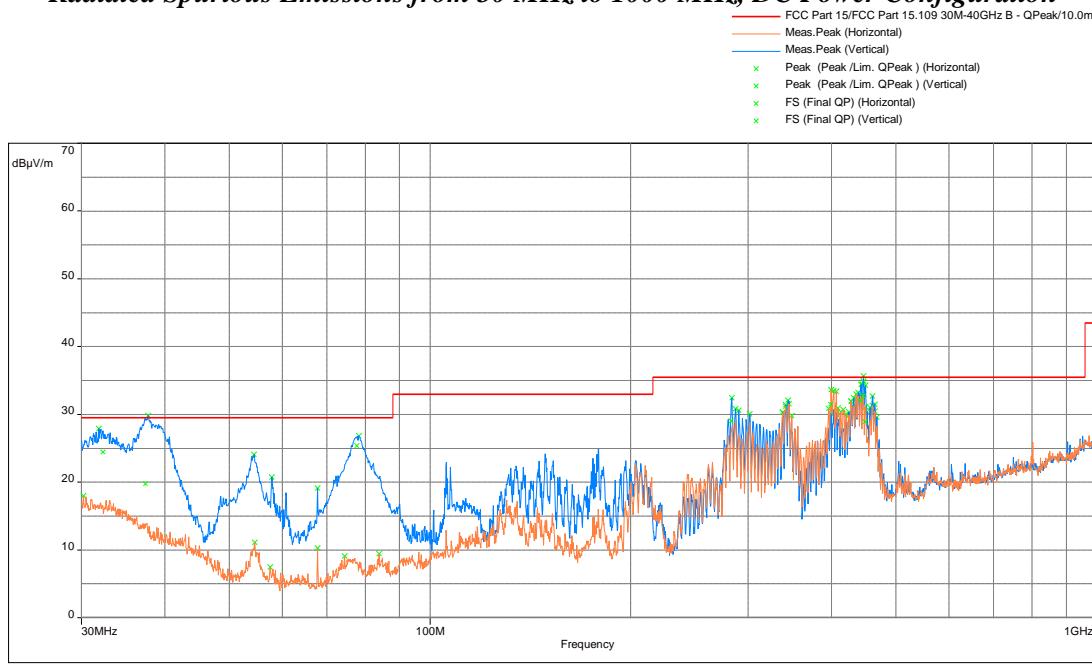


Freq (MHz)	FS @10m dB(uV/m)	Limit dB(uV/m)	Margin (dB)	Azimuth (Deg)	Height (m)	Polarity	RA (dBuV)	Correction (dB)
32.326	24.4	29.5	-5.1	183.25	1.02	Vertical	34.1	-9.9
37.415	19.8	29.5	-9.7	88.5	1.02	Vertical	32.5	-12.5
77.628	25.4	29.5	-4.1	53	1.25	Vertical	45.6	-20.3
282.824	29.0	35.5	-6.5	61	1	Vertical	42.6	-13.6
399.040	31.5	35.5	-4.0	181	1.95	Horizontal	41.6	-10.2
442.539	32.0	35.5	-3.5	73	3.67	Vertical	41.2	-9.2
446.120	32.7	35.5	-2.8	72	3.62	Vertical	41.9	-9.2
449.154	28.9	35.5	-6.6	92	3.84	Vertical	38.0	-9.2

Note: FS = RA + Correction


Correction = AF + CF - Preamp

### Radiated Spurious Emissions from 1-18 GHz, Peak vs Peak limit, Battery Configuration

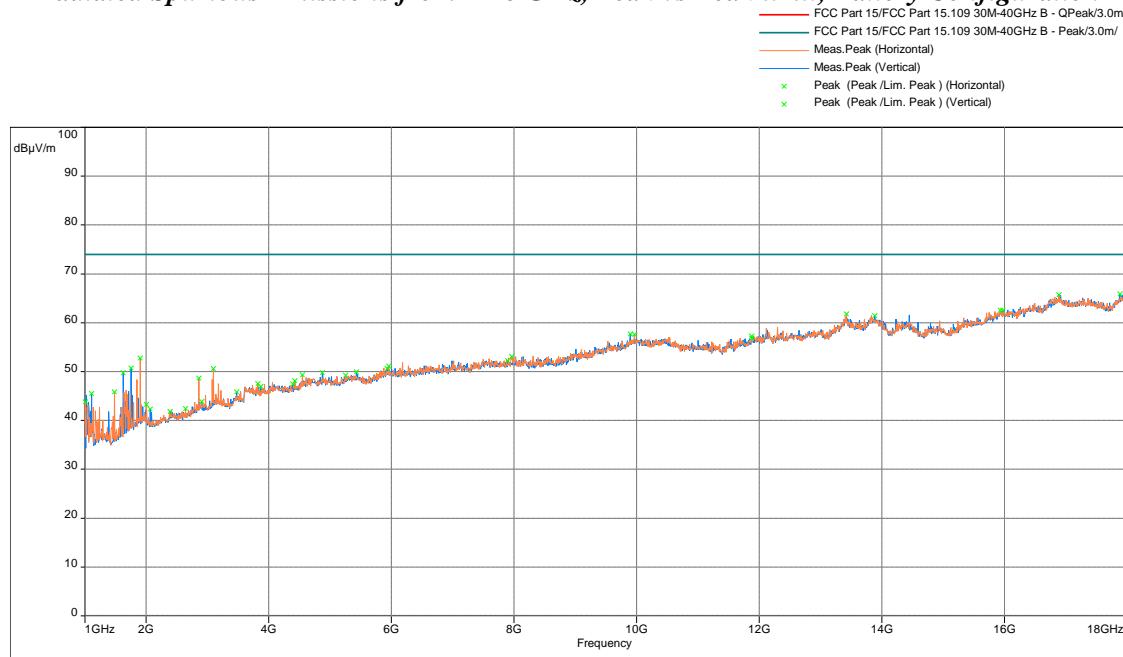


Model: ; Client: ; Comments: ; Test Date: 04/27/2020 13:47

### Radiated Spurious Emissions from 1-18 GHz, Peak vs Peak limit, DC Power Configuration

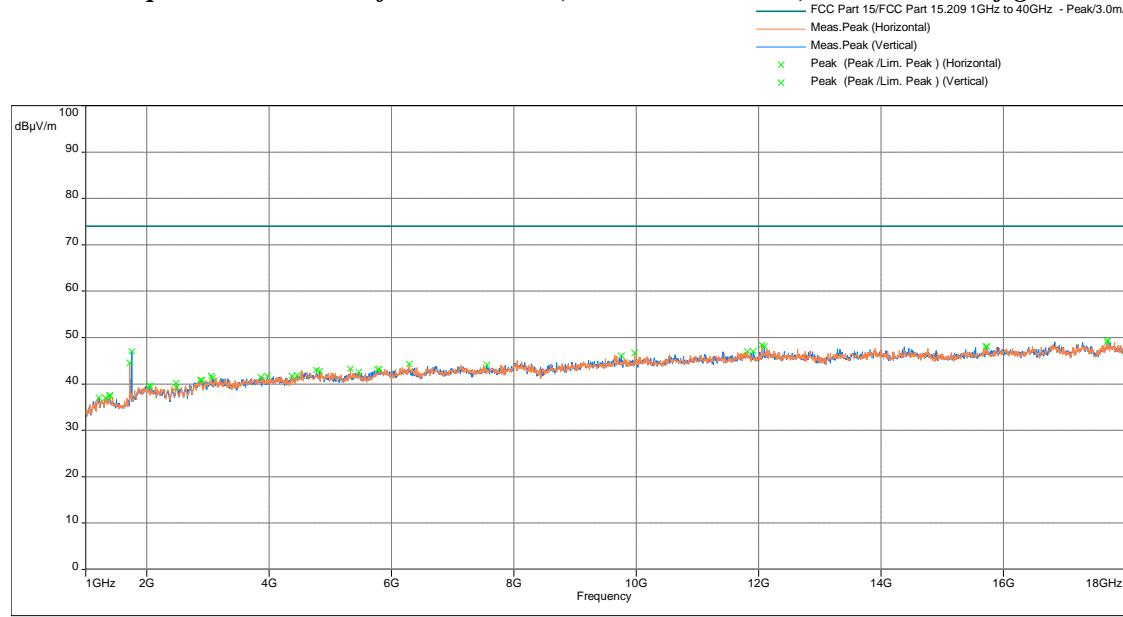


Model: ; Client: ; Comments: ; Test Date: 08/03/2020 11:21

### Radiated Spurious Emissions from 1-18 GHz, Avg vs Avg limit, Battery Configuration

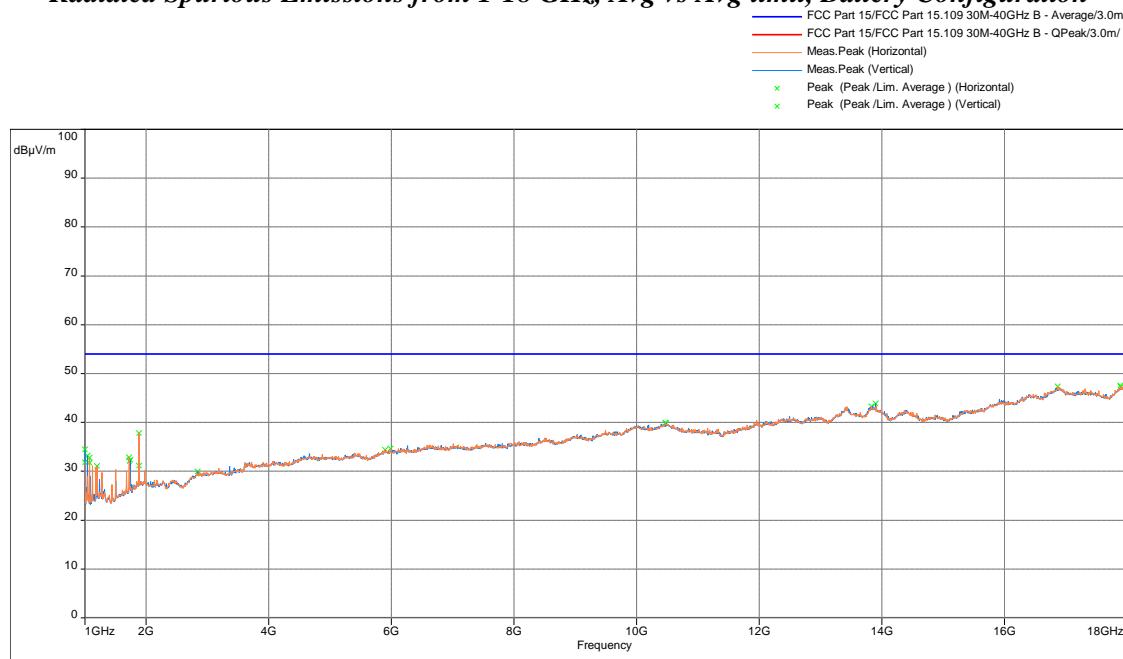

Model: ; Client: ; Comments: ; Test Date: 04/27/2020 14:19

### Radiated Spurious Emissions from 1-18 GHz, Avg vs Avg limit, DC Power Configuration

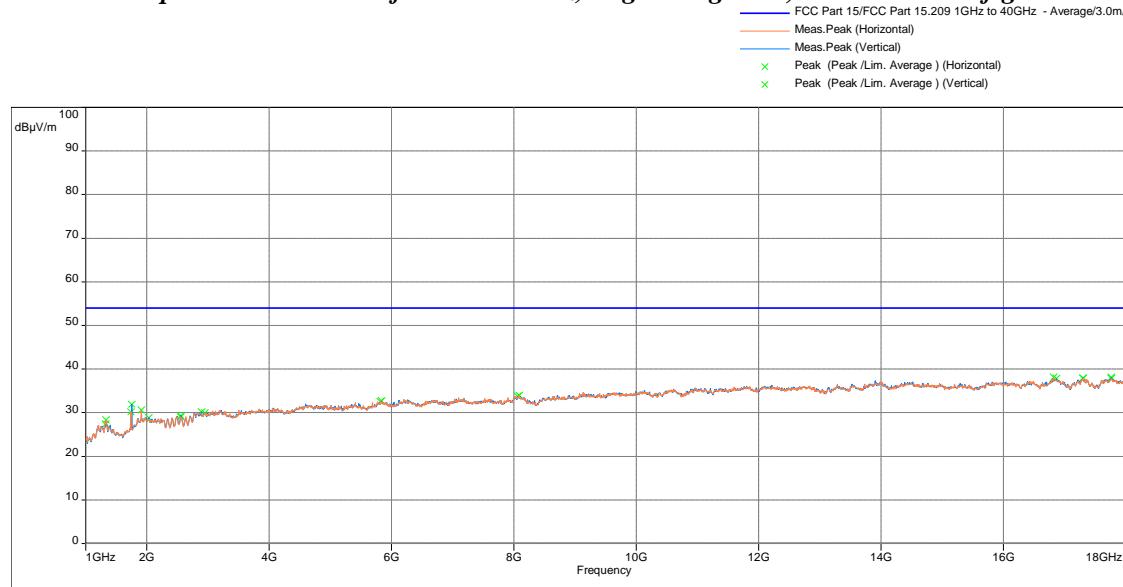


Model: ; Client: ; Comments: ; Test Date: 08/03/2020 11:31

<b>Result</b>	<b>Complies by 2.8 dB</b>
---------------	---------------------------

## 4.1.5 Test Configuration Photographs

**The following photographs show the testing configurations used.**

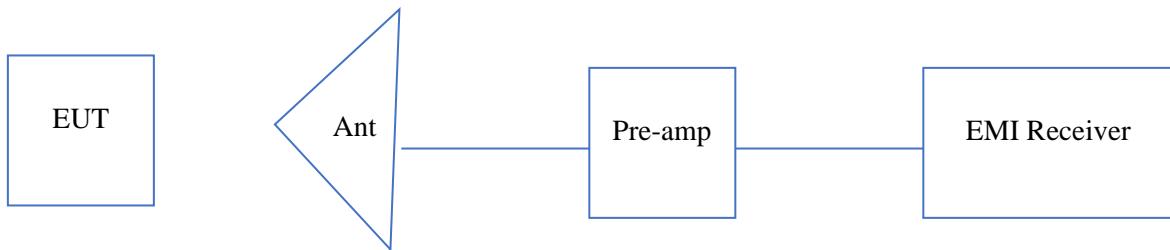

#### 4.2 Frequency Tolerance

##### 4.2.1 Requirement

FCC 15.225 (e)

The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from  $85\%$  to  $115\%$  of the rated supply voltage at a temperature of  $20$  degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

##### 4.2.2 Procedure

The EUT was placed in the temperature chamber. The frequency counter was connected to the transmitter output. For each temperature, the carrier frequency was recorded. In addition, the carrier frequency was recorded when the power was set to  $13.8$  V DC ( $115\%$  of  $12$ V DC) and to  $10.2$  V DC ( $85\%$  of  $12$ V DC).

## 4.2.3 Test Results 15.225 (e)

Nominal Frequency: 13561437 Hz

<b>Voltage (DC)</b>	<b>Temperature (C )</b>	<b>Measured Frequency (Hz)</b>	<b>Deviation from Reference (Hz)</b>	<b>Deviation (%)</b>
12	-20	13561445	8	5.9E-05
12	-10	13561439	2	1.47E-05
12	0	13561457	19.5	0.000144
12	10	13561462	25	0.000184
12	20	13561437	0	0
12	30	13561452	15	0.000111
12	40	13561434	-3.5	-2.6E-05
12	50	13561415	-22	-0.00016
10.2	20	13561438.5	1.5	1.1061E-05
13.8	20	13561439	2	1.4748E-05

#### 4.3 Occupied Bandwidth FCC 15.215

##### 4.3.1 Requirements

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.

##### 4.3.2 Procedure


The EUT was setup to transmit in normal operating condition.

Measurements were made with the loop antenna in close proximity of the EUT. Following the procedures of ANSI 63.10: 2013, the 20dB bandwidth measurements were taken. The following plots show Occupied Bandwidth.

## 4.3.3 Test Results

Frequency (MHz)	-20 dB Channel Bandwidth (Hz)	99% Channel Bandwidth (Hz)
13.56	41.0	162.0

-20dB &amp; 99% Channel Bandwidth Plot

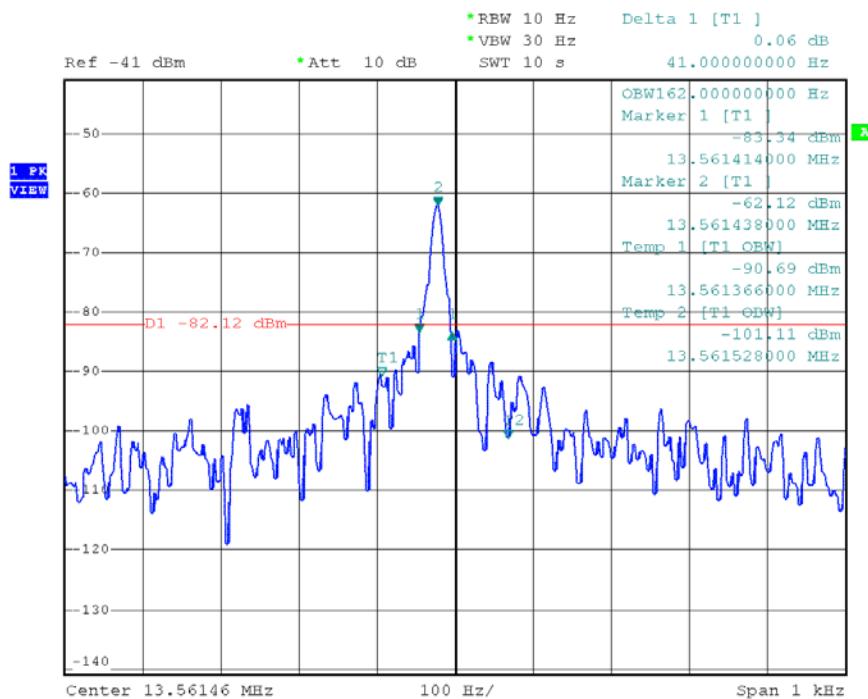

Date: 4.MAY.2020 13:02:55

#### 4.4 AC Line Conducted Emission FCC Rule 15.207, FCC 15.107

##### 4.4.1 Requirement

<b>Frequency Band MHz</b>	<b>Class B Limit dB(µV)</b>		<b>Class A Limit dB(µV)</b>	
	<b>Quasi-Peak</b>	<b>Average</b>	<b>Quasi-Peak</b>	<b>Average</b>
0.15-0.50	66 to 56 *	56 to 46 *	79	66
0.50-5.00	56	46	73	60
5.00-30.00	60	50	73	60

*Note: \*Decreases linearly with the logarithm of the frequency. At the transition frequency the lower limit applies.*

##### 4.4.2 Procedure

Measurements are carried out using quasi-peak and average detector receivers in accordance with CISPR 16. An AMN is required to provide a defined impedance at high frequencies across the power feed at the point of measurement of terminal voltage and also to provide isolation of the circuit under test from the ambient noise on the power lines. An AMN as defined in CISPR 16 shall be used.

The EUT is located so that the distance between the boundary of the EUT and the closest surface of the AMN is 0.8m.

Where a flexible mains cord is provided by the manufacturer, this shall be 1m long or if in excess of 1m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4m in length.

The EUT is arranged and connected with cables terminated in accordance with the product specification.



Conducted disturbance is measured between the phase lead and the reference ground, and between the neutral lead and the reference ground. Both measured values are reported.

The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. A vertical, metal reference plane is placed 0.4m from the EUT. The vertical metal reference-plane is at least 2m by 2m. The EUT shall be kept at least 0.8m from any other metal surface or other ground plane not being part of the EUT. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for larger EUT.

Floor standing EUT are placed on a horizontal metal ground plane and isolated from the ground plane by resting on an insulating material. The metal ground plane extends at least 0.5m beyond the boundaries of the EUT and has minimum dimensions of 2m by 2m.

EUT was placed in transmission mode then tested for conducted emissions per ANSI C63.10: 2013, ANSI C63.4-2014 to ensure the device complies with 15.207 & 15.107.

## 4.4.3 Test Result

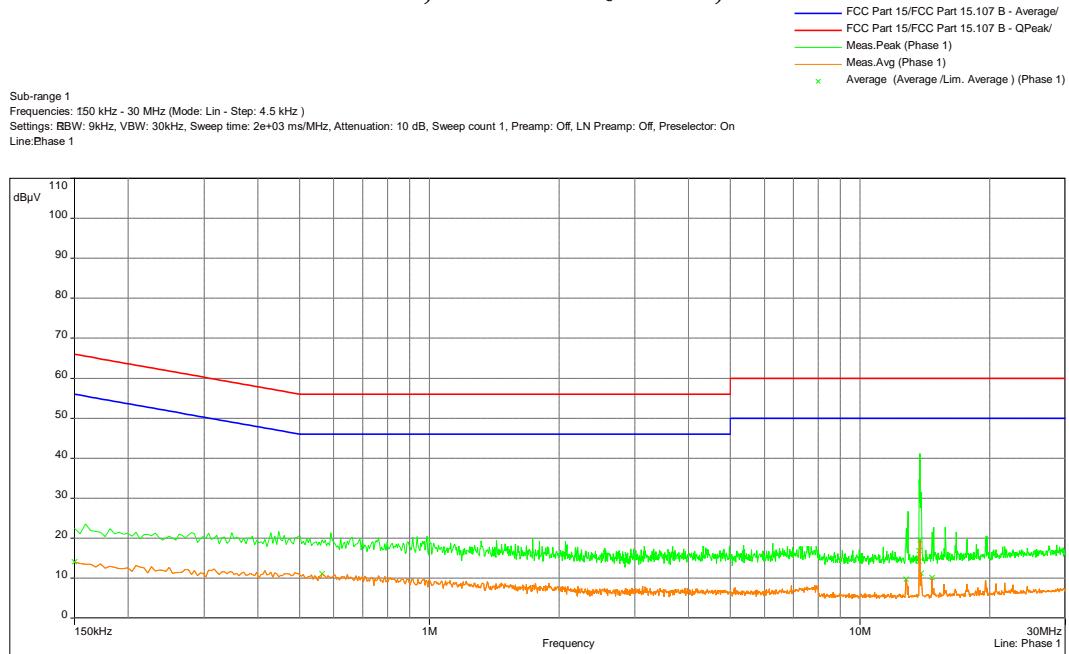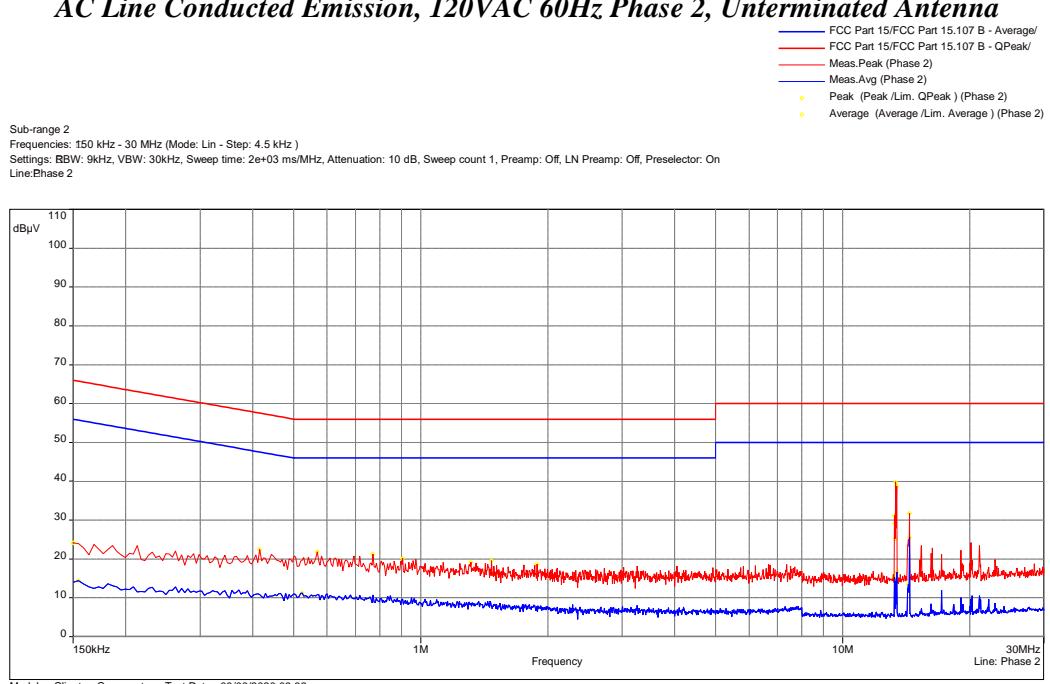
15.107 & 15.207
**AC Line Conducted Emission, 120VAC 60Hz Phase 1, Unterminated Antenna**

**AC Line Conducted Emission, 120VAC 60Hz Phase 2, Unterminated Antenna**


Frequency (MHz)	QPeak (dB $\mu$ V)	Lim. QPeak (dB $\mu$ V)	Margin (dB)	Comment	Correction (dB)
0.150	24.1	66	-41.9	Phase 2	11.4
0.159	23.5	65.5	-42.0	Phase 1	11.3
0.416	22.5	57.5	-35.1	Phase 2	10.5
0.569	21.9	56	-34.1	Phase 2	10.5
0.591	21.4	56	-34.6	Phase 1	10.4
0.771	21.3	56	-34.7	Phase 2	10.4
0.906	20.2	56	-35.8	Phase 2	10.4
0.987	20.5	56	-35.5	Phase 1	10.4
1.001	20.1	56	-35.9	Phase 1	10.4
1.316	19.2	56	-36.8	Phase 2	10.4
1.433	19.5	56	-36.5	Phase 1	10.4
1.473	19.6	56	-36.4	Phase 2	10.4
1.739	20.0	56	-36.0	Phase 1	10.4
1.802	19.3	56	-36.7	Phase 1	10.4
1.887	18.7	56	-37.3	Phase 2	10.4
12.926	26.8	60	-33.3	Phase 1	10.7
13.277	31.2	60	-28.8	Phase 2	10.7
13.290	29.2	60	-30.8	Phase 2	10.7
13.313	25.3	60	-34.7	Phase 2	10.7
13.349	39.7	60	-20.3	Phase 2	10.7
13.443	38.8	60	-21.2	Phase 2	10.7
13.718	34.6	60	-25.4	Phase 1	10.7
13.772	41.2	60	-18.8	Phase 1	10.7
13.821	27.5	60	-32.5	Phase 1	10.7
13.830	28.5	60	-31.5	Phase 1	10.7
13.880	31.5	60	-28.5	Phase 1	10.7
14.411	31.8	60	-28.2	Phase 2	10.7


Frequency (MHz)	Avg (dB $\mu$ V)	Lim. Avg (dB $\mu$ V)	Margin (dB)	Comment	Correction (dB)
0.150	14.1	56	-42.0	Phase 1	11.4
0.155	14.4	55.8	-41.3	Phase 2	11.4
0.524	11.3	46	-34.7	Phase 2	10.5
0.564	11.1	46	-34.9	Phase 1	10.4
12.809	9.8	50	-40.3	Phase 1	10.7
13.259	15.4	50	-34.7	Phase 2	10.7
13.290	14.9	50	-35.2	Phase 2	10.7
13.349	14.3	50	-35.7	Phase 2	10.7
13.443	16.6	50	-33.4	Phase 2	10.7
13.718	16.8	50	-33.2	Phase 1	10.7
13.731	14.2	50	-35.8	Phase 1	10.7
13.772	19.5	50	-30.5	Phase 1	10.7
13.857	11.1	50	-38.9	Phase 1	10.7
14.321	13.5	50	-36.5	Phase 2	10.7
14.411	25.5	50	-24.5	Phase 2	10.7
14.726	10.1	50	-40.0	Phase 1	10.7

15.107 & 15.207

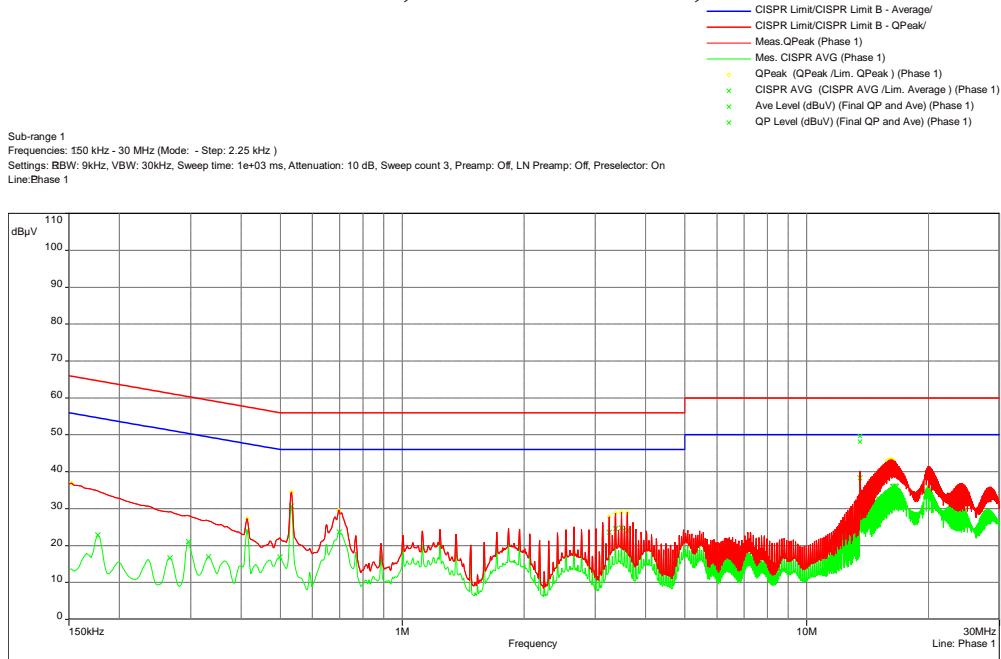**AC Line Conducted Emission, 120VAC 60Hz Phase 1, Terminated Antenna**



**AC Line Conducted Emission, 120VAC 60Hz Phase 2, Terminated Antenna**

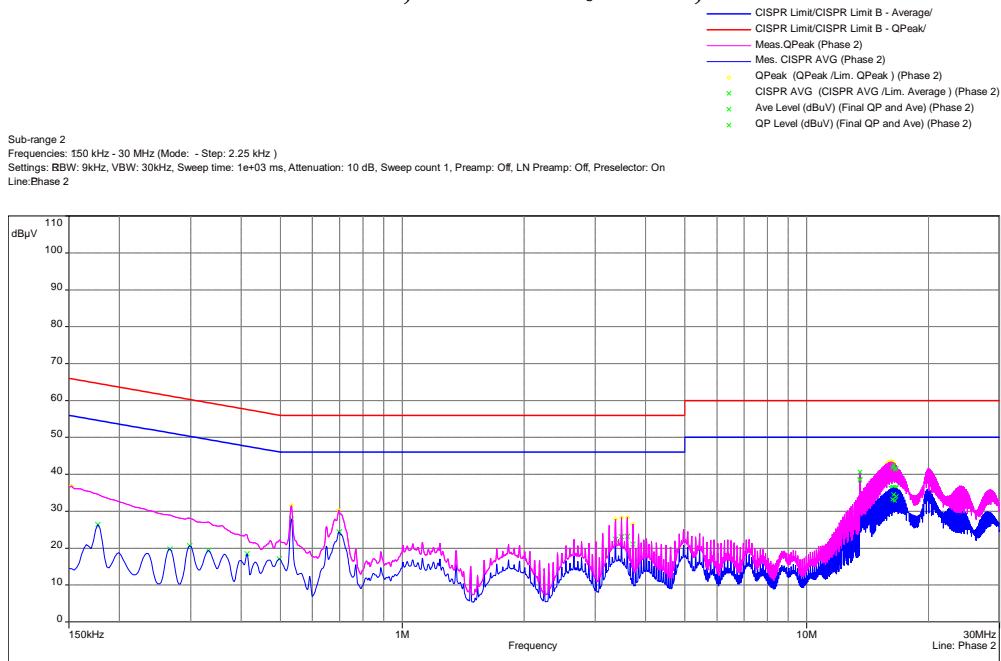

Frequency (MHz)	Ave Level (dB $\mu$ V)	QP Level (dB $\mu$ V)	Ave Limit (dB $\mu$ V)	QP Limit (dB $\mu$ V)	Ave Margin (dB)	QP Margin (dB)	Line	Correction (dB)
13.561	48.1	49.67	50	60	-1.9	-10.33	Phase 1	11.27
13.561	38.64	40.61	50	60	-11.36	-19.39	Phase 2	11.28
16.297	33.24	41.78	50	60	-16.76	-18.22	Phase 2	11.43
16.418	34.48	42.39	50	60	-15.52	-17.61	Phase 2	11.43
16.534	32.91	41.28	50	60	-17.09	-18.72	Phase 2	11.44
16.653	33.99	41.51	50	60	-16.01	-18.49	Phase 2	11.45

<b>Result</b>	<b>Complies</b> by 1.9 dB
---------------	---------------------------

#### 4.5 Radiated Emissions on Digital Parts

FCC Ref: 15.109, ICES 003, RSS Gen

##### 4.5.1 Test Limit

##### ***Limits for Electromagnetic Radiated Emissions FCC Section 15.109(b), ICES 003\*, RSS GEN***

Frequency (MHz)	Class A at 10m dB(µV/m)	Class B at 3m dB(µV/m)
30-88	39	40.0
88-216	43.5	43.5
216-960	46.4	46.0
Above 960	49.5	54.0

\* According to FCC Part 15.109(g) an alternative to the radiated emission limits shown above, digital devices may be shown to comply with the limit of CISPR Pub. 22


##### 4.5.2 Procedures

Radiated measurements were taken. 120 kHz resolution bandwidth was used from 30 MHz - 1 GHz. 1 MHz resolution bandwidth was used for measurements done above 1 GHz. All plots are corrected for cable loss, antenna factor, and preamp.

Radiated emission measurements were performed from 30 MHz to 18000 MHz. The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Measurements recorded in this section were made with the Transmitter in Tx mode.

## 4.5.3 Test Results

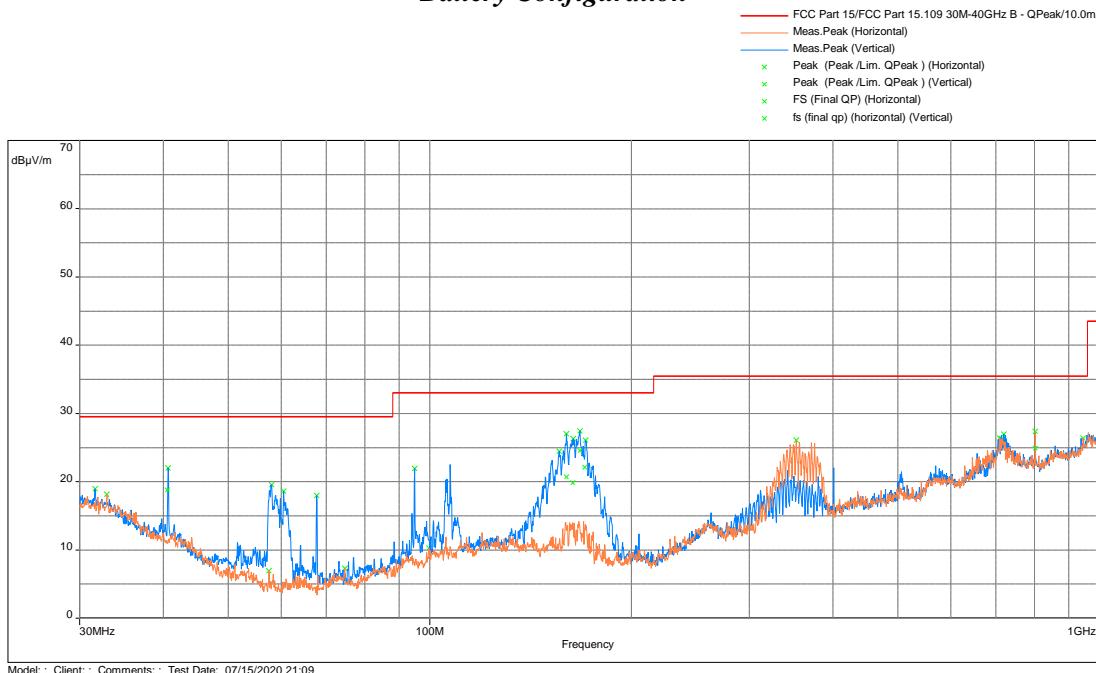
 FCC Part 15 Subpart B and ICES-003, Radiated Disturbance, 30 MHz to 1000 MHz,  
 Battery Configuration


Freq (MHz)	FS @ 10m dB(uV/m)	Limit dB(uV/m)	Margin (dB)	Azimuth (Deg)	Height (m)	Polarity	RA (dBuV)	Correction (dB)
40.526	18.8	29.5	-10.7	109.25	3.8	Vertical	33.0	-14.1
160.031	20.7	33	-12.3	154	1.1	Vertical	36.9	-16.2
163.635	19.9	33	-13.1	234	1.16	Vertical	36.4	-16.5
167.563	24.6	33	-8.5	318.5	1.1	Vertical	41.4	-16.9
170.340	22.1	33	-10.9	319.25	1.51	Vertical	39.2	-17.1
801.808	24.9	35.5	-10.6	255.5	1.91	Horizontal	27.3	-2.4

Note: FS = RA + Correction

Correction = AF + CF - Preamp

**FCC Part 15 Subpart B and ICES-003, Radiated Disturbance, 30 MHz to 1000 MHz,  
DC Power Configuration**

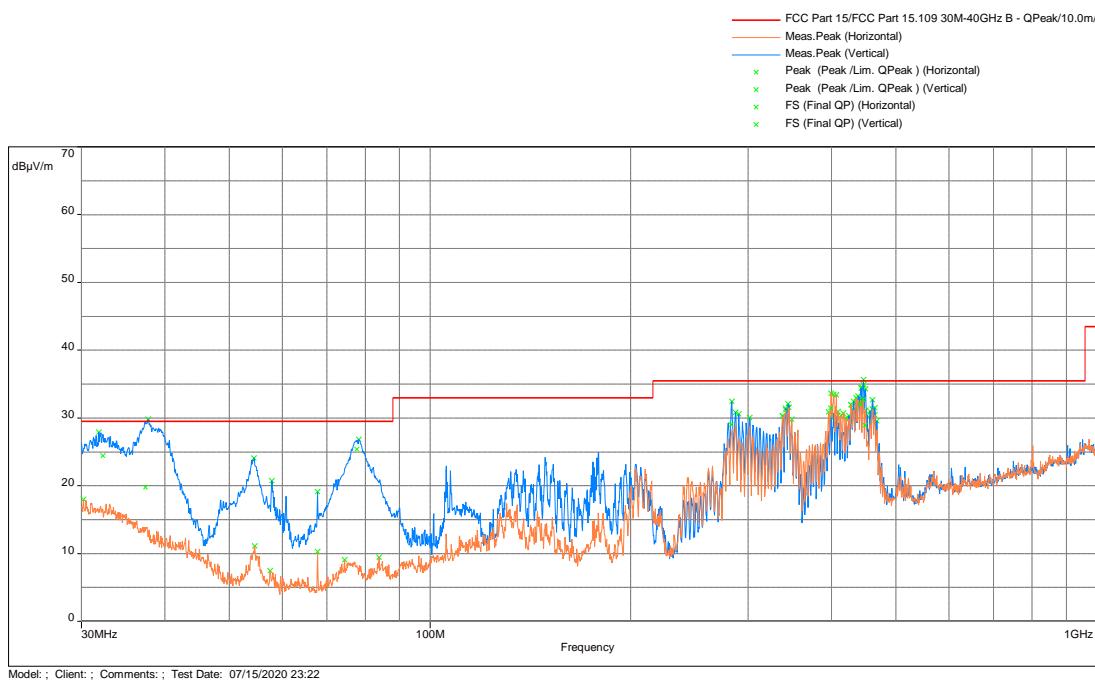


Freq (MHz)	FS @10m dB(uV/m)	Limit dB(uV/m)	Margin (dB)	Azimuth (Deg)	Height (m)	Polarity	RA (dBuV)	Correction (dB)
32.326	24.4	29.5	-5.1	183.25	1.02	Vertical	34.1	-9.9
37.415	19.8	29.5	-9.7	88.5	1.02	Vertical	32.5	-12.5
77.628	25.4	29.5	-4.1	53	1.25	Vertical	45.6	-20.3
282.824	29.0	35.5	-6.5	61	1	Vertical	42.6	-13.6
399.040	31.5	35.5	-4.0	181	1.95	Horizontal	41.6	-10.2
442.539	32.0	35.5	-3.5	73	3.67	Vertical	41.2	-9.2
446.120	32.7	35.5	-2.8	72	3.62	Vertical	41.9	-9.2
449.154	28.9	35.5	-6.6	92	3.84	Vertical	38.0	-9.2

Note: FS = RA + Correction


Correction = AF + CF - Preamp

**FCC Part 15 Subpart B and ICES-003, Radiated Disturbance, Peak vs Peak limit,  
Battery Configuration**

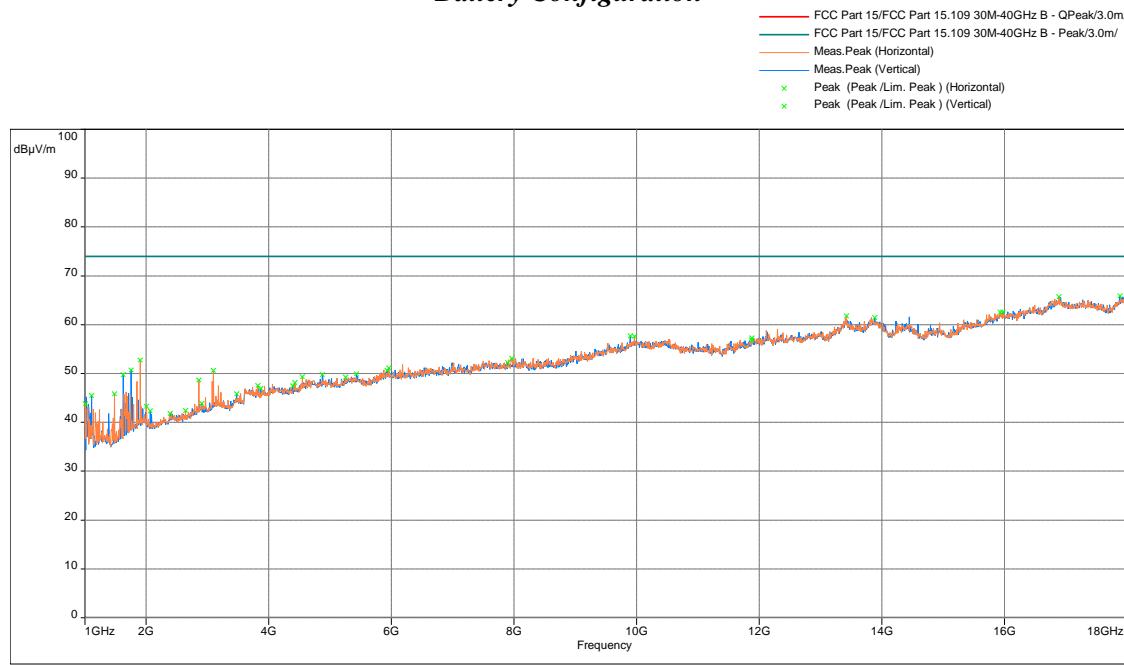


Model: ; Client: ; Comments: ; Test Date: 04/27/2020 13:47

**FCC Part 15 Subpart B and ICES-003, Radiated Disturbance, Peak vs Peak limit,  
DC Power Configuration**

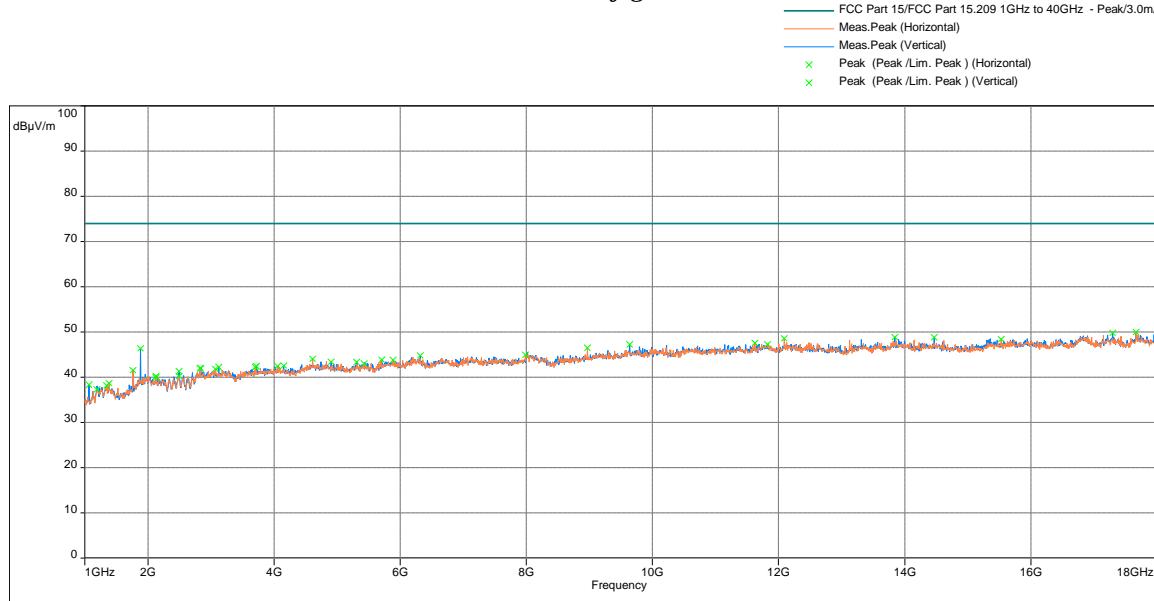


Model: ; Client: ; Comments: ; Test Date: 08/03/2020 11:09

**FCC Part 15 Subpart B and ICES-003, Radiated Disturbance, 1-18 GHz, Avg vs Avg limit, Battery Configuration**

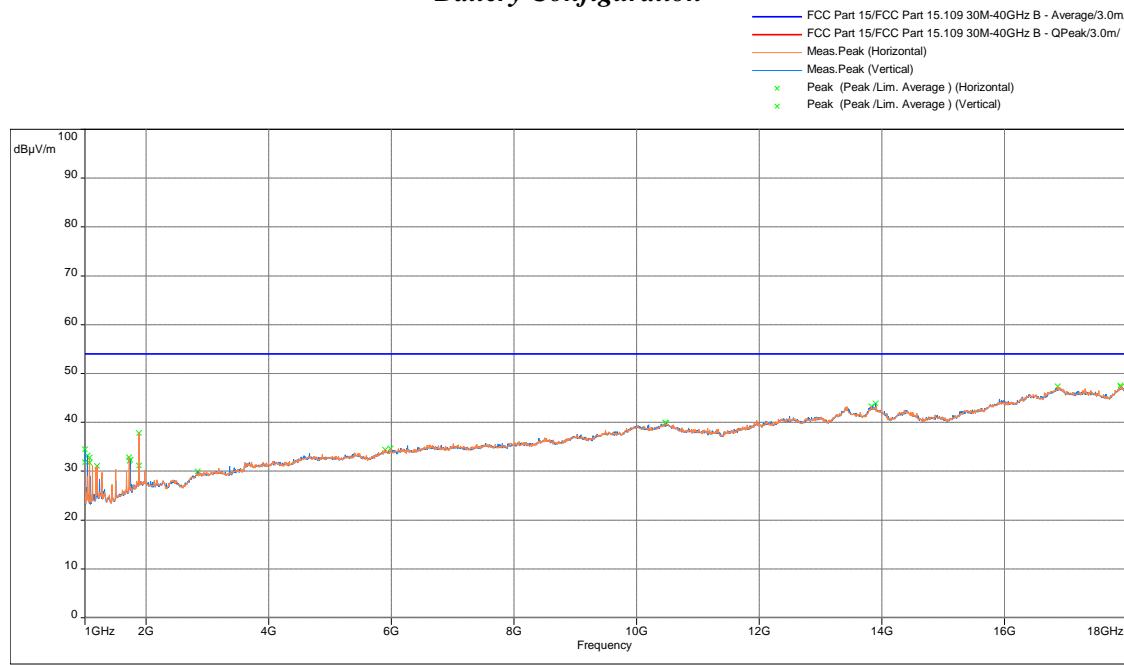

Model: ; Client: ; Comments: ; Test Date: 04/27/2020 14:19

**FCC Part 15 Subpart B and ICES-003, Radiated Disturbance, 1-18 GHz, Avg vs Avg limit, DC Power Configuration**

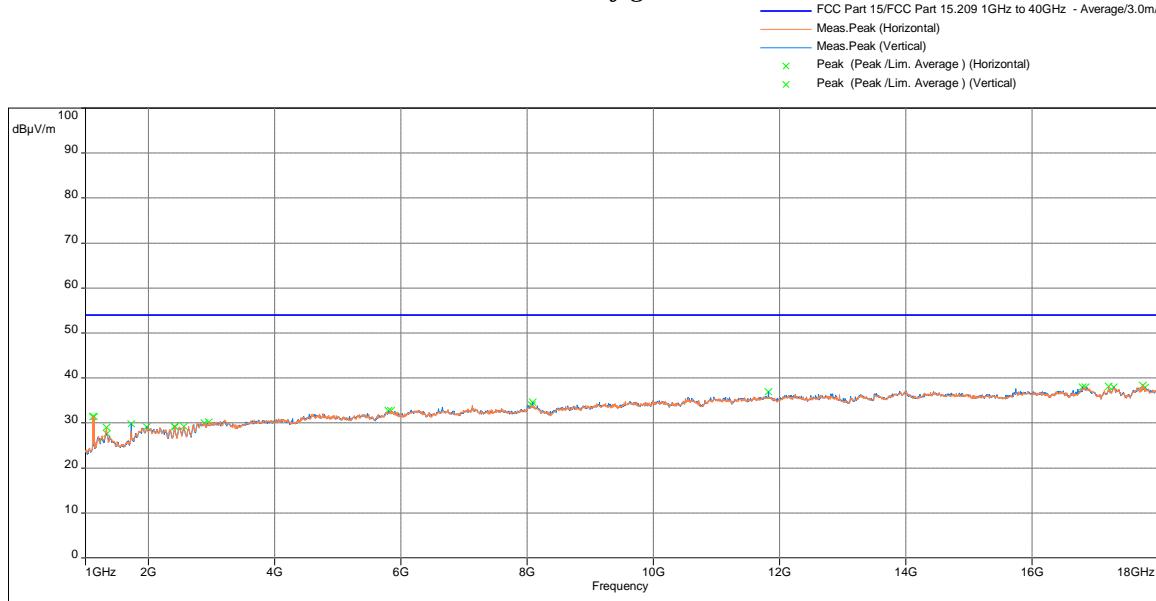


Model: ; Client: ; Comments: ; Test Date: 08/03/2020 11:25

<b>Result</b>	<b>Complies by 2.8 dB</b>
---------------	---------------------------

## 4.5.4 Test Configuration Photographs

**The following photographs show the testing configurations used.**

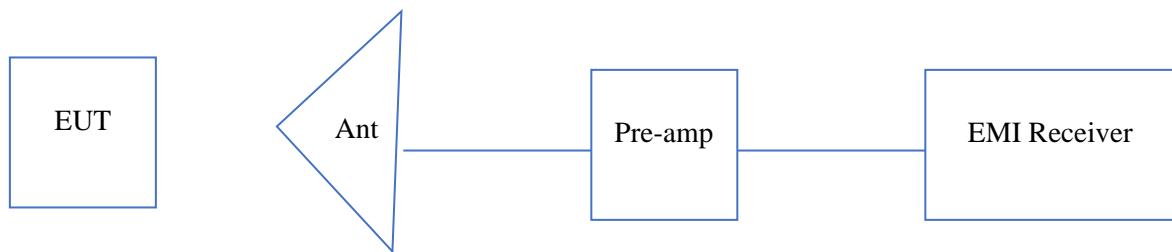

## 5.0 List of test equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Asset No.	Calibration	Cal Due
EMI Receiver	Rohde and Schwarz	ESR	ITS 01607	12	10/23/20
Spectrum Analyzer	Rohde and Schwarz	FSU	ITS 00913	12	03/26/21
Spectrum Analyzer	Rohde and Schwarz	FSU	ITS 00913	12	03/26/21
Passive Loop Antenna	EMCO	6512	ITS 001598	12	10/22/20
Pre-Amplifier	Sonoma	310	ITS 00942	12	03/15/21
BI-Log Antenna	Antenna Research	LPB-2513	ITS 00355	12	04/24/21
Horn Antenna	ETS-Lindgren	3117-PA	ITS 01636	12	01/17/21
Horn Antenna	ETS Lindgren	3116C	ITS 01376	12	04/15/21
Pre-Amplifier	Miteq	TTA1840-35-S-M	ITS 01393	12	03/02/21
Notch Filter	Micro-Tronics	BRM50702	ITS 01166	12	05/14/21
Loop Sensor	Solar Electronics	7334-1	ITS 01608	12	10/09/20
RF Cable	Megaphase	EMC1-K1K1-236	ITS 01537	12	04/17/21
RF Cable	TRU Corporation	TRU CORE 300	ITS 01330	12	05/09/21
RF Cable	TRU Corporation	TRU CORE 300	ITS 00465	12	08/16/21
RF Cable	TRU Corporation	TRU CORE 300	ITS 01470	12	08/16/21
LISN	FCC	FCC-LISN-50-50-M-H	ITS 00551	12	11/13/20

Software used for emission compliance testing utilized the following:

Name	Manufacturer	Version	Template/Profile
BAT-EMC	Nexio	3.17.0.10	Proxess April 23 Radiated Emissions.bpp

## 6.0 Document History

Revision/ Job Number	Writer Initials	Reviewer Initials	Date	Change
1.0 / G104273165	TM	KV	August 11, 2020	Original document

**7. Appendix A: Evaluation for spurious emissions of pre-certified radio module installed inside the host equipment per KDB 996369 D04.**

## A1.0 Radiated Emissions (ANSI C63.10)

## A1.1 Method

Tests are performed in accordance with ANSI C63.10, FCC 47CFR PT 15.247.

**TEST SITE: 10m ALSE**

**10m ALSE:** The test facility is located at 1365 Adams Court, Menlo Park, California. The test site is a 10-meter semi-anechoic chamber. The site meets the characteristics of ANSI C63.10:2013. For measurements, a remotely controlled flush-mount metal-top turntable is used to rotate the EUT a full 360 degrees. A remote controlled non-conductive antenna mast is used to scan the antenna height from one to four meters.

Above 1 GHz an antenna mast with boresight capabilities is used.

The A2LA certificate number for this site is 1755-01

**Measurement Uncertainty**

Measurement	Frequency Range	Expanded Uncertainty (k=2)	Ucispr
Radiated Emissions, 10m	30-200 MHz	4.7 dB	6.3 dB
Radiated Emissions, 10m	200-1000 MHz	4.6 dB	6.3 dB
Radiated Emissions, 3m	1-18 GHz	5.1 dB	5.2 dB

As shown in the table above our radiated emissions  $U_{lab}$  is less than the corresponding  $U_{CISPR}$  reference value in CISPR 16-4-2 Table 1, hence the compliance of the product is only based on the measured value, and no measurement uncertainty correction is required, based on CISPR 32.

## Sample Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where

FS = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in  $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows.

Assume a receiver reading of 52.0  $\text{dB}\mu\text{V}$  is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving a field strength of 32  $\text{dB}\mu\text{V}/\text{m}$ . This value in  $\text{dB}\mu\text{V}/\text{m}$  was converted to its corresponding level in  $\mu\text{V}/\text{m}$ .

$$RA = 52.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}/\text{m}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$FS = 32 \text{ dB}\mu\text{V}/\text{m}$$

To convert from  $\text{dB}\mu\text{V}$  to  $\mu\text{V}$  or  $\text{mV}$  the following was used:

$$UF = 10^{(NF/20)} \text{ where } UF = \text{Net Reading in } \mu\text{V}$$

$$NF = \text{Net Reading in } \text{dB}\mu\text{V}$$

### Example:

$$FS = RA + AF + CF - AG = 52.0 + 7.4 + 1.6 - 29.0 = 32.0$$

$$UF = 10^{(32 \text{ dB}\mu\text{V} / 20)} = 39.8 \mu\text{V}/\text{m}$$

**A1.2 Test Equipment Used:**

See Section 5.0 for specific equipment used for this test

**Software Utilized:**


Name	Manufacturer	Version
BAT-EMC	NEXIO	3.19.1.19

**A1.3 Result:**

The sample tested was found to comply.


A1.4 Photographs:

**The following photographs show the testing configurations used.**

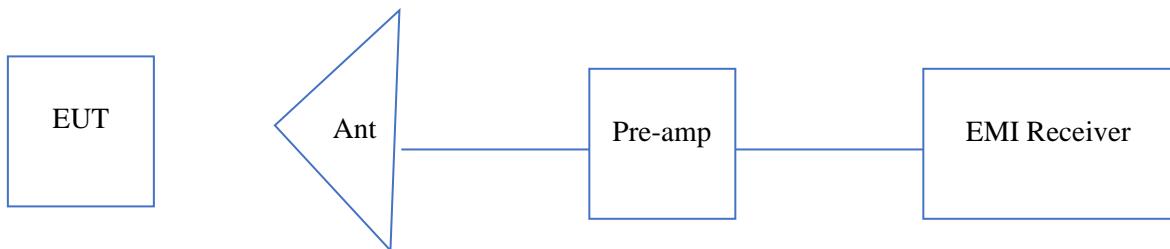

## A1.5 Test Data

## Radiated Spurious Emissions from 30 MHz to 1000 MHz, Battery Configuration

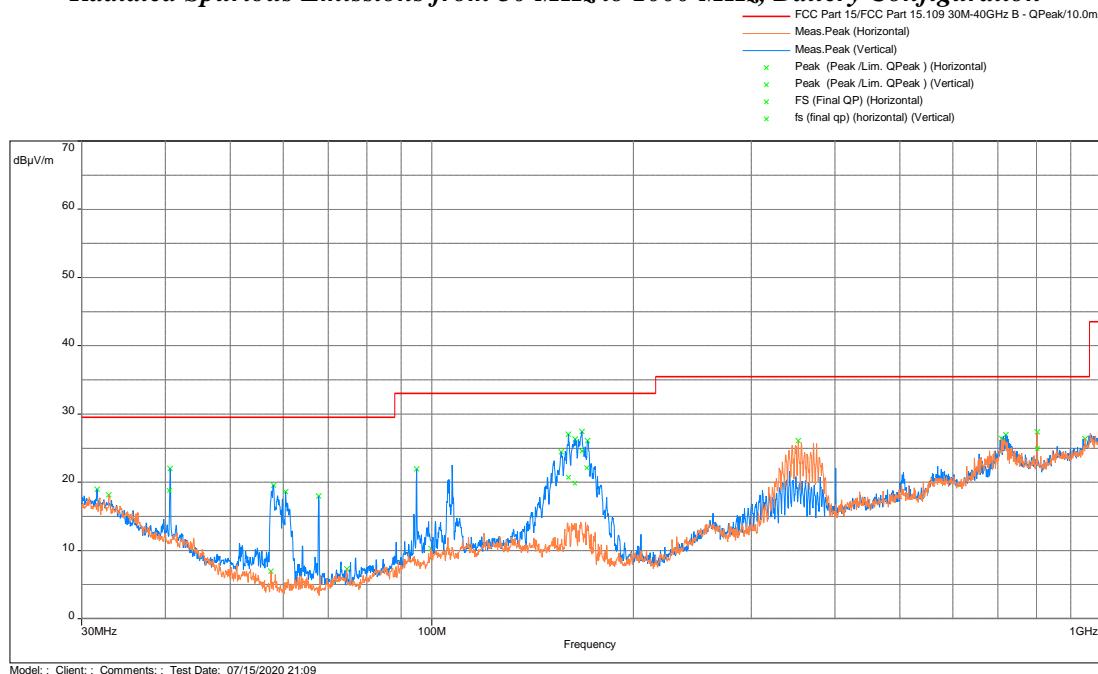


Freq (MHz)	FS @10m dB(uV/m)	Limit dB(uV/m)	Margin (dB)	Azimuth (Deg)	Height (m)	Polarity	RA (dBuV)	Correction (dB)
40.526	18.8	29.5	-10.7	109.25	3.8	Vertical	33.0	-14.1
160.031	20.7	33	-12.3	154	1.1	Vertical	36.9	-16.2
163.635	19.9	33	-13.1	234	1.16	Vertical	36.4	-16.5
167.563	24.6	33	-8.5	318.5	1.1	Vertical	41.4	-16.9
170.340	22.1	33	-10.9	319.25	1.51	Vertical	39.2	-17.1
801.808	24.9	35.5	-10.6	255.5	1.91	Horizontal	27.3	-2.4

Note: FS = RA + Correction

Correction = AF + CF - Preamp

## Radiated Spurious Emissions from 30 MHz to 1000 MHz, DC Power Configuration

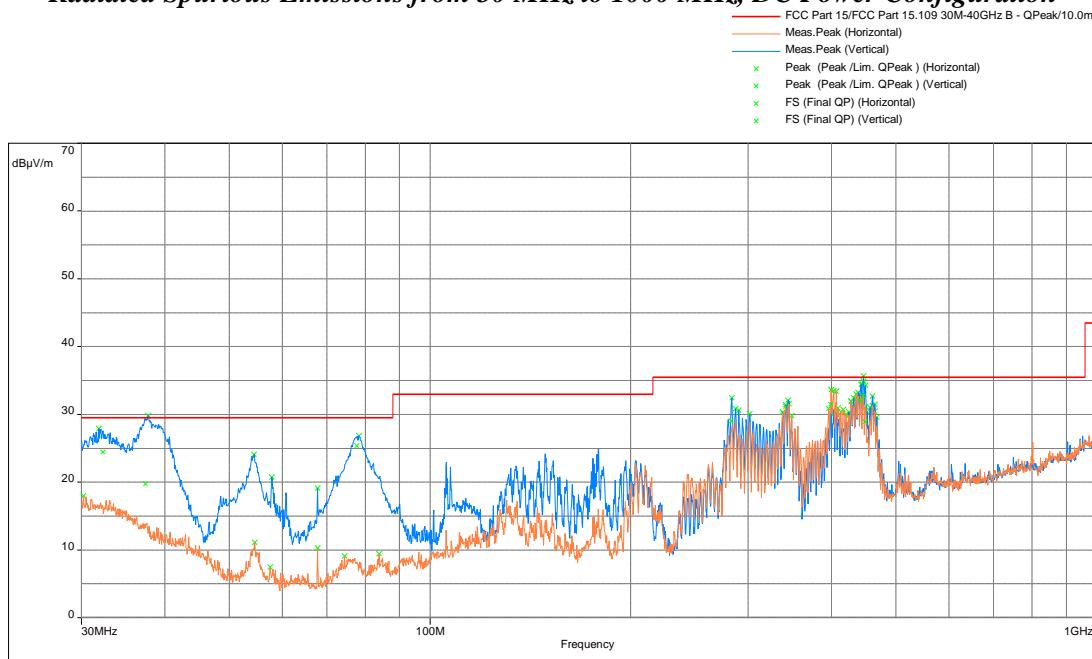


Model: ; Client: ; Comments: ; Test Date: 07/15/2020 23:22

Freq (MHz)	FS @10m dB(uV/m)	Limit dB(uV/m)	Margin (dB)	Azimuth (Deg)	Height (m)	Polarity	RA (dBuV)	Correction (dB)
32.326	24.4	29.5	-5.1	183.25	1.02	Vertical	34.1	-9.9
37.415	19.8	29.5	-9.7	88.5	1.02	Vertical	32.5	-12.5
77.628	25.4	29.5	-4.1	53	1.25	Vertical	45.6	-20.3
282.824	29.0	35.5	-6.5	61	1	Vertical	42.6	-13.6
399.040	31.5	35.5	-4.0	181	1.95	Horizontal	41.6	-10.2
442.539	32.0	35.5	-3.5	73	3.67	Vertical	41.2	-9.2
446.120	32.7	35.5	-2.8	72	3.62	Vertical	41.9	-9.2
449.154	28.9	35.5	-6.6	92	3.84	Vertical	38.0	-9.2

Note: FS = RA + Correction


Correction = AF + CF - Preamp

### Radiated Spurious Emissions from 1-18 GHz, Peak vs Peak limit, Battery Configuration

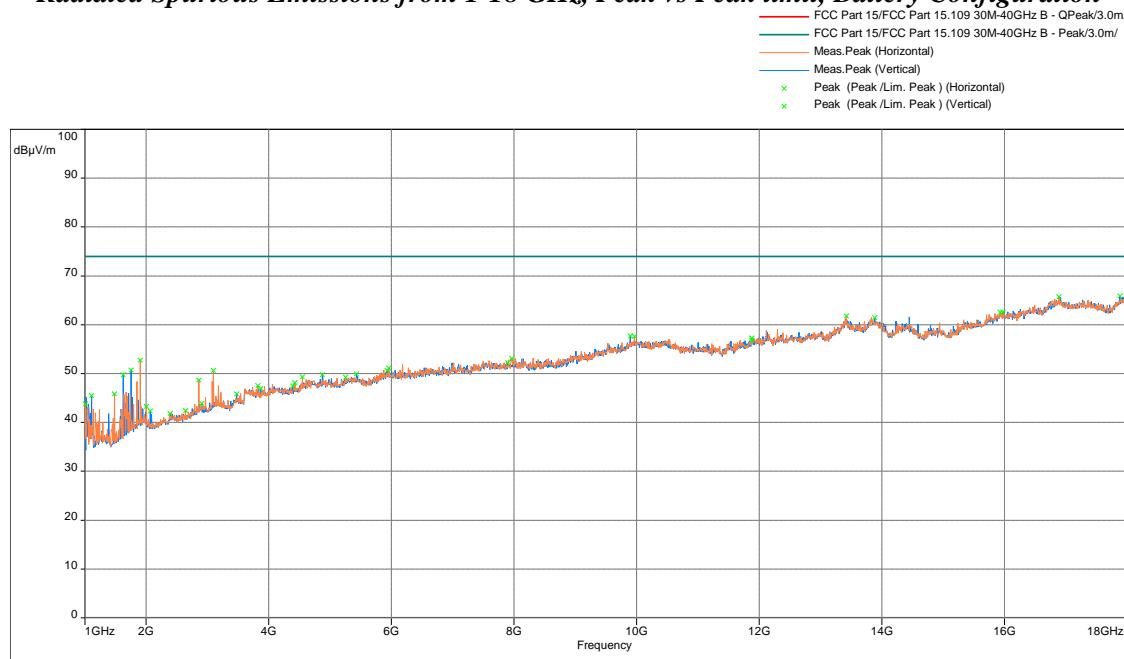


Model: ; Client: ; Comments: ; Test Date: 04/27/2020 13:47

### Radiated Spurious Emissions from 1-18 GHz, Peak vs Peak limit, DC Power Configuration

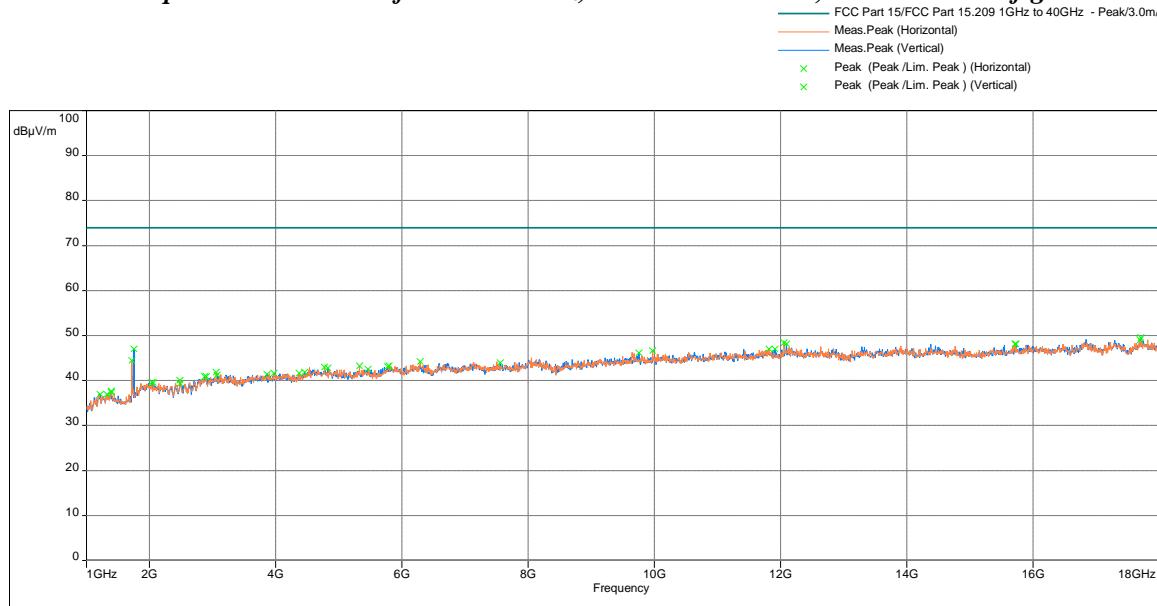


Model: ; Client: ; Comments: ; Test Date: 08/03/2020 11:21


### Radiated Spurious Emissions from 1-18 GHz, Avg vs Avg limit, Battery Configuration

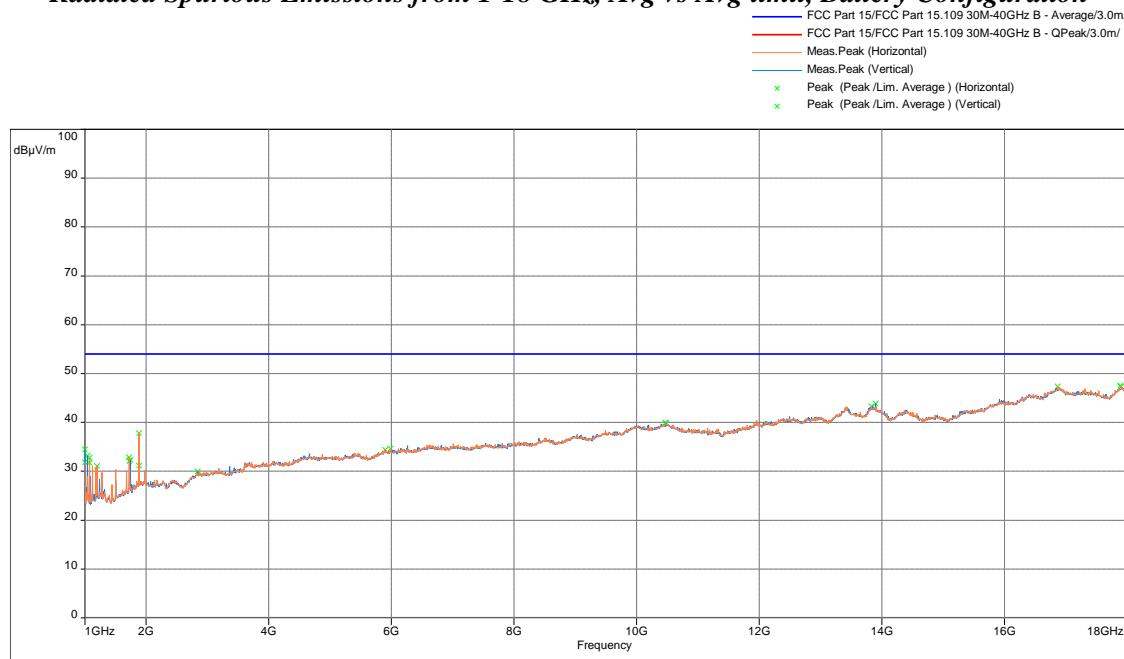

### Radiated Spurious Emissions from 1-18 GHz, Avg vs Avg limit, DC Power Configuration

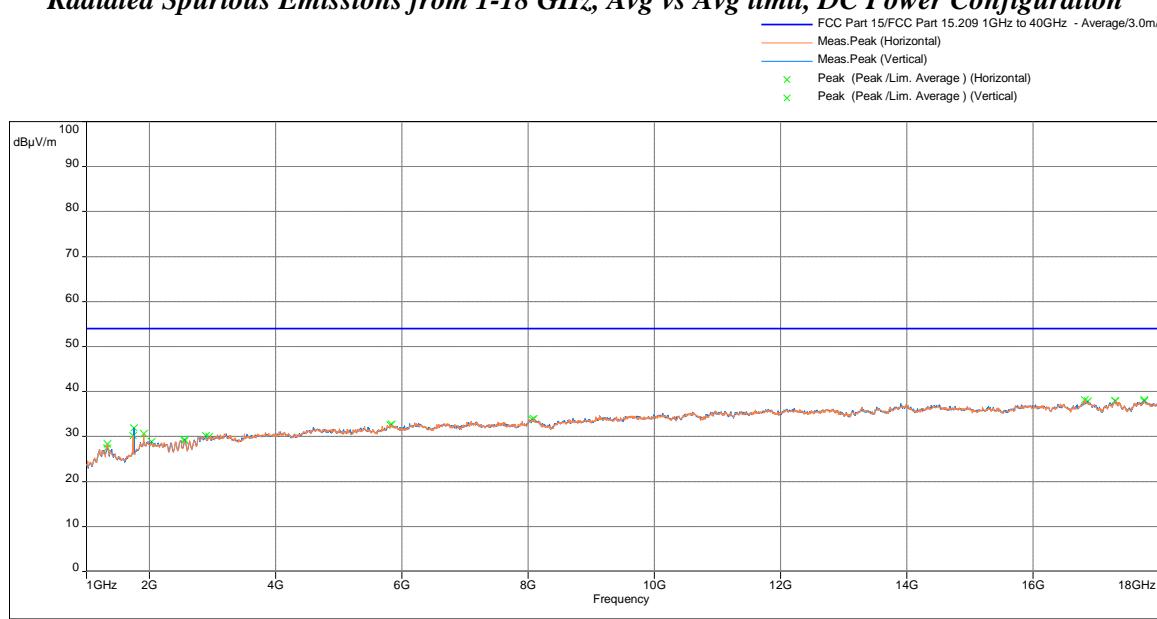


### Radiated Spurious Emissions from 18-40 GHz, Peak vs Peak limit, Battery Configuration

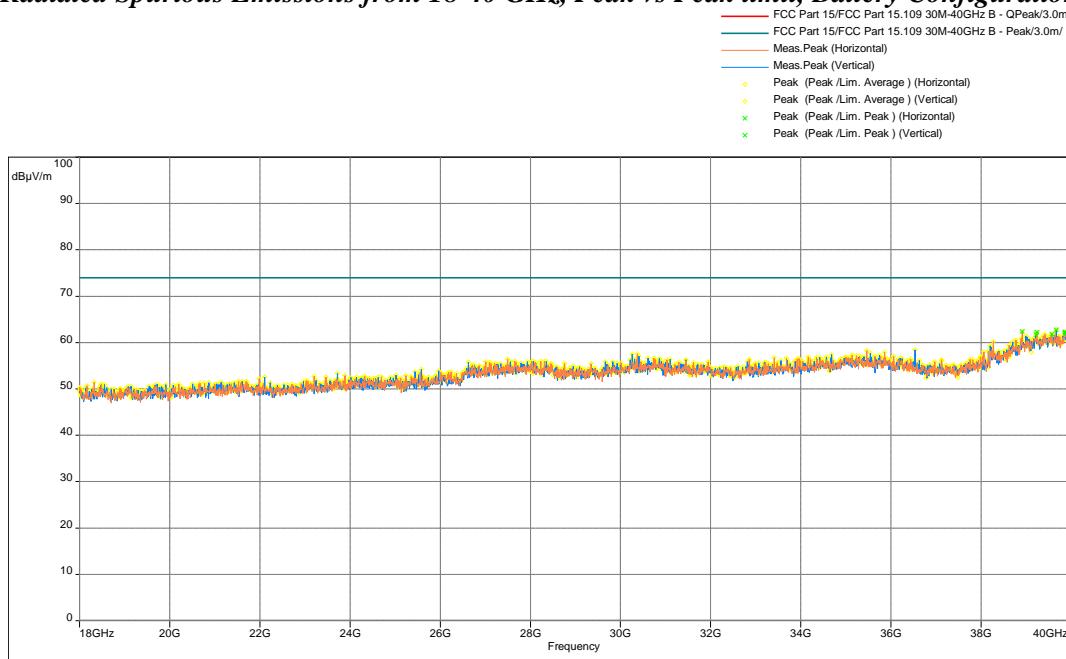


Model: ; Client: ; Comments: ; Test Date: 04/27/2020 15:38

### Radiated Spurious Emissions from 18-40 GHz, Peak vs Peak limit, DC Power Configuration

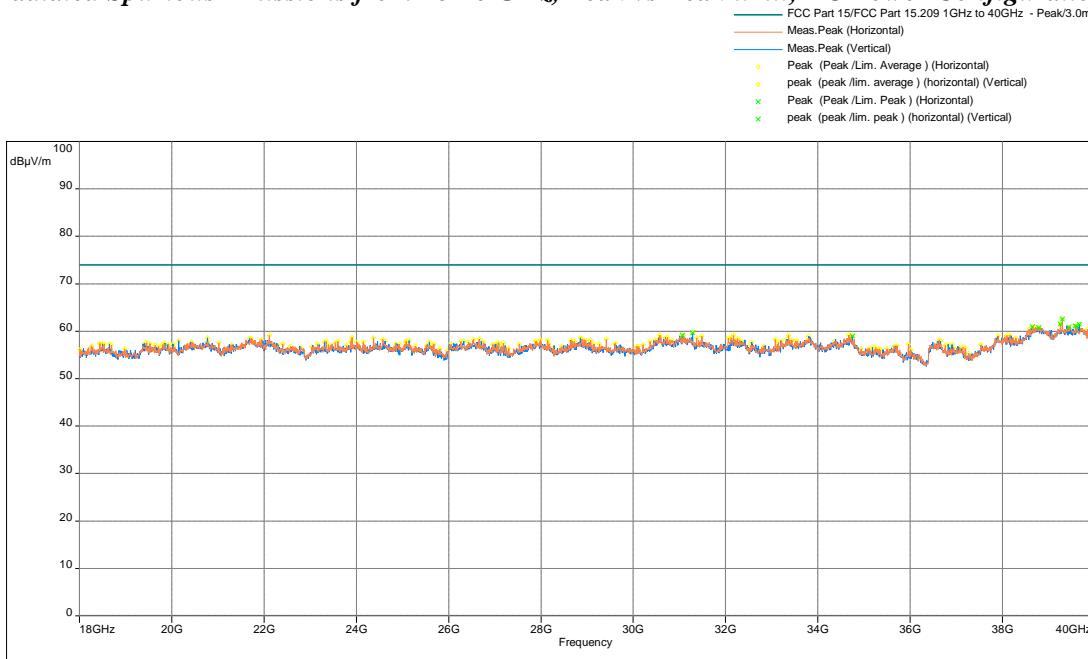


Model: ; Client: ; Comments: ; Test Date: 08/03/2020 12:09

### Radiated Spurious Emissions from 18-40 GHz, Avg vs Avg limit, Battery Configuration

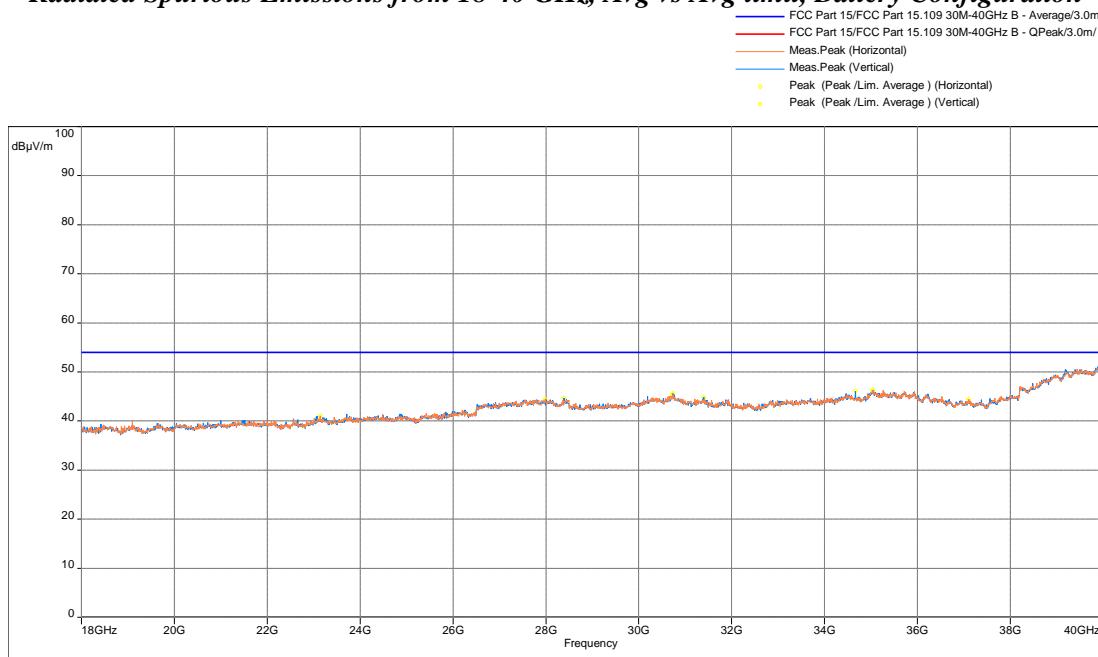

Model: ; Client: ; Comments: ; Test Date: 04/27/2020 15:39

### Radiated Spurious Emissions from 18-40 GHz, Avg vs Avg limit, DC Power Configuration

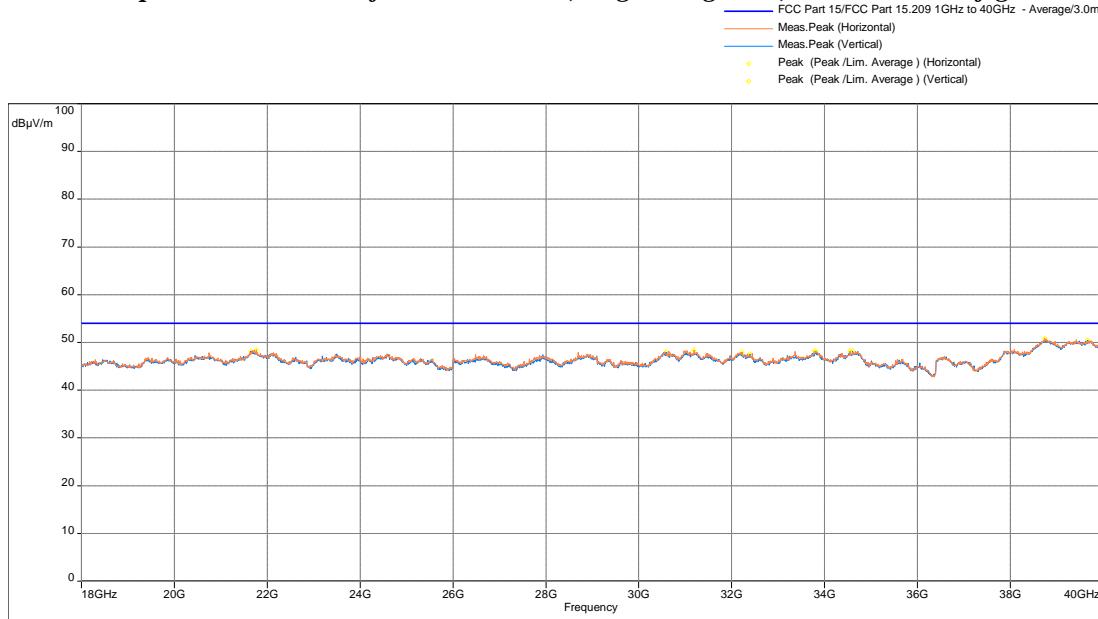

Model: ; Client: ; Comments: ; Test Date: 08/03/2020 11:57

***END OF REPORT***