

FCC TEST REPORT

For

Anhui Ronds Science & Technology Incorporated Company

Wireless Machinery Monitoring Station

Model No.: RH560-WL

Prepared For : Anhui Ronds Science & Technology Incorporated Company
Address : 8th Floor, B1 Building, High-techInnovation Park, No.800 Wangjiang
West Road, Hefei, Anhui, 230088, China

Prepared For : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan
District, Shenzhen, Guangdong, China
Tel: (86) 755-26066544 Fax: (86) 755-26014772

Report Number : R0117011038W
Date of Test : Feb. 07~Mar. 27, 2017
Date of Report : Mar. 27, 2017

Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	6
1.5. List of channels.....	6
1.6. Description Of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Measurement Uncertainty.....	8
1.9. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	16
4.3. Test Procedure.....	17
4.4. Test Data.....	18
5. Maximum Peak Output Power Test.....	25
5.1. Test Standard and Limit.....	25
5.2. Test Setup.....	25
5.3. Test Procedure.....	25
5.4. Test Data.....	25
6. 6DB Occupy Bandwidth Test.....	31
6.1. Test Standard and Limit.....	31
6.2. Test Setup.....	31
6.3. Test Procedure.....	31
6.4. Test Data.....	31
7. Power Spectral Density Test.....	37
7.1. Test Standard and Limit.....	37
7.2. Test Setup.....	37
7.3. Test Procedure.....	37
7.4. Test Data.....	37
8. 100kHz Bandwidth of Frequency Band Edge Requirement.....	43
8.1. Test Standard and Limit.....	43
8.2. Test Setup.....	43
8.3. Test Procedure.....	43

8.4. Test Data.....	43
9. Antenna Requirement.....	47
9.1. Test Standard and Requirement.....	47
9.2. Antenna Connected Construction.....	47
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	49
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	51
APPENDIX III -- INTERNAL PHOTOGRAPH.....	55

Anbotech

TEST REPORT

Applicant : Anhui Ronds Science & Technology Incorporated Company
Manufacturer : Anhui Ronds Science & Technology Incorporated Company
Product Name : Wireless Machinery Monitoring Station
Model No. : RH560-WL
Trade Mark : RONDS
Rating(s) : AC 100-240V, 50/60Hz, 0.35A

Test Standard(s) : FCC Part15 Subpart C 2016, Section 15.247

Test Method(s) : ANSI C63.10: 2013, KDB558074 D01 DTS Meas Guidance v04

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test : Feb. 07~Mar. 27, 2017

Prepared by :



Winkey Wang

(Tested Engineer / Winkey Wang)

Reviewer :

Brown Lu

(Project Manager / Brown Lu)

Approved & Authorized Signer :

Tom Chen

(Manager / Tom Chen)

1. General Information

1.1. Client Information

Applicant	:	Anhui Ronds Science & Technology Incorporated Company
Address	:	8th Floor, B1 Building, High-techInnovation Park, No.800 Wangjiang West Road, Hefei, Anhui, 230088, China
Manufacturer	:	Anhui Ronds Science & Technology Incorporated Company
Address	:	8th Floor, B1 Building, High-techInnovation Park, No.800 Wangjiang West Road, Hefei, Anhui, 230088, China

1.2. Description of Device (EUT)

Product Name	:	Wireless Machinery Monitoring Station	
Model No.	:	RH560-WL	
Trade Mark	:	RONDS	
Test Power Supply	:	AC 120V, 60Hz /AC 240V, 60Hz	
Product Description	:	Operation Frequency:	WiFi: 2412-2462MHz for 11b/g/n(HT20) Zigbee: 2405-2480MHz
	:	Number of Channel:	WiFi: 11 Channels Zigbee: 16 Channels
	:	Modulation Type:	WiFi: 802.11b CCK; 802.11g OFDM; 802.11n MCS Zigbee: O-QPSK
	:	Antenna Type:	WiFi: Plate Antenna Zigbee: Rod Antenna
	:	Antenna Gain(Peak):	WiFi: 1.5 dBi Zigbee: 4.0 dBi
Remark: 1)For a more detailed features description, please refer to the manufacturer’s specifications or the User’s Manual. 2)This report is for WiFi.			

1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	WiFi

For Conducted Emission	
Final Test Mode	Description
Mode 1	WiFi

For Radiated Emission	
Final Test Mode	Description
Mode 1	WiFi

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.


1.5. List of channels

Channel	Frequency	Channel	Frequency
01	2412 MHz	07	2442 MHz
02	2417 MHz	08	2447 MHz
03	2422 MHz	09	2452 MHz
04	2427 MHz	10	2457 MHz
05	2432 MHz	11	2462 MHz
06	2437 MHz		


NOTE: 01-11 channels are provided for 802.11b, 802.11g and 802.11n (HT20);

1.6. Description Of Test Setup

CE

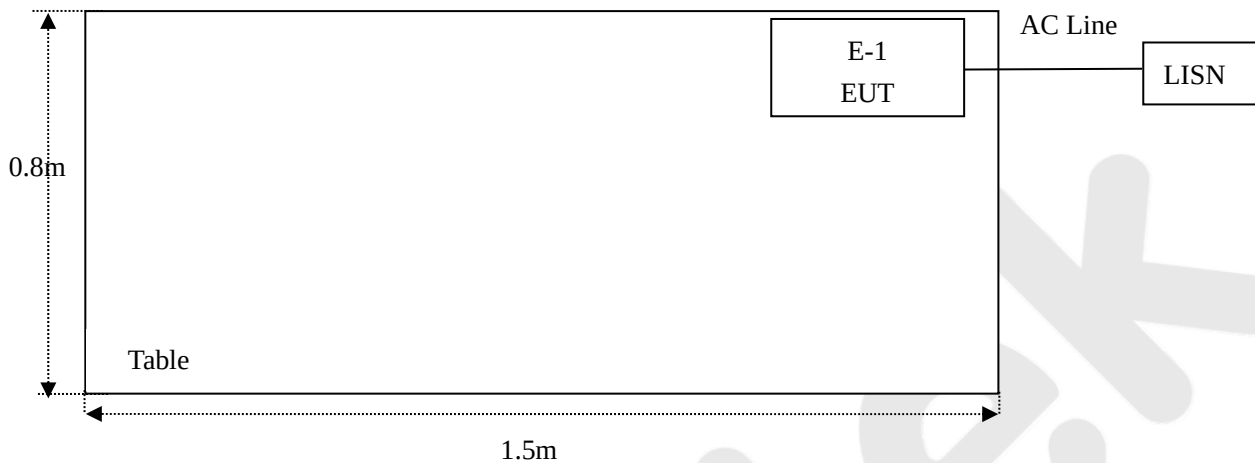

RE

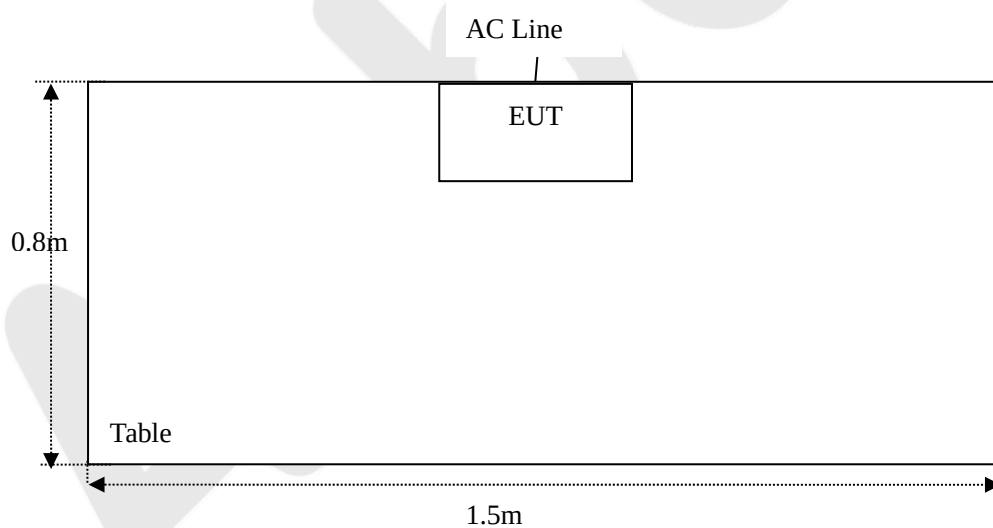

1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Two-Line V-network	Rohde & Schwarz	ENV216	100055	Jul. 19, 2016	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Jun. 17, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Jun. 17, 2016	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Jul. 12, 2016	1 Year
5.	Preamplifier	Instruments corporation	EMC011830	980100	Jun. 17, 2016	1 Year
6.	EMI Test Receiver	Rohde & Schwarz	ESPI	101604	Jun. 17, 2016	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	May 06, 2016	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 06, 2016	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519	012	May 11, 2016	1 Year
10.	Pre-amplifier	SONOMA	310N	186860	Jun. 17, 2016	1 Year
11.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
12.	Power Sensor	Agilent	KFSW150502	15I00041SN045	Jun. 17, 2016	1 Year
13.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Jun. 17, 2016	1 Year
14.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Jun. 17, 2016	1 Year
15.	Signal Generator	Agilent	E4421B	MY41000743	Jun. 17, 2016	1 Year
16.	DC Power supply	IV	IV-8080	YQSB0096	Jun. 17, 2016	1 Year
17.	TEMP&HUMI PROGRAMMABLE CHAMBER	Bell Group	BE-THK-150 M8	SE-0137	Jun. 17, 2016	1 Year

1.8. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 4.1 dB (Horizontal)
		Ur = 4.3 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4dB

1.9. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 752021

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, July 06, 2016.

IC-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, June 13, 2016.

Test Location

All Emissions tests were performed at

Shenzhen Anbotek Compliance Laboratory Limited. at 1/F., Building 1, SEC Industrial Park, No.0409 Qianhai Road, Nanshan District, Shenzhen, Guangdong, China

2. Summary of Test Results

Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
Remark: "N/A" is an abbreviation for Not Applicable.		


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50

Remark: (1) *Decreasing linearly with logarithm of the frequency.
(2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

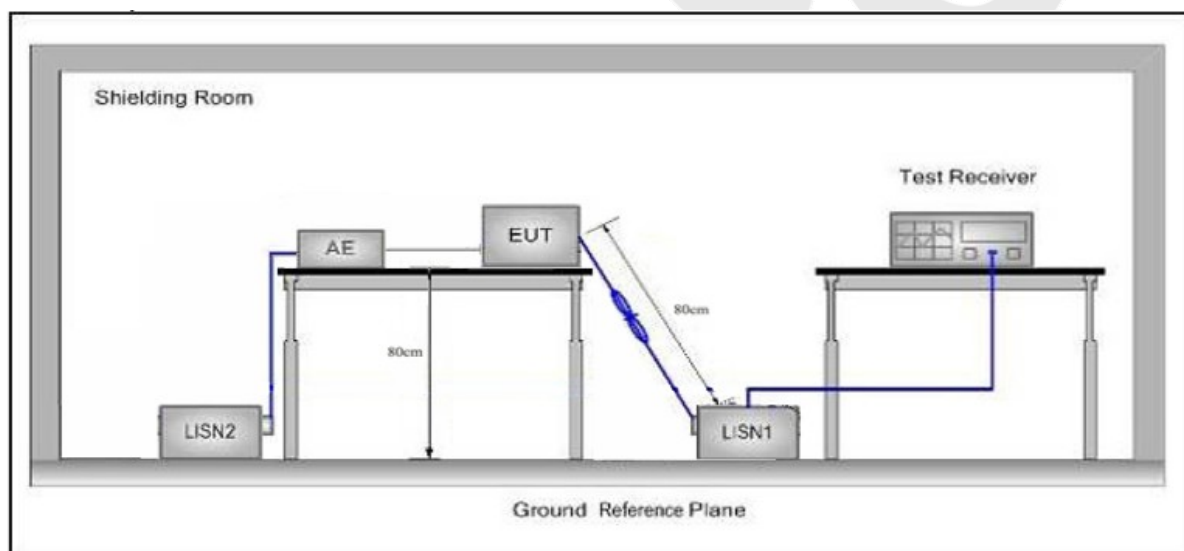

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: WiFi Mode
Test Specification: AC 120V, 60Hz
Comment: Live Line
Tem.:25℃ Hum.:50%

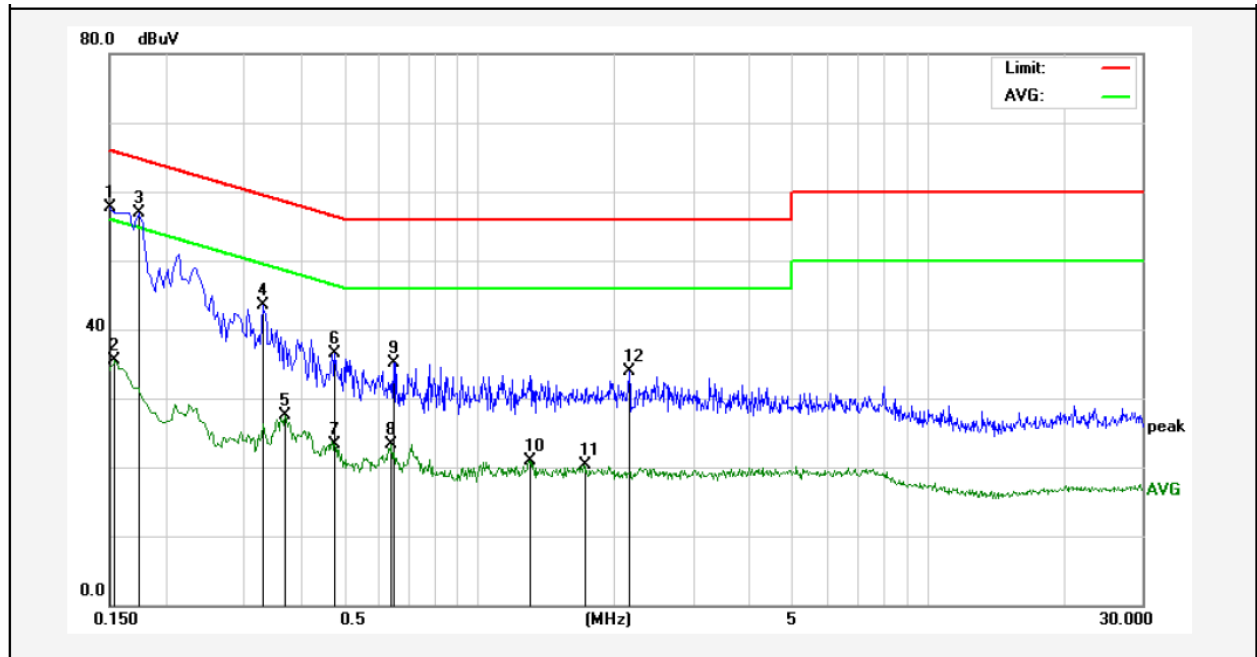

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1499	37.77	19.90	57.67	66.00	-8.33	QP	
2	0.1539	15.57	19.90	35.47	55.78	-20.31	AVG	
3	0.1740	36.94	19.90	56.84	64.76	-7.92	QP	
4	0.3300	23.57	19.90	43.47	59.45	-15.98	QP	
5	0.3700	7.57	19.92	27.49	48.50	-21.01	AVG	
6	0.4780	16.56	19.97	36.53	56.37	-19.84	QP	
7	0.4780	3.24	19.97	23.21	46.37	-23.16	AVG	
8	0.6380	3.30	20.02	23.32	46.00	-22.68	AVG	
9	0.6460	15.15	20.02	35.17	56.00	-20.83	QP	
10	1.3020	0.85	20.13	20.98	46.00	-25.02	AVG	
11	1.7100	0.14	20.13	20.27	46.00	-25.73	AVG	
12	2.1619	13.81	20.14	33.95	56.00	-22.05	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: WiFi Mode
Test Specification: AC 120V, 60Hz
Comment: Neutral Line
Tem.:25℃ Hum.:50%

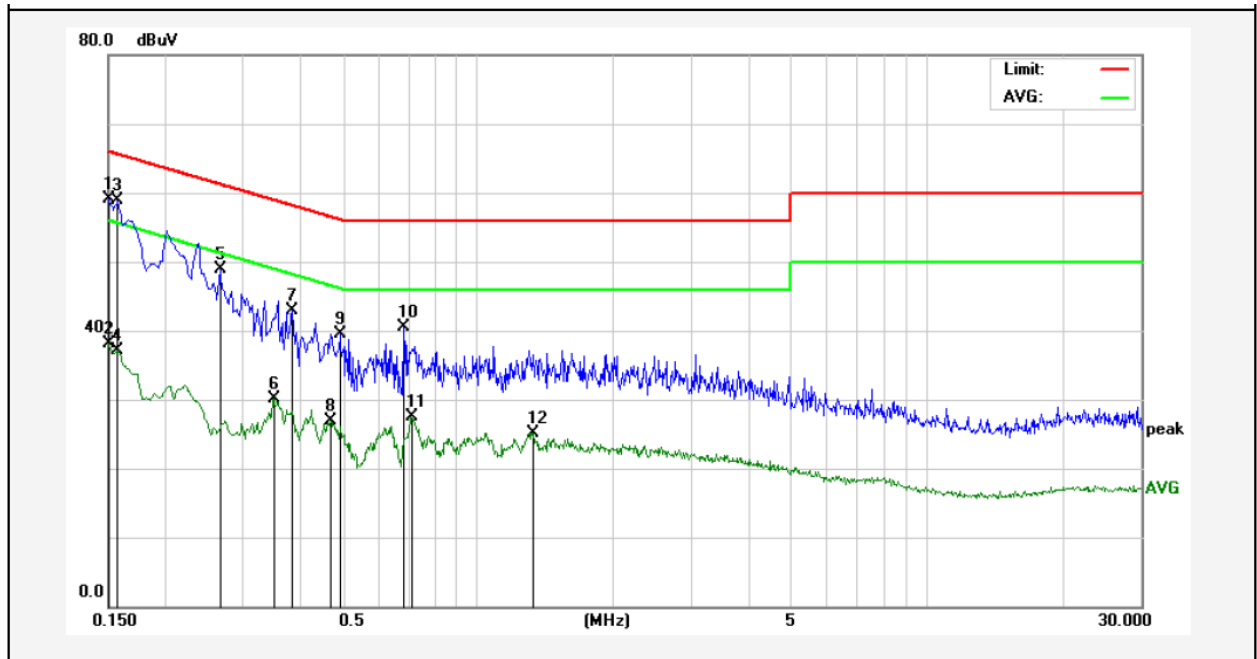

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1499	39.15	19.90	59.05	66.00	-6.95	QP	
2	0.1499	18.15	19.90	38.05	56.00	-17.95	AVG	
3	0.1580	38.96	19.90	58.86	65.56	-6.70	QP	
4	0.1580	17.26	19.90	37.16	55.56	-18.40	AVG	
5	0.2660	28.96	19.89	48.85	61.24	-12.39	QP	
6	0.3500	10.16	19.91	30.07	48.96	-18.89	AVG	
7	0.3860	22.97	19.93	42.90	58.15	-15.25	QP	
8	0.4700	6.85	19.97	26.82	46.51	-19.69	AVG	
9	0.4939	19.43	19.98	39.41	56.10	-16.69	QP	
10	0.6860	20.48	20.04	40.52	56.00	-15.48	QP	
11	0.7100	7.54	20.04	27.58	46.00	-18.42	AVG	
12	1.3260	4.96	20.13	25.09	46.00	-20.91	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
Operating Condition: WiFi Mode
Test Specification: AC 240V, 60Hz
Comment: Live Line
Tem.:25℃ Hum.:50%

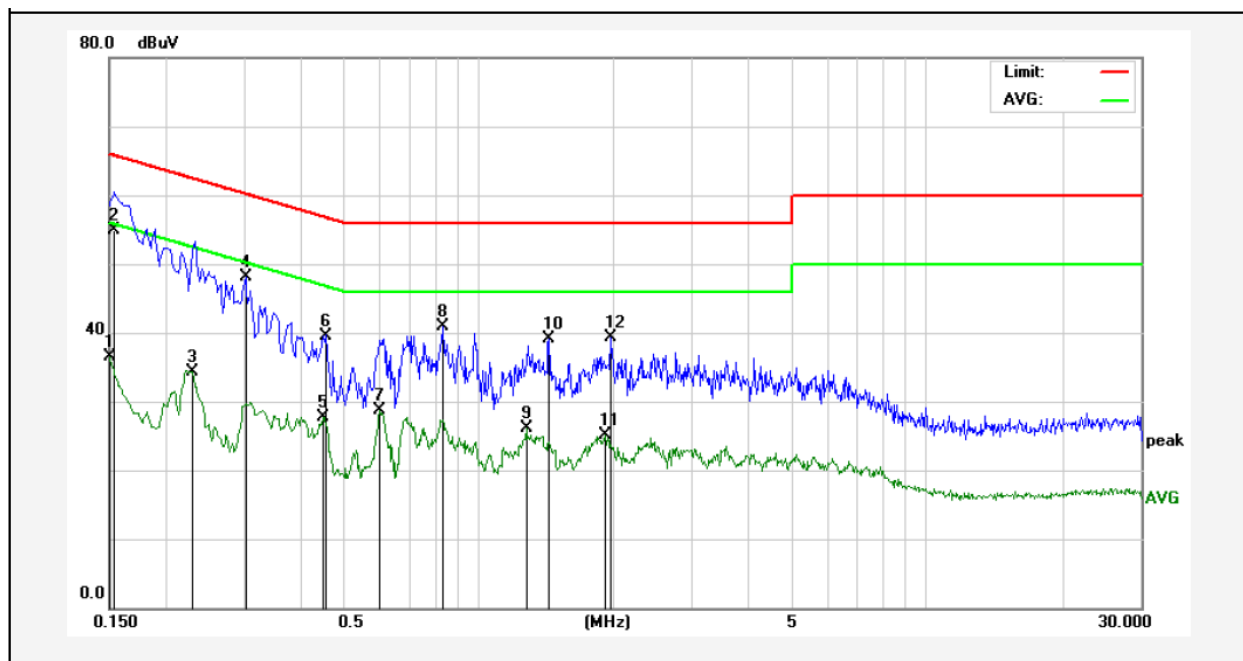

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1500	16.58	19.90	36.48	55.99	-19.51	AVG	
2	0.1539	34.93	19.90	54.83	65.78	-10.95	QP	
3	0.2300	14.50	19.89	34.39	52.45	-18.06	AVG	
4	0.3020	28.21	19.89	48.10	60.19	-12.09	QP	
5	0.4500	7.75	19.96	27.71	46.87	-19.16	AVG	
6	0.4580	19.64	19.96	39.60	56.73	-17.13	QP	
7	0.6020	8.75	20.01	28.76	46.00	-17.24	AVG	
8	0.8340	20.84	20.08	40.92	56.00	-15.08	QP	
9	1.2820	5.89	20.13	26.02	46.00	-19.98	AVG	
10	1.4340	18.91	20.13	39.04	56.00	-16.96	QP	
11	1.9260	5.00	20.14	25.14	46.00	-20.86	AVG	
12	1.9780	19.15	20.14	39.29	56.00	-16.71	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
Operating Condition: WiFi Mode
Test Specification: AC 240V, 60Hz
Comment: Neutral Line
Tem.:25℃ Hum.:50%

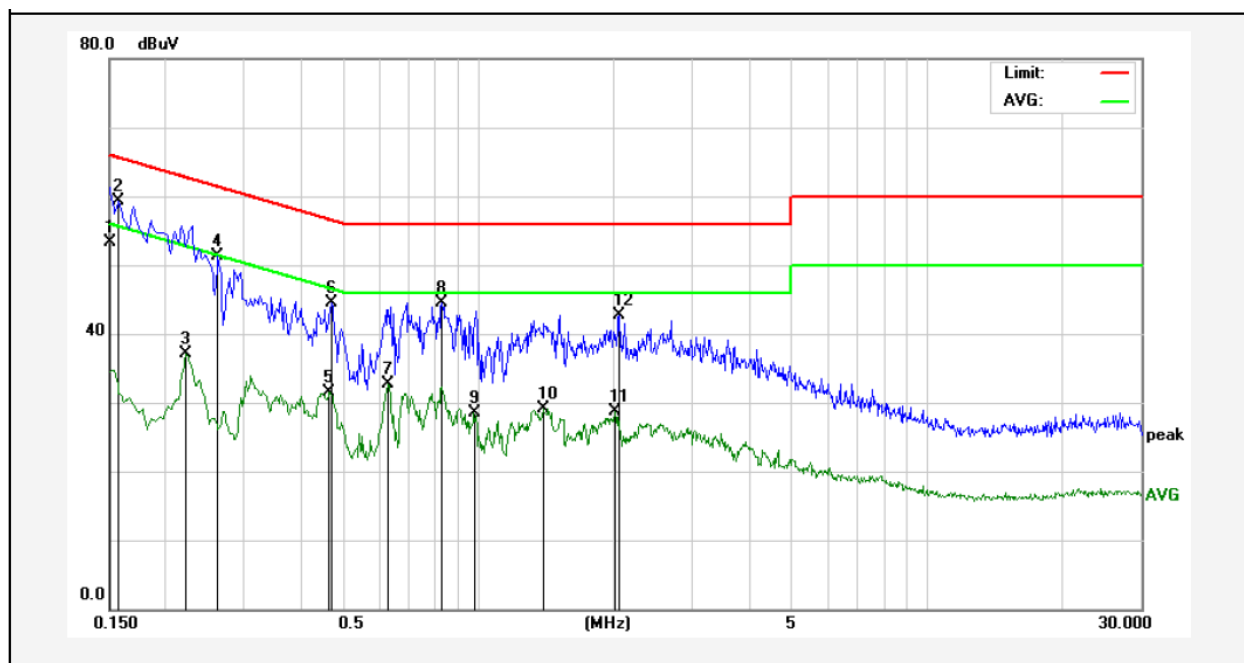

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.1499	33.46	19.90	53.36	66.00	-12.64	QP	
2	0.1580	39.37	19.90	59.27	65.56	-6.29	QP	
3	0.2220	17.16	19.89	37.05	52.74	-15.69	AVG	
4	0.2620	31.38	19.89	51.27	61.36	-10.09	QP	
5	0.4660	11.61	19.96	31.57	46.58	-15.01	AVG	
6	0.4700	24.49	19.97	44.46	56.51	-12.05	QP	
7	0.6300	12.74	20.02	32.76	46.00	-13.24	AVG	
8	0.8300	24.47	20.07	44.54	56.00	-11.46	QP	
9	0.9780	8.31	20.11	28.42	46.00	-17.58	AVG	
10	1.3900	9.06	20.13	29.19	46.00	-16.81	AVG	
11	2.0220	8.52	20.14	28.66	46.00	-17.34	AVG	
12	2.0579	22.59	20.14	42.73	56.00	-13.27	QP	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

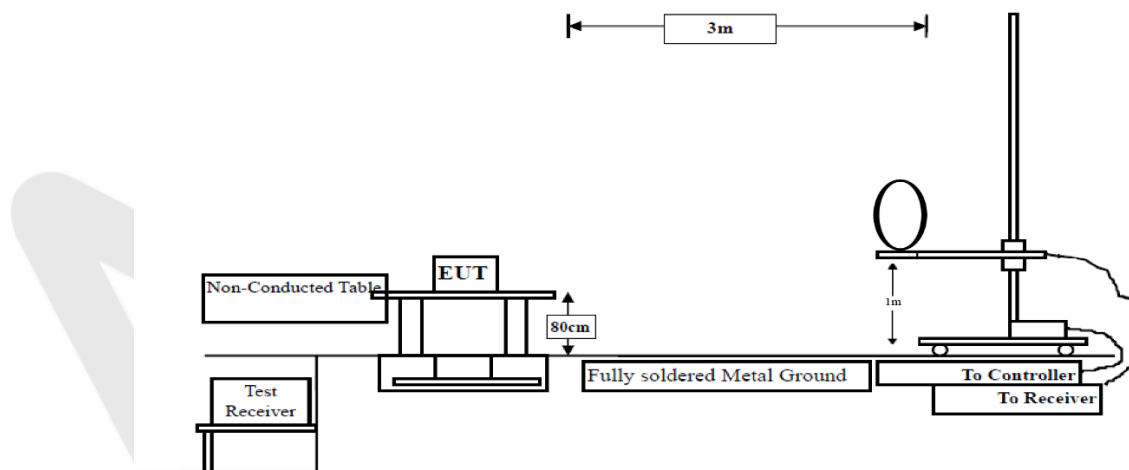


Figure 1. Below 30MHz

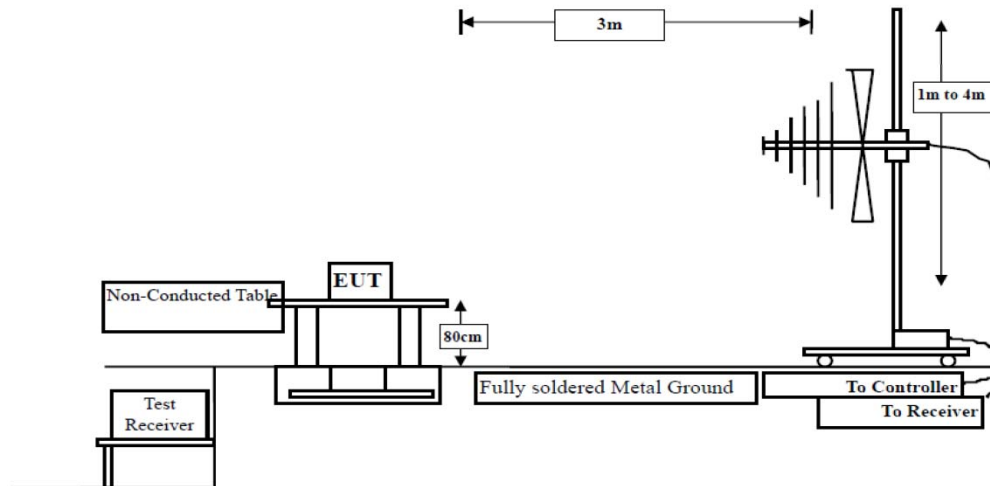


Figure 2. 30MHz to 1GHz

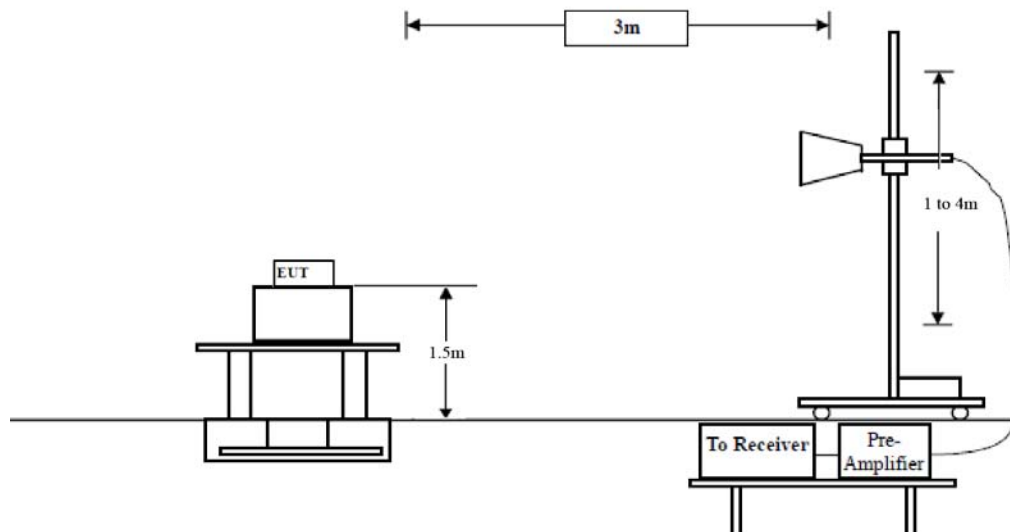


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

.

For above 1GHz, Set the spectrum analyzer as:

RBW = 1MHz, VBW = 10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

4.4. Test Data


PASS

During the test, Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis is the worst case.

The test results of 9kHz-30MHz and above 18000MHz are attenuated more than 20dB below the permissible limits, so the results don't record in the report.

Test Results (30~1000MHz)


Job No.: 0117011038W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: AC120V/60Hz
Test Mode: WiFi Mode Polarization: Horizontal

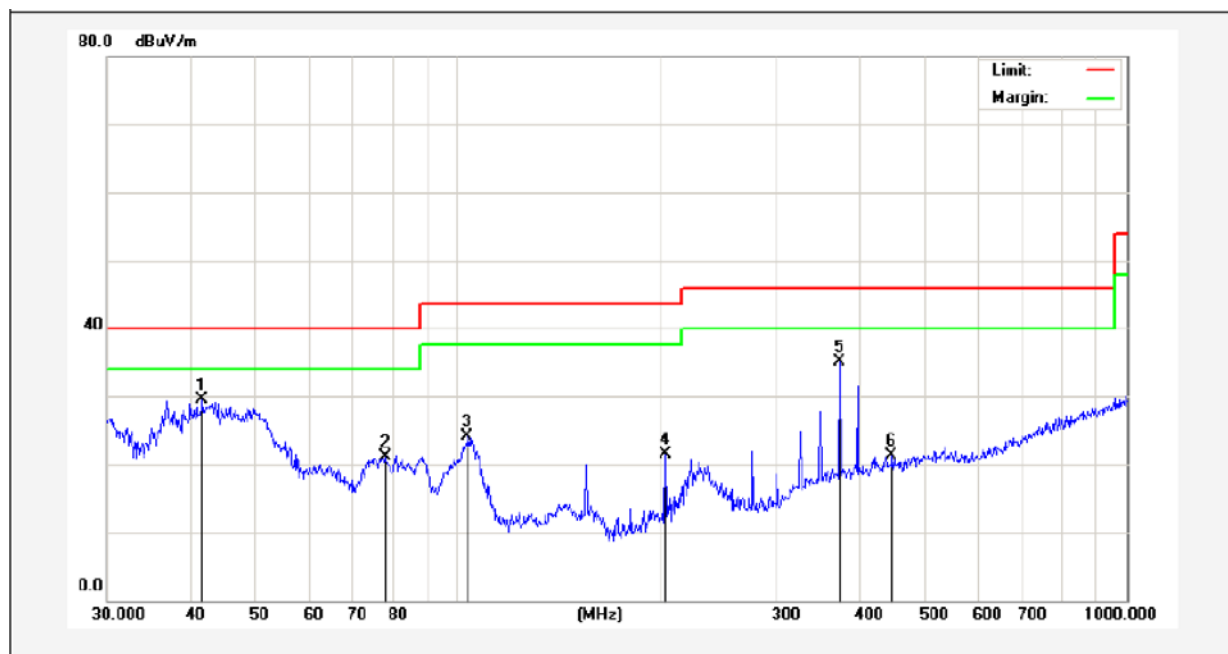

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	41.5670	40.50	-10.99	29.51	40.00	-10.49	peak			
2	77.8654	41.28	-20.24	21.04	40.00	-18.96	peak			
3	103.4421	39.89	-15.71	24.18	43.50	-19.32	peak			
4	204.2377	37.22	-15.71	21.51	43.50	-21.99	peak			
5	372.0045	47.50	-12.43	35.07	46.00	-10.93	peak			
6	444.8514	32.79	-11.43	21.36	46.00	-24.64	peak			

Test Results (30~1000MHz)

Job No.: 0117011038W Temp.(°C)/Hum.(%RH): 24.3°C/55%RH
Standard: FCC PART 15C Power Source: AC120V/60HZ
Test Mode: WiFi Mode Polarization: Vertical

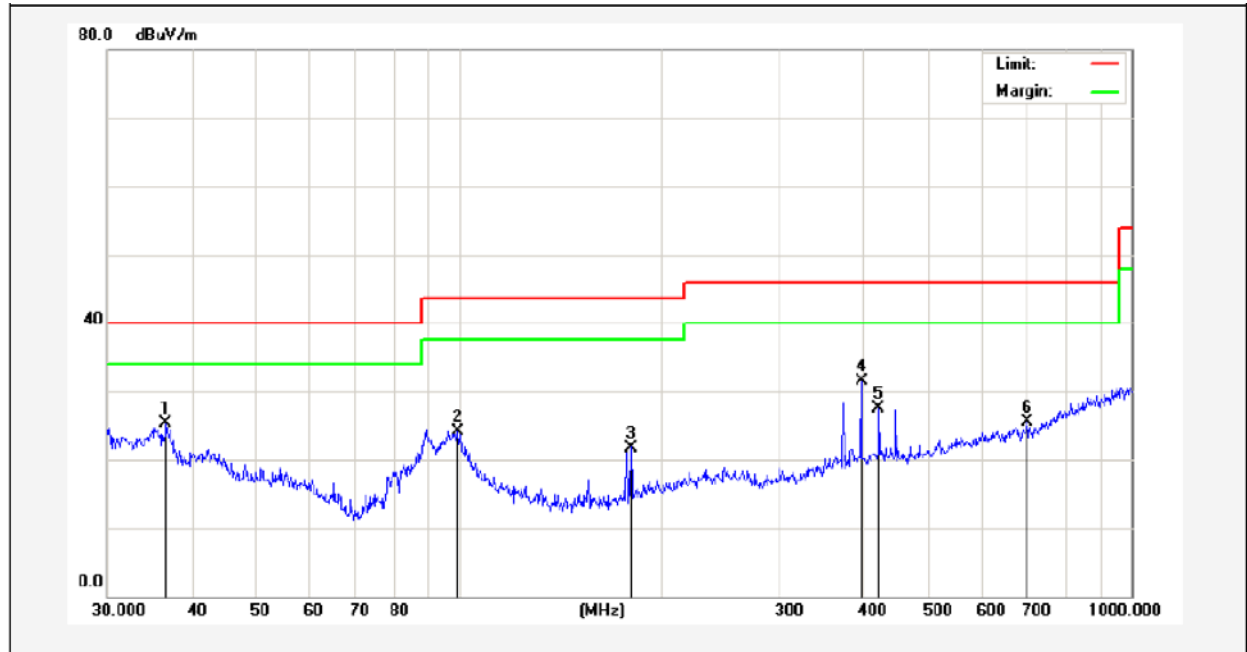

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	36.6375	38.23	-13.01	25.22	40.00	-14.78	peak			
2	99.5281	44.97	-20.79	24.18	43.50	-19.32	peak			
3	180.0165	43.65	-21.85	21.80	43.50	-21.70	peak			
4	396.2415	44.38	-12.94	31.44	46.00	-14.56	peak			
5	420.5803	39.81	-12.38	27.43	46.00	-18.57	peak			
6	699.3046	34.03	-8.50	25.53	46.00	-20.47	peak			

Test Results (Above 1000MHz)

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preampl Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	41.41	34.13	6.61	34.09	48.06	74.00	-25.94	V
7236.00	34.92	37.14	7.74	34.51	45.29	74.00	-28.71	V
9648.00	33.22	39.35	9.26	34.80	47.03	74.00	-26.97	V
12060.00	*					74.00		V
14472.00	*					74.00		V
16884.00	*					74.00		H
4824.00	39.90	34.13	6.61	34.09	46.55	74.00	-27.45	H
7236.00	34.58	37.14	7.74	34.51	44.95	74.00	-29.05	H
9648.00	32.76	39.35	9.26	34.80	46.57	74.00	-27.43	H
12060.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preampl Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4824.00	30.40	34.13	6.61	34.09	37.05	54.00	-16.95	V
7236.00	23.77	37.14	7.74	34.51	34.14	54.00	-19.86	V
9648.00	23.54	39.35	9.26	34.80	37.35	54.00	-16.65	V
12060.00	*					54.00		V
14472.00	*					54.00		V
16884.00	*					54.00		H
4824.00	29.38	34.13	6.61	34.09	36.03	54.00	-17.97	H
7236.00	23.15	37.14	7.74	34.51	33.52	54.00	-20.48	H
9648.00	22.49	39.35	9.26	34.80	36.30	54.00	-17.70	H
12060.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: 802.11b Mode					Test channel: Middle			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	40.27	34.35	6.67	34.09	47.20	74.00	-26.80	V
7311.00	34.87	37.21	7.77	34.53	45.32	74.00	-28.68	V
9748.00	34.15	39.45	9.33	34.80	48.13	74.00	-25.87	V
12185.00	*					74.00		V
14622.00	*					74.00		V
17059.00	*					74.00		H
4874.00	40.61	34.35	6.67	34.09	47.54	74.00	-26.46	H
7311.00	33.44	37.21	7.77	34.53	43.89	74.00	-30.11	H
9748.00	34.01	39.45	9.33	34.80	47.99	74.00	-26.01	H
12185.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4874.00	31.05	34.35	6.67	34.09	37.98	54.00	-16.02	V
7311.00	23.17	37.21	7.77	34.53	33.62	54.00	-20.38	V
9748.00	23.39	39.45	9.33	34.80	37.37	54.00	-16.63	V
12185.00	*					54.00		V
14622.00	*					54.00		V
17059.00	*					54.00		H
4874.00	30.67	34.35	6.67	34.09	37.60	54.00	-16.40	H
7311.00	22.51	37.21	7.77	34.53	32.96	54.00	-21.04	H
9748.00	23.71	39.45	9.33	34.80	37.69	54.00	-16.31	H
12185.00	*					54.00		H

Test Results (Above 1000MHz)

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	46.47	34.57	6.74	34.09	53.69	74.00	-20.31	V
7386.00	35.97	37.29	7.80	34.55	46.51	74.00	-27.49	V
9848.00	37.75	39.55	9.41	34.81	51.90	74.00	-22.10	V
12310.00	*					74.00		V
14772.00	*					74.00		V
17234.00	*					74.00		H
4924.00	45.53	34.57	6.74	34.09	52.75	74.00	-21.25	H
7386.00	34.74	37.29	7.80	34.55	45.28	74.00	-28.72	H
9848.00	33.86	39.55	9.41	34.81	48.01	74.00	-25.99	H
12310.00	*					74.00		H
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
4924.00	37.26	34.57	6.74	34.09	44.48	54.00	-9.52	V
7386.00	25.85	37.29	7.80	34.55	36.39	54.00	-17.61	V
9848.00	26.22	39.55	9.41	34.81	40.37	54.00	-13.63	V
12310.00	*					54.00		V
14772.00	*					54.00		V
17234.00	*					54.00		H
4924.00	35.81	34.57	6.74	34.09	43.03	54.00	-10.97	H
7386.00	24.11	37.29	7.80	34.55	34.65	54.00	-19.35	H
9848.00	23.10	39.55	9.41	34.81	37.25	54.00	-16.75	H
12310.00	*					54.00		H

Remark:

1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “*”, means this data is the too weak instrument of signal is unable to test.

Radiated Band Edge:

Test Mode: 802.11b Mode					Test channel: Lowest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	52.40	29.15	3.41	34.01	50.95	74.00	-23.05	H
2400.00	61.66	29.16	3.43	34.01	60.24	74.00	-13.76	H
2390.00	54.13	29.15	3.41	34.01	52.68	74.00	-21.32	V
2400.00	63.66	29.16	3.43	34.01	62.24	74.00	-11.76	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2390.00	38.94	29.15	3.41	34.01	37.49	54.00	-16.51	H
2400.00	47.32	29.16	3.43	34.01	45.90	54.00	-8.10	H
2390.00	40.82	29.15	3.41	34.01	39.37	54.00	-14.63	V
2400.00	48.50	29.16	3.43	34.01	47.08	54.00	-6.92	V

Test Mode: 802.11b Mode					Test channel: Highest			
Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	53.38	29.28	3.53	34.03	52.16	74.00	-21.84	H
2500.00	48.97	29.30	3.56	34.03	47.80	74.00	-26.20	H
2483.50	55.79	29.28	3.53	34.03	54.57	74.00	-19.43	V
2500.00	51.62	29.30	3.56	34.03	50.45	74.00	-23.55	V
Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Pol.
2483.50	39.42	29.28	3.53	34.03	38.20	54.00	-15.80	H
2500.00	35.38	29.30	3.56	34.03	34.21	54.00	-19.79	H
2483.50	41.44	29.28	3.53	34.03	40.22	54.00	-13.78	V
2500.00	37.29	29.30	3.56	34.03	36.12	54.00	-17.88	V

Remark:


1. Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor

5. Maximum Peak Output Power Test

5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

5.2. Test Setup



5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.


1. Set the RBW $\geq$ DTS bandwidth.
2. Set the VBW $\geq 3 \times$ RBW.
3. Set the span $\geq 3 \times$ RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

5.4. Test Data


Test Item	: Max. peak output power
Test Voltage	: AC120V/60HZ
Test Result	: PASS

Test Mode	: CH Low ~ CH High
Temperature	: 24°C
Humidity	: 55%RH


Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results
802.11b	18.23	30	PASS
	18.29	30	PASS
	19.38	30	PASS
802.11g	16.38	30	PASS
	16.61	30	PASS
	17.12	30	PASS
802.11n20	15.52	30	PASS
	15.52	30	PASS
	15.80	30	PASS

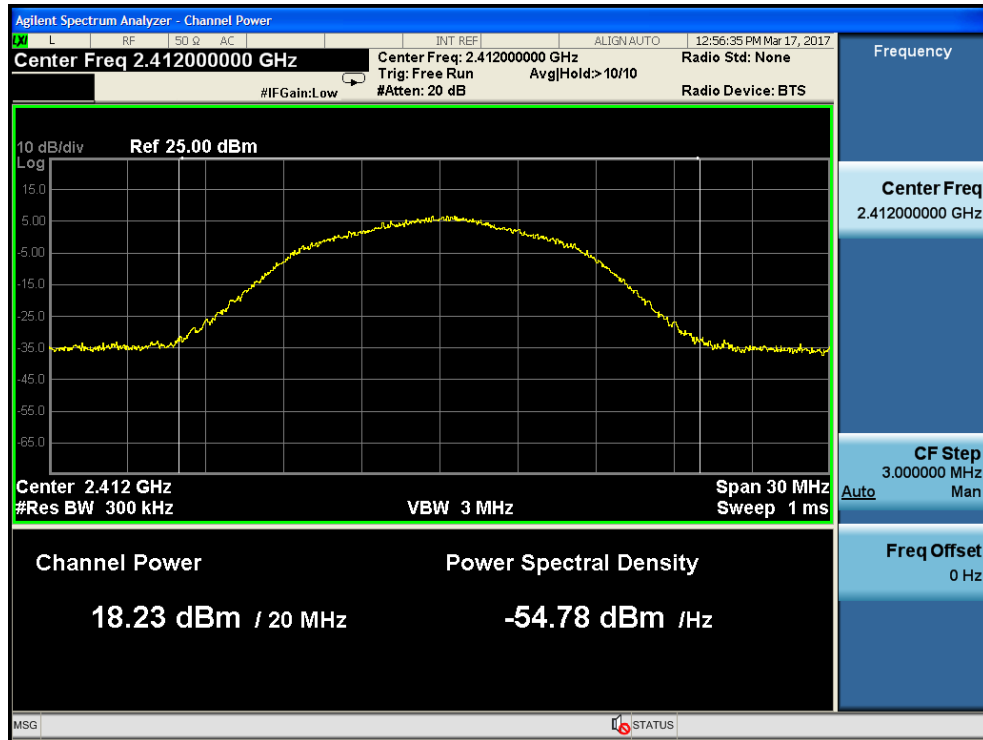


CH: 802.11b- Low

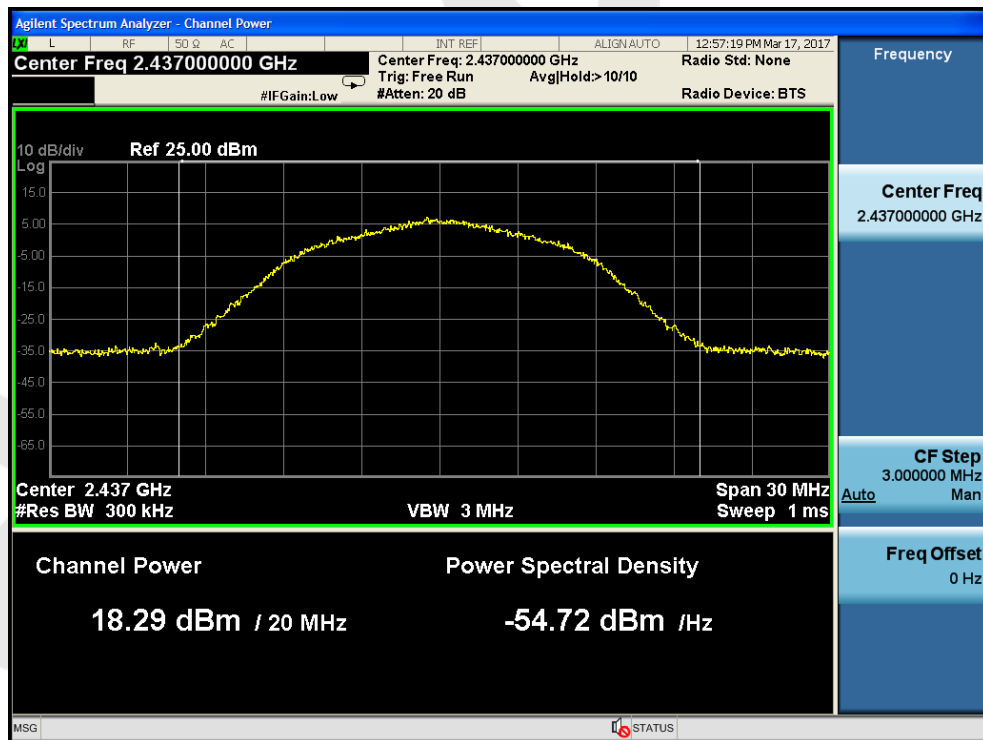


CH: 802.11b- Middle

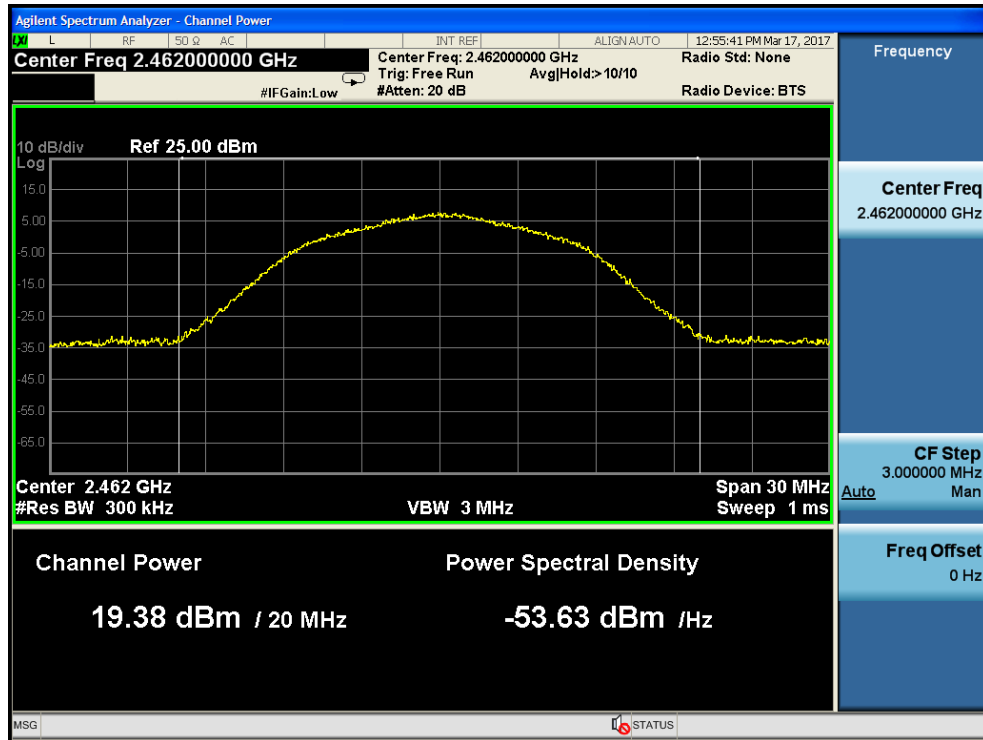


CH: 802.11b- High

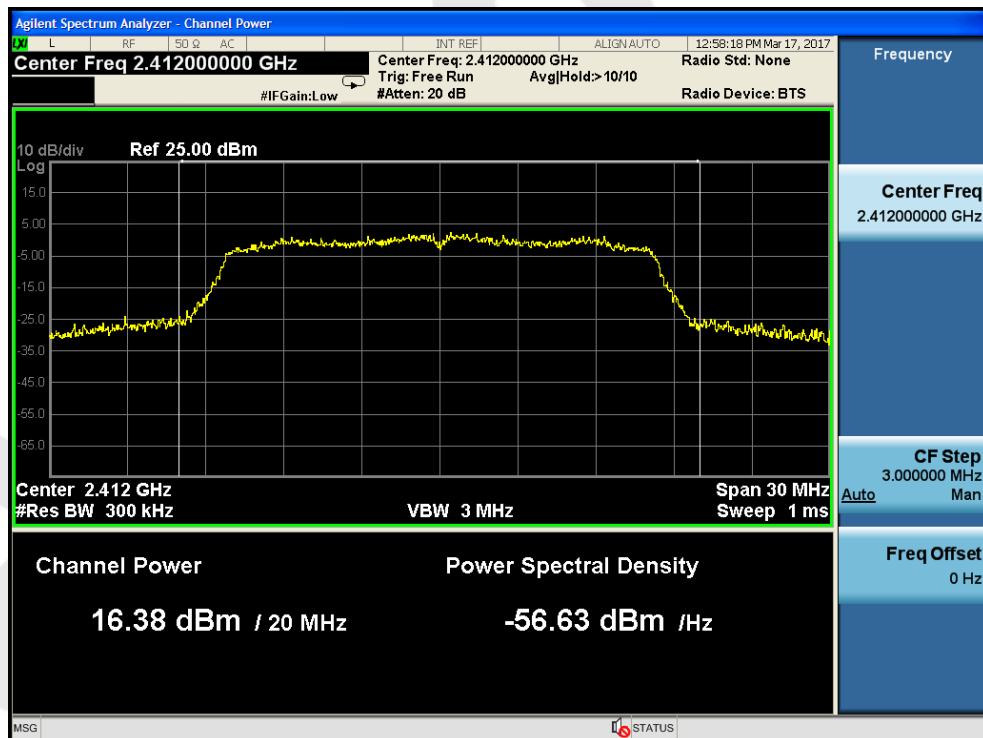


CH: 802.11g- Low

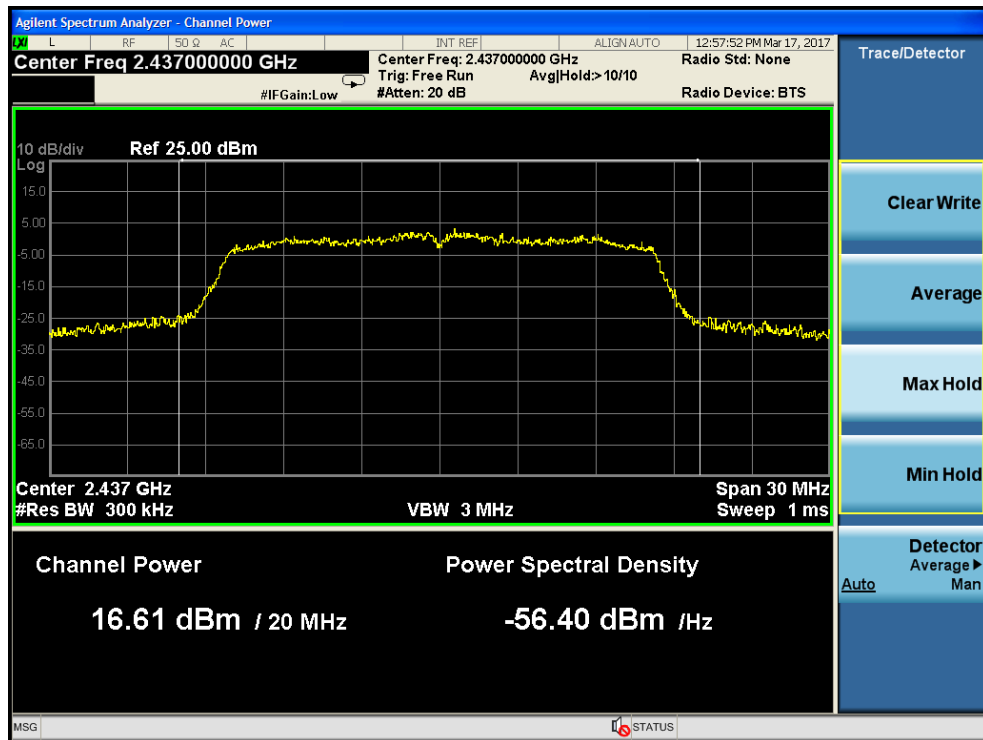


CH: 802.11g Middle

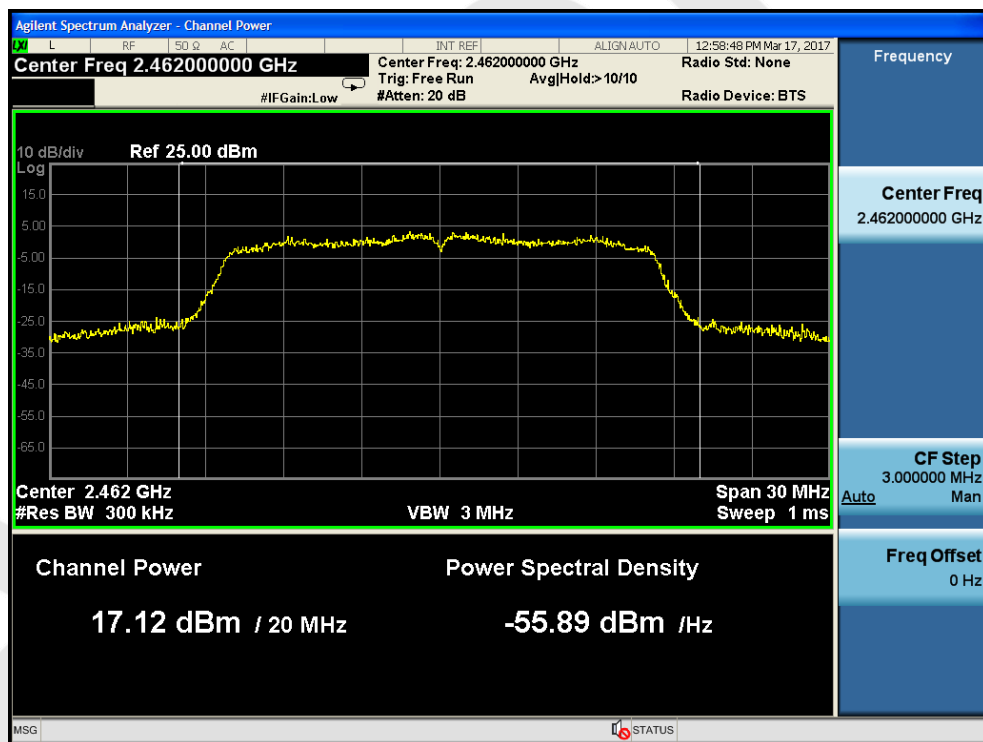


CH: 802.11g High

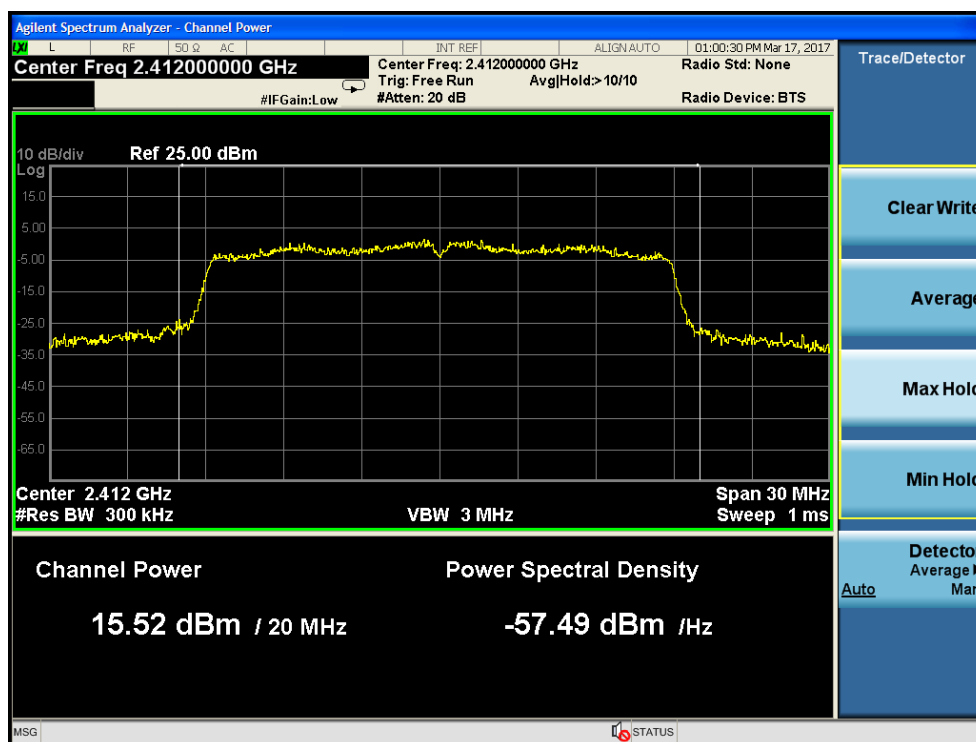

CH: 802.11n20- Low

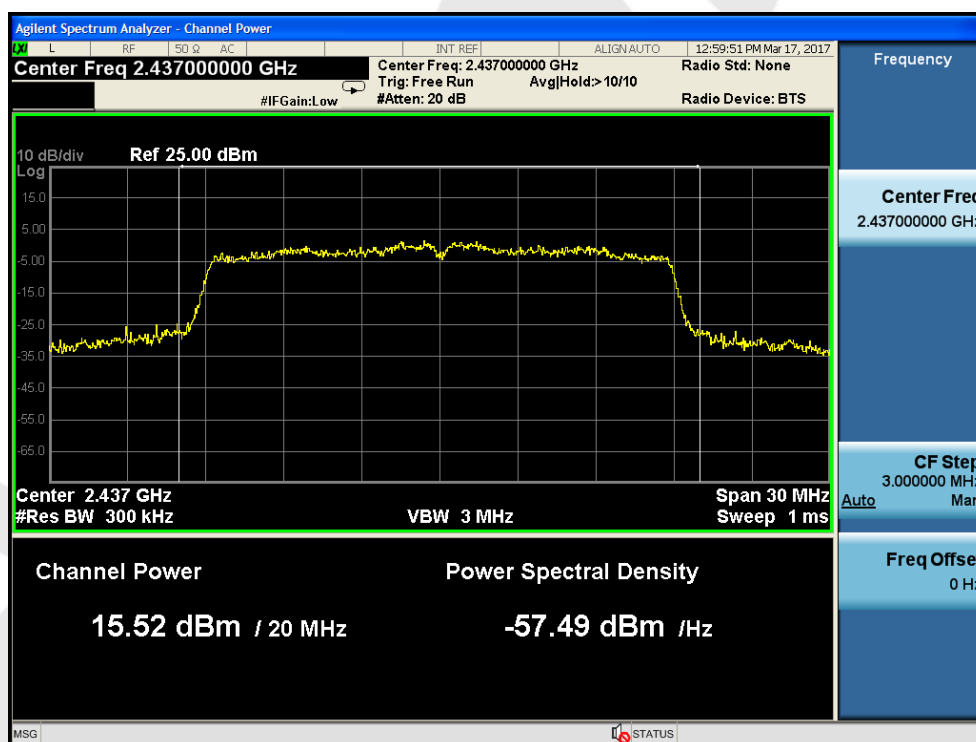

CH: 802.11n20 Middle

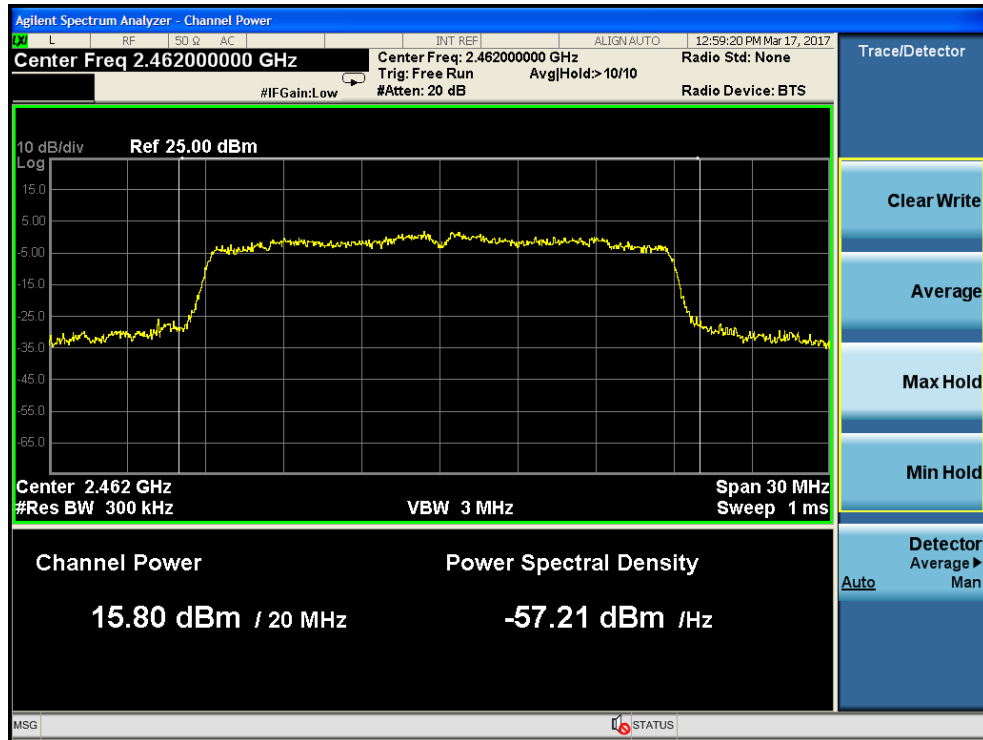


CH: 802.11n20 High

6. 6DB Occupy Bandwidth Test

6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	>500kHz

6.2. Test Setup




6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:
RBW = 100kHz, VBW $\geq$ 3*RBW = 300kHz,
Detector= Peak
Trace mode= Max hold.
Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.


6.4. Test Data

Test Item	: 6dB Bandwidth	Test Mode	: CH Low ~ CH High
Test Voltage	: AC120V/60HZ	Temperature	: 24℃
Test Result	: PASS	Humidity	: 55%RH


Channel	Frequency(MHz)	Bandwidth (kHz)	Limit (kHz)	Results
802.11b	2412	7812	>500	PASS
	2437	7088		PASS
	2462	7184		PASS
802.11g	2412	1513		PASS
	2437	1543		PASS
	2462	1514		PASS
802.11n20	2422	1666		PASS
	2437	1693		PASS
	2452	1687		PASS

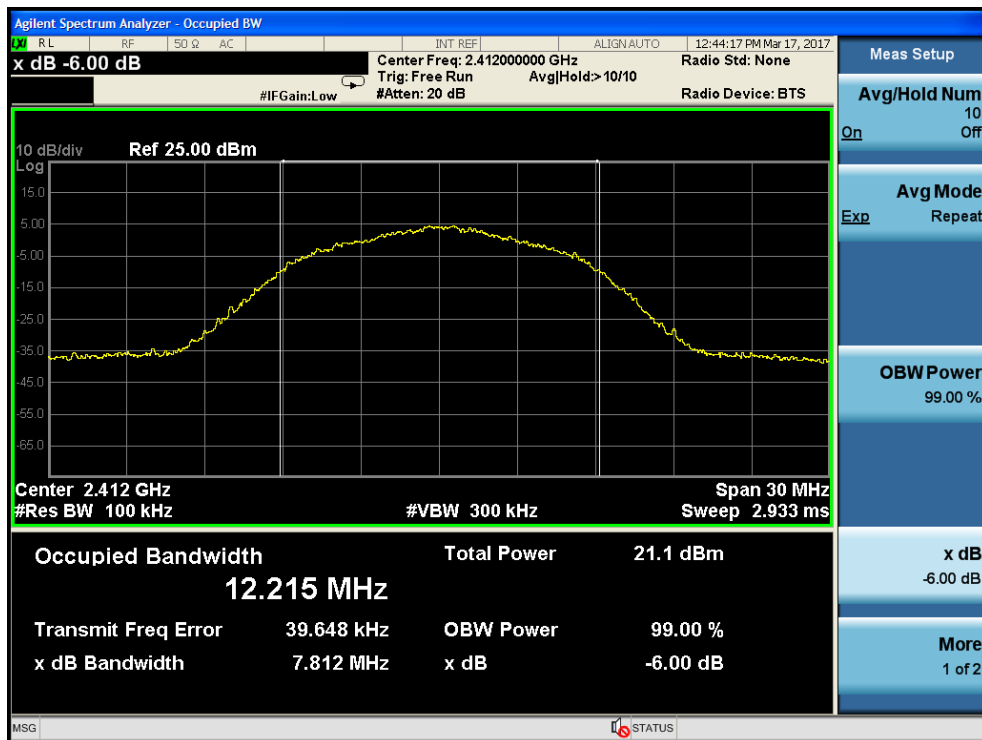


CH: 802.11b - Low

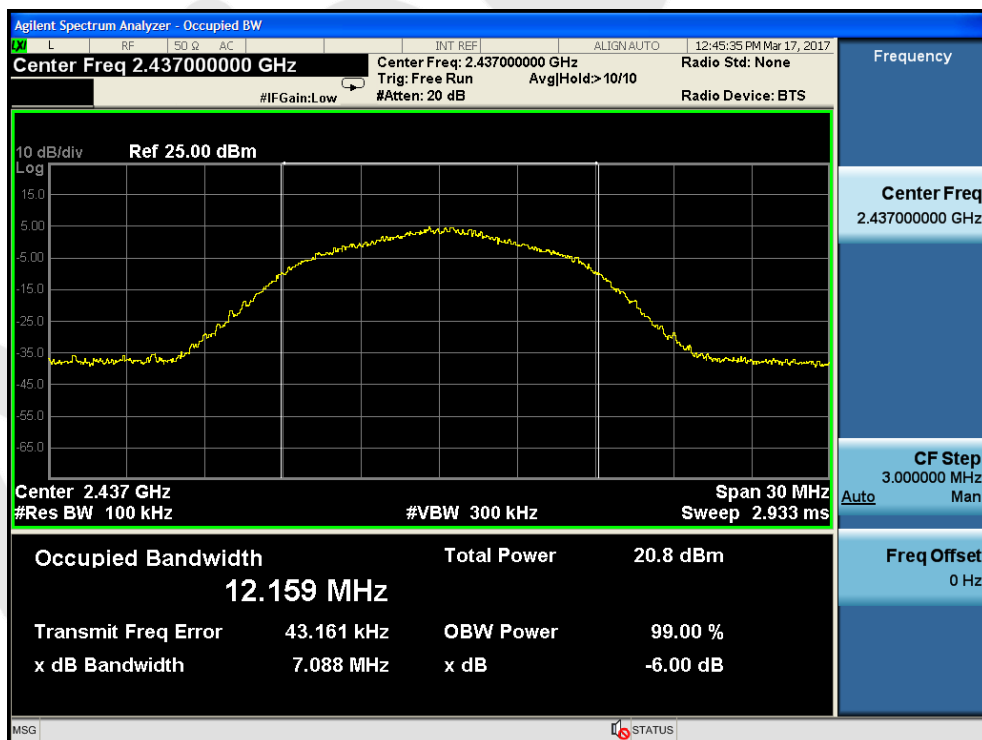


CH: 802.11b -Middle

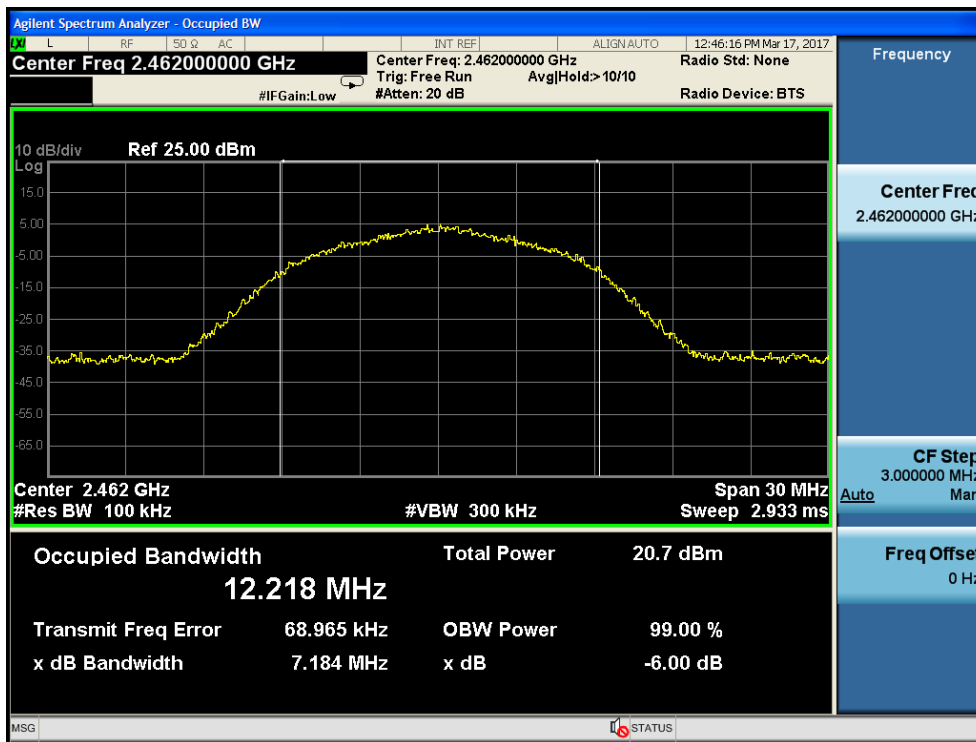


CH: 802.11b - High

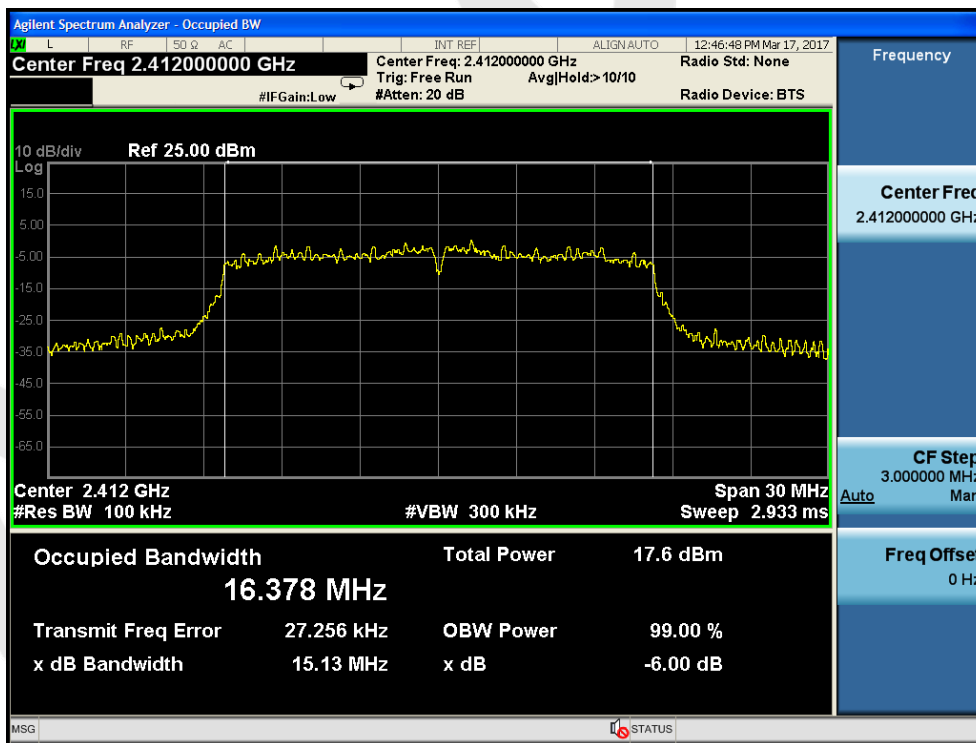


CH: 802.11g - Low

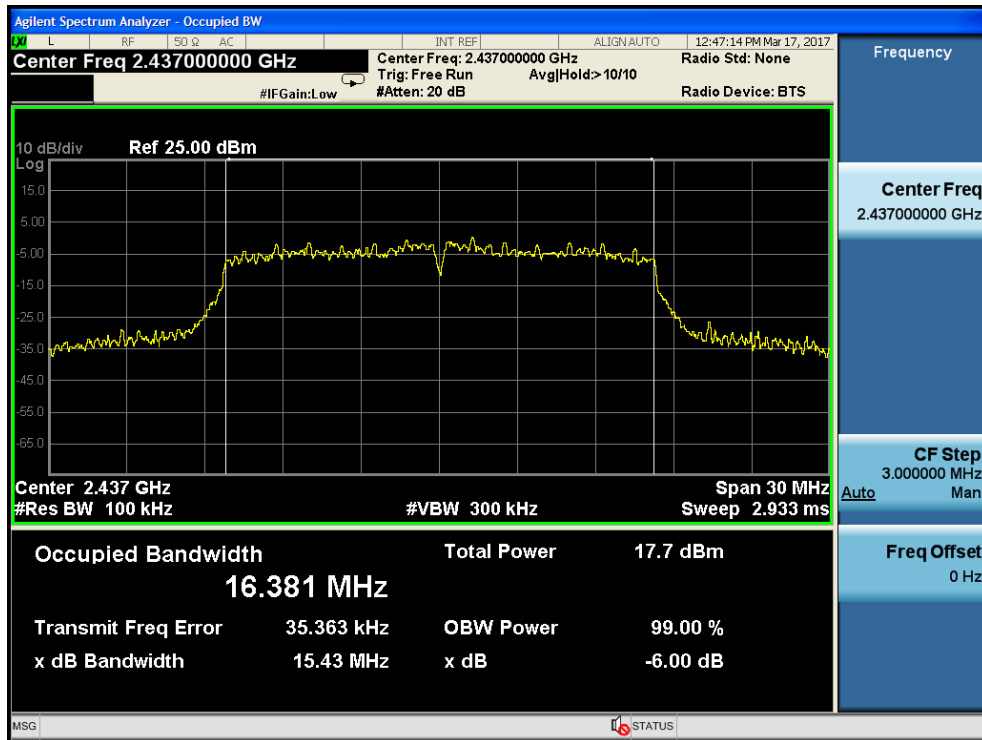


CH: 802.11g - Middle

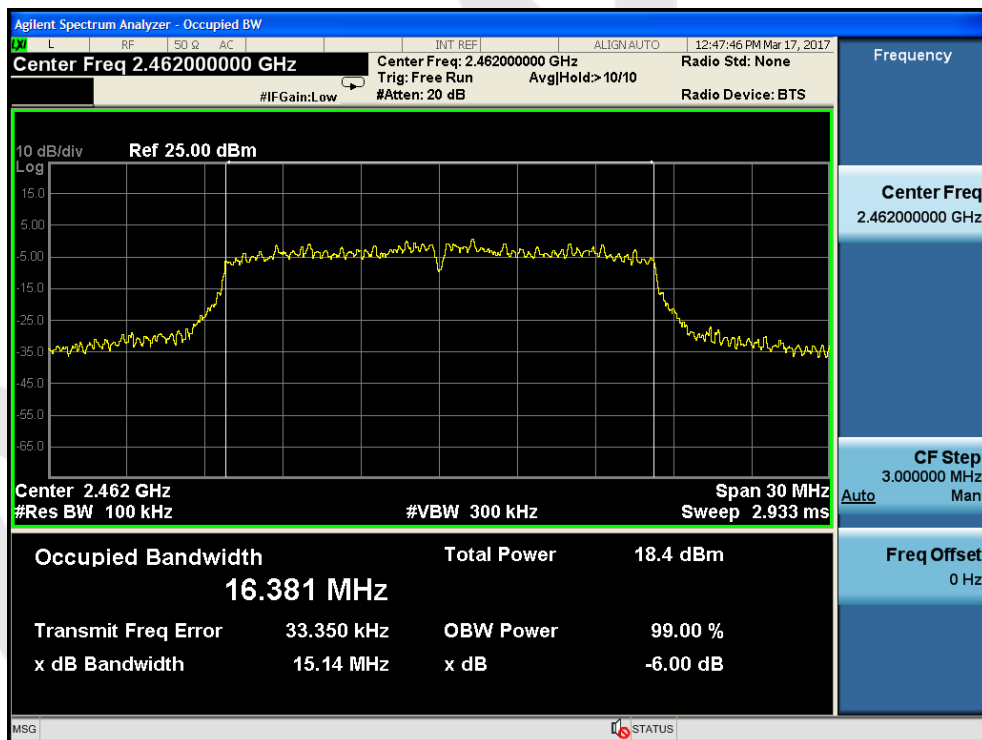


CH: 802.11g - High

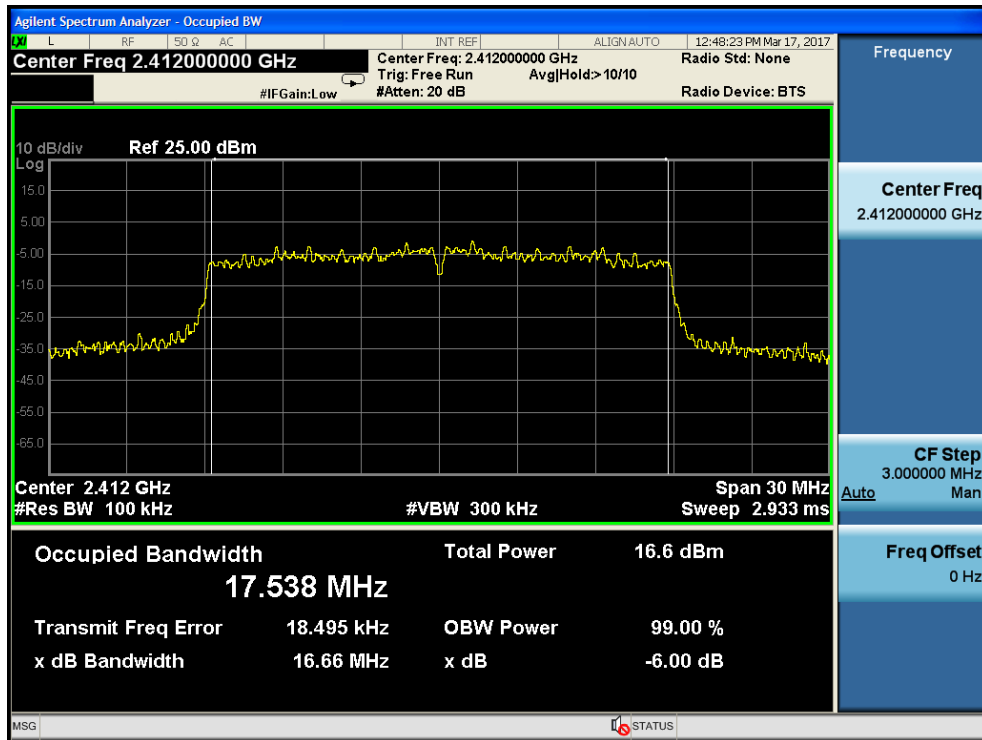

CH: 802.11n20 - Low

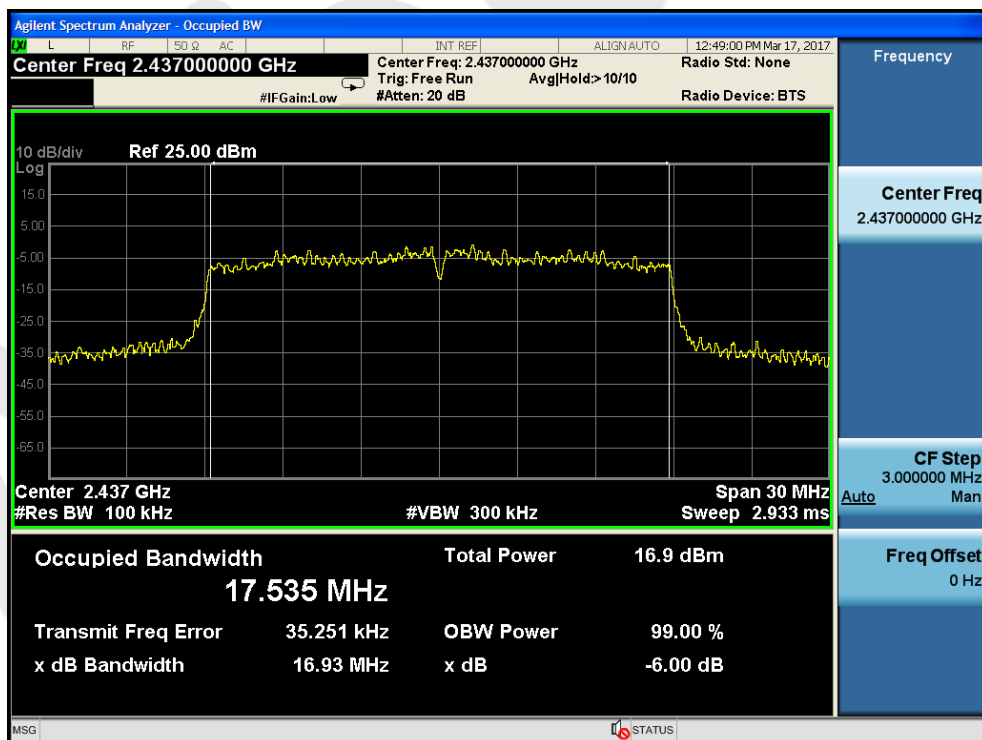

CH: 802.11n20 - Middle

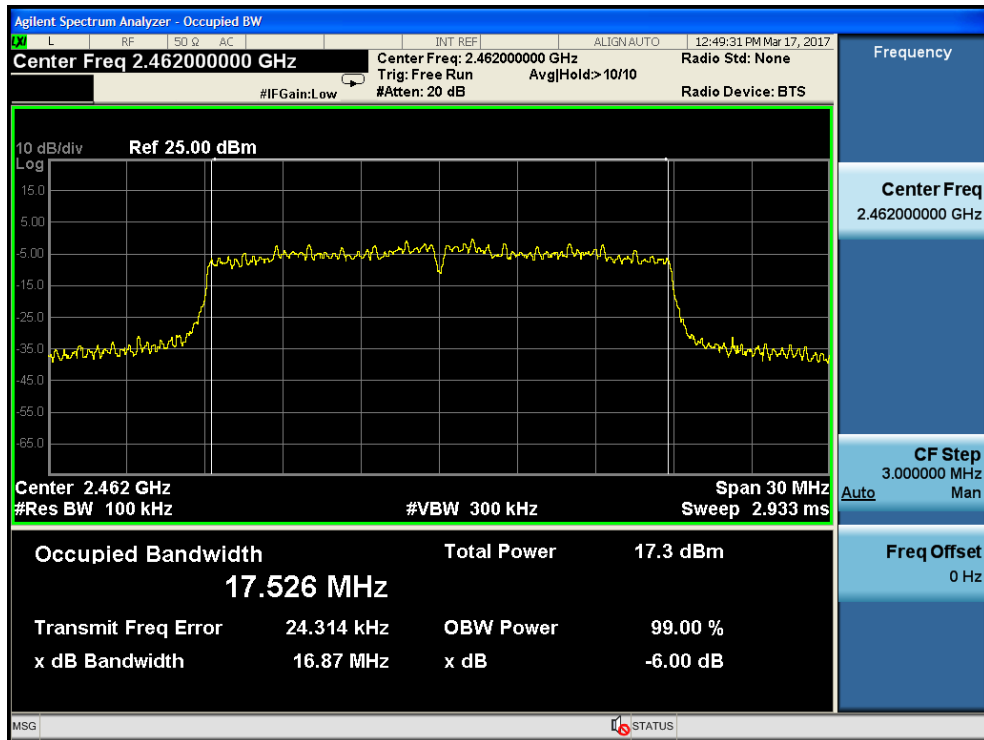


CH: 802.11n20 -High

7. Power Spectral Density Test

7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm

7.2. Test Setup




7.3. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.


7.4. Test Data

Test Item	: Power Spectral Density	Test Mode	: CH Low ~ CH High
Test Voltage	: AC120V/60HZ	Temperature	: 24°C
Test Result	: PASS	Humidity	: 55%RH


Test Mode	Channel	Frequency (MHz)	PPSD (dBm/3KHz)	Limit (dBm/3KHz)	Results
802.11b	Low	2412	-10.766	8.00	PASS
	Middle	2437	-10.909	8.00	PASS
	High	2462	-10.450	8.00	PASS
802.11g	Low	2412	-15.919	8.00	PASS
	Middle	2437	-14.516	8.00	PASS
	High	2462	-13.784	8.00	PASS
802.11n20	Low	2412	-17.182	8.00	PASS
	Middle	2437	-16.018	8.00	PASS
	High	2462	-15.288	8.00	PASS

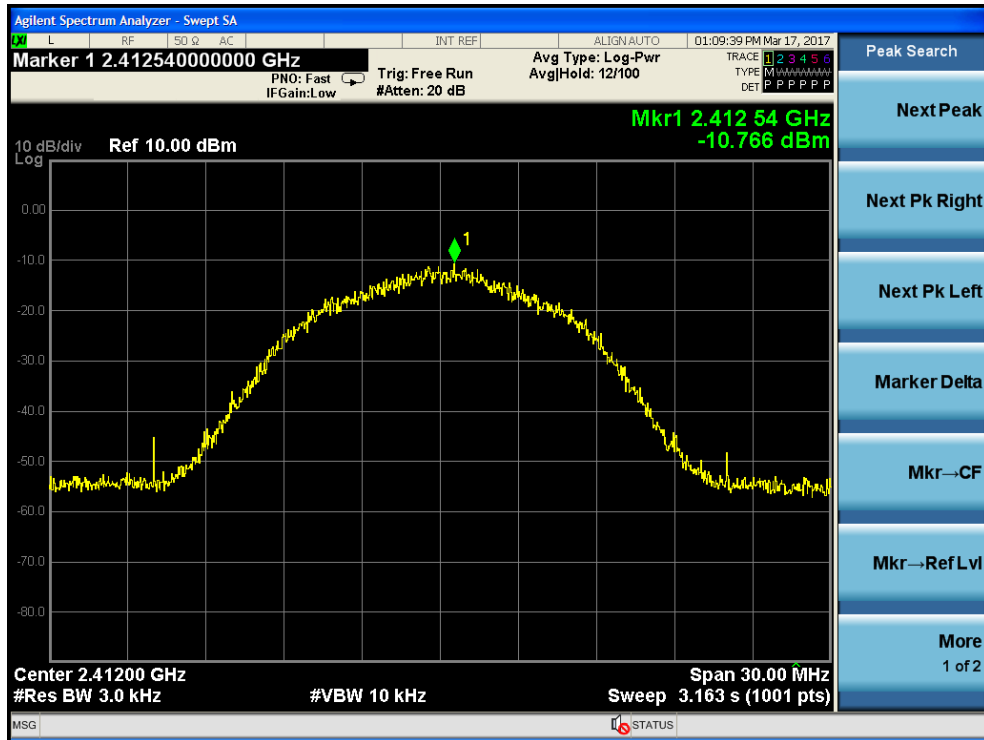


CH: 802.11b-Low

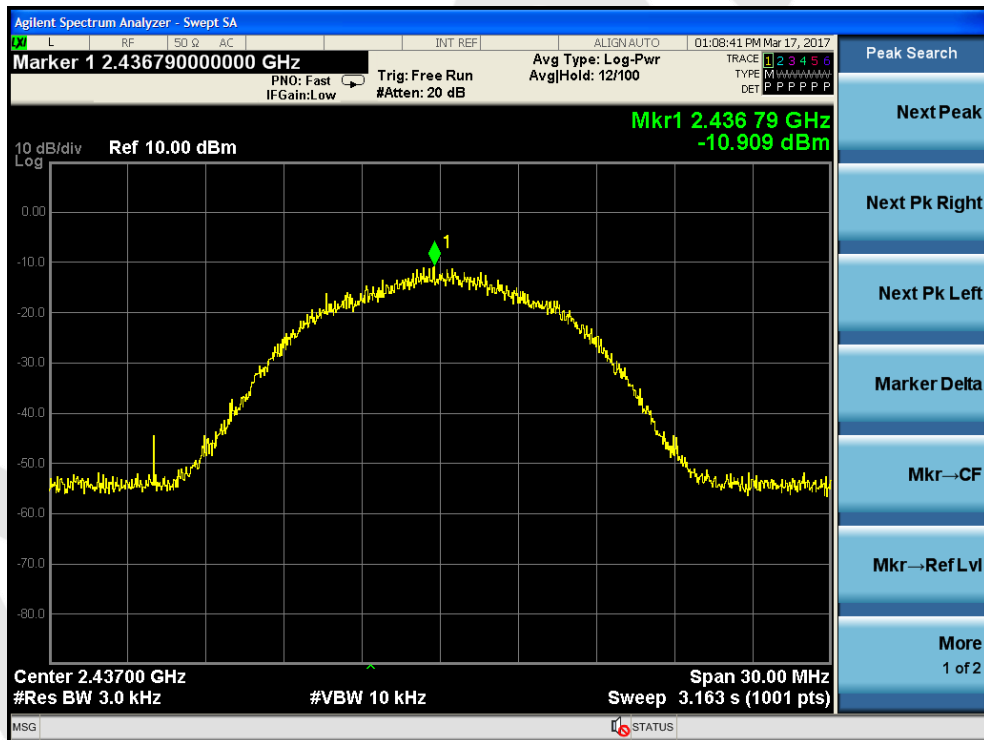


CH: 802.11b- Middle

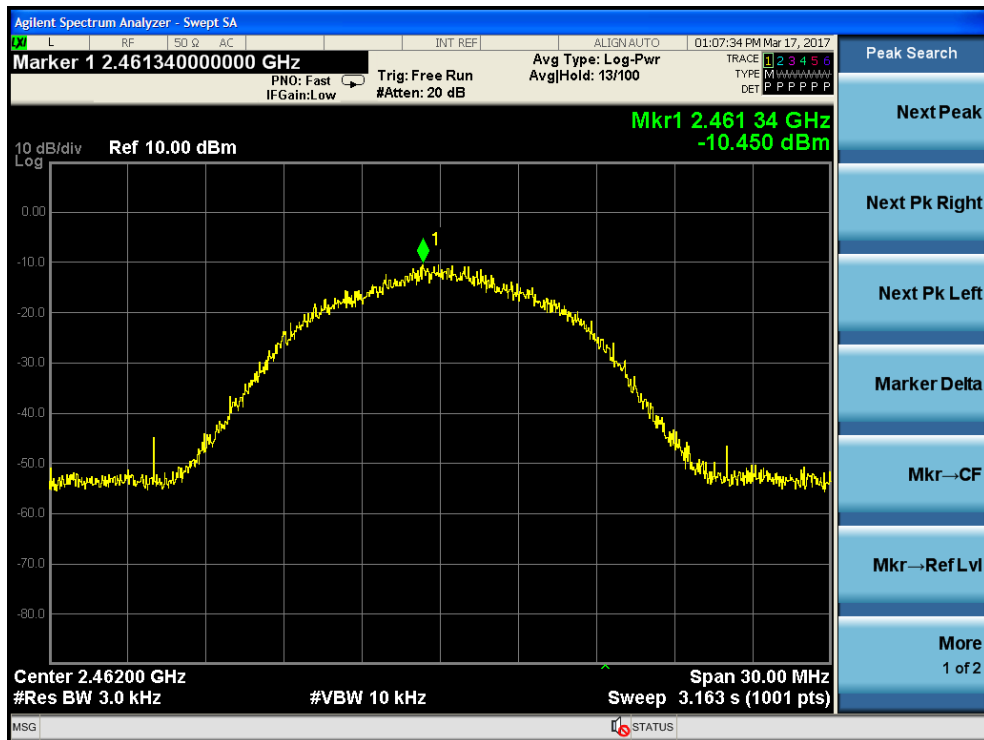


CH: 802.11b- High

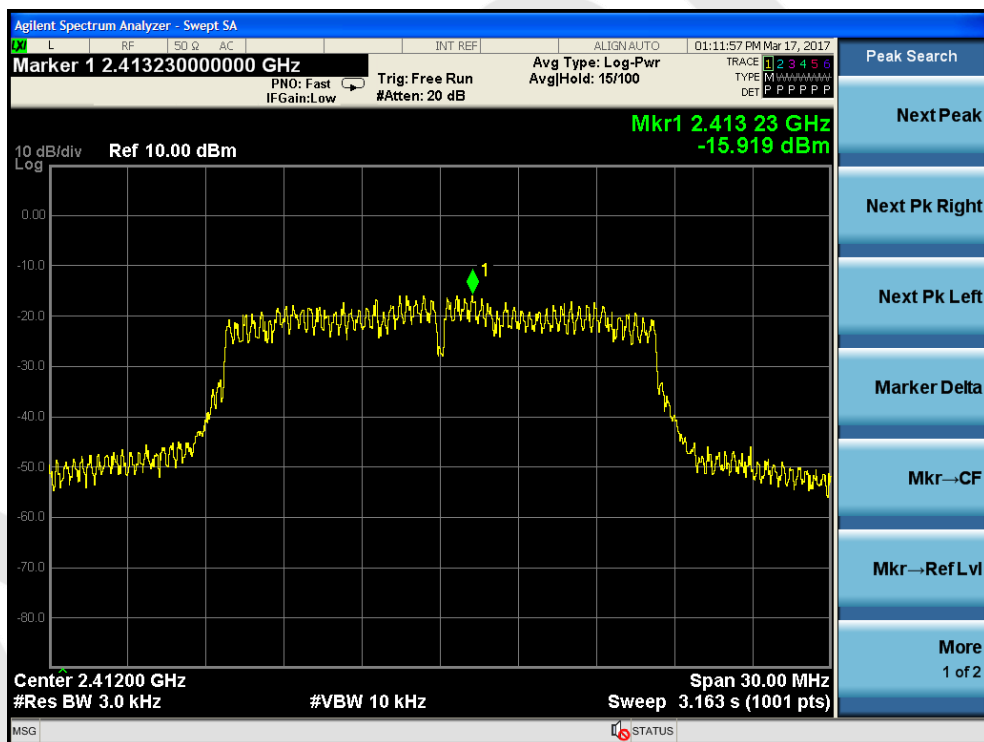


CH: 802.11g-Low

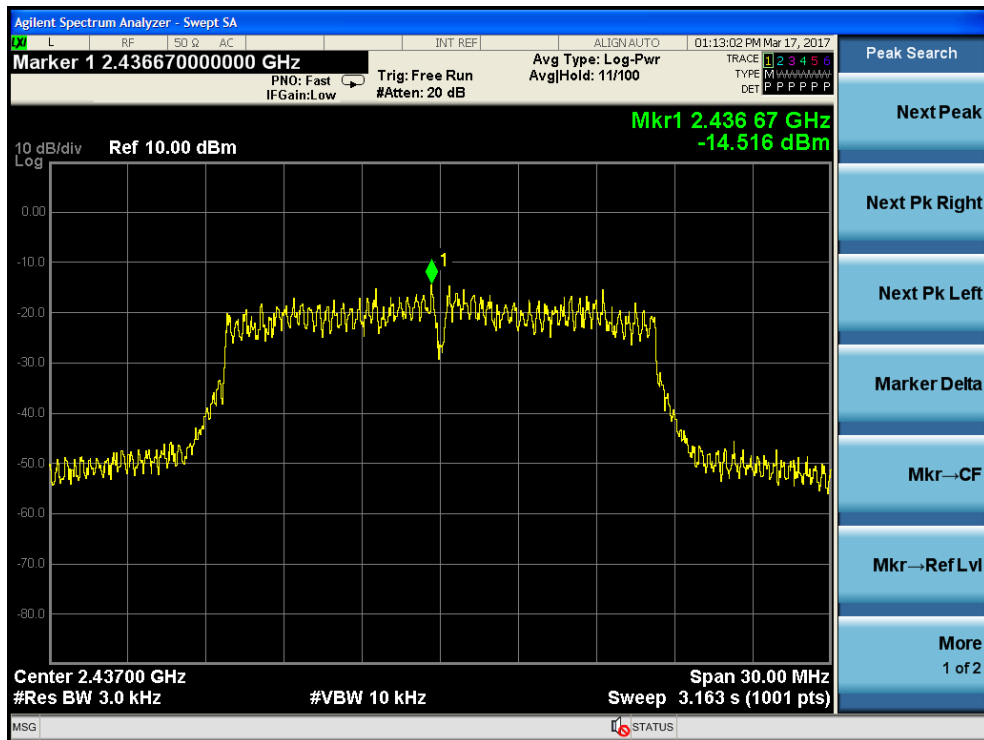


CH: 802.11g- Middle

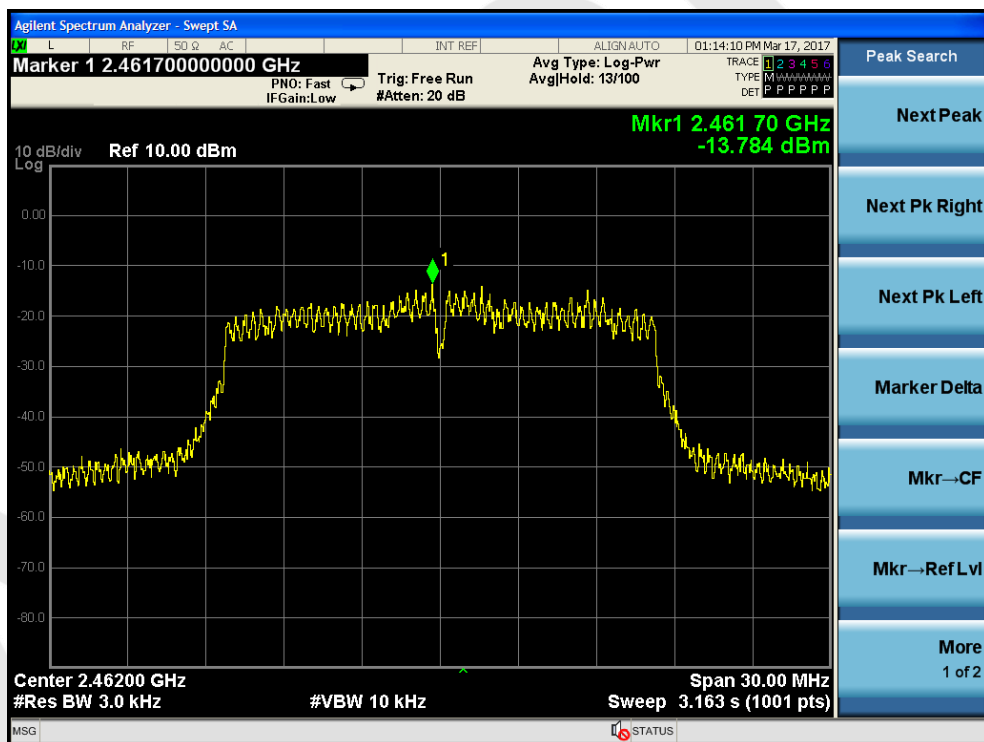


CH: 802.11g- High

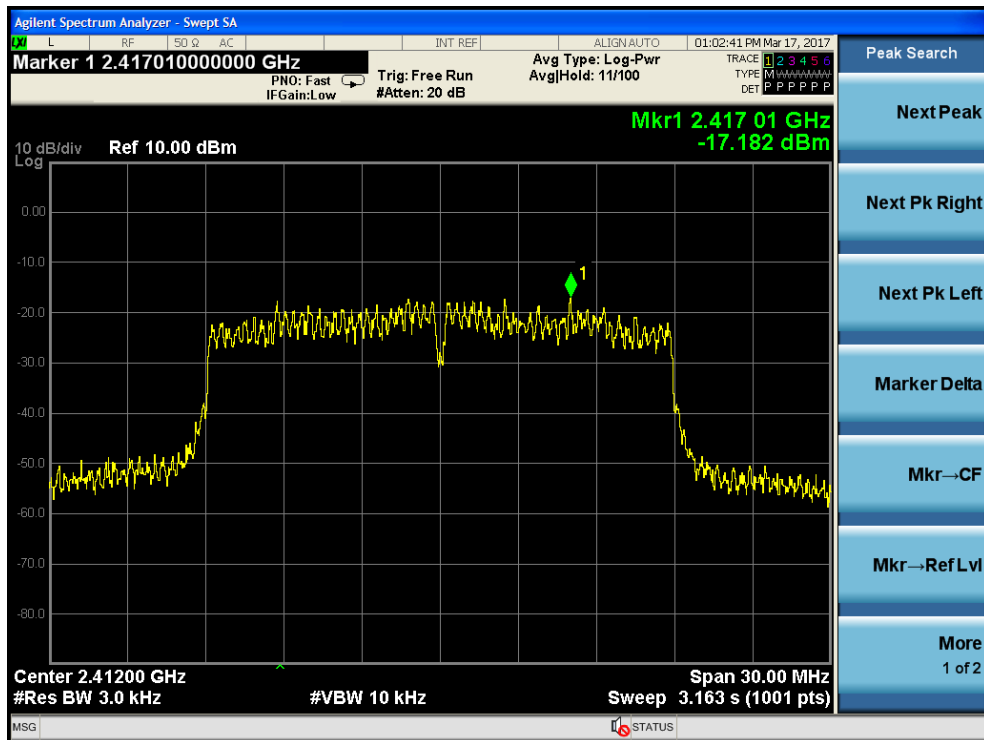

CH: 802.11n20-Low

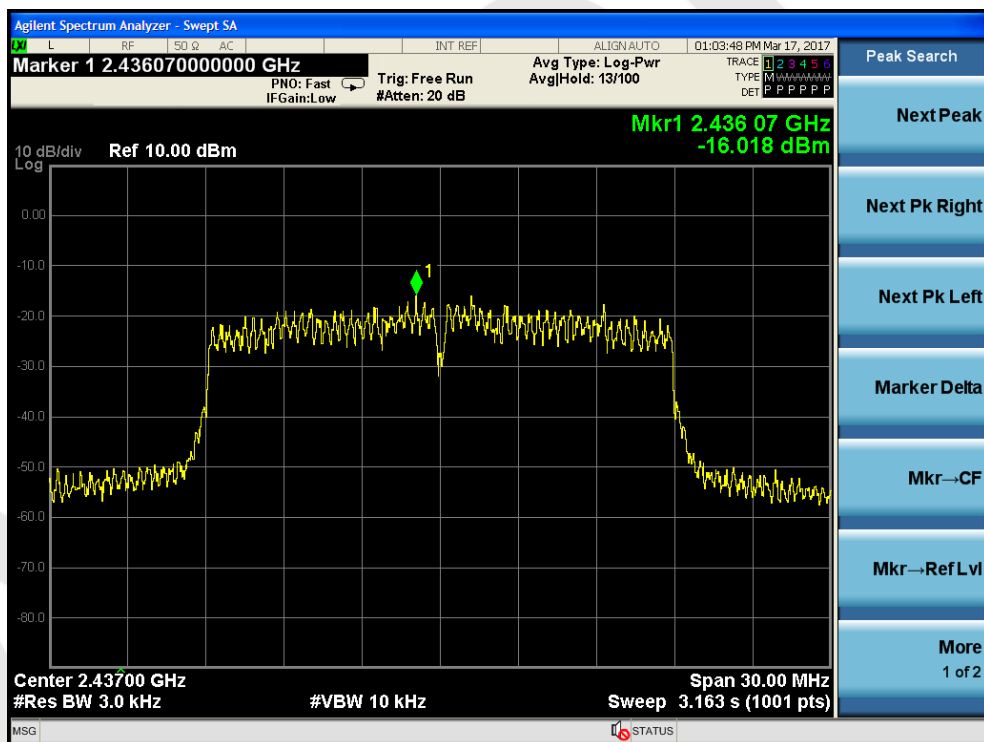

CH: 802.11n20- Middle

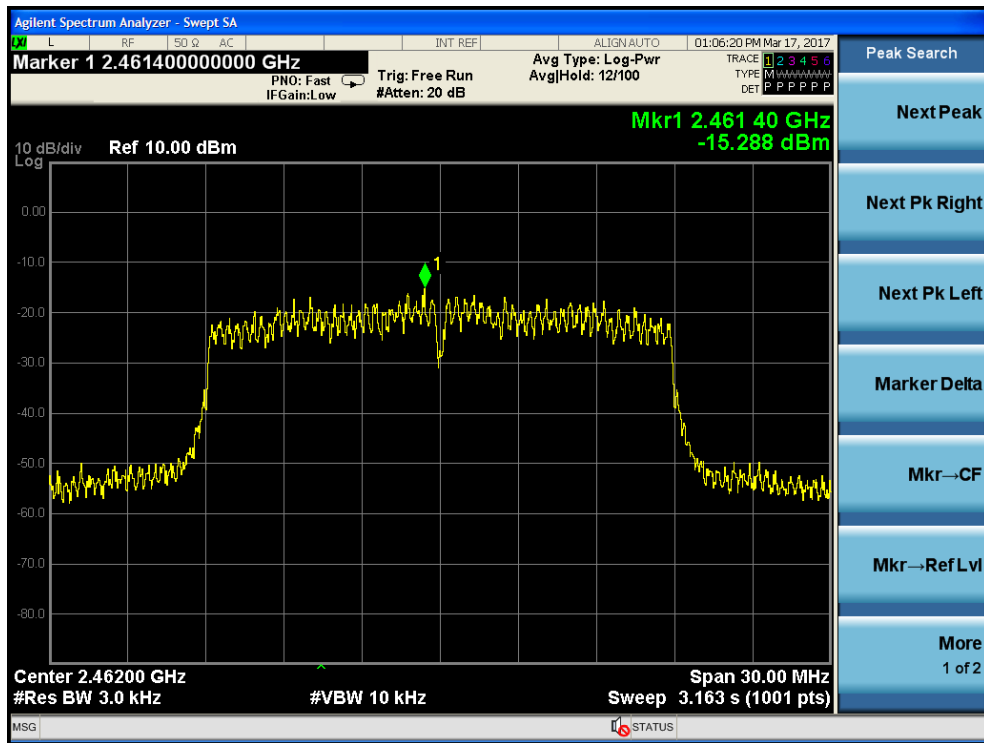


CH: 802.11n20- High

8. 100kHz Bandwidth of Frequency Band Edge Requirement

8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

8.2. Test Setup



8.3. Test Procedure


Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

8.4. Test Data

Test Item	: Band edge	Test Mode	: CH Low ~ CH High
Test Voltage	: AC120V/60HZ	Temperature	: 24℃
Test Result	: PASS	Humidity	: 55%RH


Test Mode	Frequency Band (MHz)	Delta Peak toBand Emission (dBc)	Limit (dBc)	Results
802.11b	2400	40.103	>30	PASS
	2483.5	51.267	>30	PASS
802.11g	2400	30.593	>30	PASS
	2483.5	43.366	>30	PASS
802.11n20	2400	34.076	>30	PASS
	2483.5	42.256	>30	PASS

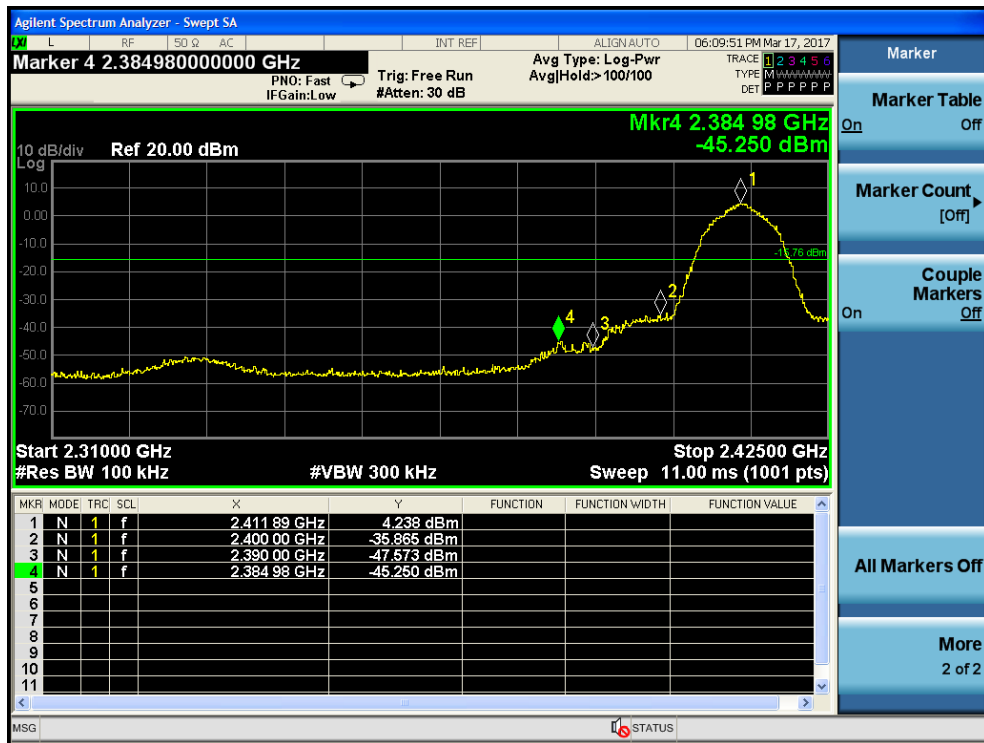

CH: 802.11b-Low



CH: 802.11b-High

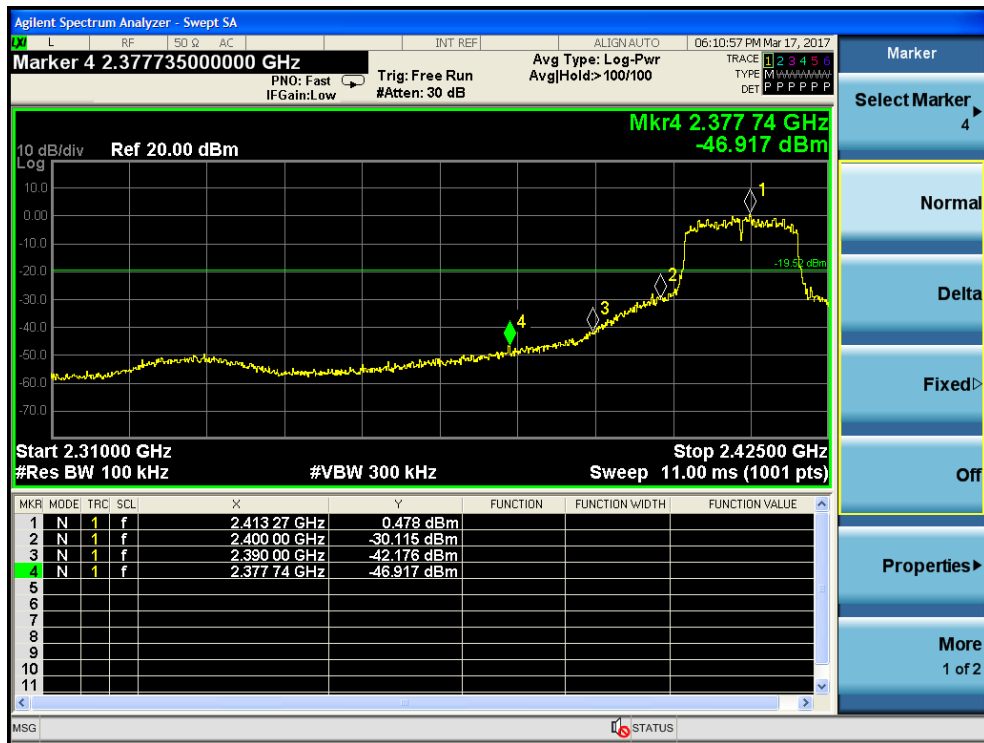

CH: 802.11g-Low



CH: 802.11g-High



CH: 802.11n20-Low



CH: 802.11n20-High

9. Antenna Requirement

9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

9.2. Antenna Connected Construction

The WiFi antenna is a plate antenna which connect with a RP-connector, and the best case gain of the antenna is 1.5dBi. It complies with the standard requirement.







APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement




Photo of Radiation Emission Test

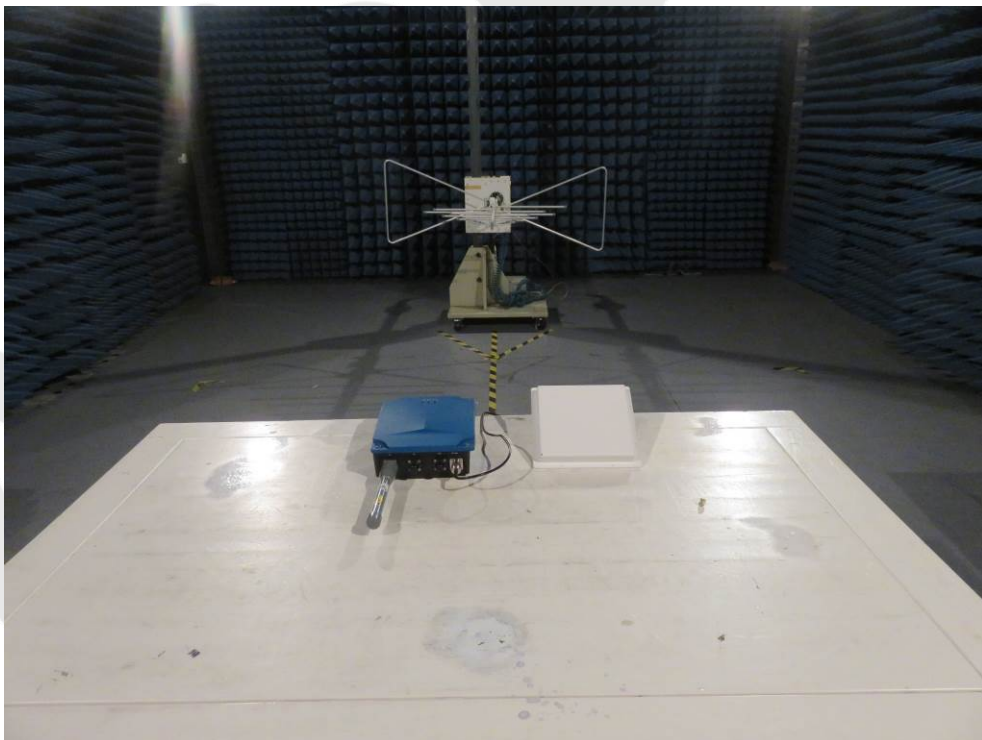

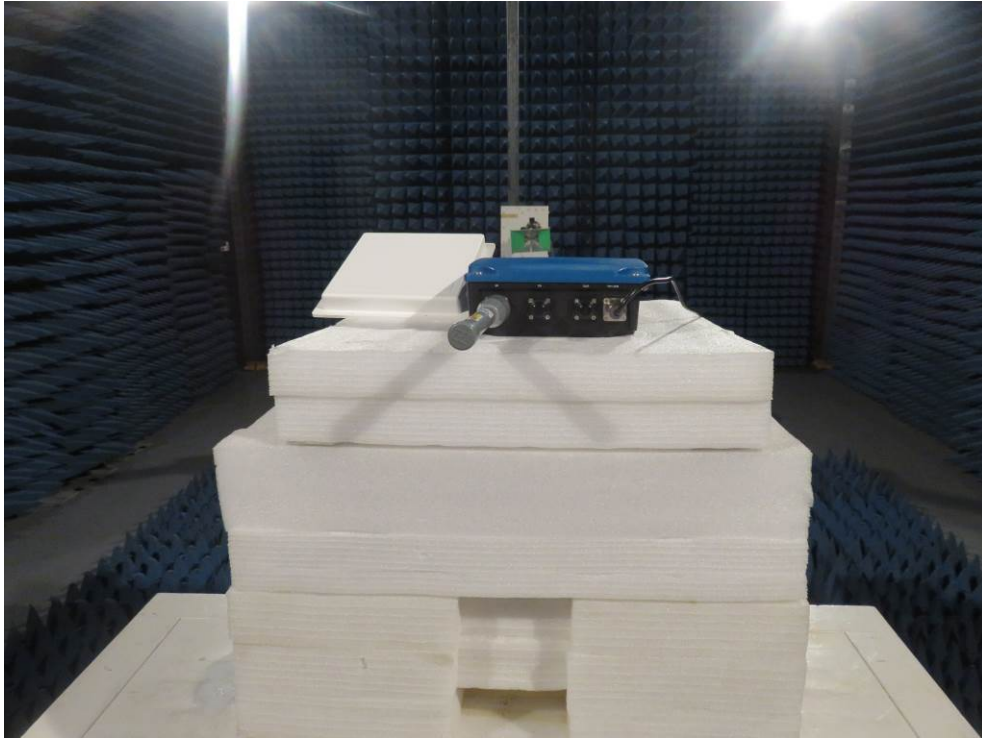

APPENDIX II -- EXTERNAL PHOTOGRAPH



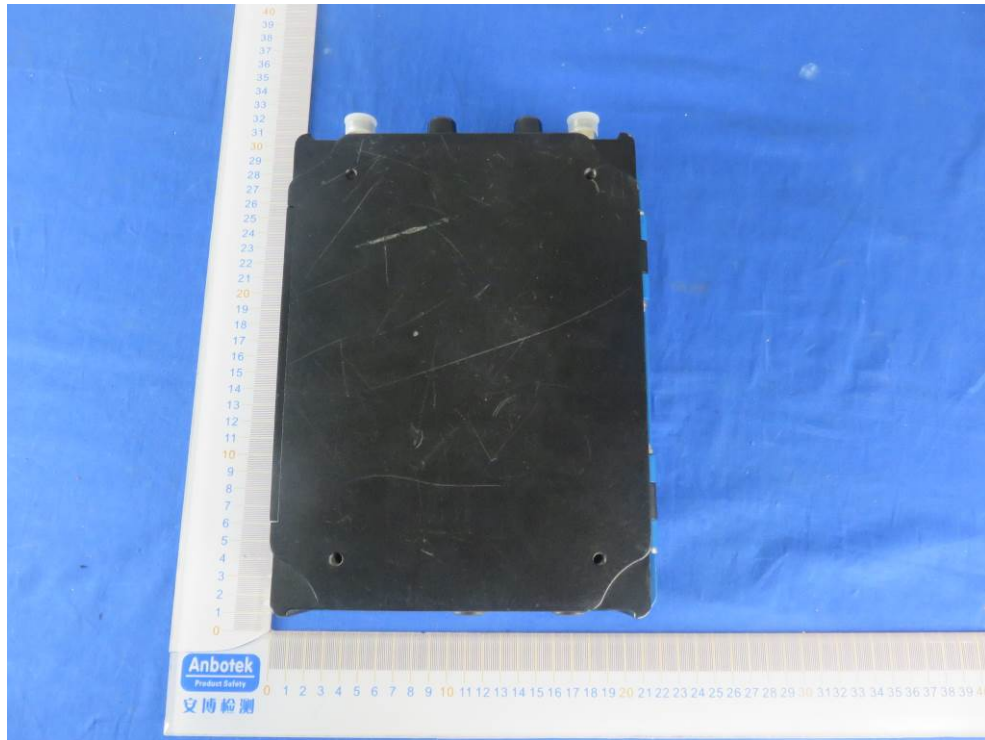





APPENDIX III -- INTERNAL PHOTOGRAPH

