


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	25°C	Humidity	58%
Test Engineer	Owen Hsu	Configurations	2.4GHz + 5GHz

Horizontal

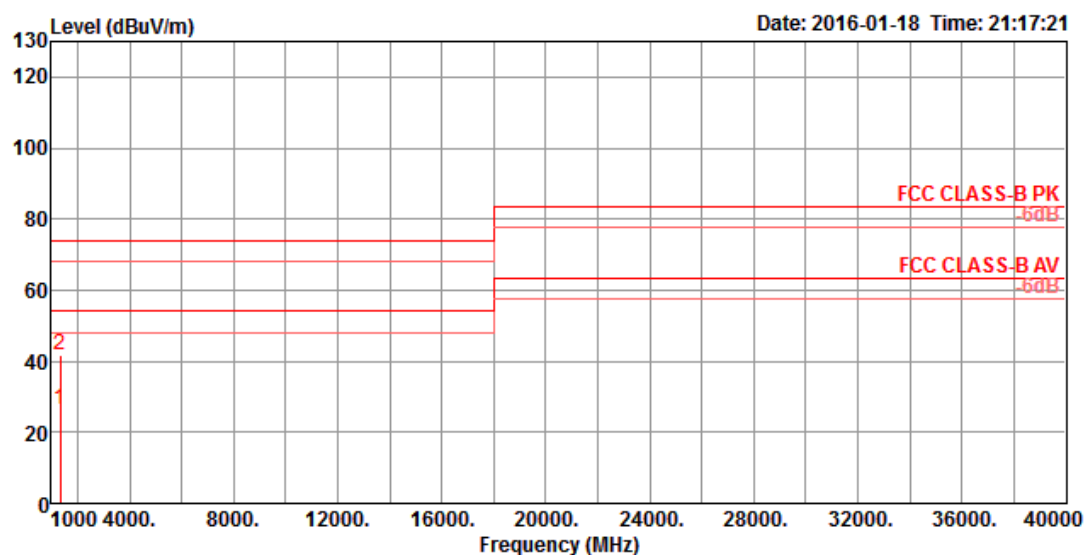

	Freq	Level	Limit	Over	Read	Cable	Preamp	Antenna		T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	Loss	Factor	Factor	Pol/Phase	deg	cm	
1	1327.20	26.50	54.00	-27.50	33.00	4.31	35.87	25.06	HORIZONTAL	224	121	Average
2	1328.30	41.87	74.00	-32.13	48.35	4.31	35.85	25.06	HORIZONTAL	224	121	Peak

Vertical

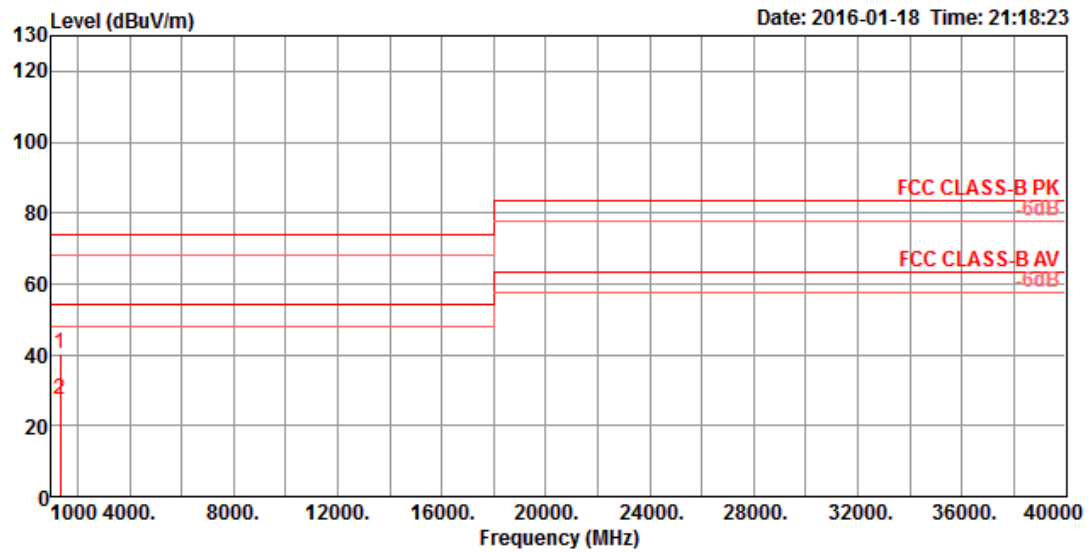

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Preamp Factor	Antenna Factor	Pol/Phase	T/Pos	A/Pos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB	dB/m		deg	cm	
1	1321.10	40.46	74.00	-33.54	47.01	4.29	35.89	25.05	VERTICAL	321	123	Peak
2	1321.11	27.42	54.00	-26.58	33.97	4.29	35.89	25.05	VERTICAL	321	123	Average