

# **FCC Test Report**

Report No.: AGC02762250302FR03

**FCC ID** : 2AL26-R1

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: Body Worn Camera

**BRAND NAME** : Reveal Media

MODEL NAME : R1

**APPLICANT**: Reveal Media Limited

**DATE OF ISSUE** : Apr. 17, 2025

**STANDARD(S)** : FCC Part 15 Subpart E §15.407

**REPORT VERSION**: V1.0

Attestation of Global Conciliance (Shenzhen) Co., Ltd



Page 2 of 213


# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Apr. 17, 2025	Valid	Initial Release




#### **Table of Contents**

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	10
2.4 Related Submittal(S) / Grant (S)	11
2.5 Test Methodology	11
2.6 Special Accessories	11
2.7 Equipment Modifications	11
2.8 Antenna Requirement	11
2.9 Description of Test Software	12
3. Test Environment	14
3.1 Address of The Test Laboratory	14
3.2 Test Facility	14
3.3 Environmental Conditions	15
3.4 Measurement Uncertainty	15
3.5 List of Equipment Used	16
4.System Test Configuration	19
4.1 EUT Configuration	19
4.2 EUT Exercise	19
4.3 Configuration of Tested System	19
4.4 Equipment Used in Tested System	20
4.5 Summary of Test Results	21
5. Description of Test Modes	22
6. Duty Cycle Measurement	25
7. RF Output Power Measurement	31
7.1 Provisions Applicable	31
7.2 Measurement Procedure	31
7.3 Measurement Setup (Block Diagram of Configuration)	31
7.4 Measurement Result	32
8. 6dB&26dB Bandwidth Measurement	36
8.1 Provisions Applicable	36
8.2 Measurement Procedure	36
8.3 Measurement Setup (Block Diagram of Configuration)	36
8.4 Measurement Results	37





9. Power Spectral Density Measurement	78
9.1 Provisions Applicable	78
9.2 Measurement Procedure	78
9.3 Measurement Setup (Block Diagram of Configuration)	78
9.4 Measurement Result	79
10. Conducted Band Edge and Out-of-Band Emissions	113
10.1 Provisions Applicable	113
10.2 Measurement Procedure	113
10.3 Measurement Setup (Block Diagram of Configuration)	114
10.4 Measurement Results	115
11. Radiated Spurious Emission	172
11.1 Measurement Limit	172
11.2 Measurement Procedure	173
11.3 Measurement Setup (Block Diagram of Configuration)	175
11.4 Measurement Result	176
12. AC Power Line Conducted Emission Test	209
12.1 Measurement limit	209
12.2 Block Diagram of Line Conducted Emission Test	209
12.3 Preliminary Procedure of Line Conducted Emission Test	210
12.4 Final Procedure of Line Conducted Emission Test	210
12.5 Test Result of Line Conducted Emission Test	211
Appendix I: Photographs of Test Setup	213
Appendix II: Photographs of EUT	213





# 1. General Information

Applicant	Reveal Media Limited
Address	Riverview House, 20 Old Bridge Street, Hampton Wick, KT1 4BU United Kingdom
Manufacturer	Reveal Media Hong Kong Ltd.
Address	6/F., Luk Kwok Centre, 72 Gloucester Road, Wan Chai, Hong Kong.
Factory	N/A
Address	N/A
Product Designation	Body Worn Camera
Brand Name	Reveal Media
Test Model	R1
Series Model(s)	N/A
Difference Description	N/A
Date of receipt of test item	Mar. 04, 2025
Date of Test	Apr. 08, 2025- Apr. 17, 2025
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCER-FCC-5G WLAN-V1

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jack Gai	
	Jack Gui (Project Engineer)	Apr. 17, 2025
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer) λ	Apr. 17, 2025
Approved By	Angole li	
	Angela Li (Authorized Officer)	Apr. 17, 2025



Page 6 of 213

# 2. Product Information

## 2.1 Product Technical Description

Equipment Type	<ul><li>☐ Outdoor access points</li><li>☐ Indoor access points</li><li>☐ Client devices</li></ul>		
Operation Frequency	<ul> <li>☑ U-NII 1:5150MHz~5250MHz</li> <li>☑ U-NII 2A: 5250MHz~5350MHz</li> <li>☑ U-NII 2C:5470MHz~5725MHz</li> <li>☑ U-NII 3: 5725MHz~5850MHz</li> </ul>		
DFS Design Type	☐ Master ☐ Slave with radar detection ☐ Slave without radar detection		
TPC Function	☐ Yes ☐ No		
Hardware Version	V1.0		
Software Version	V1.0		
Test Frequency Range	For 802.11a/n-HT20/ac-VHT20: 5180~5240MHz/5260~5320MHz/5500~5720MHz/5745~5825MHz; For 802.11n-HT40/ac-VHT40: 5190~5230MHz/5270~5310MHz/5510~5710MHz/5755~5795MHz; For 802.11ac-VHT80: 5210MHz/5290MHz/5530~5690MHz/5775MHz		
RF Output Power	802.11a:13.56dBm,802.11n(HT20):12.15dBm; 802.11n(HT40):12.21dBm; 802.11ac (VHT20):12.11dBm;802.11ac (VHT40):12.15dBm; 802.11ac (VHT80):11.22dBm		
Modulation	802.11a/n:(64-QAM, 16-QAM, QPSK, BPSK) OFDM 802.11ac :(256-QAM, 64-QAM, 16-QAM, QPSK, BPSK) OFDM		
Data Rate	802.11a:6/9/12/18/24/36/48/54Mbps; 802.11n: up to 300Mbps; 802.11ac: up to 866.6Mbps;		
Number of channels	7 channels of U-NII-1 Band;7 channels of U- NII-2A Band 12 channels of U-NII-2C Band;8 channels of U- NII 3 Band		
Antenna Designation	FPC Antenna		
Antenna Gain	0.94dBi.		
Power Supply	DC 3.85V by battery or DC 5V by adapter		



Page 7 of 213

#### 2.2 Table of Carrier Frequency

#### For 5180~5240MHz:

## 4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

#### 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

#### 1 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
42	5210 MHz		

#### For 5260~5320MHz:

# 5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

# 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

## 1 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
58	5290 MHz		



Page 8 of 213

#### For 5500~5700MHz:

#### 11 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz		

# 5 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz		

# 2 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	122	5610 MHz



Page 9 of 213

#### For 5745~5825MHz:

#### 5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

# 2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

# 1 channel is provided for 802.11ac (VHT80):

Channel	Frequency	Channel	Frequency
155	5775 MHz		



Page 10 of 213

#### 2.3 IEEE 802.11n Modulation Scheme

MCS Index	Nss	Modulation	R	N <sub>BPSC</sub>	N <sub>C</sub>	BPS	N <sub>D</sub>	BPS	Data (Mb 800)	
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	Guard interval



Page 11 of 213

#### 2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2AL26-R1 filing to comply with the FCC Part 15 requirements.

#### 2.5 Test Methodology

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 789033	789033 D02 General U-NII Test Procedures New Rules v02r01

## 2.6 Special Accessories

Refer to section 4.4.

#### 2.7 Equipment Modifications

Not available for this EUT intended for grant.

#### 2.8 Antenna Requirement

#### Standard Requirement

#### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

#### **EUT Antenna:**

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 0.94dBi.





#### 2.9 Description of Test Software

#### For IEEE 802.11 mode:

The test utility software used during testing was "Tera Term", and the version was "5.2".

## Software Setting Diagram

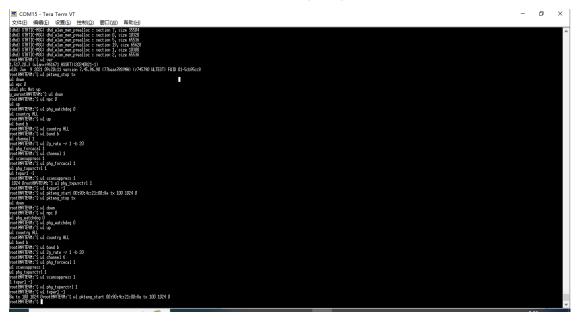





Test Mode U-NII 1	Channel	Power Index
802.11a	L/M/H	14
802.11n(HT20)	L/M/H	13
802.11n(HT40)	L/M/H	13
802.11ac(VHT20)	L/M/H	13
802.11ac(VHT40)	L/M/H	13
802.11ac(VHT80)	L/M/H	12
Test Mode U-NII 2A	Channel	Power Index
802.11a	L/M/H	14
802.11n(HT20)	L/M/H	13
802.11n(HT40)	L/M/H	13
802.11ac(VHT20)	L/M/H	13
802.11ac(VHT40)	L/M/H	13
802.11ac(VHT80)	L/M/H	12
Test Mode U-NII 2C	Channel	Power Index
802.11a	L/M/H	12
802.11n(HT20)	L/M/H	12
802.11n(HT40)	L/M/H	12
802.11ac(VHT20)	L/M/H	12
802.11ac(VHT40)	L/M/H	12
802.11ac(VHT80)	L/M/H	11
Test Mode U-NII 3	Channel	Power Index
802.11a	L/M/H	13
802.11n(HT20)	L/M/H	12
802.11n(HT40)	L/M/H	12
802.11ac(VHT20)	L/M/H	12
802.11ac(VHT40)	L/M/H	12
802.11ac(VHT80)	L/M/H	11



Page 14 of 213

#### 3. Test Environment

#### 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

#### 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories.)

#### A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

#### IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 15 of 213


#### 3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20% - 75%
Pressure range (kPa)	86 - 106
Power supply	DC 3.85V by battery or DC 5V by adapter

# 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Measurement Uncertainty
$U_c = \pm 2.9 \text{ dB}$
$U_c = \pm 3.9 \text{ dB}$
$U_c = \pm 4.9 \text{ dB}$
$U_c = \pm 0.8 \text{ dB}$
$U_c = \pm 2.6 \text{ dB}$
U <sub>c</sub> = ±2 %
$U_c = \pm 2.7 \%$





# 3.5 List of Equipment Used


• F	RF Conducted Test System								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2024-05-24	2025-05-23		
$\boxtimes$	AGC-ER-E087	Spectrum Analyzer	KEYSIGHT	N9020B	MY56101792	2024-05-23	2025-05-24		
$\boxtimes$	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2025-01-14	2026-01-13		
$\boxtimes$	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2025-01-14	2026-01-13		
$\boxtimes$	AGC-ER-A007	6dB Fixed Attenuator	Mini circuits	BW-S6-2W263A+	N/A	2025-01-30	2026-01-29		
$\boxtimes$	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2024-05-23	2025-05-22		
$\boxtimes$	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A		
	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A		

• F	Radiated Spurious Emission						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2025-01-14	2026-01-13
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27
$\boxtimes$	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2024-03-05	2026-03-04
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2025-03-27	2026-03-26
$\boxtimes$	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23
	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23
$\boxtimes$	AGC-EM-A118	5G Filter	SongYi	N/A	N/A	2024-05-23	2025-05-22
$\boxtimes$	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2025-06-08

<ul><li>A</li></ul>	AC Power Line Conducted Emission								
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2024-05-28	2025-05-27		
$\boxtimes$	AGC-EM-A130 6dB Attenuator Eeatsheep		Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2025-06-08		
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27		



Page 17 of 213





• Tes	Test Software									
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information					
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71					
$\boxtimes$	AGC-EM-S003	RE Test System	FARA	EZ-EMC	VRA-03A					
	AGC-EM-S004	RE Test System	Tonscend	TS+Ver2.1(JS32-RE)	4.0.0.0					
$\boxtimes$	AGC-ER-S012	BT/WIFI Test System	Tonscend	JS1120-2	2.6					
$\boxtimes$	AGC-EM-S011	RSE Test System	Tonscend	TS+-Ver2.1(JS36-RSE)	4.0.0.0					



Page 19 of 213

# 4. System Test Configuration

## 4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.


#### 4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.


#### 4.3 Configuration of Tested System

Radiated Emission Configure:



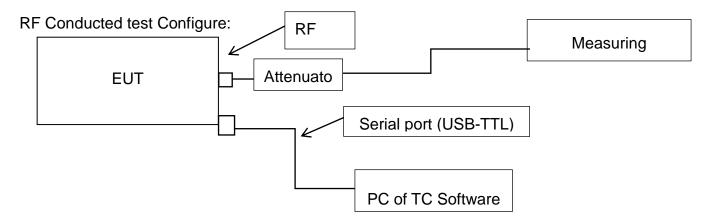

# Conducted Emission Configure:





Page 20 of 213

# 4.4 Equipment Used in Tested System

The following peripheral devices and interface cables were connected during the measurement:

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1	Adapter	HUAWEI	HW-200440C00		
2	Control Box	RISYM	USB-TTL	-	

☐ Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1					



Page 21 of 213

# 4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203	Antenna Equipment	Pass
2	§15.407(a/1/2/3)	RF Output Power	Pass
3	§15.407(e)	6 dB Bandwidth	Pass
4	§15.403(a)	99% Occupied Bandwidth	Pass
5	§15.407(a/1/2/3)	Power Spectral Density	Pass
6	§15.407(g)	Frequency Stability	Pass (See Note 1)
7	§15.407(c)	Transmission Discontinuation Requirement	Pass (See Note 2)
8	§15.407(b)(1/2/3/4)	Conducted Band Edge and Out-of-Band Emissions	Pass
9	§15.209,§15.407(b)(1/2/3/4)	Radiated Spurious Emission	Pass
10	§15.207	AC Power Line Conducted Emission	Pass

#### Note:

- 1. Refer to the manufacturer's declaration in the user manual.
- 2. The device operates without the transmission of information.



Page 22 of 213

# 5. Description of Test Modes

EUT Configure Mode		Applic	cable To		Description
201 Configure Mode	RE > 1G	RE<1G	PLC	APCM	Description
А	$\boxtimes$	$\boxtimes$			Powered by Adapter with WIFI(5G) Link
В	🖂		Powered by Battery with WIFI(5G) Link		
С					Powered by USB with WIFI(5G) Link

Where. RE > 1G: Radiated Emission above 1GHz PLC: Power Line Conducted Emission

NOTE 1: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on X-plane.

NOTE 2: "--"means no effect.

#### • Radiated Emission Test (Above 1GHz):

$\times$	$\cInt {\cInt}$ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meer
	available modulations, data rates and antenna ports (IF EUT with antenna diversity architecture).

☐ Support 802.11ax, device debugging is tested in Full RU state

☐ The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
А	802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	6.0
Α	802.11a	5260-5320	52 to 64	52, 60, 64	OFDM	6.0
Α	802.11a	5500-5700	100 to 140	100, 116, 140	OFDM	6.0
Α	802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	6.0



Page 23 of 213

# Radiated Emission Test (Below 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

☐ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
Α	802.11a	5180-5240	36 to 48	40	OFDM	6.0

#### • Power Line Conducted Emission Test:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
Α	802.11a	5180-5240	36 to 48	40	OFDM	6.0

#### Band edge Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

Support 802.11ax, device debugging is tested in Full RU state

The device under test has multiple antennas. The mode that supports MIMO technology records the worst data, and the mode that does not support MIMO technology records antenna 1 as the worst data.

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
Α	802.11a		36 to 48	36	OFDM	6.0
Α	802.11n (40MHz)	5180-5240	38 to 46	38	OFDM	MCS0
Α	802.11ac (80MHz)		42	42	OFDM	MCS0
Α	802.11a		52 to 64	64	OFDM	6.0
А	802.11n (40MHz)	5260-5320	54 to 62	62	OFDM	MCS0
А	802.11ac (80MHz)		58	58	OFDM	MCS0
А	802.11a		100 to 140	100	OFDM	6.0
А	802.11n (40MHz)	5500-5700	102 to 134	102	OFDM	MCS0
Α	802.11ac (80MHz)		106	106	OFDM	MCS0



Page 24 of 213

# • Antenna Port Conducted Measurement:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations be Meen available modulations, data rates and antenna ports (If EUT with antenna diversity architecture).

☐ Support 802.11ax, device debugging is tested in Full RU state

Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Freq. Band (MHz)	Available Channel	Tested Channel	Modulation	Data Rate (Mbps)
В	802.11a		36 to 48	36, 40, 48	OFDM	6.0
В	802.11n (20MHz)		36 to 48	36, 40, 48	OFDM	MCS0
В	802.11n (40MHz)	5180-5240	38 to 46	38, 46	OFDM	MCS0
В	802.11ac (20MHz)	3180-3240	36 to 48	36, 40, 48	OFDM	MCS0
В	802.11ac (40MHz)		38 to 46	38, 46	OFDM	MCS0
В	802.11ac (80MHz)		42	42	OFDM	MCS0
В	802.11a		52 to 64	52, 60, 64	OFDM	6.0
В	802.11n (20MHz)		52 to 64	52, 60, 64	OFDM	MCS0
В	802.11n (40MHz)	5260-5320	54 to 62	54, 62	OFDM	MCS0
В	802.11ac (20MHz)	5260-5520	52 to 64	52, 60, 64	OFDM	MCS0
В	802.11ac (40MHz)		54 to 62	54, 62	OFDM	MCS0
В	802.11ac (80MHz)		58	58	OFDM	MCS0
В	802.11a		100 to 140	100, 116, 140	OFDM	6.0
В	802.11n (20MHz)		100 to 140	100, 116, 140	OFDM	MCS0
В	802.11n (40MHz)	5500-5700	102 to 134	102, 110, 134	OFDM	MCS0
В	802.11ac (20MHz)	3300-3700	100 to 140	100, 116, 140	OFDM	MCS0
В	802.11ac (40MHz)		102 to 134	102, 110, 134	OFDM	MCS0
В	802.11ac (80MHz)		106,122	106,122	OFDM	MCS0
В	802.11a		149 to 165	149, 157, 165	OFDM	6.0
В	802.11n (20MHz)		149 to 165	149, 157, 165	OFDM	MCS0
В	802.11n (40MHz)	5745-5825	151 to 159	151, 159	OFDM	MCS0
В	802.11ac (20MHz)	3740-0020	149 to 165	149, 157, 165	OFDM	MCS0
В	802.11ac (40MHz)		151 to 159	151, 159	OFDM	MCS0
В	802.11ac (80MHz)		155	155	OFDM	MCS0




Page 25 of 213

# 6. Duty Cycle Measurement

5GHz WLAN (NII) operation is possible in 20MHz, 40MHz and 80MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)			
Band U-NII1:5150MHz-5250MHz						
802.11a	6	93.21	0.31			
802.11n_HT20	MCS0	92.97	0.32			
802.11n_HT40	MCS0	86.72	0.62			
802.11ac_VHT20	MCS0	92.88	0.32			
802.11ac_VHT40	MCS0	86.82	0.61			
802.11ac_VHT80	MCS0	76.89	1.14			
	Band U-NII 2A:5250N	MHz-5350MHz				
802.11a	6	93.39	0.30			
802.11n_HT20	MCS0	93.04	0.31			
802.11n_HT40	MCS0	86.68	0.62			
802.11ac_VHT20	MCS0	93.02	0.31			
802.11ac_VHT40	MCS0	86.70	0.62			
802.11ac_VHT80	MCS0	76.95	1.14			






Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)				
	Band U-NII 2C:5470MHz-5725MHz						
802.11a	6	93.27	0.30				
802.11n_HT20	MCS0	92.91	0.32				
802.11n_HT40	MCS0	86.56	0.63				
802.11ac_VHT20	MCS0	92.88	0.32				
802.11ac_VHT40	MCS0	86.70	0.62				
802.11ac_VHT80	MCS0	76.58	1.16				
	Band U-NII 3:5725N	MHz-5850MHz					
802.11a	6	93.27	0.30				
802.11n_HT20	MCS0	92.91	0.32				
802.11n_HT40	MCS0	86.81	0.61				
802.11ac_VHT20	MCS0	93.08	0.31				
802.11ac_VHT40	MCS0	86.88	0.61				
802.11ac_VHT80	MCS0	77.07	1.13				

#### Remark:


- 1. Duty Cycle factor = 10 \* log (1/ Duty cycle)
- 2. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.
- 3. Involving the test items of duty cycle compensation coefficient, the final results have been added and calculated by the software and presented.







# The test plots as follows:









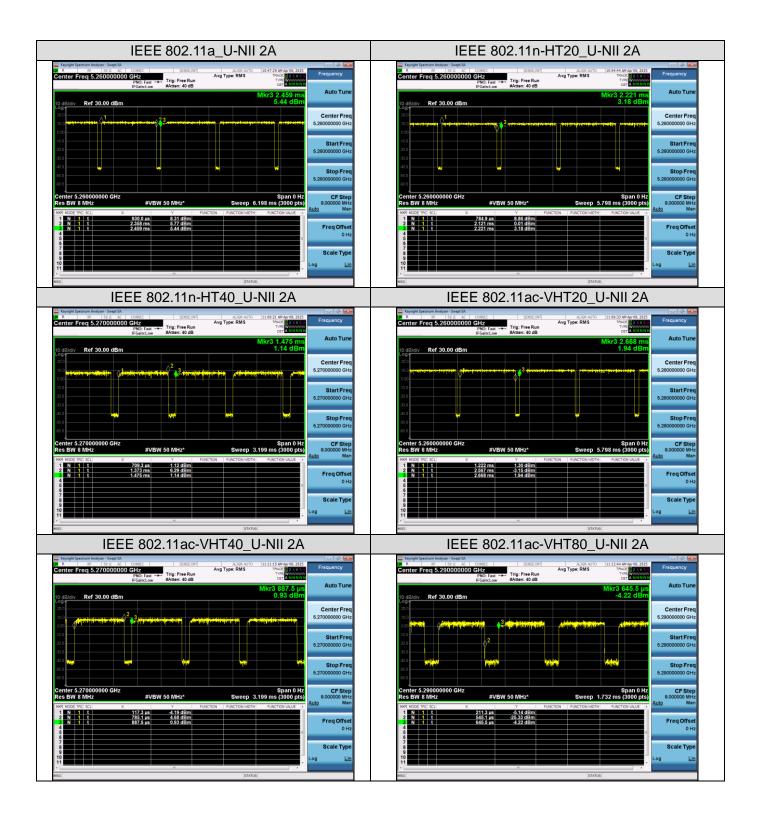







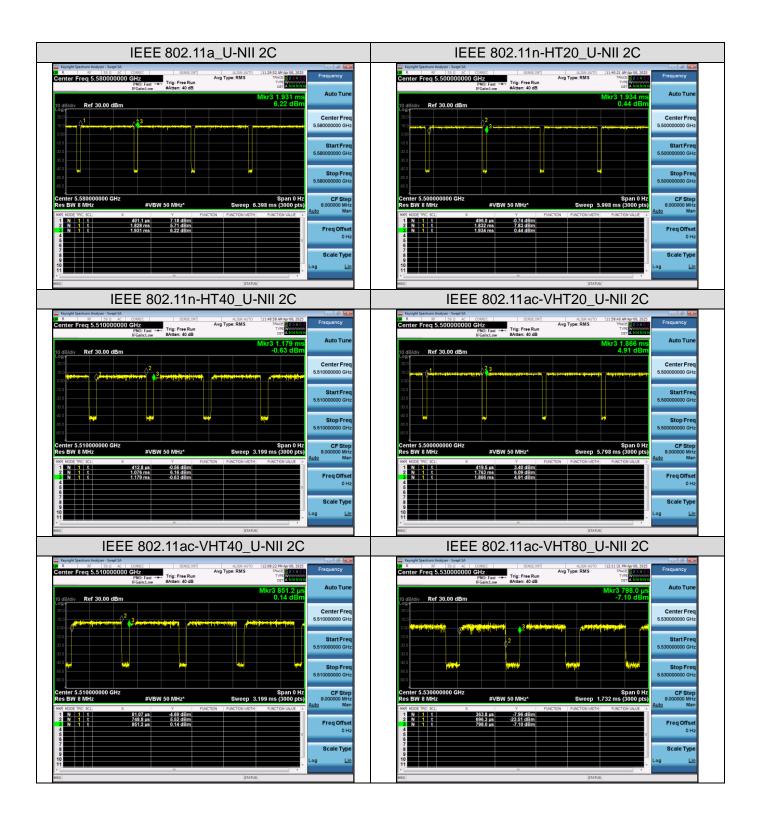





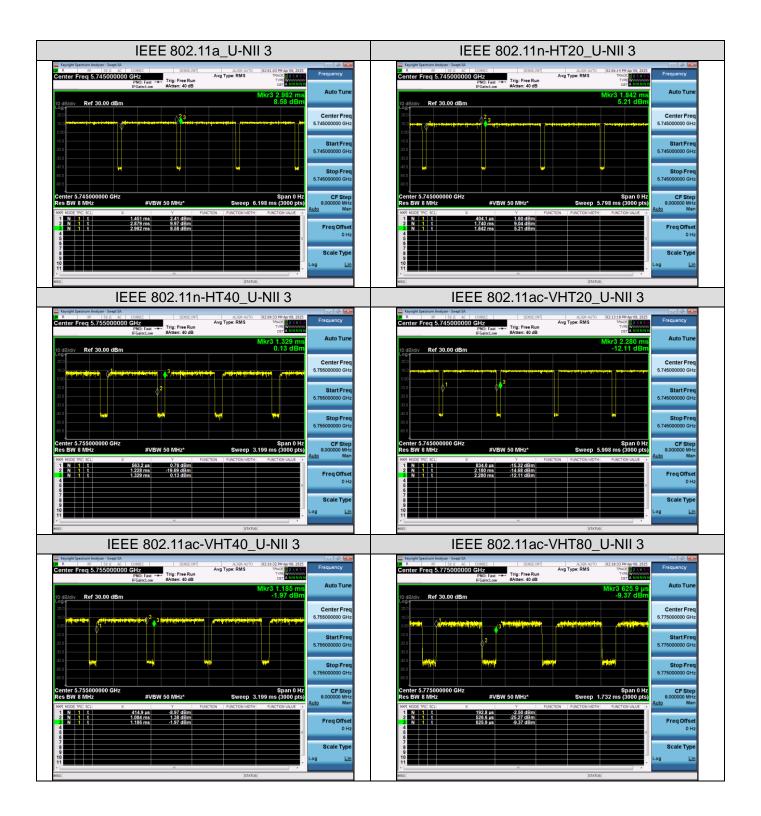





# 7. RF Output Power Measurement

#### 7.1 Provisions Applicable

Operation Band		EUT Category	LIMIT
U-NII-1		Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p < 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
J		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
	$\boxtimes$	Client devices	250mW (23.98 dBm)
U-NII-2A		/	250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-2C		/	250mW (23.98 dBm) or 11 dBm+10 log B*
U-NII-3		/	1 Watt (30 dBm)


Note: Where B is the 26dB emission bandwidth in MHz.

#### 7.2 Measurement Procedure

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 12.3.3.1
- Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- 8. Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. The final test results have been increased by the duty cycle factor and recorded in the report.

## 7.3 Measurement Setup (Block Diagram of Configuration)

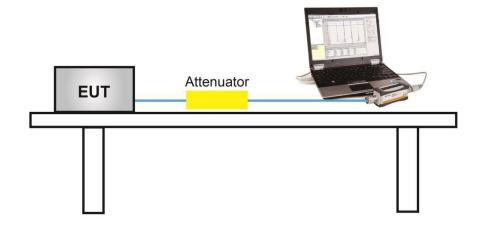




Page 32 of 213


#### 7.4 Measurement Result

Test Data of Conducted Output Power for band 5.15-5.25 GHz					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail	
	5180	13.46	23.98	Pass	
802.11a	5200	13.41	23.98	Pass	
	5240	13.56	23.98	Pass	
	5180	11.96	23.98	Pass	
802.11n20	5200	11.97	23.98	Pass	
	5240	12.15	23.98	Pass	
802.11n40	5190	12.00	23.98	Pass	
002.111140	5230	12.21	23.98	Pass	
	5180	11.89	23.98	Pass	
802.11ac20	5200	12.05	23.98	Pass	
	5240	12.03	23.98	Pass	
802.11ac40	5190	11.99	23.98	Pass	
602.11a040	5230	12.15	23.98	Pass	
802.11ac80	5210	11.22	23.98	Pass	






	Test Data of Conducted Output Power for band 5.25-5.35 GHz					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	5260	13.47	23.98	Pass		
802.11a	5300	13.42	23.98	Pass		
	5320	13.40	23.98	Pass		
	5260	12.10	23.98	Pass		
802.11n20	5300	11.89	23.98	Pass		
	5320	11.98	23.98	Pass		
000 11 = 10	5270	12.07	23.98	Pass		
802.11n40	5310	12.02	23.98	Pass		
	5260	12.11	23.98	Pass		
802.11ac20	5300	12.01	23.98	Pass		
	5320	11.98	23.98	Pass		
802.11ac40	5270	11.97	23.98	Pass		
002.11ac40	5310	12.05	23.98	Pass		
802.11ac80	5290	11.06	23.98	Pass		





	Test Data of Conducted Output Power for band 5.470-5.725 GHz					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	5500	11.23	23.98	Pass		
802.11a	5580	11.40	23.98	Pass		
	5700	10.98	23.98	Pass		
	5500	10.79	23.98	Pass		
802.11n20	5580	10.98	23.98	Pass		
	5700	10.60	23.98	Pass		
	5510	10.75	23.98	Pass		
802.11n40	5590	11.09	23.98	Pass		
	5670	10.79	23.98	Pass		
	5500	10.64	23.98	Pass		
802.11ac20	5580	10.94	23.98	Pass		
	5700	10.46	23.98	Pass		
	5510	10.93	23.98	Pass		
802.11ac40	5590	11.13	23.98	Pass		
	5670	10.84	23.98	Pass		
802.11ac80	5530	9.71	23.98	Pass		
002.118080	5610	9.83	23.98	Pass		





	Test Data of Conducted Output Power for band 5.725-5.850 GHz					
Test Mode	Test Channel (MHz)	Average Power (dBm)	Limits (dBm)	Pass or Fail		
	5745	13.32	30	Pass		
802.11a	5785	13.32	30	Pass		
	5825	13.18	30	Pass		
	5745	11.65	30	Pass		
802.11n20	5785	11.91	30	Pass		
	5825	11.69	30	Pass		
802.11n40	5755	11.91	30	Pass		
602.111140	5795	12.08	30	Pass		
	5745	11.71	30	Pass		
802.11ac20	5785	11.74	30	Pass		
	5825	11.61	30	Pass		
902 110040	5755	11.85	30	Pass		
802.11ac40	5795	11.93	30	Pass		
802.11ac80	5775	10.80	30	Pass		



Page 36 of 213

#### 8. 6dB&26dB Bandwidth Measurement

#### 8.1 Provisions Applicable

The minimum 6dB bandwidth shall be at least 500 kHz.

#### **8.2 Measurement Procedure**

#### ◆ -6dB bandwidth (DTS bandwidth) Test setting:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on operation frequency individually.
- 3. Set RBW = 100kHz.
- 4. Set the VBW  $\geq 3*RBW$ . Detector = Peak. Trace mode = max hold.
- 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.

#### ♦ 99% occupied bandwidth test setting:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

#### -26dB Bandwidth test setting:

- 1. Set RBW = approximately 1% of the emission bandwidth.
- 2. Set the VBW > RBW.
- 3. Detector = Peak.
- 4. Trace mode = max hold.
- 5. Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Note: The EUT was tested according to KDB 789033 for compliance to FCC 47CFR 15.407 requirements.

#### 8.3 Measurement Setup (Block Diagram of Configuration)

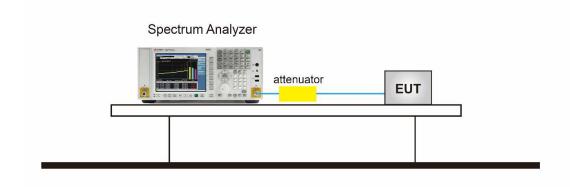




Report No.: AGC02762250302FR03

Page 37 of 213


## 8.4 Measurement Results

Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	5180	16.513	20.806	N/A	Pass
802.11a	5200	16.569	20.883	N/A	Pass
	5240	16.534	20.910	N/A	Pass
	5180	17.677	21.221	N/A	Pass
802.11n20	5200	17.657	21.175	N/A	Pass
	5240	17.674	21.496	N/A	Pass
802.11n40	5190	36.105	39.405	N/A	Pass
002.111140	5230	36.064	39.576	N/A	Pass
	5180	17.673	21.365	N/A	Pass
802.11ac20	5200	17.629	21.166	N/A	Pass
	5240	17.699	21.276	N/A	Pass
802.11ac40	5190	36.044	39.351	N/A	Pass
	5230	36.006	39.263	N/A	Pass
802.11ac80	5210	75.229	79.505	N/A	Pass






Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.25-5.35 GHz					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	5260	16.547	21.134	N/A	Pass
802.11a	5300	16.562	20.964	N/A	Pass
	5320	16.529	20.976	N/A	Pass
	5260	17.630	21.008	N/A	Pass
802.11n20	5300	17.638	21.156	N/A	Pass
	5320	17.672	21.135	N/A	Pass
802.11n40	5270	36.095	39.301	N/A	Pass
802.111140	5310	36.059	39.408	N/A	Pass
	5260	17.650	21.154	N/A	Pass
802.11ac20	5300	17.639	21.248	N/A	Pass
	5320	17.646	21.165	N/A	Pass
802.11ac40	5270	36.056	39.372	N/A	Pass
	5310	36.067	39.357	N/A	Pass
802.11ac80	5290	75.245	80.062	N/A	Pass






Test Data of Occupied Bandwidth and -26dB Bandwidth for band 5.47-5.725 GHz					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-26dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	5500	16.535	21.075	N/A	Pass
802.11a	5600	16.535	21.161	N/A	Pass
	5700	16.547	21.021	N/A	Pass
	5500	17.667	21.125	N/A	Pass
802.11n20	5600	17.633	21.206	N/A	Pass
	5700	17.692	21.309	N/A	Pass
	5510	36.091	39.401	N/A	Pass
802.11n40	5590	36.064	39.546	N/A	Pass
	5670	36.067	39.533	N/A	Pass
802.11ac20	5500	17.664	21.300	N/A	Pass
	5600	17.654	21.146	N/A	Pass
	5700	17.648	21.287	N/A	Pass
	5510	36.040	39.359	N/A	Pass
802.11ac40	5590	36.067	39.456	N/A	Pass
	5670	36.081	39.408	N/A	Pass
802.11ac80	5530	75.275	80.808	N/A	Pass
	5610	75.137	80.292	N/A	Pass







Test Data of Occupied Bandwidth and DTS Bandwidth for band 5.725-5.85 GHz					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	Limits (MHz)	Pass or Fail
	5745	16.565	16.273	0.5	Pass
802.11a	5785	16.586	16.059	0.5	Pass
	5825	16.542	16.270	0.5	Pass
802.11n20	5745	17.640	16.546	0.5	Pass
	5785	17.669	16.604	0.5	Pass
	5825	17.644	16.787	0.5	Pass
802.11n40	5755	36.043	35.159	0.5	Pass
	5795	36.092	35.441	0.5	Pass
802.11ac20	5745	17.639	15.987	0.5	Pass
	5785	17.643	16.275	0.5	Pass
	5825	17.670	15.353	0.5	Pass
802.11ac40	5755	36.084	35.295	0.5	Pass
	5795	36.063	35.267	0.5	Pass
802.11ac80	5775	75.271	75.331	0.5	Pass







## Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.15-5.25 GHz

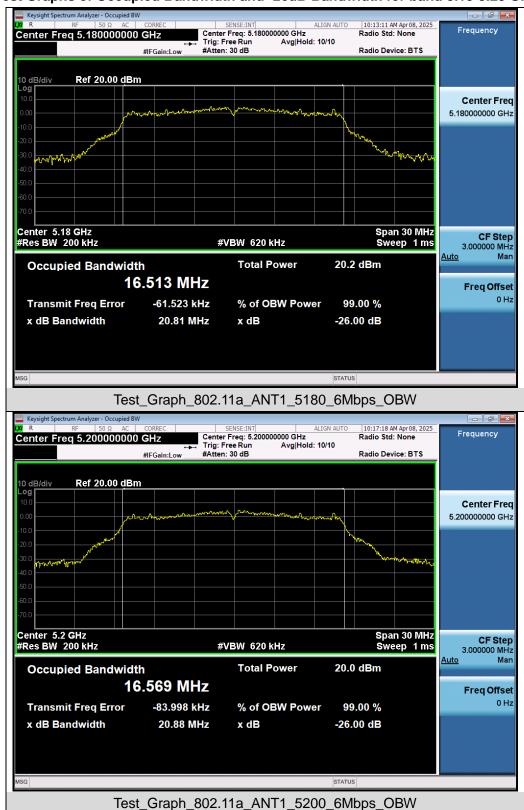







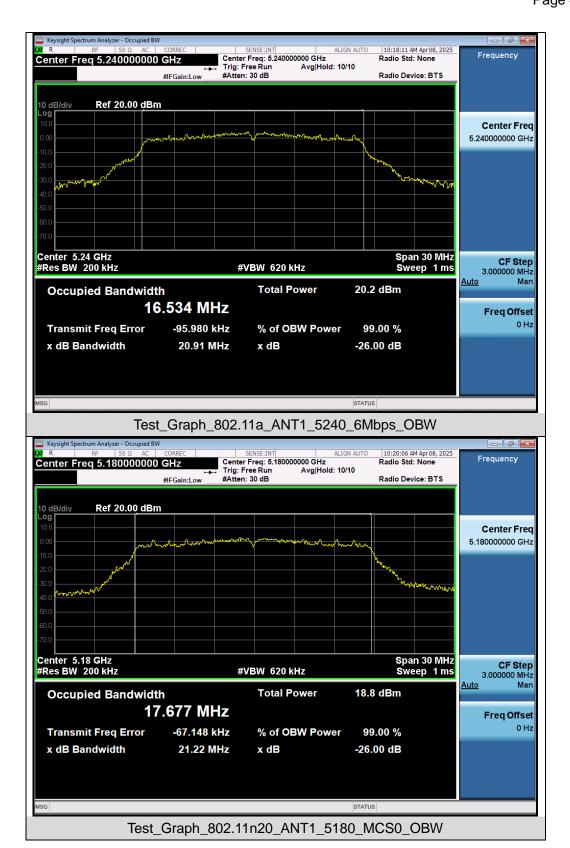







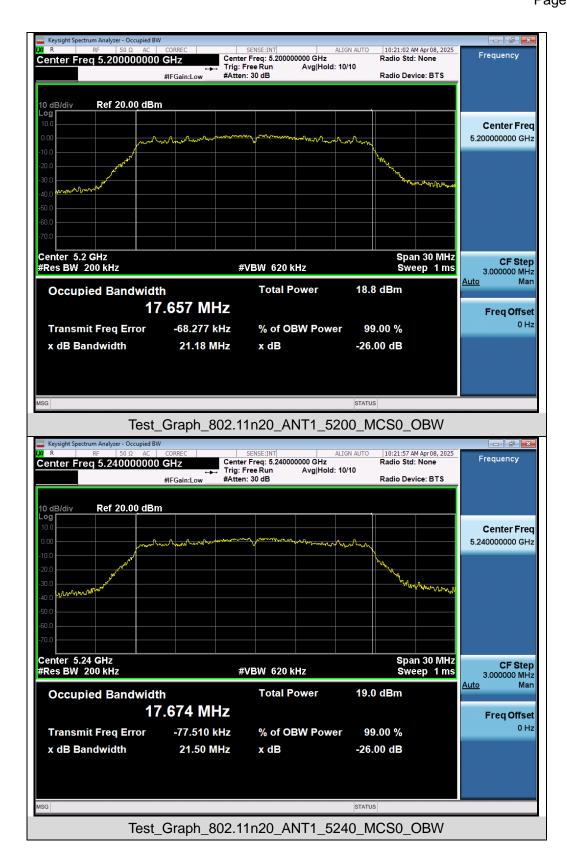







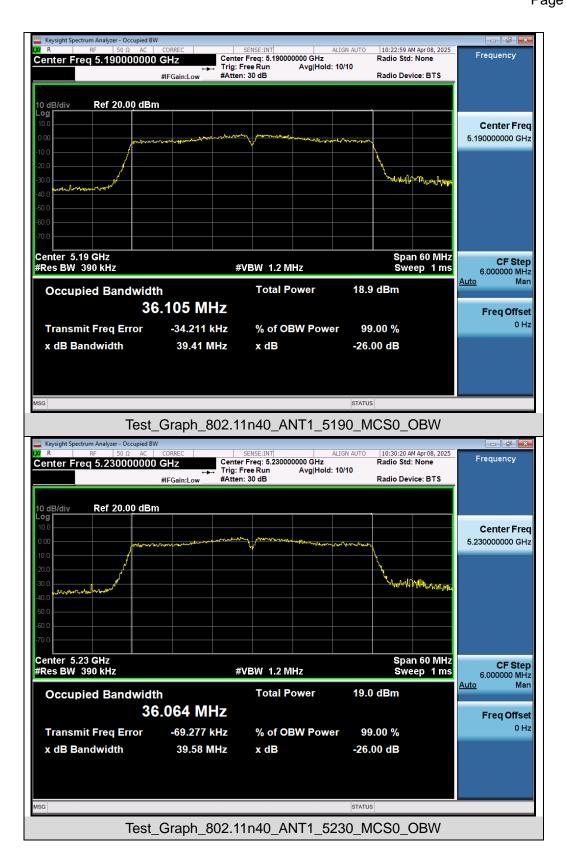







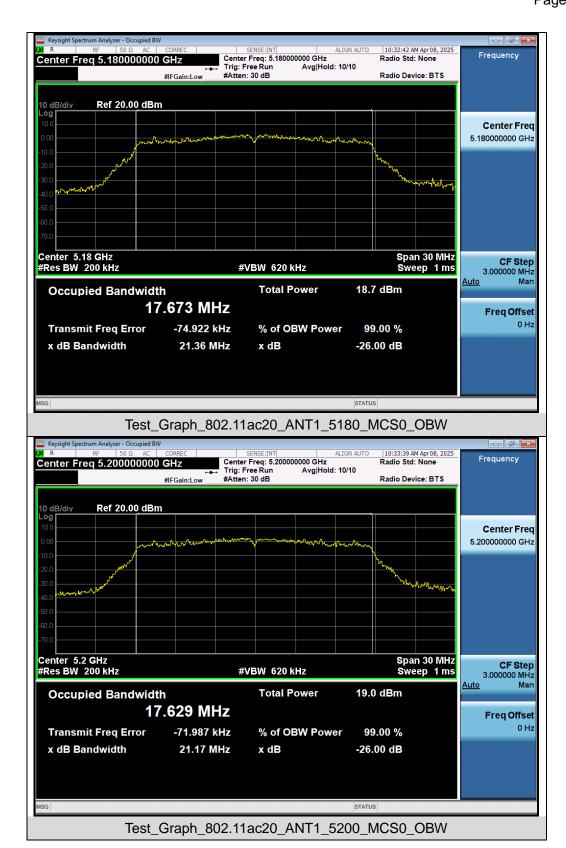







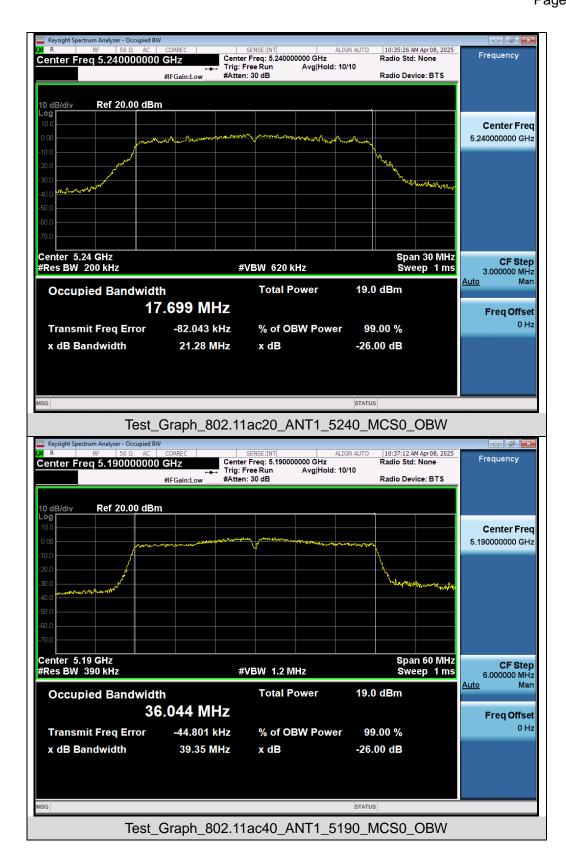





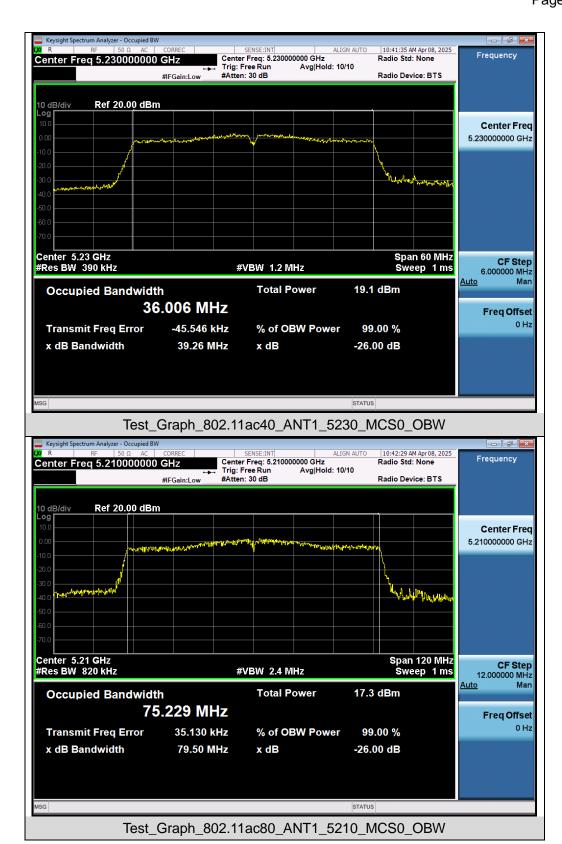







## Test Graphs of Occupied Bandwidth for band 5.25-5.35 GHz

















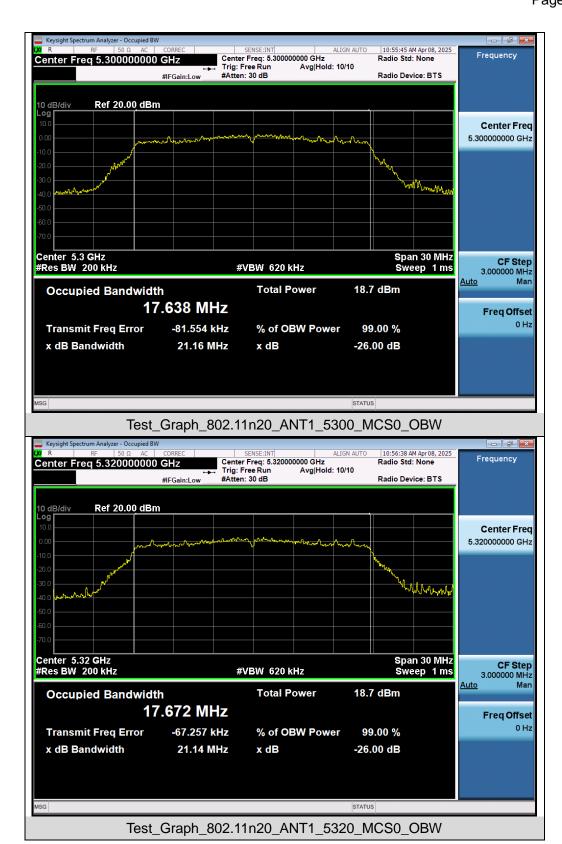







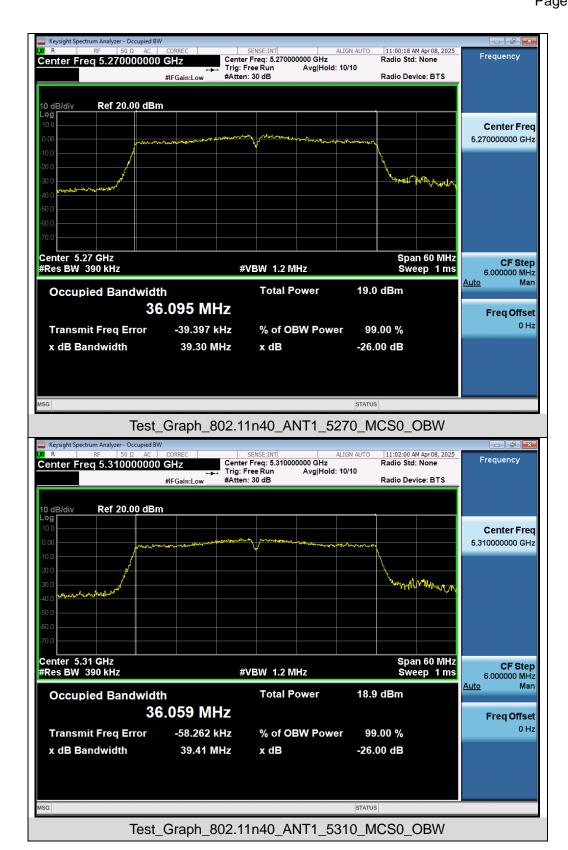







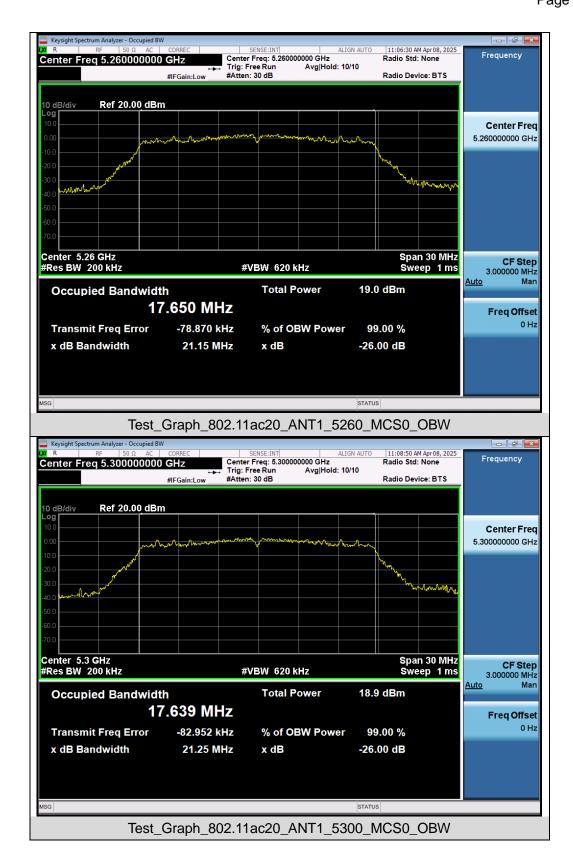







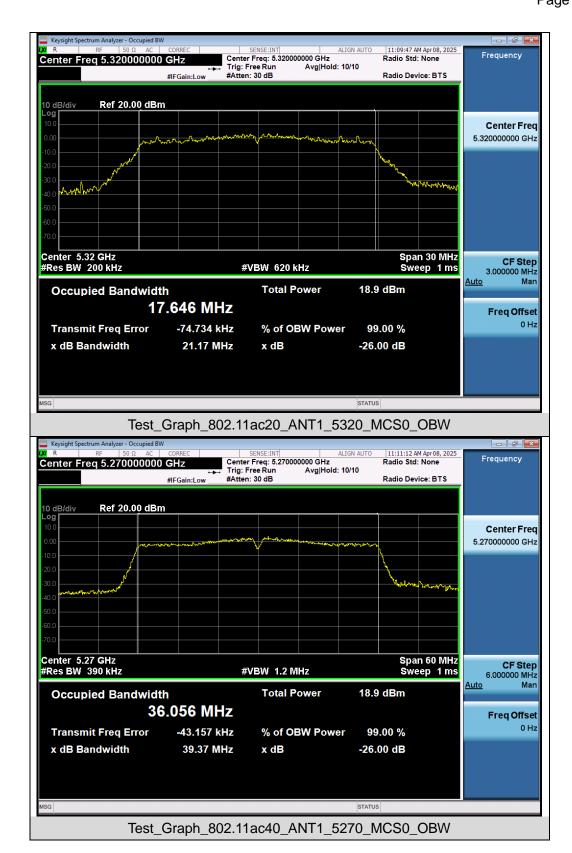





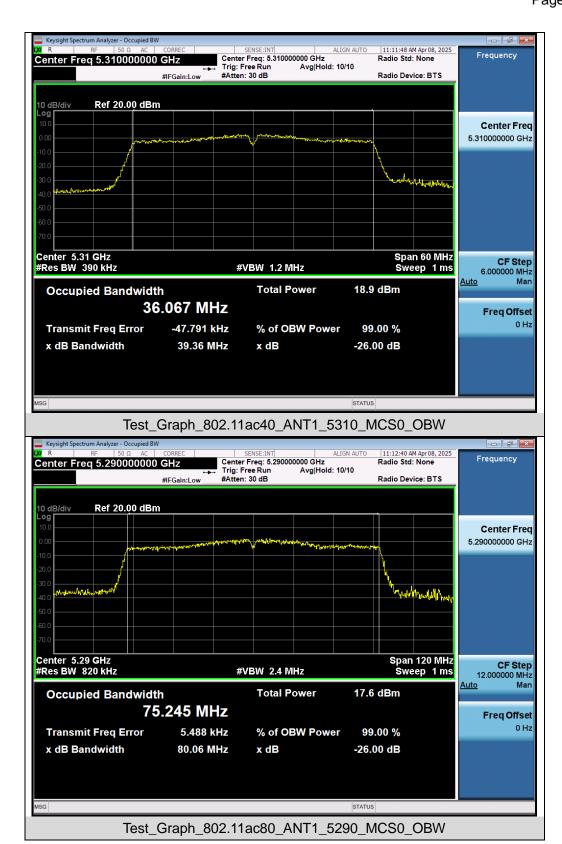





## Test Graphs of Occupied Bandwidth and -26dB Bandwidth for band 5.470-5.725 GHz

