

Test report

Number T251-0365/25

Project file: C20240277

Date: 2025-06-09

Pages: 9

Product: Rechargeable Li-Ion battery pack

Type reference: BP 18 Li 5,0 HP-ASI

Ratings: 18 V d.c.; 5,0 Ah
Class III

Trademark:



Applicant: Festool GmbH
Wertstrasse 20, 73240 Wendlingen, Germany

Manufacturer: Festool GmbH
Wertstrasse 20, 73240 Wendlingen, Germany

Place of manufacture: EMBS Sp. z o.o.
ul. Alberta Einsteina 36, 44-109 Gliwice, Poland

Summary of testing

Testing method: Antenna pattern measurements

Testing location: SIQ Ljubljana
Mašera-Spasičeva ulica 10, SI-1000 Ljubljana, Slovenia

Remarks: Date of receipt of test items: 2025-03-25
Number of items tested: 1
Date of performance of tests: 2025-04-09
The test results presented in this report relate only to the items tested.
The test items were tested in the condition as received.
The product complies with the requirements of the testing methods.

Tested by: Luka Cvajnar

Approved by: Marjan Mak

The report shall not be reproduced except in full.



CONTENTS		page
<u>1</u>	<u>GENERAL</u>	<u>3</u>
1.1	EQUIPMENT UNDER TEST	3
1.2	ANTENNA PATTERN MEASUREMENT	4
1.3	TEST RESULTS BLE ANTENNA	5
1.4	MAXIMUM BLE ANTENNA GAIN	8
<u>2</u>	<u>USED TEST EQUIPMENT</u>	<u>9</u>

1 GENERAL

History sheet			
Date	Report No.	Change	Revision
2025-06-09	T251-0365/25	Initial Test Report issued.	--

Environmental conditions:

Ambient temperature: 15 °C to 35 °C

Relative humidity: 30 % to 60 %

Atmospheric pressure: 860 mbar to 1060 mbar

1.1 Equipment under test

Rechargeable Li-Ion battery pack

Type: **BP 18 Li 5,0 HP-ASI**

Tested was antenna pattern of the sample S202501899.



Copy of marking plate

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBS that own these marks.



KR 배터리

www.festool.co.kr

XXXXXXXXXX

XXXXXXXXXXXXXXXXXXXX

제조공장: EMBS Sp. z o.o.

제조사: Festool GmbH

A/S : 02-6022-6740

Import UK: 波兰制造

Festool UK Ltd

1 Anglo Saxon Way

Bury St Edmunds

IP30 9XH GB

UK

CA

CAUTION

For use only with FESTOOL charger TCL, SCA.

ATTENTION

À utiliser seulement avec le chargeur FESTOOL TCL, SCA.

PRECAUCIÓN

Para uso solamente con el cargador FESTOOL TCL, SCA.

RECOGNIZED

MET

E115353

electrical safety

BP 18 Li 5,0 HP-ASI

FESTOOL

18 V ---

5,0 Ah

90 Wh

5INR19/66-2

Li-Ion

T-Nr. 10813628

S-Nr. 0002001x

Festool GmbH · Wertstr. 20

Made in 73240 Wendlingen · Germany Poland

www.festool.com · info@festool.com

FCC ID 2AL2E-BPLI2

YYYY-MM

CAN ICES-003 (B) / NMB-003 (B)

IC: 22501-BPLI2

CMIT ID: XXXXXXXXXXXX







1.2 Antenna pattern measurement

1.2.1 Test procedure

The radiation pattern for BLE antenna implemented to PCB reference design has been measured in an anechoic chamber with 3 meters test distance. Test results show radiation patterns for two planes, measured with vertical and horizontal polarization of measuring antenna. All measurements were performed at 2402, 2440 and 2480 MHz frequency.

1.3 Test results BLE Antenna

EUT Information

EUT:

BP 18 Li 5,0


Operating Mode:

TX 2402 MHz


AziChart MinMax Eval

Frequency (MHz)	Max. Value (dBm)	Azimuth max. (deg)	Pol max.	Min. Value (dBm)	Azimuth min. (deg)	Pol min.
2402.000000	-10.57	264	V	-37.37	284	H

Azimuth Chart: Horizontal

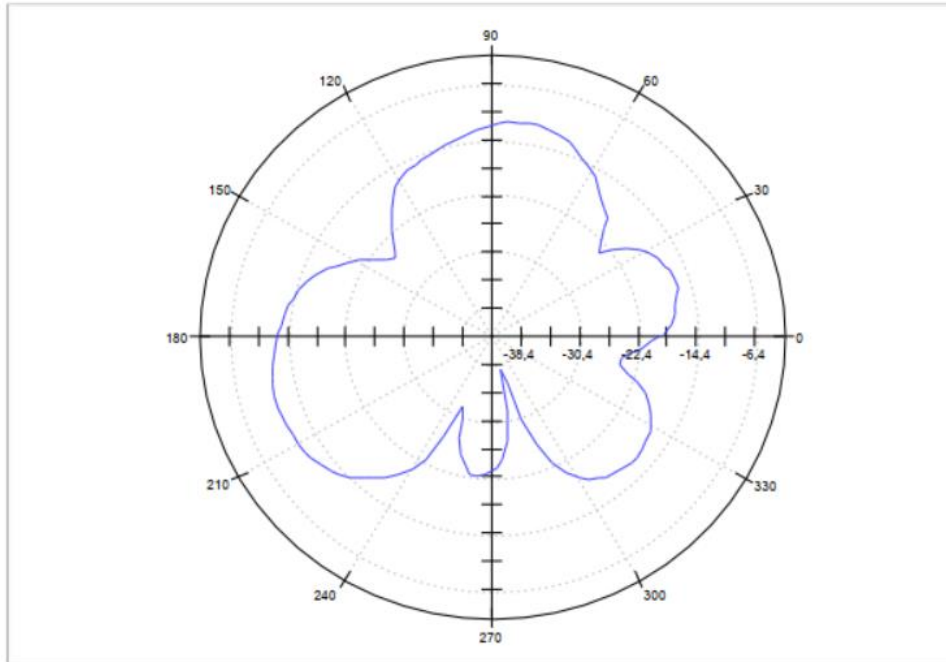

Azimuth Chart: Vertical

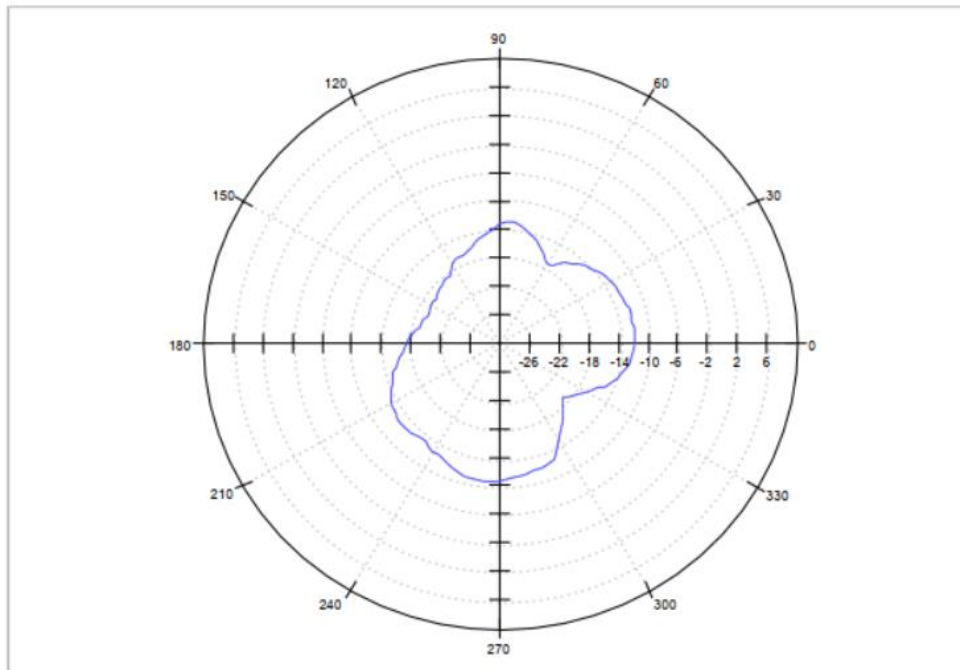




EUT Information

EUT: BP 18 Li 5,0
Operating Mode: TX 2440 MHz


AziChart MinMax Eval

Frequency (MHz)	Max. Value (dBm)	Azimuth max. (deg)	Pol max.	Min. Value (dBm)	Azimuth min. (deg)	Pol min.
2440.000000	-9,53	4	V	-30,32	267	H

Azimuth Chart: Horizontal

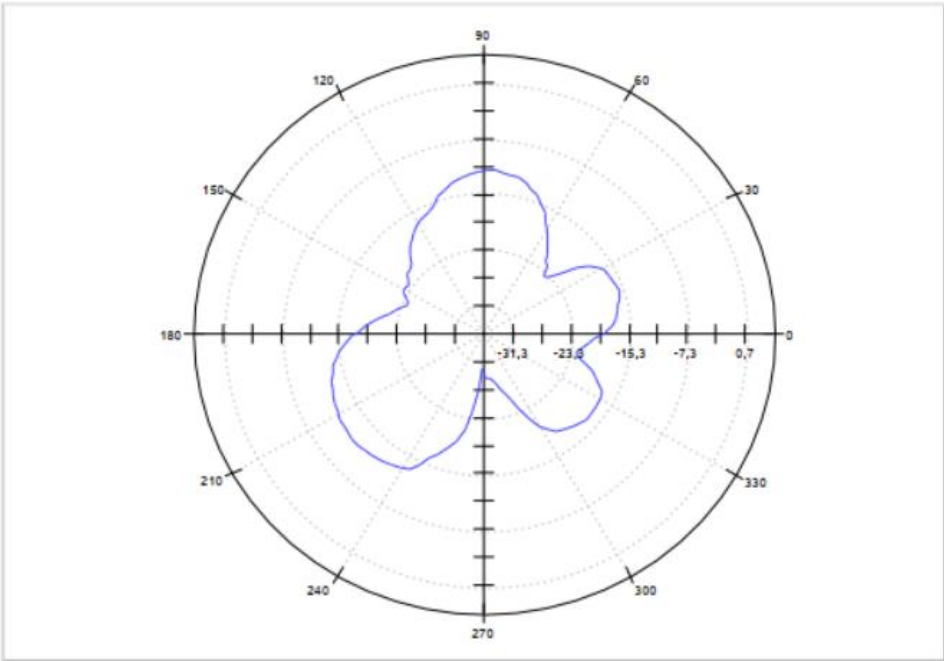

Azimuth Chart: Vertical

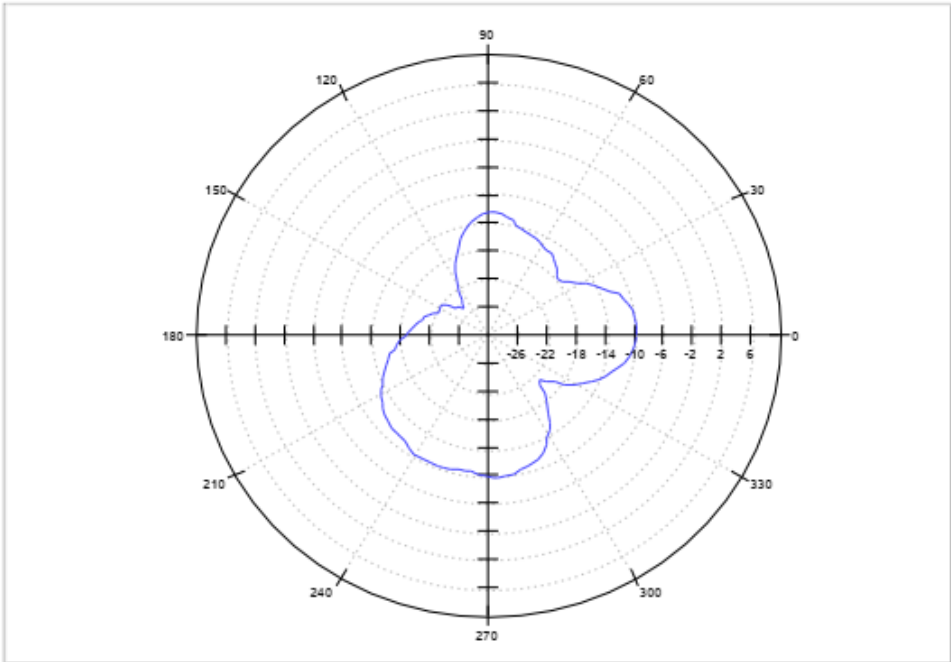

EUT Information


EUT:
Operating Mode:

BP 18 Li 5,0
TX 2480 MHz


AziChart MinMax Eval

Frequency (MHz)	Max. Value (dBm)	Azimuth max. (deg)	Pol max.	Min. Value (dBm)	Azimuth min. (deg)	Pol min.
2480.000000	-9.54	244	V	-37.07	281	H

Azimuth Chart: Horizontal

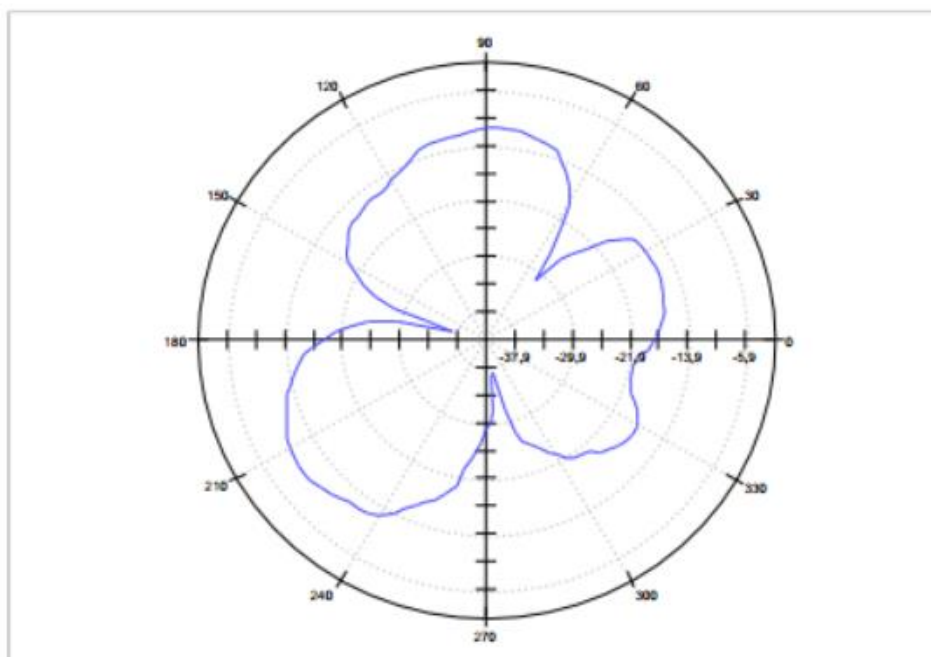

Azimuth Chart: Vertical

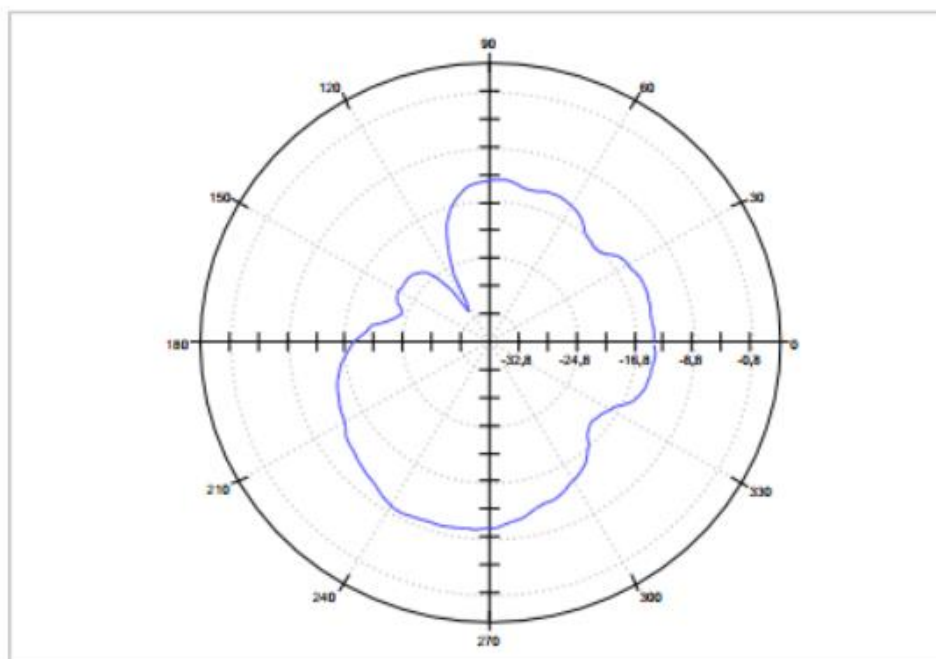



1.4 Maximum BLE antenna gain

DUT Frequency (MHz)	Maximum antenna gain (dBi)
2402.000000	-10.57
2440.000000	-9.53
2480.000000	-9.54

2 USED TEST EQUIPMENT

Antenna pattern measurement

Manufacturer	Model No.	Used	Calibrated	Calibrated until
Comtest engineering, SAC2 (together with controlling equipment)	SAC 3m	X	2025-03-27	2028-03-27
Maturo, Turn table (2 m diameter)	TT 2.0 SI	X	/	/
Maturo, Bore-sight antenna mast	BAM-4.0-P	X	/	/
Maturo, positioning equipment	NCD	X	/	/
Rohde & Schwarz, RFI receiver	ESW 44	X	2024-09-26	2026-03-26
R&S, Ultra Broadband Antenna	HL562E		2023-09-26	2026-09-26
R&S, Horn Antenna	HF907	X	2023-08-22	2026-08-22

-----END OF TEST REPORT-----