

# **FCC Test Report**

FCC Rule(s): FCC Part 15.247

Applicant: Shenzhen Newisland Electronic Commerce Co., Ltd

Product Name: Portable Waterproof Bluetooth Speaker

Model: OMAKER-Nature

FCC ID: <u>2AL2J-OMAKER-NATURE</u>

**Report No.:** <u>ZKS170400174E</u>

**Tested Date:** 2017-04-21 to 2017-05-10

**Issued Date**: <u>2017-05-15</u>

Tested By: William Liu (Engineer)

Approved By: <u>Lahm Peng (Manager)</u>

Prepared By:

Shenzhen ZRLK Testing Technology Co., Ltd.

6F, Fuxinfa Industrial Park, Liuxiandong, Xili Street, Nanshan District, Shenzhen, China

Tel.: +86-755-33019599 Fax.: +86-755-33019599 Website: www.zrlklab.com

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen ZRLK Testing Technology Co., Ltd.

FCC Test Report Page 1 of 44



# **CONTENTS**

1. General Information	
1.1 Product Information	
1.2 Compliance Standards	4
1.3 Test Facilities	
1.4 Test Setup Information	
1.5 Measurement Uncertainty	
1.6 List of Test and Measurement Instruments	
2. Summary of Test Results	
3. Antenna Requirement	
3.1 Standard and Limit	8
3.2 Test Result	
4. Frequency Hopping System Requirements	9
4.1 Standard and Limit	
4.2 Frequency Hopping System	9
4.3 EUT Pseudorandom Frequency Hopping Sequence	
5. Quantity of Hopping Channels and Channel Separation	
5.1 Standard and Limit	
5.2 Test Procedure	
5.3 Test Data and Results	
6. Dwell Time of Hopping Channel	
6.1 Standard and Limit	
6.2 Test Procedure	
6.3 Test Data and Results	
7. 20dB Bandwidth	
7.1 Standard and Limit	
7.2 Test Procedure	
7.3 Test Data and Results	
8. RF Output Power	
8.1 Standard and Limit	
8.2 Test Procedure	
8.3 Test Data and Results	
9. Field Strength of Spurious Emissions	
9.1 Standard and Limit	
9.2 Test Procedure	
10. Out of Band Emissions	
10.1 Standard and Limit	
10.3 Test Data and Results	
11. Conducted Emissions.	
11.1 Standard and Limit	
11.3 Test Data and Results	
Annex A. EUT External Photos	
Annex B. EUT Internal Photos	
Annex C. Test Photos	
Annex D. Label and Information	
AIIIIEA D. LADEI AIIU IIIIVI IIIAUVII	



# 1. General Information

# 1.1 Product Information

Applicant and Manufacturer	
Applicant:	Shenzhen Newisland Electronic Commerce Co., Ltd
Address of Applicant:	2/ F, Building No. 11 Longjun Industrial Area, Longhua District,
	Shenzhen, Guangdong
Manufacturer:	Shenzhen Newisland Electronic Commerce Co., Ltd
Address of Manufacturer:	2/ F, Building No. 11 Longjun Industrial Area, Longhua District,
	Shenzhen, Guangdong

General Description of EUT			
Product Name:	Portable Waterproof Bluetooth Speaker		
Model No.:	OMAKER-Nature		
Trade Name:			
Adding Model(s):			
Class of Equipment:	DSS		
Rated Voltage:	DC 3.7V by battery		
Hardware Version:	ATS2823_M4P_V1.2_170502		
Software Version:	V1.03		
Frequency Range:	2402-2480MHz		
Bluetooth Version:	V4.2 (BR+EDR)		
Modulation:	GFSK, Pi/4 DQPSK, 8DPSK		
Type of Antenna:	PCB Antenna		
Antenna Gain:	0.5dBi		
Type of Antenna: Antenna Gain:	PCB Antenna		

FCC Test Report Page 3 of 44



## 1.2 Compliance Standards

Compliance Standards or Rules			
ECC Dout 15 Culmont C	FEDERAL COMMUNICATIONS COMMISSION, RADIO FREQUENCY		
FCC Part 15 Subpart C	DEVICES, Intentional Radiators		
FCC Part 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850		
FCC Part 13.247	MHz.		
The objective of the manufacturer or applicant is to demonstrate compliance with the above standards.			
According to standards for test methodology			
ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices		
ANSI C63.10-2013  Accredited Standards Committee C63®—Electromagnetic Compatibility			
All measurements contained in this report were conducted with all above standards			
Maintenance of compliance is the responsibility of the manufacturer or applicant. Any modification of the			
product, which result is lowering the emission, should be checked to ensure compliance has been maintained.			

#### 1.3 Test Facilities

## Testing Lab: Global United Technology Services Co., Ltd.

The laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is **L5775**.

The laboratory has been listed by US Federal Communications Commission to perform electromagnetic emission measurements. The recognition numbers of test site are **600491**.

The laboratory has been listed by Industry Canada to perform electromagnetic emission measurements. The recognition numbers of test site are 9079A-2.

All measurement facilities used to collect the measurement data are located at No.301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

FCC Test Report Page 4 of 44



# 1.4 Test Setup Information

List of Test Modes					
Test Mode	Test Mode Description Remark				
TM1	Low Channel	2402	MHz		
TM2	Middle Channel	2441	MHz		
TM3	High Channel 2480MHz				
TM4	Hopping 2402-2480MHz				
TM5	Charging and Playing	Through USB Charging			
List and Details of Auxilian	y Equipment				
Description	Description Manufacturer Model Serial Number				
AC Adapter	GTS A31-501000				
Notebook	Lenovo	G405S		Lenovo G405S	
Conversion Board	IVT Serial-USB				

Note 1: The equipment under test (EUT) was configured to measure its highest possible emission level.

Note 2: The test modes were adapted according to the operation manual for use.

Note 3: The equipment under test (EUT) was tested under fully-charged battery.

Modulation Configure					
Modulation	Packet Packet Type Packet		Packet Size		
	DH1	4	27		
GFSK	DH3	11	183		
	DH5	15	339		
	2DH1	20	54		
Pi/4 DQPSK	2DH3	26	367		
	2DH5	30	379		
	3DH1	24	83		
8DPSK	3DH3	27	552		
	3DH5	31	1021		

Note 1: The Bluetooth has been tested on the modulation of GFSK, (Pi/4)DQPSK and 8DPSK, compliance test and record the worst case.

Note 2: The Bluetooth has been tested under continuous transmission mode.

Note 3: The Bluetooth is connected to notebook through a serial to USB conversion board, and to use a test set software to control the Bluetooth device work in different modes, e.g. GFSK, Pi/4 DQPSK, 8DPSK etc.

FCC Test Report Page 5 of 44



# 1.5 Measurement Uncertainty

Parameter	Conditions	Uncertainty
Conducted Emissions	9kHz~30MHz	±2.79 dB
Radiated Emissions	$9kHz \sim 30MHz$	$\pm 4.12~\mathrm{dB}$
	$30 MHz \sim 1 GHz$	$\pm 4.16\mathrm{dB}$
	1GHz ~ 18GHz	$\pm 5.97 ext{dB}$
	18GHz ~ 26.5GHz	±6.71dB

# 1.6 List of Test and Measurement Instruments

Description	Manufacturer	Model	Cal. Date	Due. Date
EMI Test Receiver	R&S	ESCI 7	June. 29 2016	June. 28 2017
Coaxial Switch	ANRITSU CORP	MP59B	June. 29 2016	June. 28 2017
Artificial Mains Network	SCHWARZBECK	NSLK8127	June. 29 2016	June. 28 2017
ESU EMI Test Receiver	R&S	ESU26	June. 29 2016	June. 28 2017
BiConiLog Antenna	SCHWARZBECK	VULB9163	June. 29 2016	June. 28 2017
Double-ridged horn antenna	SCHWARZBECK	9120D	June. 29 2016	June. 28 2017
Horn Antenna	ETS-LINDGREN	3160-09	June. 29 2016	June. 28 2017
Loop Antenna	SCHWARZBECK	FMZB 1519	June. 29 2016	June. 28 2017
RF Amplifier	HP	8347A	June. 29 2016	June. 28 2017
Broadband Preamplifier	SCHWARZBECK	BBV9718	June. 29 2016	June. 28 2017
EMI Test Software	AUDIX	E3	N/A	N/A
Coaxial Cable	GTS	9kHz-1GHz	June. 29 2016	June. 28 2017
Coaxial Cable	GTS	1GHz-18GHz	June. 29 2016	June. 28 2017
Coaxial Cable	GTS	18GHz-40GHz	June. 29 2016	June. 28 2017
Spectrum Analyzer	Agilent	E4407B	July. 20 2016	July. 19 2017
Temporary Antenna Connector	ZRLK	SMA-01	July. 20 2016	July. 19 2017

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

FCC Test Report Page 6 of 44



# 2. Summary of Test Results

FCC Rules	Description of Test Items	Result
FCC Part 2.1093	RF Exposure	Passed
FCC Part 15.203, FCC Part 15.247(b)(4)(i)	Antenna Requirement	Passed
FCC Part 15.205	Restricted Band of Operation	Passed
FCC Part 15.207(a)	Conducted Emission	Passed
FCC Part 15.209(a)	Radiated Spurious Emissions	Passed
FCC Part 15.247(a)(1)(iii)	Quantity of Hopping Channel	Passed
FCC Part 15.247(a)(1)	Channel Separation	Passed
FCC Part 15.247(a)(1)(iii)	Time of Occupancy (Dwell time)	Passed
FCC Part 15.247(a)	20dB Bandwidth	Passed
FCC Part 15.247(b)(1)	RF Power Output	Passed
FCC Part 15.247(d)	Band Edge (Out of Band Emissions)	Passed
FCC Part 15.247(a)(1)	Frequency Hopping Sequence	Passed
FCC Part 15.247(g), (h)	Frequency Hopping System	Passed

Passed: The EUT complies with the essential requirements in the standard

Failed: The EUT does not comply with the essential requirements in the standard

N/A: Not applicable

FCC Test Report Page 7 of 44



# 3. Antenna Requirement

## 3.1 Standard and Limit

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

## 3.2 Test Result

This product has a permanent antenna (PCB antenna), fulfill the requirement of this section.

FCC Test Report Page 8 of 44



# 4. Frequency Hopping System Requirements

#### 4.1 Standard and Limit

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

- (g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.
- (h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

#### 4.2 Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

FCC Test Report Page 9 of 44



This device was tested with a bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements FCC Part 15.247 rule.

## 4.3 EUT Pseudorandom Frequency Hopping Sequence

Pseudorandom Frequency Hopping Sequence Table as below:

Channel: 08, 24, 40, 56, 34, 51, 72, 09, 01, 64, 22, 33, 41, 32, 47, 65, 73, 53, 69, 06, 17, 04, 20, 36, 52, 38, 66, 70, 78, 68, 76, 21, 29, 10, 26, 49, 00, 58, 44, 59, 75, 13, 03, 14, 11, 35, 43, 37, 50, 61, 77, 55, 71, 02, 23, 07, 27, 39, 54, 46, 48, 15, 63, 62, 67, 25, 31, 12, 28, 19, 60, 42, 57, 74, 16, 05, 18, 30, 45, etc.

The system receiving have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

FCC Test Report Page 10 of 44



# 5. Quantity of Hopping Channels and Channel Separation

#### 5.1 Standard and Limit

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

## **5.2 Test Procedure**

According to the ANSI C63.10, the number of hopping frequencies test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = the frequency band of operation (2400MHz to 2483.5MHz)

RBW = 100kHz, VBW = 100kHz

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize, observed the band of 2400MHz to 2483.5MHz, than count it out the number of channels for comparing with the FCC rules.

The channel spacing test method as follows:

Set span = wide enough to capture the peaks of two adjacent channels


Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span

Video (or Average) Bandwidth (VBW) ≥ RBW

Sweep = auto; Detector function = peak; Trace = max hold


Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

#### 5.3 Test Data and Results

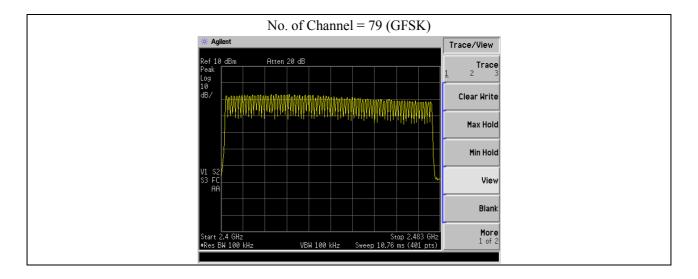

FCC Test Report Page 11 of 44



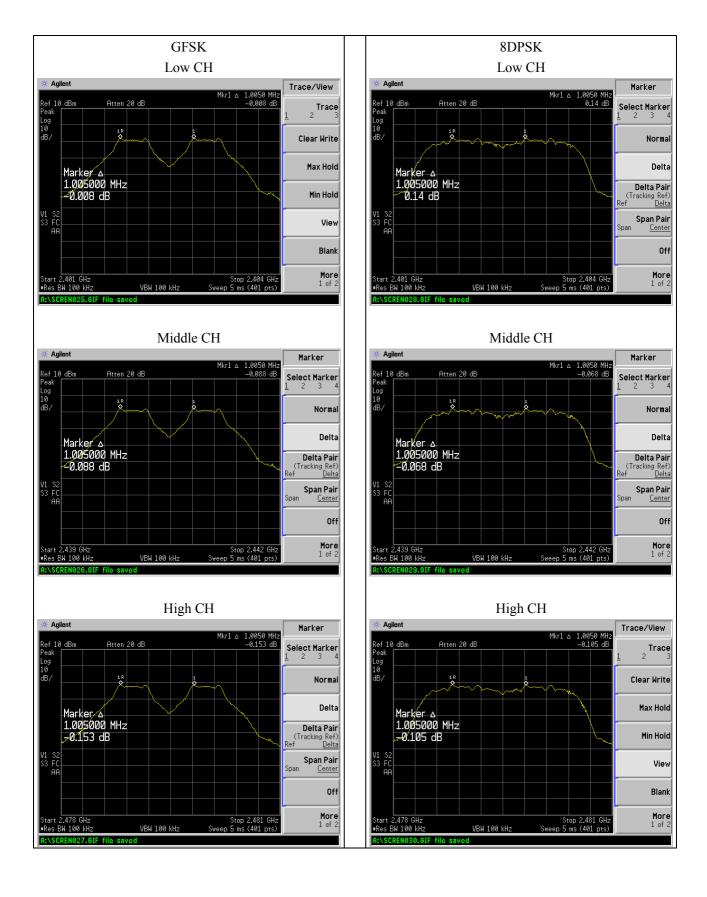

FCC Test Report Page 12 of 44



# 6. Dwell Time of Hopping Channel

#### 6.1 Standard and Limit

According to 15.247(a)(1)(iii), Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### **6.2 Test Procedure**

According to the ANSI C63.10, the dwell time of a hopping channel test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW ≥ RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

Use the marker-delta function to determine the dwell time

## 6.3 Test Data and Results

The dwell time within a period in data mode is independent from the packet type (packet length). Test data is corrected with the worse case, which the packet length is DH1, DH3, and DH5.

The test period: T = 0.4 Second \* 79 Channel = 31.6 s

Dwell time = time slot length \* (Hopping rate / Number of hopping channels) \* Period

FCC Test Report Page 13 of 44




Modulation	Test Channel	Packet	Time Slot Length	Dwell Time	Limit
Wiodulation Test Channe	Test Channel	Packet	ms	ms	ms
		DH1	0.3750	120.00	400
	2402MHz	DH3	1.6375	262.00	400
		DH5	2.8875	308.00	400
		DH1	0.3750	120.00	400
GFSK	2441MHz	DH3	1.6250	260.00	400
		DH5	2.8875	308.00	400
		DH1	0.3750	120.00	400
	2480MHz	DH3	1.6375	262.00	400
		DH5	2.8875	308.00	400
	3DH1	0.3875	124.00	400	
	2402MHz	3DH3	1.6375	262.00	400
		3DH5	2.8875	308.00	400
		3DH1	0.3750	120.00	400
8DPSK	2441MHz	3DH3	1.6375	262.00	400
		3DH5	2.8875	308.00	400
	2480MHz	3DH1	0.3875	124.00	400
		3DH3	1.6375	262.00	400
		3DH5	2.8875	308.00	400

Please refer to the test plots as below:


FCC Test Report Page 14 of 44



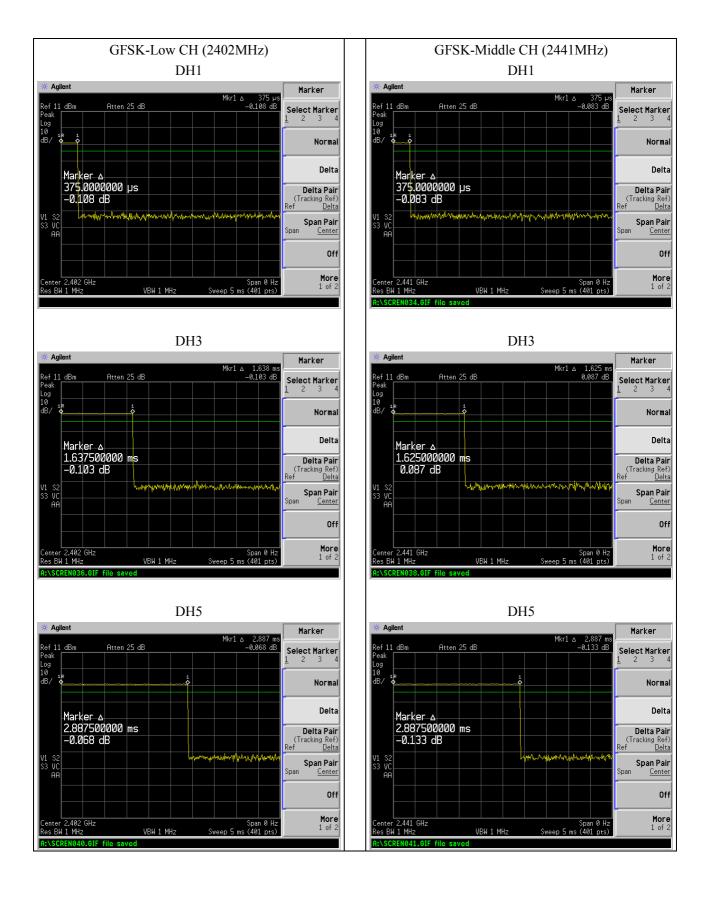


FCC Test Report Page 15 of 44



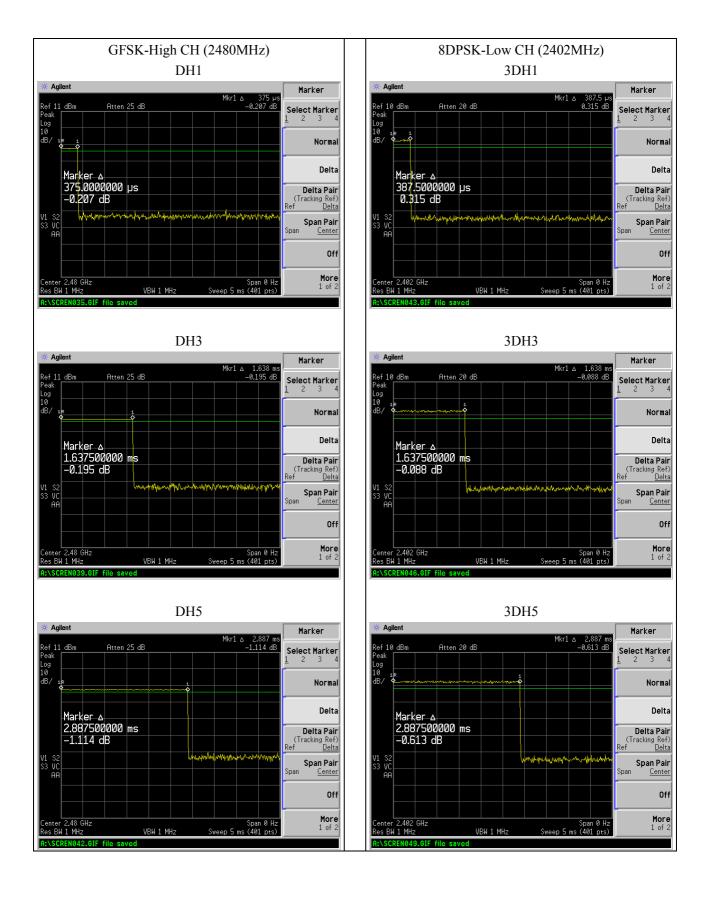

FCC Test Report Page 16 of 44



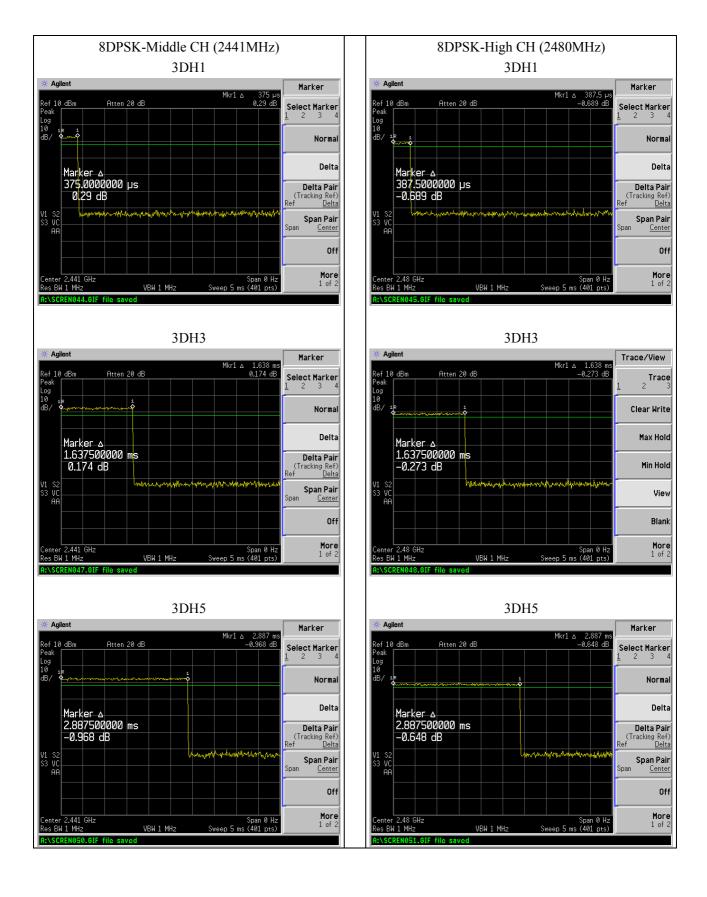

FCC Test Report Page 17 of 44



## 7. 20dB Bandwidth

#### 7.1 Standard and Limit

According to 15.247(a) (1) (iii). For frequency hopping systems operating in the 2400~2483.5 MHz, no limit for 20dB bandwidth.

#### 7.2 Test Procedure

According to the ANSI C63.10, the 20dB bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW  $\geq$  1% of the 20 dB bandwidth

VBW ≥ RBW

Sweep = auto; Detector function = peak

Trace = max hold


All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down bandwidth of the emission.

#### 7.3 Test Data and Results

Test Mode	Test Channel	20 dB Bandwidth	99% Bandwidth
	MHz	kHz	kHz
	2402	1043	914.1010
GFSK	2441	1044	914.6477
	2480	1043	914.9820
	2402	1350	1192.8
Pi/4 DQPSK	2441	1352	1193.9
	2480	1349	1192.0
	2402	1380	1232.1
8DPSK	2441	1377	1233.1
	2480	1378	1233.1


FCC Test Report Page 18 of 44



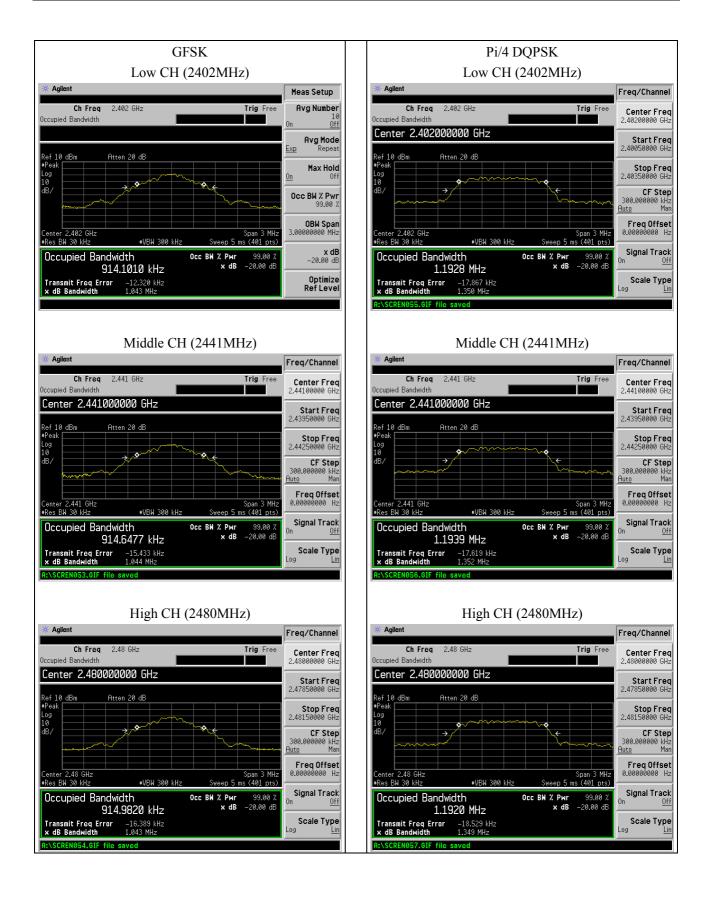

FCC Test Report Page 19 of 44



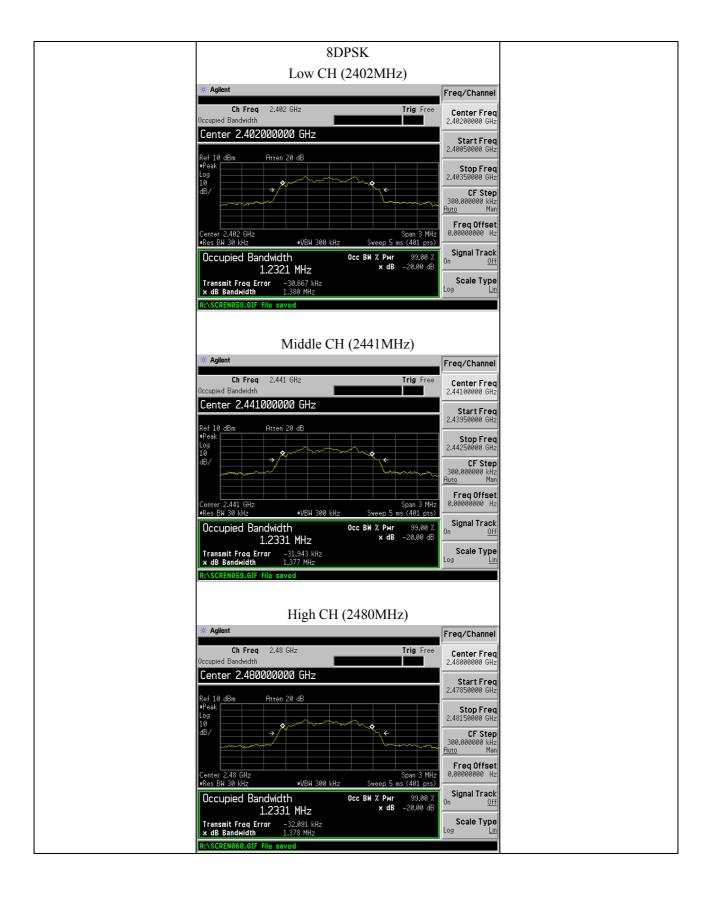

FCC Test Report Page 20 of 44



# 8. RF Output Power

#### 8.1 Standard and Limit

According to 15.247(b)(1). For frequency hopping systems operating in the 2400~2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725~5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400~2483.5 MHz band: 0.125 watts.

#### **8.2 Test Procedure**

According to the ANSI C63.10, the peak output power test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

 $VBW \ge RBW$ 

Sweep = auto

Detector function = peak

Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, the indicated level is the peak output power (the external attenuation and cable loss shall be considered).

#### 8.3 Test Data and Results

Channel	Frequency	Measured Value	Output Power	Limit			
Channel	MHz	dBm	mW	mW			
		GFSK					
Low Channel	2402	-3.115	0.488	125			
Middle Channel	2441	-3.505	0.446	125			
High Channel	2480	-7.037	0.198	125			
	Pi/4 DQPSK						
Low Channel	2402	-1.964	0.636	125			
Middle Channel	2441	-2.174	0.606	125			
High Channel	2480	-5.744	0.266	125			
		8DPSK					
Low Channel	2402	-1.697	0.677	125			
Middle Channel	2441	-1.965	0.636	125			
High Channel	2480	-5.470	0.284	125			

Note: the antenna gain of 0.5dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.

FCC Test Report Page 21 of 44



# 9. Field Strength of Spurious Emissions

#### 9.1 Standard and Limit

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious radiated emissions measurements starting below or at the lowest crystal frequency.

The general limits in FCC Part 15.209

	The general mines in 1 CC 1 are 13.203		
Frequency of Emission (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	
	QP	QP	AV
30-88	100	40	
88-216	150	43.5	
216-960	200	46	
Above 960	500	54	74
Limits at a measurement distance of 3	3 m		

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious radiated emissions measurements starting below or at the lowest crystal frequency.


Compliance with the provisions of §15.205 shall be demonstrated using the measurement instrumentation specified in that section.

#### 9.2 Test Procedure


The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

FCC Test Report Page 22 of 44



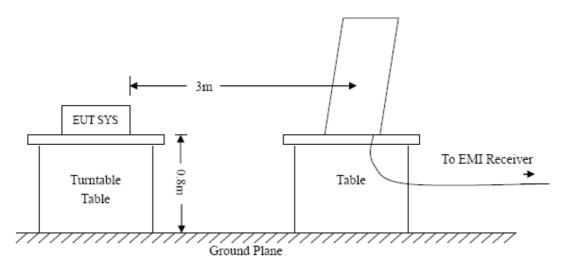


Test Setup Block Diagram below 30MHz

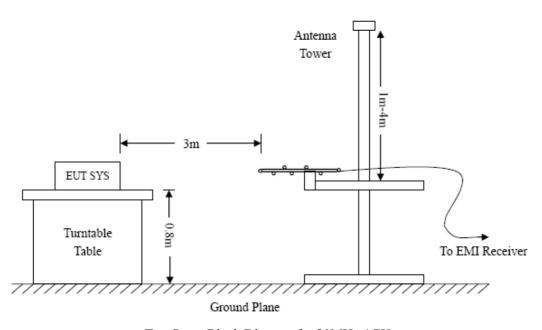

Test Setup Block Diagram for 30MHz-1GHz

FCC Test Report Page 23 of 44



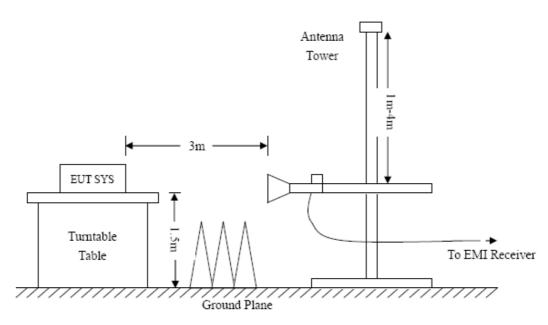

Test Setup Block Diagram above 1GHz

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Frequency: 9kHz-30MHz	Frequency: 30MHz-1GHz	Frequency: Above 1GHz
RBW=10KHz.	RBW=120KHz.	RBW=1MHz.

VBW=30KHz VBW=300KHz VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto Sweep time= Auto Sweep time= Auto Trace =  $\max$  hold Trace =  $\max$  hold Trace =  $\max$  hold

Detector function = peak, QP Detector function = peak, AV

#### 9.3 Test Data and Results

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst case:


Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

FCC Test Report Page 24 of 44



Worst case 8DPSK mode (TM1)


Test Plots and Data of Radiated Emissions (30MHz to 1GHz)	
Tested Model:	OMAKER-Nature
Tested Mode:	TM1
Test Power Specification:	DC 3.7V
Test Antenna Polarization:	Horizontal

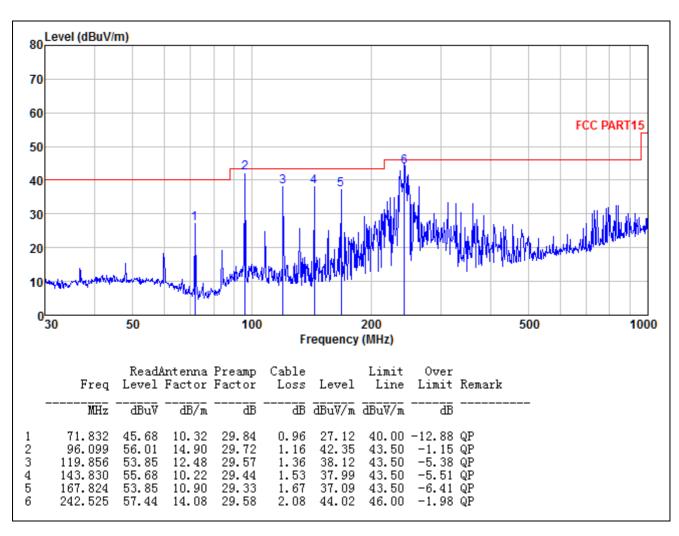

FCC Test Report Page 25 of 44



Test Plots and Data of Radiated Emissions (30MHz to 1GHz)	
Tested Model:	OMAKER-Nature
Tested Mode:	TM1
Test Power Specification:	DC 3.7V
Test Antenna Polarization:	Vertical

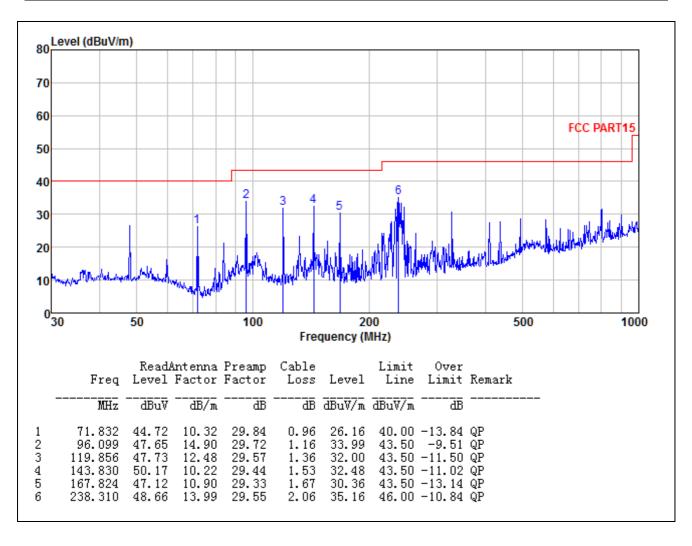

FCC Test Report Page 26 of 44



Test Plots and Data of Radiated Emissions (1GHz to 25GHz)	
Tested Model:	OMAKER-Nature
Tested Mode:	TM1/TM2/TM3
Test Power Specification:	DC 3.7V
Remark:	Worst cases (8DPSK)

Frequency	Correct	Result	Limit	Margin	Detector	Polar
(MHz)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	PK/AV	H/V
		Low	Channel (2402N	MHz)		
4804	8.29	38.30	74	-35.70	PK	Н
4804	8.29	32.39	54	-21.61	AV	Н
4804	8.29	37.58	74	-36.42	PK	V
4804	8.29	31.04	54	-22.96	AV	V
		Midd	le Channel (2441)	MHz)	•	
4882	8.40	37.35	74	-36.65	PK	Н
4882	8.40	31.46	54	-22.54	AV	Н
4882	8.40	36.54	74	-37.46	PK	V
4882	8.40	31.24	54	-22.76	AV	V
	High Channel (2480MHz)					
4960	8.50	37.55	74	-36.45	PK	Н
4960	8.50	31.65	54	-22.35	AV	Н
4960	8.50	37.25	74	-36.75	PK	V
4960	8.50	31.19	54	-22.81	AV	V

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above  $3^{th}$  Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz..

FCC Test Report Page 27 of 44



## 10. Out of Band Emissions

#### 10.1 Standard and Limit

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

#### 10.2 Test Procedure

According to the ANSI C63.10, the band-edge radiated test method as follows.

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 3MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation porduct outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the ANSI C63.10, the band-edge conducted test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2380MHz to 2410MHz for low bandedge, 2470MHz to 2500MHz for the high bandedge)

RBW = 100kHz, VBW = 300kHz

Sweep = auto; Detector function = peak; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation porduct outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the limit specified in this section (at least 20dB attenuation).

FCC Test Report Page 28 of 44




#### 10.3 Test Data and Results

Radiated Bandedge (Worst case)

Test Mode: GFSK


Lowest Bandedge (Horizontal)

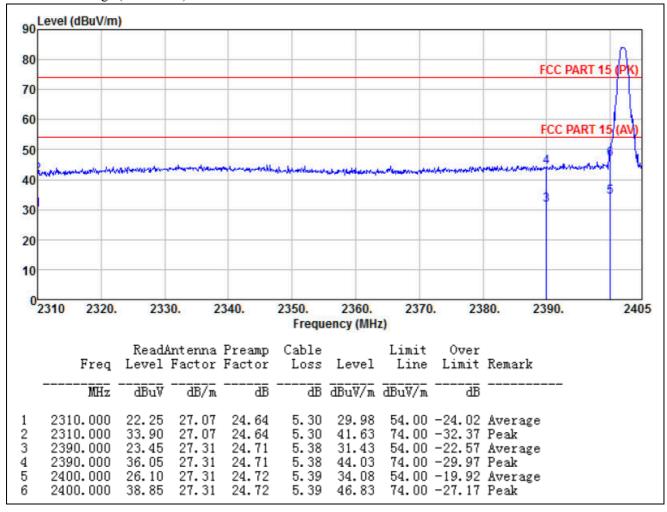

FCC Test Report Page 29 of 44




#### Highest Bandedge (Horizontal)

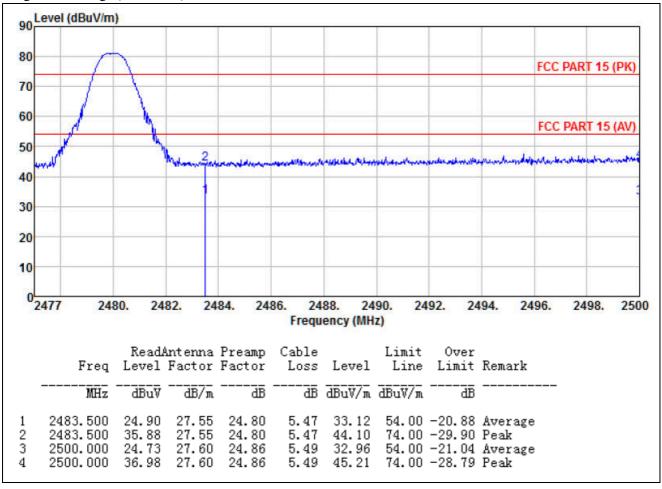


FCC Test Report Page 30 of 44



#### Conducted Bandedge

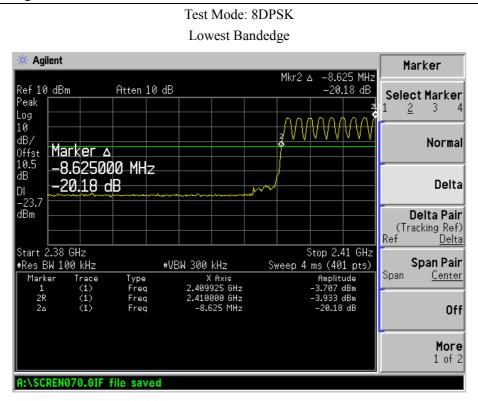

# Highest Bandedge

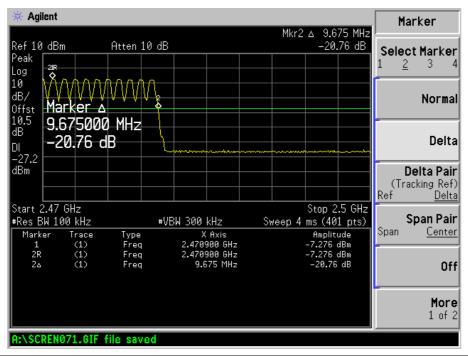

FCC Test Report Page 31 of 44



# 11. Conducted Emissions

#### 11.1 Standard and Limit

According to the rule FCC Part 15.207, Conducted limit, the limit for a class B device as below:

Frequency of Emission (MHz)	Conducted I	Limit (dBuV)
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50


Note 1: Decreases with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz

Note 2: The lower limit applies at the band edges

AC Power Line

## 11.2 Test Procedure

Test is conducting under the description of ANSI C63.10-2013 measurement procedure.

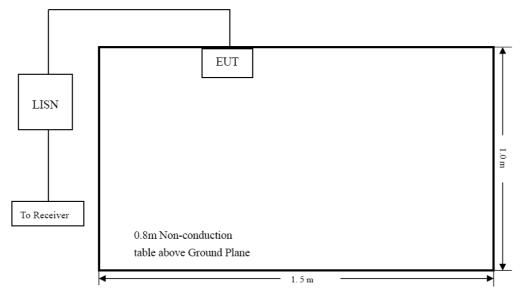

Test Setup Block Diagram


## 11.3 Test Data and Results

Based on all tested data, the EUT complied with the FCC Part 15.207 standard limit for a Class B device, and with the worst case as below:

FCC Test Report Page 32 of 44




Test Plots and Data of Conducted Emissions	
Tested Model:	OMAKER-Nature
Tested Mode:	TM5(Charging and Bluetooth Playing)
Test Power Specification:	AC 120V/60Hz
Test Power Line:	Neutral

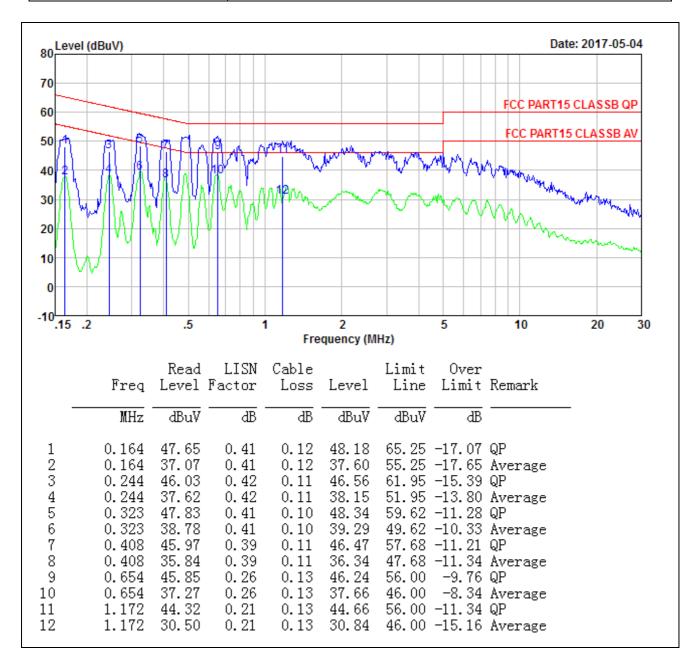

FCC Test Report Page 33 of 44



Test Plots and Data of Conducted Emissions	
Tested Model:	OMAKER-Nature
Tested Mode:	TM5
Test Power Specification:	AC 120V/60Hz
Test Power Line:	Line

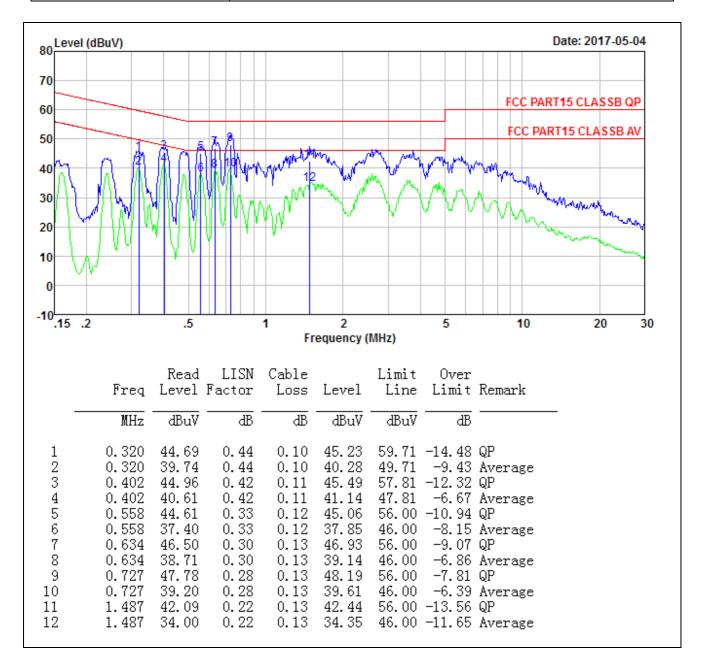

FCC Test Report Page 34 of 44



# **Annex A. EUT External Photos**

# **EUT View 1**



# **EUT View 2**



FCC Test Report Page 35 of 44



# **EUT View 3**



# **EUT View 4**



FCC Test Report Page 36 of 44



# **EUT View 5**



# **EUT View 6**



FCC Test Report Page 37 of 44



# **EUT View 7**




FCC Test Report Page 38 of 44



# **Annex B. EUT Internal Photos**

# **EUT Internal View 1**



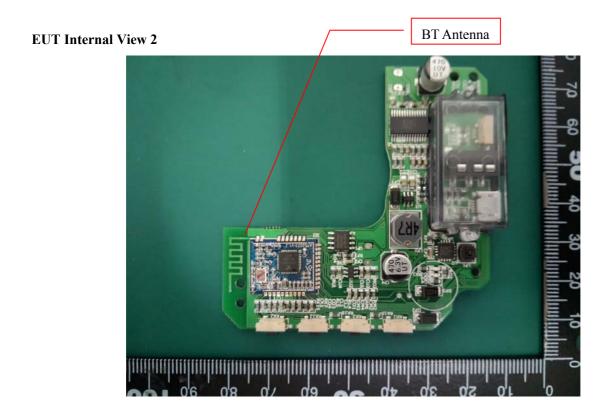


FCC Test Report Page 39 of 44



# **EUT Internal View 3**



# **EUT Internal View 4**

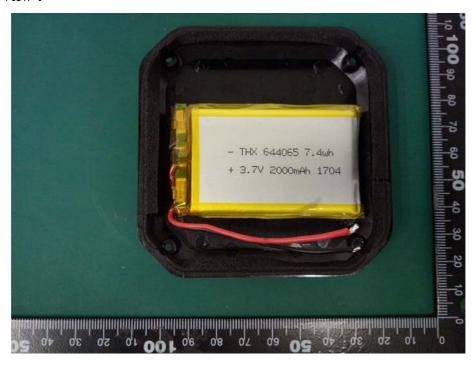

FCC Test Report Page 40 of 44



# **EUT Internal View 5**



FCC Test Report Page 41 of 44




# **Annex C. Test Photos**

# **Conducted Emissions**




# **Radiated Emissions (30MHz to 1GHz)**

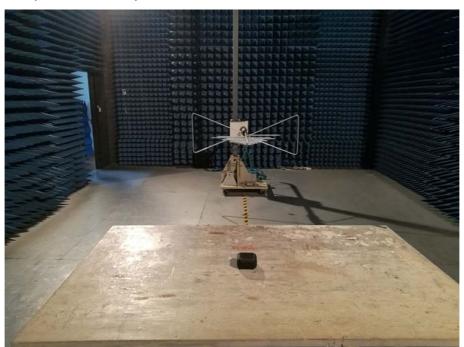

FCC Test Report Page 42 of 44



# **Radiated Emissions (Above 1GHz)**

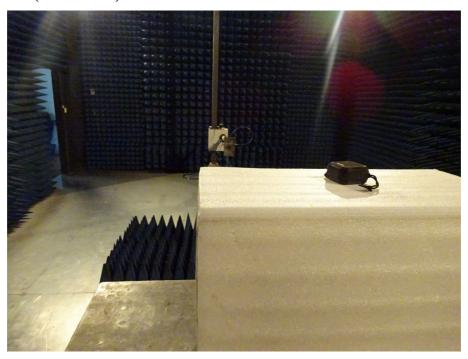

FCC Test Report Page 43 of 44



## Annex D. Label and Information

#### **FCC Label Sample**

#### FCC ID: 2AL2J-OMAKER-NATURE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

#### **FCC Label Specifications**

Text is Black in color and is justified. Labels are printed in indelible ink on permanent adhesive backing or silk-screened onto the EUT or shall be affixed at a conspicuous location on the EUT. Where the EUT is constructed in two or more sections connected by wires and marketed together, the above statement is required to be affixed only to the main control unit. When the EUT is so small or for such use that it is not practicable to place the statement on it, the above information shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed.

#### **FCC Label Location**



\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Test Report Page 44 of 44