

*Testing Tomorrow's Technology*

**Application**

**For**

**Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.249**

**And**

**RSS-210 For Industry Canada**

**For the**

**Tymtix Technologies Private LTD**

**Model: SEN4W**

**FCC ID: 2AL4P-SEN4W  
IC: 22720-SEN4W**

**UST Project: 17-0127  
Issue Date: July 10, 2017**

Total Pages in This Report: 34

**3505 Francis Circle Alpharetta, GA 30004  
PH: 770-740-0717 Fax: 770-740-1508  
www.ustech-lab.com**



*Testing Tomorrow's Technology*

I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: Alan Ghasiani

Name: Alan Ghasiani

Title: Compliance Engineer – President

Date July 10, 2017



This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

**3505 Francis Circle Alpharetta, GA 30004  
PH: 770-740-0717 Fax: 770-740-1508  
www.ustech-lab.com**

US Tech Test Report: FCC Part 15 Certification/ RSS 210  
FCC ID: 2AL4P-SEN4W  
IC: 22720-SEN4W  
Test Report Number: 17-0127  
Issue Date: July 10, 2017  
Customer: Tymtix Technologies Private Ltd  
Model: SEN4W

## MEASUREMENT TECHNICAL REPORT

**COMPANY NAME:** Tymtix Technologies Private Ltd

**MODEL:** SEN4W

**FCC ID:** 2AL4P-SEN4W

**IC:** 22720-SEN4W

**DATE:** July 10, 2017

This report concerns (check one): Original grant  Class II change

Equipment type: 2402 – 2480 MHz Transmitter Module

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes  No

If yes, defer until: N/A  
date

agrees to notify the Commission by N/A  
date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by:

US Tech  
3505 Francis Circle  
Alpharetta, GA 30004  
Phone Number: (770) 740-0717  
Fax Number: (770) 740-1508

US Tech Test Report:	FCC Part 15 Certification/ RSS 210
FCC ID:	2AL4P-SEN4W
IC:	22720-SEN4W
Test Report Number:	17-0127
Issue Date:	July 10, 2017
Customer:	Tymtix Technologies Private Ltd
Model:	SEN4W

## Table of Contents

<u>Paragraph</u>	<u>Title</u>	<u>Page</u>
<b>1 General Information</b>		<b>7</b>
1.1 Purpose of this Report.....		7
1.2 Characterization of Test Sample .....		7
1.3 Product Description .....		7
1.4 Configuration of Tested System .....		7
1.5 Test Facility .....		8
1.6 Related Submittals .....		8
<b>2 Tests and Measurements</b>		<b>10</b>
2.1 Test Equipment .....		10
2.2 Modifications to EUT Hardware.....		11
2.3 Number of Measurements for Intentional Radiators (15.31(m)) .....		11
2.4 Frequency Range of Radiated Measurements (Part 15.33) .....		11
2.4.1 Intentional Radiator.....		11
2.4.2 Unintentional Radiator .....		12
2.5 Measurement Detector Function and Bandwidth (CFR 15.35) .....		12
2.5.1 Detector Function and Associated Bandwidth .....		12
2.5.2 Corresponding Peak and Average Requirements.....		12
2.5.3 Pulsed Transmitter Averaging.....		12
2.6 EUT Antenna Requirements (CFR 15.203).....		13
2.7 Restricted Bands of Operation (Part 15.205).....		14
2.8 Transmitter Duty Cycle (CFR 35 (c)) .....		14
2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207) .....		15
2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(a),(c)) (IC RSS 210, A2.9 (a)) .....		15
2.11 Band Edge and Restricted Band Measurements – (CFR 15.249 (d)).....		19
2.12 99% Occupied Bandwidth (IC RSS-Gen 2.2) .....		27
2.13 Unintentional Radiator, Powerline Emissions (CFR 15.107) .....		31
2.14 Unintentional Radiator, Radiated Emissions (CFR 15.109).....		32
2.15 Measurement Uncertainty .....		34
2.15.1 Conducted Emissions Measurement Uncertainty .....		34
2.15.2 Radiated Emissions Measurement Uncertainty .....		34
<b>3 Test Results</b>		<b>34</b>

US Tech Test Report: FCC Part 15 Certification/ RSS 210  
FCC ID: 2AL4P-SEN4W  
IC: 22720-SEN4W  
Test Report Number: 17-0127  
Issue Date: July 10, 2017  
Customer: Tymtix Technologies Private Ltd  
Model: SEN4W

## List of Figures

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1.	Block Diagram of Test Configuration .....	13
Figure 2.	Manufacturer Claimed Duty Cycle .....	14
Figure 3.	Band Edge Compliance, Low Channel Delta - Peak.....	20
Figure 4.	Band Edge Compliance, Low Channel Delta - Average.....	21
Figure 5.	Radiated Restricted Band 2310 MHz to 2390 MHz, Peak .....	22
Figure 6.	Band Edge Compliance, High Channel Delta – Peak .....	23
Figure 7.	Band Edge Compliance, High Channel Delta – Average .....	24
Figure 8.	Radiated Restricted Band 23483.5 MHz to 2500 MHz, Peak .....	25
Figure 9.	99% Bandwidth - IC RSS 210, A8.1– Low Channel.....	28
Figure 10.	99% Bandwidth -IC RSS 210, A8.1 – Mid Channel .....	29
Figure 11.	99% Bandwidth -IC RSS 210, A8.1 – High Channel.....	30

US Tech Test Report:	FCC Part 15 Certification/ RSS 210
FCC ID:	2AL4P-SEN4W
IC:	22720-SEN4W
Test Report Number:	17-0127
Issue Date:	July 10, 2017
Customer:	Tymtix Technologies Private Ltd
Model:	<u>SEN4W</u>

## List of Tables

<u>Table</u>	<u>Title</u>	<u>Page</u>
Table 1.	EUT and Peripherals.....	9
Table 2.	Test Instruments .....	10
Table 3.	Number of Test Frequencies for Intentional Radiators.....	11
Table 4.	Allowed Antenna(s).....	13
Table 5.	Spurious Radiated Emissions below 30 MHz.....	16
Table 6.	Peak Radiated Fundamental & Harmonic Emissions.....	17
Table 7.	Average Radiated Fundamental & Harmonic Emissions .....	18
Table 8.	Radiated Restricted Band 2310 MHz to 2390 MHz, Peak .....	22
Table 9.	Radiated Restricted Band 2483.5 MHz to 2500 MHz, Peak.....	26
Table 10.	Radiated Restricted Band 2483.5 MHz to 2500 MHz, Average .....	26
Table 11.	20 dB Bandwidth and 99% Occupied Bandwidth .....	27
Table 12.	Transmitter Power Line Conducted Emissions Test Data, Part 15.107 ...	31
Table 13.	Unintentional Radiator, Peak Radiated Emissions (CFR 15.109), .....	32
Table 14.	Unintentional Radiator, Peak Radiated Emissions (CFR 15.109), .....	33

## List of Attachments

- Agency Agreement
- Application Forms
- Letter of Confidentiality
- Equipment Label(s)
- Block Diagram(s)
- Schematic(s)
- Test Configuration Photographs
- Internal Photographs
- External Photographs
- Theory of Operation
- User's Manual

US Tech Test Report:	FCC Part 15 Certification/ RSS 210
FCC ID:	2AL4P-SEN4W
IC:	22720-SEN4W
Test Report Number:	17-0127
Issue Date:	July 10, 2017
Customer:	Tymtix Technologies Private Ltd
Model:	<u>SEN4W</u>

## 1 General Information

### 1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to the FCC Rules and Regulations Part 15, Section 249 and IC RSS 210.

### 1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on April 7, 2017 in good operating condition.

### 1.3 Product Description

The Equipment Under Test (EUT) is the Tymtix Technologies Private Ltd Model SEN4W. The SEN4W is a Bluetooth LE based automotive tire pressure monitoring device. The EUT is designed to consume a very low amount of power. The device can be paired using an Android or iOS device using the manufacturer application firmware.

Antenna: Custom Patch Antenna  
Antenna Gain: 2.96 dBi  
Modulation: GFSK (FHSS)  
Output Power: +0 dBm (Max)  
Data Rate: 2 Mbps (Max)  
Channels: 79

### 1.4 Configuration of Tested System

The Test Sample was tested per *ANSI C63.4:2014, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014)*, and *ANSI C63.10.2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices*.

A list of EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs are provided in separate Appendices

US Tech Test Report: FCC Part 15 Certification/ RSS 210  
FCC ID: 2AL4P-SEN4W  
IC: 22720-SEN4W  
Test Report Number: 17-0127  
Issue Date: July 10, 2017  
Customer: Tymtix Technologies Private Ltd  
Model: SEN4W

## 1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is 186022. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

## 1.6 Related Submittals

The EUT is subject to the following FCC authorizations:

- a) Certification under section 15.249 as a transmitter.
- b) Verification under 15.101 as a digital device and receiver.

The Verification requirement shares many common report elements with the Certification report. Therefore, though this report is mostly intended to provide data for the Certification process, the Verification authorization report (part 15.107 and 15.109) for the EUT is included herein.

US Tech Test Report: FCC Part 15 Certification/ RSS 210  
 FCC ID: 2AL4P-SEN4W  
 IC: 22720-SEN4W  
 Test Report Number: 17-0127  
 Issue Date: July 10, 2017  
 Customer: Tymtix Technologies Private Ltd  
Model: SEN4W

**Table 1. EUT and Peripherals**

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
Tymtix Technologies Private Ltd	SEN4W	Engineering Sample	FCC ID: 2AL4P-SEN4W (pending) IC: 22720-SEN4W (pending)	N/A
Antenna See antenna details	--	--	--	--

U= Unshielded

S= Shielded

P= Power

D= Data

US Tech Test Report:	FCC Part 15 Certification/ RSS 210
FCC ID:	2AL4P-SEN4W
IC:	22720-SEN4W
Test Report Number:	17-0127
Issue Date:	July 10, 2017
Customer:	Tymtix Technologies Private Ltd
Model:	SEN4W

## 2 Tests and Measurements

### 2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

**Table 2. Test Instruments**

INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	8593E	HEWLETT-PACKARD	3205A00124	8/23/2017
SPECTRUM ANALYZER	DSA815	RIGOL	DSA8A180300 138	6/30//2017
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	6/22/2018
BICONICAL ANTENNA	3110B	EMCO	9306-1708	5/02/2019 2 yr
BICONICAL ANTENNA	3110B	EMCO	9307-1431	8/25/2017 2 yr
LOG PERIODIC ANTENNA	3146	EMCO	9110-3236	5/01/2019 2 yr
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	9/21/2018 2 yr
HORN ANTENNA	3115	EMCO	9107-3723	9/22/2018 2 yr
PRE-AMPLIFIER	8449B	HEWLETT-PACKARD	3008A00480	10/26/2017
PRE-AMPLIFIER	8447D	HEWLETT-PACKARD	1937A02980	3/07/2018

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

## 2.2 Modifications to EUT Hardware

No physical modifications were made by US Tech in order to bring the EUT into compliance with FCC Part 15, Subpart C Intentional Radiator Limits for the transmitter portion of the EUT or the Subpart B Unintentional Radiator Limits (Receiver and Digital Device) Requirements.

## 2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 below.

**Table 3. Number of Test Frequencies for Intentional Radiators**

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates at 2402 MHz to 2480 MHz, 3 test frequencies were used.

## 2.4 Frequency Range of Radiated Measurements (Part 15.33)

### 2.4.1 Intentional Radiator

The spectrum shall be investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10<sup>th</sup> harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

## 2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range shall be 30 MHz to 1000 MHz, or to 5 times the highest internal clock frequency.

## 2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the following the parameters outlined following.

### 2.5.1 Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

### 2.5.2 Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

### 2.5.3 Pulsed Transmitter Averaging

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may be expressed logarithmically in dB.

NOTE: If the transmitter was programmed to transmit at >98% duty cycle, then, wherever applicable (where the detection mode was AVG), the duty cycle factor calculated will be applied.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:


FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

## 2.6 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

**Table 4. Allowed Antenna(s)**

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB <sub>i</sub>	TYPE OF CONNECTOR
1	Tymtix	Custom trace antenna	Engineering Sample	2.96	PCB Trace

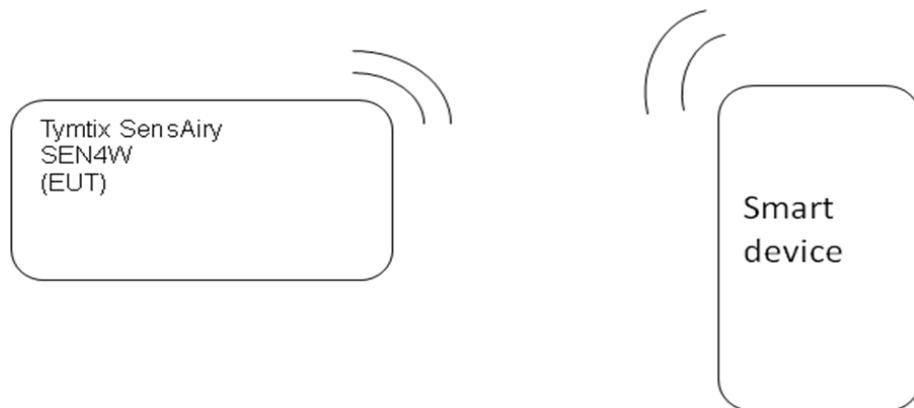

**Figure 1. Block Diagram of Test Configuration**


US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

## 2.7 Restricted Bands of Operation (Part 15.205)

Only spurious emissions can fall in the frequency bands of CFR 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other Spurious are examined for this requirement see paragraph 2.1

## 2.8 Transmitter Duty Cycle (CFR 35 (c))

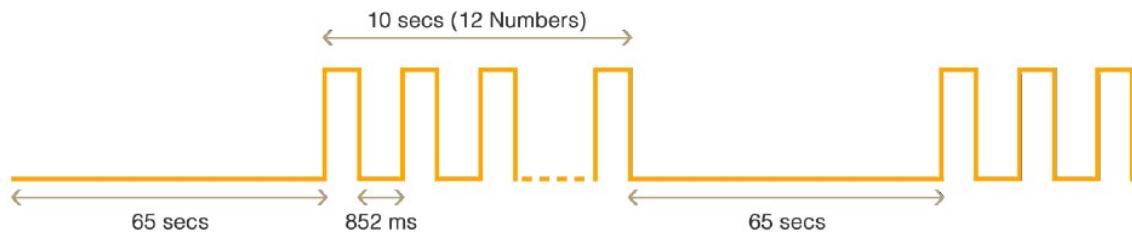

**Figure 2. Manufacturer Claimed Duty Cycle**

**Total Pulse Train from Figure 2 = 0.15 or 15% (10s/65s)**

$$\text{Duty Cycle} = 20 \log (0.15) = \boxed{-16.25 \text{ dB}}$$

NOTE: The transmitter was programmed to transmit at >98% duty cycle, therefore wherever applicable (where the detection mode was AVG) the duty cycle factor calculated above will be applied.

US Tech Test Report: FCC Part 15 Certification/ RSS 210  
FCC ID: 2AL4P-SEN4W  
IC: 22720-SEN4W  
Test Report Number: 17-0127  
Issue Date: July 10, 2017  
Customer: Tymtix Technologies Private Ltd  
Model: SEN4W

## **2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207)**

Since the EUT is battery powered, this test was not applied. The EUT is powered by one 3 V BR2450 coin type battery.

## **2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(a),(c)) (IC RSS 210, A2.9 (a))**

Radiated Spurious measurements: the EUT was placed into a continuous transmit mode of operation (>98% duty cycle) and tested per FCC KDB Publication 558074 and ANSI C63.10:2013. A preliminary scan was performed on the EUT to find signal frequencies that were caused by the transmitter part of the device. To obtain worse case results the EUT was tested in X, Y and Z axes or in the orientation of normal operation if the device is designed to operate in a fixed position.

Radiated measurements were then conducted between the frequency range of 9 KHz (or lowest frequency used/generated by the device) up to the tenth harmonic of the device (no greater than 40 GHz). In the band below 30 MHz a resolution bandwidth (RBW) of 9 kHz was used; emissions below 1 GHz were tested with a RBW of 120 KHz and emissions above 1 GHz were tested with a RBW of 1 MHz. All video bandwidth settings were at least three times the RBW value.

The EUT was investigated to CFR 15.209, General requirements for unwanted spurious emissions.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

**Table 5. Spurious Radiated Emissions below 30 MHz**

9 kHz to 30 MHz, 15.209 limits							
Test: Radiated Emissions				Client: Tymtix Technologies Private Ltd			
Project: 17-0127				Model: SEN4W			
Frequency (MHz)	Test Data (dB <sub>UV</sub> )	AF+CA-AMP (dB/m)	Results (dB <sub>UV</sub> /m)	AVG Limits (dB <sub>UV</sub> /m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or AVG
No emissions found greater than 20 dB below the applicable limit from the lowest clock frequency (9 kHz to 30 MHz).							

Sample Calculation: N/A

Date: June 19, 2017

Evaluated by

Signature: 

Name: Robert K. Mills

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 2AL4P-SEN4W  
 22720-SEN4W  
 17-0127  
 July 10, 2017  
 Tymtix Technologies Private Ltd  
 SEN4W

**Table 6. Peak Radiated Fundamental & Harmonic Emissions**

Test: FCC Part 15, Para 15.209, 15.249(a)					Client: Tymtix Technologies Private LTD			
Project: 17-0127					Model: SEN4W			
Frequency (MHz)	Test Data (dBuV)	Factor (dB)	AF+CA -AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
Low - Channel								
2402.20	61.39	--	28.74	90.13	114.0	3.0m./HORZ	23.9	PK
4804.35	50.93	--	1.97	52.90	74.0	3.0m./HORZ	21.1	PK
7199.90	44.72	--	6.28	51.00	74.0	3.0m./HORZ	23.0	PK
9607.95	45.48	--	6.41	51.89	74.0	3.0m./HORZ	22.1	PK
Mid – Channel								
2440.30	61.19	--	28.78	89.97	114.0	3.0m./HORZ	24.0	PK
4880.30	51.52	--	2.26	53.78	74.0	3.0m./HORZ	20.2	PK
7317.80	43.45	--	7.35	50.80	74.0	3.0m./HORZ	23.2	PK
9761.40	44.41	--	8.70	53.11	74.0	3.0m./HORZ	20.9	PK
High – Channel								
2480.00	57.87	--	28.78	86.65	114.0	3.0m./HORZ	27.3	PK
4960.40	46.78	--	1.32	48.10	74.0	3.0m./HORZ	25.9	PK
7443.45	44.59	--	6.48	51.07	74.0	3.0m./HORZ	22.9	PK
9927.90	44.47	--	9.04	53.51	74.0	3.0m./HORZ	20.5	PK

Notes:

1. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
2. Measurements taken at 1 meter were extrapolated to 3 meters using a factor of (-9.5 dB).
3. The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 2402.00 MHz:

Magnitude of Measured Frequency	61.39	dBuV
+Antenna Factor + Cable Loss - Amplifier Gain	28.74	dB/m
Corrected Result	90.13	dBuV/m

Test Date: May 16, 2017

Tested By

Signature: 

Name: Robert K. Mills

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 2AL4P-SEN4W  
 22720-SEN4W  
 17-0127  
 July 10, 2017  
 Tymtix Technologies Private Ltd  
 SEN4W

**Table 7. Average Radiated Fundamental & Harmonic Emissions**

Test: FCC Part 15, Para 15.209, 15.249(a)					Client: Tymtix Technologies Private LTD			
Project: 17-0127					Model: SEN4W			
Frequency (MHz)	Test Data (dBuV)	Factor (dB)	AF+CA -AMP (dB/m)	Results (dBuV/m)	Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
Low - Channel								
2402.20	55.95	--	28.74	84.69	94.0	3.0m./HORZ	9.3	AVG
4804.35	31.64	--	0.32	31.96	54.0	3.0m./HORZ	22.0	AVG
7199.90	35.69	--	4.24	39.93	54.0	3.0m./HORZ	14.1	AVG
9607.95	36.13	--	4.42	40.55	54.0	3.0m./HORZ	13.5	AVG
Mid - Channel								
2440.30	51.70	--	28.78	80.48	94.0	3.0m./HORZ	13.5	AVG
4880.30	37.21	--	0.97	38.18	54.0	3.0m./HORZ	15.8	AVG
7317.80	35.91	--	5.51	41.42	54.0	3.0m./HORZ	12.6	AVG
9761.40	35.28	--	6.71	41.99	54.0	3.0m./HORZ	12.0	AVG
High - Channel								
2480.00	52.84	--	28.78	81.62	94.0	3.0m./HORZ	12.4	AVG
4960.40	34.45	--	0.03	34.48	54.0	3.0m./HORZ	19.5	AVG
7443.45	36.03	--	4.64	40.67	54.0	3.0m./HORZ	13.3	AVG
9927.90	36.22	--	7.05	43.27	54.0	3.0m./HORZ	10.7	AVG

Notes:

1. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
2. Measurements taken at 1 meter were extrapolated to 3 meters using a factor of (-9.5 dB).
3. The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 2402.0 MHz:

Magnitude of Measured Frequency	55.95	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain – Duty Cycle	28.74	dB/m
<u>Duty Cycle Correction Factor</u>	Not Applied	dB
Corrected Result	84.69	dBuV/m

Test Date: May 16, 2017

Tested By

Signature:



Name: Robert K. Mills

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

## 2.11 Band Edge and Restricted Band Measurements – (CFR 15.249 (d))

Band Edge measurements are made following the guidelines in ANSI C63.10-2013 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Radiated measurements are performed to demonstrate compliance with the requirement of 15.249(d) that all emissions outside of the band edges be attenuated by at least 50 dB or 15.209 limits, when compared to its highest in-band value (contained in a 100 kHz band).

Test Date: May 18 and June 23, 2017

Tested By  
Signature:  Name: Robert K. Mills

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

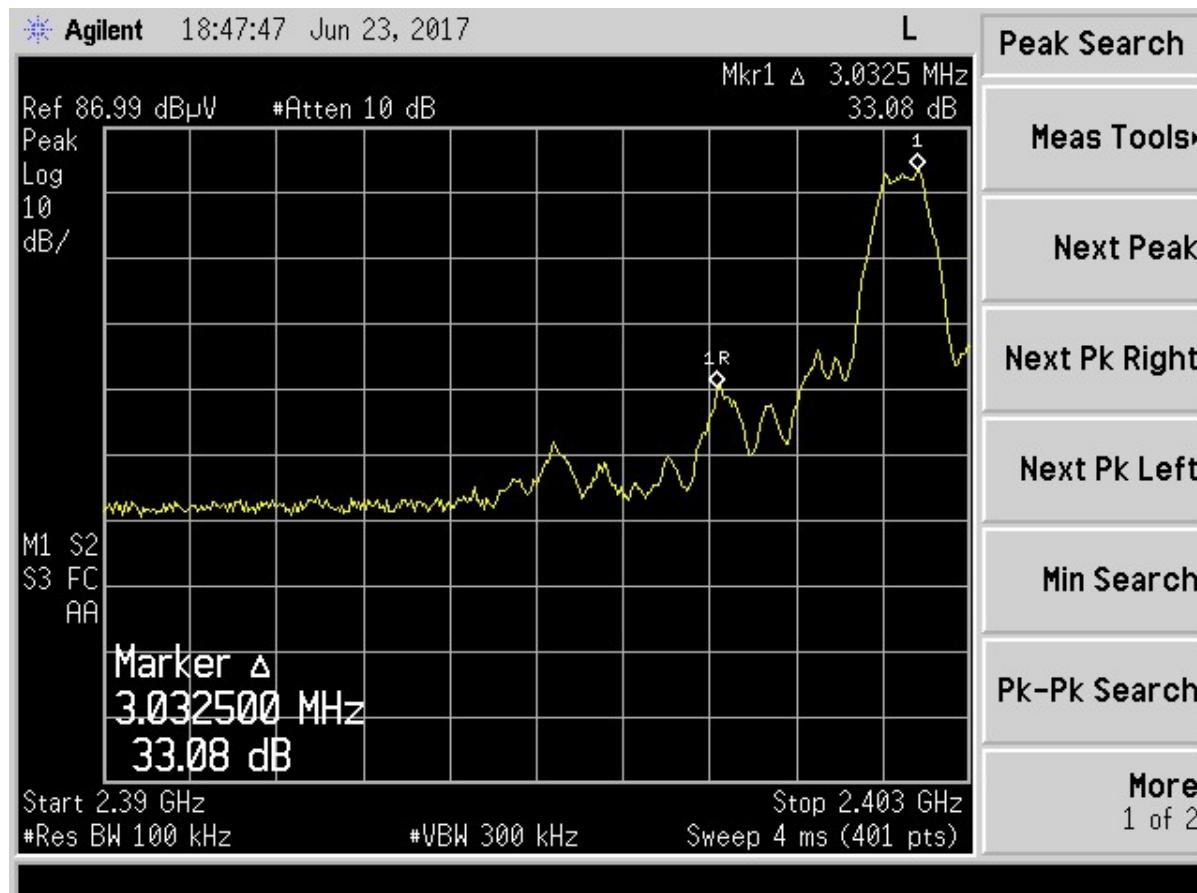


Figure 3. Band Edge Compliance, Low Channel Delta - Peak

Low Channel Corrected Measured Value from Table 6	90.13	dBuV
<u>Low Channel Band Edge Delta from Figure 4</u>	33.08	dB
Calculated Result	57.05	dBuV/m
Band Edge Limit	74.00	dBuV/m
<u>Calculated Result</u>	57.05	dBuV/m
Band Edge Margin	16.95	dBuV/m

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

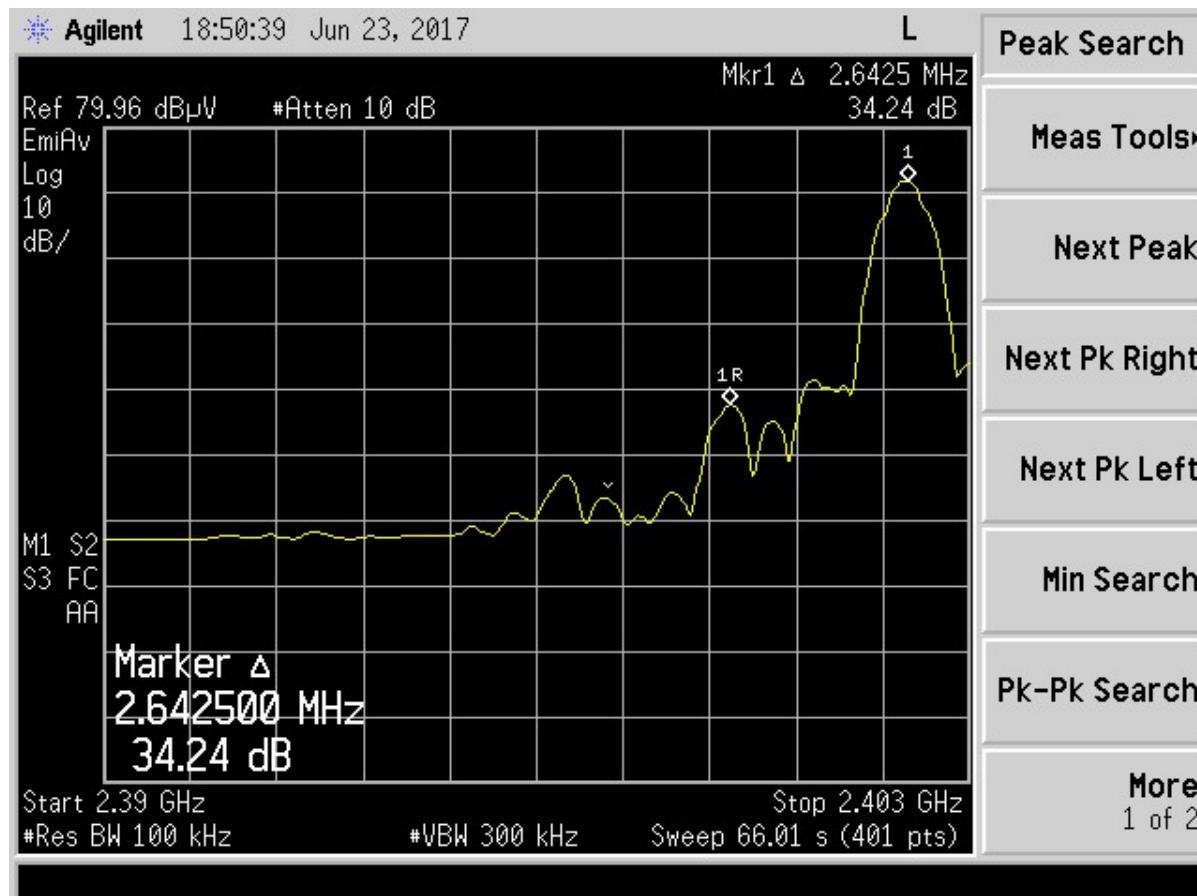


Figure 4. Band Edge Compliance, Low Channel Delta - Average

Low Channel Corrected Measured Value from Table 7	84.69 dB $\mu$ V
Low Channel Band Edge Delta from Figure 5	34.24 dB
Calculated Result	50.45 dB $\mu$ V/m
Band Edge Limit	54.00 dB $\mu$ V/m
Calculated Result	50.45 dB $\mu$ V/m
Band Edge Margin	3.55 dB $\mu$ V/m

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 2AL4P-SEN4W  
 22720-SEN4W  
 17-0127  
 July 10, 2017  
 Tymtix Technologies Private Ltd  
 SEN4W

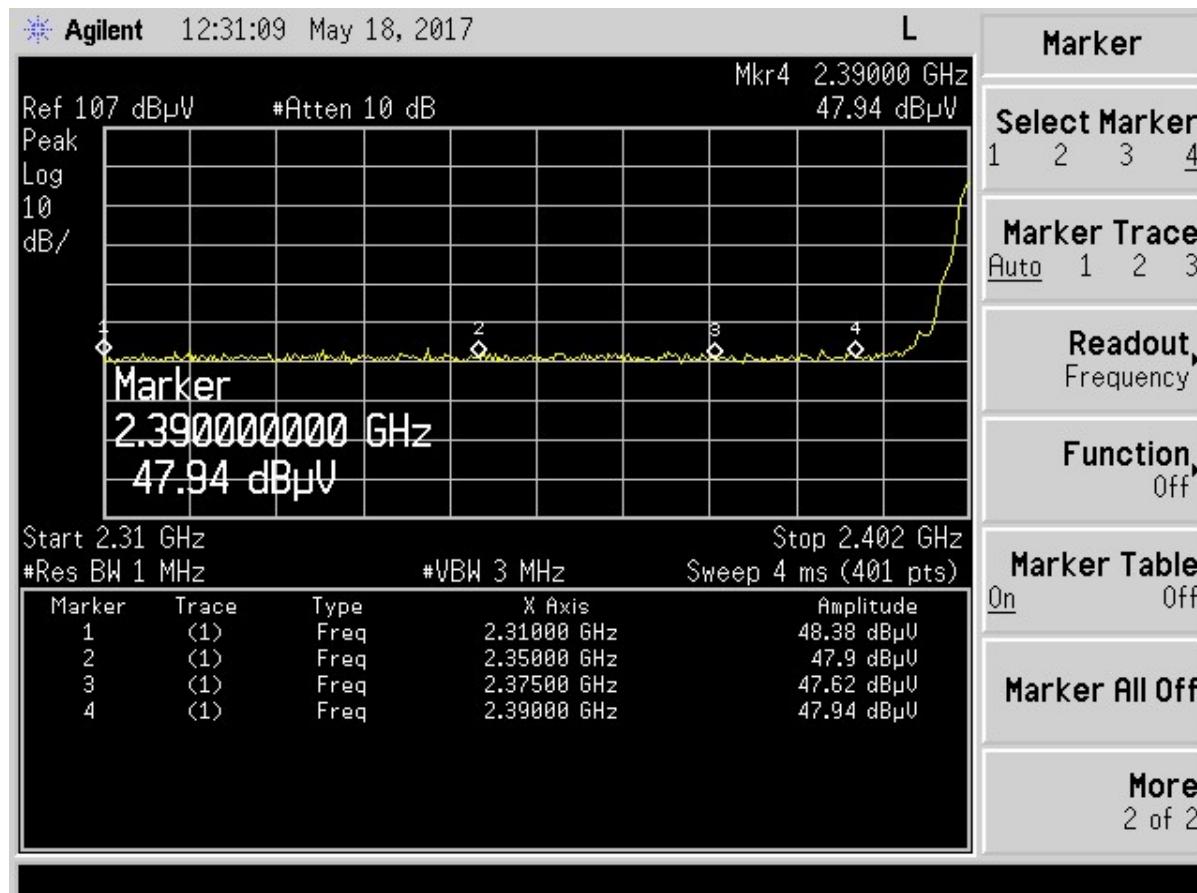


Figure 5. Radiated Restricted Band 2310 MHz to 2390 MHz, Peak

Table 8. Radiated Restricted Band 2310 MHz to 2390 MHz, Peak

2310 MHz to 2390 MHz Restricted Band Peak Measurements							
Test: Radiated Emissions				Client: Tymtix			
Project: 17-0127				Model: SEN4W			
Frequency (MHz)	Test Data (dB $\mu$ V)	AF+CA-AMP (dB/m)	Results (dB $\mu$ V/m)	PK Limits (dB $\mu$ V/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or AVG
2310.00	48.38	-6.37	42.01	54.0	3.0m./HORZ	12.0	PK
2350.00	47.90	-6.83	41.07	54.0	3.0m./HORZ	12.9	PK
2375.00	47.62	-6.48	41.14	54.0	3.0m./HORZ	12.9	PK
2390.00	47.94	-6.30	41.64	54.0	3.0m./HORZ	12.4	PK

Note: Peak detection meets AVG limits.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

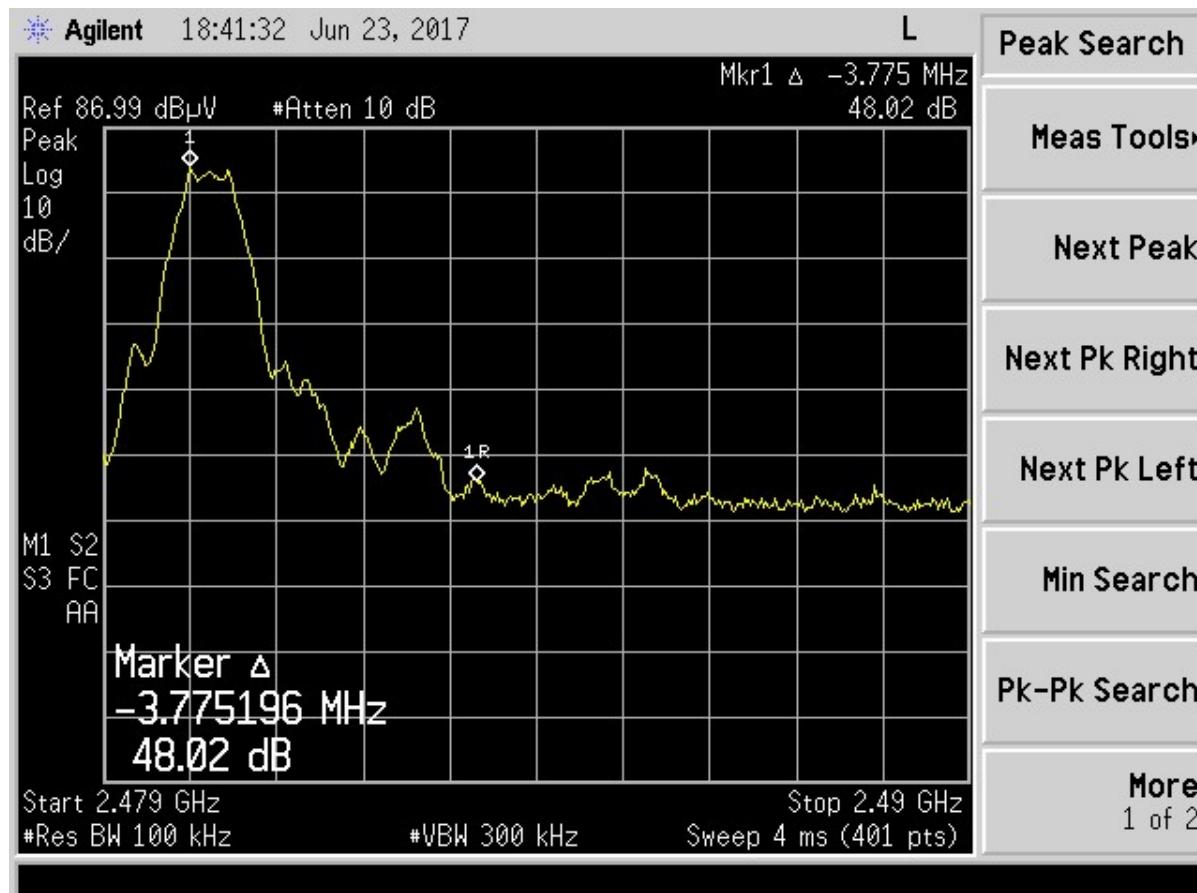


Figure 6. Band Edge Compliance, High Channel Delta – Peak

High Channel Corrected Measured Value from Table 6	86.65 dB $\mu$ V
High Channel Band Edge Delta from Figure 6	48.02 dB
Calculated Result	38.63 dB $\mu$ V/m
Band Edge Limit	74.00 dB $\mu$ V/m
Calculated Result	38.63 dB $\mu$ V/m
Band Edge Margin	35.37 dB $\mu$ V/m

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

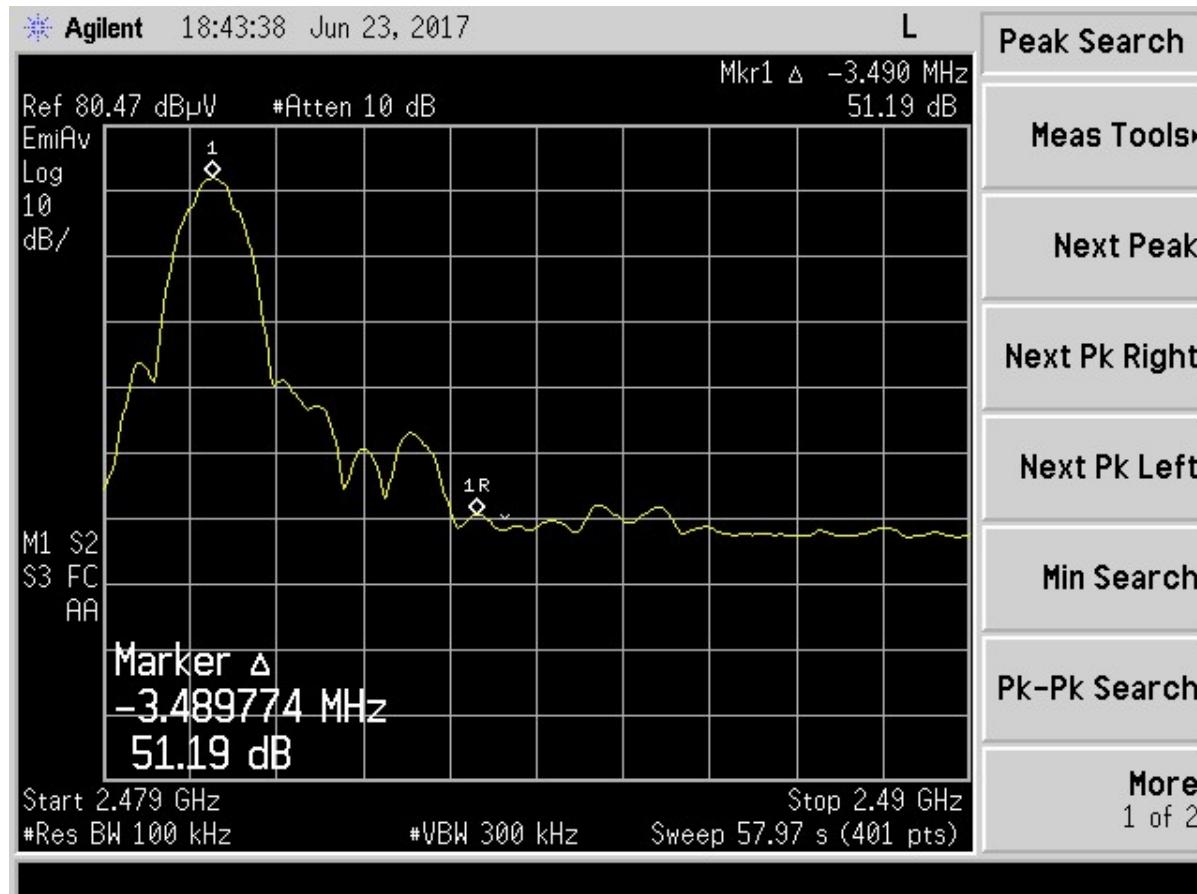


Figure 7. Band Edge Compliance, High Channel Delta – Average

Calculation of worst case upper band edge measurement:

High Channel Corrected Measured Value from Table 7	81.62	dB $\mu$ V
High Channel Band Edge Delta from Figure 7	51.19	dB
Calculated Result	30.43	dB $\mu$ V/m
Band Edge Limit	54.00	dB $\mu$ V/m
Calculated Result	30.43	dB $\mu$ V/m
Band Edge Margin	23.57	dB $\mu$ V/m

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W



Figure 8. Radiated Restricted Band 2483.5 MHz to 2500 MHz, Peak

US Tech Test Report:  
 FCC ID:  
 IC:  
 Test Report Number:  
 Issue Date:  
 Customer:  
 Model:

FCC Part 15 Certification/ RSS 210  
 2AL4P-SEN4W  
 22720-SEN4W  
 17-0127  
 July 10, 2017  
 Tymtix Technologies Private Ltd  
 SEN4W

**Table 9. Radiated Restricted Band 2483.5 MHz to 2500 MHz, Peak**

2483.5 MHz to 2500 MHz Restricted Band Peak Measurements							
Test: Radiated Emissions				Client: Tymtix			
Project: 17-0127				Model: SEN4W			
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP (dB/m)	Results (dBuV/m)	PK Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
2483.50	60.37	-5.38	54.99	74.0	3.0m./HORZ	19.0	PK
2485.70	56.58	-5.38	51.20	74.0	3.0m./HORZ	22.8	PK
2494.65	50.98	-5.31	45.67	74.0	3.0m./HORZ	28.3	PK
2500.00	47.74	-4.99	42.75	74.0	3.0m./HORZ	31.3	PK

**Table 10. Radiated Restricted Band 2483.5 MHz to 2500 MHz, Average**

2483.5 MHz to 2500 MHz Restricted Band Average Measurements							
Test: Radiated Emissions				Client: Tymtix			
Project: 17-0127				Model: SEN4W			
Frequency (MHz)	Test Data (dBuv)	AF+CA-AMP+Duty Cycle (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or AVG
2483.50	*44.37	-5.38	38.99	54.0	3.0m./VERT	15.0	PK
2485.70	56.58	-5.38	51.20	54.0	3.0m./HORZ	2.8	PK
2494.65	50.98	-5.31	45.67	54.0	3.0m./HORZ	8.3	PK
2500.00	47.74	-4.99	42.75	54.0	3.0m./HORZ	11.3	PK

Note: (\*) = The Duty Cycle Correction factor was added to the test data, 60.37 dBuV -16.25 dB= 44.37 dBuV.

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model: SEN4W

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

## 2.12 99% Occupied Bandwidth (IC RSS-Gen 2.2)

These measurements were performed while the EUT was in a constant transmit mode. A method similar to the marker delta method was used to capture the points. The RBW was set to approximately 1/100 of the manufacturers claimed RBW and with the VBW  $\geq$  RBW. The results of this test are given in Table 12 and Figures 10-12.

**Table 11. 20 dB Bandwidth and 99% Occupied Bandwidth**

Frequency (MHz)	99% Occupied Bandwidth (MHz)
2402.00	1.3020
2440.00	1.1888
2480.00	1.1246

Test Date: June 23, 2017

Tested By   
Signature: Robert K. Mills Name: Robert K. Mills

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

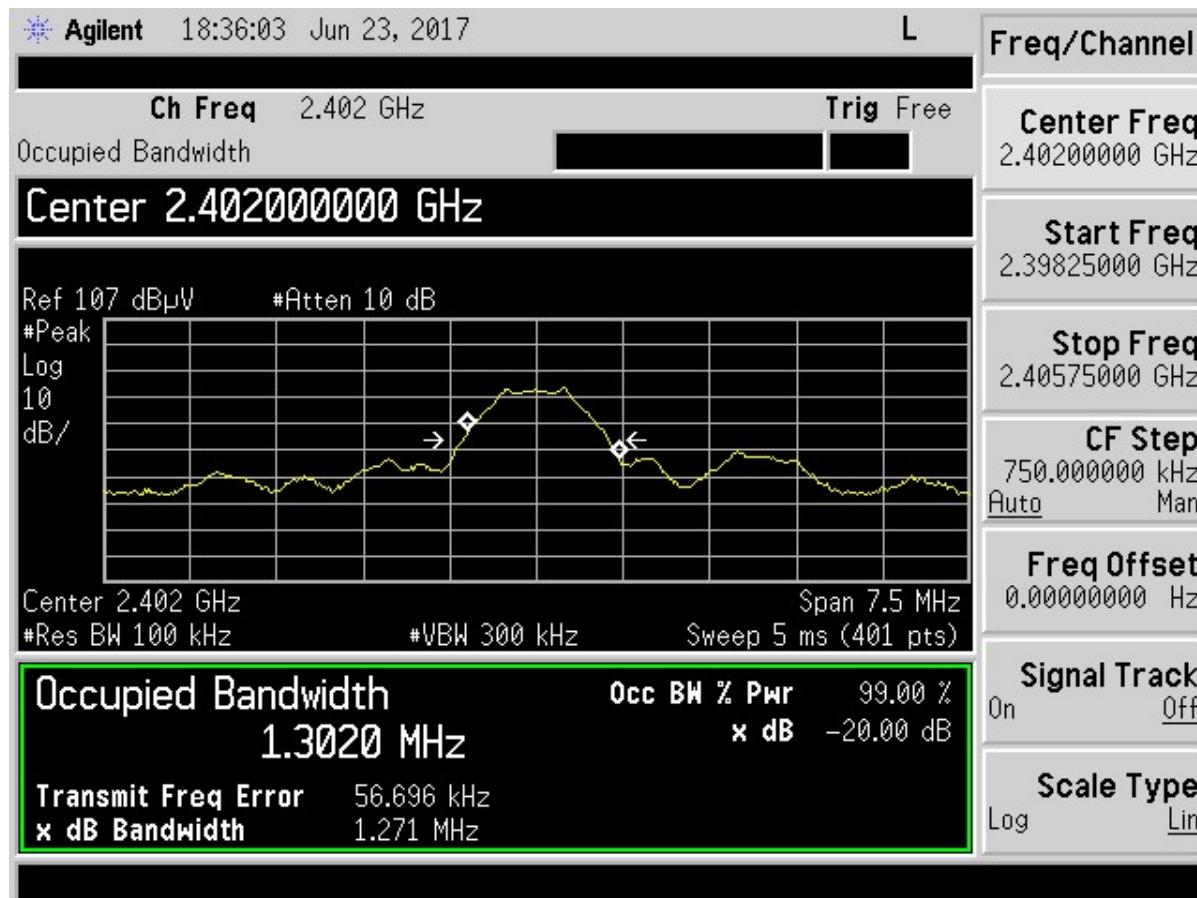


Figure 9. 99% Bandwidth - IC RSS 210, A8.1– Low Channel

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

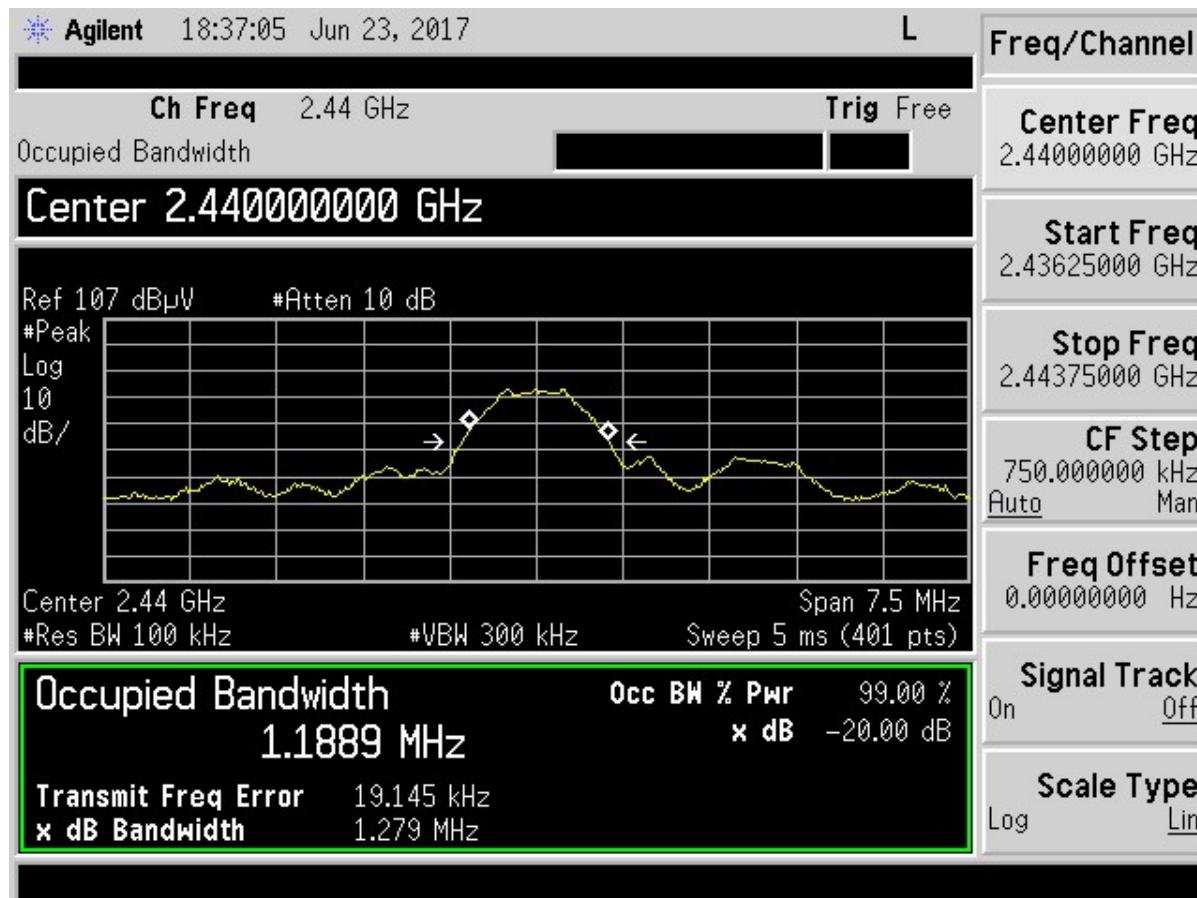


Figure 10. 99% Bandwidth -IC RSS 210, A8.1 – Mid Channel

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

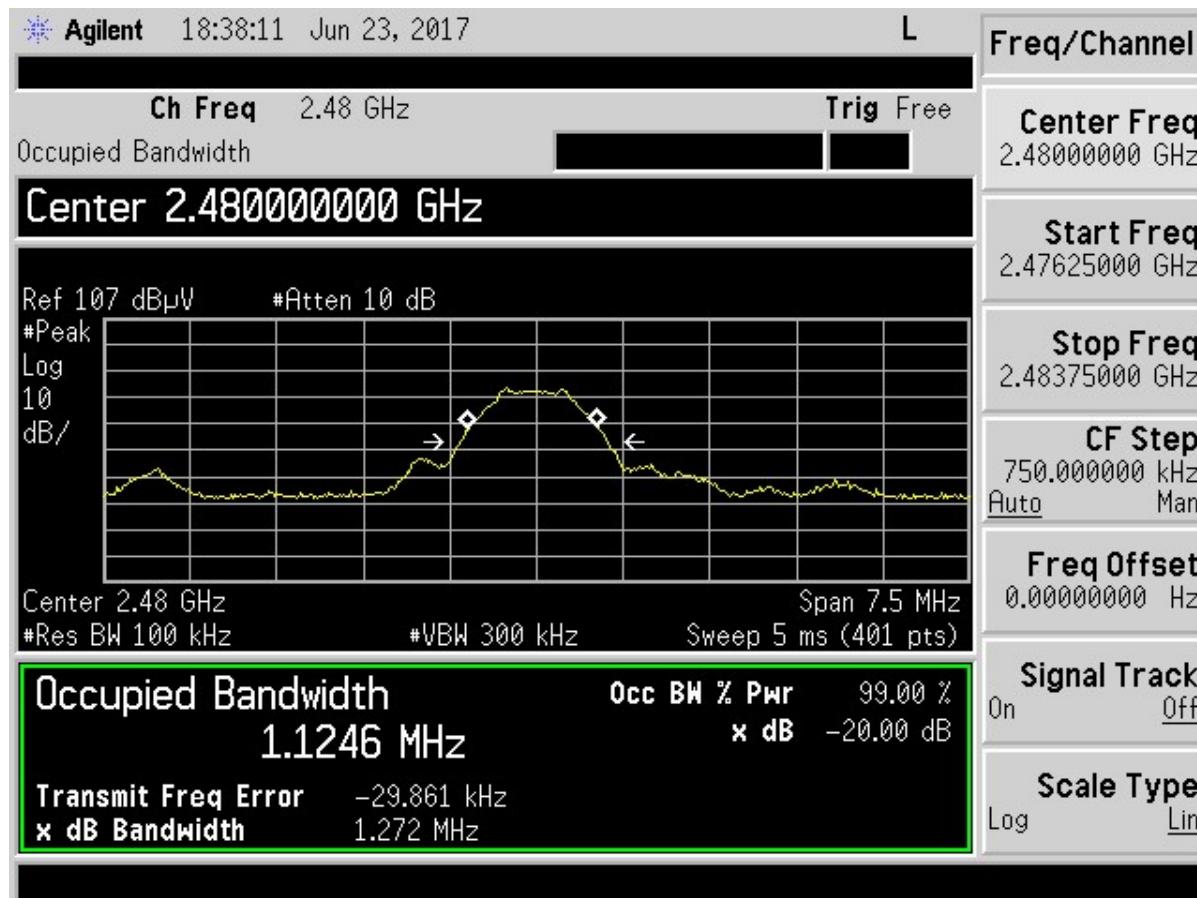


Figure 11. 99% Bandwidth -IC RSS 210, A8.1 – High Channel

US Tech Test Report:	FCC Part 15 Certification/ RSS 210
FCC ID:	2AL4P-SEN4W
IC:	22720-SEN4W
Test Report Number:	17-0127
Issue Date:	July 10, 2017
Customer:	Tymtix Technologies Private Ltd
Model:	<u>SEN4W</u>

## 2.13 Unintentional Radiator, Powerline Emissions (CFR 15.107)

The power line conducted voltage emission measurements have been carried out in accordance with CFR 15.107, per ANSI C63.4:2014, Paragraph 7, with a spectrum analyzer connected to a LISN and the EUT placed into a continuous mode of transmission.

Since the EUT is battery powered, this test was not applied. The EUT is powered by two 3 V CR2477 type batteries.

**NOTE: The test data provided in this section is to support the Verification requirement for the digital apparatus and the radios within.**

**Table 12. Transmitter Power Line Conducted Emissions Test Data, Part 15.107**

150KHz to 30 MHz with Class B Limits						
Test: Power Line Conducted Emissions				Client: Tymtix Technologies Private LTD		
Project: 17-0127				Model: SEN4W		
Frequency (MHz)	Test Data (dBuV)	LISN+CL-PA (dB)	Results (dBuV)	AVG Limits (dBuV)	Margin (dB)	Detector PK, QP, or AVG
The EUT is battery powered: therefore this test is not applicable.						

SAMPLE CALCULATION: N/A

Date: June 23, 2017

Evaluated by

Signature: Robert K. Mills Name: Robert K. Mills

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

## 2.14 Unintentional Radiator, Radiated Emissions (CFR 15.109)

Radiated emissions disturbance Measurements were performed with an instrument having both peak and quasi-peak detectors over the frequency range of 30 MHz to 12.5 GHz. Measurements of the radiated emissions were made with the receiver antenna at a distance of 3 m from the boundary of the test unit.

The test antenna was varied from 1 m to 4 m in height while watching the analyzers' display for the maximum magnitude of the signal at the test frequency. The antenna polarization (horizontal or vertical) and test sample azimuth were varied during the measurements to find the maximum field strength readings to record.

The worst-case radiated emissions in the range of 30 MHz to 12.5 GHz are more than 20 dB below the limit.

**NOTE: The test data provided in this section is to support the Verification requirement for the digital apparatus and the radios within.**

**Table 13. Unintentional Radiator, Peak Radiated Emissions (CFR 15.109),  
30 MHz to 1000 MHz**

30 MHz to 1000 MHz with Class B Limits							
Test: Radiated Emissions				Client: Tymtix Technologies Private LTD			
Project: 17-0127				Model: SEN4W			
Frequency (MHz)	Test Data (dB <sub>uv</sub> )	AF+CA-AMP (dB/m)	Results (dB <sub>uV/m</sub> )	QP Limits (dB <sub>uV/m</sub> )	Antenna Distance/Polarization	Margin (dB)	Detector PK, or QP
No Emissions seen greater than 20 dB from the applicable limit.							

SAMPLE CALCULATION at: N/A

Date: June 23, 2017

Evaluated by   
Signature: Robert K. Mills

Name: Robert K. Mills

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model:

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

**Table 14. Unintentional Radiator, Peak Radiated Emissions (CFR 15.109),  
1 GHz to 12.5 GHz**

<b>1 GHz to 12.5 GHz with Class B Limits</b>							
<b>Test:</b> Radiated Emissions				<b>Client:</b> Tymtix Technologies Private Ltd			
<b>Project:</b> 17-0127				<b>Model:</b> SEN4W			
Frequency (MHz)	Test Data (dB <sub>B</sub> V)	AF+CA-AMP (dB/m)	Results (dB <sub>B</sub> V/m)	AVG Limits (dB <sub>B</sub> V/m)	Antenna Distance/Polarization	Margin (dB)	Detector PK, or AVG
No emissions seen greater than 20 dB below the applicable limit.							

Tested from 1 GHz to 12.5 GHz

SAMPLE CALCULATION: N/A

Date: June 23, 2017

Evaluated by

Signature: 

Name: Robert K. Mills

US Tech Test Report:  
FCC ID:  
IC:  
Test Report Number:  
Issue Date:  
Customer:  
Model: SEN4W

FCC Part 15 Certification/ RSS 210  
2AL4P-SEN4W  
22720-SEN4W  
17-0127  
July 10, 2017  
Tymtix Technologies Private Ltd  
SEN4W

## 2.15 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4-2:2011. A coverage factor of  $k=2$  was used to give a level of confidence of approximately 95%.

### 2.15.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is  $\pm 2.85$  dB.

This EUT is battery powered; therefore this tested was deemed not applicable.

### 2.15.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is  $\pm 5.40$  dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is  $\pm 5.19$  dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is  $\pm 5.08$  dB.

The data listed in this test report does have sufficient margin to negate the effects of uncertainty. Therefore, the EUT unconditionally meets this requirement.

## 3 Test Results

The EUT is deemed to have met all the applicable requirements for this evaluation.