



# FCC Part 15C Test Report

## FCC ID: 2AL5L810RT

Product Name:	TRANSCEIVER
Trademark:	OLOONG,VOELOON,VELLO,PROMASTER
Model Name :	810RT, 800RT, FB-TTL-C, FB-TTL-N, ST1C, ST1N
Prepared For :	<b>SHENZHEN TRONGASONIC ELECTRONICS CO.,LTD.</b>
Address :	No.10,North Youyi Road,Nianfeng,Pingdi,Longgang,ShenZhen,China
Prepared By :	<b>Shenzhen BCTC Technology Co., Ltd.</b>
Address :	No.101, Yousong Road, Longhua New District, Shenzhen,China
Test Date:	May 08 - May 12, 2017
Date of Report :	May 12, 2017
Report No.:	<b>BCTC-FY170502618E</b>



## VERIFICATION OF COMPLIANCE

**Applicant's name** ..... : **SHENZHEN TRONGASONIC ELECTRONICS CO.,LTD.**

Address ..... : No.10,North Youyi Road, Nianfeng, Pingdi, Longgang, Shenzhen, China

**Manufacture's Name** ..... : **SHENZHEN TRONGASONIC ELECTRONICS CO.,LTD.**

Address ..... : No.10,North Youyi Road, Nianfeng, Pingdi, Longgang, Shenzhen, China

**Product description**

Product name ..... : TRANSCEIVER

Trademark: OLOONG,VOELOON,VELLO,PROMASTER

Model Name: 810RT, 800RT, FB-TTL-C, FB-TTL-N, ST1C, ST1N

Standards: FCC Part15.249  
ANSI C63.10-2013

This device described above has been tested by BCTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BCTC, this document may be altered or revised by BCTC, personal only, and shall be noted in the revision of the document.

Test Result ..... : **Pass**

Prepared by(Engineer): Eric Yang

Reviewer(Supervisor): Jade Yang

Approved(Manager): Carson Zhang





Table of Contents	Page
<b>1 . SUMMARY OF TEST RESULTS</b>	<b>5</b>
<b>1.1 TEST FACILITY</b>	<b>5</b>
<b>1.2 MEASUREMENT UNCERTAINTY</b>	<b>5</b>
<b>2 . GENERAL INFORMATION</b>	<b>6</b>
<b>2.1 GENERAL DESCRIPTION OF EUT</b>	<b>6</b>
<b>2.2 DESCRIPTION OF TEST MODES</b>	<b>7</b>
<b>2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING</b>	<b>7</b>
<b>2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED</b>	<b>8</b>
<b>2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)</b>	<b>9</b>
<b>2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>	<b>10</b>
<b>3 . EMC EMISSION TEST</b>	<b>11</b>
<b>3.1 CONDUCTED EMISSION MEASUREMENT</b>	<b>11</b>
<b>3.1.1 POWER LINE CONDUCTED EMISSION LIMITS</b>	<b>11</b>
<b>3.1.2 TEST PROCEDURE</b>	<b>11</b>
<b>3.1.3 DEVIATION FROM TEST STANDARD</b>	<b>11</b>
<b>3.1.4 TEST SETUP</b>	<b>12</b>
<b>3.1.5 EUT OPERATING CONDITIONS</b>	<b>12</b>
<b>3.1.6 TEST RESULTS</b>	<b>13</b>
<b>3.2 RADIATED EMISSION MEASUREMENT</b>	<b>15</b>
<b>3.2.1 RADIATED EMISSION LIMITS</b>	<b>15</b>
<b>3.2.2 TEST PROCEDURE</b>	<b>16</b>
<b>3.2.3 DEVIATION FROM TEST STANDARD</b>	<b>16</b>
<b>3.2.4 TEST SETUP</b>	<b>17</b>
<b>3.2.5 EUT OPERATING CONDITIONS</b>	<b>18</b>
<b>3.2.6 TEST RESULTS</b>	<b>19</b>
<b>4 . BANDWIDTH TEST</b>	<b>24</b>
<b>4.1 APPLIED PROCEDURES / LIMIT</b>	<b>24</b>
<b>4.1.1 TEST PROCEDURE</b>	<b>24</b>
<b>4.1.2 DEVIATION FROM STANDARD</b>	<b>24</b>
<b>4.1.3 TEST SETUP</b>	<b>24</b>
<b>4.1.4 EUT OPERATION CONDITIONS</b>	<b>24</b>
<b>4.1.5 TEST RESULTS</b>	<b>25</b>
<b>5 . 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE</b>	<b>28</b>
<b>5.1 DEVIATION FROM STANDARD</b>	<b>29</b>
<b>5.2 EUT OPERATION CONDITIONS</b>	<b>29</b>

**Table of Contents**

	<b>Page</b>
<b>5.3 TEST RESULTS</b>	<b>29</b>
<b>6 . ANTENNA REQUIREMENT</b>	<b>32</b>
<b>6.1 STANDARD REQUIREMENT</b>	<b>32</b>
<b>6.2 EUT ANTENNA</b>	<b>32</b>
<b>7 . EUT TEST PHOTO</b>	<b>33</b>
<b>8 . EUT PHOTO</b>	<b>35</b>



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.249) , Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207(a)	Conducted Emission	PASS	
15.209(a)&&15.249(a)&15.249(c)&15.205(a)	Fundamental &Radiated Spurious Emission Measurement	PASS	
15.215(c)	Bandwidth	PASS	
15.249(d)	Band Edge Emission	PASS	
15.203	Antenna Requirement	PASS	

### 1.1 TEST FACILITY

Shenzhen BCTC Technology Co., Ltd.

Add.:No.101, Yousong Road, Longhua New District, Shenzhen, China

FCC Registration No.:187086

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 % .

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 1.38\text{dB}$
2	RF power, conducted	$\pm 0.16\text{dB}$
3	Spurious emissions, conducted	$\pm 0.21\text{dB}$
4	All emissions, radiated(<1G)	$\pm 4.68\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^\circ\text{C}$
7	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	TRANSCEIVER								
Trade Name	OLOONG,VOELOON,VELLO,PROMASTER								
Model Name	810RT								
Serial Model	800RT, FB-TTL-C, FB-TTL-N, ST1C, ST1N								
Model Difference	All the model are the same circuit and RF module,except model names.								
Product Description	<table border="1"><tr><td>Operation Frequency:</td><td>2404.001-2471.501MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Number Of Channel</td><td>16 CH</td></tr><tr><td>Antenna Designation:</td><td>Please see Note 3.</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency:	2404.001-2471.501MHz	Modulation Type:	GFSK	Number Of Channel	16 CH	Antenna Designation:	Please see Note 3.
Operation Frequency:	2404.001-2471.501MHz								
Modulation Type:	GFSK								
Number Of Channel	16 CH								
Antenna Designation:	Please see Note 3.								
Channel List	Please refer to the Note 2.								
Battery	DC 3V by "AA" battery								
Connecting I/O Port(s)	Please refer to the User's Manual								
hardware version	-								
Software version	-								

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2404.001	07	3431.001	13	2458.001
02	2408.501	08	2435.501	14	2462.501
03	2413.001	09	2440.001	15	2467.001
04	2417.501	10	2444.501	16	2471.501
05	2422.001	11	2449.001		
06	2426.501	12	2453.501		

3.

Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	N/A	N/A	Internal Antenna	N/A	2.0dBi	

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH01	GFSK
Mode 2	CH08	
Mode 3	CH16	
Mode 4	Link mode	

Note:

- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) Fully-charged battery is used during the test

## 2.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Frequency	2404.001 MHz	2435.501 MHz	2471.501 MHz
Channel	Low	Middle	High




## 2.4 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Emission Test

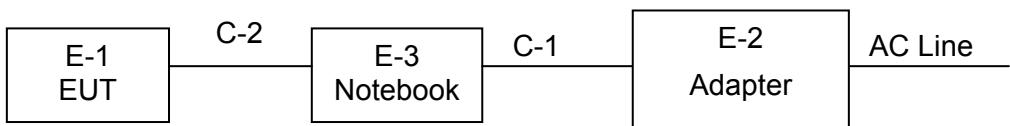



## 2.5 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	TRANSCEIVER	OLOONG,VOELOON, VELLO,PROMASTER	810RT	N/A	EUT
E-2	Adapter	N/A	A8A-501000	N/A	Lab Provide
E-3	Notebook	Lenovo	S2	N/A	Lab Provide

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.5m	DC Line
C-2	NO	NO	0.8m	USB Line

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



## 2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

### Radiation Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4407B	MY45108040	2016.08.27	2017.08.26
2	Test Receiver (9kHz-7GHz)	R&S	ESPI	101318	2016.08.27	2017.08.26
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB 9168	VULB91 68-438	2016.08.27	2017.08.26
4	Horn Antenna (1GHz-18GHz)	SCHWARZBECK	BBHA9120D	1201	2016.09.03	2017.09.03
5	Horn Antenna (14GHz-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	2016.09.03	2017.09.03
6	Amplifier (9KHz-6GHz)	SCHWARZBECK	BBV9744	9744-0037	2016.08.27	2017.08.26
7	Amplifier (1GHz-18GHz)	SCHWARZBECK	BBV9718	9718-309	2016.08.27	2017.08.26
8	Amplifier (18GHz-40GHz)	SCHWARZBECK	BBV 9721	9721-205	2016.08.27	2017.08.26
9	Loop Antenna (9KHz-30MHz)	SCHWARZBECK	FMZB1519B	00014	2016.09.03	2017.09.03
10	RF cables1 (9kHz-1GHz)	R&S	R203	R20X	2016.08.27	2017.08.26
11	RF cables2 (1GHz-40GHz)	R&S	R204	R21X	2016.08.27	2017.08.26
12	Antenna connector	Florida RF Labs	N/A	RF 01#	2016.08.27	2017.08.26
13	Power Meter	ANRITSU	ML2487A	6K00001568	2016.08.27	2017.08.26
14	Power Sensor (AV)	ANRITSU	ML2491A	030989	2016.08.27	2017.08.26
15	Signal Analyzer 9kHz-26.5GHz	Agilent	N9010A	MY48030494	2016.08.27	2017.08.26
16	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	2016.08.27	2017.08.26
17	D.C. Power Supply	LongWei	PS-305D	010964729	2016.08.27	2017.08.26

### Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Test Receiver	R&S	ESCI	1166.5950K03-10 1165-ha	2016.06.06	2017.06.05
2	LISN	R&S	NSLK81 26	812646 6	2016.08.25	2017.08.24
3	LISN	R&S	NSLK81 26	812648 7	2016.08.25	2017.08.24
4	50Ω Coaxial Switch	Anritsu	MP59B	6200264417	2016.06.07	2017.06.06
5	RF cables	R&S	R204	R20X	2016.07.06	2017.07.05



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


#### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

#### 3.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.1.4 TEST SETUP

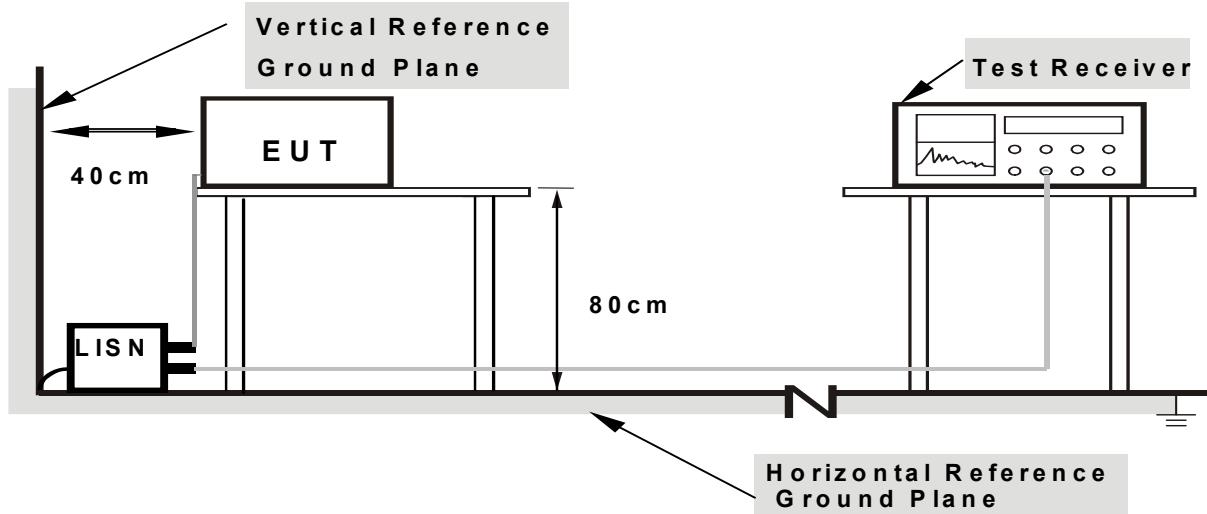

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.



### 3.1.6 TEST RESULTS

Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 4

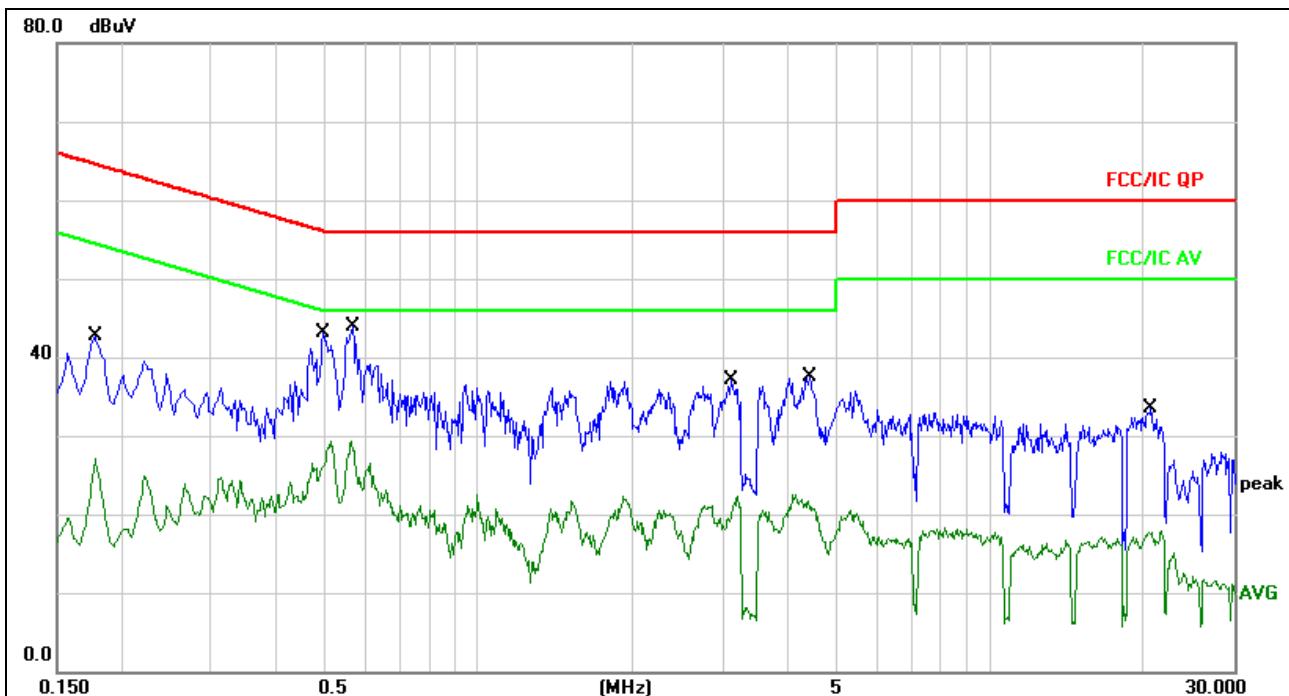


#### Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		0.1780	33.11	9.66	42.77	64.57	-21.80	QP	
2		0.1780	17.35	9.66	27.01	54.57	-27.56	AVG	
3		0.4980	33.42	9.68	43.10	56.03	-12.93	QP	
4		0.4980	19.59	9.68	29.27	46.03	-16.76	AVG	
5	*	0.5700	34.21	9.68	43.89	56.00	-12.11	QP	
6		0.5700	19.72	9.68	29.40	46.00	-16.60	AVG	
7		3.1180	27.39	9.72	37.11	56.00	-18.89	QP	
8		3.1180	12.48	9.72	22.20	46.00	-23.80	AVG	
9		4.4540	27.68	9.73	37.41	56.00	-18.59	QP	
10		4.4540	12.22	9.73	21.95	46.00	-24.05	AVG	
11		20.6420	23.67	9.85	33.52	60.00	-26.48	QP	
12		20.6420	8.04	9.85	17.89	50.00	-32.11	AVG	



Temperature :	26°C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	AC120V/60Hz	Test Mode :	Mode 4

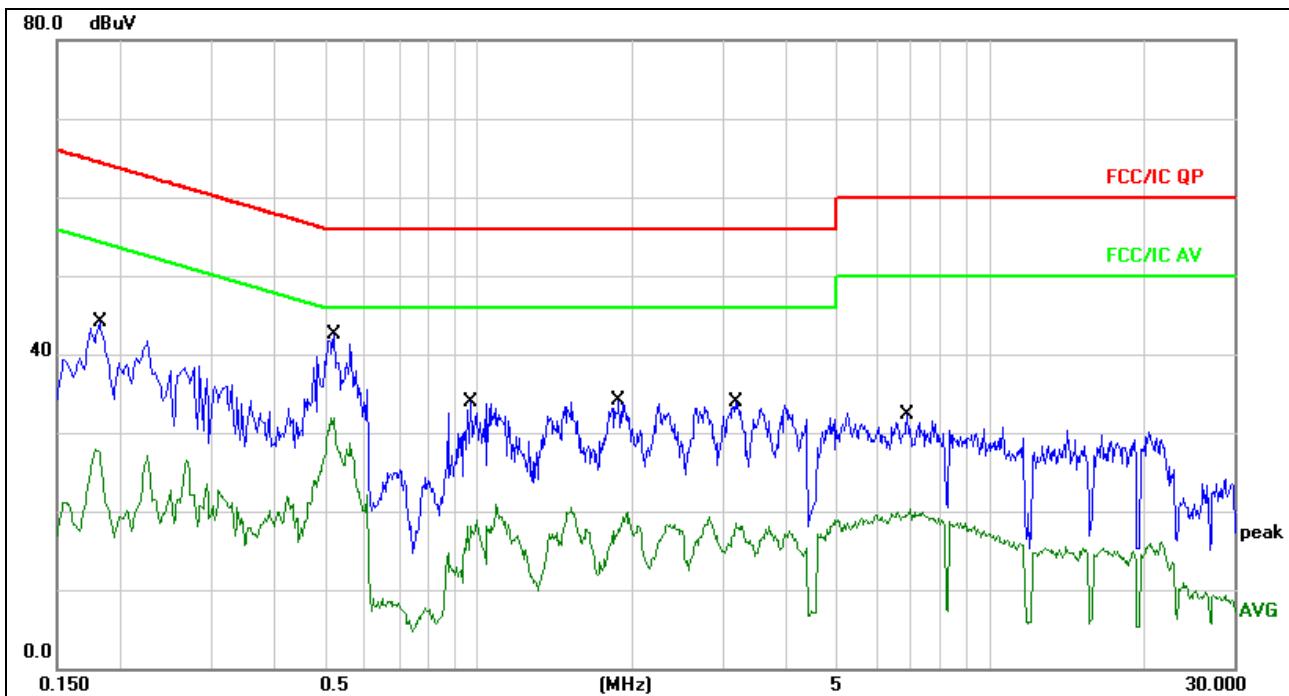**Remark:**

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dB	Detector	Comment
1		0.1819	34.37	9.66	44.03	64.39	-20.36	QP
2		0.1819	18.32	9.66	27.98	54.39	-26.41	AVG
3	*	0.5220	32.82	9.68	42.50	56.00	-13.50	QP
4		0.5220	22.22	9.68	31.90	46.00	-14.10	AVG
5		0.9660	24.17	9.69	33.86	56.00	-22.14	QP
6		0.9660	9.18	9.69	18.87	46.00	-27.13	AVG
7		1.8820	24.31	9.71	34.02	56.00	-21.98	QP
8		1.8820	10.20	9.71	19.91	46.00	-26.09	AVG
9		3.1820	24.20	9.72	33.92	56.00	-22.08	QP
10		3.1820	8.76	9.72	18.48	46.00	-27.52	AVG
11		6.9140	22.51	9.80	32.31	60.00	-27.69	QP
12		6.9140	10.46	9.80	20.26	50.00	-29.74	AVG



### 3.2 RADIATED EMISSION MEASUREMENT

#### 3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

#### FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5 <sup>th</sup> harmonic of the highest frequency or 40 GHz, whichever is lower



Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

### 3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 25GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 and 1.5 meters above the ground at a 3 meter semi-chamber test. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; above 1GHz, the height was 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response.

The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

### 3.2.4 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

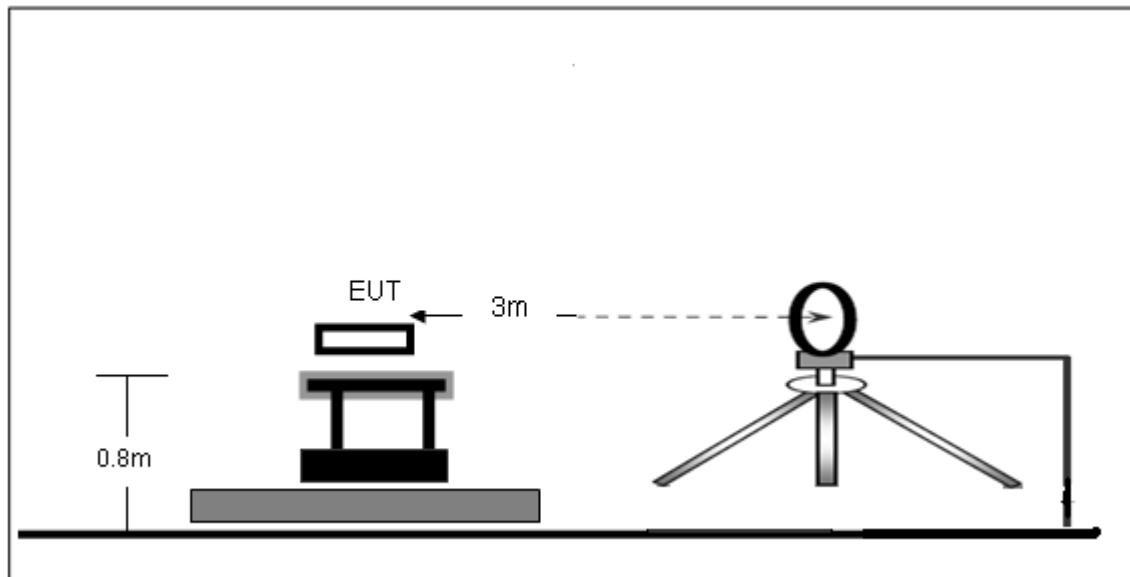

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

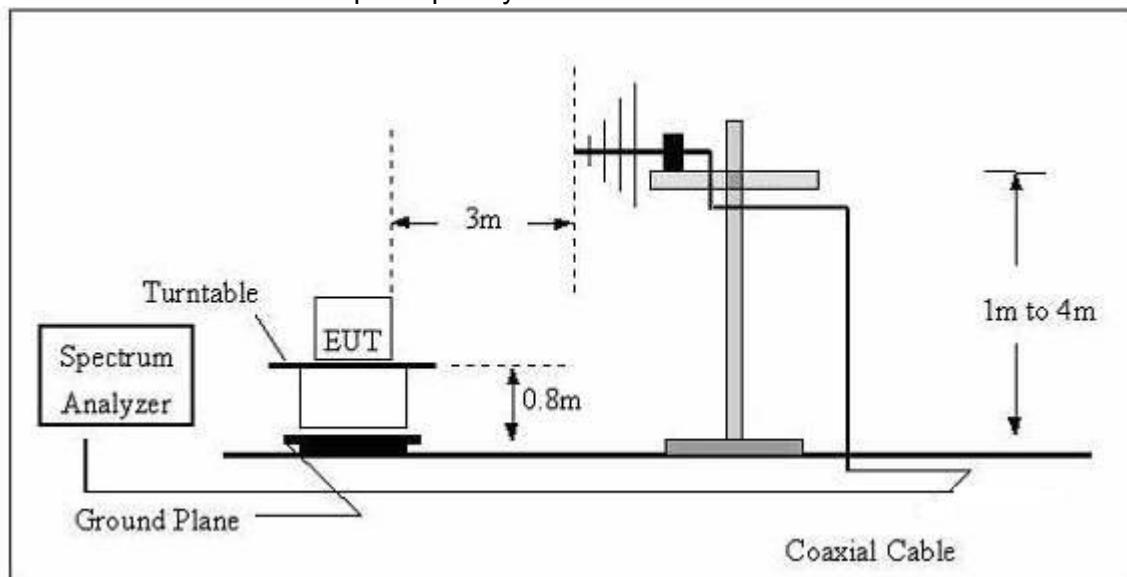

## (C) Radiated Emission Test-Up Frequency Above 1GHz

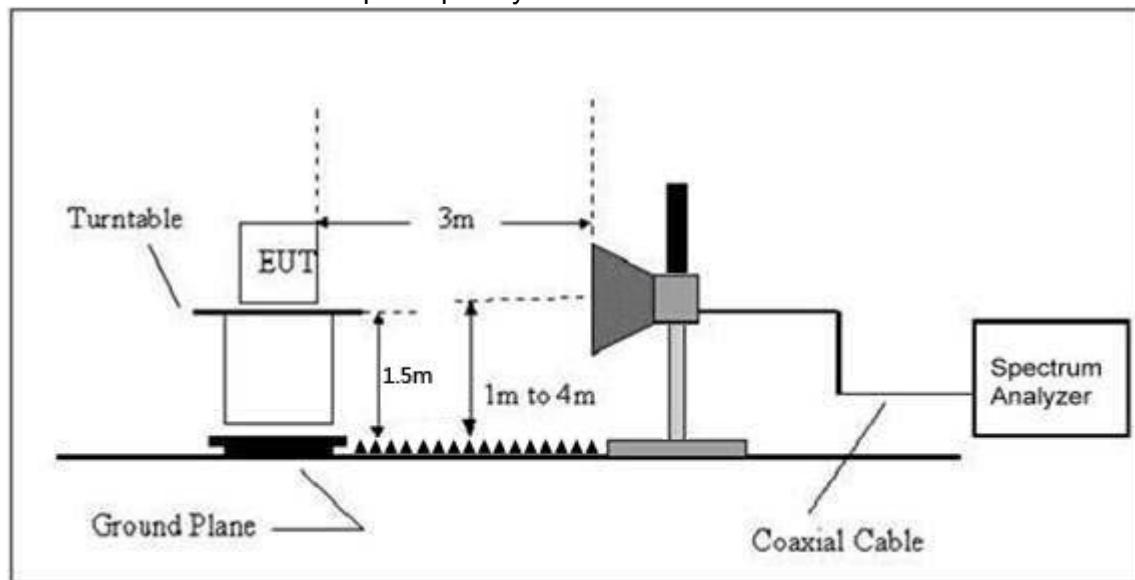

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



### 3.2.6 TEST RESULTS

#### Radiated Spurious Emission (Below 30MHz )

Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 3V		
Test Mode :	Mode 4		

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State
--	--	--	--	P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =40 log (specific distance/test distance)(dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.



## Radiated Spurious Emission (Between 30MHz – 1GHz)


Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3V		
Test Mode : (Worst)	Mode 4		

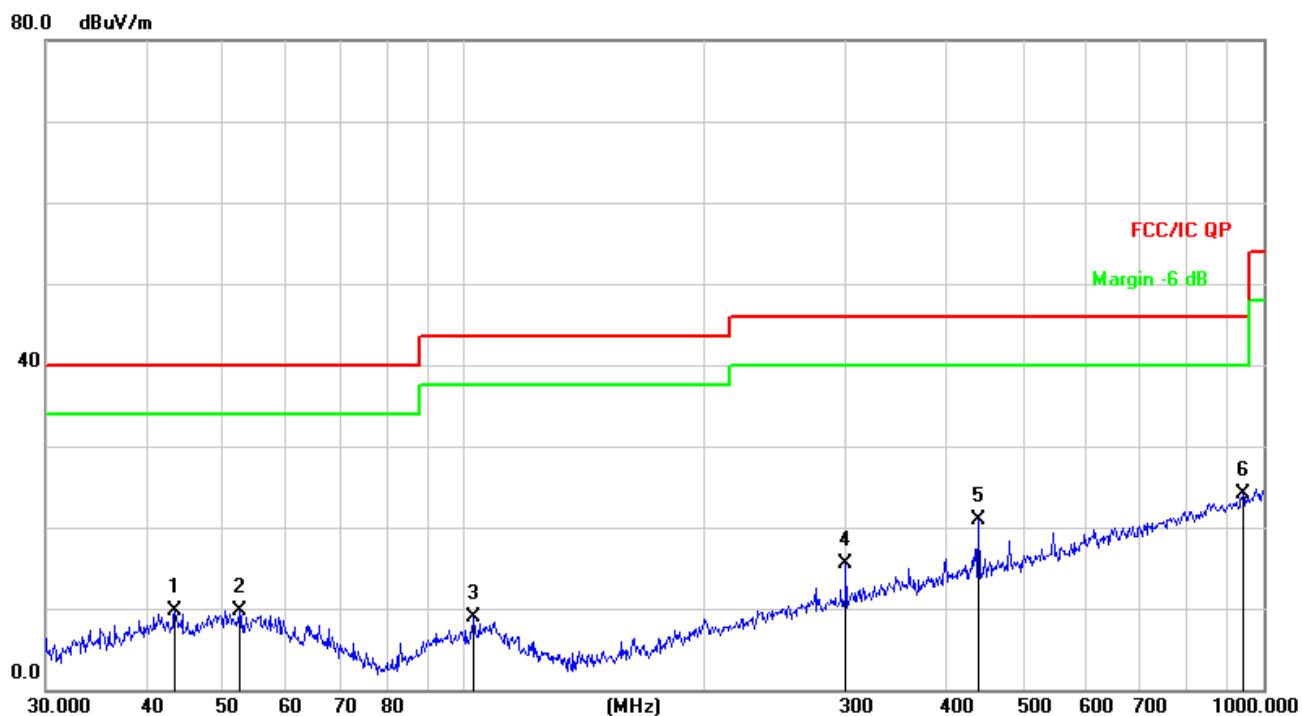

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		43.5057	24.67	-14.91	9.76	40.00	-30.24	QP
2		52.3912	24.44	-14.78	9.66	40.00	-30.34	QP
3		102.7192	25.25	-16.31	8.94	43.50	-34.56	QP
4		300.3672	27.62	-12.09	15.53	46.00	-30.47	QP
5		440.1963	29.46	-8.55	20.91	46.00	-25.09	QP
6	*	942.1305	23.02	1.15	24.17	46.00	-21.83	QP



Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1010 hPa	Polarization :	Vertical
Test Voltage :	DC 3V		
Test Mode :	Mode 4 (Worst)		

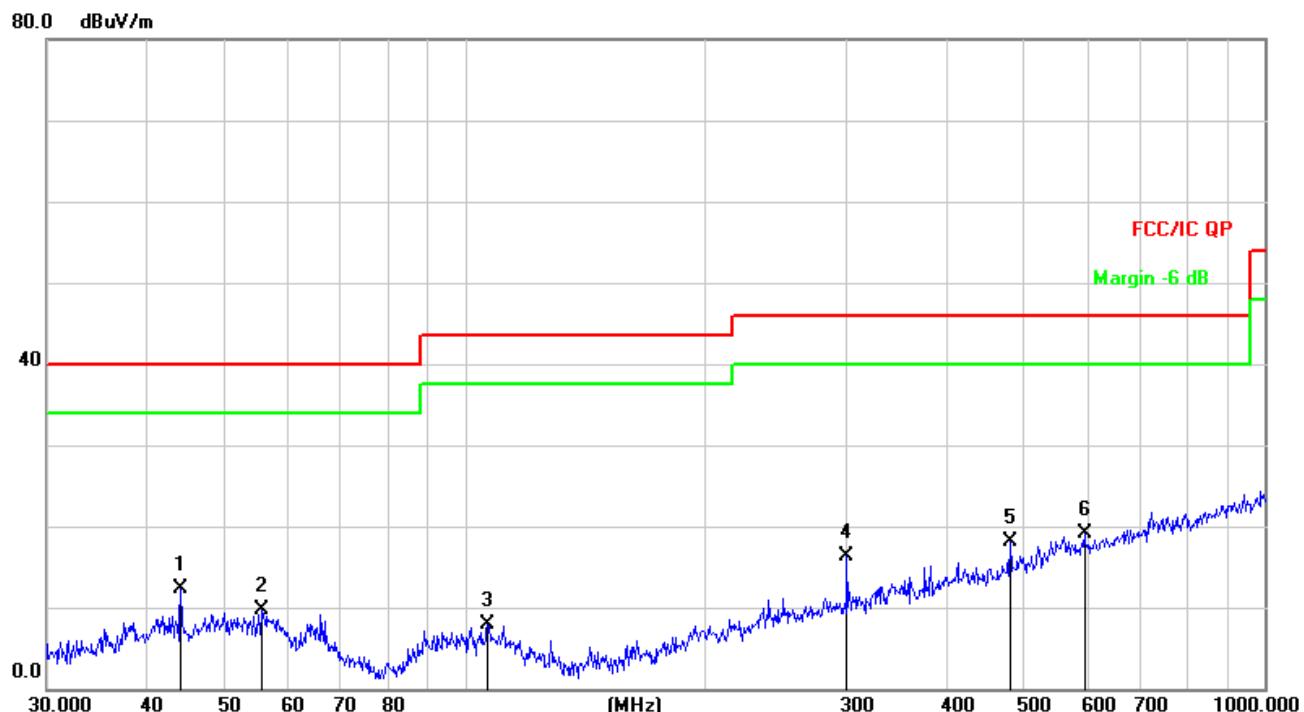

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		44.1202	27.16	-14.88	12.28	40.00	-27.72	QP
2		55.6094	25.02	-15.28	9.74	40.00	-30.26	QP
3		106.7587	24.25	-16.27	7.98	43.50	-35.52	QP
4		300.3672	28.36	-12.09	16.27	46.00	-29.73	QP
5		480.5276	25.70	-7.68	18.02	46.00	-27.98	QP
6	*	595.1329	23.77	-4.65	19.12	46.00	-26.88	QP

Radiated Spurious Emission ( 1GHz to 10<sup>th</sup> harmonics)

## GFSK

	Freq.	Receiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Result
	(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	
Lower Channel 2404.001 MHz	2404.001	93.36	PK	H	13.72	107.08	114	Pass
	2404.001	73.71	Ave	H	13.72	87.43	94	Pass
	4808.002	50.28	PK	H	19.28	69.56	74	Pass
	4808.002	31.45	Ave	H	19.28	50.73	54	Pass
	12020.005	28.24	PK	H	17.5	45.74	74	Pass
	16828.007	23.39	PK	H	24.94	48.33	74	Pass
	2404.001	91.67	PK	V	13.72	105.39	114	Pass
	2404.001	70.33	Ave	V	13.72	84.05	94	Pass
	4808.002	49.26	PK	V	19.28	68.54	74	Pass
	4808.002	27.13	Ave	V	19.28	46.41	54	Pass
	12020.005	28.43	PK	V	17.5	45.93	74	Pass
	16828.007	22.50	PK	V	24.94	47.44	74	Pass
Middle Channel 2435.501 MHz	2435.501	94.62	PK	H	14.37	108.99	114	Pass
	2435.501	72.09	Ave	H	14.37	86.46	94	Pass
	4871.002	51.38	PK	H	15.24	66.62	74	Pass
	4871.002	31.24	Ave	H	15.24	46.48	54	Pass
	12177.505	28.94	PK	H	18.32	47.26	74	Pass
	17048.507	23.36	PK	H	25.96	49.32	74	Pass
	2435.501	92.53	PK	V	14.37	106.9	114	Pass
	2435.501	72.27	Ave	V	14.37	86.64	94	Pass
	4871.002	48.69	PK	V	15.24	63.93	74	Pass
	4871.002	27.11	Ave	V	15.24	42.35	54	Pass
	12177.505	24.48	PK	V	18.32	42.8	74	Pass
	17048.507	21.62	PK	V	25.96	47.58	74	Pass
High Channel 2471.501 MHz	2471.501	93.75	PK	H	14.92	108.67	114	Pass
	2471.501	73.58	Ave	H	14.92	88.5	94	Pass
	4943.002	49.27	PK	H	19.74	69.01	74	Pass



4943.002	28.15	Ave	H	19.74	47.89	54	Pass
12357.505	25.56	PK	H	17.81	43.37	74	Pass
17300.507	21.33	PK	H	25.41	46.74	74	Pass
2471.501	91.40	PK	V	14.92	106.32	114	Pass
2471.501	71.48	Ave	V	14.92	86.4	94	Pass
4943.002	47.23	PK	V	19.74	66.97	74	Pass
4943.002	28.59	Ave	V	19.74	48.33	54	Pass
12357.505	28.13	PK	V	17.81	45.94	74	Pass
17300.507	20.68	PK	V	25.41	46.09	74	Pass

**Remark:**

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Emission Level = Meter Reading + Factor

Margin = Emission Level - Limit

Other harmonics emissions are lower than 20dB below the allowable limit.



## 4. BANDWIDTH TEST

### 4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.249) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.249	Bandwidth	(20dB bandwidth)	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	100KHz
VB	$\geq$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW $\geq$  RBW, Sweep time = Auto.

#### 4.1.2 DEVIATION FROM STANDARD

No deviation.

#### 4.1.3 TEST SETUP



#### 4.1.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.




#### 4.1.5 TEST RESULTS

EUT :	TRANSCEIVER	Model Name :	810RT
Temperature :	25 °C	Relative Humidity :	55%
Pressure :	1012 hPa	Test Voltage :	DC 3V
Test Mode :	CH01 / CH08 /C16		

	Frequency	20dB Bandwidth (kHz)	Result
GFSK	2404.001 MHz	2383	<b>PASS</b>
	2435.501 MHz	2355	<b>PASS</b>
	2471.501 MHz	2343	<b>PASS</b>

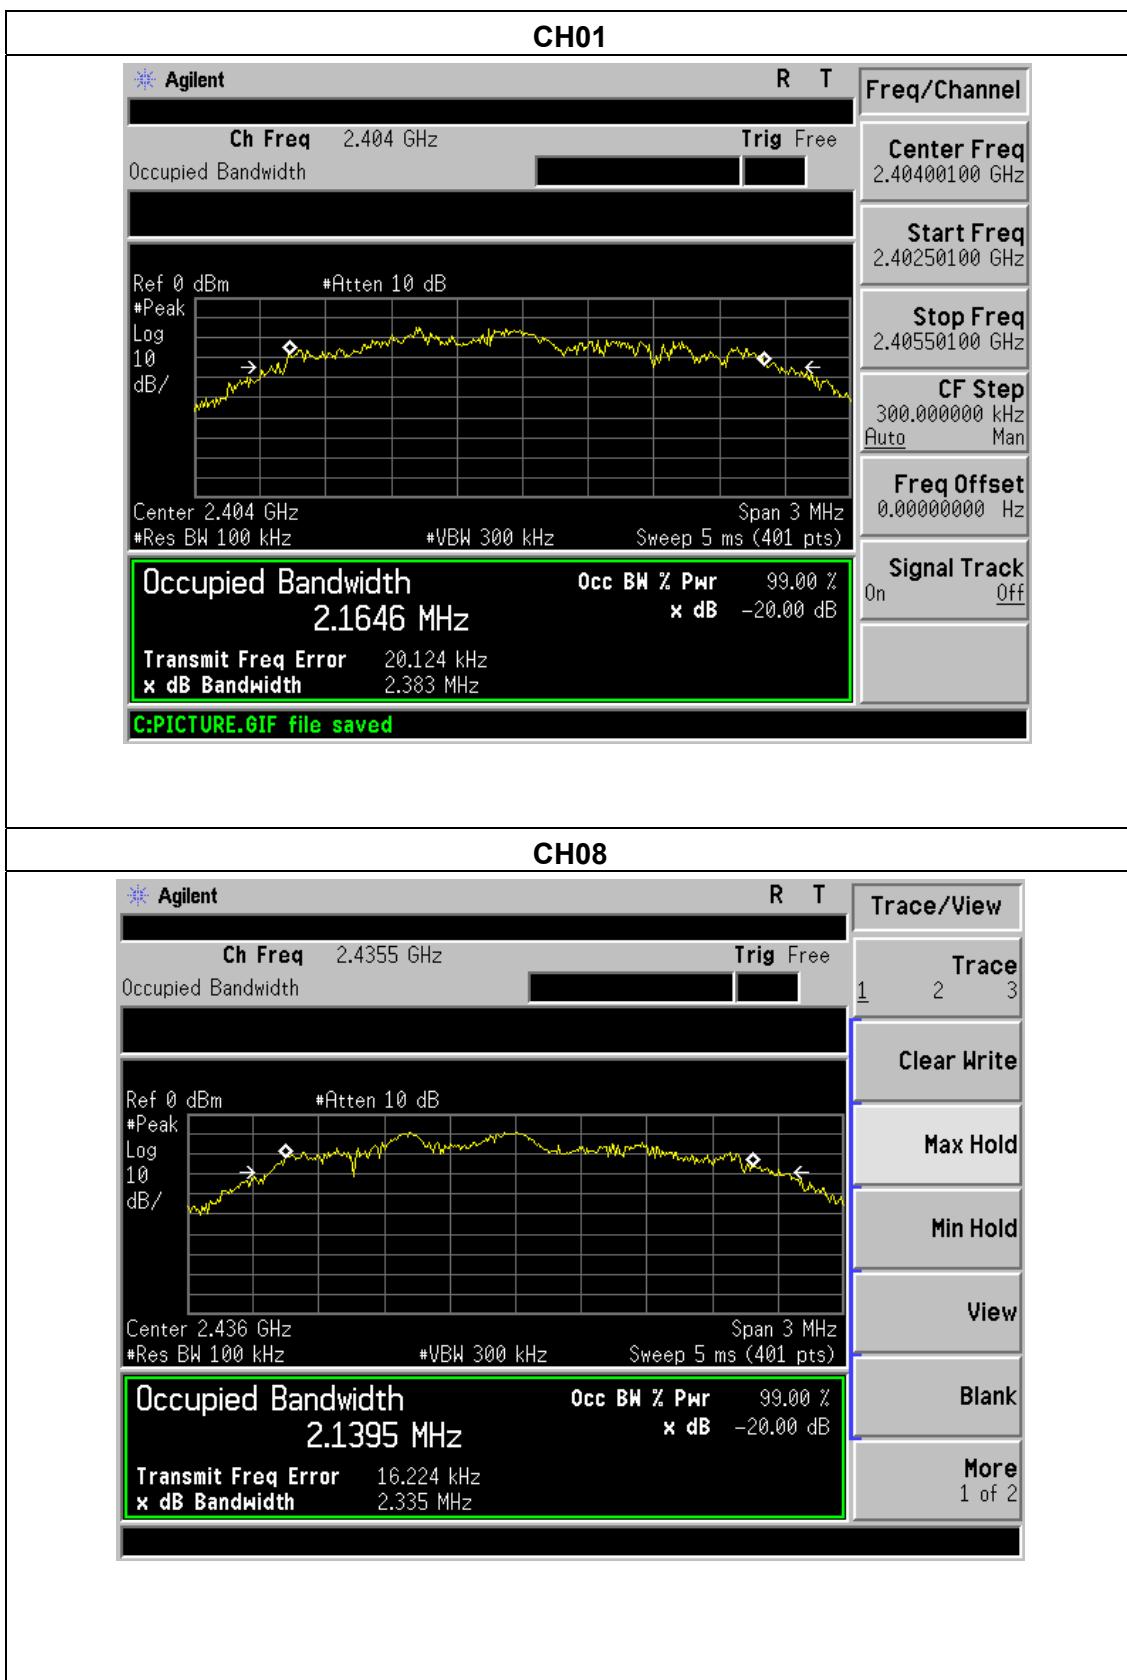

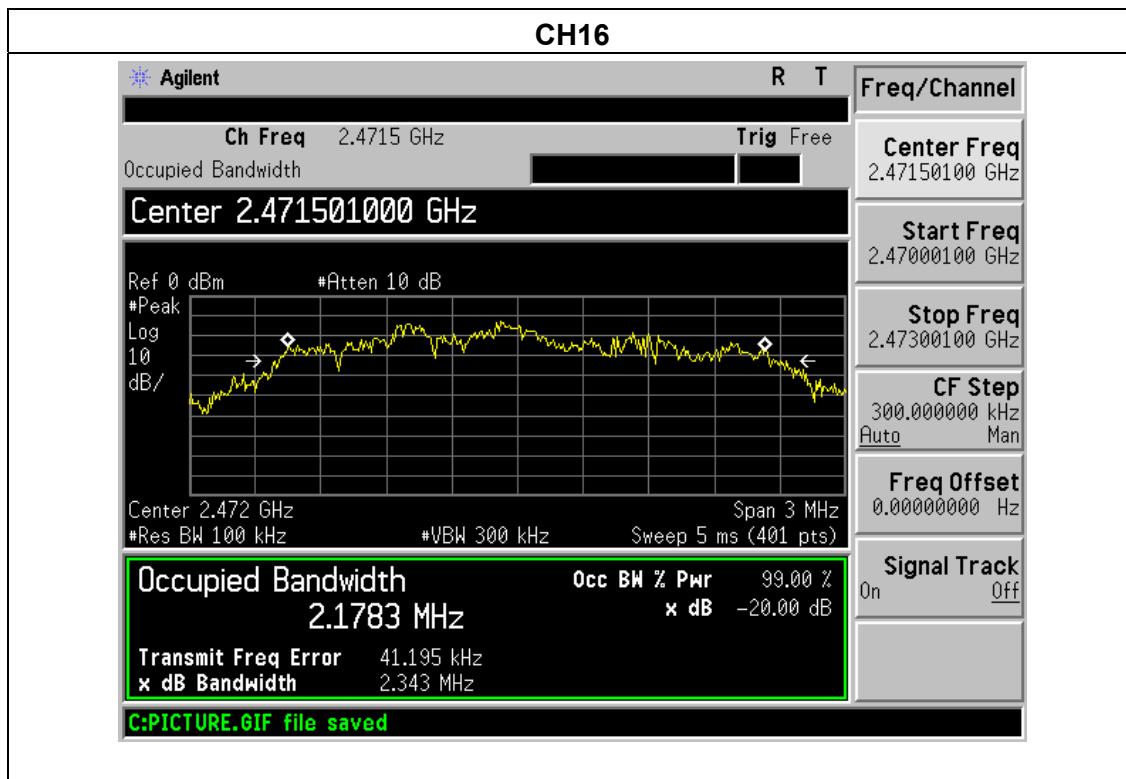



## 5. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE

### APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)(c)

### TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

#### Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported



## 5.1 DEVIATION FROM STANDARD


No deviation.

## 5.2 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

## 5.3 TEST RESULTS


Temperature :	25 °C	Relative Humidity :	54%
Pressure :	1012 hPa	Test Voltage :	DC 3V
Test Mode :	CH01/ CH16		

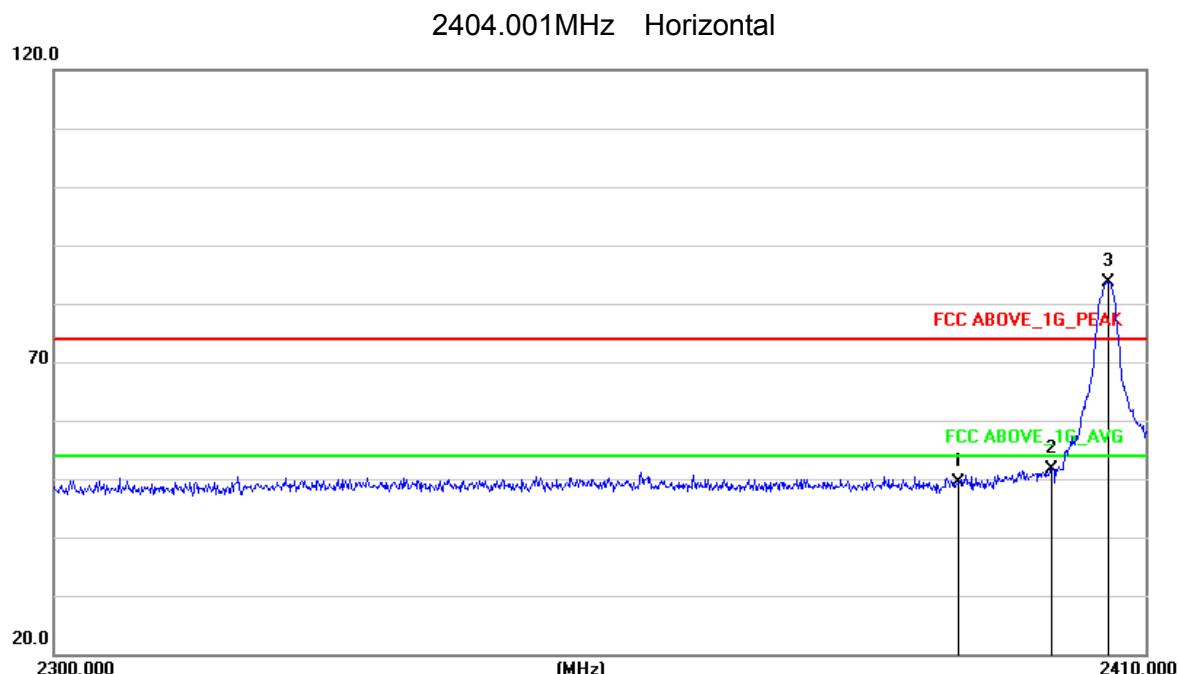

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2403.85	43.57	7.42	50.99	74.00	-23.01	peak
2	2400.50	45.82	7.42	53.24	74.00	-20.76	peak
3	2404.50	75.57	7.43	83.0	N/A	N/A	peak




## 2404.001MHz Vertical

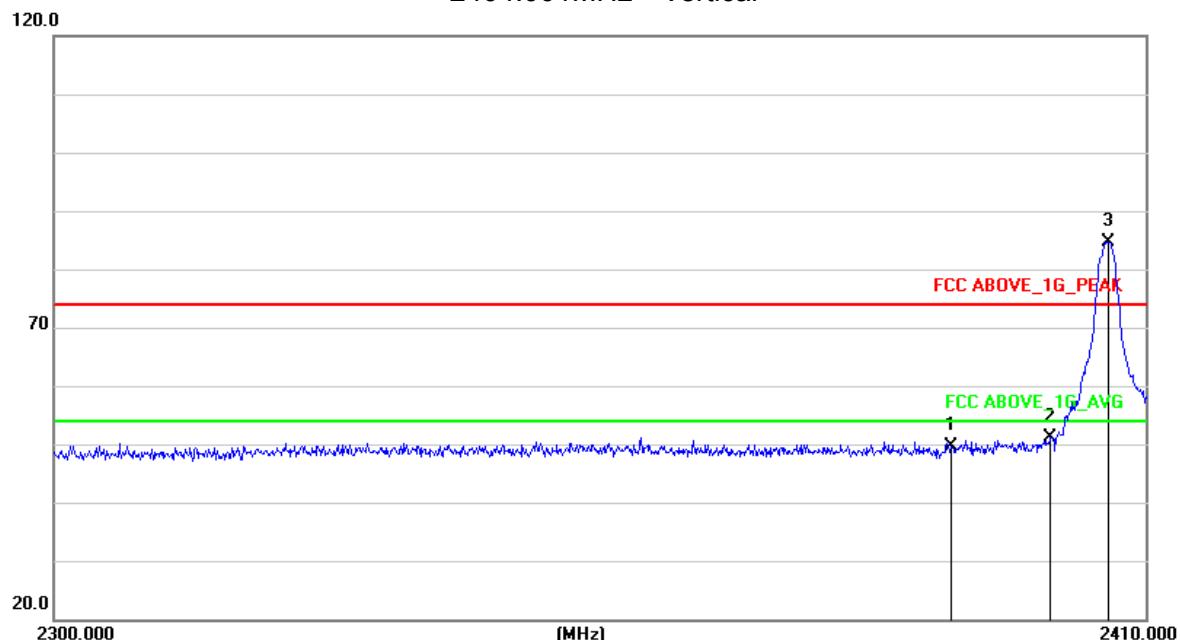

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2403.85	43.08	7.42	50.5	74.00	-23.5	peak
2	2400.0	43.74	7.42	51.16	74.00	-22.84	peak
3	2406.50	76.29	7.43	83.72	N/A	N/A	peak




## 2471.501MHz Horizontal

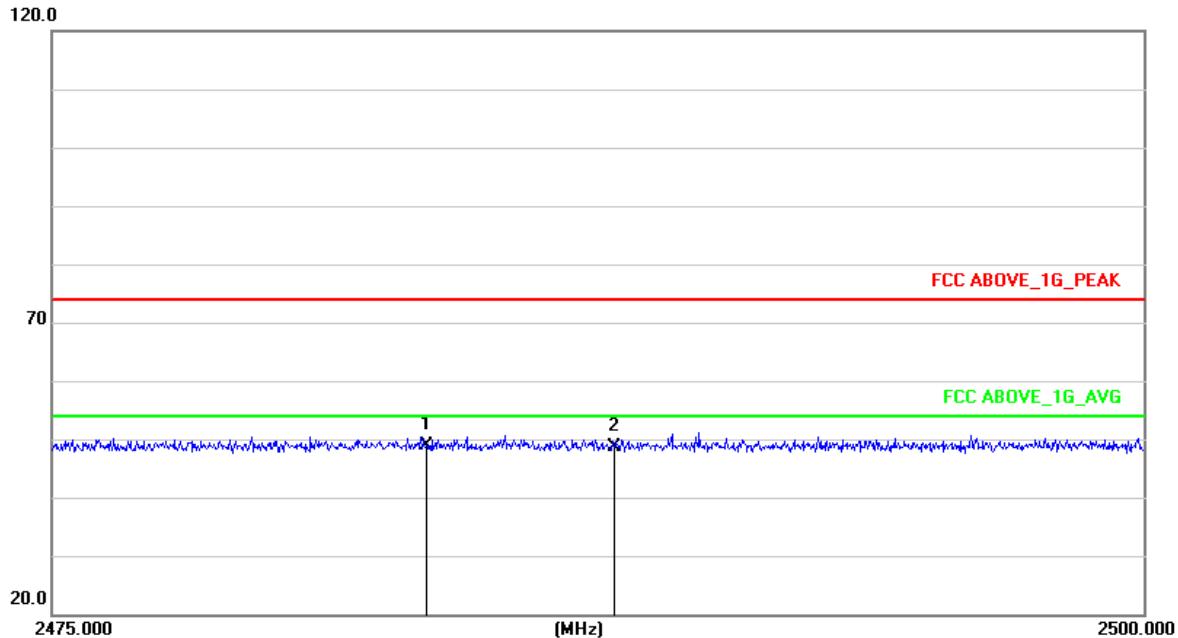

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.50	42.61	7.42	50.03	74	-23.97	peak
2	2487.50	42.27	7.45	49.72	74	-24.28	peak

## 2471.501MHz Vertical

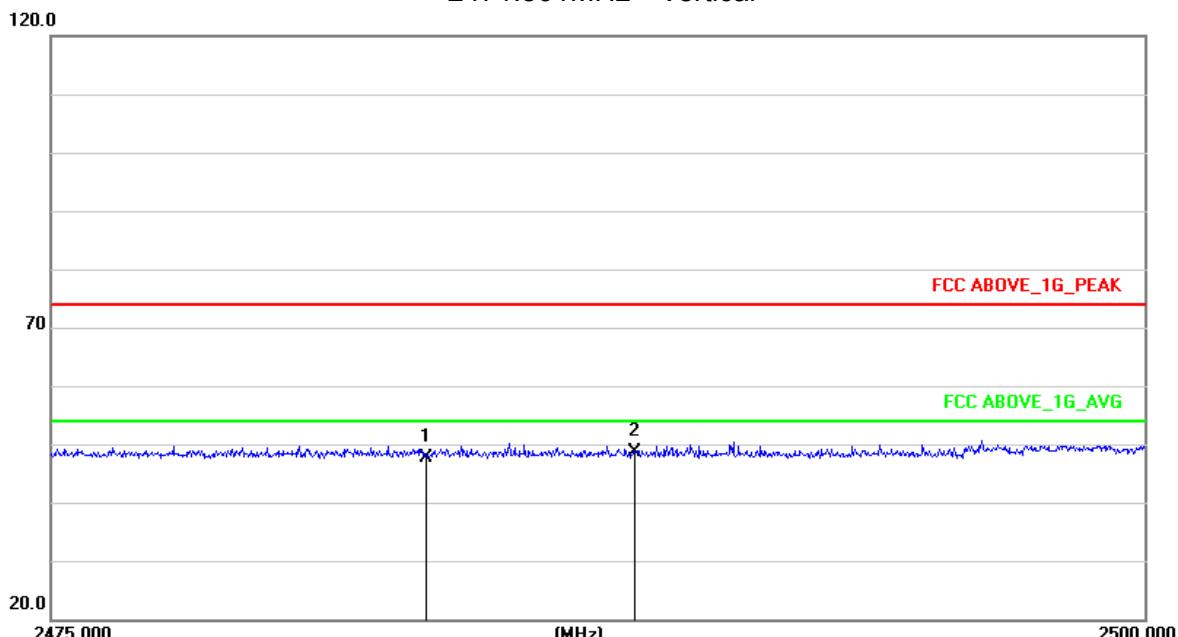

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5	41.24	4.39	45.63	74	-28.37	peak
2	2488.5	41.59	4.39	45.98	74	-28.02	peak

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.



## 6. ANTENNA REQUIREMENT

### 6.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 6.2 EUT ANTENNA

The EUT antenna is Internal antenna. It complies with the standard requirement.




## 7. EUT TEST PHOTO

**Conducted Measurement Photos**





### Radiated Measurement Photos

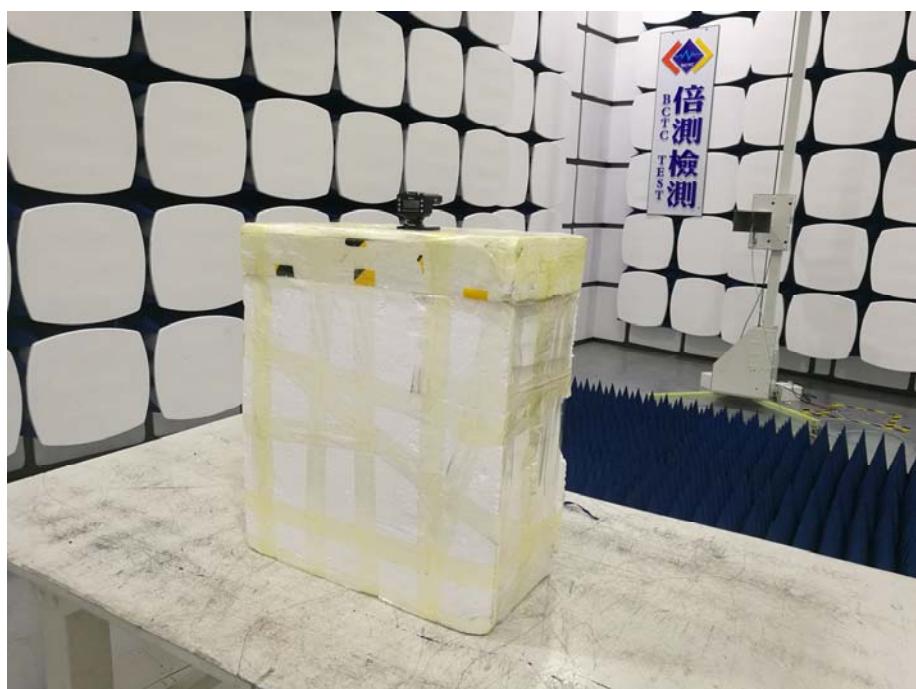

## 8. EUT PHOTO



\*\*\*\*\* END OF REPORT \*\*\*\*\*