

**TEST REPORT****Report No.: 17051484HKG-001**

Regulsmoke

Application For Certification  
(Original Grant)**FCC ID: 2AL6M-GC519024**

Transmitter

**PREPARED AND CHECKED BY:****APPROVED BY:**

Signed On File

Wong Cheuk Ho, Herbert  
Lead EngineerWong Kwok Yeung, Kenneth  
Senior Lead Engineer  
Date: September 04, 2017

**TEST REPORT****GENERAL INFORMATION**

<b>Grantee:</b>	Regulsmoke
<b>Grantee Address:</b>	105 Rue Anatole France, 92300 Levallois-Perret, France.
<b>Contact Person:</b>	Thierry Biarnes
<b>Tel:</b>	33(0)6 10 27 13 01
<b>Fax:</b>	N/A
<b>e-mail:</b>	tbiarnes@regulsmoke.com
<b>Manufacturer:</b>	ATM Factory
<b>Manufacturer Address:</b>	101, 14-2 Jixing 3nd Road, Ping Di, Long Gang District, Shenzhen, China.
<b>Brand Name:</b>	SMOKING STOPPER
<b>Model:</b>	RS001-2017
<b>Type of EUT:</b>	Transmitter
<b>Description of EUT:</b>	Smoking Cessation Method
<b>Serial Number:</b>	N/A
<b>FCC ID:</b>	2AL6M-GC519024
<b>Date of Sample Submitted:</b>	May 19, 2017
<b>Date of Test:</b>	May 19, 2017 to September 01, 2017
<b>Report No.:</b>	17051484HKG-001
<b>Report Date:</b>	September 04, 2017
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%

**TEST REPORT****SUMMARY OF TEST RESULT**

TEST SPECIFICATION	REFERENCE	RESULTS
Transmitter Power Line Conducted Emissions	15.207	Pass
Radiated Emission		
Radiated Emission on the Bandedge	15.249, 15.209	Pass
Radiated Emission in Restricted Bands	15.205	Pass

The equipment under test is found to be complying with the following standards:  
FCC Part 15, October 1, 2015 Edition

Note: 1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.  
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

**TEST REPORT****TABLE OF CONTENTS**

<b>1.0</b>	<b>GENERAL DESCRIPTION</b>	5
1.1	Product Description	5
1.2	Related Submittal(s) Grants	5
1.3	Test Methodology	5
1.4	Test Facility	5
<b>2.0</b>	<b>SYSTEM TEST CONFIGURATION</b>	6
2.1	Justification	6
2.2	EUT Exercising Software	6
2.3	Special Accessories	6
2.4	Measurement Uncertainty	6
2.5	Support Equipment List and Description	6
<b>3.0</b>	<b>EMISSION RESULTS</b>	7
3.1	Field Strength Calculation	7
3.2	Radiated Emission Configuration Photograph	8
3.3	Radiated Emission Data	8
3.4	Conducted Emission Configuration Photograph	8
3.5	Conducted Emission Data	8
<b>4.0</b>	<b>EQUIPMENT PHOTOGRAPHS</b>	14
<b>5.0</b>	<b>PRODUCT LABELLING</b>	14
<b>6.0</b>	<b>TECHNICAL SPECIFICATIONS</b>	14
<b>7.0</b>	<b>INSTRUCTION MANUAL</b>	14
<b>8.0</b>	<b>MISCELLANEOUS INFORMATION</b>	15
8.1	Measured Bandwidth / Radiated Emission on the Bandedge	15
8.2	Discussion of Pulse Desensitization	18
8.3	Calculation of Average Factor	18
8.4	Emissions Test Procedures	21
<b>9.0</b>	<b>EQUIPMENT LIST</b>	25

## TEST REPORT

### 1.0 GENERAL DESCRIPTION

#### 1.1 Product Description

The Equipment Under Test (EUT) is a Smoking Cessation Method which is a Bluetooth controlled cigarette case to help the user to control and quit smoking. It can be paired with a smartphone and operated by mobile APP. The APP will record the smoker information and control the cigarette consumption in order to help stop smoking. The EUT can only support Bluetooth 4.0 BLE that occupies a frequency range of 2402MHz to 2480MHz (40 channels with channel spacing of 2MHz). The EUT is powered by 3.7V internal rechargeable battery and/or USB port (5VDC). The USB port is for charging purpose only.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 1.2 Related Submittal(s) Grants

This is a single application for certification of a transmitter.

#### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

#### 1.4 Test Facility

The 3m Chamber and conducted measurement facility used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC.

**TEST REPORT****2.0 SYSTEM TEST CONFIGURATION****2.1 Justification**

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by new 3.7V rechargeable battery and/or USB Port (5VDC). Both powering method were tested. Only worse case data is presented in this report (powered by USB port of notebook computer).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

**2.2 EUT Exercising Software**

The EUT exercise program (if any) used during radiated testing was designed to exercise the various system components in a manner similar to a typical use.

**2.3 Special Accessories**

There are no special accessories necessary for compliance of this product.

**2.4 Measurement Uncertainty**

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

**2.5 Support Equipment List and Description**

1. HP Notebook Computer (Adaptor Model: HSTNN-CA15)
2. LAN cable of 2 Meter Long  
(Provided by Intertek)
3. USB cable of 0.4 Meter Long  
(Provided by Applicant)

**TEST REPORT****3.0 EMISSION RESULTS**

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

**3.1 Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in  $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in  $\text{dB}\mu\text{V}/\text{m}$

RR = RA - AG - AV in  $\text{dB}\mu\text{V}$

LF = CF + AF in dB

Assume a receiver reading of 52.0  $\text{dB}\mu\text{V}$  is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 32  $\text{dB}\mu\text{V}/\text{m}$ . This value in  $\text{dB}\mu\text{V}/\text{m}$  was converted to its corresponding level in  $\mu\text{V}/\text{m}$ .

$$RA = 52.0 \text{ dB}\mu\text{V}/\text{m}$$

$$AF = 7.4 \text{ dB}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm } [(27 \text{ dB}\mu\text{V}/\text{m})/20] = 22.4 \mu\text{V}/\text{m}$$

**TEST REPORT****3.2 Radiated Emission Configuration Photograph**

The worst case in radiated emission was found at 435.524 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

**3.3 Radiated Emission Data**

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 6.0 dB

**3.4 Conducted Emission Configuration Photograph**

The worst case in line-conducted emission was found at 0.155 MHz

For electronic filing, the worst case line-conducted configuration photographs are saved with filename: conducted photo.pdf.

**3.5 Conducted Emission Data**

For electronic filing, the graph and data table of conducted emission is saved with filename: conducted.pdf.

Judgment: Pass by 6.1 dB


## TEST REPORT

### CONDUCTED EMISSION

Model: RS001-2017

Date of Test: September 01, 2017

Worst-Case Operating Mode: PC Charging + Bluetooth operating

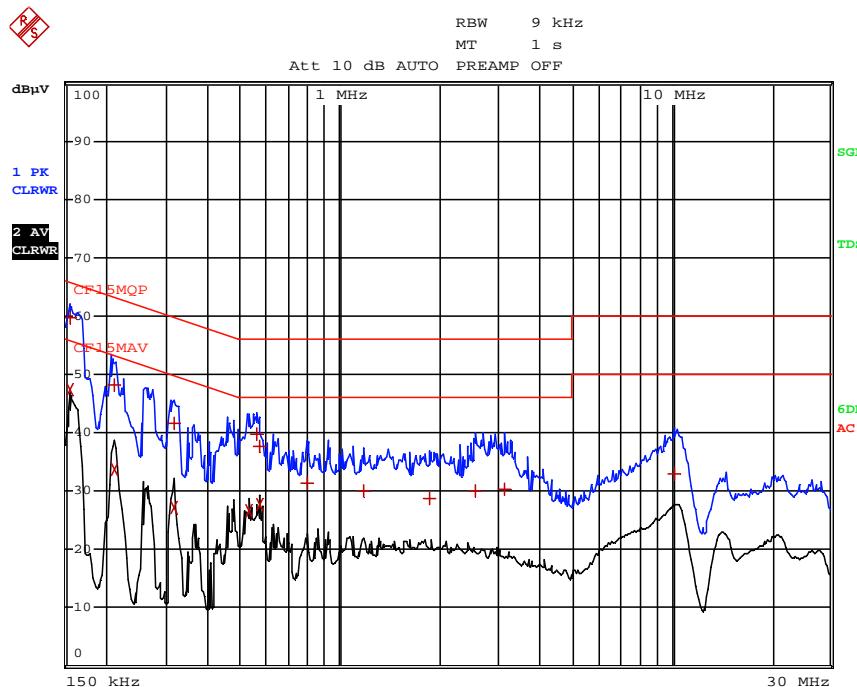

EDIT PEAK LIST (Final Measurement Results)					
Trace1:	CF15MQP	Trace2:	CF15MAV	Trace3:	---
TRACE	FREQUENCY	LEVEL	dB $\mu$ V	DELTA	LIMIT dB
1	Quasi Peak 154.5 kHz	59.65	N	-6.10	
2	CISPR Average 154.5 kHz	47.48	L1	-8.26	
1	Quasi Peak 213 kHz	48.06	N	-15.02	
2	CISPR Average 213 kHz	33.64	N	-19.43	
1	Quasi Peak 316.5 kHz	41.72	N	-18.07	
2	CISPR Average 316.5 kHz	27.11	L1	-22.67	
2	CISPR Average 528 kHz	26.72	N	-19.27	
1	Quasi Peak 559.5 kHz	39.65	N	-16.34	
1	Quasi Peak 573 kHz	37.69	L1	-18.30	
2	CISPR Average 573 kHz	27.56	L1	-18.43	
1	Quasi Peak 793.5 kHz	31.35	L1	-24.64	
1	Quasi Peak 1.1805 MHz	29.93	L1	-26.06	
1	Quasi Peak 1.8555 MHz	28.78	L1	-27.21	
1	Quasi Peak 2.5665 MHz	29.95	L1	-26.04	
1	Quasi Peak 3.138 MHz	30.37	N	-25.62	
1	Quasi Peak 10.212 MHz	32.92	N	-27.07	

 Note: Measurement Uncertainty is  $\pm 4.2$ dB at a level of confidence of 95%.

## TEST REPORT

### RADIATED EMISSIONS

Model: RS001-2017

Date of Test: September 01, 2017

Worst-Case Operating Mode: Bluetooth Transmitting

Table 1  
**Pursuant to FCC Part 15 Section 15.249 Requirement**

#### Lowest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Factor (dB)	Calculated at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2402.000	90.0	33	29.4	86.4	50	36.4	94.0	-57.6
<b>H</b>	<b>4804.000</b>	<b>53.6</b>	<b>33</b>	<b>34.9</b>	<b>55.5</b>	<b>50</b>	<b>5.5</b>	<b>54.0</b>	<b>-48.5</b>
H	7206.000	48.8	33	37.9	53.7	50	3.7	54.0	-50.3
H	9608.000	41.1	33	40.4	48.5	50	-1.5	54.0	-55.5
<b>H</b>	<b>12010.000</b>	<b>43.7</b>	<b>33</b>	<b>40.5</b>	<b>51.2</b>	<b>50</b>	<b>1.2</b>	<b>54.0</b>	<b>-52.8</b>
H	14412.000	45.4	33	40.0	52.4	50	2.4	54.0	-51.6

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2402.000	90.0	33	29.4	86.4	114.0	-27.6
<b>H</b>	<b>4804.000</b>	<b>53.6</b>	<b>33</b>	<b>34.9</b>	<b>55.5</b>	<b>74.0</b>	<b>-18.5</b>
H	7206.000	48.8	33	37.9	53.7	74.0	-20.3
H	9608.000	41.1	33	40.4	48.5	74.0	-25.5
<b>H</b>	<b>12010.000</b>	<b>43.7</b>	<b>33</b>	<b>40.5</b>	<b>51.2</b>	<b>74.0</b>	<b>-22.8</b>
H	14412.000	45.4	33	40.0	52.4	74.0	-21.6

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

Model: RS001-2017

Date of Test: September 01, 2017

Worst-Case Operating Mode: Bluetooth Transmitting

**Table 2**  
**Pursuant to FCC Part 15 Section 15.249 Requirement**

Middle Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Factor (dB)	Calculated at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2442.000	90.2	33	29.4	86.6	50	36.6	94.0	-57.4
<b>H</b>	<b>4884.000</b>	<b>53.7</b>	<b>33</b>	<b>34.9</b>	<b>55.6</b>	<b>50</b>	<b>5.6</b>	<b>54.0</b>	<b>-48.4</b>
<b>H</b>	<b>7320.000</b>	<b>48.8</b>	<b>33</b>	<b>37.9</b>	<b>53.7</b>	<b>50</b>	<b>3.7</b>	<b>54.0</b>	<b>-50.3</b>
H	9760.000	40.8	33	40.4	48.2	50	-1.8	54.0	-55.8
<b>H</b>	<b>12200.000</b>	<b>43.5</b>	<b>33</b>	<b>40.5</b>	<b>51.0</b>	<b>50</b>	<b>1.0</b>	<b>54.0</b>	<b>-53.0</b>
H	14640.000	47.3	33	38.4	52.7	50	2.7	54.0	-51.3

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2442.000	90.2	33	29.4	86.6	114.0	-27.4
<b>H</b>	<b>4884.000</b>	<b>53.7</b>	<b>33</b>	<b>34.9</b>	<b>55.6</b>	<b>74.0</b>	<b>-18.4</b>
<b>H</b>	<b>7320.000</b>	<b>48.8</b>	<b>33</b>	<b>37.9</b>	<b>53.7</b>	<b>74.0</b>	<b>-20.3</b>
H	9760.000	40.8	33	40.4	48.2	74.0	-25.8
<b>H</b>	<b>12200.000</b>	<b>43.5</b>	<b>33</b>	<b>40.5</b>	<b>51.0</b>	<b>74.0</b>	<b>-23.0</b>
H	14640.000	47.3	33	38.4	52.7	74.0	-21.3

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

## TEST REPORT

Model: RS001-2017

Date of Test: September 01, 2017

Worst-Case Operating Mode: Bluetooth Transmitting

**Table 3**  
**Pursuant to FCC Part 15 Section 15.249 Requirement**

### Highest Channel

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Factor (dB)	Calculated at 3m (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2480.000	90.0	33	29.4	86.4	50	36.4	94.0	-57.6
<b>H</b>	<b>4960.000</b>	<b>53.5</b>	<b>33</b>	<b>34.9</b>	<b>55.4</b>	<b>50</b>	<b>5.4</b>	<b>54.0</b>	<b>-48.6</b>
<b>H</b>	<b>7440.000</b>	<b>47.5</b>	<b>33</b>	<b>37.9</b>	<b>52.4</b>	<b>50</b>	<b>2.4</b>	<b>54.0</b>	<b>-51.6</b>
H	9920.000	40.4	33	40.4	47.8	50	-2.2	54.0	-56.2
<b>H</b>	<b>12400.000</b>	<b>43.9</b>	<b>33</b>	<b>40.5</b>	<b>51.4</b>	<b>50</b>	<b>1.4</b>	<b>54.0</b>	<b>-52.6</b>
H	14880.000	46.8	33	38.4	52.2	50	2.2	54.0	-51.8

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	2480.000	90.0	33	29.4	86.4	114.0	-27.6
<b>H</b>	<b>4960.000</b>	<b>53.5</b>	<b>33</b>	<b>34.9</b>	<b>55.4</b>	<b>74.0</b>	<b>-18.6</b>
<b>H</b>	<b>7440.000</b>	<b>47.5</b>	<b>33</b>	<b>37.9</b>	<b>52.4</b>	<b>74.0</b>	<b>-21.6</b>
H	9920.000	40.4	33	40.4	47.8	74.0	-26.2
<b>H</b>	<b>12400.000</b>	<b>43.9</b>	<b>33</b>	<b>40.5</b>	<b>51.4</b>	<b>74.0</b>	<b>-22.6</b>
H	14880.000	46.8	33	38.4	52.2	74.0	-21.8

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

**TEST REPORT**

Model: RS001-2017

Date of Test: September 01, 2017

Worst-Case Operating Mode: PC Charging + Bluetooth operating

**Table 4**  
**Pursuant to FCC Part 15 Section 15.209 Requirement**

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	34.755	39.6	16	10.0	33.6	40.0	-6.4
H	36.334	38.5	16	10.0	32.5	40.0	-7.5
<b><i>H</i></b>	<b><i>119.908</i></b>	<b><i>36.5</i></b>	<b><i>16</i></b>	<b><i>14.0</i></b>	<b><i>34.5</i></b>	<b><i>43.5</i></b>	<b><i>-9.0</i></b>
H	145.764	37.5	16	14.0	35.5	43.5	-8.0
H	167.534	30.5	16	18.0	32.5	43.5	-11.0
H	221.648	34.4	16	17.0	35.4	46.0	-10.6
<b><i>H</i></b>	<b><i>252.260</i></b>	<b><i>33.6</i></b>	<b><i>16</i></b>	<b><i>20.0</i></b>	<b><i>37.6</i></b>	<b><i>46.0</i></b>	<b><i>-8.4</i></b>
H	435.524	30.0	16	26.0	40.0	46.0	-6.0

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

**TEST REPORT****4.0 EQUIPMENT PHOTOGRAPHS**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

**5.0 PRODUCT LABELLING**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

**6.0 TECHNICAL SPECIFICATIONS**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

**7.0 INSTRUCTION MANUAL**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

**TEST REPORT****8.0 MISCELLANEOUS INFORMATION**

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).



**8.1 Radiated Emission on the Bandedge**

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209 , whichever is the lesser attenuation, which meet the requirement of part 15.249(d).

## TEST REPORT

### Peak Measurement

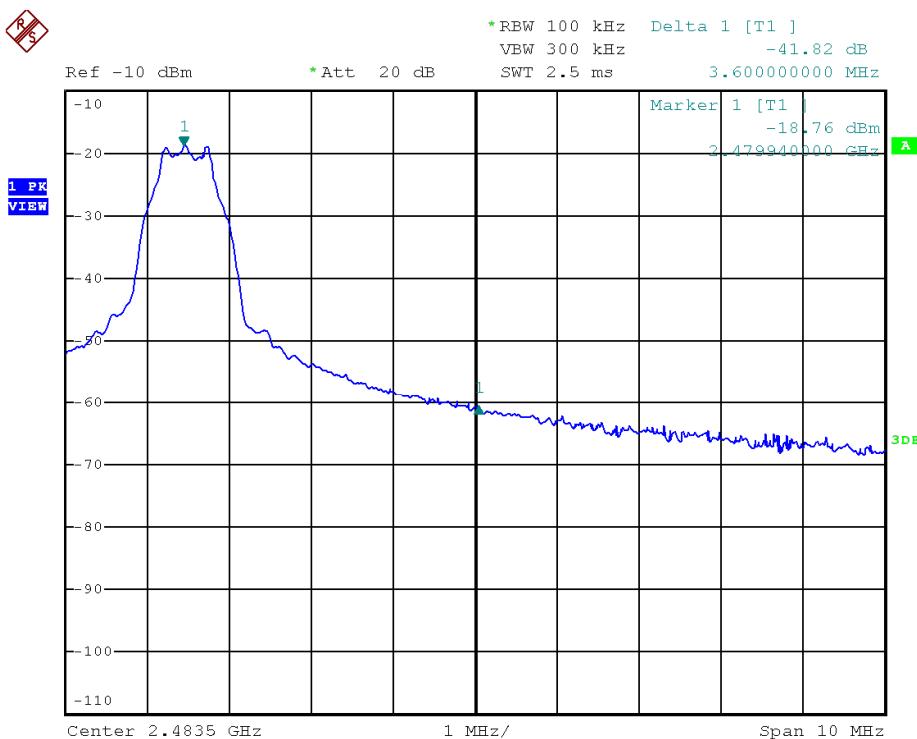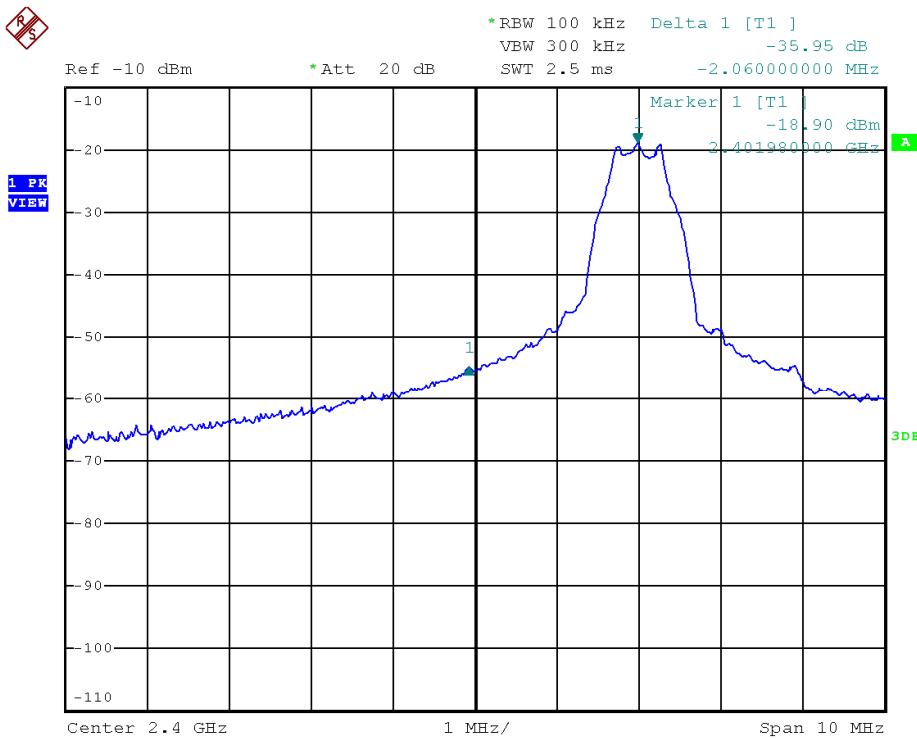

**TEST REPORT****Peak Measurement**

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=86.4 dB $\mu$ V/m – 36.0 dB

=50.4 dB $\mu$ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=36.4 dB $\mu$ V/m – 36.0 dB

=0.4 dB $\mu$ V/m

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

=86.4 dB $\mu$ V/m – 41.8 dB

=44.6 dB $\mu$ V/m

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

=36.4 dB $\mu$ V/m – 41.8 dB

=-5.4 dB $\mu$ V/m

The resultant field strength meets the general radiated emission limit in Section 15.209, which does not exceed 74 dB $\mu$ V/m (Peak Limit) and 54 dB $\mu$ V/m (Average Limit).

**TEST REPORT****8.2 Discussion of Pulse Desensitization**

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 300  $\mu$ s for a digital “1” bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 3MHz, so the pulse desensitivity factor is 0dB.

**8.3 Calculation of Average Factor**

The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 100ms



Effective period of the cycle = 300 $\mu$ s


DC = 300 $\mu$ s / 100ms = 0.003

Therefore, the averaging factor is found by  $20\log 0.003 = -50$ dB.

## TEST REPORT

### Average Factor (worse case: searching)

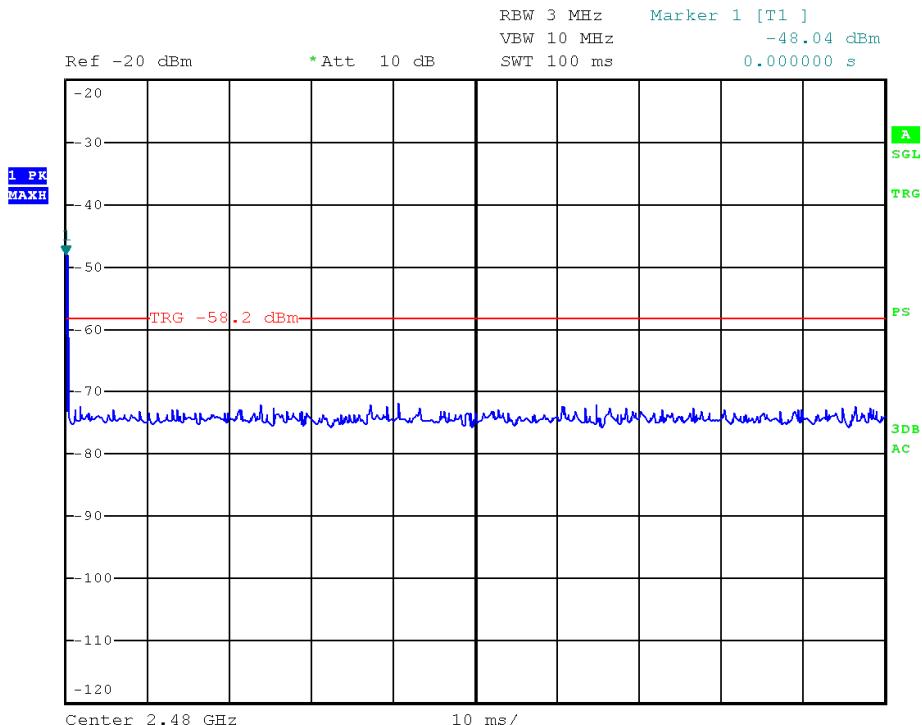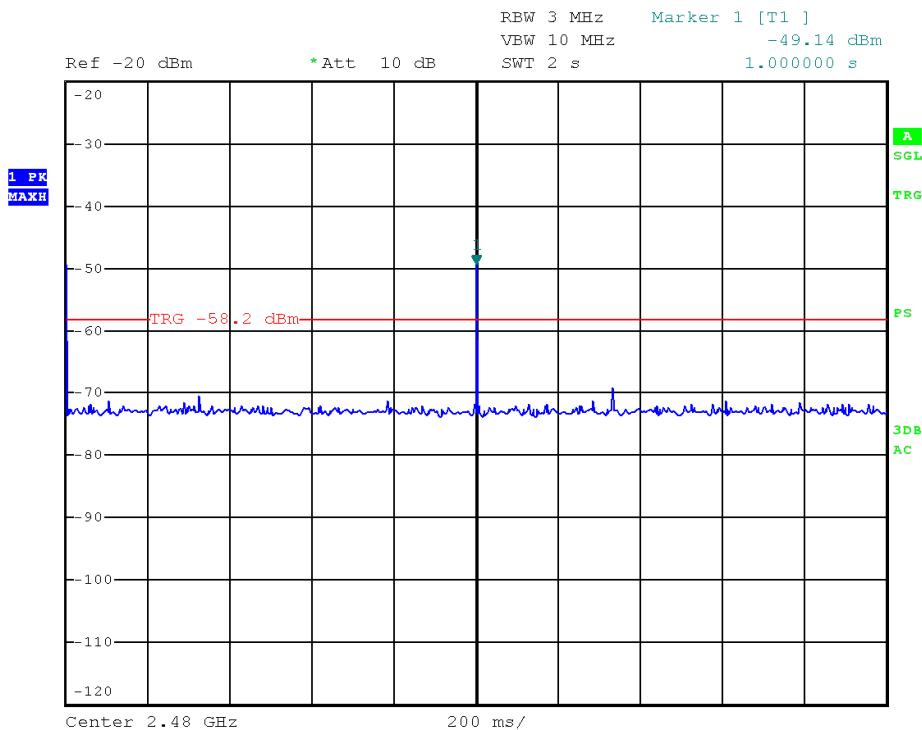

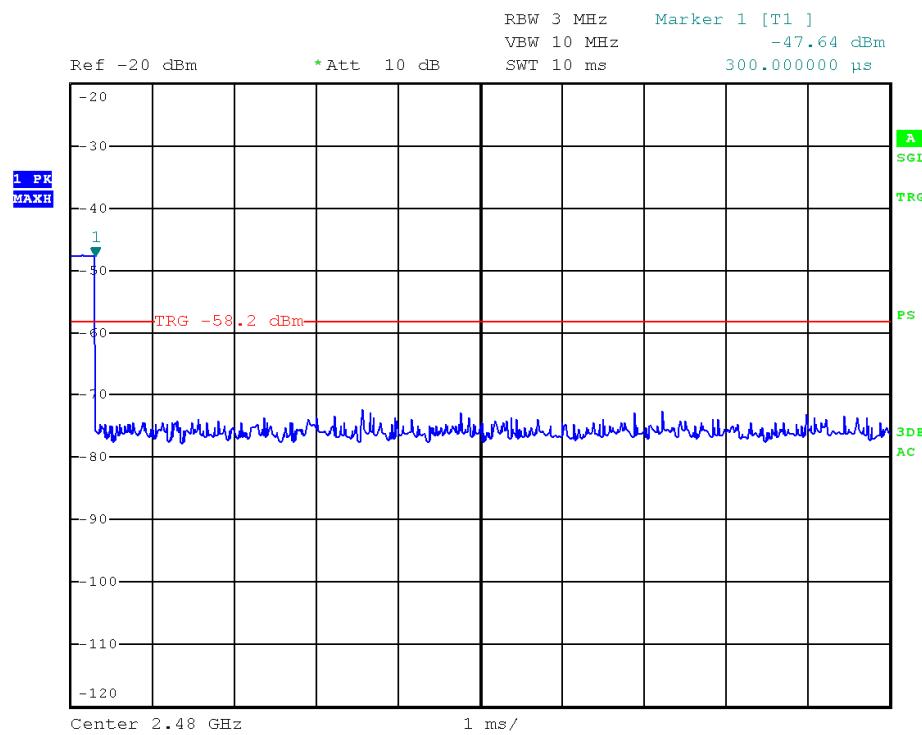**TEST REPORT**Average Factor (cont'd) (worse case: searching)

**TEST REPORT****8.4 Emissions Test Procedures**

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower. For line conducted emissions, the range scanned is 150 kHz to 30 MHz.

**TEST REPORT****8.4 Emissions Test Procedures (cont'd)**

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.


Conducted measurements were made as described in ANSI C63.10 (2013).

The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.


Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.

**TEST REPORT****8.4.1 Radiated Emission Test Setup**

The figure below shows the test setup, which is utilized to make these measurements.

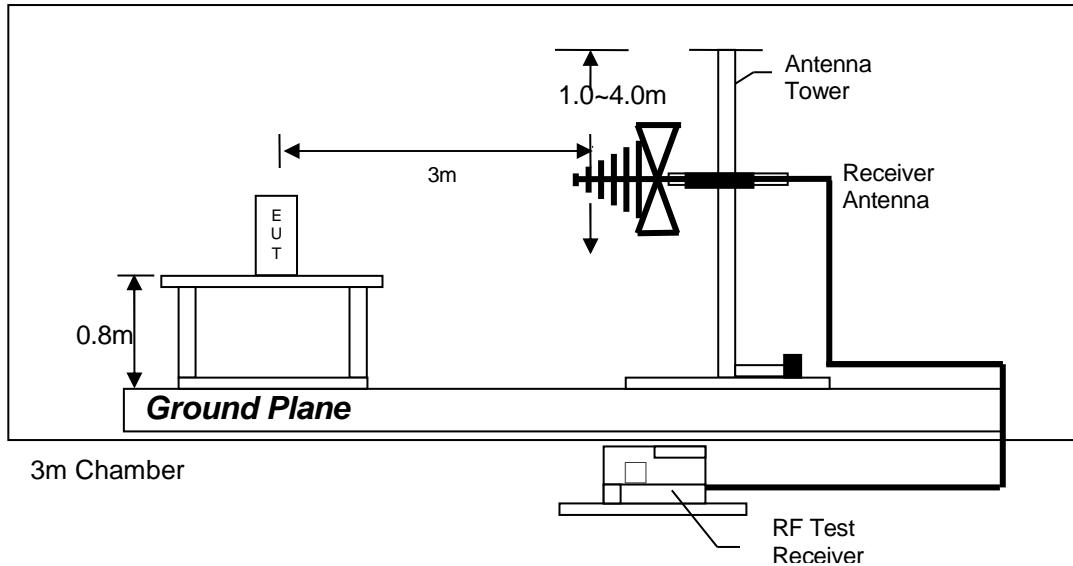

Test setup of radiated emissions up to 1GHz

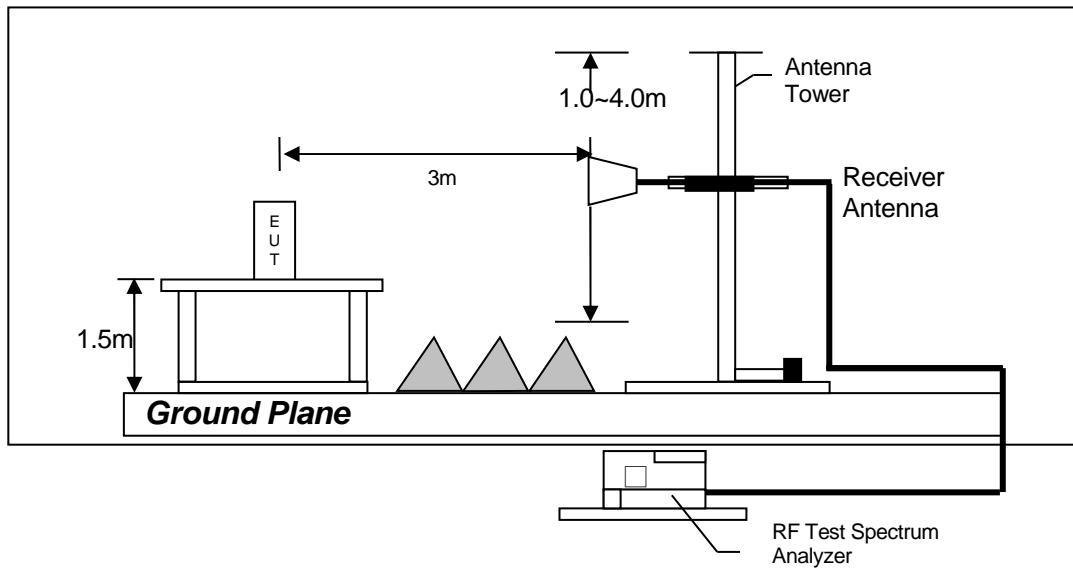


Test setup of radiated emissions above 1GHz

**TEST REPORT****8.4.2 Conducted Emission Test Procedures**

For tabletop equipment, the EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table. For floor-standing equipment, the EUT and all cables were insulated, if required, from the ground plane by up to 12 mm of insulating material. The EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

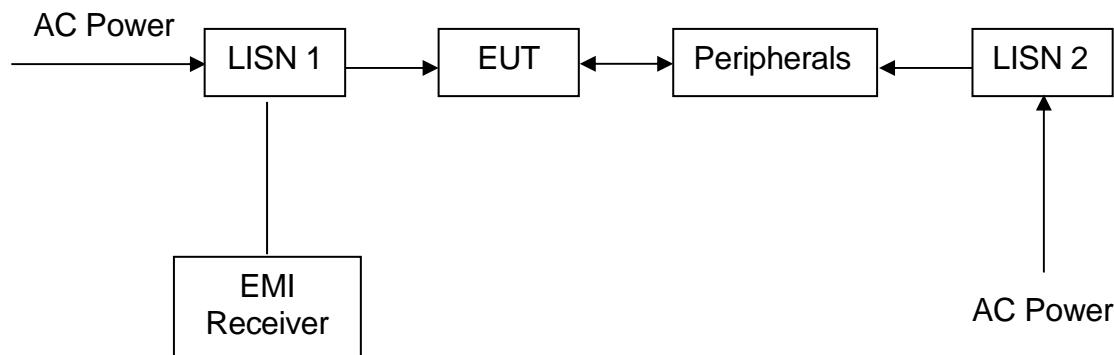**8.4.3 Conducted Emission Test Setup**

## TEST REPORT

### 9.0 EQUIPMENT LIST

#### 1) Radiated Emissions Test

EQUIPMENT	EMI Test Receiver (9kHz to 26.5GHz)	BICONICAL ANTENNA	LOG PERIODIC ANTENNA
Registration No.	EW-3156	EW-0954	EW-0446
Manufacturer	ROHDESCHWARZ	EMCO	EMCO
Model No.	ESR26	3104C	3146
Calibration Date	Dec. 06. 2016	Jul. 07, 2016	Jul. 15, 2016
Calibration Due Date	Dec. 06, 2017	Jan. 07, 2018	Jan. 15, 2018

EQUIPMENT	SPECTRUM ANALYZER	RF Pre-amplifier (9kHz to 40GHz)	DOUBLE RIDGED GUIDE ANTENNA
Registration No.	EW-2249	EW-3006	EW-1015
Manufacturer	R&S	SCHWARZBECK	EMCO
Model No.	FSP30	BBV 9744	3115
Calibration Date	Dec. 23, 2016	Mar. 23, 2017	Apr. 26, 2016
Calibration Due Date	Nov, 27. 2017	Mar. 23, 2018	Oct. 26, 2017

Equipment	Active Loop H-field (9kHz to 30MHz)	RF Cable 9kHz to 1000MHz	RF Cable (up to 40GHz)
Registration No.	EW-2313	EW-3170	EW-3155
Manufacturer	ELECTROMETRI	N/A	N/A
Model No.	EM-6876	9kHz to 1000MHz	1-40 GHz
Calibration Date	May. 18, 2016	Mar. 20, 2017	Dec. 05, 2016
Calibration Due Date	Nov. 18, 2017	Mar. 20, 2018	Dec. 05, 2017

Equipment	Solid State Low Noise Preamplifier Assembly (1 - 18)GHz	Notch Filter (cutoff frequency 2.4GHz to 2.5GHz)
Registration No.	EW-3229	EW-3155
Manufacturer	BONN ELEKTRO	MICROTRONICS
Model No.	BLMA 0118-5G	BRM50701-02
Calibration Date	Oct. 24, 2016	May. 26, 2017
Calibration Due Date	Oct. 24, 2017	May. 26, 2018

**TEST REPORT**

## 2) Conducted Emissions Test

Equipment	Artificial Mains Network	EMI Test Receiver
Registration No.	EW-2501	EW-2500
Manufacturer	ROHDE SCHWARZ	ROHDE SCHWARZ
Model No.	ENV-216	ESCI
Calibration Date	Feb. 21, 2017	Nov. 17, 2016
Calibration Due Date	Jan. 05, 2018	Nov. 17, 2017

## 3) Bandedge Measurement

Equipment	RF Cable (up to 40GHz) 1.5m length	Spectrum Analyzer
Registration No.	EW-3104	EW-2249
Manufacturer	N/A	R&S
Model No.	SMA-M to SMA-M	FSP30
Calibration Date	Feb. 28, 2017	Dec. 23, 2016
Calibration Due Date	Feb. 28, 2018	Nov. 27, 2017

END OF TEST REPORT