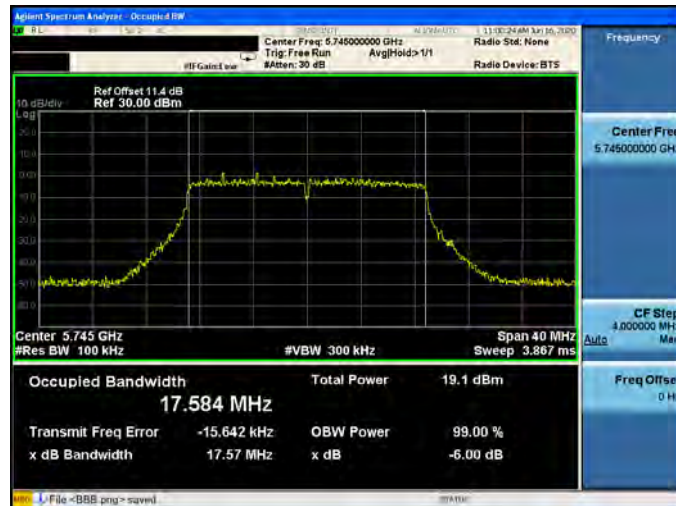


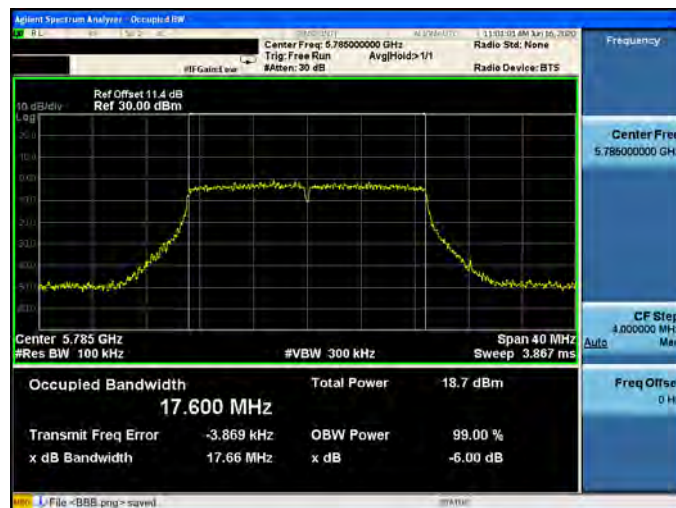
Beamforming on

Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-0

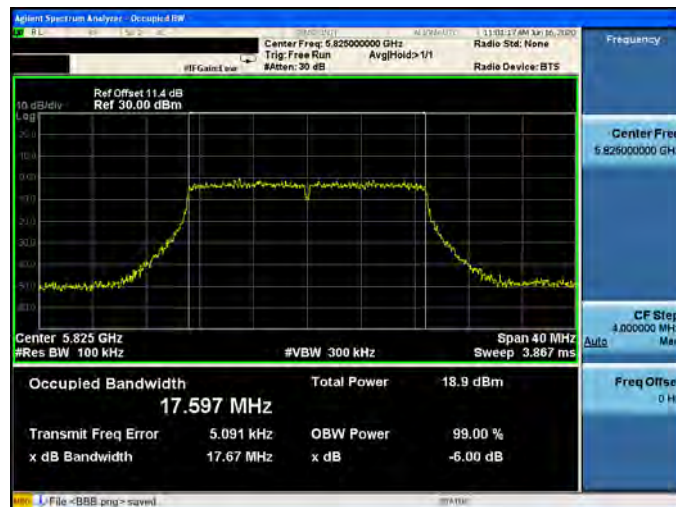
5745 MHz



5785 MHz

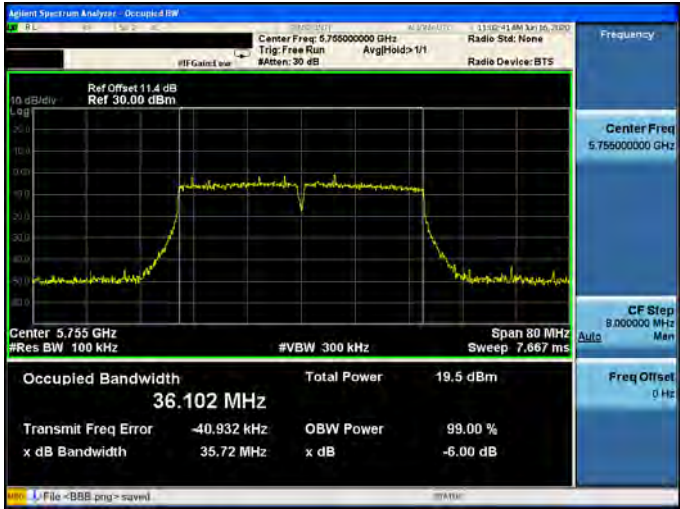
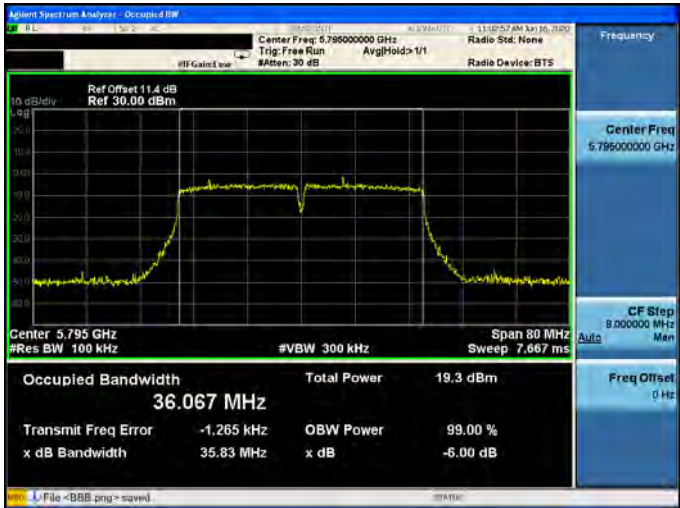


5825 MHz





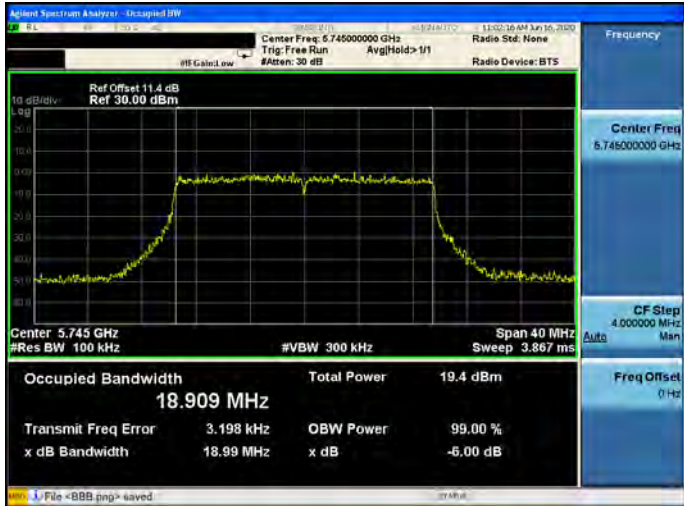
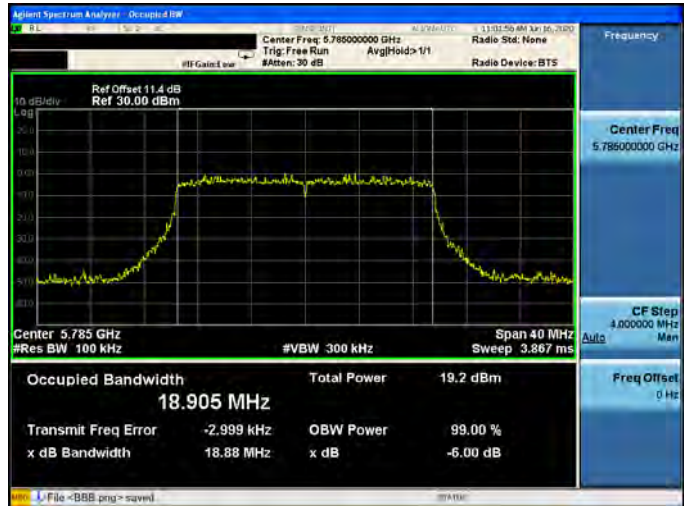
Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-0

5755 MHz	 Center Freq: 5.755 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 80 MHz Sweep: 7.667 ms Occupied Bandwidth: 36.102 MHz Total Power: 19.5 dBm Transmit Freq Error: -40.932 kHz x dB Bandwidth: 35.72 MHz OBW Power: 99.00 % x dB: -6.00 dB
5795 MHz	 Center Freq: 5.795 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 80 MHz Sweep: 7.667 ms Occupied Bandwidth: 36.067 MHz Total Power: 19.3 dBm Transmit Freq Error: -1.265 kHz x dB Bandwidth: 35.83 MHz OBW Power: 99.00 % x dB: -6.00 dB

Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-0

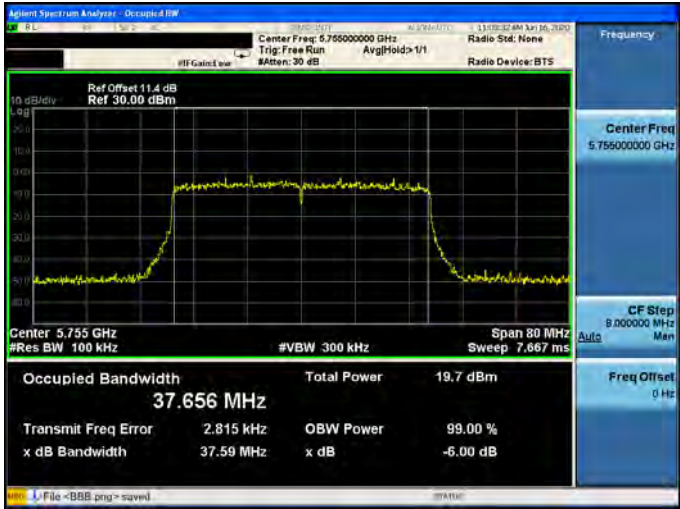
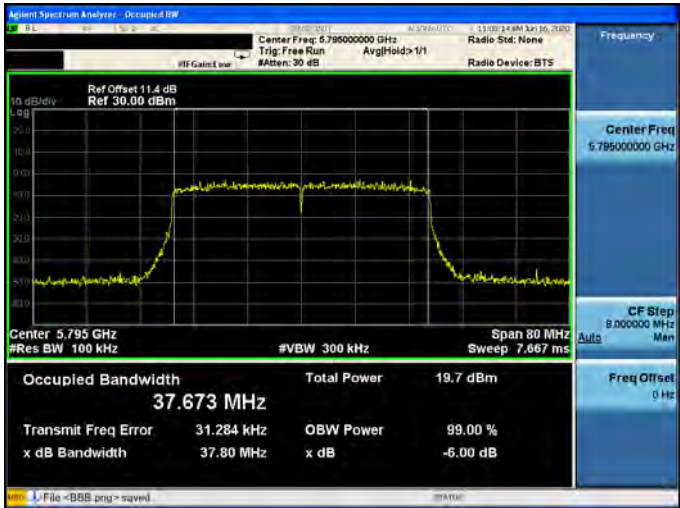
5775 MHz	 Center Freq: 5.775 GHz #Res BW: 100 kHz #VBW: 300 kHz Span: 160 MHz Sweep: 15.33 ms Occupied Bandwidth: 75.420 MHz Total Power: 19.5 dBm Transmit Freq Error: -50.758 kHz x dB Bandwidth: 72.08 MHz OBW Power: 99.00 % x dB: -6.00 dB
----------	--



Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-0	
5745 MHz	
5785 MHz	
5825 MHz	



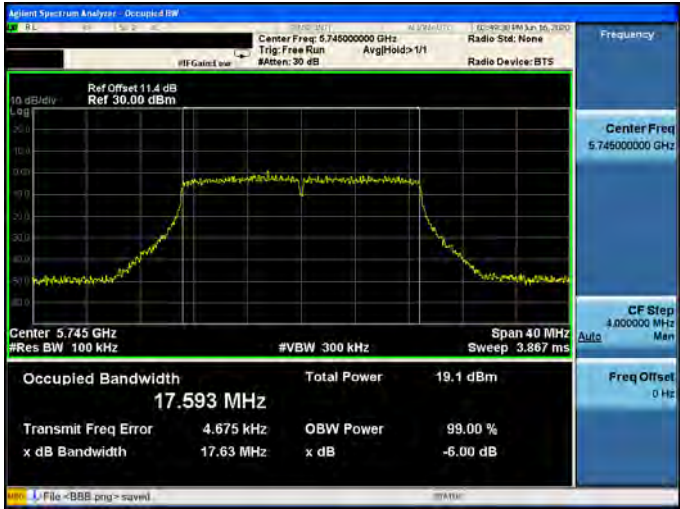
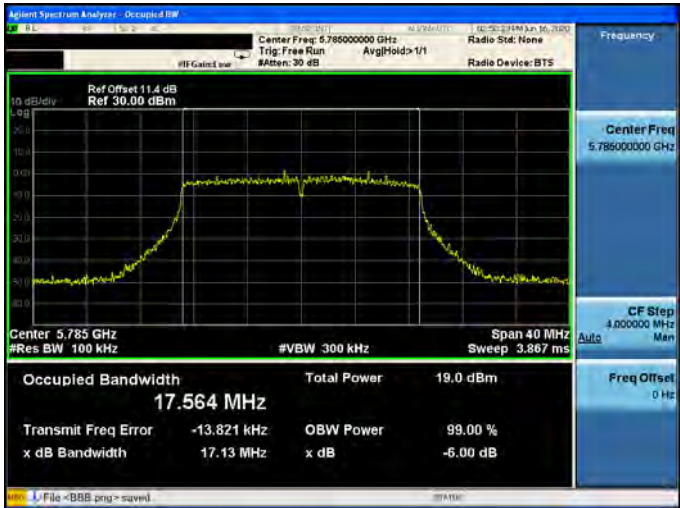
Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-0

5755 MHz	
5795 MHz	

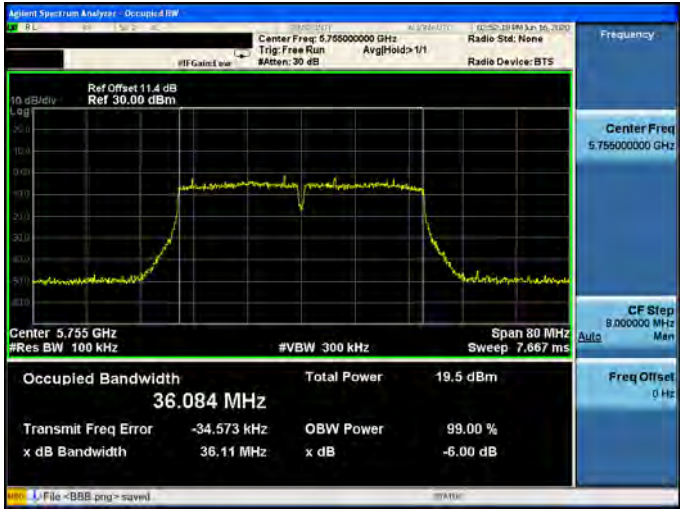
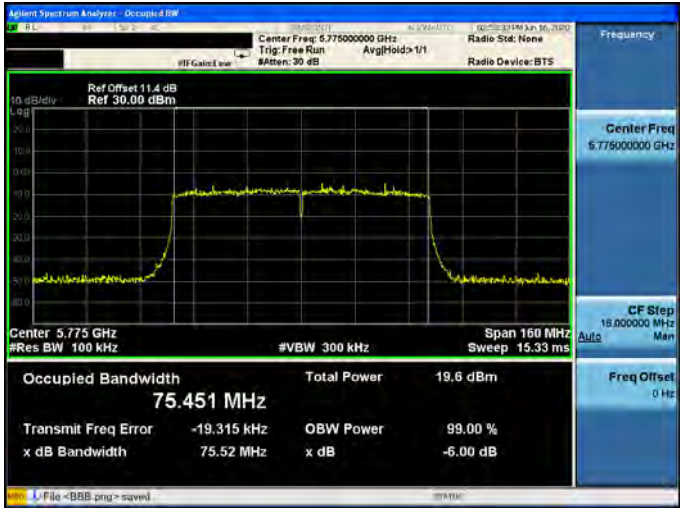
Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode_ANT-0

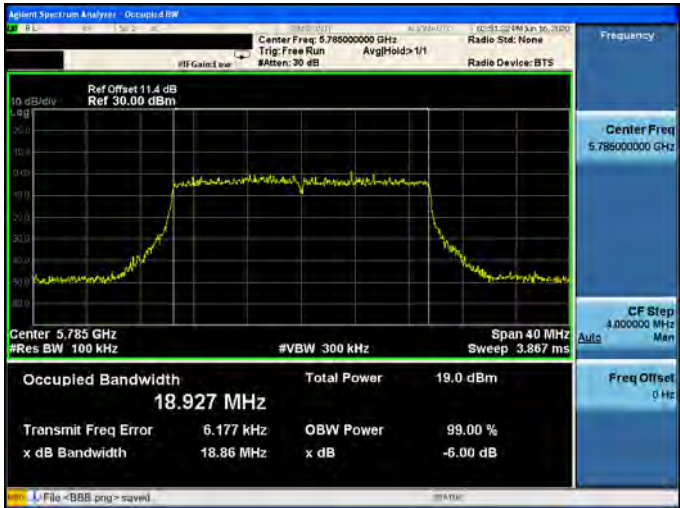
5775 MHz	
----------	--



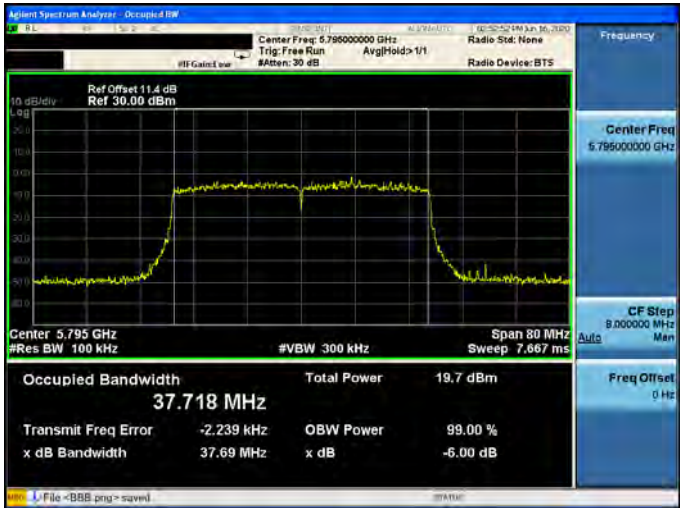
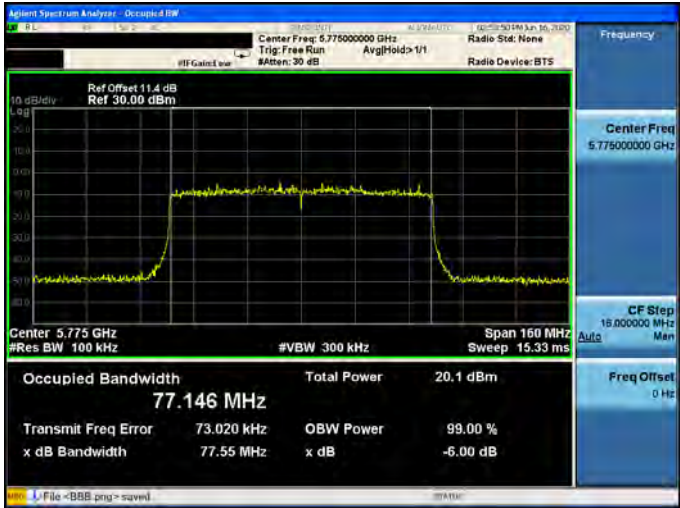
Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-1	
5745 MHz	
5785 MHz	
5825 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-1	
5755 MHz	
5795 MHz	
Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-1	
5775 MHz	

Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-1	
5745 MHz	 Center Freq: 5.74500000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.4 dB Ref 30.00 dBm Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.890 MHz Total Power 19.6 dBm Transmit Freq Error 6.790 kHz OBW Power 99.00 % x dB Bandwidth 19.01 MHz x dB -6.00 dB File <BBS.png> saved
5785 MHz	 Center Freq: 5.78500000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.4 dB Ref 30.00 dBm Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.927 MHz Total Power 19.0 dBm Transmit Freq Error 6.177 kHz OBW Power 99.00 % x dB Bandwidth 18.86 MHz x dB -6.00 dB File <BBS.png> saved
5825 MHz	 Center Freq: 5.82500000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.4 dB Ref 30.00 dBm Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 18.890 MHz Total Power 19.1 dBm Transmit Freq Error -11.026 kHz OBW Power 99.00 % x dB Bandwidth 18.87 MHz x dB -6.00 dB File <BBS.png> saved



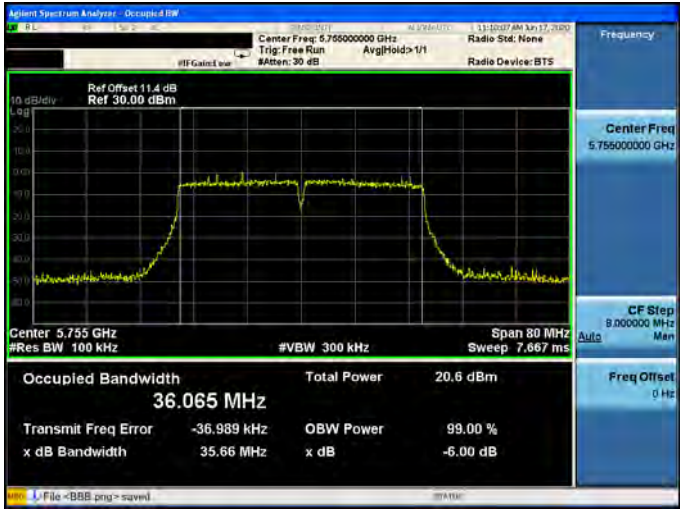
Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-1	
5755 MHz	
5795 MHz	
Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode_ANT-1	
5775 MHz	

Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-2

5745 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.745000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.4 dB Ref 30.00 dBm Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.564 MHz Total Power 20.3 dBm Transmit Freq Error -11.426 kHz OBW Power 99.00 % x dB Bandwidth 17.57 MHz x dB -6.00 dB File <BBS.png> saved
5785 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.785000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.4 dB Ref 30.00 dBm Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.613 MHz Total Power 19.5 dBm Transmit Freq Error 549 Hz OBW Power 99.00 % x dB Bandwidth 17.74 MHz x dB -6.00 dB File <BBS.png> saved
5825 MHz	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 5.825000000 GHz Trig: Free Run Avg/Hold: 1/1 Radio Std: None Radio Device: BTS Ref Offset 11.4 dB Ref 30.00 dBm Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 3.867 ms Occupied Bandwidth 17.561 MHz Total Power 19.8 dBm Transmit Freq Error 6.970 kHz OBW Power 99.00 % x dB Bandwidth 17.63 MHz x dB -6.00 dB File <BBS.png> saved



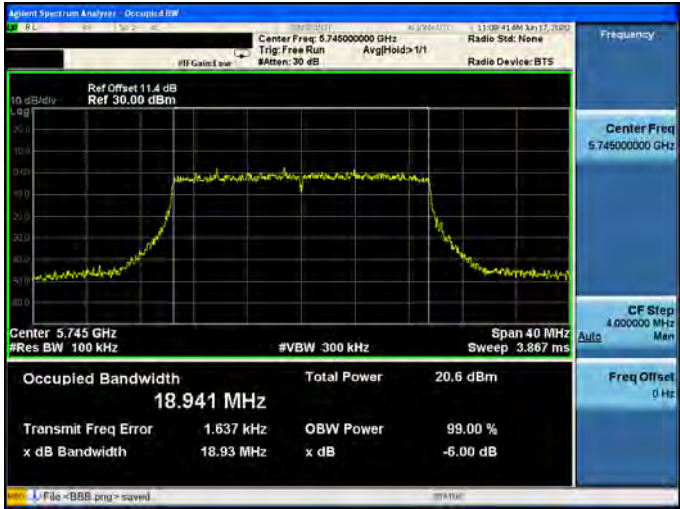
Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-2

5755 MHz	
5795 MHz	

Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-2

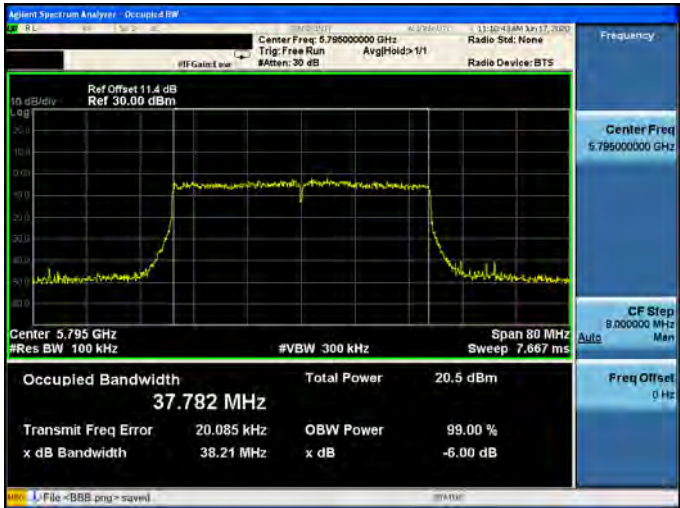
5775 MHz	
----------	--



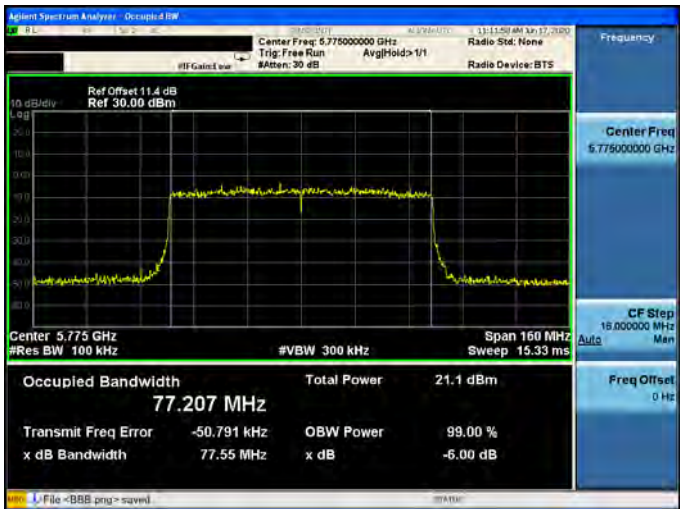
Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-2	
5745 MHz	
5785 MHz	
5825 MHz	



Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-2

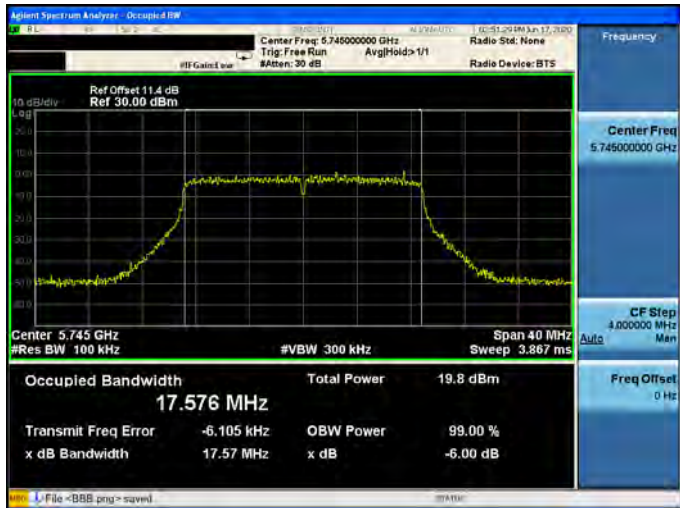
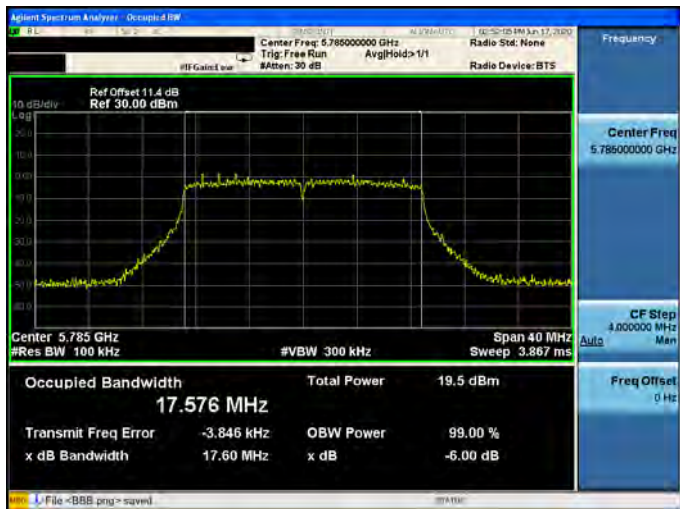
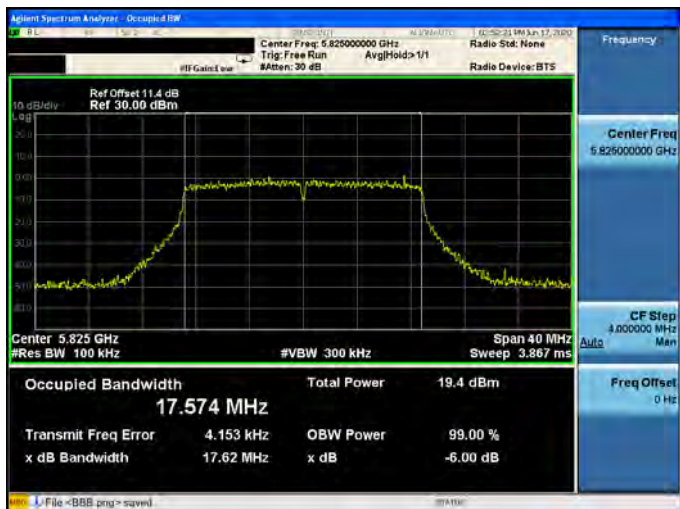
5755 MHz	
5795 MHz	

Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode_ANT-2

5775 MHz	
----------	--

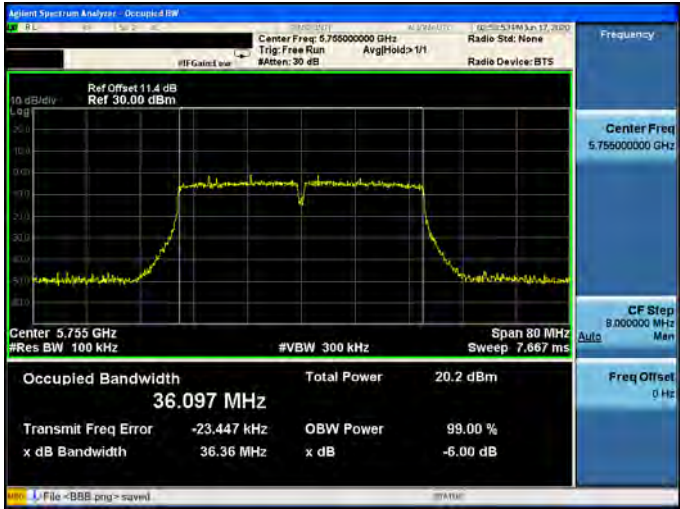
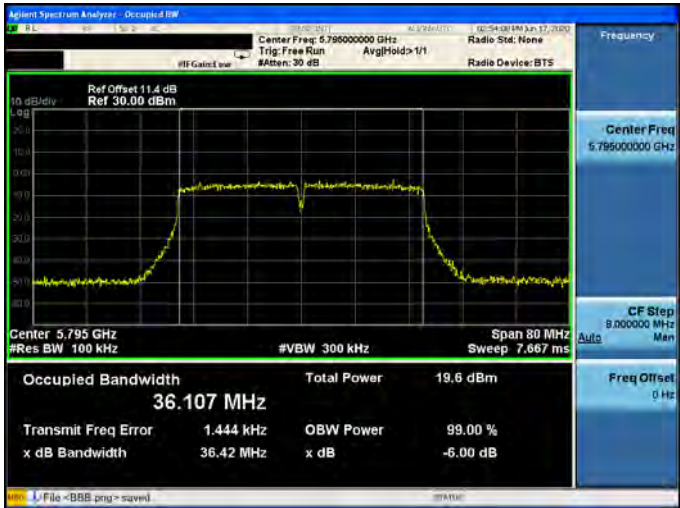


Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-3

5745 MHz	
5785 MHz	
5825 MHz	



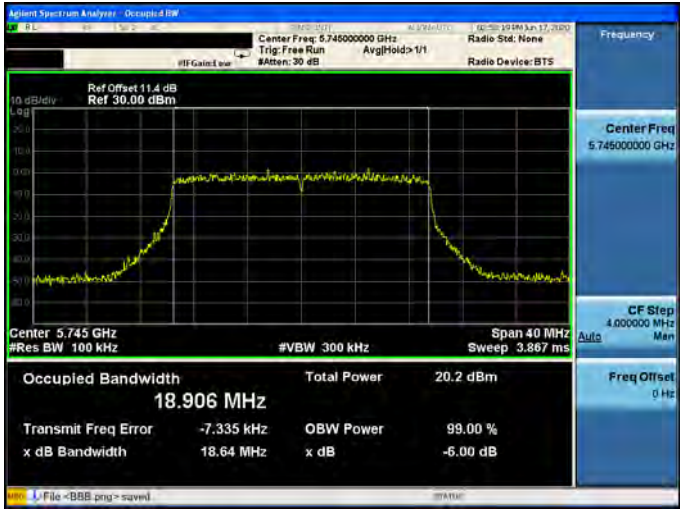
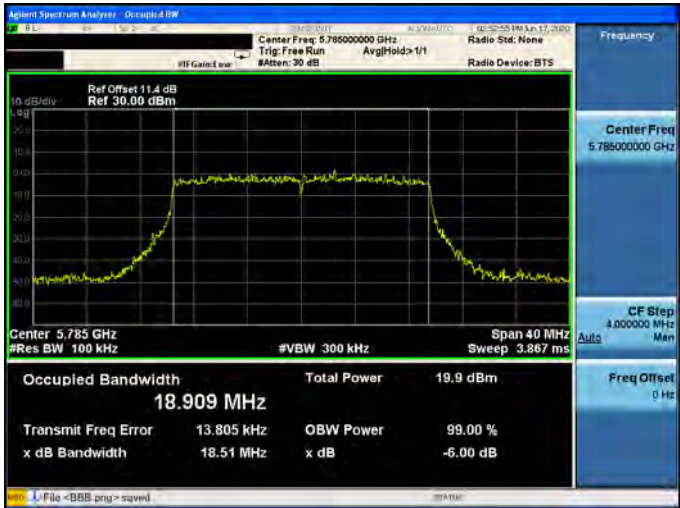
Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-3

5755 MHz	
5795 MHz	

Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-3

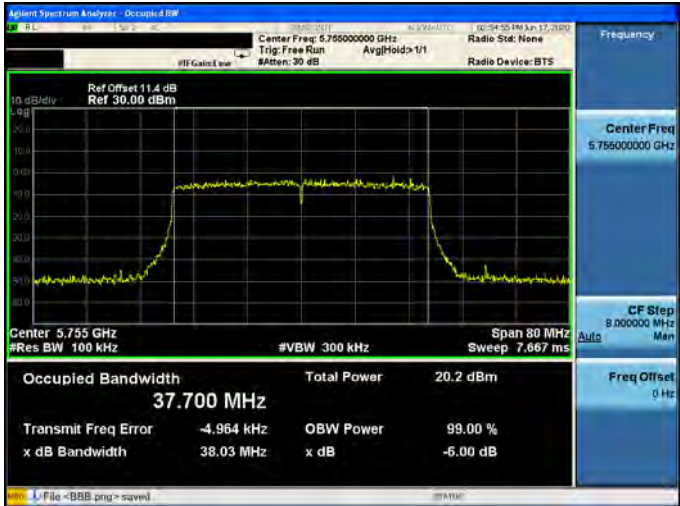
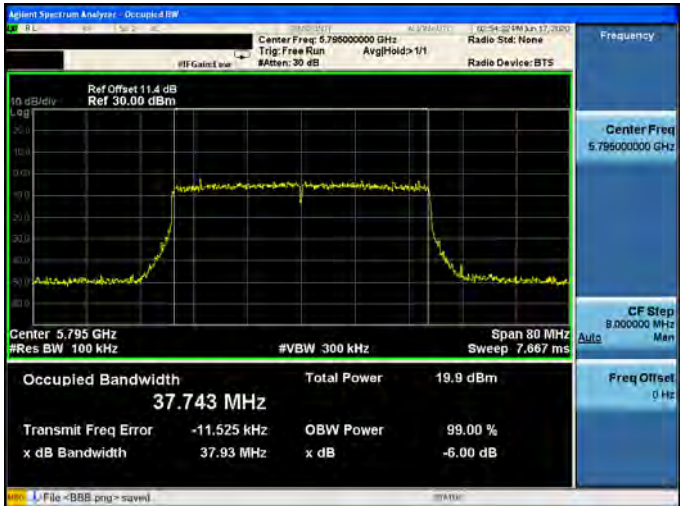
5775 MHz	
----------	--



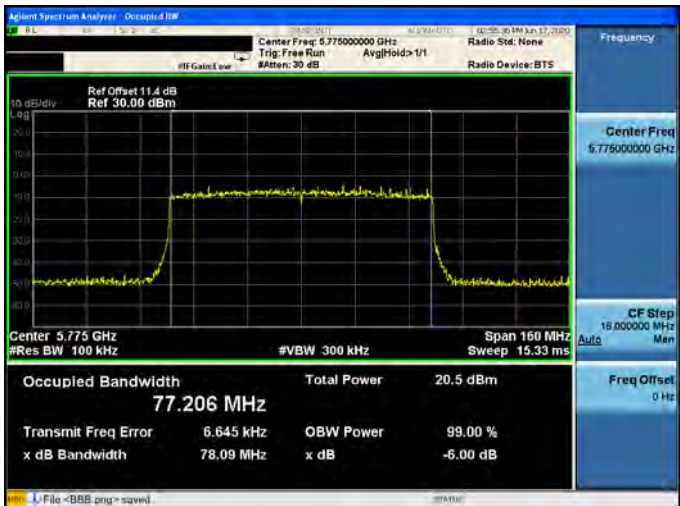
Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-3	
5745 MHz	
5785 MHz	
5825 MHz	



Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-3

5755 MHz	
5795 MHz	

Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode_ANT-3

5775 MHz	
----------	--

Maximum Power Spectral Density Measurement

Test Mode	Mode 2: IEEE 802.11a Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	5.581	0.221	5.802	≤ 12.35
5200	5.377	0.221	5.598	
5240	5.562	0.221	5.783	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	5.911	0.221	6.132	≤ 12.35
5200	5.705	0.221	5.926	
5240	5.823	0.221	6.044	
Frequency (MHz)	ANT-2			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	5.550	0.221	5.771	≤ 12.35
5200	5.177	0.221	5.398	
5240	5.287	0.221	5.508	
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	5.911	0.221	6.132	≤ 12.35
5200	5.913	0.221	6.134	
5240	5.642	0.221	5.863	
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5180.0	11.983			≤ 12.35
5200.0	11.794			
5240.0	11.824			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 2: IEEE 802.11a Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-0.695	0.221	6.516	≤ 25.31
5785	-0.689	0.221	6.522	
5825	-1.058	0.221	6.153	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-0.636	0.221	6.575	≤ 25.31
5785	-0.847	0.221	6.364	
5825	-1.129	0.221	6.082	
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	0.146	0.221	7.357	≤ 25.31
5785	-0.229	0.221	6.982	
5825	-0.328	0.221	6.883	
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-0.691	0.221	6.520	≤ 25.31
5785	-0.665	0.221	6.546	
5825	-0.335	0.221	6.876	
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/500 kHz)
	Calculated (dBm/500 kHz)			
5745	12.777			≤ 25.31
5785	12.630			
5825	12.536			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)

Test Mode	Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	7.010	0.168	7.178	≤ 17
5200	8.090	0.168	8.258	
5240	7.939	0.168	8.107	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	7.452	0.168	7.620	≤ 17
5200	7.968	0.168	8.136	
5240	8.146	0.168	8.314	
Frequency (MHz)	ANT-2			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	7.066	0.168	7.234	≤ 17
5200	7.625	0.168	7.793	
5240	7.546	0.168	7.714	
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	7.435	0.168	7.603	≤ 17
5200	8.071	0.168	8.239	
5240	7.786	0.168	7.954	
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5180.0	13.434			≤ 17
5200.0	14.131			
5240.0	14.048			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-1.905	0.168	5.252	≤ 30
5785	-1.494	0.168	5.663	
5825	-1.176	0.168	5.981	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-0.987	0.168	6.170	≤ 30
5785	-1.594	0.168	5.563	
5825	-1.535	0.168	5.622	
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-0.679	0.168	6.478	≤ 30
5785	-0.412	0.168	6.745	
5825	-0.792	0.168	6.365	
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-1.106	0.168	6.051	≤ 30
5785	-0.917	0.168	6.240	
5825	-0.606	0.168	6.551	
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/500 kHz)
	Calculated (dBm/500 kHz)			
5745	12.032			≤ 30
5785	12.100			
5825	12.165			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)

Test Mode	Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	2.359	0.232	2.591	≤ 17
5230	5.349	0.232	5.581	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	2.888	0.232	3.120	≤ 17
5230	5.385	0.232	5.617	
Frequency (MHz)	ANT-2			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	2.286	0.232	2.518	≤ 17
5230	5.004	0.232	5.236	
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	3.045	0.232	3.277	≤ 17
5230	5.460	0.232	5.692	
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5190.0	8.910			≤ 17
5230.0	11.556			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-4.026	0.232	3.196	≤ 30
5795	-4.117	0.232	3.105	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-4.035	0.232	3.187	≤ 30
5795	-4.315	0.232	2.907	
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-2.983	0.232	4.239	≤ 30
5795	-3.095	0.232	4.127	
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-3.385	0.232	3.837	≤ 30
5795	-3.626	0.232	3.596	
Frequency (MHz)	ANT-0+1+2+3			
	Calculated (dBm/500 kHz)			Limit (dBm/500 kHz)
5755	9.658			≤ 30
5795	9.480			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)

Test Mode	Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-0.707	0.244	-0.463	≤ 17
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-0.471	0.244	-0.227	≤ 17
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-1.050	0.244	-0.806	≤ 17
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-0.560	0.244	-0.316	≤ 17
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5210.0	5.573			≤ 17

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-7.338	0.244	-0.105	≤ 30
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-7.233	0.244	0.000	≤ 30
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-6.161	0.244	1.072	≤ 30
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-7.206	0.244	0.027	≤ 30
Frequency (MHz)	ANT-0+1+2+3			
	Calculated (dBm/500 kHz)			Limit (dBm/500 kHz)
5775	6.297			≤ 30

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)

Test Mode	Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	6.363	0.168	6.531	≤ 17
5200	7.852	0.168	8.020	
5240	8.101	0.168	8.269	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	6.990	0.168	7.158	≤ 17
5200	7.895	0.168	8.063	
5240	7.903	0.168	8.071	
Frequency (MHz)	ANT-2			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	6.802	0.168	6.970	≤ 17
5200	7.664	0.168	7.832	
5240	7.824	0.168	7.992	
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	7.122	0.168	7.290	≤ 17
5200	7.936	0.168	8.104	
5240	7.613	0.168	7.781	
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5180.0	13.017			≤ 17
5200.0	14.026			
5240.0	14.052			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-2.055	0.168	5.102	≤ 30
5785	-2.041	0.168	5.116	
5825	-2.401	0.168	4.756	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-2.023	0.168	5.134	≤ 30
5785	-1.994	0.168	5.163	
5825	-2.821	0.168	4.336	
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-1.062	0.168	6.095	≤ 30
5785	-1.290	0.168	5.867	
5825	-1.797	0.168	5.360	
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-1.642	0.168	5.515	≤ 30
5785	-2.037	0.168	5.120	
5825	-1.997	0.168	5.160	
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/500 kHz)
	Calculated (dBm/500 kHz)			
5745	11.501			≤ 30
5785	11.349			
5825	10.942			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)

Test Mode	Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	2.454	0.232	2.686	≤ 17
5230	5.153	0.232	5.385	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	2.756	0.232	2.988	≤ 17
5230	5.506	0.232	5.738	
Frequency (MHz)	ANT-2			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	2.668	0.232	2.900	≤ 17
5230	5.108	0.232	5.340	
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	2.923	0.232	3.155	≤ 17
5230	5.419	0.232	5.651	
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5190.0	8.956			≤ 17
5230.0	11.553			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-4.645	0.232	2.577	≤ 30
5795	-5.057	0.232	2.165	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-4.667	0.232	2.555	≤ 30
5795	-5.212	0.232	2.010	
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-3.459	0.232	3.763	≤ 30
5795	-3.558	0.232	3.664	
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-4.665	0.232	2.557	≤ 30
5795	-4.670	0.232	2.552	
Frequency (MHz)	ANT-0+1+2+3			
	Calculated (dBm/500 kHz)			Limit (dBm/500 kHz)
5755	8.916			≤ 30
5795	8.668			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)

Test Mode	Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-0.531	0.244	-0.287	≤ 17
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-0.916	0.244	-0.672	≤ 17
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-1.076	0.244	-0.832	≤ 17
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-0.478	0.244	-0.234	≤ 17
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5210.0	5.521			≤ 17

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-8.160	0.244	-0.927	≤ 30
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-7.876	0.244	-0.643	≤ 30
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-6.852	0.244	0.381	≤ 30
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-7.597	0.244	-0.364	≤ 30
Frequency (MHz)	ANT-0+1+2+3			
	Calculated (dBm/500 kHz)			Limit (dBm/500 kHz)
5775	5.661			≤ 30

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)



Beamforming on

Test Mode	Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	0.803	0.168	0.971	≤ 12.35
5200	1.568	0.168	1.736	
5240	1.593	0.168	1.761	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	1.127	0.168	1.295	≤ 12.35
5200	1.675	0.168	1.843	
5240	1.732	0.168	1.900	
Frequency (MHz)	ANT-2			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	0.943	0.168	1.111	≤ 12.35
5200	1.181	0.168	1.349	
5240	1.331	0.168	1.499	
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	1.150	0.168	1.318	≤ 12.35
5200	1.695	0.168	1.863	
5240	1.571	0.168	1.739	
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5180.0	7.196			≤ 12.35
5200.0	7.723			
5240.0	7.747			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-7.734	0.168	-0.577	≤ 25.31
5785	-8.084	0.168	-0.927	
5825	-7.655	0.168	-0.498	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-7.472	0.168	-0.315	≤ 25.31
5785	-7.690	0.168	-0.533	
5825	-7.919	0.168	-0.762	
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-6.910	0.168	0.247	≤ 25.31
5785	-6.885	0.168	0.272	
5825	-7.244	0.168	-0.087	
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-7.380	0.168	-0.223	≤ 25.31
5785	-7.558	0.168	-0.401	
5825	-7.416	0.168	-0.259	
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/500 kHz)
	Calculated (dBm/500 kHz)			
5745	5.814			≤ 25.31
5785	5.645			
5825	5.627			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)

Test Mode	Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	-3.916	0.232	-3.684	≤ 12.35
5230	-1.224	0.232	-0.992	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	-3.881	0.232	-3.649	≤ 12.35
5230	-0.935	0.232	-0.703	
Frequency (MHz)	ANT-2			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	-3.789	0.232	-3.557	≤ 12.35
5230	-1.100	0.232	-0.868	
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	-3.741	0.232	-3.509	≤ 12.35
5230	-1.121	0.232	-0.889	
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5190.0	2.422			≤ 12.35
5230.0	5.159			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-10.931	0.232	-3.709	≤ 25.31
5795	-10.866	0.232	-3.644	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-10.483	0.232	-3.261	≤ 25.31
5795	-10.769	0.232	-3.547	
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-9.867	0.232	-2.645	≤ 25.31
5795	-10.031	0.232	-2.809	
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-10.174	0.232	-2.952	≤ 25.31
5795	-10.467	0.232	-3.245	
Frequency (MHz)	ANT-0+1+2+3			
	Calculated (dBm/500 kHz)			Limit (dBm/500 kHz)
5755	2.897			≤ 25.31
5795	2.722			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)

Test Mode	Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-7.234	0.244	-6.990	≤ 12.35
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-7.606	0.244	-7.362	≤ 12.35
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-7.523	0.244	-7.279	≤ 12.35
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-7.448	0.244	-7.204	≤ 12.35
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5210.0	-1.186			≤ 12.35

Note: Method SA-2, Power density = measured result + $10 \log(1/\text{duty cycle})$ + Conversion ratio = measured result + duty factor.

Test Mode	Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-14.084	0.244	-6.851	≤ 25.31
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-14.107	0.244	-6.874	≤ 25.31
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-12.990	0.244	-5.757	≤ 25.31
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-13.692	0.244	-6.459	≤ 25.31
Frequency (MHz)	ANT-0+1+2+3			
	Calculated (dBm/500 kHz)			Limit (dBm/500 kHz)
5775	-0.440			≤ 25.31

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)

Test Mode	Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	0.188	0.168	0.356	≤ 12.35
5200	1.878	0.168	2.046	
5240	1.943	0.168	2.111	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	0.408	0.168	0.576	≤ 12.35
5200	2.083	0.168	2.251	
5240	2.040	0.168	2.208	
Frequency (MHz)	ANT-2			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	0.221	0.168	0.389	≤ 12.35
5200	1.563	0.168	1.731	
5240	1.690	0.168	1.858	
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5180	0.620	0.168	0.788	≤ 12.35
5200	2.165	0.168	2.333	
5240	1.721	0.168	1.889	
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5180.0	6.551			≤ 12.35
5200.0	8.117			
5240.0	8.039			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-8.690	0.168	-1.533	≤ 25.31
5785	-8.834	0.168	-1.677	
5825	-8.639	0.168	-1.482	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-8.185	0.168	-1.028	≤ 25.31
5785	-8.527	0.168	-1.370	
5825	-8.576	0.168	-1.419	
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-7.403	0.168	-0.246	≤ 25.31
5785	-7.576	0.168	-0.419	
5825	-7.906	0.168	-0.749	
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5745	-8.015	0.168	-0.858	≤ 25.31
5785	-8.578	0.168	-1.421	
5825	-8.323	0.168	-1.166	
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/500 kHz)
	Calculated (dBm/500 kHz)			
5745	5.129			≤ 25.31
5785	4.826			
5825	4.827			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)

Test Mode	Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	-3.924	0.232	-3.692	≤ 12.35
5230	-0.939	0.232	-0.707	
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	-3.902	0.232	-3.670	≤ 12.35
5230	-0.731	0.232	-0.499	
Frequency (MHz)	ANT-2			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	-3.931	0.232	-3.699	≤ 12.35
5230	-0.986	0.232	-0.754	
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5190	-3.548	0.232	-3.316	≤ 12.35
5230	-0.927	0.232	-0.695	
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5190.0	2.430			≤ 12.35
5230.0	5.358			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Test Mode	Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-11.677	0.232	-4.455	≤ 25.31
5795	-11.500	0.232	-4.278	
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-11.370	0.232	-4.148	≤ 25.31
5795	-11.675	0.232	-4.453	
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-9.977	0.232	-2.755	≤ 25.31
5795	-10.428	0.232	-3.206	
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5755	-10.825	0.232	-3.603	≤ 25.31
5795	-11.186	0.232	-3.964	
Frequency (MHz)	ANT-0+1+2+3			
	Calculated (dBm/500 kHz)			Limit (dBm/500 kHz)
5755	2.329			≤ 25.31
5795	2.072			

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

Conversion ratio = 10*Log(500 k/100 k)

Test Mode	Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-7.513	0.244	-7.269	≤ 12.35
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-7.612	0.244	-7.368	≤ 12.35
Frequency (MHz)	ANT-1			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-7.634	0.244	-7.390	≤ 12.35
Frequency (MHz)	ANT-3			
	Measurement (dBm/MHz)	Duty Factor (dB)	Calculated (dBm/MHz)	Limit (dBm/MHz)
5210	-7.244	0.244	-7.000	≤ 12.35
Power Spectral Density and E.I.R.P. Spectral Density				
Frequency (MHz)	ANT-0+1+2+3			Limit (dBm/MHz)
	Calculated (dBm/MHz)			
5210.0	-1.234			≤ 12.35

Note: Method SA-2, Power density = measured result + $10 \log(1/\text{duty cycle})$ + Conversion ratio = measured result + duty factor.

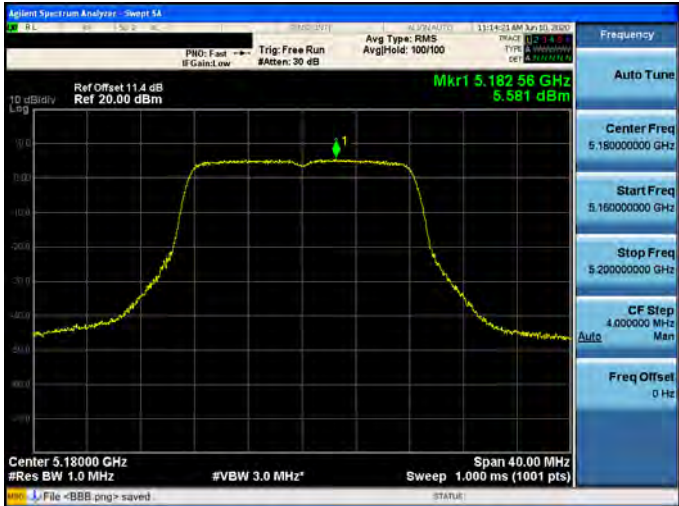
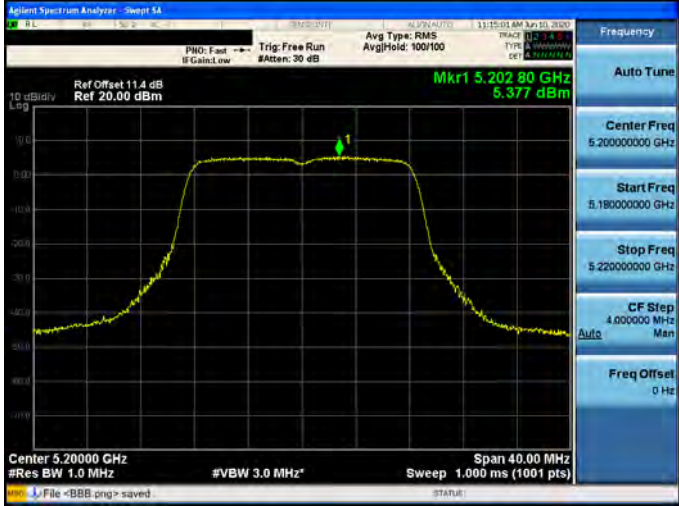
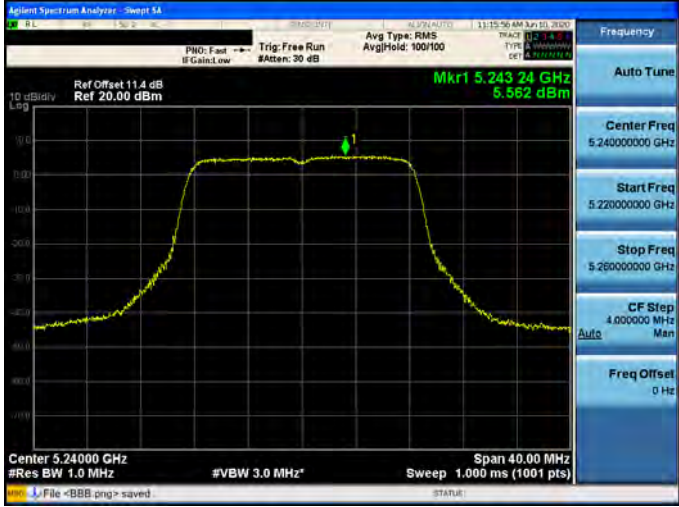
Test Mode	Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode			
Conducted power spectral density				
Frequency (MHz)	ANT-0			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-14.595	0.244	-7.362	≤ 25.31
Frequency (MHz)	ANT-1			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-14.431	0.244	-7.198	≤ 25.31
Frequency (MHz)	ANT-2			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-13.336	0.244	-6.103	≤ 25.31
Frequency (MHz)	ANT-3			
	Measurement (dBm/100 kHz)	Duty Factor (dB)	Calculated (dBm/500 kHz)	Limit (dBm/500 kHz)
5775	-14.143	0.244	-6.910	≤ 25.31
Frequency (MHz)	ANT-0+1+2+3			
	Calculated (dBm/500 kHz)			Limit (dBm/500 kHz)
5775	-0.845			≤ 25.31

Note: Method SA-2, Power density = measured result + 10 log(1/duty cycle) + Conversion ratio = measured result + duty factor.

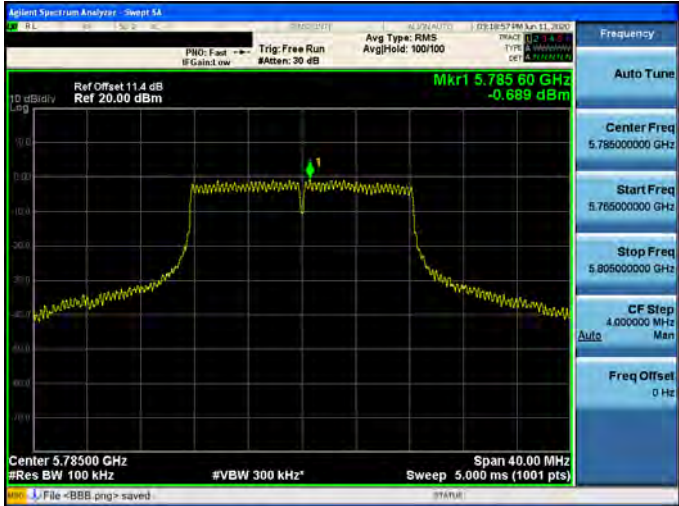
Conversion ratio = 10*Log(500 k/100 k)

■ Test Graphs

Mode 2: IEEE 802.11a Continuous TX mode_ANT-0

5180 MHz	 Agilent Spectrum Analyzer - Sweep 54 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.182 58 GHz 5.581 dBm Center 5.18000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File >BBB.png> saved STATUS Frequency Auto Tune Center Freq 5.18000000 GHz Start Freq 5.16000000 GHz Stop Freq 5.20000000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz
5200 MHz	 Agilent Spectrum Analyzer - Sweep 54 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.202 80 GHz 5.377 dBm Center 5.20000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File >BBB.png> saved STATUS Frequency Auto Tune Center Freq 5.20000000 GHz Start Freq 5.18000000 GHz Stop Freq 5.22000000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz
5240 MHz	 Agilent Spectrum Analyzer - Sweep 54 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.243 24 GHz 5.562 dBm Center 5.24000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File >BBB.png> saved STATUS Frequency Auto Tune Center Freq 5.24000000 GHz Start Freq 5.22000000 GHz Stop Freq 5.26000000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz

Mode 2: IEEE 802.11a Continuous TX mode_ANT-0

5745 MHz	
5785 MHz	
5825 MHz	



Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-0

5180 MHz	
5200 MHz	
5240 MHz	



Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-0

5745 MHz	
5785 MHz	
5825 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-0	
5190 MHz	
5230 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-0

5755 MHz	
5795 MHz	



Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-0

5210 MHz

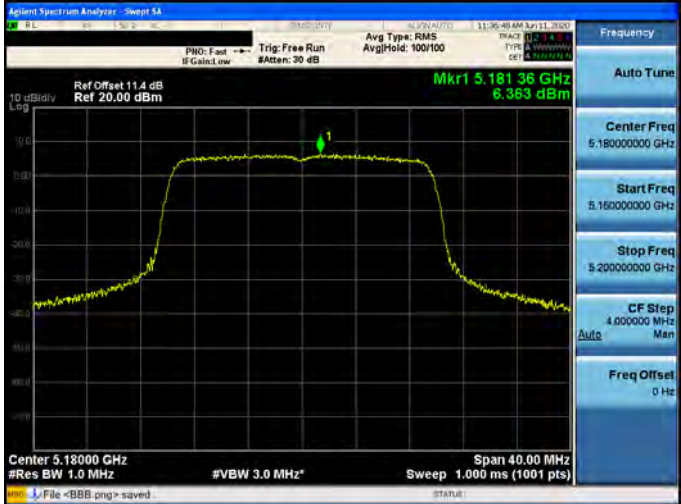


Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-0

5775 MHz



Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-0

5180 MHz	
5200 MHz	
5240 MHz	



Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-0

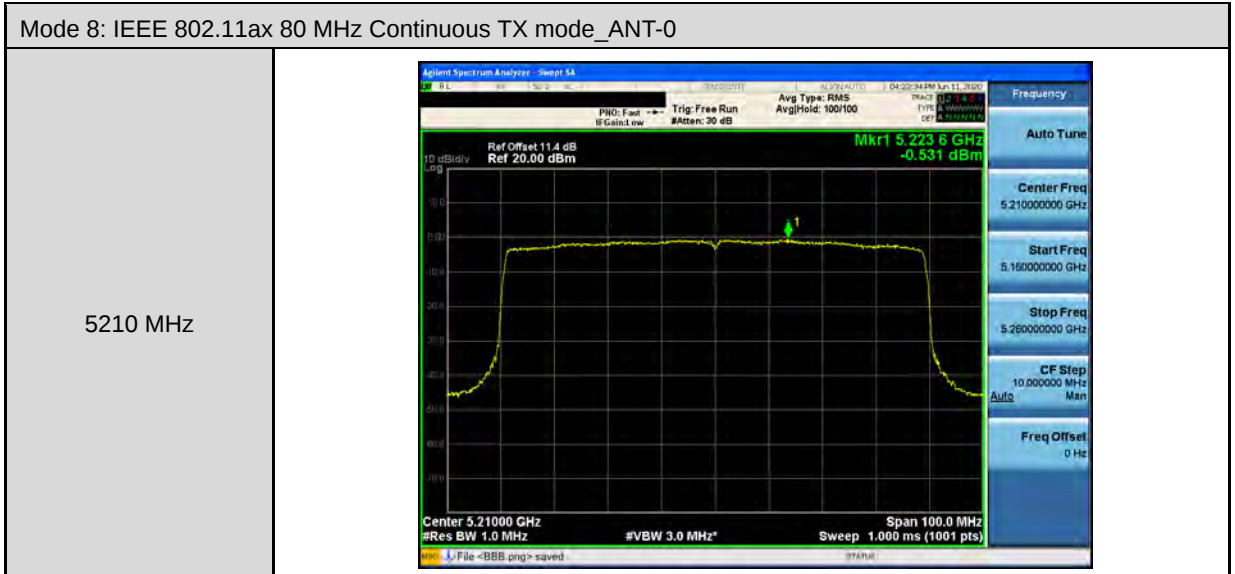
5745 MHz	
5785 MHz	
5825 MHz	



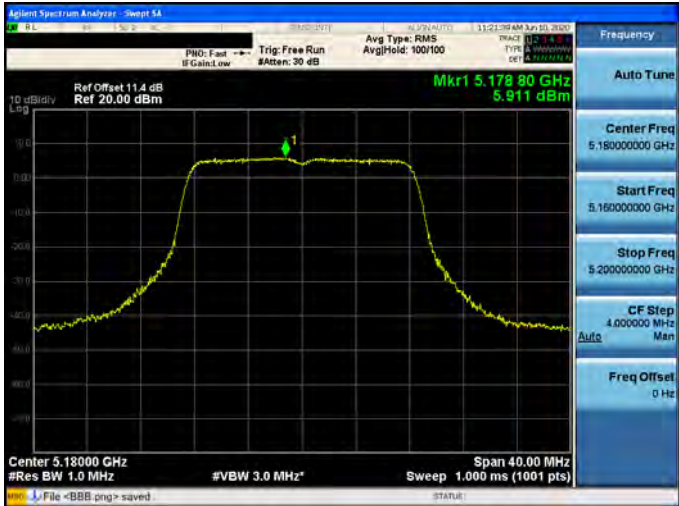
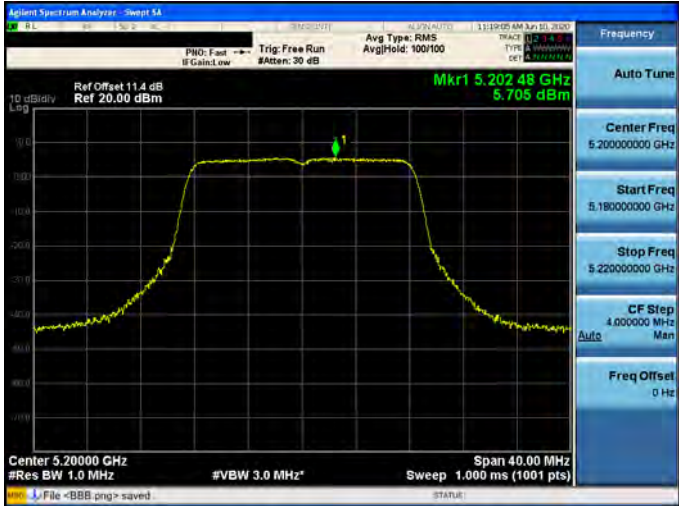
Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-0	
5190 MHz	
5230 MHz	



Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-0	
5755 MHz	
5795 MHz	



Mode 2: IEEE 802.11a Continuous TX mode_ANT-1

5180 MHz	 Agilent Spectrum Analyzer - Sweep 54 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.178 80 GHz 5.911 dBm Center 5.18000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts) File >BBB.png> saved
5200 MHz	 Agilent Spectrum Analyzer - Sweep 54 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.202 48 GHz 5.705 dBm Center 5.20000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts) File >BBB.png> saved
5240 MHz	 Agilent Spectrum Analyzer - Sweep 54 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.237 52 GHz 5.823 dBm Center 5.24000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Span 40.00 MHz Sweep 1.000 ms (1001 pts) File >BBB.png> saved

Mode 2: IEEE 802.11a Continuous TX mode_ANT-1

5745 MHz	
5785 MHz	
5825 MHz	



Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-1	
5180 MHz	
5200 MHz	
5240 MHz	

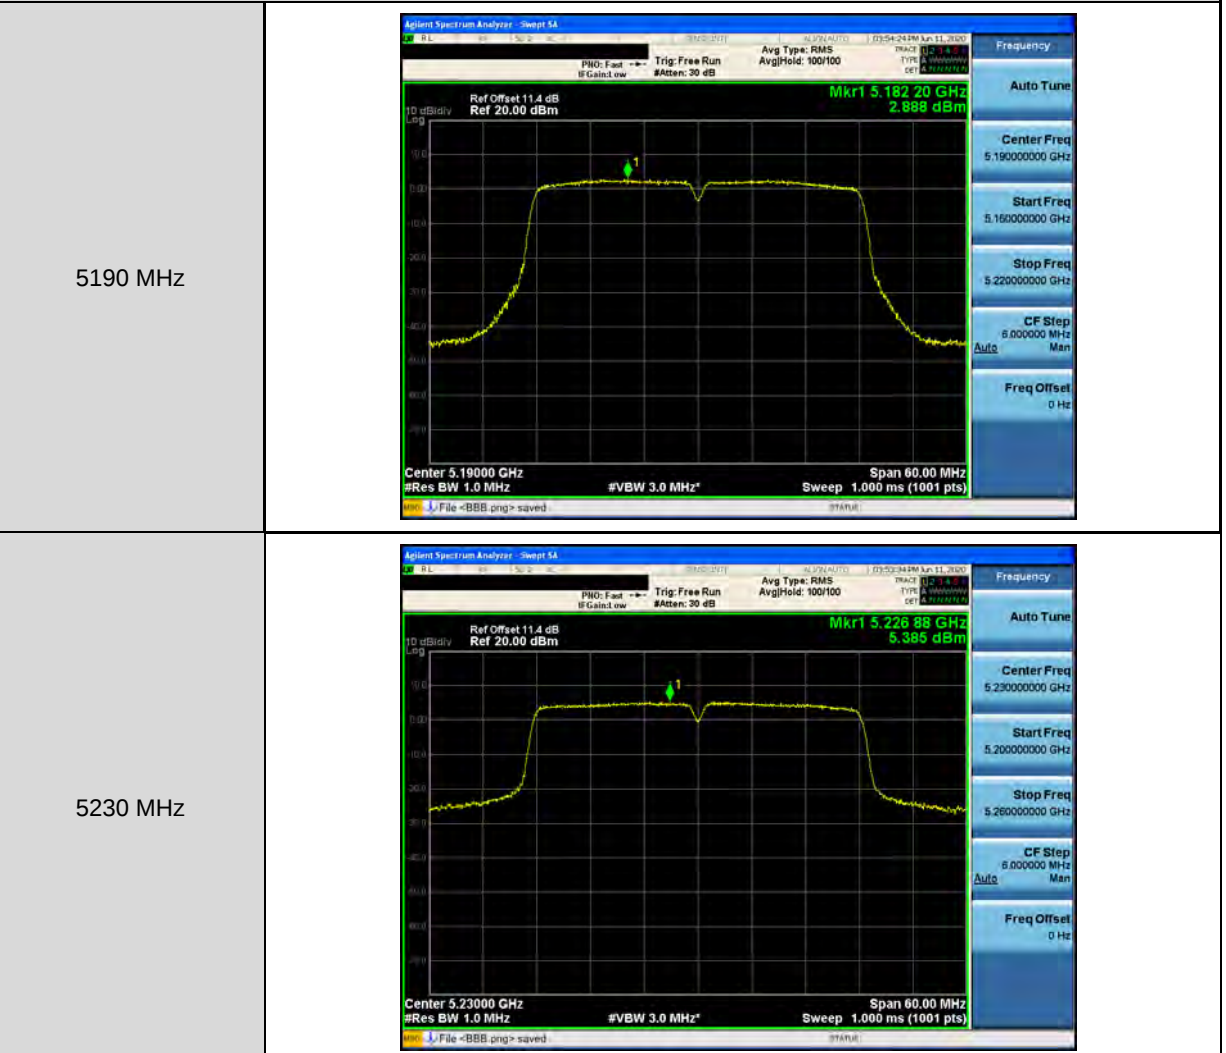


Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-1

5745 MHz	
5785 MHz	
5825 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-1





Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-1	
5755 MHz	
5795 MHz	



Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-1

5210 MHz



Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-1

5775 MHz



Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-1

5180 MHz	
5200 MHz	
5240 MHz	



Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-1

5745 MHz	
5785 MHz	
5825 MHz	

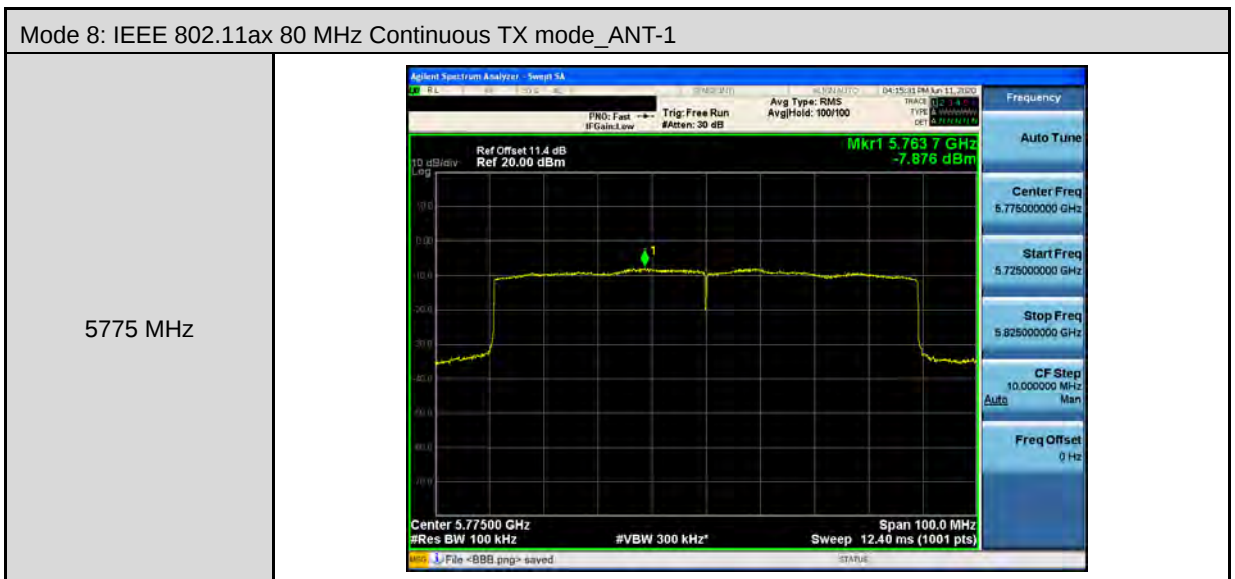
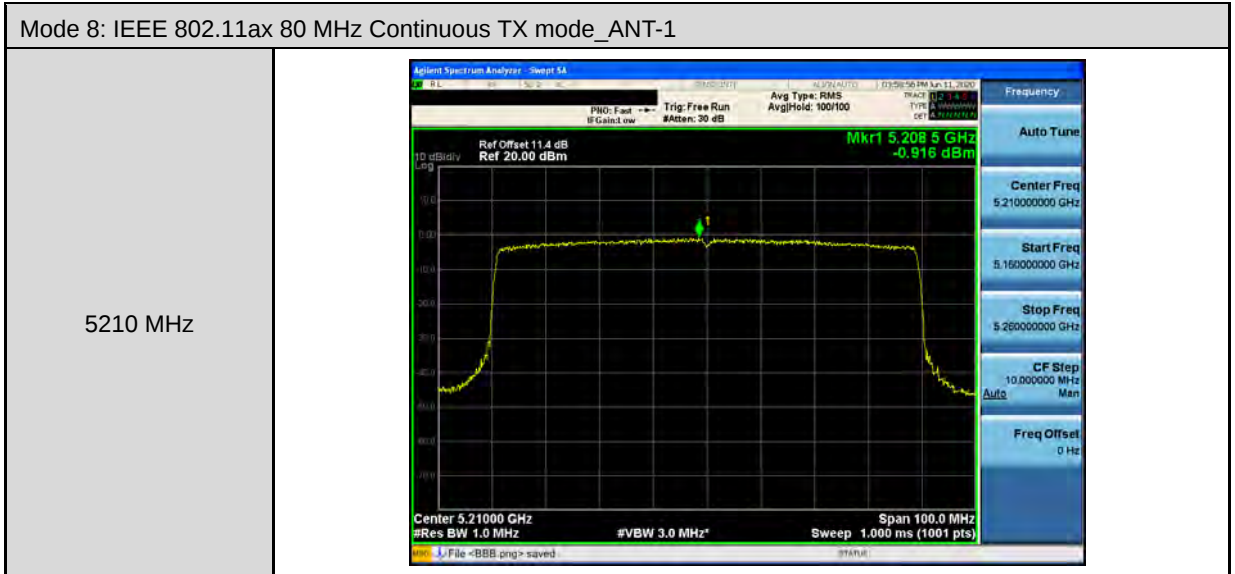


Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-1

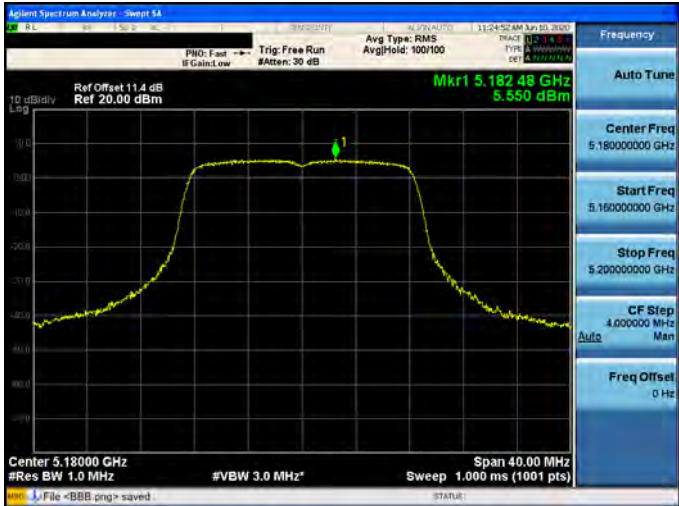
5190 MHz	
5230 MHz	



Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-1	
5755 MHz	
5795 MHz	



Mode 2: IEEE 802.11a Continuous TX mode_ANT-2

5180 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.182 48 GHz 5.550 dBm Center 5.18000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File <BBB.png> saved Frequency Auto Tune Center Freq 5.18000000 GHz Start Freq 5.16000000 GHz Stop Freq 5.20000000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz
5200 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.195 58 GHz 5.177 dBm Center 5.20000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File <BBB.png> saved Frequency Auto Tune Center Freq 5.20000000 GHz Start Freq 5.18000000 GHz Stop Freq 5.22000000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz
5240 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.244 48 GHz 5.287 dBm Center 5.24000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File <BBB.png> saved Frequency Auto Tune Center Freq 5.24000000 GHz Start Freq 5.22000000 GHz Stop Freq 5.26000000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz

Mode 2: IEEE 802.11a Continuous TX mode_ANT-2

5745 MHz	
5785 MHz	
5825 MHz	



Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-2

5180 MHz	
5200 MHz	
5240 MHz	

Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-2

5745 MHz	
5785 MHz	
5825 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-2

5190 MHz	
5230 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-2	
5755 MHz	
5795 MHz	



Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-2

5210 MHz



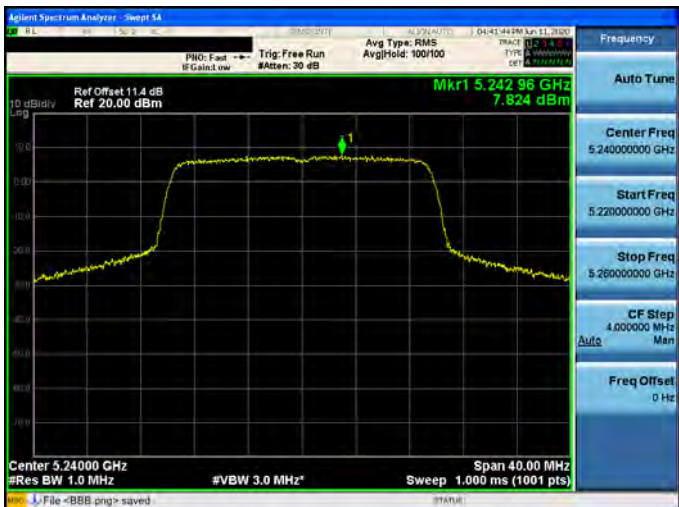
Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-2

5775 MHz





Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-2

5180 MHz	
5200 MHz	
5240 MHz	

Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-2

5745 MHz	
5785 MHz	
5825 MHz	



Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-2	
5190 MHz	
5230 MHz	



Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-2





Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode_ANT-2

5210 MHz

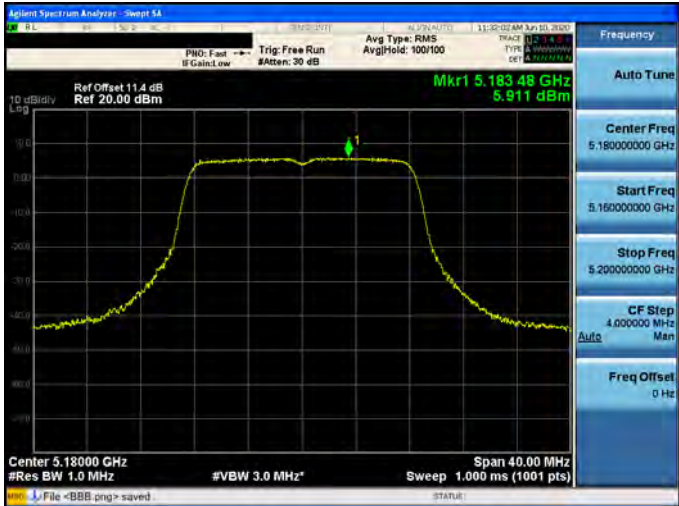
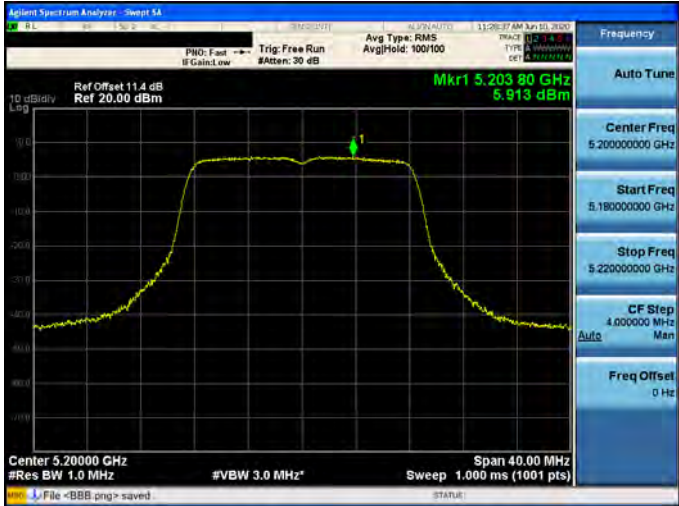


Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode_ANT-2

5775 MHz

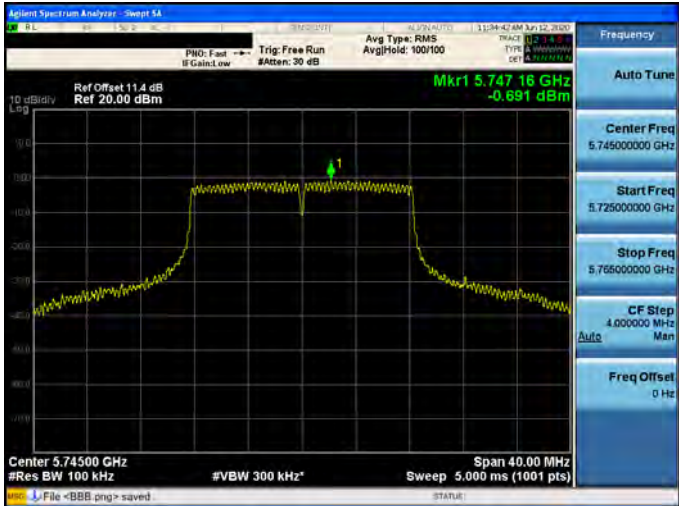
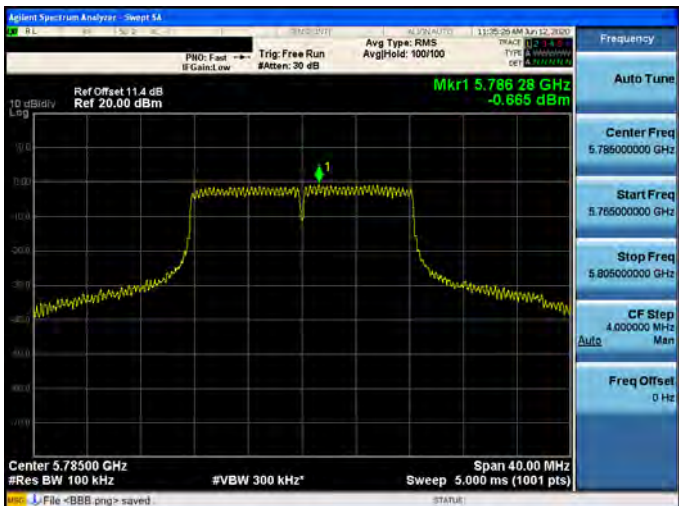
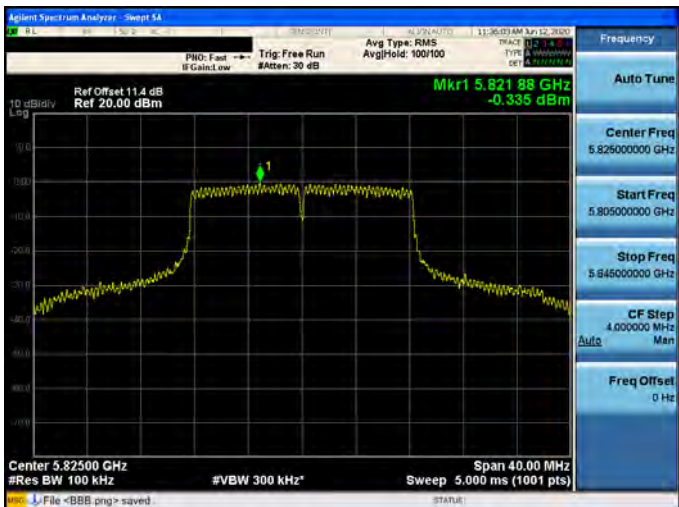


Mode 2: IEEE 802.11a Continuous TX mode_ANT-3

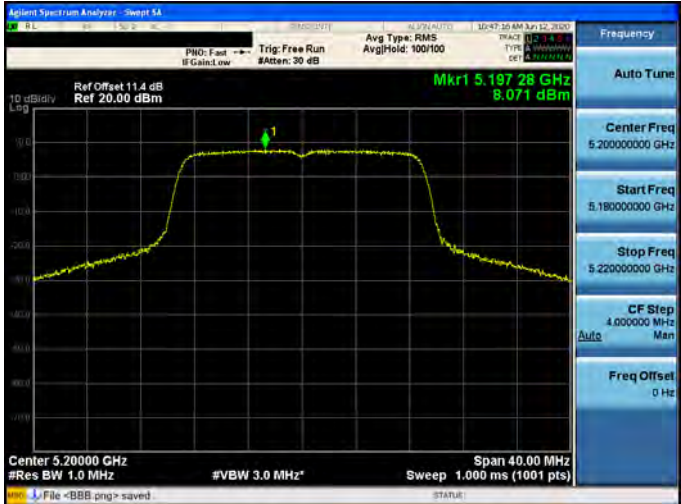
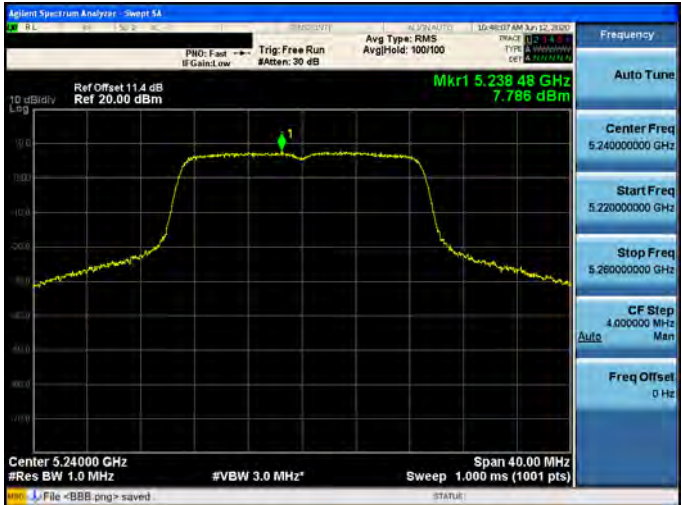
5180 MHz	
5200 MHz	
5240 MHz	



Mode 2: IEEE 802.11a Continuous TX mode_ANT-3

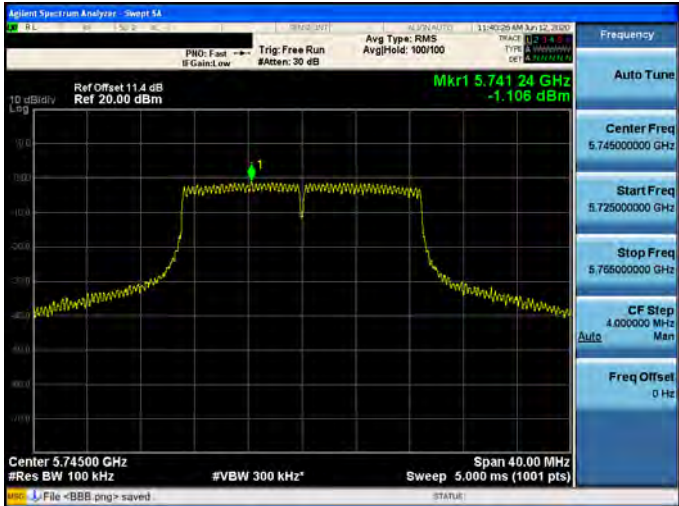
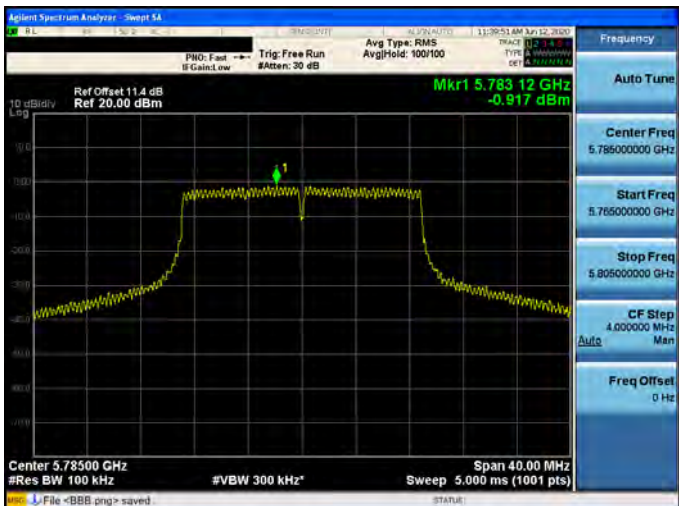
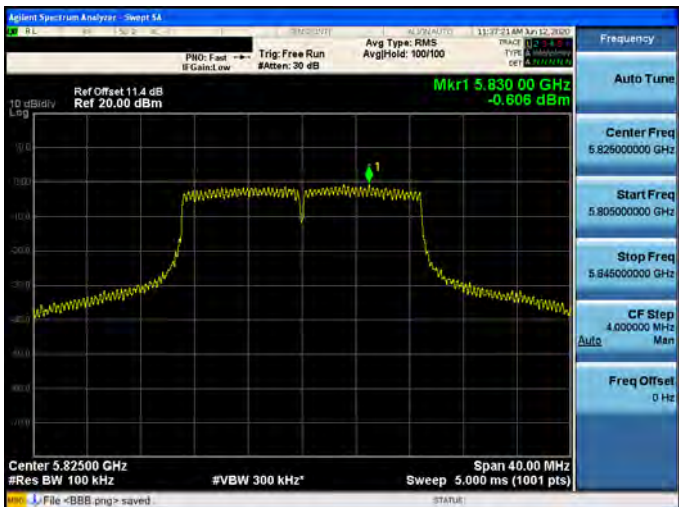
5745 MHz	
5785 MHz	
5825 MHz	

Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-3

5180 MHz	
5200 MHz	
5240 MHz	



Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-3

5745 MHz	
5785 MHz	
5825 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-3	
5190 MHz	
5230 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-3	
5755 MHz	
5795 MHz	



Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-3

5210 MHz



Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-3

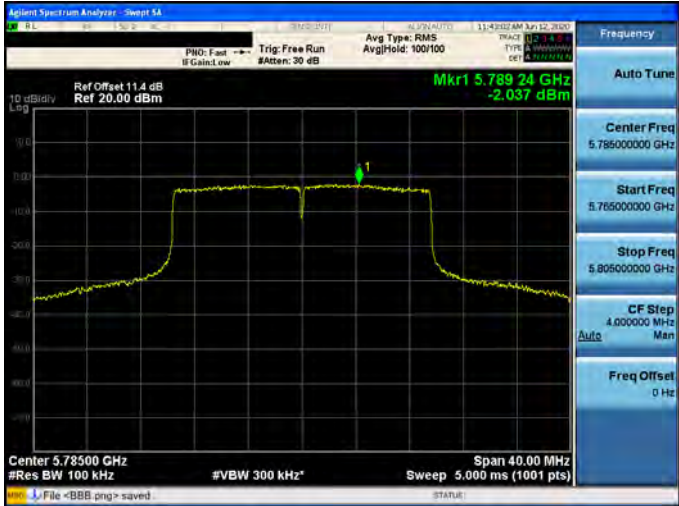
5775 MHz



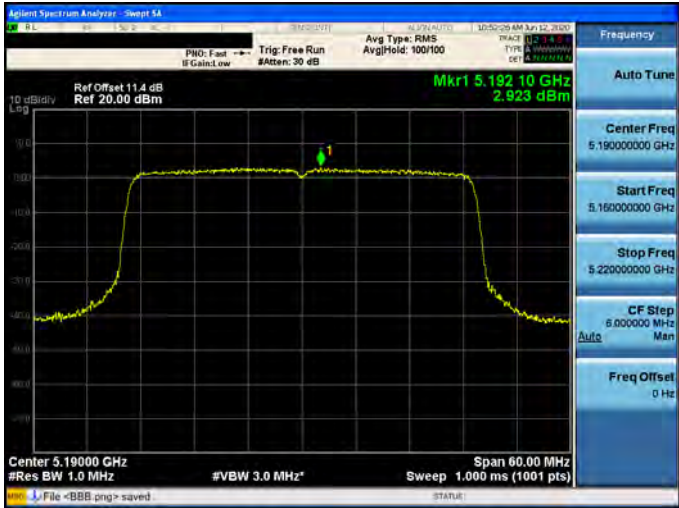
Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-3

5180 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.181 20 GHz 7.122 dBm Center 5.180000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File <BBB.png> saved STATUS Frequency Auto Tune Center Freq 5.180000000 GHz Start Freq 5.160000000 GHz Stop Freq 5.200000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz
5200 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.197 76 GHz 7.936 dBm Center 5.200000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File <BBB.png> saved STATUS Frequency Auto Tune Center Freq 5.200000000 GHz Start Freq 5.180000000 GHz Stop Freq 5.220000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz
5240 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.242 16 GHz 7.613 dBm Center 5.240000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File <BBB.png> saved STATUS Frequency Auto Tune Center Freq 5.240000000 GHz Start Freq 5.220000000 GHz Stop Freq 5.260000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz

Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-3

5745 MHz	
5785 MHz	
5825 MHz	

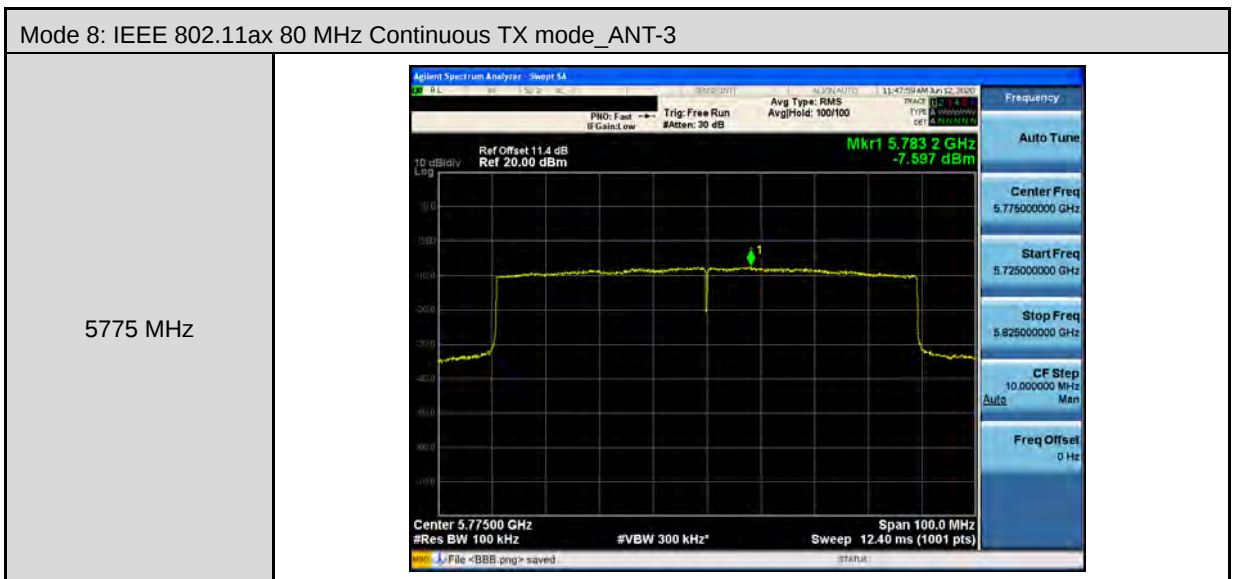
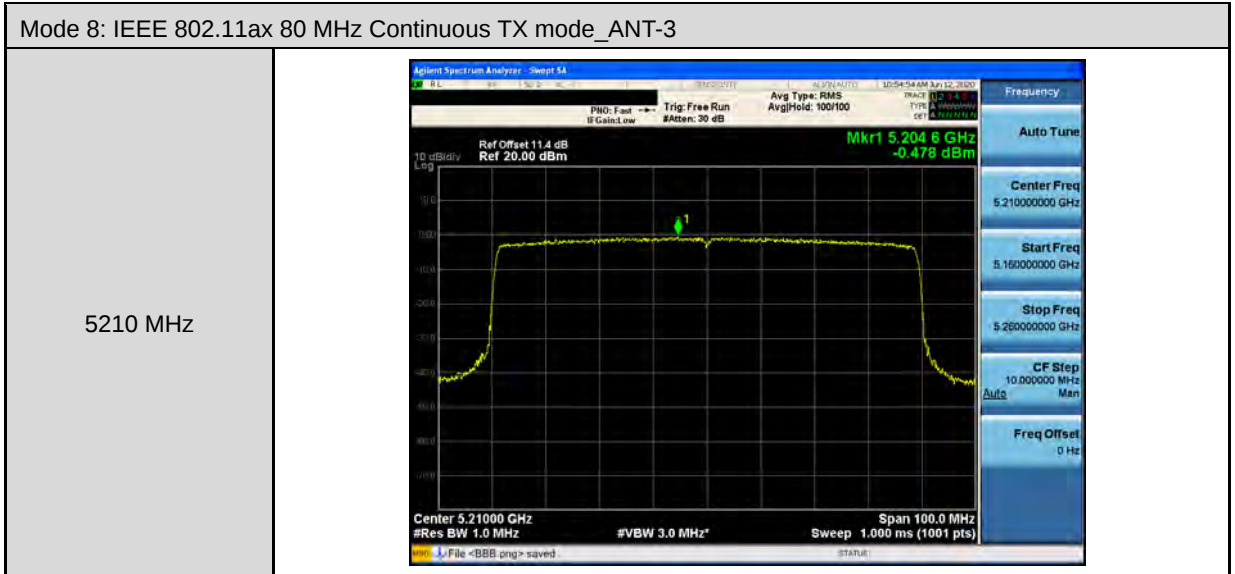


Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-3	
5190 MHz	
5230 MHz	



Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-3

5755 MHz	
5795 MHz	

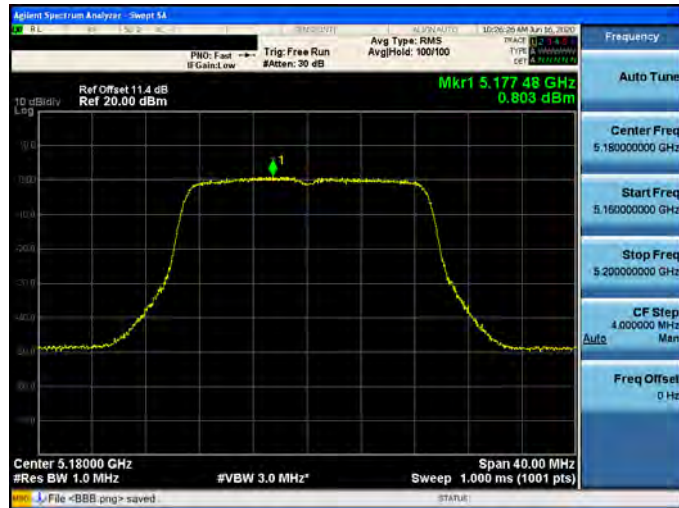




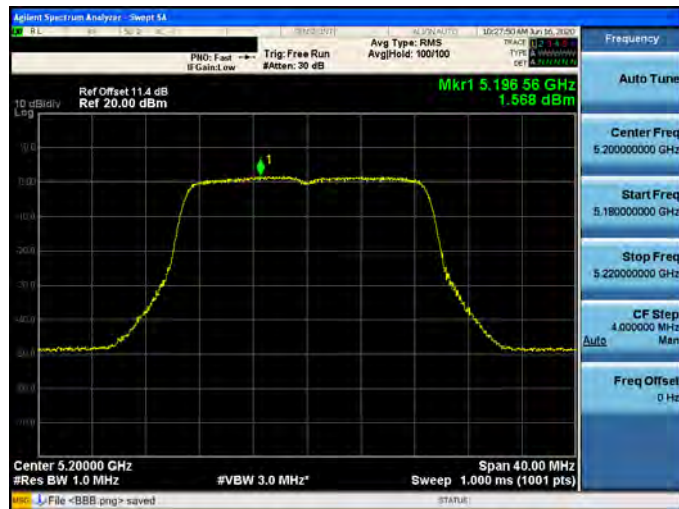
Beamforming on

Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-0

5180 MHz



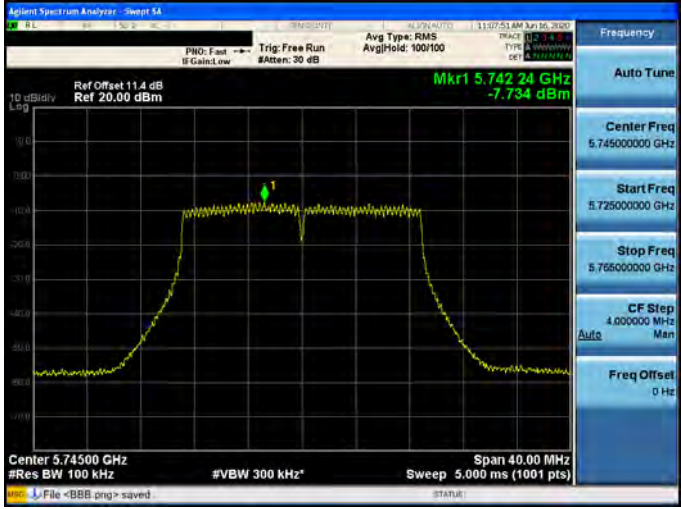
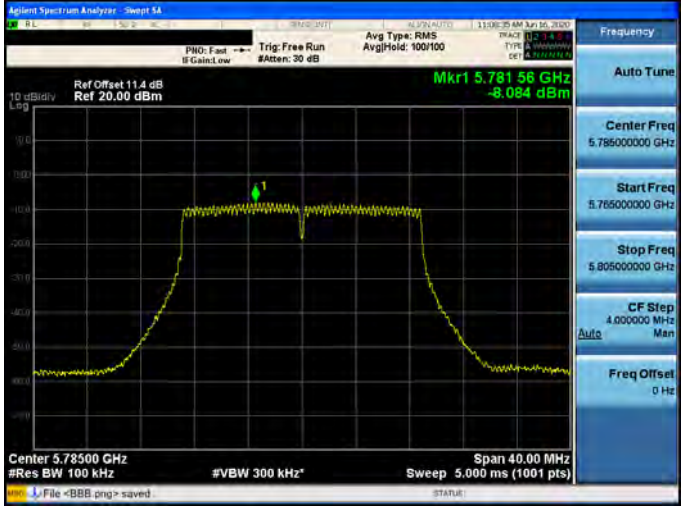
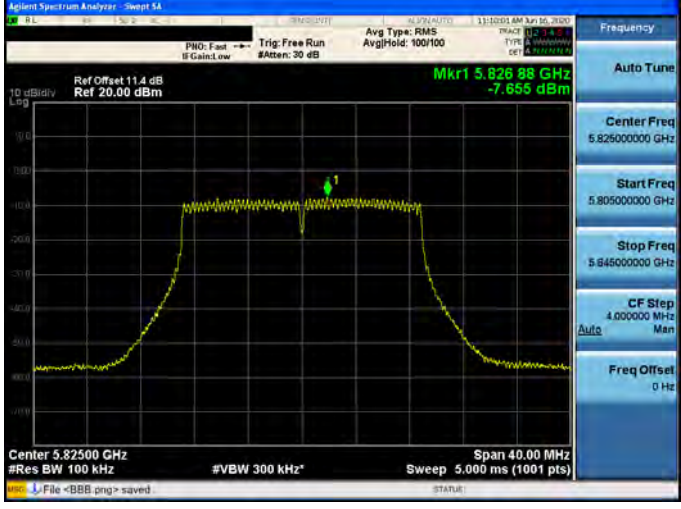
5200 MHz



5240 MHz

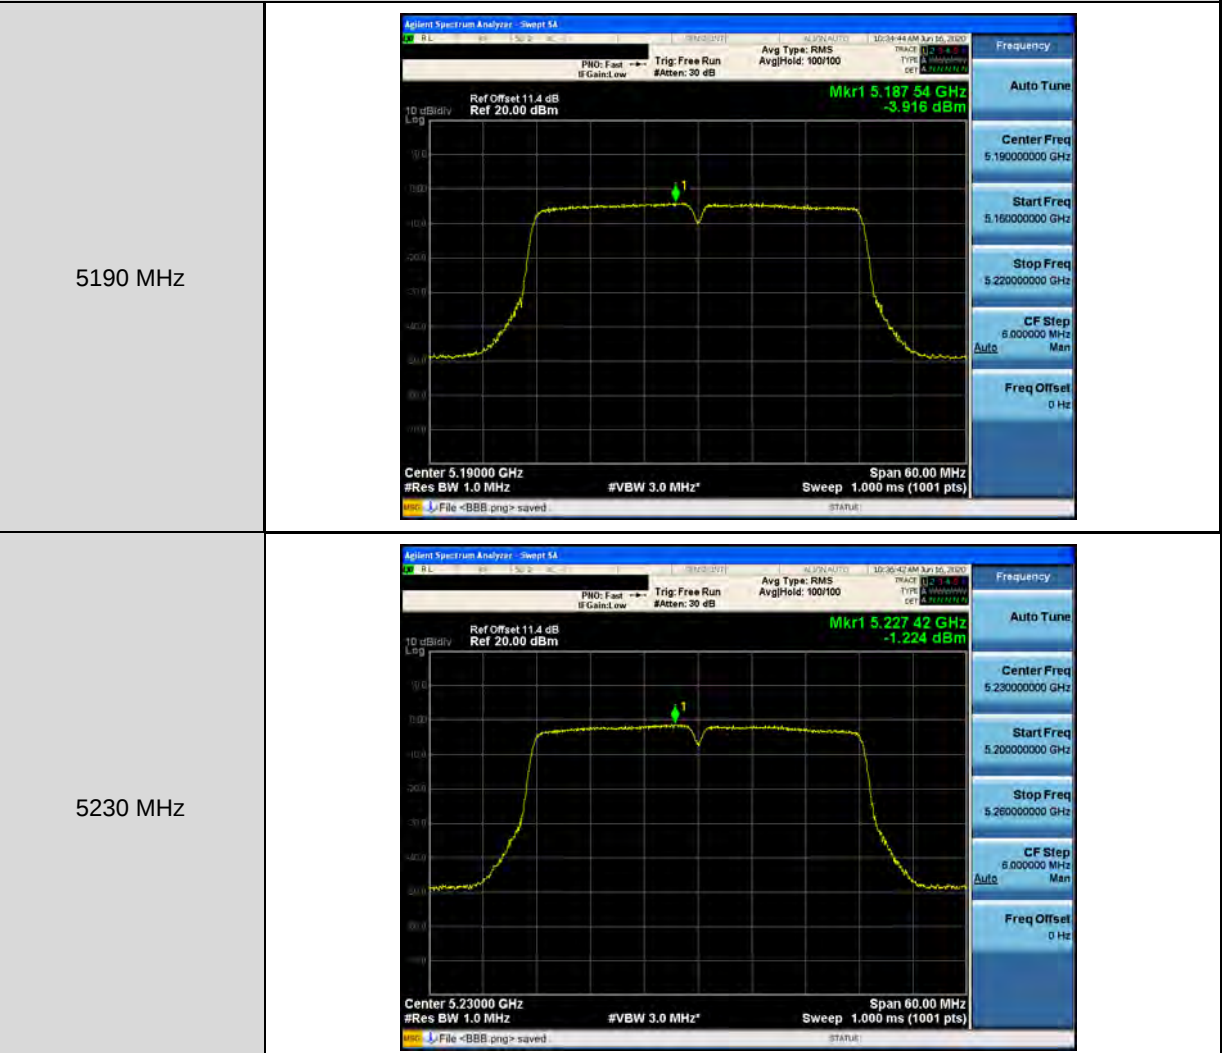


Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-0

5745 MHz	
5785 MHz	
5825 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-0





Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-0

5755 MHz	
5795 MHz	



Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-0

5210 MHz

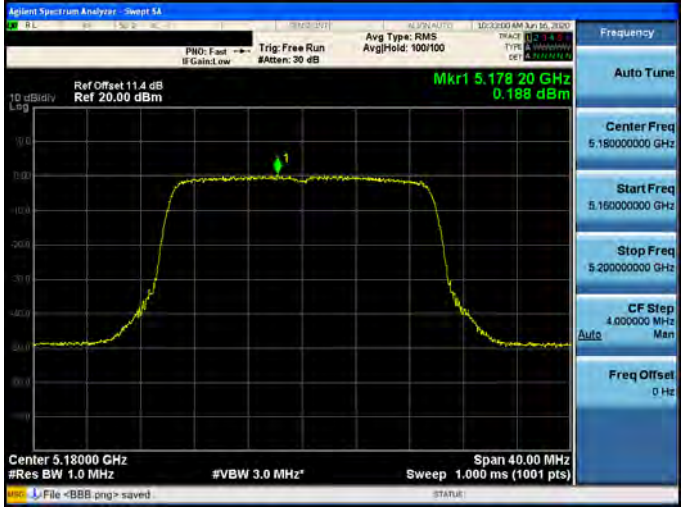
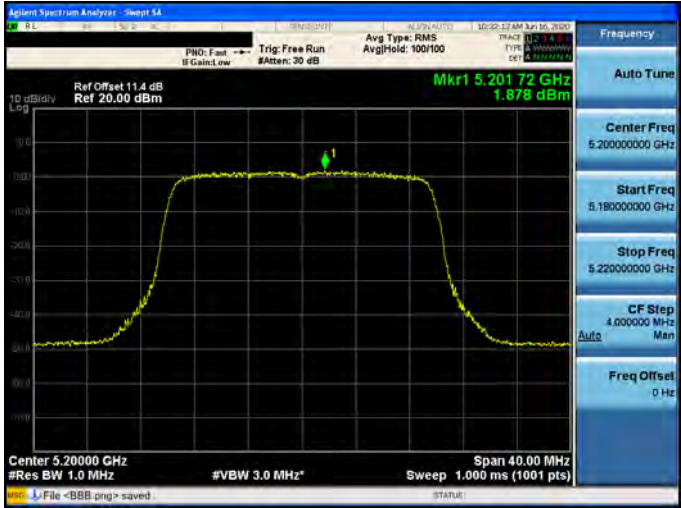
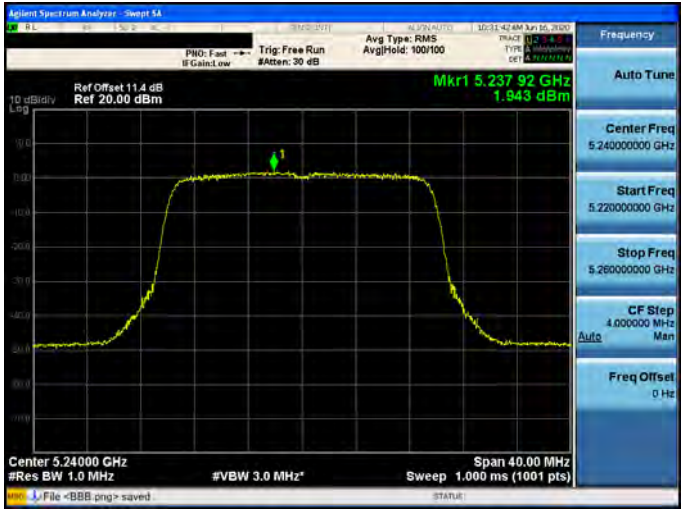


Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-0

5775 MHz

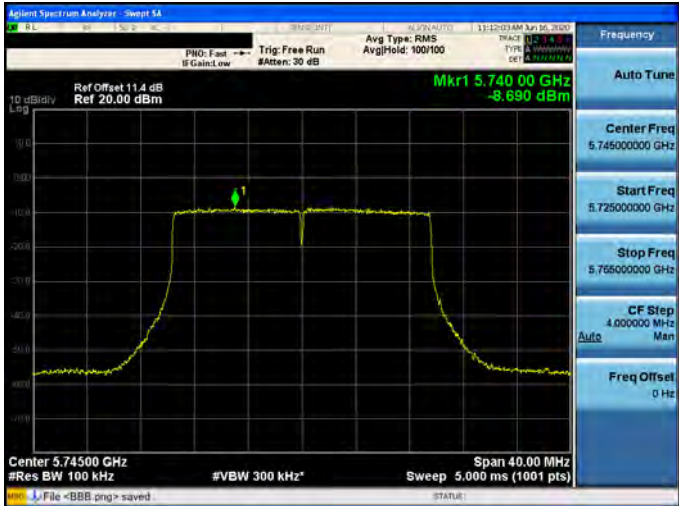
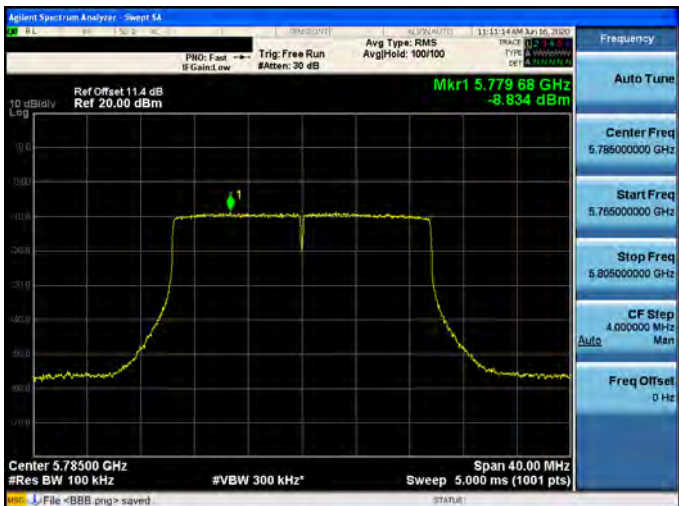
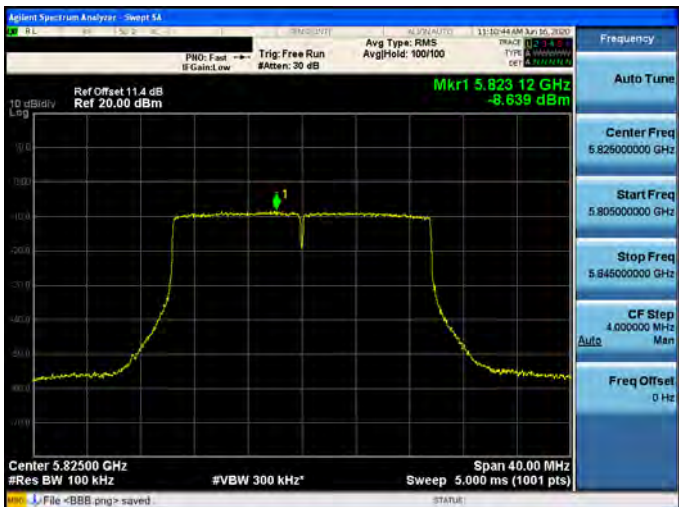


Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-0

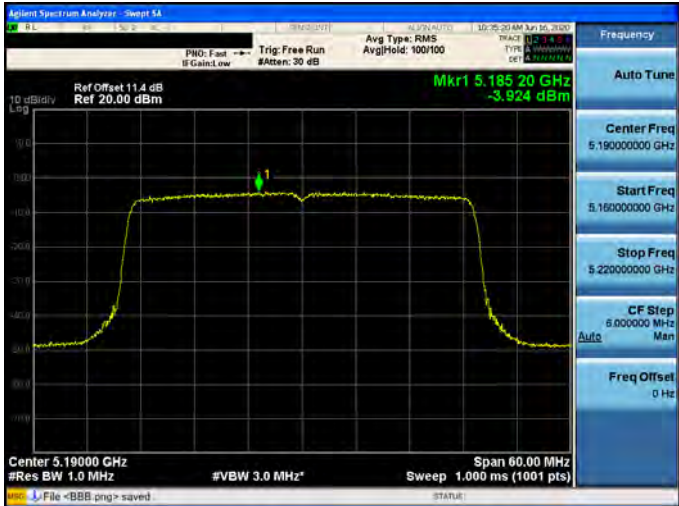
5180 MHz	
5200 MHz	
5240 MHz	



Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-0

5745 MHz	
5785 MHz	
5825 MHz	



Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-0	
5190 MHz	
5230 MHz	



Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-0	
5755 MHz	
5795 MHz	



Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode_ANT-0

5210 MHz

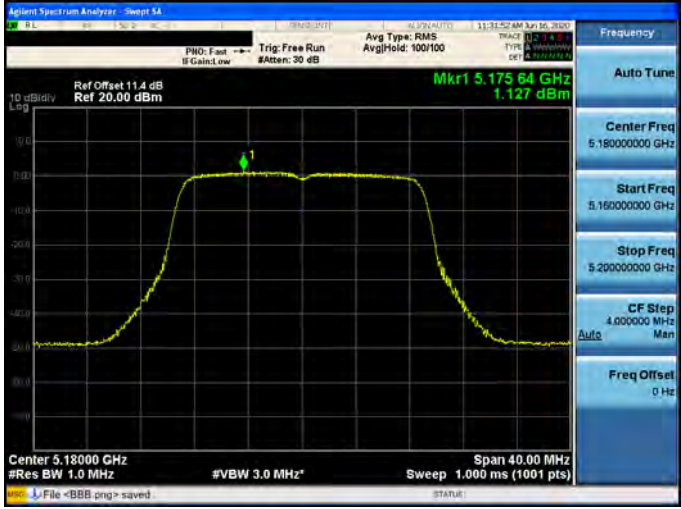
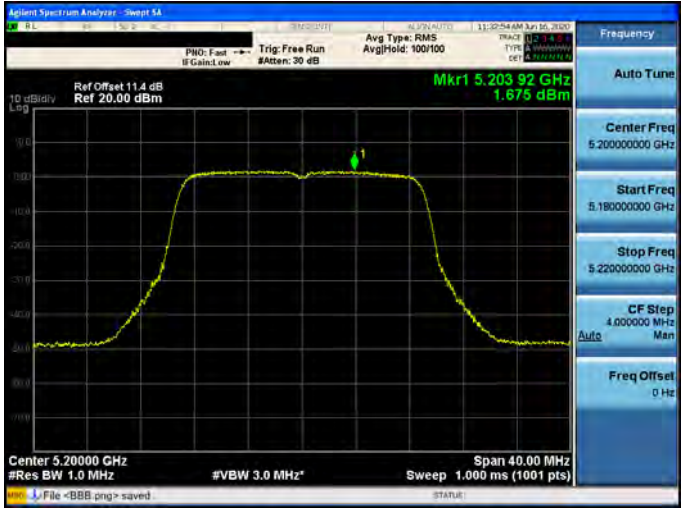
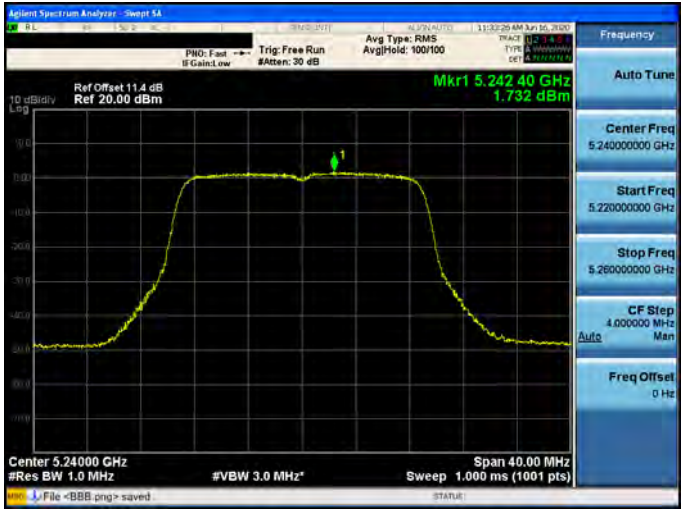


Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode_ANT-0

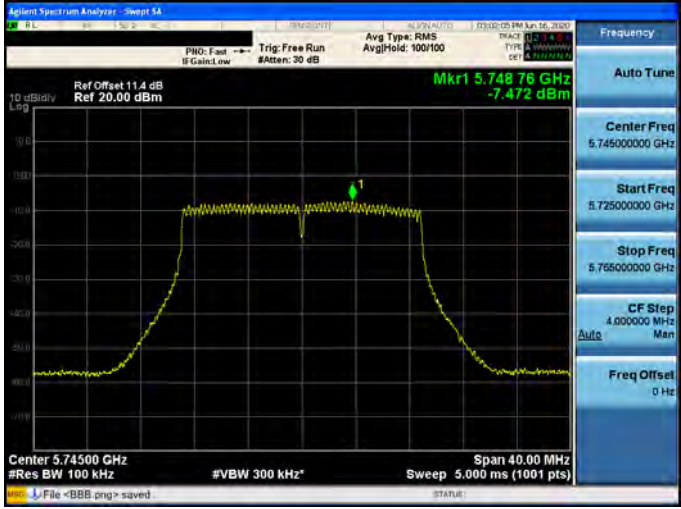
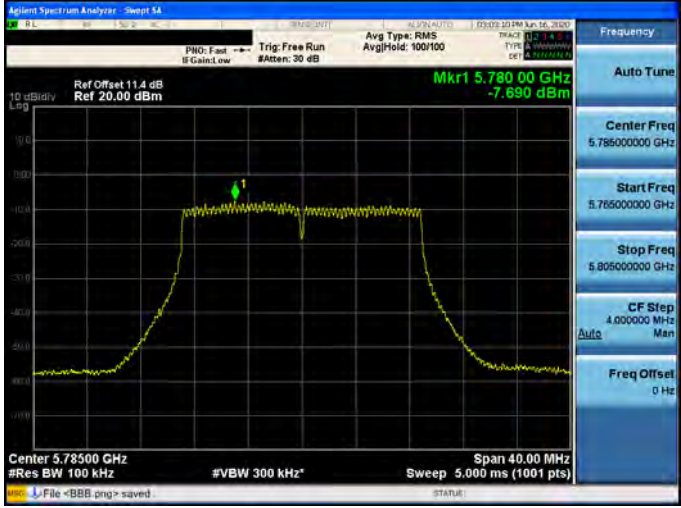
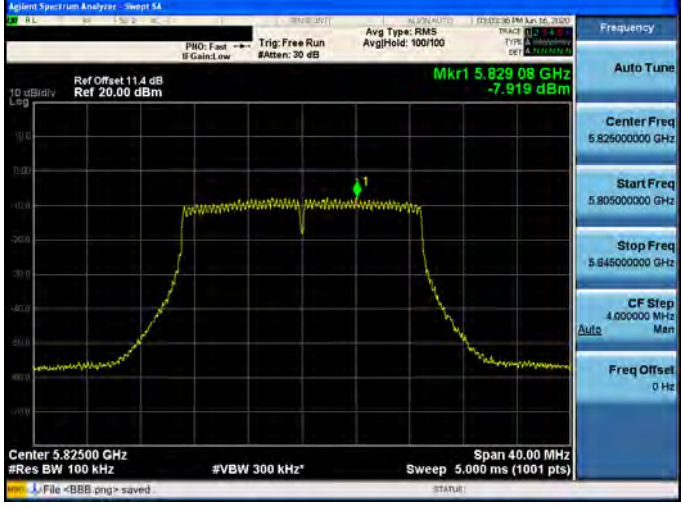
5775 MHz



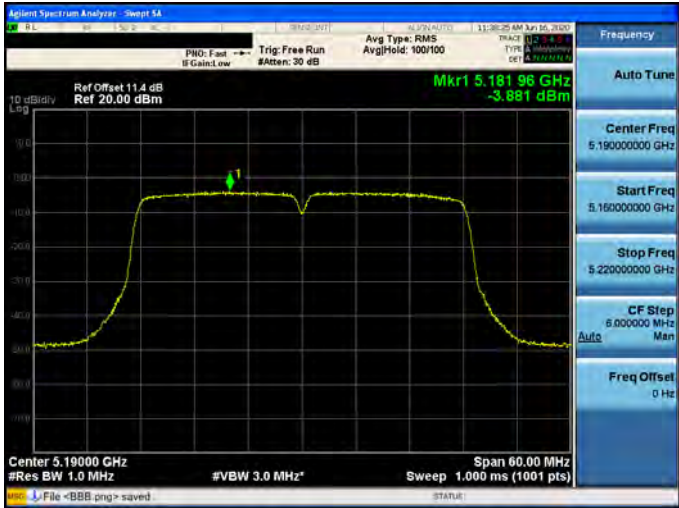
Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-1

5180 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.17584 GHz 1.127 dBm Center 5.18000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.000 MHz File >BBB.png> saved STATUS Frequency Auto Tune Center Freq 5.180000000 GHz Start Freq 5.160000000 GHz Stop Freq 5.200000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz
5200 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.20392 GHz 1.675 dBm Center 5.20000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.000 MHz File >BBB.png> saved STATUS Frequency Auto Tune Center Freq 5.200000000 GHz Start Freq 5.180000000 GHz Stop Freq 5.220000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz
5240 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.24240 GHz 1.732 dBm Center 5.24000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.000 MHz File >BBB.png> saved STATUS Frequency Auto Tune Center Freq 5.240000000 GHz Start Freq 5.220000000 GHz Stop Freq 5.260000000 GHz CF Step 4.000000 MHz Man Freq Offset 0 Hz

Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-1

5745 MHz	
5785 MHz	
5825 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-1	
5190 MHz	
5230 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-1	
5755 MHz	
5795 MHz	



Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-1

5210 MHz



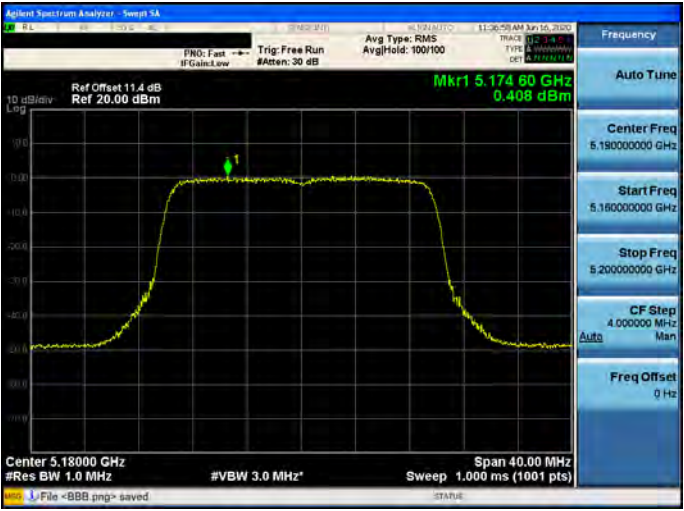
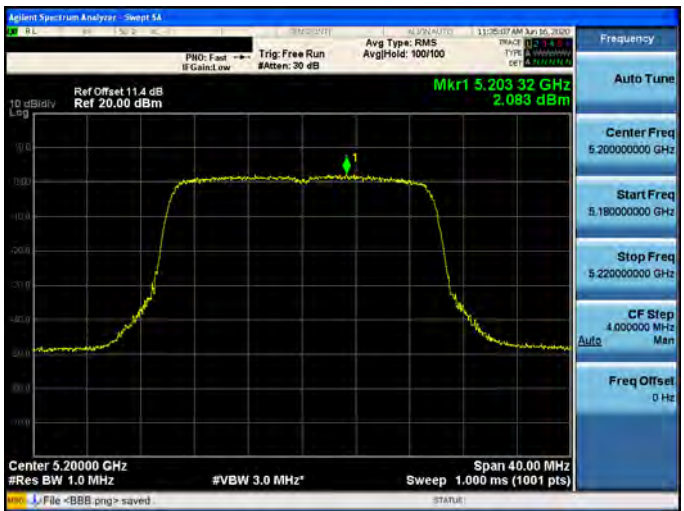
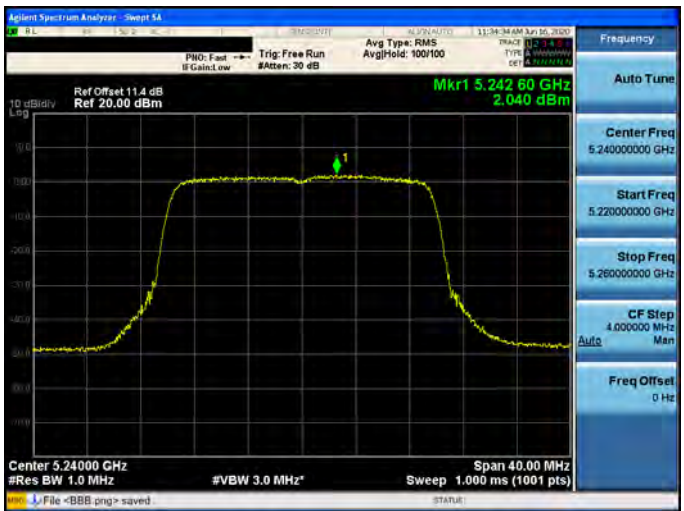
Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-1

5775 MHz



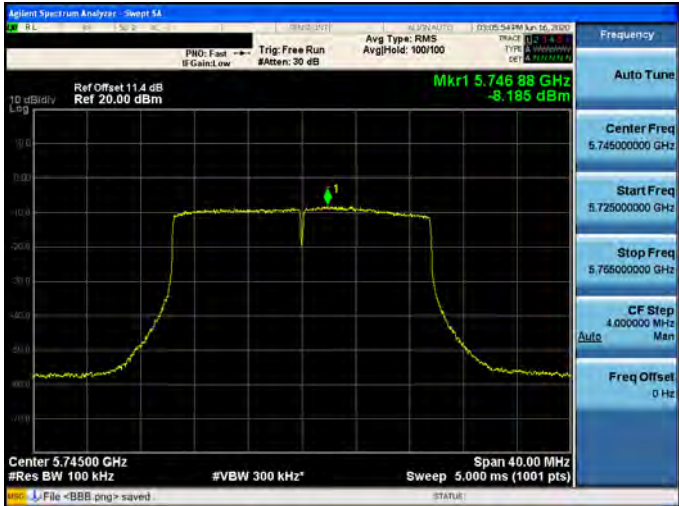
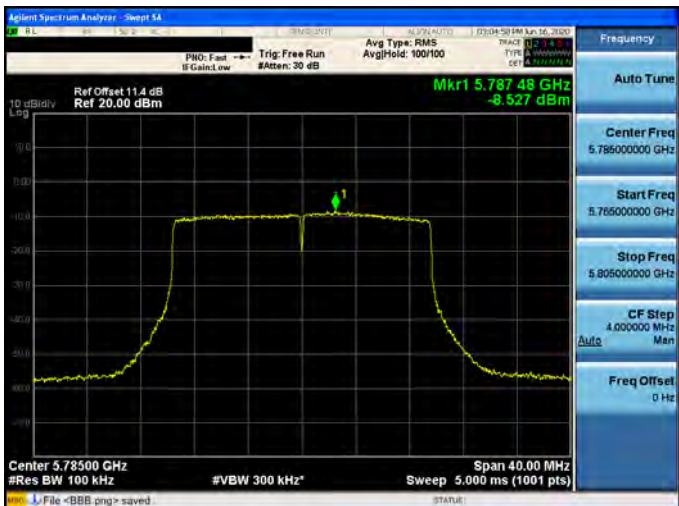


Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-1

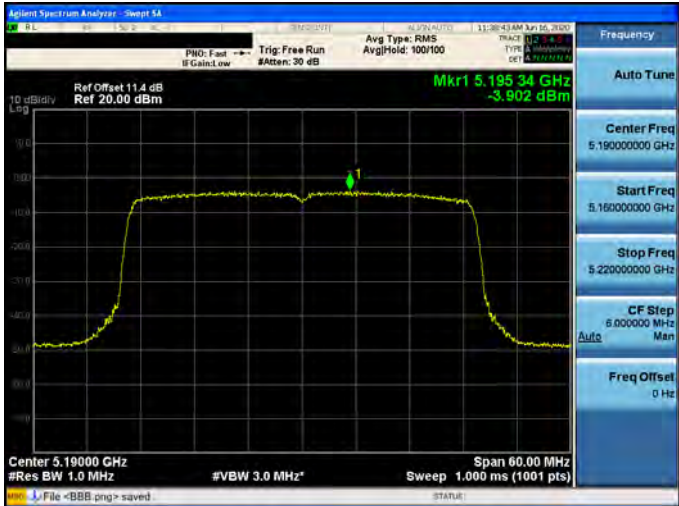
5180 MHz	
5200 MHz	
5240 MHz	



Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-1

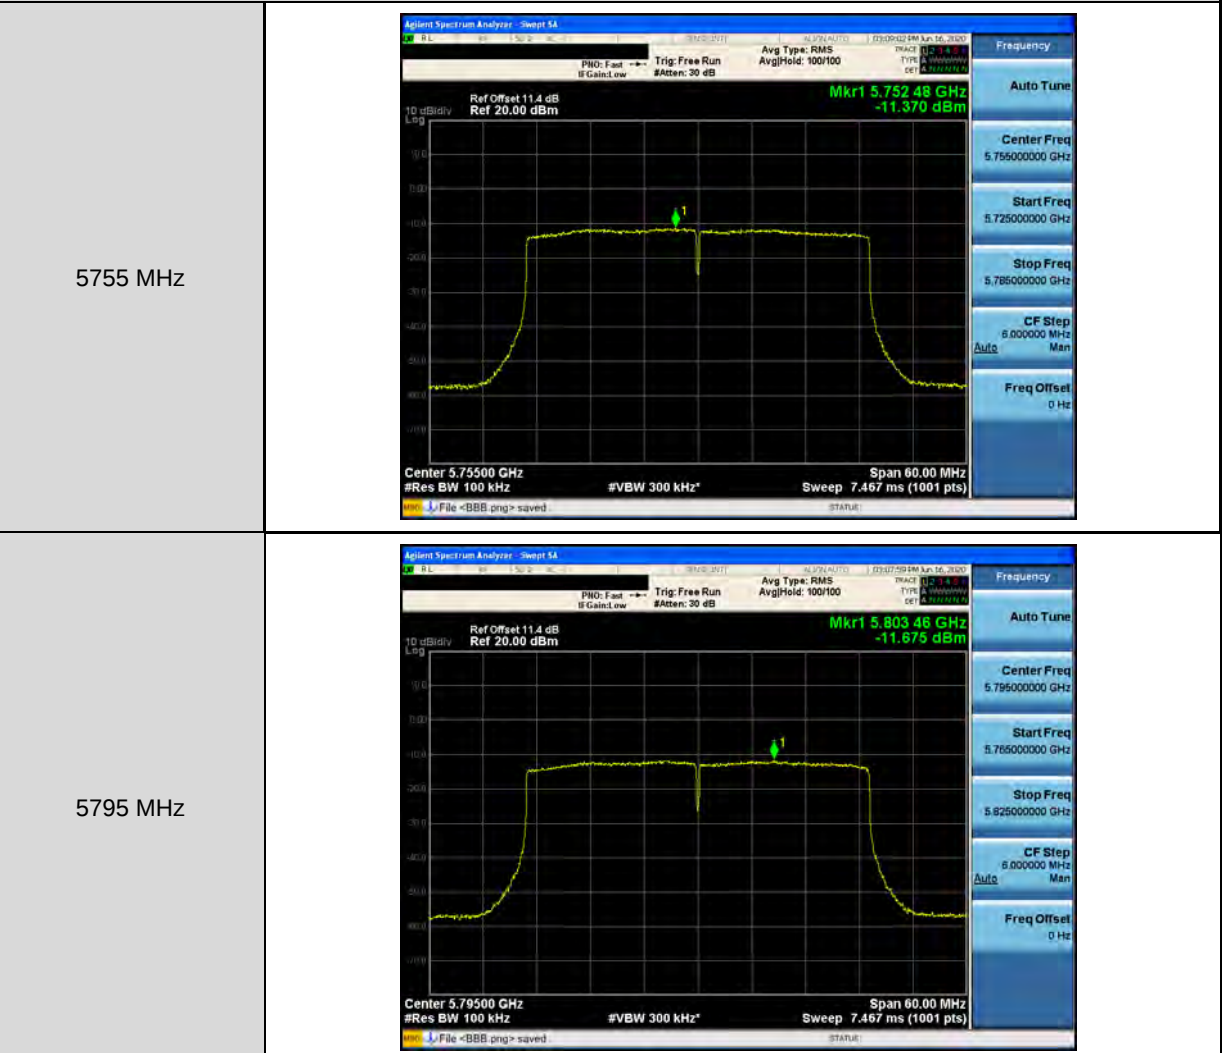
5745 MHz	
5785 MHz	
5825 MHz	

Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-1

5190 MHz	
5230 MHz	



Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-1





Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode_ANT-1

5210 MHz



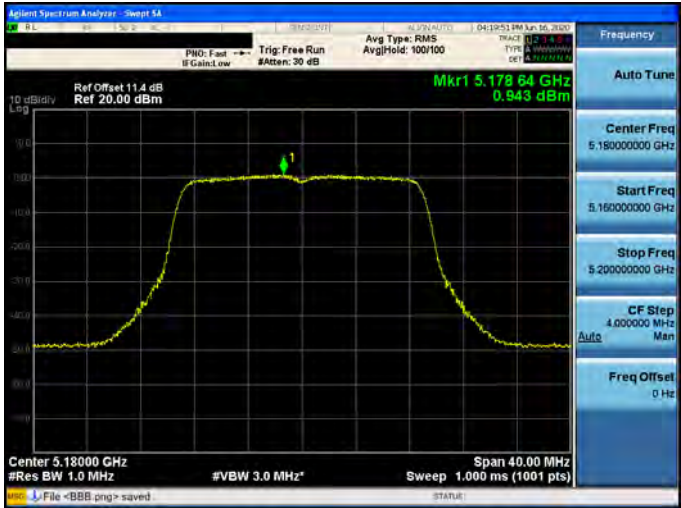
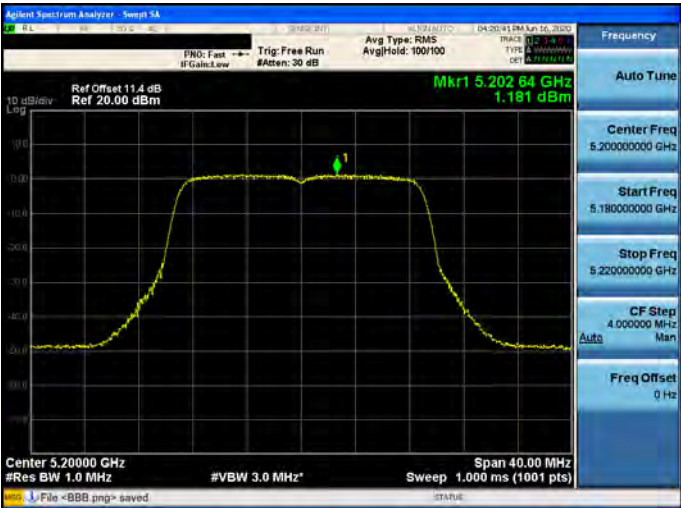
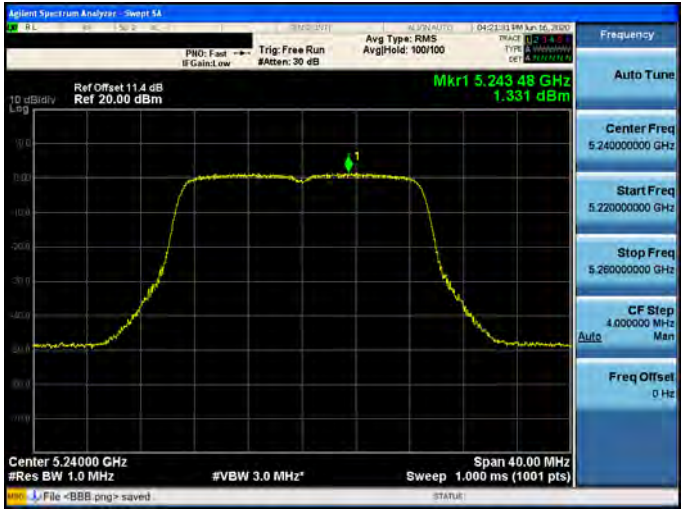
Mode 8: IEEE 802.11ax 80 MHz Continuous TX mode_ANT-1

5775 MHz





Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-2

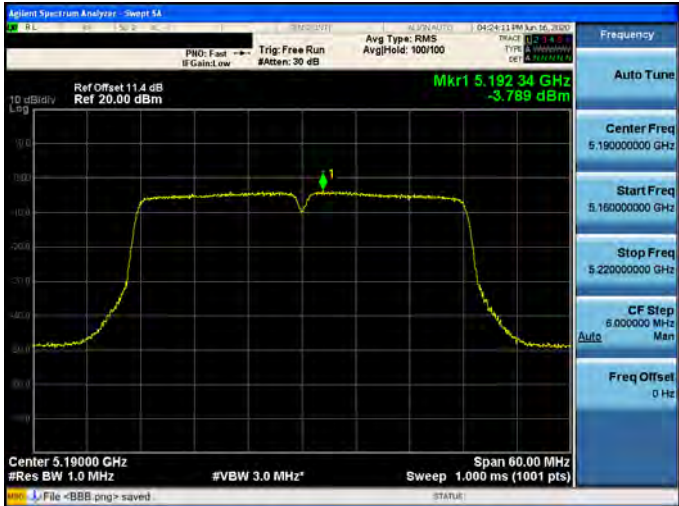
5180 MHz	
5200 MHz	
5240 MHz	



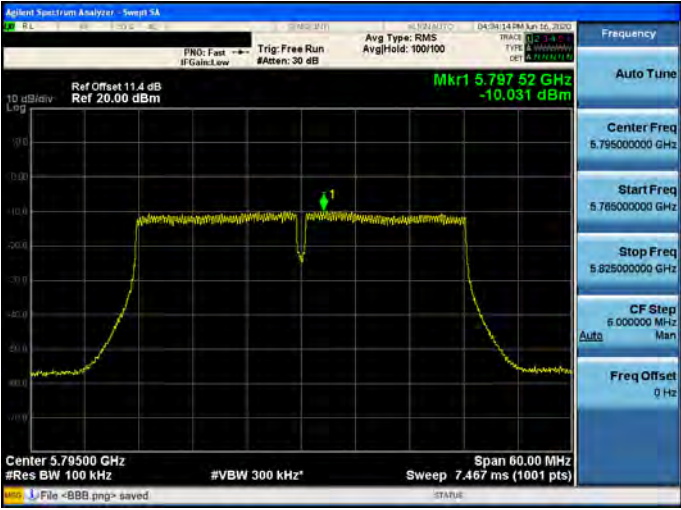
Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-2

5745 MHz	
5785 MHz	
5825 MHz	

Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-2

5190 MHz	
5230 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-2	
5755 MHz	
5795 MHz	



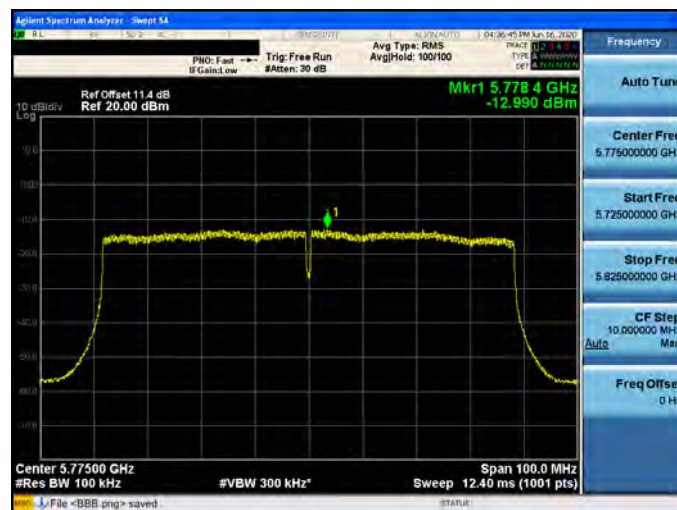
Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-2

5210 MHz



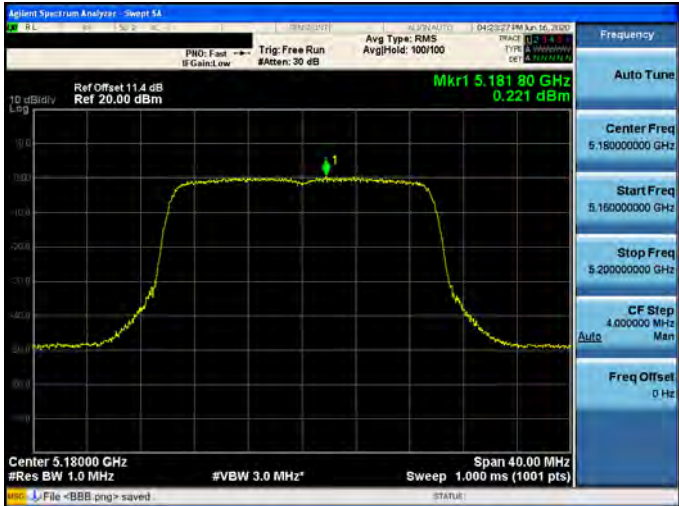
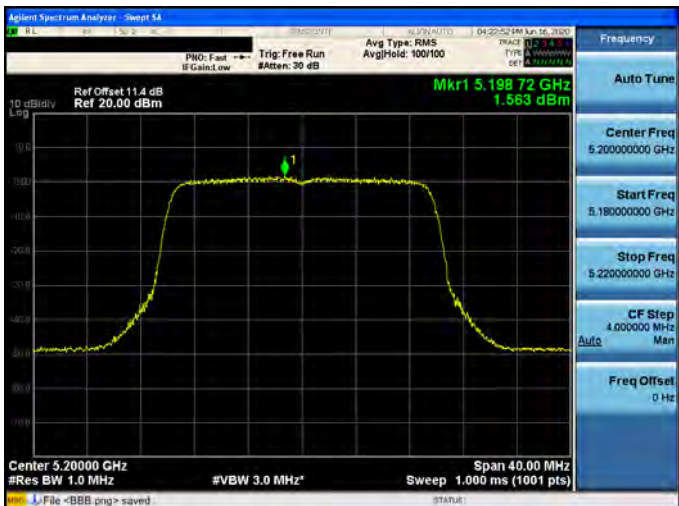
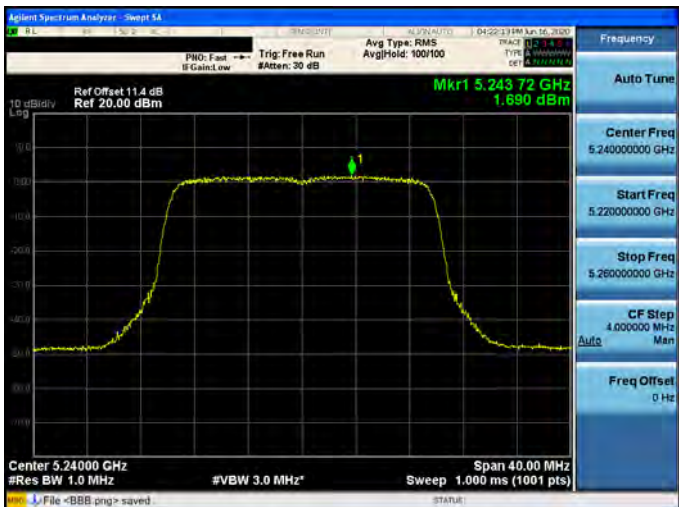
Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-2

5775 MHz

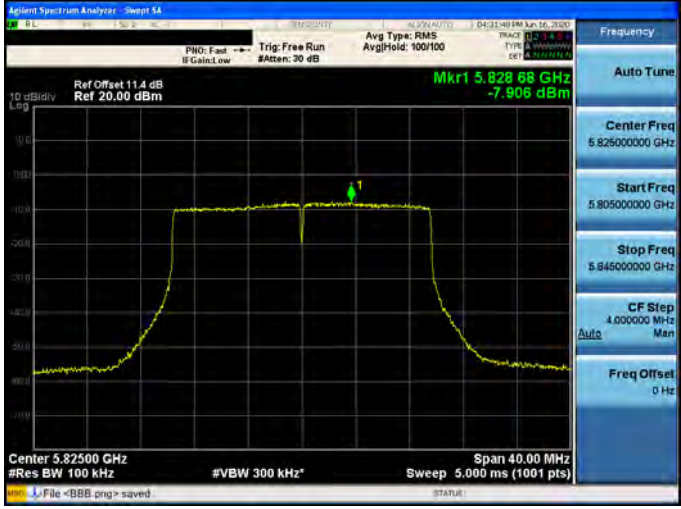




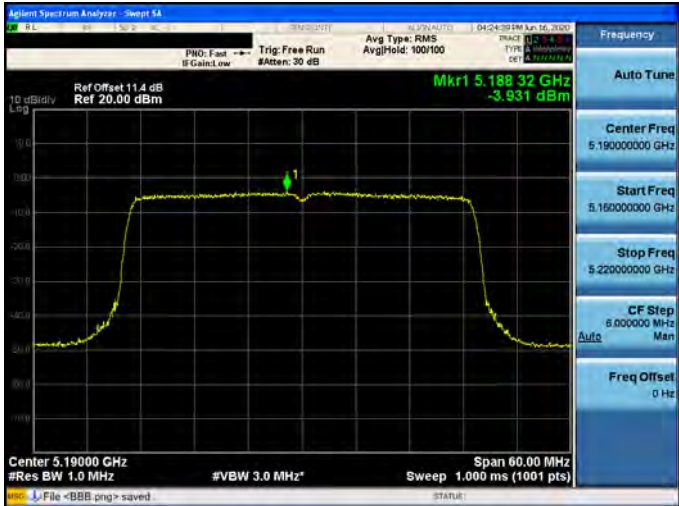
Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-2

5180 MHz	
5200 MHz	
5240 MHz	

Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-2

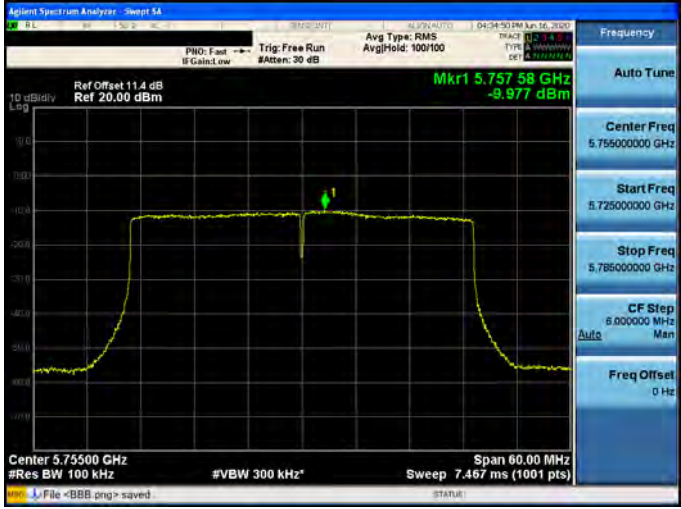
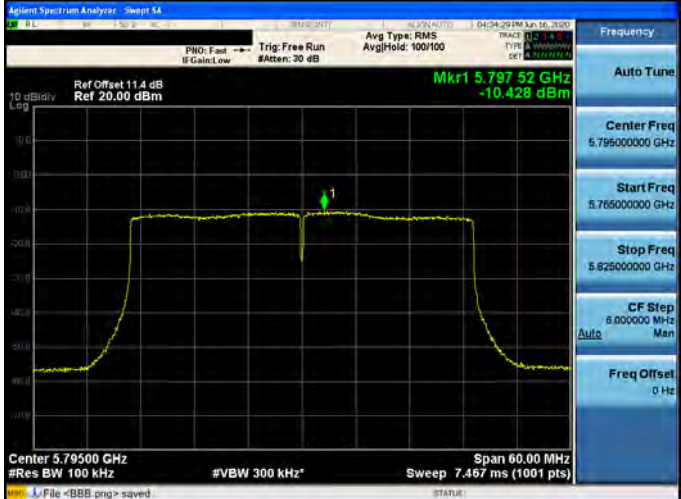
5745 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.739 32 GHz -7.403 dBm Center 5.74500 GHz #Res BW 100 kHz #VBW 300 kHz* Sweep 5.000 ms (1001 pts) Span 40.00 MHz File >BBB.png> saved Frequency Auto Tune Center Freq 5.74500000 GHz Start Freq 5.72500000 GHz Stop Freq 5.76500000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz
5785 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.783 98 GHz -7.576 dBm Center 5.78500 GHz #Res BW 100 kHz #VBW 300 kHz* Sweep 5.000 ms (1001 pts) Span 40.00 MHz File >BBB.png> saved Frequency Auto Tune Center Freq 5.78500000 GHz Start Freq 5.76500000 GHz Stop Freq 5.80500000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz
5825 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.828 68 GHz -7.906 dBm Center 5.82500 GHz #Res BW 100 kHz #VBW 300 kHz* Sweep 5.000 ms (1001 pts) Span 40.00 MHz File >BBB.png> saved Frequency Auto Tune Center Freq 5.82500000 GHz Start Freq 5.80500000 GHz Stop Freq 5.84500000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz

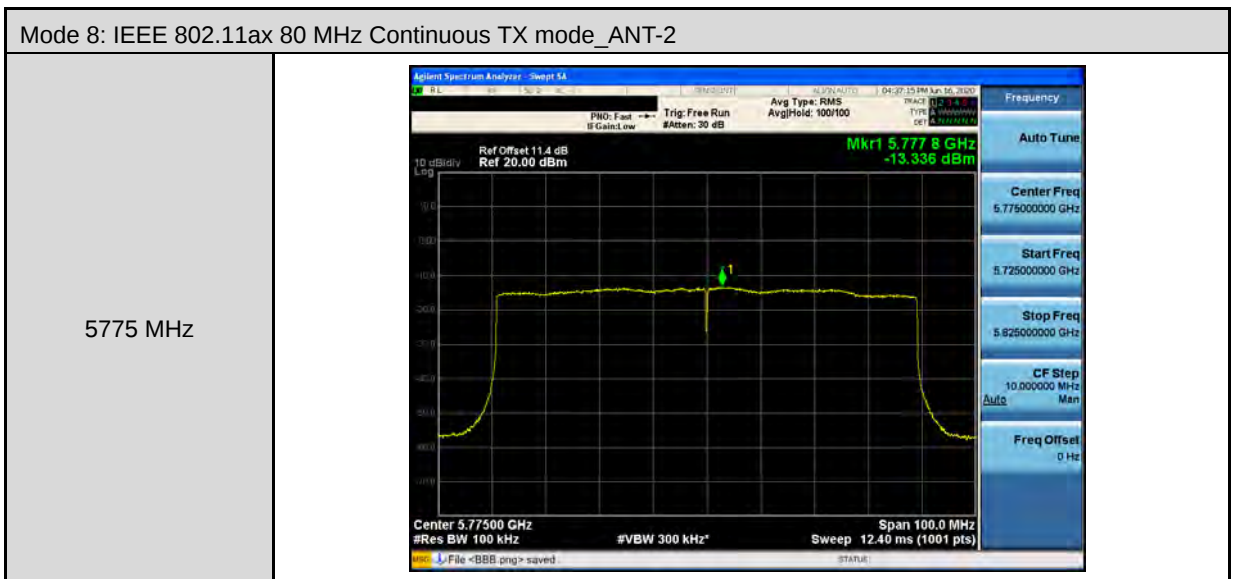
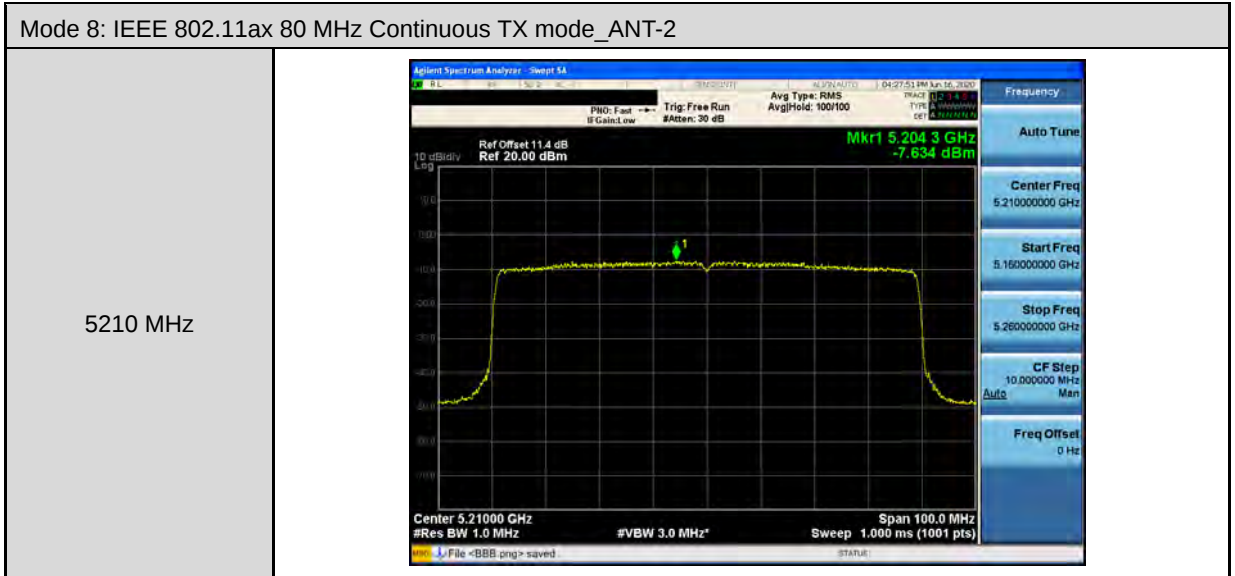
Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-2

5190 MHz	
5230 MHz	

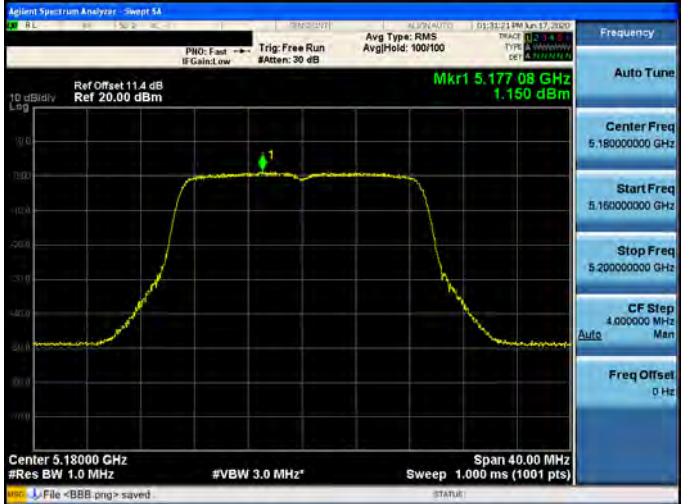
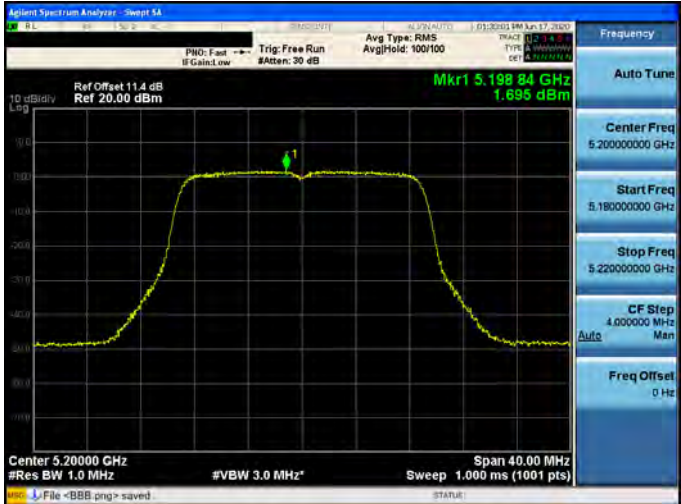
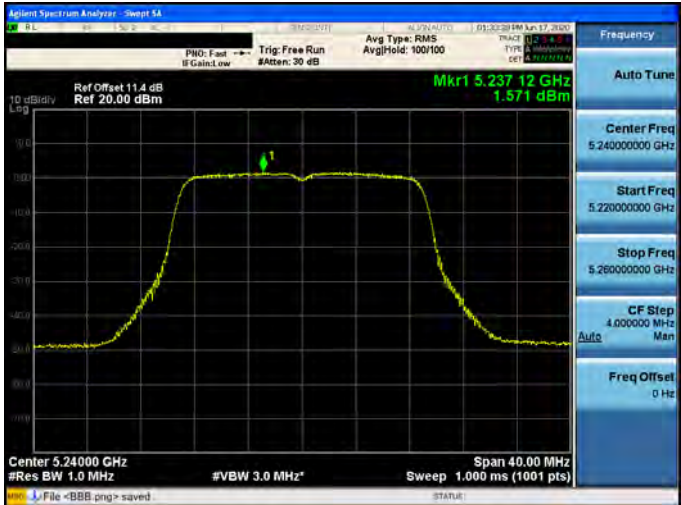


Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-2

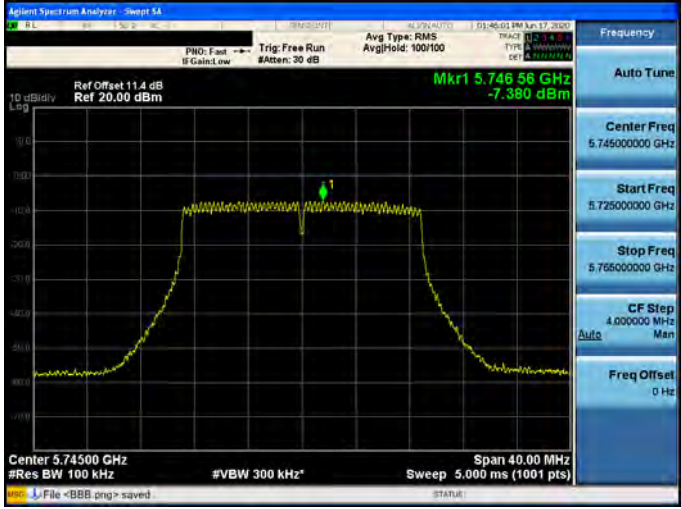
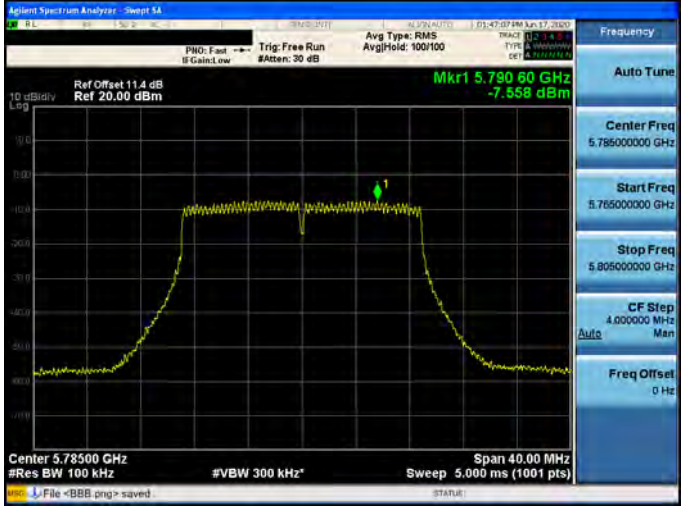
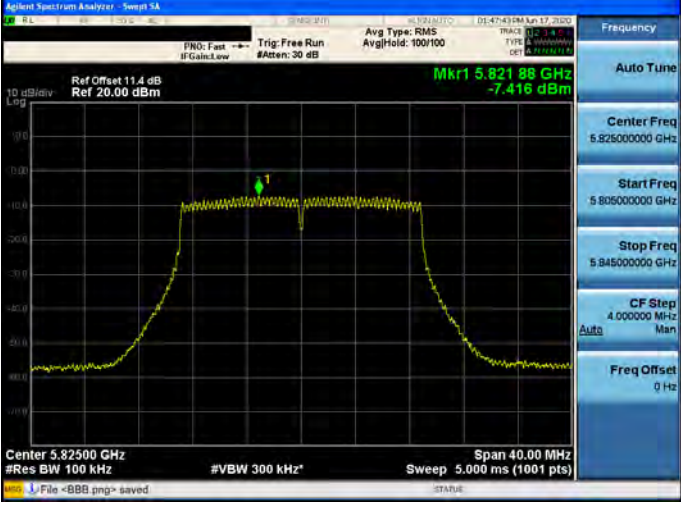
5755 MHz	
5795 MHz	



Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-3

5180 MHz	 Agilent Spectrum Analyzer - Sweep 54 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.177 08 GHz 1.150 dBm Center 5.18000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.000 MHz File >BBB.png> saved Frequency Auto Tune Center Freq 5.18000000 GHz Start Freq 5.16000000 GHz Stop Freq 5.20000000 GHz CF Step 4.00000 MHz Auto Freq Offset 0 Hz
5200 MHz	 Agilent Spectrum Analyzer - Sweep 54 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.198 84 GHz 1.695 dBm Center 5.20000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.000 MHz File >BBB.png> saved Frequency Auto Tune Center Freq 5.20000000 GHz Start Freq 5.18000000 GHz Stop Freq 5.22000000 GHz CF Step 4.00000 MHz Auto Freq Offset 0 Hz
5240 MHz	 Agilent Spectrum Analyzer - Sweep 54 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.237 12 GHz 1.571 dBm Center 5.24000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.000 MHz File >BBB.png> saved Frequency Auto Tune Center Freq 5.24000000 GHz Start Freq 5.22000000 GHz Stop Freq 5.26000000 GHz CF Step 4.00000 MHz Auto Freq Offset 0 Hz

Mode 3: IEEE 802.11ac 20 MHz Continuous TX mode_ANT-3

5745 MHz	
5785 MHz	
5825 MHz	



Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-3

5190 MHz	
5230 MHz	

Mode 4: IEEE 802.11ac 40 MHz Continuous TX mode_ANT-3

5755 MHz	
5795 MHz	



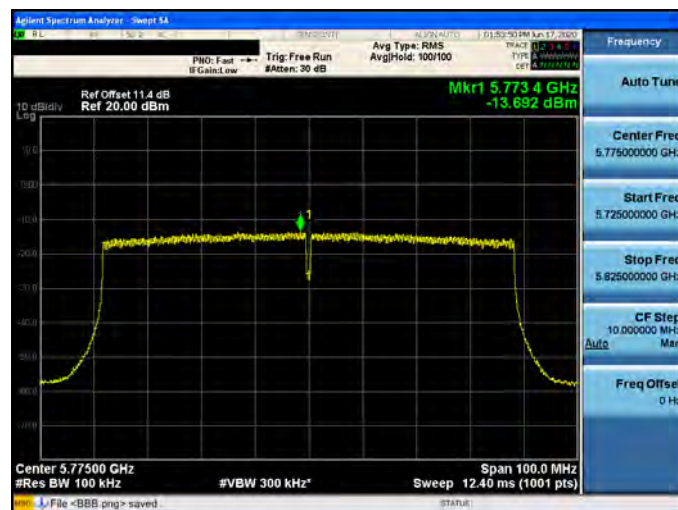
Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-3

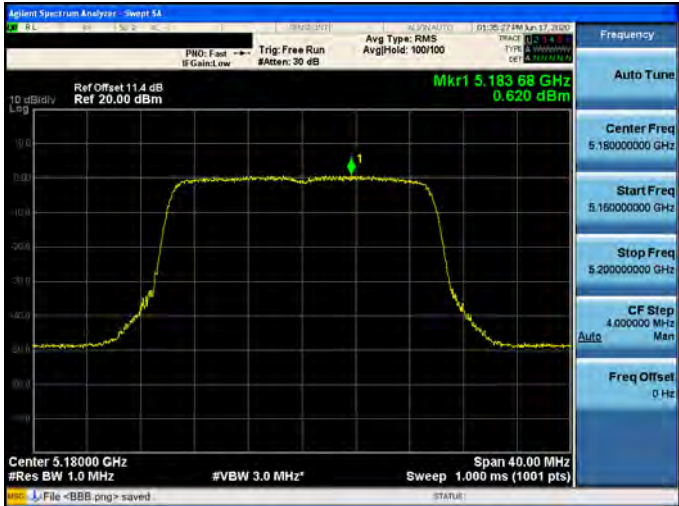
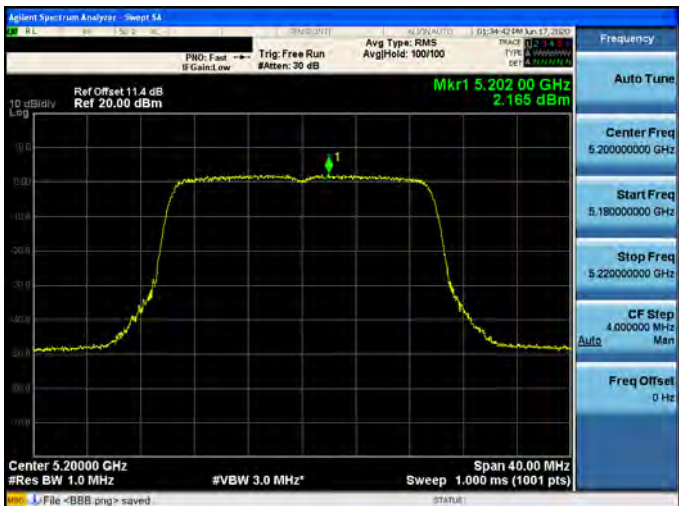
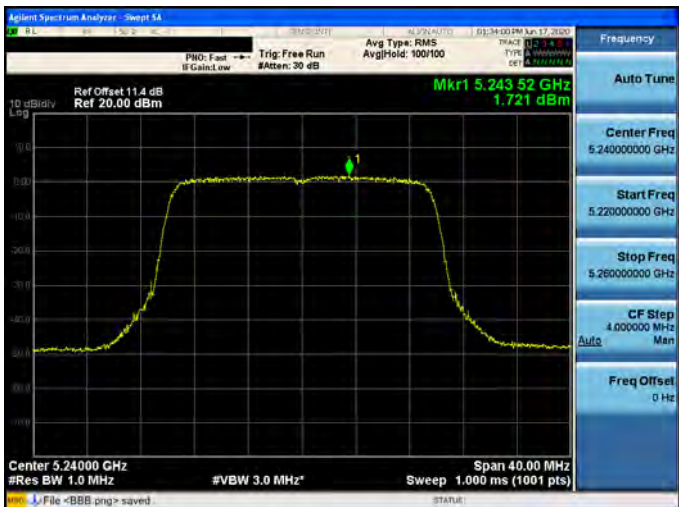
5210 MHz



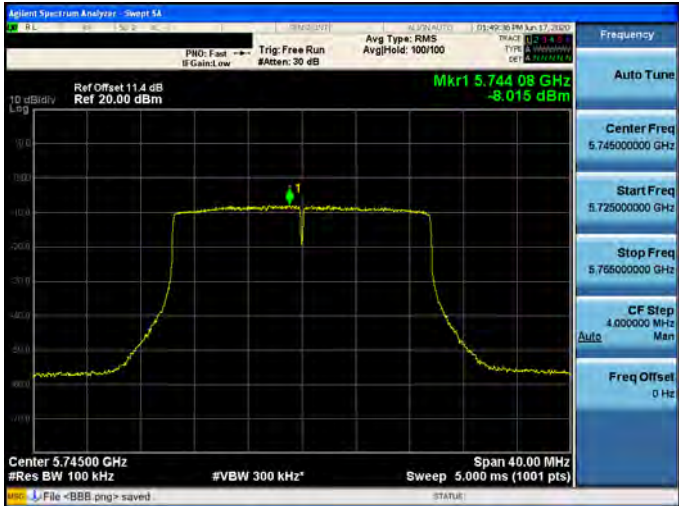
Mode 5: IEEE 802.11ac 80 MHz Continuous TX mode_ANT-3

5775 MHz

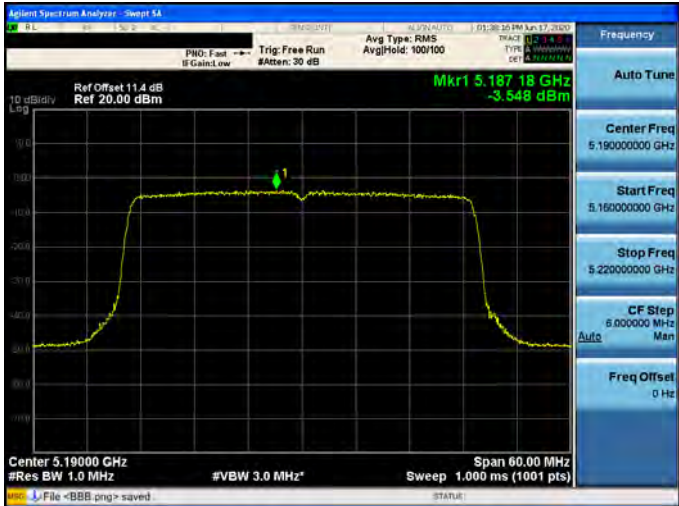


Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-3	
5180 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.183 68 GHz 0.620 dBm Center 5.18000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File >BBB.png> saved Frequency Auto Tune Center Freq 5.180000000 GHz Start Freq 5.160000000 GHz Stop Freq 5.200000000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz
5200 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.202 00 GHz 2.165 dBm Center 5.20000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File >BBB.png> saved Frequency Auto Tune Center Freq 5.200000000 GHz Start Freq 5.180000000 GHz Stop Freq 5.220000000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz
5240 MHz	 Agilent Spectrum Analyzer - Sweep 14 Ref Offset 11.4 dB Ref 20.00 dBm Mkr1 5.243 52 GHz 1.721 dBm Center 5.24000 GHz #Res BW 1.0 MHz #VBW 3.0 MHz* Sweep 1.000 ms (1001 pts) Span 40.00 MHz File >BBB.png> saved Frequency Auto Tune Center Freq 5.240000000 GHz Start Freq 5.220000000 GHz Stop Freq 5.260000000 GHz CF Step 4.000000 MHz Auto Freq Offset 0 Hz

Mode 6: IEEE 802.11ax 20 MHz Continuous TX mode_ANT-3

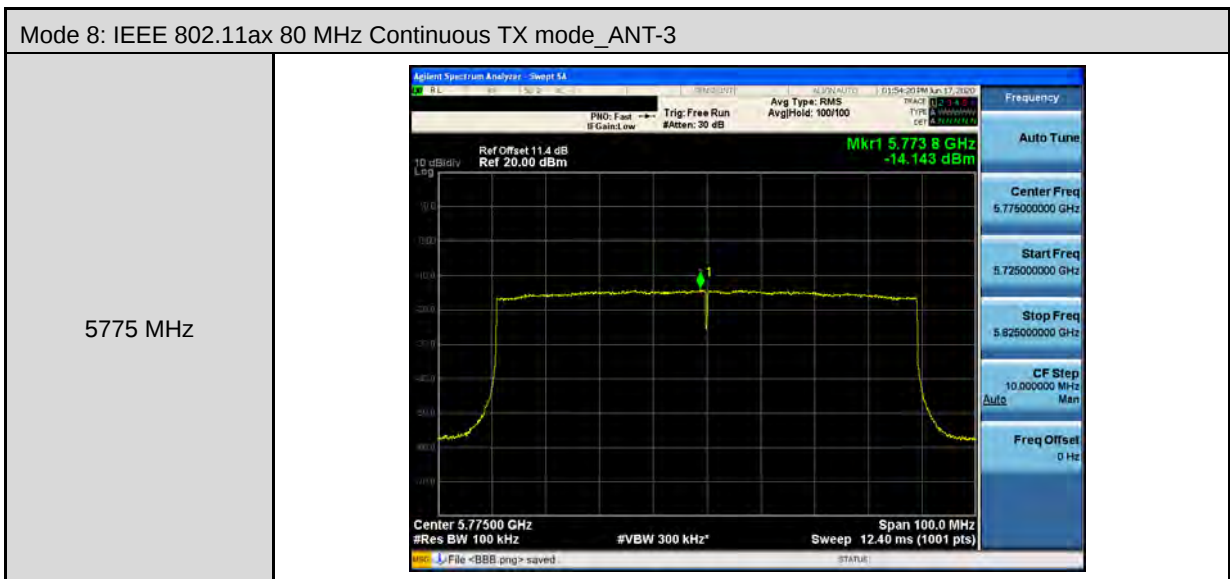
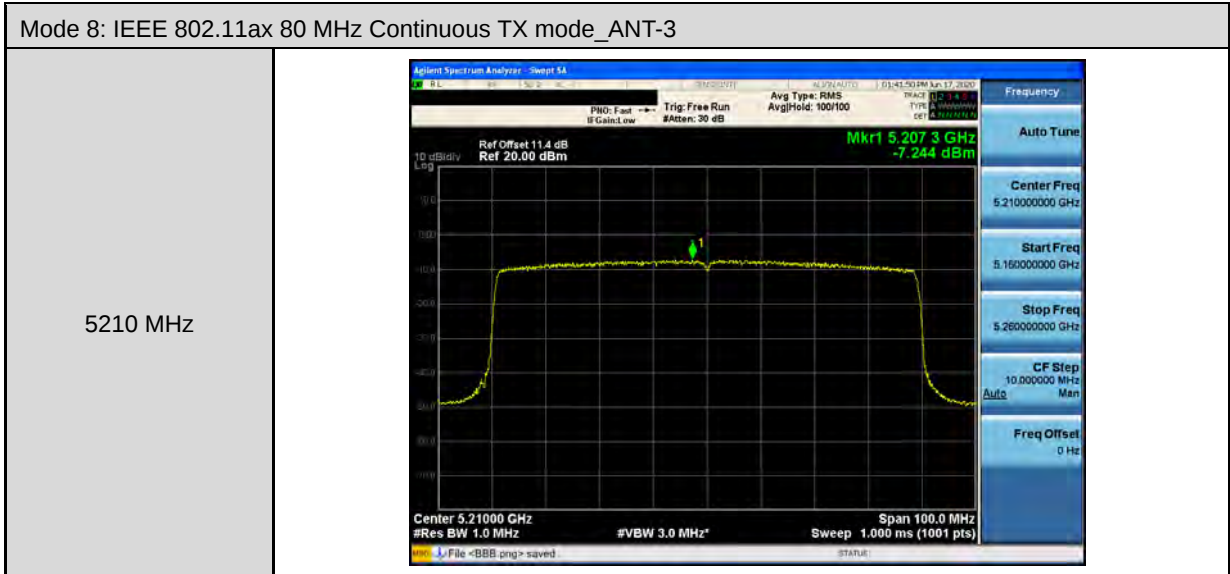
5745 MHz	
5785 MHz	
5825 MHz	



Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-3	
5190 MHz	
5230 MHz	

Mode 7: IEEE 802.11ax 40 MHz Continuous TX mode_ANT-3

5755 MHz	
5795 MHz	



--- END---