

**Test plot of Contention Based Protocol  
EUT Normal transmission****BW: 20 MHz / Frequency: 6194 MHz****BW: 20 MHz / Frequency: 6474 MHz**


BW: 20 MHz / Frequency: 6694 MHz




BW: 20 MHz / Frequency: 6994 MHz




**BW: 320 MHz / Frequency: 5950 MHz**

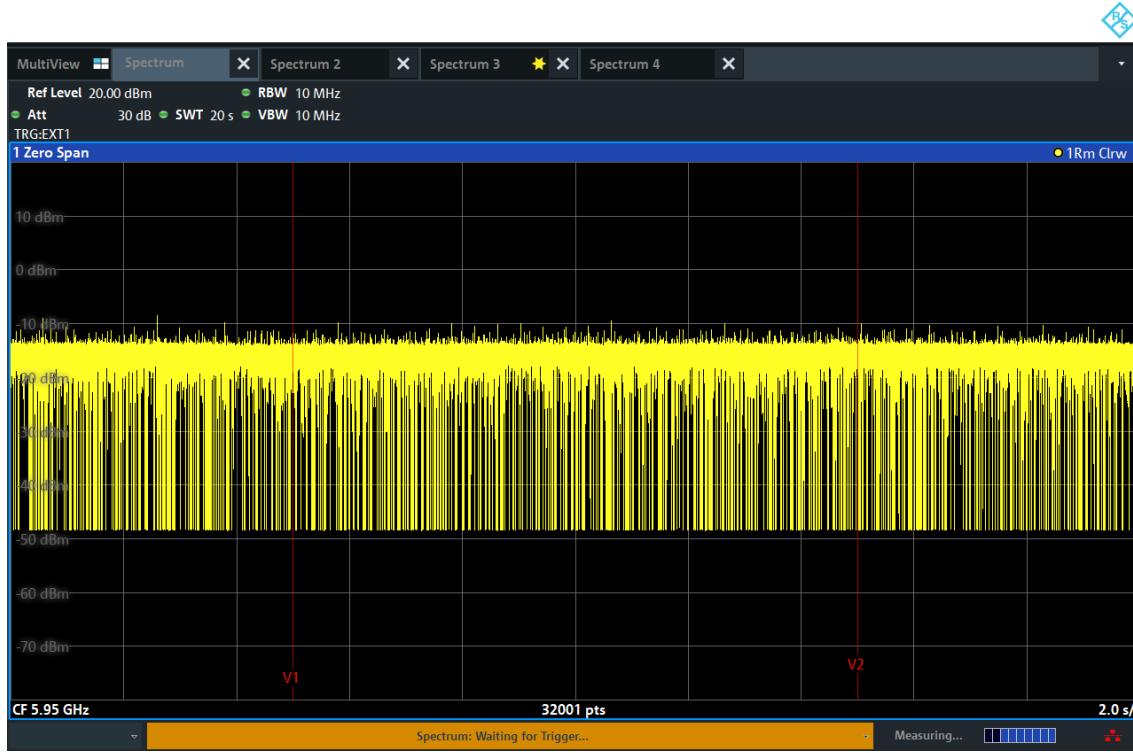

**BW: 320 MHz / Frequency: 6900 MHz**

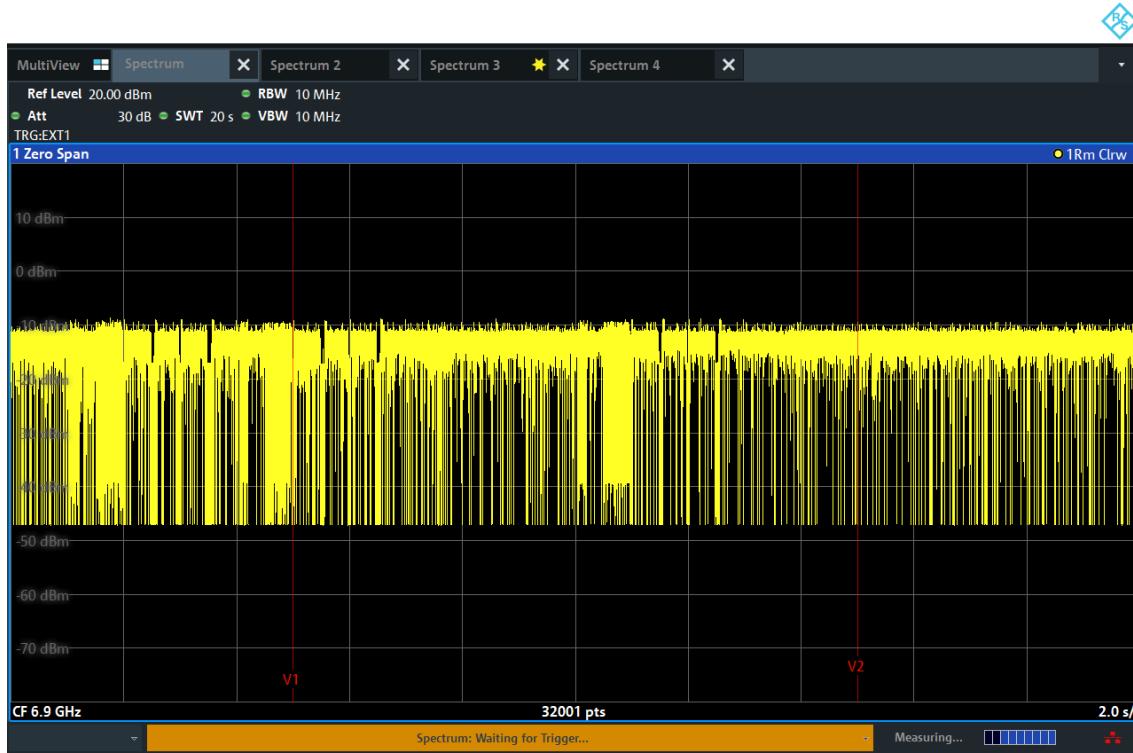

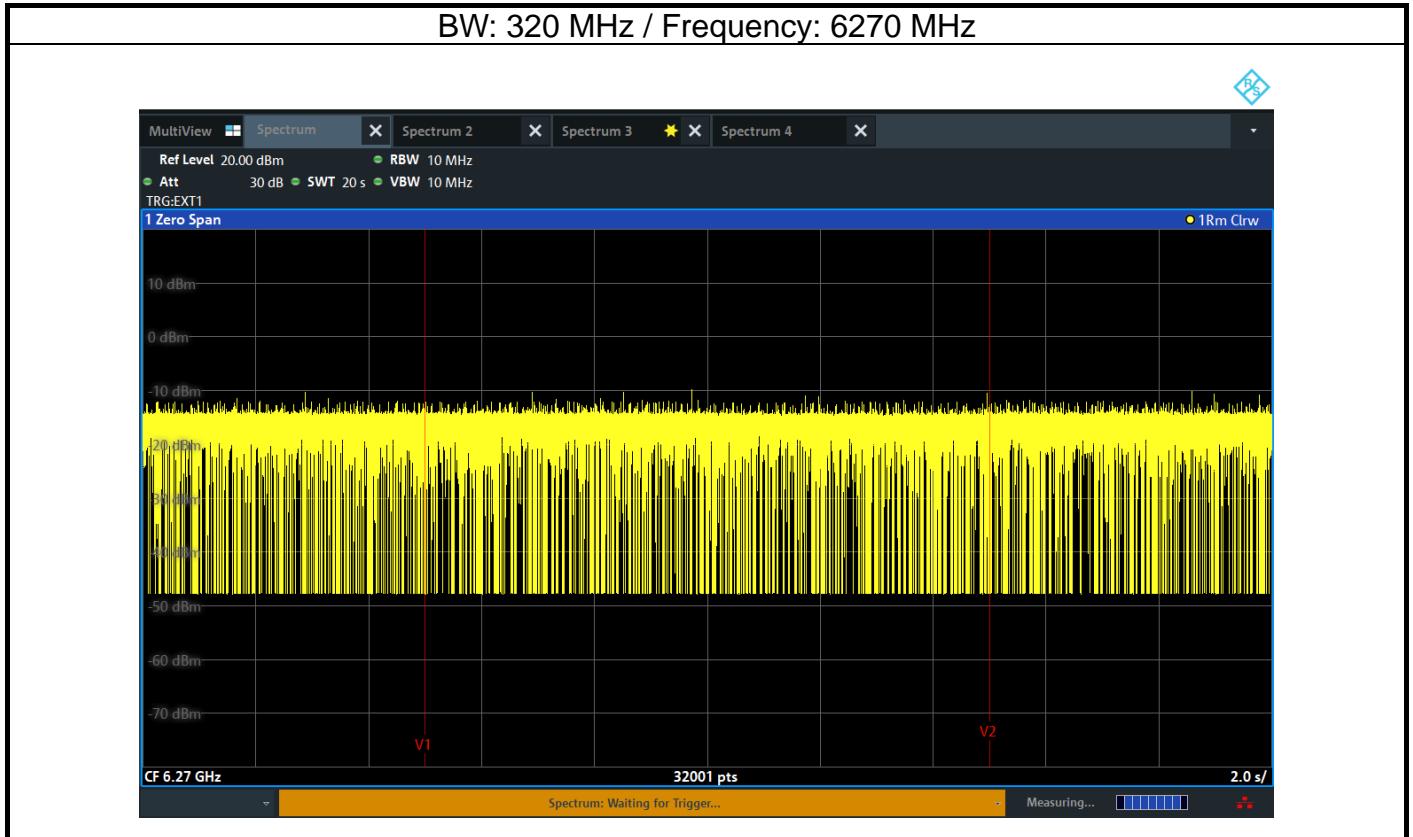

**EUT Minimal transmission****BW: 20 MHz / Frequency: 6194 MHz****BW: 20 MHz / Frequency: 6474 MHz**

**BW: 20 MHz / Frequency: 6694 MHz**



**BW: 20 MHz / Frequency: 6994 MHz**




**BW: 320 MHz / Frequency: 5950 MHz**



**BW: 320 MHz / Frequency: 6900 MHz**



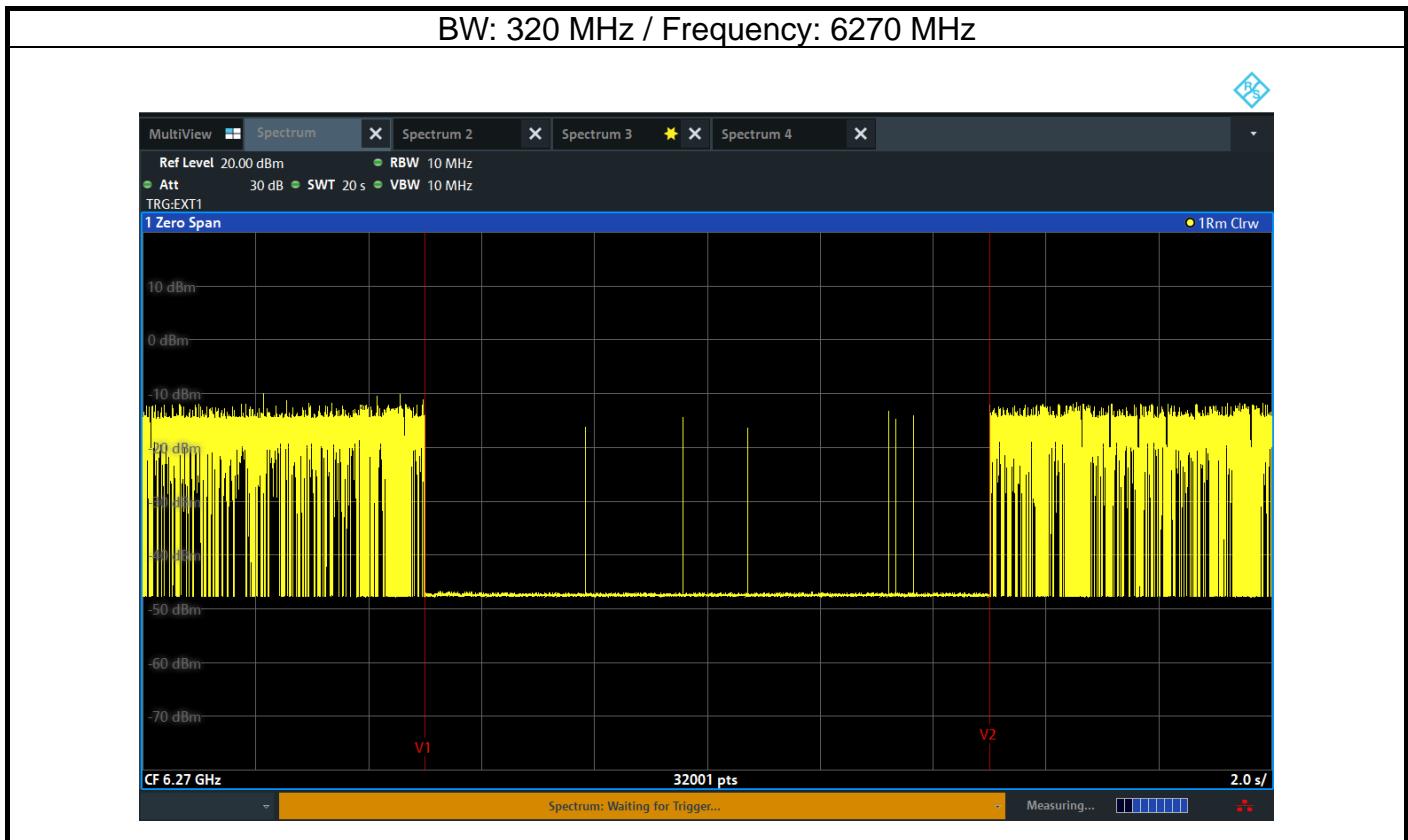

**EUT ceased transmission**

BW: 20 MHz / Frequency: 6194 MHz



BW: 20 MHz / Frequency: 6474 MHz



Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

**BW: 20 MHz / Frequency: 6694 MHz**




**BW: 20 MHz / Frequency: 6994 MHz**




Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

**BW: 320 MHz / Frequency: 5950 MHz**

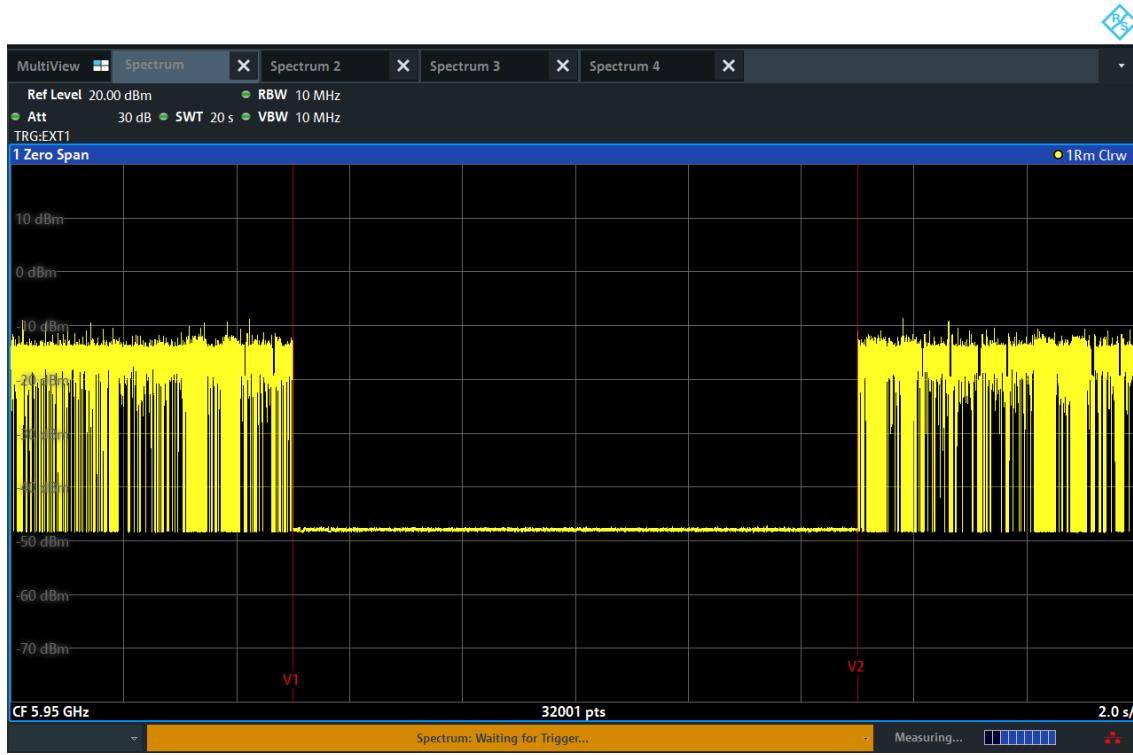


**BW: 320 MHz / Frequency: 6100 MHz**

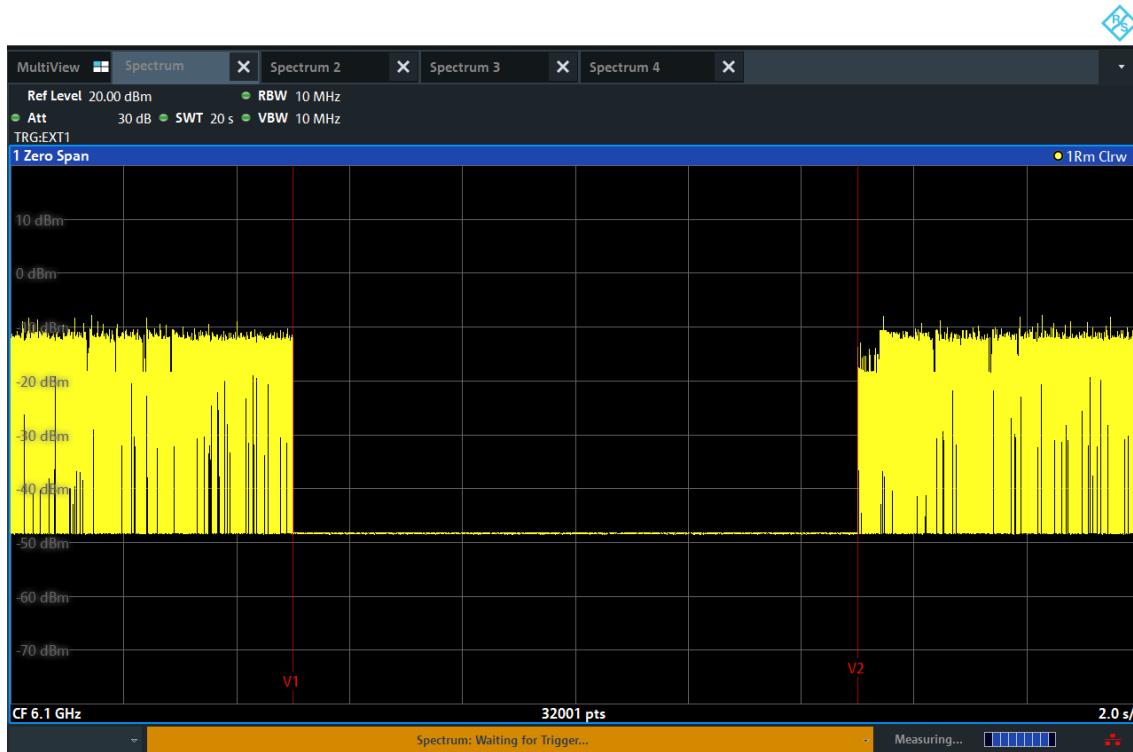


Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

**BW: 320 MHz / Frequency: 6260 MHz**

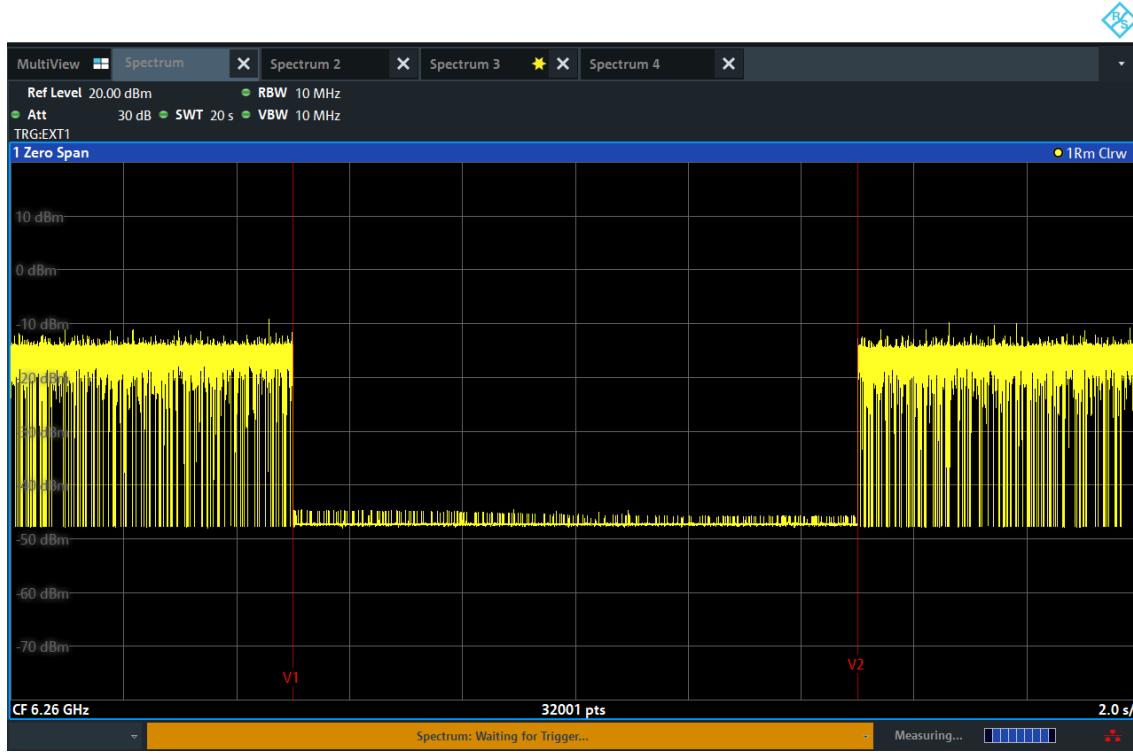


**BW: 320 MHz / Frequency: 6270 MHz**

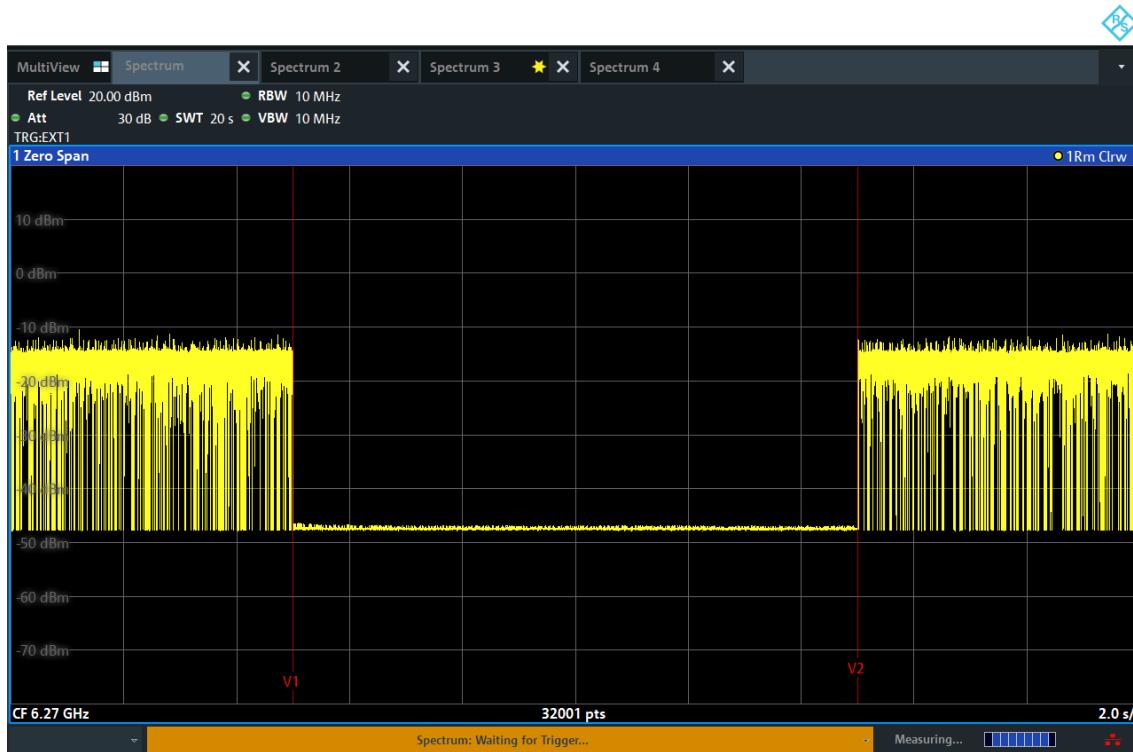

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

**BW: 320 MHz / Frequency: 6420 MHz**

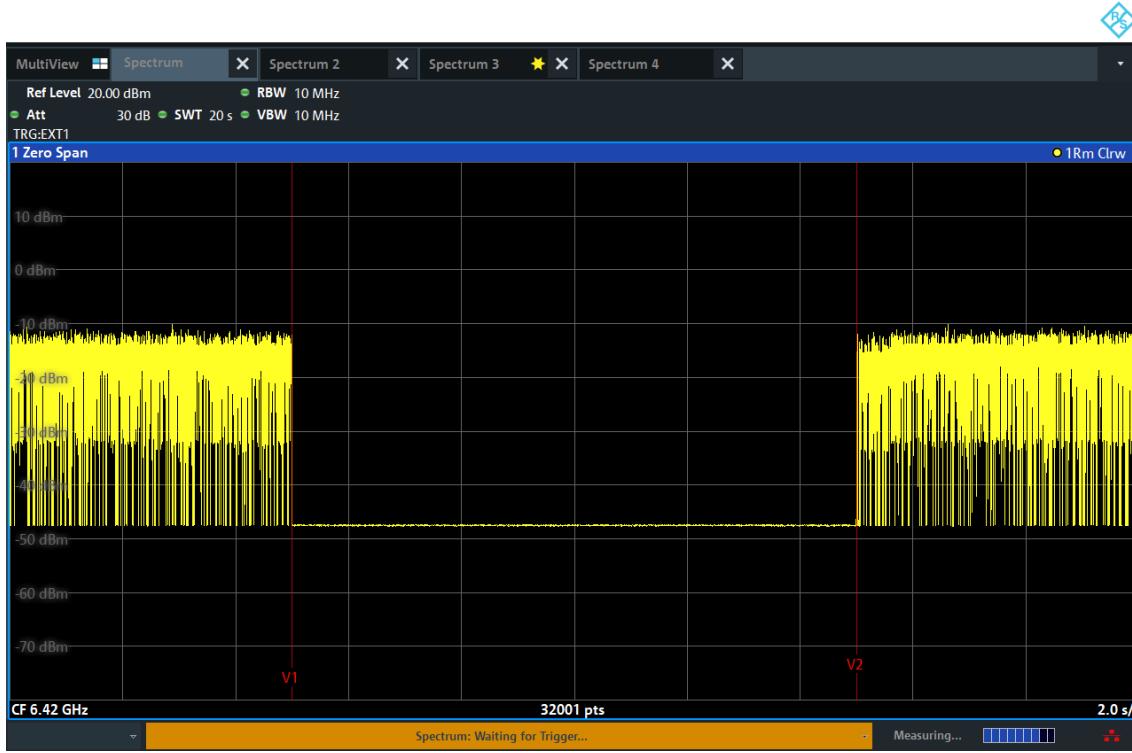


**BW: 320 MHz / Frequency: 6580 MHz**




Note: T1: AWGN signal is injected, T2: AWGN signal is removed.


**BW: 320 MHz / Frequency: 6750 MHz**

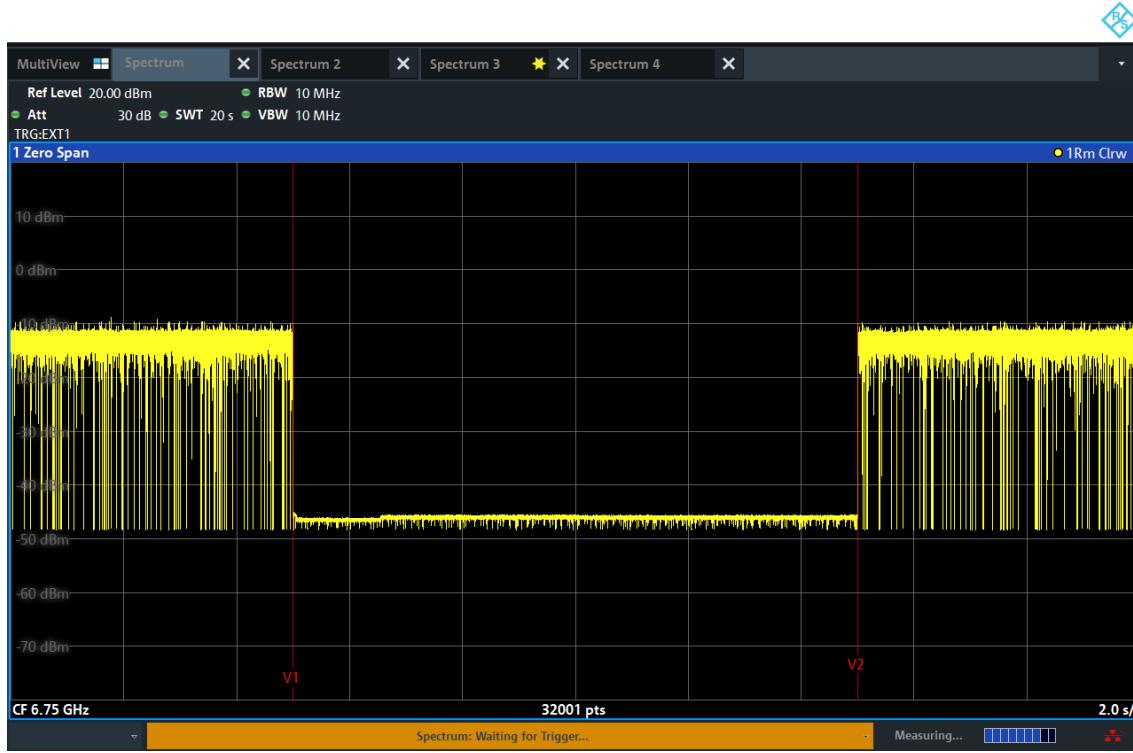


**BW: 320 MHz / Frequency: 6900 MHz**

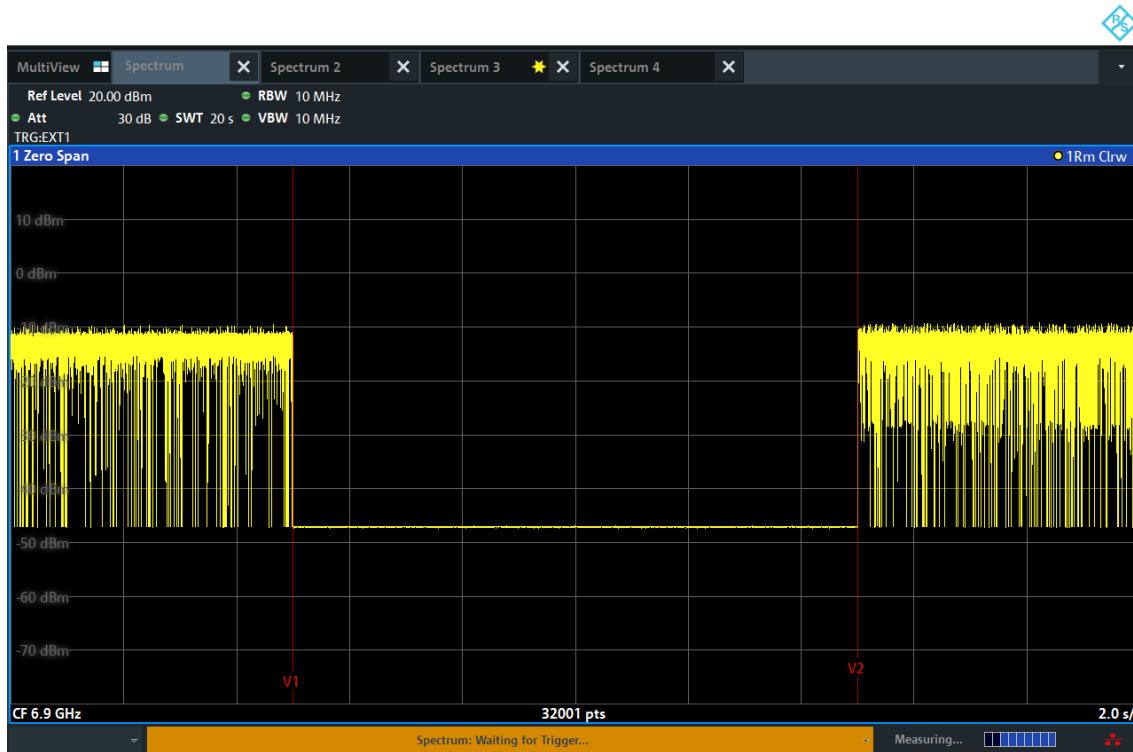

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

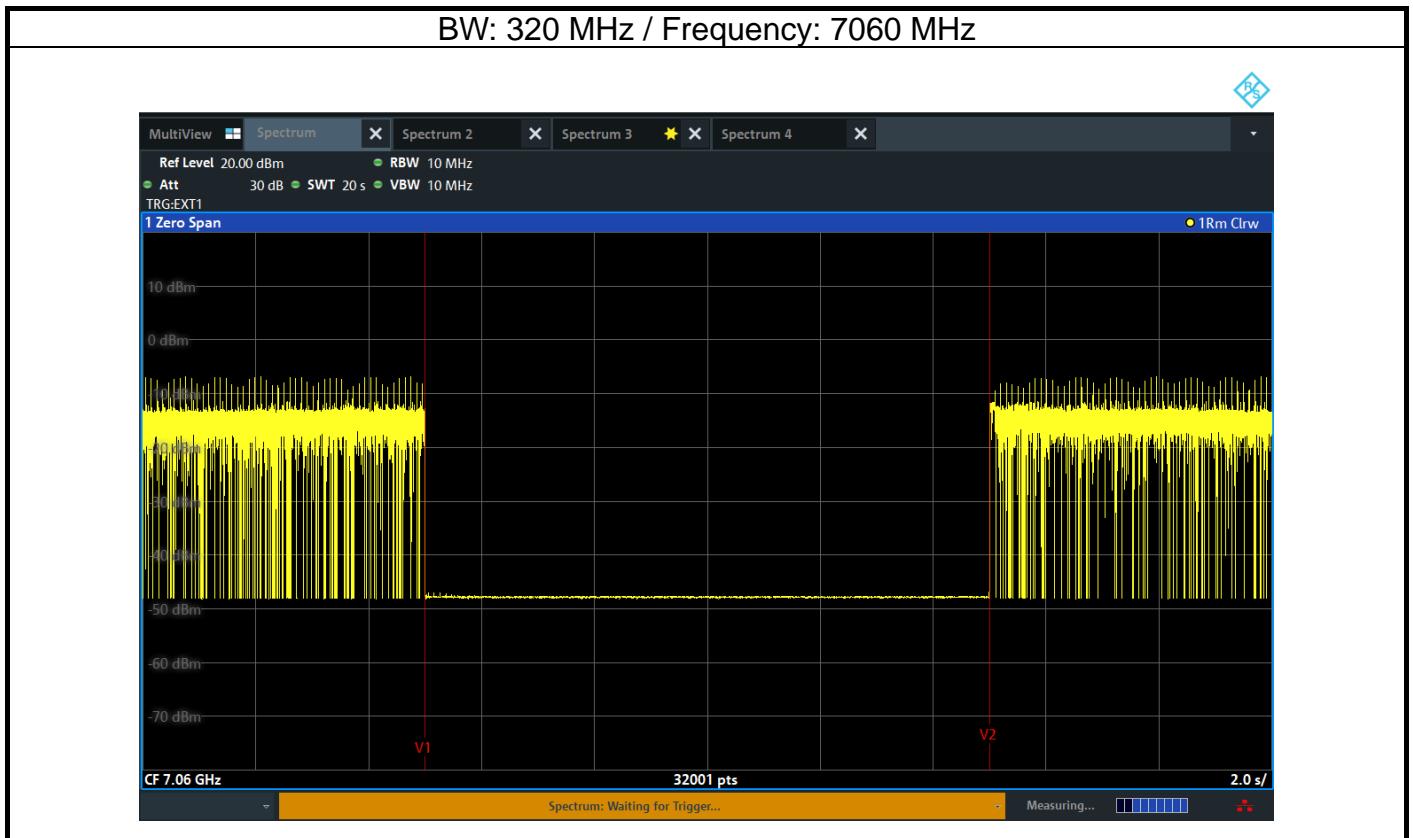

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

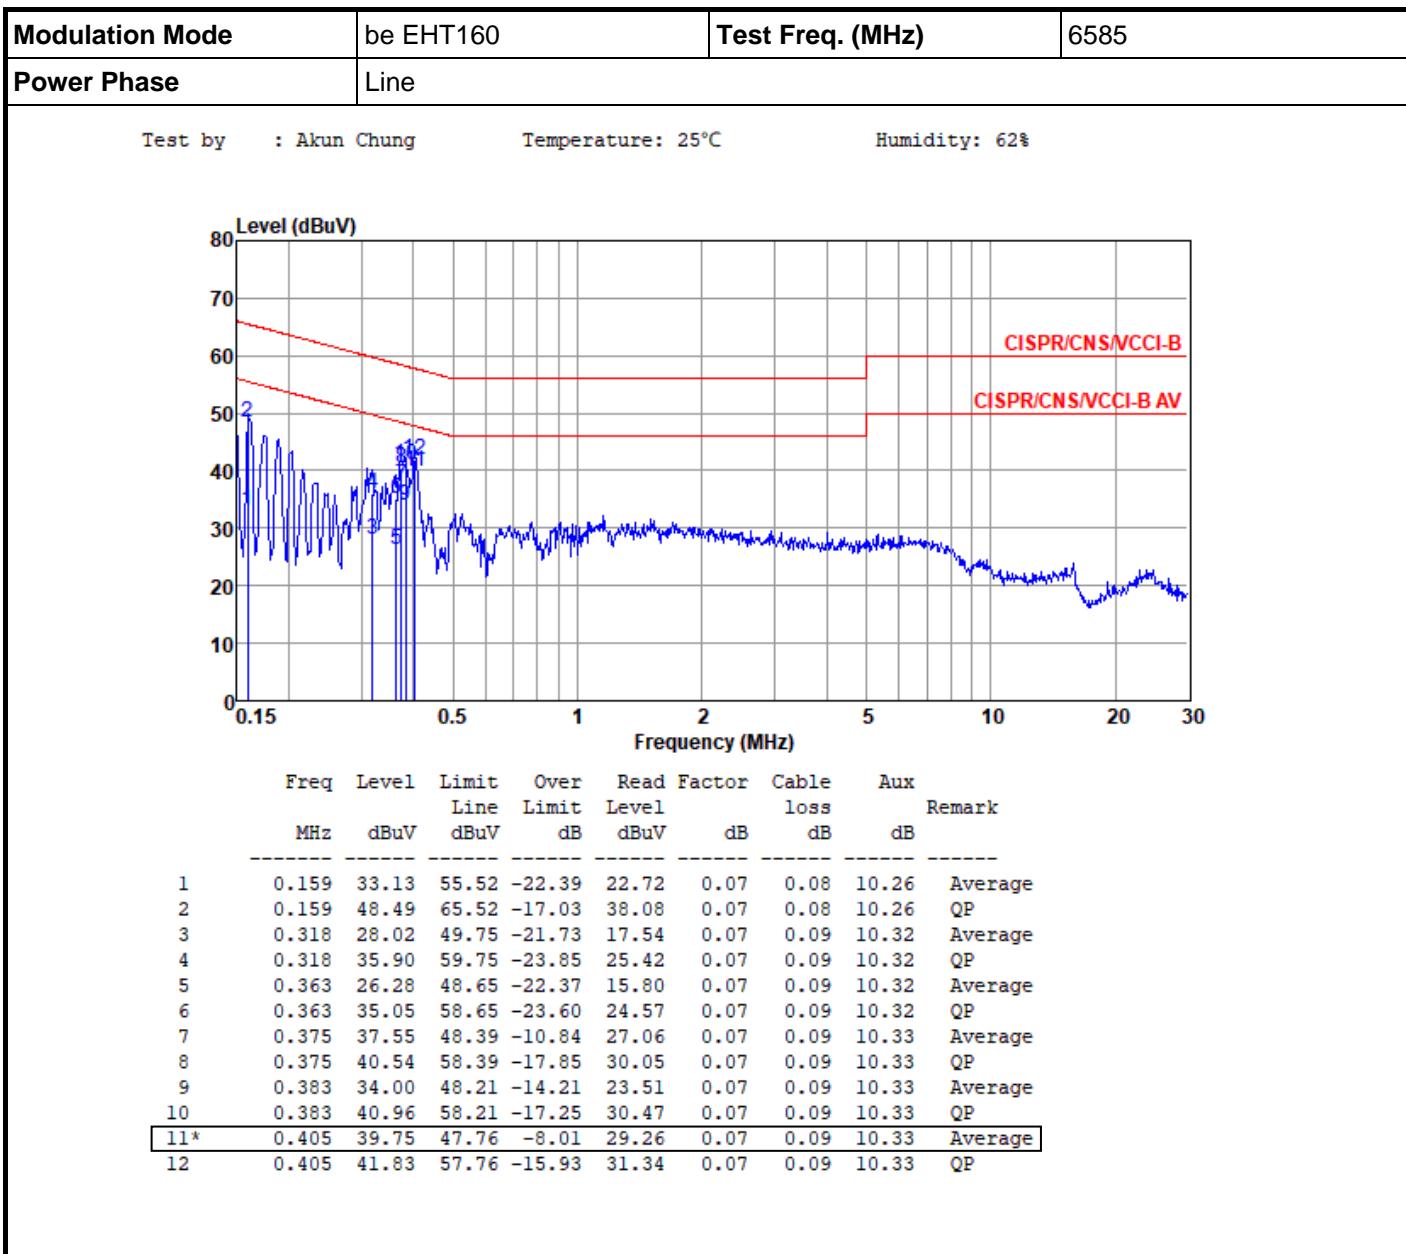
**Adapter mode**


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation Mode</b>	be EHT160	<b>Test Freq. (MHz)</b>	6585
<b>Power Phase</b>	Neutral		

Test by : Akun Chung      Temperature: 25°C      Humidity: 62%

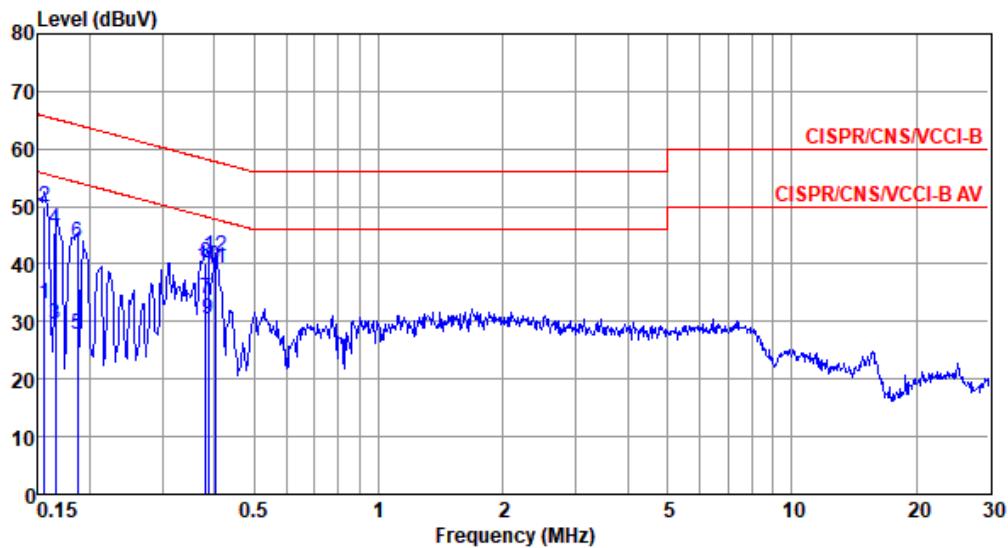

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level		loss		
1	0.156	33.05	55.69	-22.64	22.74	0.06	0.08	10.17	Average
2	0.156	49.95	65.69	-15.74	39.64	0.06	0.08	10.17	QP
3	0.165	29.37	55.21	-25.84	19.05	0.06	0.08	10.18	Average
4	0.165	46.06	65.21	-19.15	35.74	0.06	0.08	10.18	QP
5	0.186	27.65	54.20	-26.55	17.31	0.06	0.08	10.20	Average
6	0.186	43.75	64.20	-20.45	33.41	0.06	0.08	10.20	QP
7	0.381	33.85	48.25	-14.40	23.45	0.06	0.09	10.25	Average
8	0.381	40.17	58.25	-18.08	29.77	0.06	0.09	10.25	QP
9	0.387	30.55	48.12	-17.57	20.15	0.06	0.09	10.25	Average
10	0.387	39.45	58.12	-18.67	29.05	0.06	0.09	10.25	QP
11*	0.404	39.23	47.77	-8.54	28.83	0.06	0.09	10.25	Average
12	0.404	41.45	57.77	-16.32	31.05	0.06	0.09	10.25	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

**POE mode**

<b>Modulation Mode</b>	be EHT160	<b>Test Freq. (MHz)</b>	6585
<b>Power Phase</b>	Line		

Test by : Akun Chung Temperature: 25°C Humidity: 62%

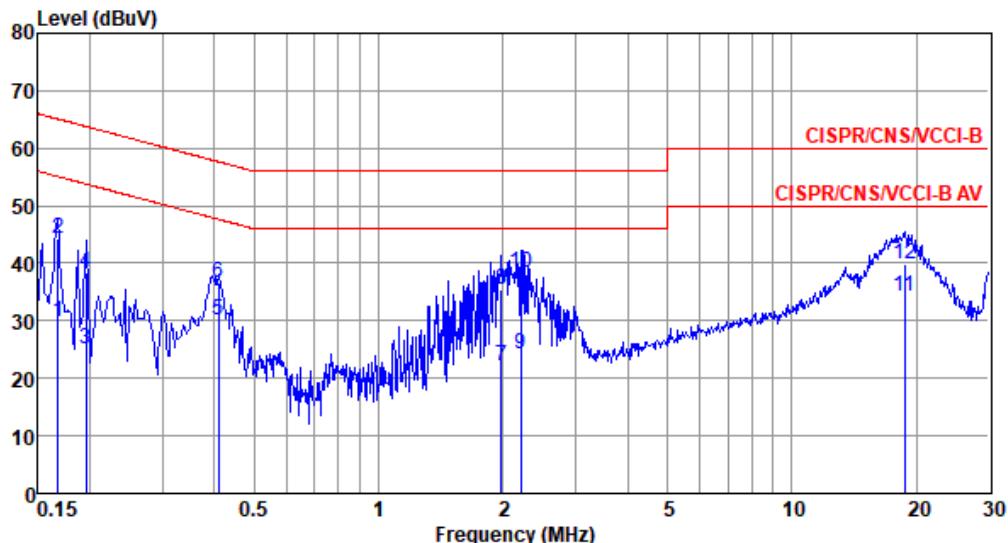


	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	Remark
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	
1	0.168	29.81	55.08	-25.27	19.39	0.07	0.08	10.27	Average
2	0.168	44.40	65.08	-20.68	33.98	0.07	0.08	10.27	QP
3	0.195	25.09	53.80	-28.71	14.65	0.07	0.08	10.29	Average
4	0.195	38.52	63.80	-25.28	28.08	0.07	0.08	10.29	QP
5	0.410	30.13	47.64	-17.51	19.64	0.07	0.09	10.33	Average
6	0.410	36.59	57.64	-21.05	26.10	0.07	0.09	10.33	QP
7	1.980	22.14	46.00	-23.86	11.56	0.09	0.17	10.32	Average
8	1.980	35.45	56.00	-20.55	24.87	0.09	0.17	10.32	QP
9	2.213	24.23	46.00	-21.77	13.64	0.09	0.18	10.32	Average
10	2.213	38.26	56.00	-17.74	27.67	0.09	0.18	10.32	QP
11*	18.721	34.34	50.00	-15.66	23.09	0.24	0.54	10.47	Average
12	18.721	39.90	60.00	-20.10	28.65	0.24	0.54	10.47	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation Mode</b>	be EHT160	<b>Test Freq. (MHz)</b>	6585
<b>Power Phase</b>	Neutral		

Test by : Akun Chung      Temperature: 25°C      Humidity: 62%

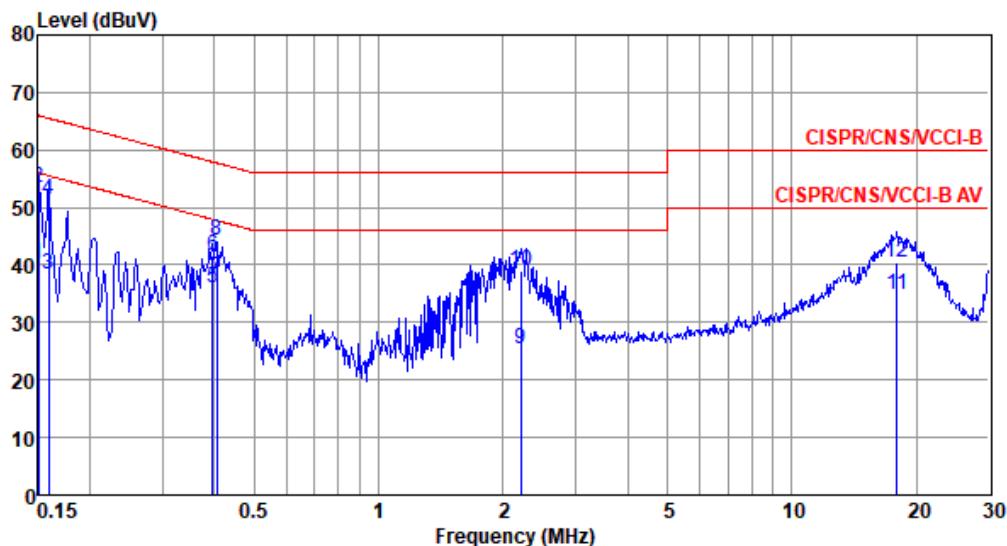

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor	Cable loss dB	Aux dB	Remark
									Aux
1	0.150	40.17	56.00	-15.83	29.86	0.06	0.08	10.17	Average
2	0.150	53.44	66.00	-12.56	43.13	0.06	0.08	10.17	QP
3	0.159	38.42	55.52	-17.10	28.10	0.06	0.08	10.18	Average
4	0.159	51.43	65.52	-14.09	41.11	0.06	0.08	10.18	QP
5	0.396	35.98	47.95	-11.97	25.58	0.06	0.09	10.25	Average
6	0.396	41.76	57.95	-16.19	31.36	0.06	0.09	10.25	QP
7*	0.406	37.79	47.73	-9.94	27.39	0.06	0.09	10.25	Average
8	0.406	44.37	57.73	-13.36	33.97	0.06	0.09	10.25	QP
9	2.213	25.44	46.00	-20.56	14.89	0.09	0.18	10.28	Average
10	2.213	38.99	56.00	-17.01	28.44	0.09	0.18	10.28	QP
11	17.944	34.77	50.00	-15.23	23.59	0.20	0.52	10.46	Average
12	17.944	40.39	60.00	-19.61	29.21	0.20	0.52	10.46	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).