





FCC Test Report

Report No.: AGC15705231147FR01

FCC ID : 2AL75-TK20231127

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: R/C Boat

BRAND NAME : N/A

MODEL NAME : H153 (Series model name please see page 5)

APPLICANT: SHANTOU SKYTECH TECHNOLOGY INDUSTRIAL INC.

DATE OF ISSUE : Dec. 14, 2023

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Subpart C §15.249

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 37

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Dec. 14, 2023	Valid	Initial Release




TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	7
4. DESCRIPTION OF TEST MODES	10
5. SYSTEM TEST CONFIGURATION	11
5.1. CONFIGURATION OF EUT SYSTEM	11
6. TEST FACILITY	12
7. RADIATED EMISSION	13
7.1. TEST LIMIT	
8. BAND EDGE EMISSION	23
8.1. MEASUREMENT PROCEDURE	23
9. 20DB BANDWIDTH	32
9.1. MEASUREMENT PROCEDURE	32
10. FCC LINE CONDUCTED EMISSION TEST	35
10.1. LIMITS OF LINE CONDUCTED EMISSION TEST	35
10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	
10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	36



Report No.: AGC15705231147FR01 Page 4 of 37

APPENDIX A: PHOTOGRAPHS OF TEST SETUP	37
APPENDIX B: PHOTOGRAPHS OF THE EUT	37





1. VERIFICATION OF CONFORMITY

Applicant	SHANTOU SKYTECH TECHNOLOGY INDUSTRIAL INC.
Address	No.2 West Xingye Road, Laimei Industrial Park, Chenghai District, Shantou City,
Addiess	Guangdong, China
Manufacturer	SHANTOU SKYTECH TECHNOLOGY INDUSTRIAL INC.
Address	No.2 West Xingye Road, Laimei Industrial Park, Chenghai District, Shantou City,
Addiess	Guangdong, China
Factory	SHANTOU SKYTECH TECHNOLOGY INDUSTRIAL INC.
Address	No.2 West Xingye Road, Laimei Industrial Park, Chenghai District, Shantou City,
Addiess	Guangdong, China
Product Designation	R/C Boat
Brand Name	N/A
Test Model	H153
Series Model	H100, H101, H102, H103, H105, H106, H107, H108, H109, H110, H111, H112, H113, H115, H116, H117, H118, H119, H120, H121, H122, H123, H125, H126, H127, H128, H129, H130, H131, H132, H133, H135, H136, H137, H138, H139, H150, H151, H152, H155, H156, H157, H158, H159, H160, H161, H162, H163, H165, H166, H167, H168, H169, H170, H171, H172, H173, H175, H176, H177, H178, H179, H180, H181, H182, H183, H185, Q5, Q7, Q9, Q10, Q11, Q12, Q13, Q14, Q15, Q16, Q17, Q18, Q19, Q20, A1, A2, 850051553037, 850051553044, 850051553013, 850010378671, 850010378220, 850008424144, 645380996576, 850008424137, 850051553310
Difference Description	All the same except for the model names.
Date of receipt of test item	Nov. 29, 2023
Date of test	Nov. 29, 2023 to Dec. 14, 2023
Deviation	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Report Template	AGCRT-US-SRD/RF

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Cocili	
_	Cici Li (Project Engineer)	Dec. 14, 2023
Reviewed By	Calin Lin	
_	Calvin Liu (Reviewer)	Dec. 14, 2023
Approved By	Max Zhang	
	Max Zhang Authorized Officer	Dec. 14, 2023



Page 6 of 37

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

Operation Frequency	2405MHz-2475MHz
Operation requestey	
Maximum field strength	97.70 dBµV/m(Peak)@3m
Maximum field strength	89.33 dBµV/m(Average)@3m
Modulation	GFSK
Number of channels	71 Channels
Antenna Gain	2dBi
Antenna Designation	Wire Antenna
Hardware Version	1.0
Software Version	1.0
Power Supply	DC 3V by battery



Page 7 of 37

2.2. TABLE OF CARRIER FREQUENCY

Channel	Frequency	Channel	Frequency	Channel	Frequency
Number	(MHz)	Number	(MHz)	Number	(MHz)
1	2405	25	2429	49	2453
2	2406	26	2430	50	2454
3	2407	27	2431	51	2455
4	2408	28	2432	52	2456
5	2409	29	2433	53	2457
6	2410	30	2434	54	2458
7	2411	31	2435	55	2459
8	2412	32	2436	56	2460
9	2413	33	2437	57	2461
10	2414	34	2438	58	2462
11	2415	35	2439	59	2463
12	2416	36	2440	60	2464
13	2417	37	2441	61	2465
14	2418	38	2442	62	2466
15	2419	39	2443	63	2467
16	2420	40	2444	64	2468
17	2421	41	2445	65	2469
18	2422	42	2446	66	2470
19	2423	43	2447	67	2471
20	2424	44	2448	68	2472
21	2425	45	2449	69	2473
22	2426	46	2450	70	2474
23	2427	47	2451	71	2475
24	2428	48	2452		



Page 8 of 37

2.3. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



Page 9 of 37

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in measurement" (GUM) published by CISPR and ANSI.

- Uncertainty of Conducted Emission, Uc = ±2.9 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.9 dB
- Uncertainty of Occupied Channel Bandwidth: Uc = ±2 %



Page 10 of 37

4. DESCRIPTION OF TEST MODES

TEST MODE DESCRIPTION
Low channel TX_2405MHz_GFSK
Middle channel TX_2440MHz_GFSK
High channel TX_2475MHz_GFSK

Note:

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. Set the EUT into the individual test modes by pressing the EUT buttons.
- 4. For battery operated equipment, the equipment tests are performed using a new battery.



Page 11 of 37

5. SYSTEM TEST CONFIGURATION 5.1. CONFIGURATION OF EUT SYSTEM

Configure:

EUT

5.2 EQUIPMENT USED IN TESTED SYSTEM

Ite	m	Equipment	Model No.	ID or Specification	Remark
1		R/C Boat	H153	2AL75-TK20231127	EUT

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249&15.209	Radiated Emission	Compliant
§15.249	Band Edges	Compliant
§15.215	20dB bandwidth	Compliant
§15.207	Conducted Emission	Not applicable

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



Page 12 of 37

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China
Designation Number	CN1259
FCC Test Firm Registration Number	975832
A2LA Cert. No.	5054.02
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
Test Receiver	R&S	ESCI	10096	Feb. 18, 2023	Feb. 17, 2024
Signal Analyzer	Aglient	N9020A	MY52090123	Jun. 01, 2023	May 31, 2024
EXA Signal Analyzer	Agilent	N9010A	MY53470504	Jun. 01, 2023	May 31, 2024
2.4GHz Filter	EM Electronics	N/A	N/A	Mar. 18, 2022	Mar. 19, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn Antenna	SCHWARZBEC	BBHA9170	768	Sep. 24, 2023	Sep. 23, 2025
Active Loop Antenna (9K-30Mhz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS	3117	00034609	Mar. 23, 2023	Mar. 22, 2024
Preamplifer	ETS	3117-PA	00246148	Aug. 04, 2022	Aug. 03, 2024
Wideband Antenna	SCHWARZBECK	VULB9168	VULB9168-494	Jan. 05, 2023	Jan. 04, 2024
Test Software	Tonscend	4.0.0.0	N/A	N/A	N/A



Page 13 of 37

7. RADIATED EMISSION

7.1. TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics
	(millivolts/meter)	(microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Standard FCC 15.209

Frequency	Distance	Field Strengths Limit		
(MHz)	Meters	μ V/m	dB(μV)/m	
0.009 ~ 0.490	300	2400/F(kHz)		
0.490 ~ 1.705	30	24000/F(kHz)		
1.705 ~ 30	30	30		
30 ~ 88	3	100	40.0	
88 ~ 216	3	150	43.5	
216 ~ 960	3	200	46.0	
960 ~ 1000	3	500	54.0	
Above 1000	3	Other:74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)		

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m.
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



Report No.: AGC15705231147FR01 Page 14 of 37

7.2. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use minimum resolution bandwidth of 1 MHz. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 15 of 37

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
	1GHz~26.5GHz
Start ~Stop Frequency	RBW 2.4MHz/ VBW 8MHz for Peak,
	RBW 2.4MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




7.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

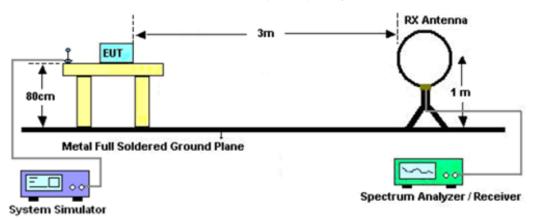

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

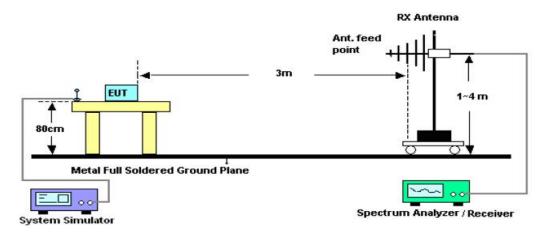

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

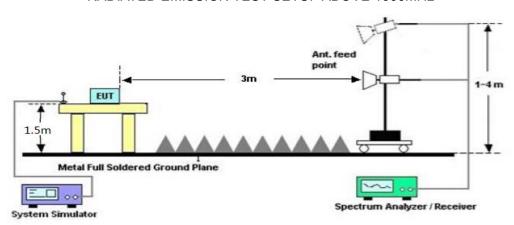

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/




7.4. TEST RESULT

RADIATED EMISSION BELOW 30MHZ

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

RADIATED EMISSION 30MHz-1GHZ

EUT	R/C Boat	Model Name	H153
Temperature	23.8° C	Relative Humidity	61.4 %
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 1	Polarization	Horizontal

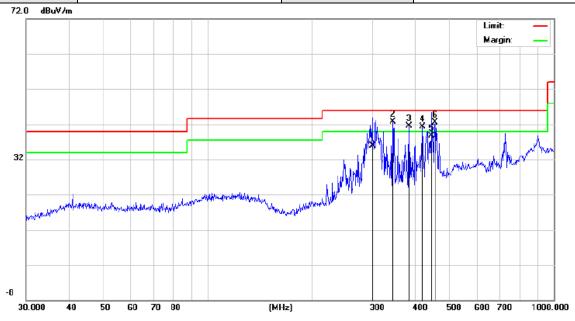


No.	Μk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	d₿	Detector
1		299.3158	19.46	16.45	35.91	46.00	-10.09	QP
2	*	343.1800	25.47	17.18	42.65	46.00	-3.35	peak
3	ļ	382.5878	22.94	18.48	41.42	46.00	-4.58	peak
4	İ	417.6409	20.60	20.75	41.35	46.00	-4.65	peak
5		444.8514	13.73	24.93	38.66	46.00	-7.34	QP
6	İ	454.3100	17.82	24.60	42.42	46.00	-3.58	peak

RESULT: PASS



EUT	R/C Boat	Model Name	H153
Temperature	23.8° C	Relative Humidity	61.4 %
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 1	Polarization	Vertical

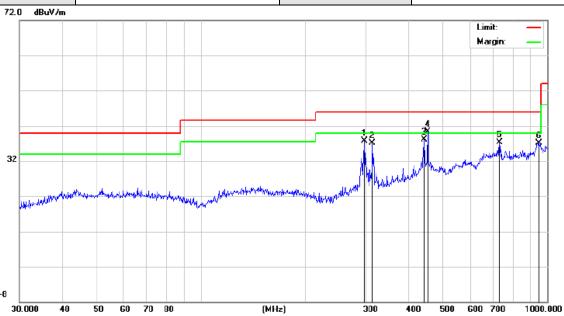


No.	Μk	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dΒ	Detector
1		297.2241	18.79	18.83	37.62	46.00	-8.38	peak
2		313.2760	17.31	19.83	37.14	46.00	-8.86	peak
3		441.7426	12.08	26.02	38.10	46.00	-7.90	peak
4	*	452.7197	14.70	25.53	40.23	46.00	-5.77	peak
5		729.3583	9.34	27.91	37.25	46.00	-8.75	peak
6		948.7610	6.51	30.65	37.16	46.00	-8.84	peak

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss, Margin=Limit-Level.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The mode 1 is the worst case and recorded in the report.






FIELD STRENGTH OF FUNDAMENTAL

EUT	R/C Boat	Model Name	H153
Temperature	23.8° C	Relative Humidity	61.4 %
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Modulation	GFSK	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
2405	48.65	49.05	97.70	114.00	-16.30	peak
2405	40.28	49.05	89.33	94.00	-4.67	AVG
2440	43.01	49.12	92.13	114.00	-21.87	peak
2440	35.44	49.12	84.56	94.00	-9.44	AVG
2475	45.23	49.25	94.48	114.00	-19.52	peak
2475	36.59	49.25	85.84	94.00	-8.16	AVG
Remark:						
Factor = Ante	Factor = Antenna Factor + Cable Loss – Pre-amplifier.					

EUT	R/C Boat	Model Name	H153
Temperature	23.8° C	Relative Humidity	61.4 %
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Modulation	GFSK	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
2405	44.37	49.05	93.70	114.00	-20.30	peak
2405	29.51	49.05	85.16	94.00	-8.84	AVG
2440	45.31	49.12	89.76	114.00	-24.24	peak
2440	30.11	49.12	80.25	94.00	-13.75	AVG
2475	40.78	49.25	90.80	114.00	-23.20	peak
	30.48	49.25	82.34	94.00	-11.66	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						






RADIATED EMISSION ABOVE 1GHZ

EUT	R/C Boat	Model Name	H153
Temperature	23.8° C	Relative Humidity	61.4 %
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 1	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4810	50.67	3.76	54.43	74.00	-19.57	peak
4810	38.28	3.76	42.04	54.00	-11.96	AVG
7215	47.34	8.17	55.51	74.00	-18.49	peak
7215	37.16	8.17	45.33	54.00	-8.67	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	R/C Boat	Model Name	H153
Temperature	23.8° C	Relative Humidity	61.4 %
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 1	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4810	48.65	3.76	52.41	74.00	-21.59	peak
4810	37.73	3.76	41.49	54.00	-12.51	AVG
7215	46.25	8.17	54.42	74.00	-19.58	peak
7215	35.45	8.17	43.62	54.00	-10.38	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						






EUT	R/C Boat	Model Name	H153
Temperature	23.8° C	Relative Humidity	61.4 %
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 2	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4880	49.58	3.78	53.36	74.00	-20.64	peak
4880	37.28	3.78	41.06	54.00	-12.94	AVG
7320	46.61	8.23	54.84	74.00	-19.16	peak
7320	35.52	8.23	43.75	54.00	-10.25	AVG
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	R/C Boat	Model Name	H153
Temperature	23.8° C	Relative Humidity	61.4 %
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 2	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4880	47.59	3.78	51.37	74.00	-22.63	peak
4880	36.66	3.78	40.44	54.00	-13.56	AVG
7320	45.25	8.23	53.48	74.00	-20.52	peak
7320 35.17 8.23 43.40 54.00 -10.60 AVG						
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						





EUT	R/C Boat	Model Name	H153
Temperature	23.8° C	Relative Humidity	61.4 %
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 3	Polarization	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4950	49.98	3.81	53.79	74.00	-20.21	peak
4950	39.65	3.81	43.46	54.00	-10.54	AVG
7425	47.84	8.27	56.11	74.00	-17.89	peak
7425 37.53 8.27 45.80 54.00 -8.20 AVG						
Remark:						
Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	R/C Boat	Model Name	H153
Temperature	23.8° C	Relative Humidity	61.4 %
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 3	Polarization	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type			
4950	46.56	3.81	50.37	74.00	-23.63	peak			
4950	37.64	3.81	41.45	54.00	-12.55	AVG			
7425	44.73	8.27	53.00	74.00	-21.00	peak			
7425	35.56	8.27	43.83	54.00	-10.17	AVG			
Remark:									
Factor = Ante	Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

RESULT: PASS

Note: The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Emission Level-Limit.

The "Factor" value can be calculated automatically by software of measurement system.



Report No.: AGC15705231147FR01 Page 23 of 37


8. BAND EDGE EMISSION

8.1. MEASUREMENT PROCEDURE

- 1. The EUT operates at transmitting mode. The operate channel is tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission: (a) PEAK: RBW=1MHz, VBW=3MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz; VBW=3MHz / Sweep=AUTO
- 3. Other procedures refer to clause 7.2.

8.2. TEST SETUP


RADIATED EMISSION TEST SETUP

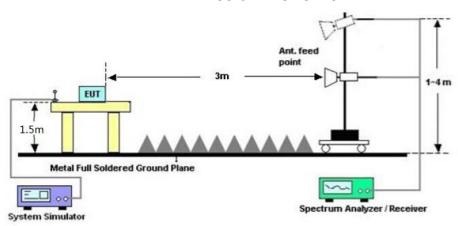

8.3 RADIATED TEST RESULT

Note:


- 1. Factor=Antenna Factor + Cable loss Amplifier gain. Field Strength=Factor + Reading level
- 2. The factor had been edited in the "Input Correction" of the Spectrum Analyzer. So the Amplitude of test plots is equal to Reading level plus the Factor in dB. Use the A dB(μ V) to represent the Amplitude. Use the F dB(μ V/m) to represent the Field Strength. So A=F.





EUT	R/C Boat	Model Name	H153
Temperature	25.2° C	Relative Humidity	59.6%
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 1	Polarization	Horizontal


Peak Value

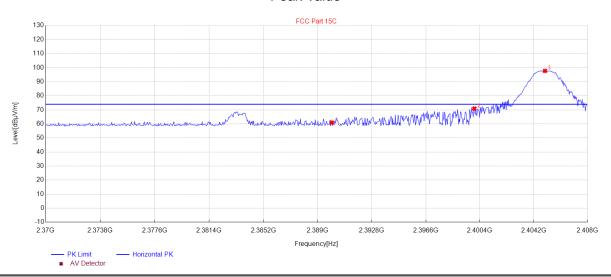


PK D	PK Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	2390.008	60.89	34.40	74.00	13.11	150	248	Horizontal		
2	2400.012	70.90	34.43	74.00	3.10	150	248	Horizontal		
3	2404.995	97.70	34.44	74.00	-23.70	150	235	Horizontal		



Average Value

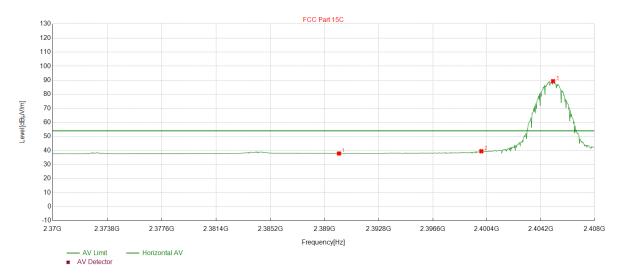


PK D	PK Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	2390.008	37.88	34.40	54.00	16.12	150	176	Horizontal		
2	2400.012	39.48	34.43	54.00	14.52	150	217	Horizontal		
3	2405.0711	89.33	34.44	54.00	-35.33	150	246	Horizontal		





EUT	R/C Boat	Model Name	H153
Temperature	25.2° C	Relative Humidity	59.6%
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 1	Polarization	Vertical


Peak Value

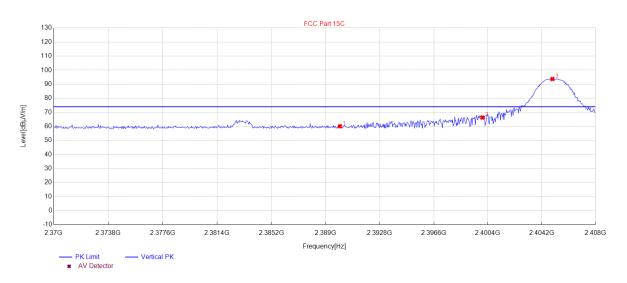


PK C	PK Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	2390.008	60.06	34.40	74.00	13.94	150	10	Vertical		
2	2400.012	66.35	34.43	74.00	7.65	150	2	Vertical		
3	2404.957	93.70	34.44	74.00	-19.70	150	298	Vertical		



Average Value

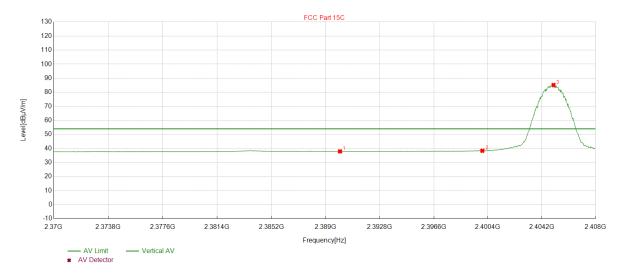


PK D	PK Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	2390.008	37.93	34.40	54.00	16.07	150	138	Vertical		
2	2400.012	38.37	34.43	54.00	15.63	150	0	Vertical		
3	2405.033	85.16	34.44	54.00	-31.16	150	280	Vertical		





EUT	R/C Boat	Model Name	H153
Temperature	25.2° C	Relative Humidity	59.6%
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 3	Polarization	Horizontal


Peak Value

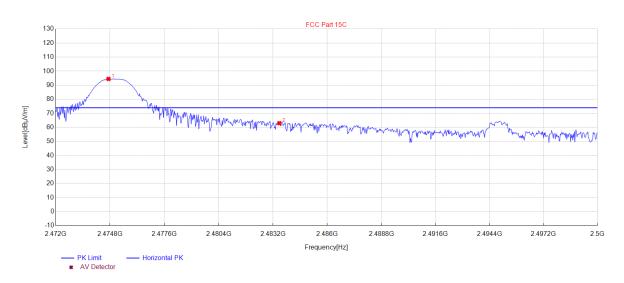


PK D	PK Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	2474.7187	94.48	34.64	74.00	-20.48	150	222	Horizontal		
2	2483.5195	62.98	34.66	74.00	11.02	150	210	Horizontal		



Average Value

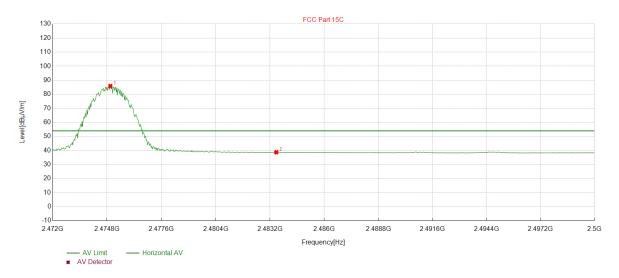


PK D	PK Data List									
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity		
1	2474.971	85.84	34.64	54.00	-31.84	150	209	Horizontal		
2	2483.5195	38.72	34.66	54.00	15.28	150	205	Horizontal		





EUT	R/C Boat	Model Name	H153
Temperature	25.2° C	Relative Humidity	59.6%
Pressure	985kPa	Test Voltage	DC 3V by battery
Test Mode	Mode 3	Polarization	Vertical


Peak Value

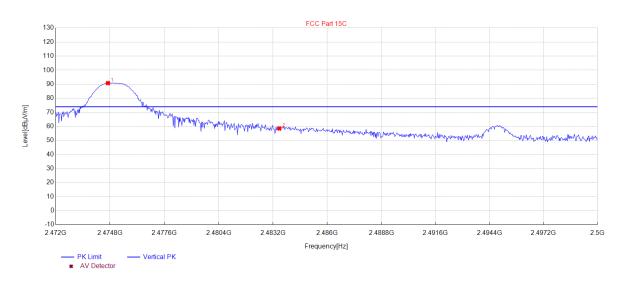


PK D	PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	
1	2474.6907	90.80	34.64	74.00	-16.80	150	284	Vertical	
2	2483.5195	58.50	34.66	74.00	15.50	150	2	Vertical	



Average Value

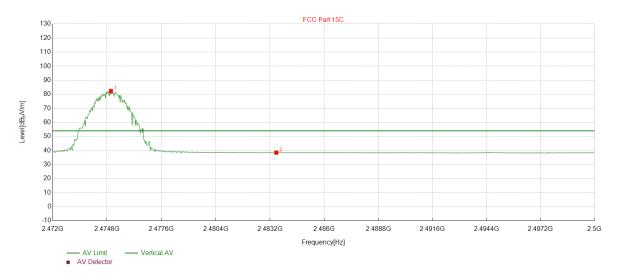

PK Data List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2474.999	82.34	34.64	54.00	-28.34	150	278	Vertical
2	2483.5195	38.43	34.66	54.00	15.57	150	113	Vertical







9. 20DB BANDWIDTH

9.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set SPA Centre Frequency = Operation Frequency, RBW= 30kHz, VBW≥1 × RBW.
- 3. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

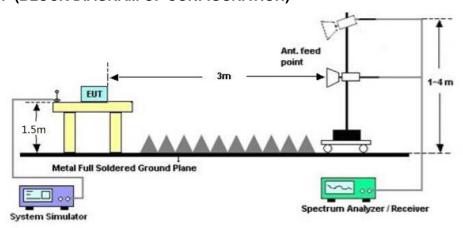





9.3. MEASUREMENT RESULTS

TEST ITEM	20DB BANDWIDTH
TEST MODULATION	GFSK

Test Channel (MHz)	20DB BANDWIDTH (MHz)	99% BANDWIDTH (MHz)	Criteria
2405	1.331	1.3396	PASS
2440	1.198	1.1598	PASS
2475	1.139	1.0770	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL





TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/





10. FCC LINE CONDUCTED EMISSION TEST


10.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Francisco	Maximum RF Line Voltage			
Frequency	Q.P.(dBuV)	Average(dBuV)		
150kHz~500kHz	66-56	56-46		
500kHz~5MHz	56	46		
5MHz~30MHz	60	50		

Note: 1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

10.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

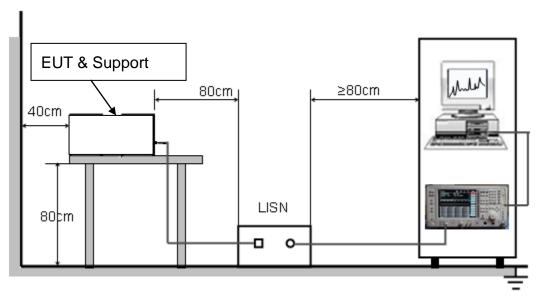



Report No.: AGC15705231147FR01 Page 36 of 37

10.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 3V power from battery.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

10.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

10.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



Page 37 of 37

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC15705231147AP01

APPENDIX B: PHOTOGRAPHS OF THE EUT

Refer to the Report No.: AGC15705231147AP02

----END OF REPORT----



Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.
- 3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.
- 7.Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.