



LED UNDERCABINET LIGHT

With SYNC Feature
Installation Instructions

Please read and understand this entire manual before attempting to assemble, operate or install the product. Failure to do so could lead to electric shock, fire or other injuries that could be hazardous or even fatal.

• Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

• This product must be installed in accordance with local, state and national electrical codes.

• THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

CAUTION:

• This fixture can be used with most dimmers to create your desired ambience with smooth dimming down to 10% of full light output.

• SUITABLE FOR USE IN DAMP LOCATIONS

• CAUTION - RISK OF FIRE. MIN 90°C SUPPLY CONDUCTORS. CONSULT A QUALIFIED ELECTRICIAN TO ENSURE CORRECT BRANCH CIRCUIT CONDUCTOR

NOTICE

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC warning:
Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Questions, problems, missing parts? Before returning to your retailer, call our customer service department at 1-866-381-268

PACKAGE CONTENTS

Hardware Contents



A Lighting Fixture




aa Brackets*2


bb Screws*2

cc Charging Cable*1

PACKAGE CONTENTS

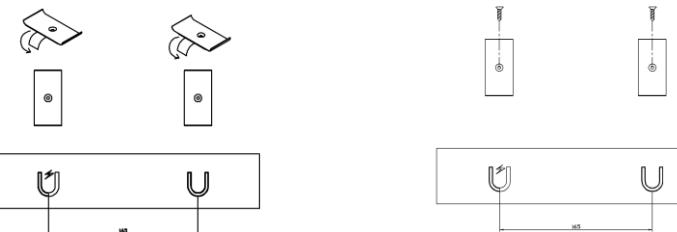


① Peel the release paper in the back of installation brackets(aa), stick the installation brackets to the right position, If the adhesive tape do not work, use the screws(bb) to fix the brackets.

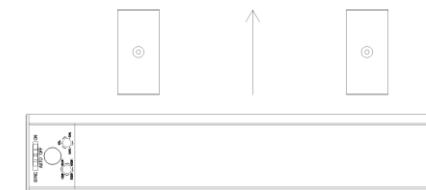

② Charging the fixture with charging cable(cc) before you install it to the bracket.
With magnet in the back of fixture, you can easily attach the fixture to the brackets.

SELECTING CCT COLOR TEMPERATURE, BRIGHTNESS LEVEL, AND SYNC MODE



Function: ON-OFF-AUTO-SYNC setting:

- ON: Constant ON
- OFF: Shut down the power
- AUTO: PIR Sensor with Dusk-To-Dawn integrated. Detective angle 120° , distance 10ft, and delay time 30s.
- SYNC: Brightness level, color temperature and PIR trigger in sync. Once the brightness level or color temperature is changed or PIR is triggered, all lights in the same group will react as the same.

SYNC channel setting:

All default setting is in "sync" group, follow the steps to make a new group so that they will not interference among each other.

1. Shift the switch to "ON" for example, "AUTO", "OFF" or "SYNC" is also alternative;
2. Press the "Color temperature" & "Brightness" button for over 5s till the light flashing;
3. Take the light you want to set into the same group and repeat 1-3 steps, be sure they set in the same position. It's up to 15 lights at most in a same group.
4. Shift to "sync" mode after setting, and the new group will not interference other lights when you adjust the color temperature and brightness level.

CARE AND MAINTENANCE

Clean with a mild, non-abrasive glass cleaner and soft cloth. Do NOT use solvents or cleaners containing abrasive agents. When cleaning the fixture, make sure the power is turned off, and any liquid spray should be applied to the cleaning cloth and not sprayed directly onto the fixture itself.

WARRANTY

This fixture has a 2-year warranty. If it fails or you are not satisfied with its performance, please contact Yankon Lighting Inc. for instructions on replacement. This replacement is the sole remedy available.
Customer Service: Yankon Lighting, Inc. 13445 12th St. Chino, CA 91710 USA, costco@energeticlighting.com, www.energeticlighting.com/costco-warranty, 1-866-381-2688 (9 a.m. - 5 p.m., PT, Monday - Friday)

Distributed by:
Costco Wholesale Corporation
P.O. Box 34535
Seattle, WA 98124 -1535
USA
1-800-774-2678
www.costco.com

Costco Wholesale Canada Ltd.*
415 W. Hunt Club Road
Ottawa, Ontario
K2E 1C5, Canada
1-800-463-3783
www.costco.ca

* faisant affaire au Québec sous
le nom les Entrepôts Costco

Importado por:
Importadora Primex S.A. de C.V.
Blvd. Magnocentro No. 4
San Fernando La Herradura
Huixquilucan, Estado de México
C.P. 52765
RFC: IPR-930907-S70
(55)-5246-5500
www.costco.com.mx