

RF TEST REPORT



Report No.: 17070139-FCC-R3-V1

Supersede Report No.: N/A

Applicant	Beijing ANTVR Technology Co., LTD	
Product Name	ANTVR CAP	
Model No.	C21	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	March 04 to March 14, 2017	
Issue Date	April 07, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification		<input checked="" type="checkbox"/>
Equipment did not comply with the specification		<input type="checkbox"/>
Loren Luo	David Huang	
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report No.	17070139-FCC-R3-V1
Page	3 of 60

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT	9
6.2 DTS (6 DB&20 DB) CHANNEL BANDWIDTH	10
6.3 MAXIMUM OUTPUT POWER	16
6.4 POWER SPECTRAL DENSITY	20
6.5 BAND-EDGE & UNWANTED EMISSIONS INTO RESTRICTED FREQUENCY BANDS	24
6.6 AC POWER LINE CONDUCTED EMISSIONS	30
6.7 RADIATED SPURIOUS EMISSIONS & RESTRICTED BAND	36
ANNEX A. TEST INSTRUMENT	42
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	43
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	55
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	59
ANNEX E. DECLARATION OF SIMILARITY	60

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070139-FCC-R3	NONE	Original	March 15, 2017
17070139-FCC-R3-V1	V1	Change the address for Applicant and manufacturers, Change the antenna gain	April 07, 2017

2. Customer information

Applicant Name	Beijing ANTVR Technology Co., LTD
Applicant Add	4th floor of Building C, Lenovo Beijing Innovation Center, No. 6 Shangdi West Rd., Beijing 100085, China
Manufacturer	Beijing ANTVR Technology Co., LTD
Manufacturer Add	4th floor of Building C, Lenovo Beijing Innovation Center, No. 6 Shangdi West Rd., Beijing 100085, China

3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao'an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software of Radiated Emission	Radiated Emission Program-To Shenzhen v2.0
Test Software of Conducted Emission	EZ-EMC(ver.lcp-03A1)

4. Equipment under Test (EUT) Information

Description of EUT:	ANTVR CAP
Main Model:	C21
Serial Model:	N/A
Date EUT received:	March 03, 2017
Test Date(s):	March 04 to March 14, 2017
Equipment Category :	DTS
Antenna Gain:	WIFI: 0.4dBi
Antenna Type:	PIFA antenna
Type of Modulation:	802.11b/g/n: DSSS, OFDM
RF Operating Frequency (ies):	WIFI: 802.11b/g/n(20M): 2412-2462 MHz WIFI: 802.11n(40M): 2422-2452 MHz
Max. Output Power:	802.11b: 14.55dBm 802.11g: 13.77dBm 802.11n(20M): 13.30dBm 802.11n(40M): 11.87dBm
Number of Channels:	WIFI :802.11b/g/n(20M): 11CH WIFI :802.11n(40M): 7CH
Port:	USB Port, Mini HDMI Port, TF Port
Input Power:	Adapter: Model: YS-C00 Input: AC100-240V~50/60Hz,0.15A Output: DC 5.0V,1.0A Battery: Model:SD803258PE Spec: 3.7V,2000mAh,7.40Wh

Test Report No.	17070139-FCC-R3-V1
Page	7 of 60

Trade Name : ANTVR

GPRS/EGPRS Multi-slot class 8/10/12

FCC ID: 2ALCABAC21

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247 (a)(2)	DTS (6 dB&20 dB) CHANNEL BANDWIDTH	Compliance
§15.247(b)(3)	Conducted Maximum Output Power	Compliance
§15.247(e)	Power Spectral Density	Compliance
§15.247(d)	Band-Edge & Unwanted Emissions into Restricted Frequency Bands	Compliance
§15.207 (a),	AC Power Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions & Unwanted Emissions into Restricted Frequency Bands	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 1 antennas:


A permanently attached PIFA antenna for WIFI, the gain is 0.4dBi for WIFI.

The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 DTS (6 dB&20 dB) Channel Bandwidth

Temperature	23 °C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	March 06 & 08, 2017
Tested By :	Loren Luo

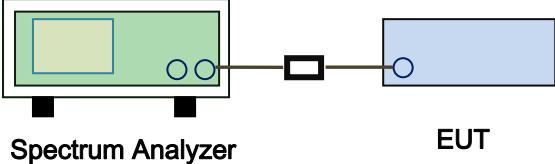Spec	Item	Requirement	Applicable
§ 15.247(a)(2) RSS Gen(4.6.1)	a)	6dB BW \geq 500kHz; 20dB BW \geq 500kHz;	<input checked="" type="checkbox"/>
	b)	99% BW: For FCC reference only; required by IC.	<input checked="" type="checkbox"/>
Test Setup	 Spectrum Analyzer EUT		
Test Procedure	<p>558074 D01 DTS MEAS Guidance v03r03, 8.1 DTS bandwidth</p> <p><u>6dB bandwidth</u></p> <ol style="list-style-type: none"> Set RBW = 100 kHz. Set the video bandwidth (VBW) \geq 3 \times RBW. Detector = Peak. Trace mode = max hold. Sweep = auto couple. Allow the trace to stabilize. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. <p><u>20dB bandwidth</u></p> <p>C63.10 Occupied Bandwidth (OBW=20dB bandwidth)</p> <ol style="list-style-type: none"> Set RBW = 1%-5% OBW. Set the video bandwidth (VBW) \geq 3 x RBW. Set the span range between 2 times and 5 times of the OBW. Sweep time=Auto, Detector=PK, Trace=Max hold. Once the reference level is established, the equipment is conditioned with typical modulating signals to produce the worst- 		

	case (i.e., the widest) bandwidth. Unless otherwise specified for an unlicensed wireless device, measure the bandwidth at the 20 dB levels with respect to the reference level.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Measurement result

Test mode	CH	Freq (MHz)	6dB Bandwidth (MHz)	20dB Bandwidth (MHz)	Limit (MHz)
802.11b	Low	2412	13.3186	13.3681	≥ 0.5
	Mid	2437	13.2890	13.2506	≥ 0.5
	High	2462	13.1648	13.2177	≥ 0.5
802.11g	Low	2412	16.3885	16.7804	≥ 0.5
	Mid	2437	16.3815	16.8131	≥ 0.5
	High	2462	16.4162	16.7223	≥ 0.5
802.11n (20M)	Low	2412	17.6001	17.9731	≥ 0.5
	Mid	2437	17.5834	17.9512	≥ 0.5
	High	2462	17.6402	17.8840	≥ 0.5
802.11n (40M)	Low	2422	36.071	37.210	≥ 0.5
	Mid	2437	35.994	37.234	≥ 0.5
	High	2452	35.866	36.701	≥ 0.5


Test Plots


6dB Bandwidth measurement result

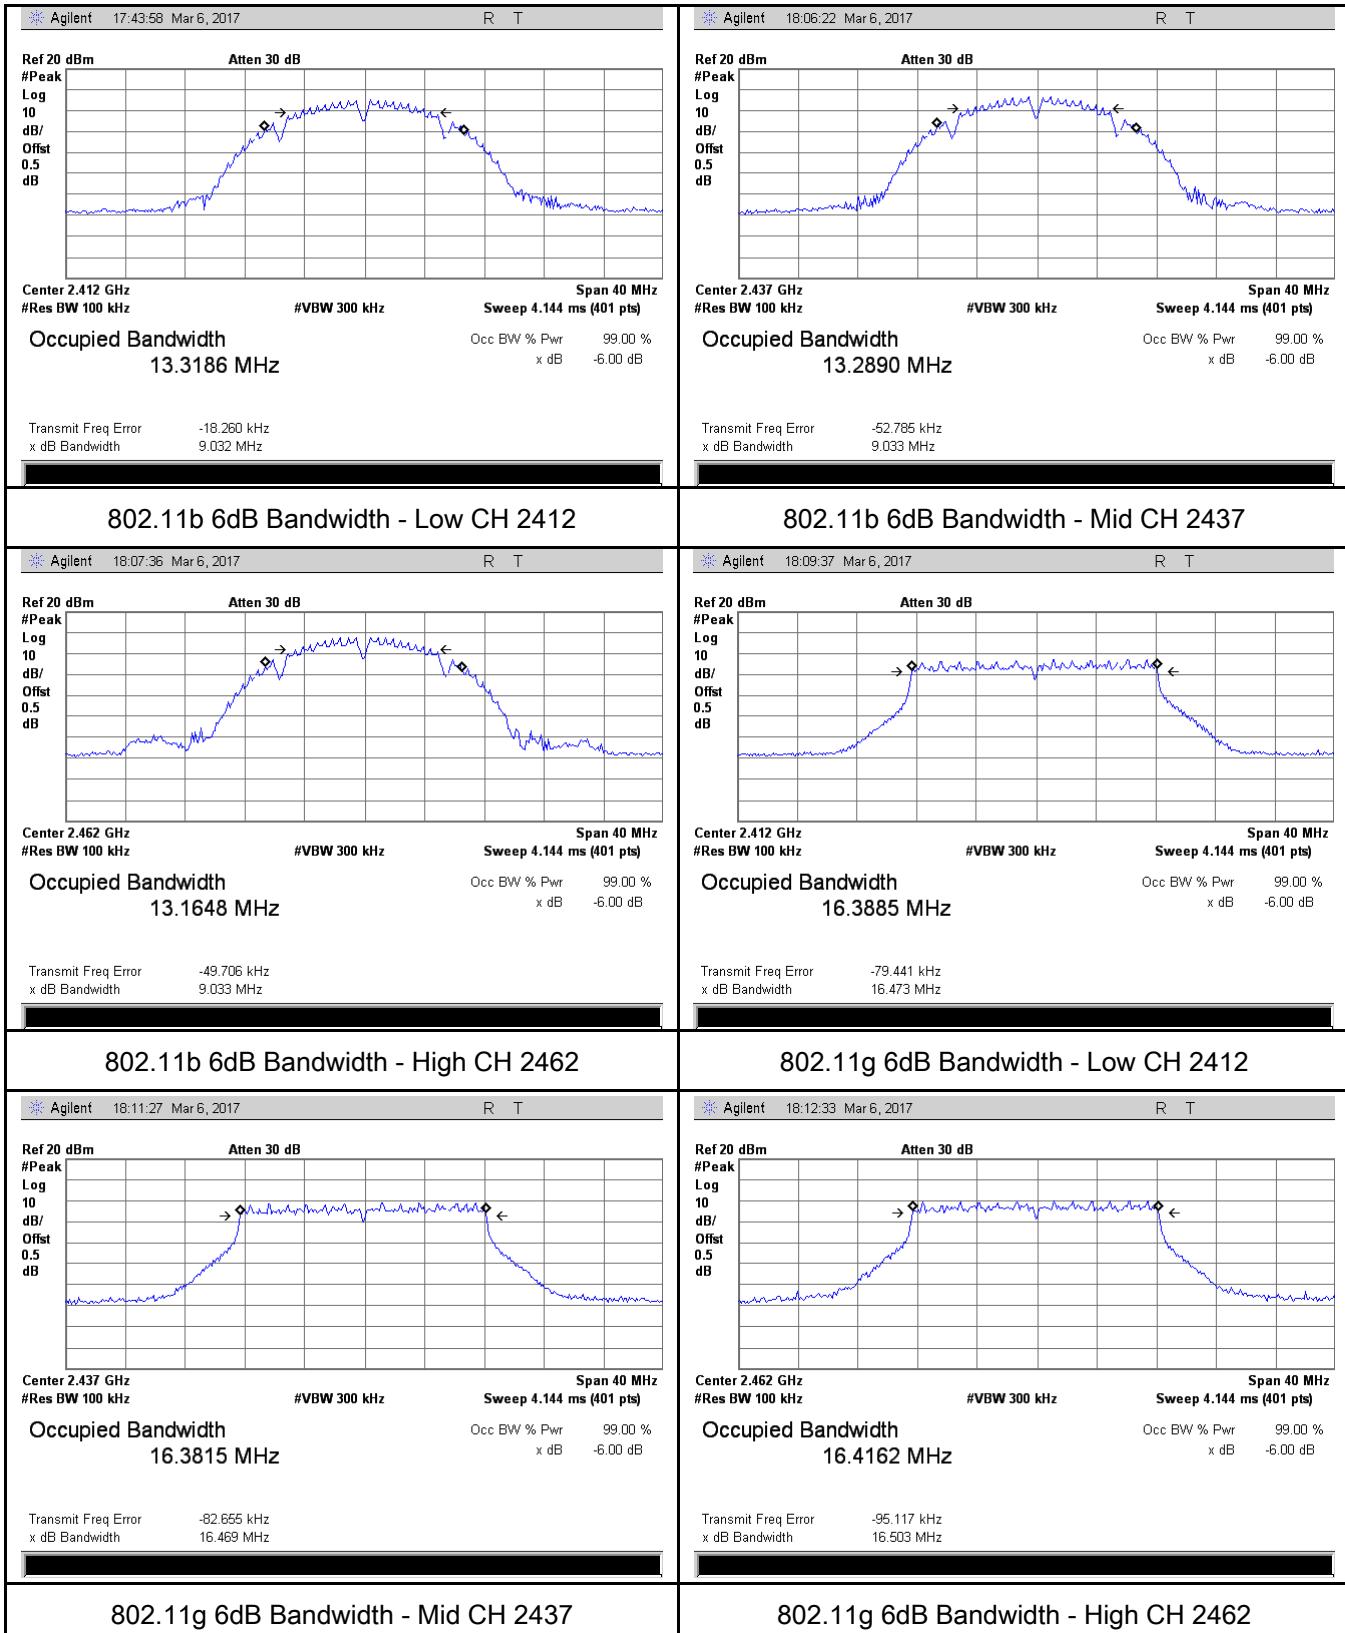

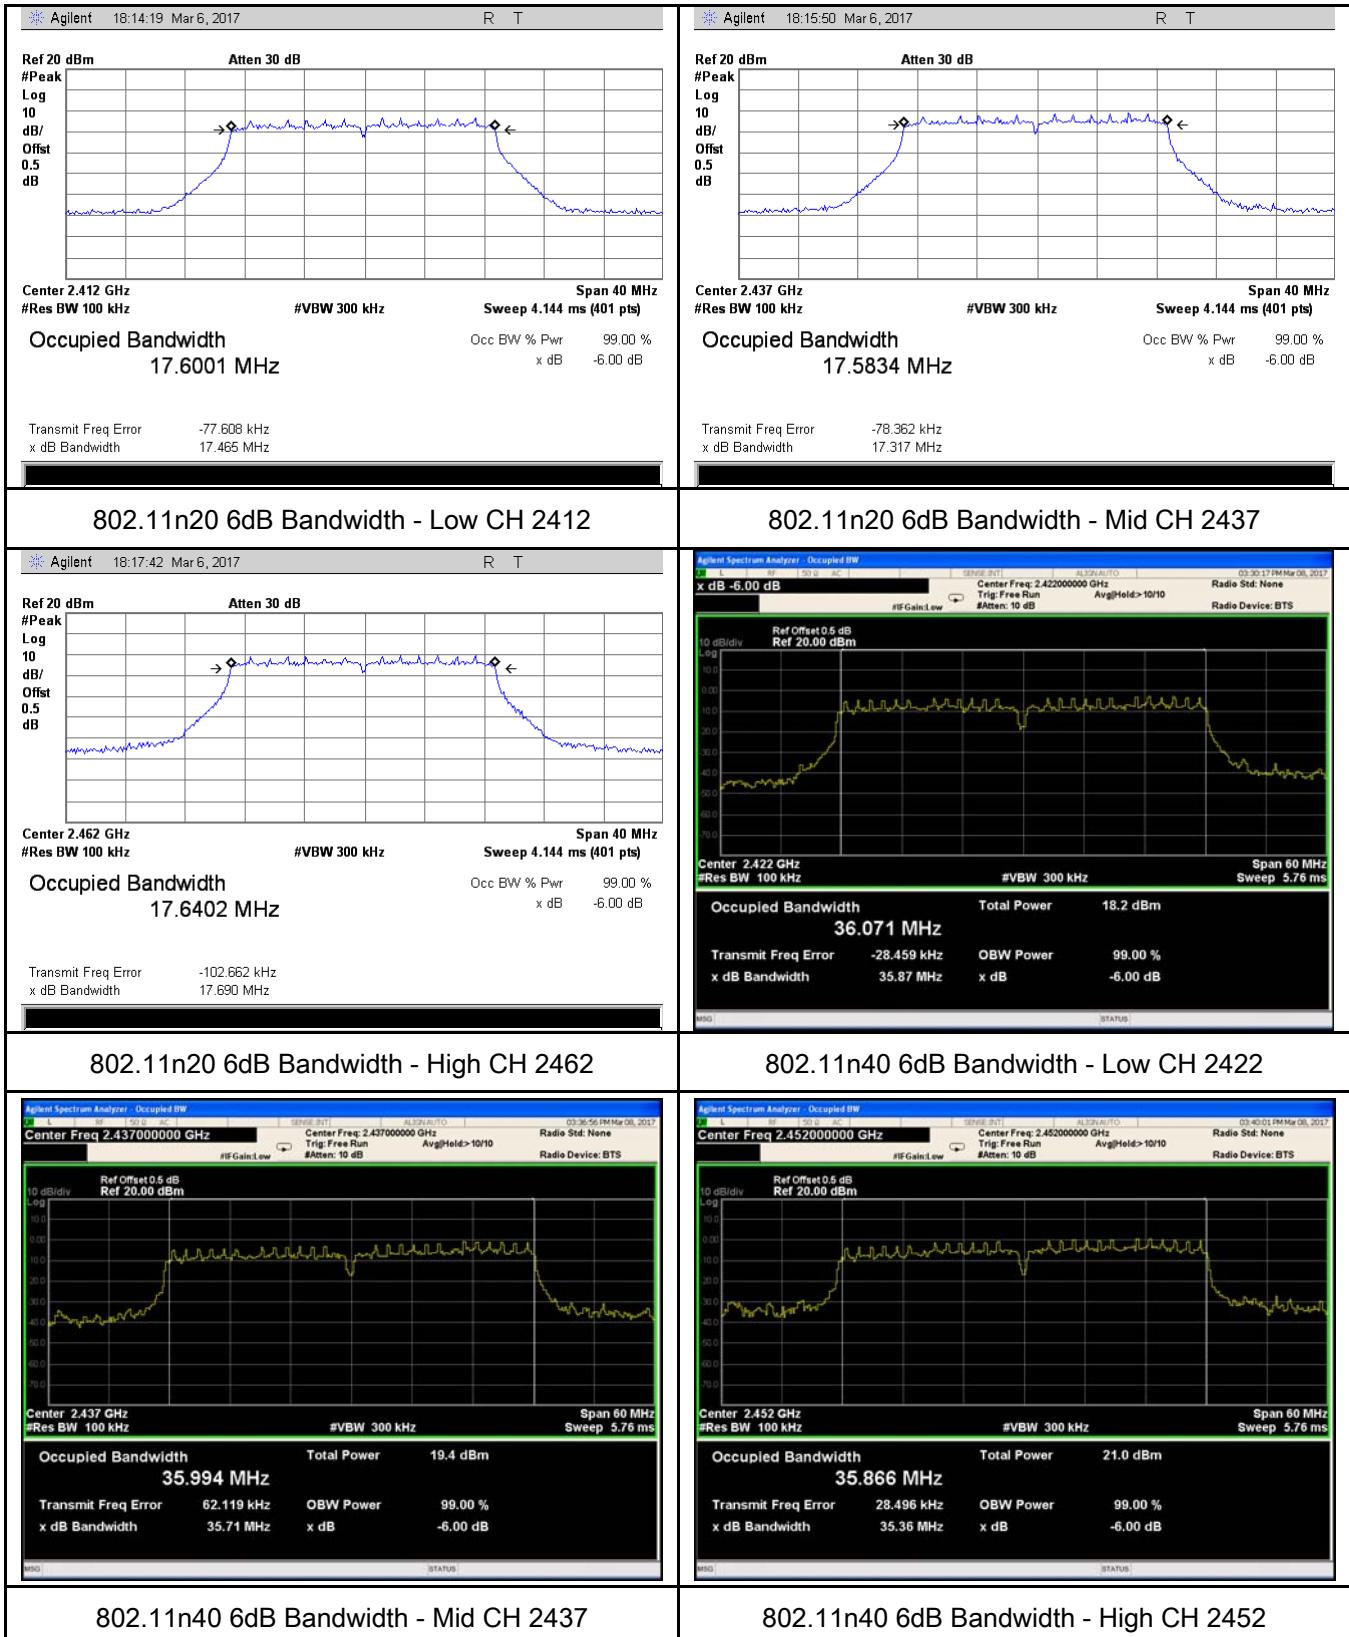

20 dB Bandwidth measurement result

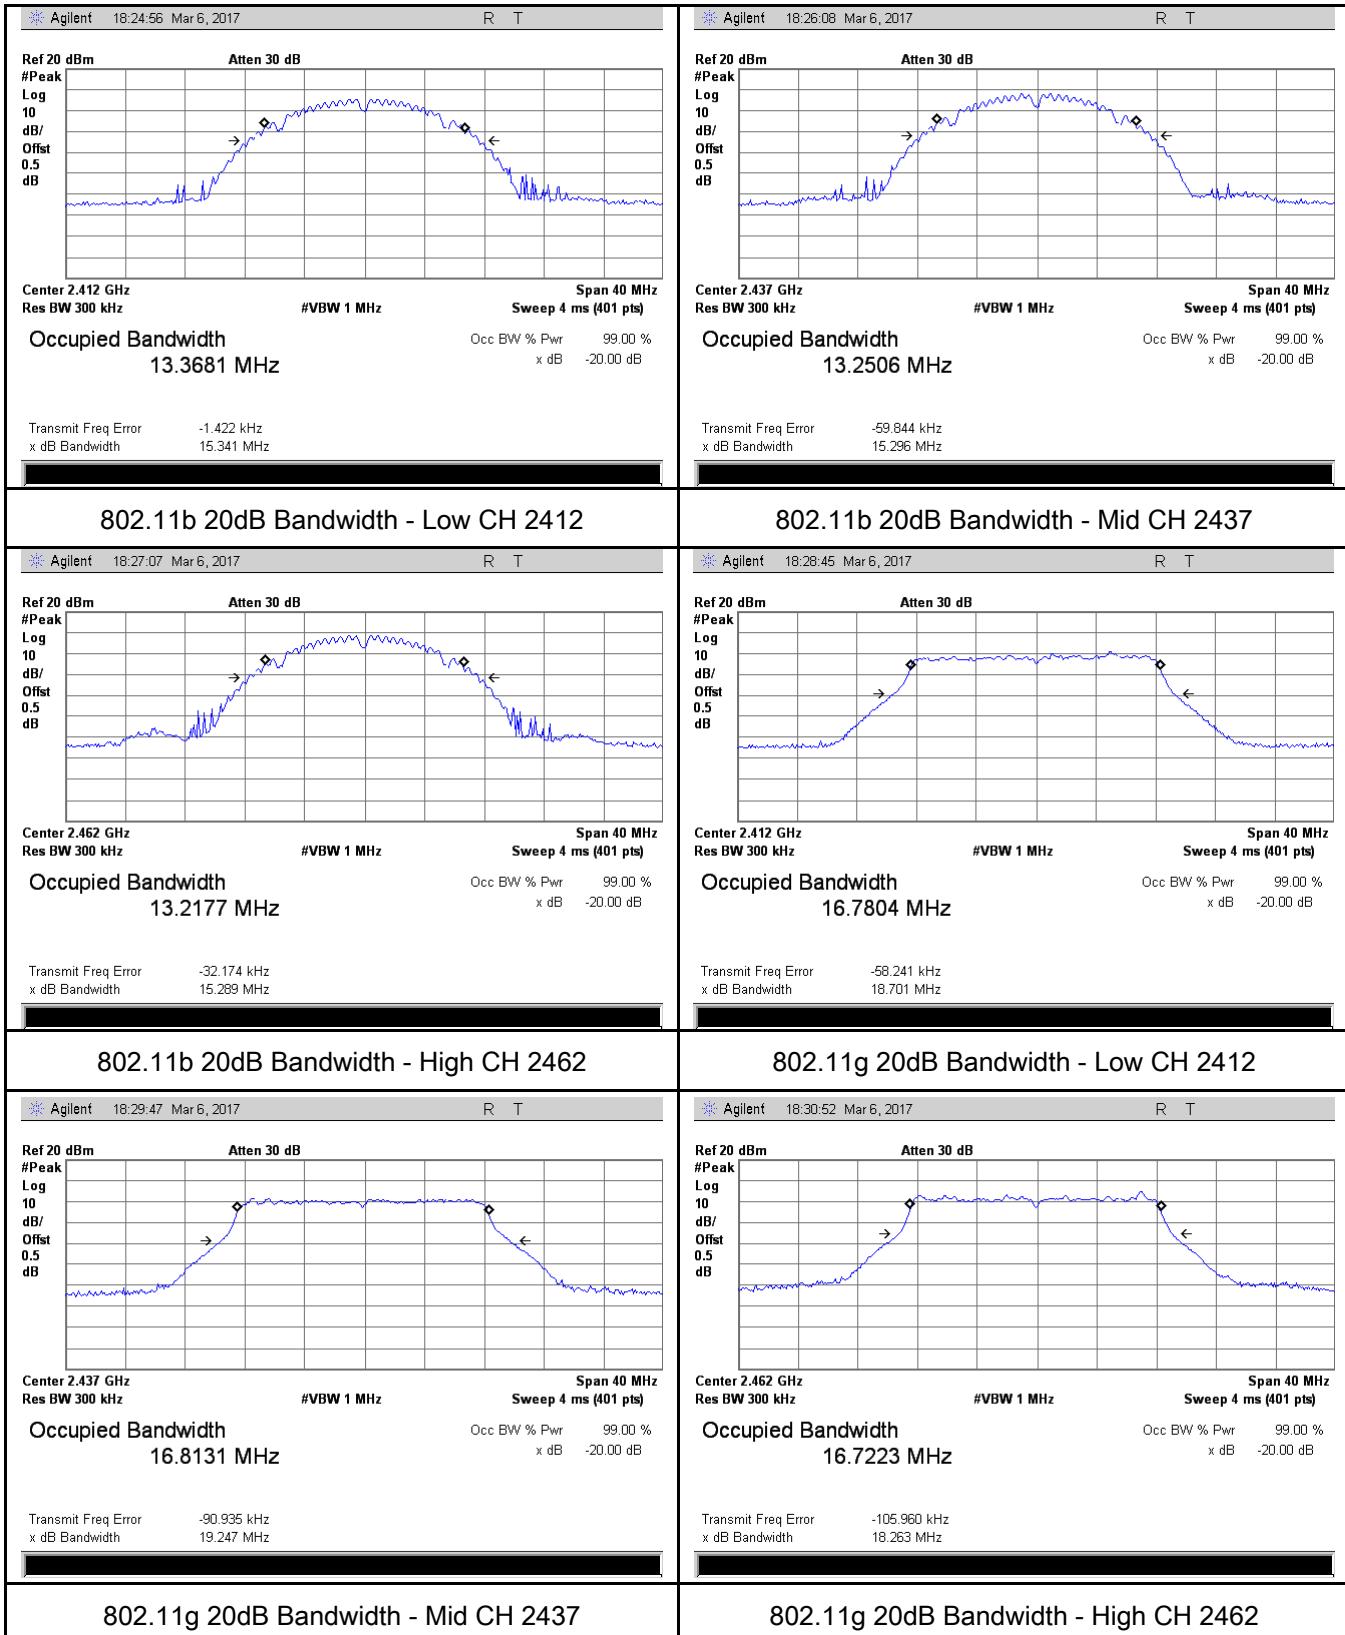


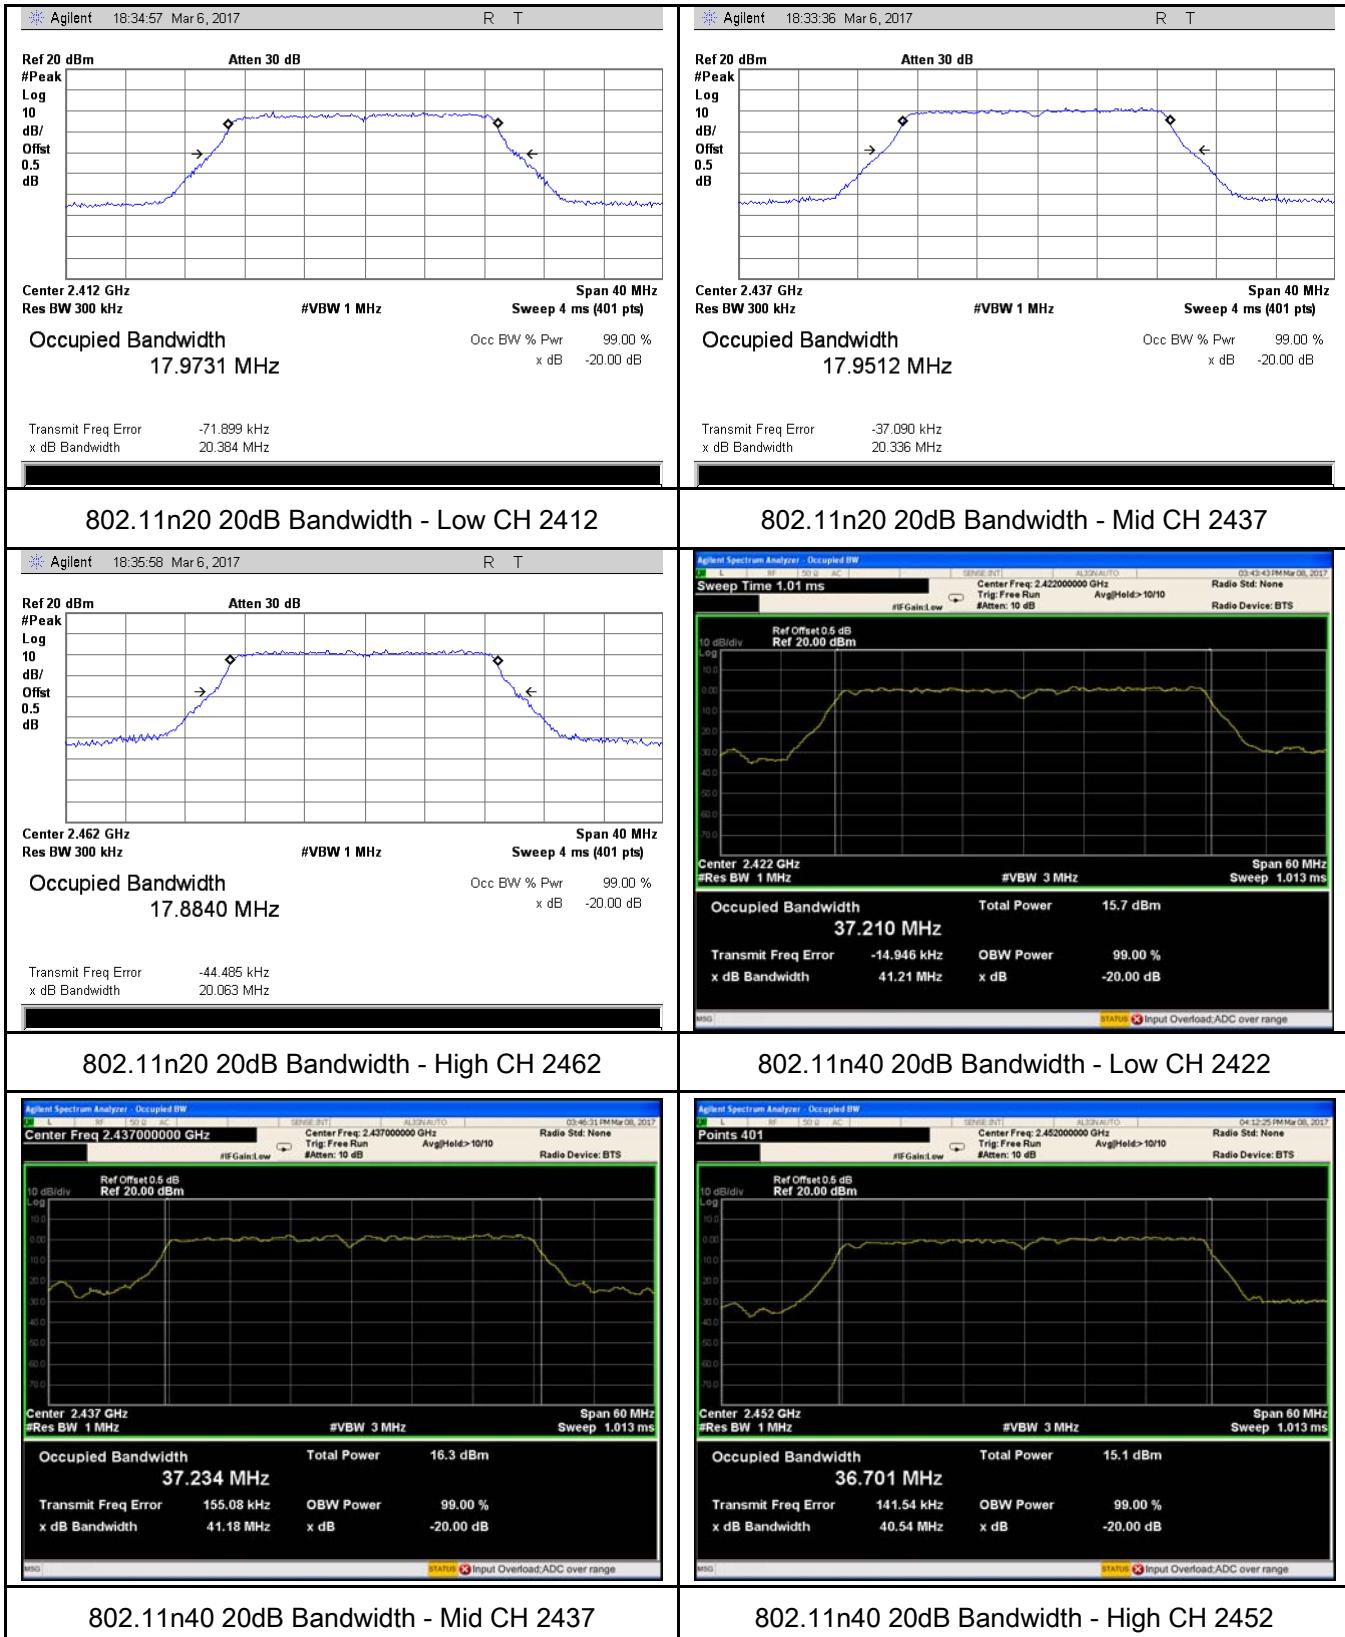

6.3 Maximum Output Power

Temperature	24 °C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	March 07&08, 2017
Tested By :	Loren Luo

Requirement(s):

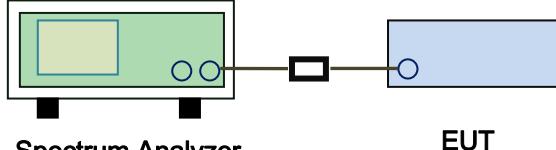Spec	Item	Requirement	Applicable
§15.247(b) (3), RSS210 (A8.4)	a)	FHSS in 2400-2483.5MHz with \geq 75 channels: \leq 1 Watt	<input type="checkbox"/>
	b)	FHSS in 5725-5850MHz: \leq 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: \leq 0.125 Watt.	<input type="checkbox"/>
	d)	FHSS in 902-928MHz with \geq 50 channels: \leq 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with \geq 25 & < 50 channels: \leq 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: \leq 1 Watt	<input checked="" type="checkbox"/>
Test Setup		 Spectrum Analyzer EUT	
Test Procedure		<p>558074 D01 DTS MEAS Guidance v03r03, 9.1.2 Integrated band power method</p> <p>Maximum output power measurement procedure</p> <ul style="list-style-type: none"> - a) Set span to at least 1.5 times the OBW. - b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz. - c) Set VBW \geq 3 x RBW. - d) Number of points in sweep \geq 2 \times span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.) - e) Sweep time = auto. - f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode. - g) If transmit duty cycle $<$ 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum 	

	<p>power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “ free run” .</p> <ul style="list-style-type: none"> - h) Trace average at least 100 traces in power averaging (i.e., RMS) mode. - i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’ s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A


Output Power measurement result

Type	Test mode	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Result
Output power	802.11b	Low	2412	14.47	30	Pass
		Mid	2437	14.55	30	Pass
		High	2462	14.52	30	Pass
	802.11g	Low	2412	13.77	30	Pass
		Mid	2437	13.64	30	Pass
		High	2462	13.43	30	Pass
	802.11n (20M)	Low	2412	12.79	30	Pass
		Mid	2437	13.30	30	Pass
		High	2462	12.62	30	Pass
	802.11n (40M)	Low	2422	11.50	30	Pass
		Mid	2437	11.87	30	Pass
		High	2452	11.69	30	Pass

Test Plots

The Average Power

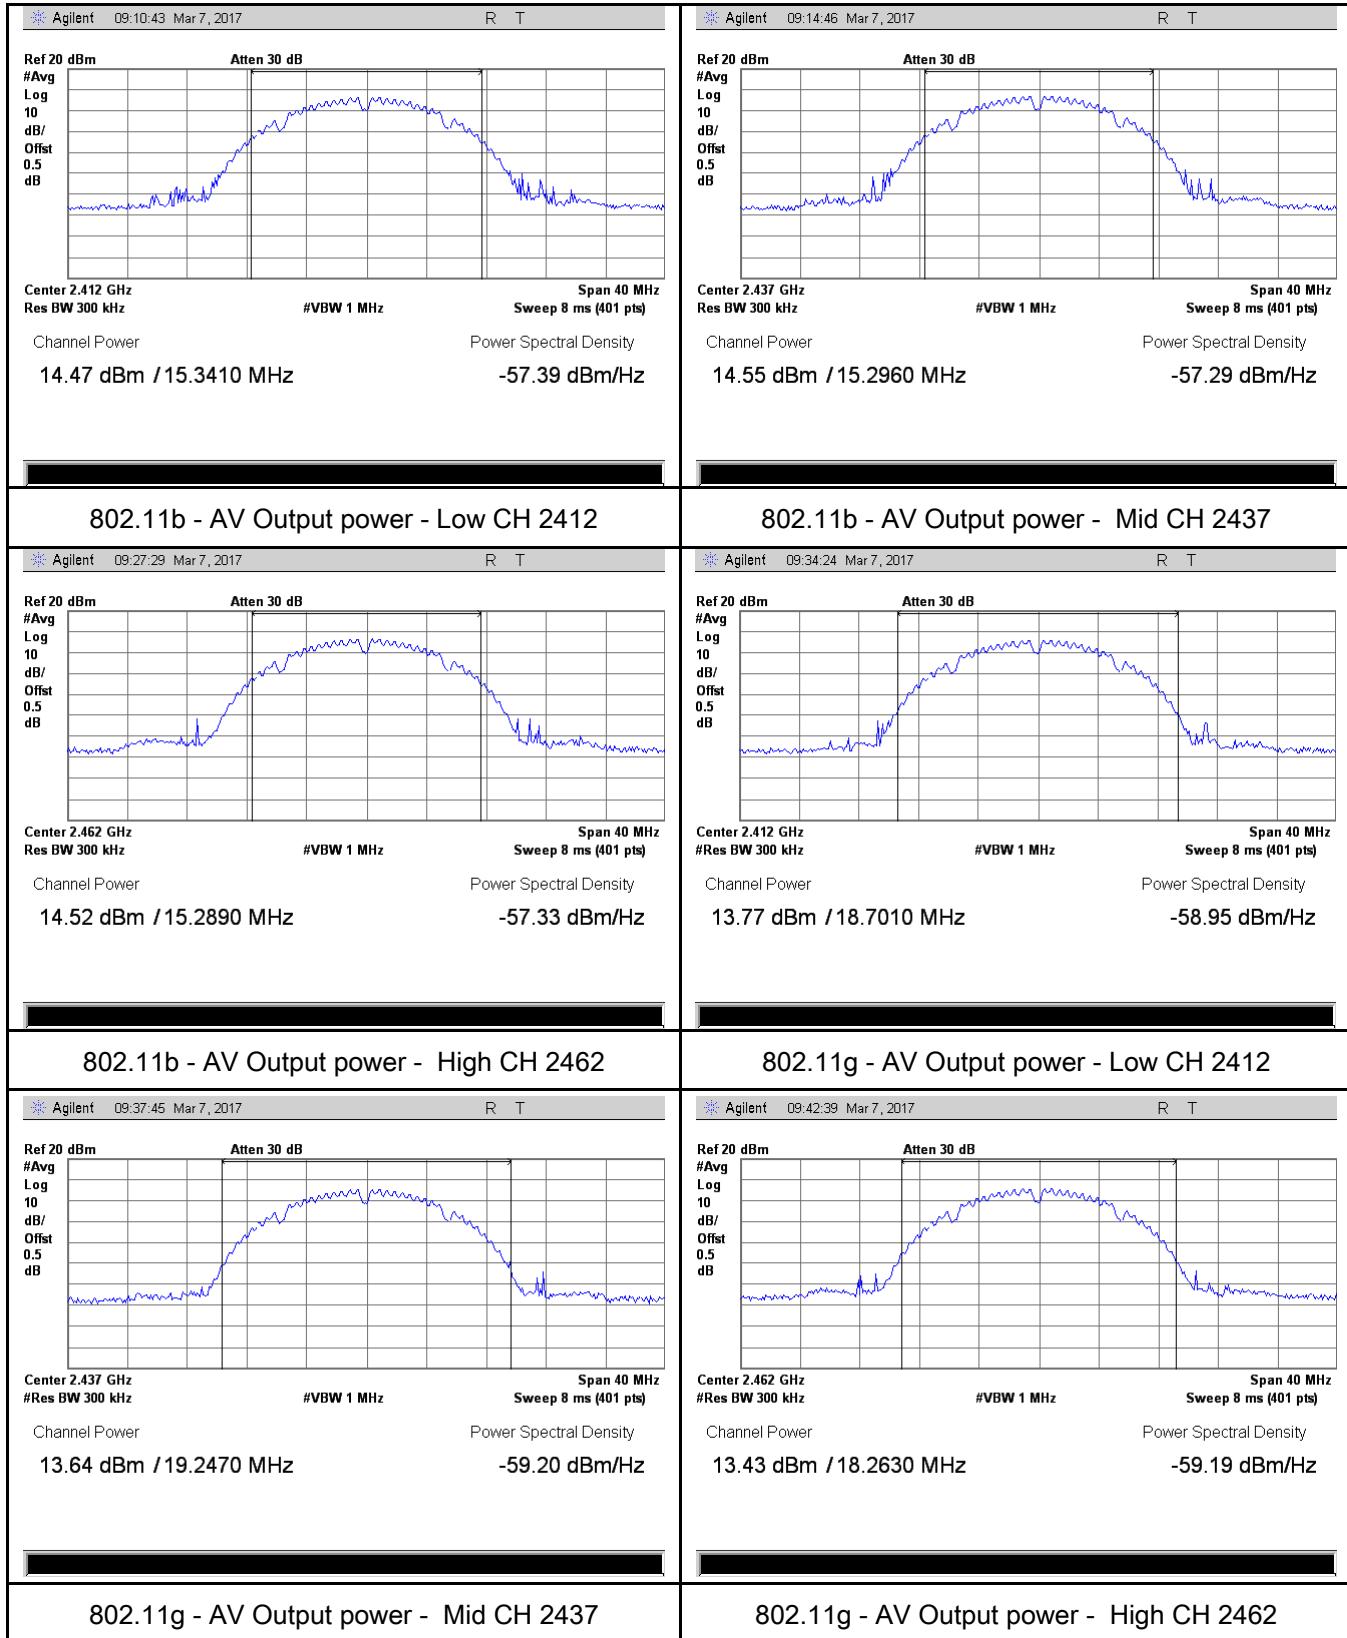

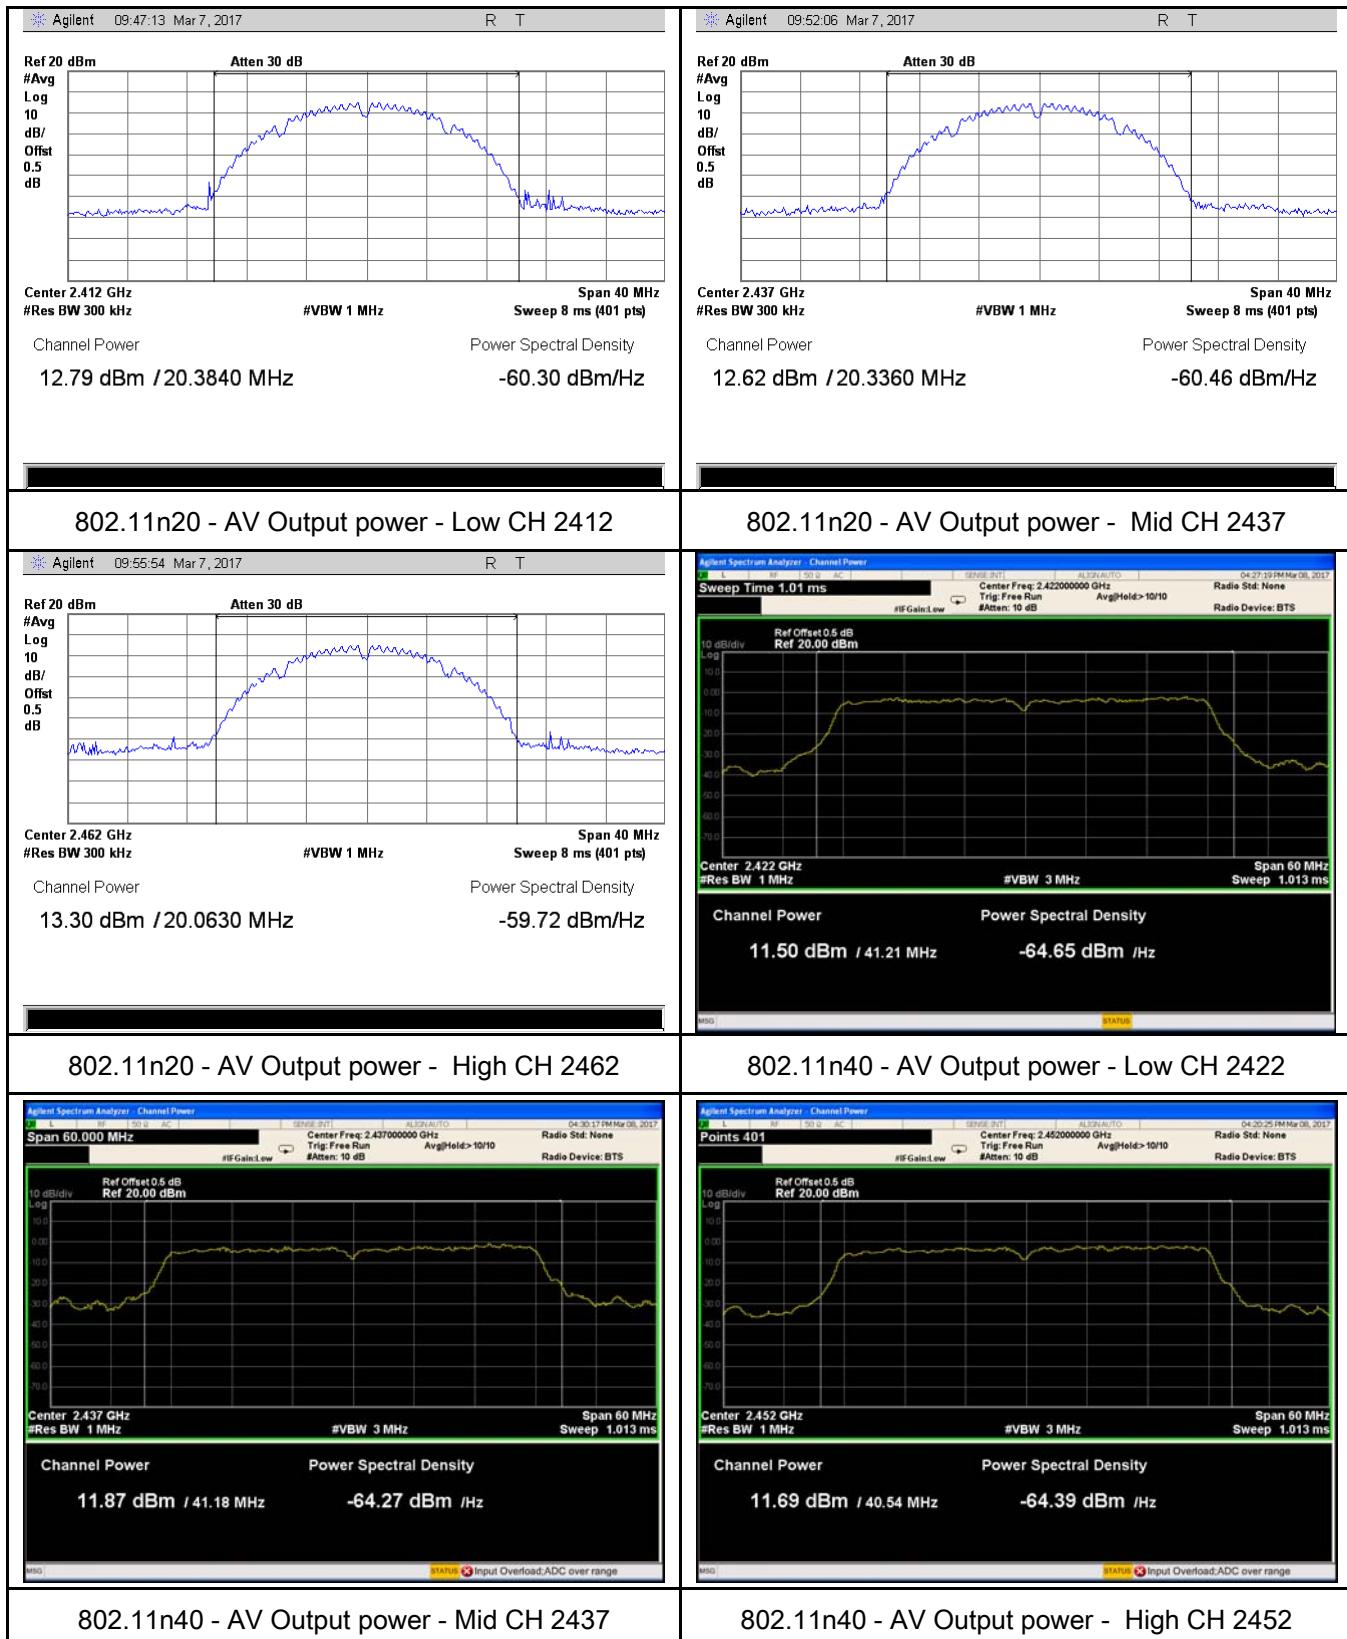

6.4 Power Spectral Density

Temperature	23 °C
Relative Humidity	58%
Atmospheric Pressure	1006mbar
Test date :	March 06 & 08, 2017
Tested By :	Loren Luo


Test Data Yes N/A
Test Plot Yes (See below) N/A


Power Spectral Density measurement result

Type	Test mode	CH	Freq (MHz)	PSD	Limit (dBm)	Result
				(dBm)		
PSD	802.11b	Low	2412	-12.94	8	Pass
		Mid	2437	-10.92	8	Pass
		High	2462	-11.65	8	Pass
	802.11g	Low	2412	-13.72	8	Pass
		Mid	2437	-10.54	8	Pass
		High	2462	-11.04	8	Pass
	802.11n (20M)	Low	2412	-12.41	8	Pass
		Mid	2437	-11.32	8	Pass
		High	2462	-11.27	8	Pass
	802.11n (40M)	Low	2422	-18.150	8	Pass
		Mid	2437	-16.620	8	Pass
		High	2452	-12.714	8	Pass

Test Plots

Power Spectral Density measurement result

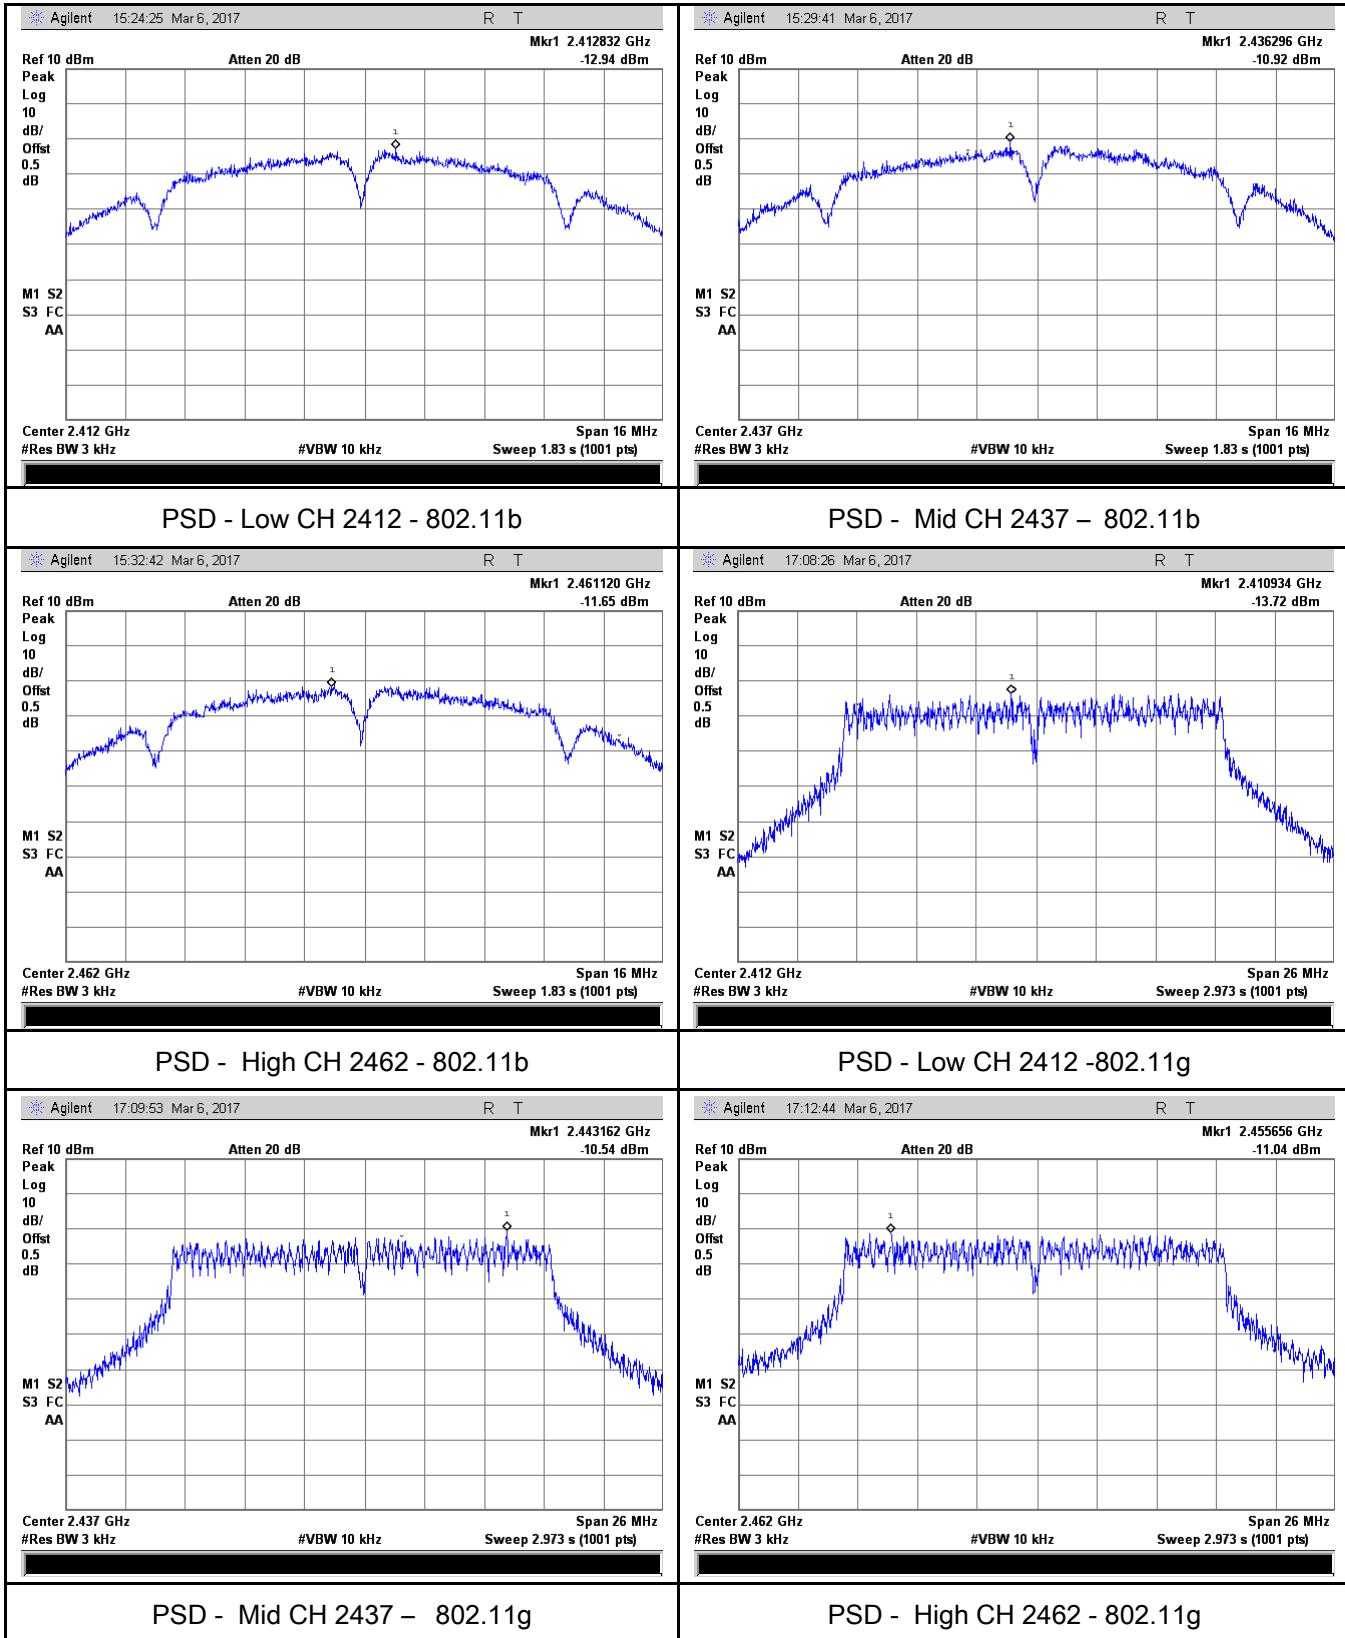


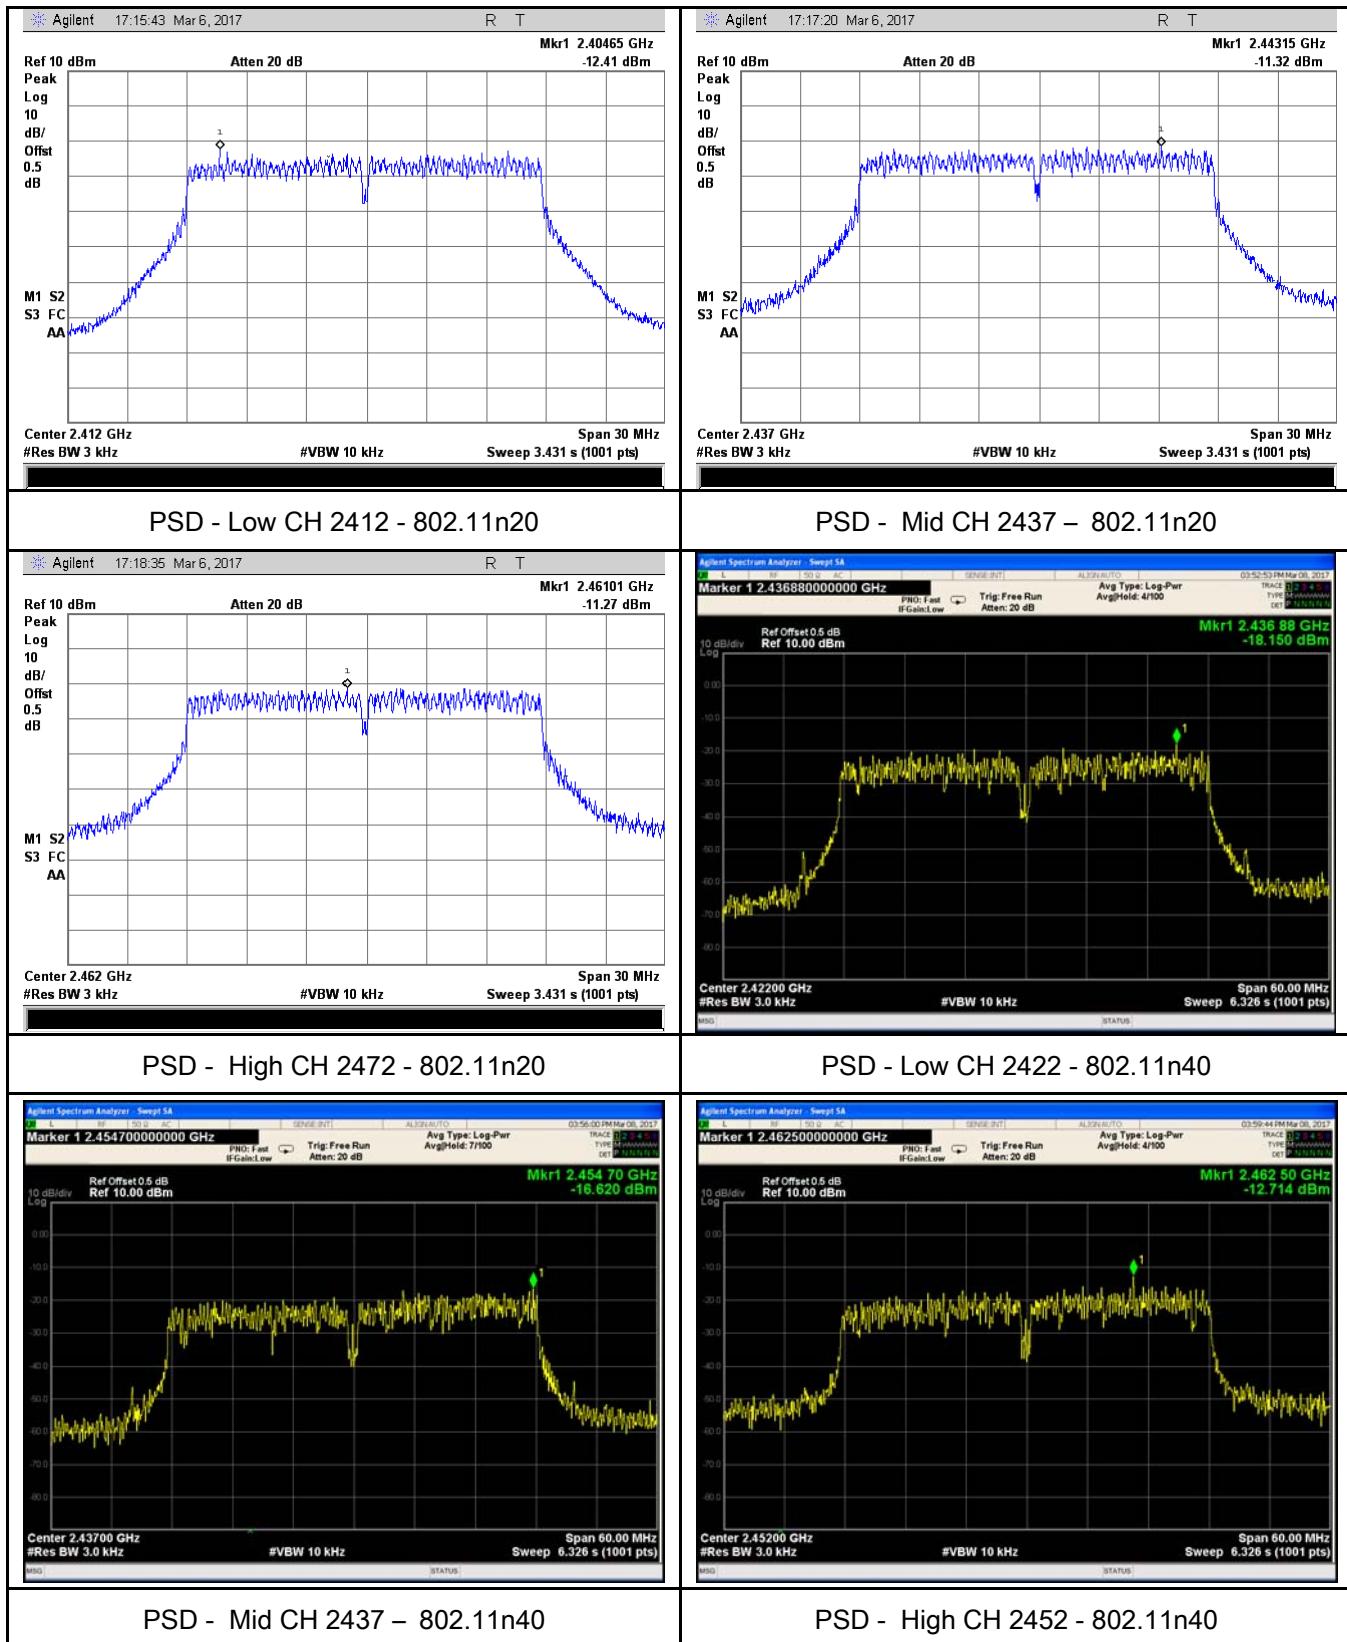

6.5 Band-Edge & Unwanted Emissions into Restricted Frequency Bands

Temperature	25 °C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	March 08, 2017
Tested By :	Loren Luo

Requirement(s):

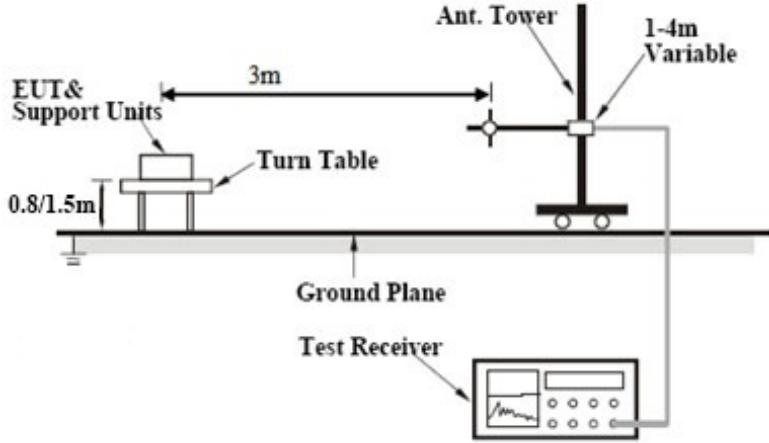Spec	Item	Requirement	Applicable
§15.247(d)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.	<input checked="" type="checkbox"/>
Test Setup	 <p>The diagram illustrates a test setup for radiated emissions. A 'Turn Table' is positioned on a 'Ground Plane'. An 'EUT & Support Units' is placed on the turn table. A vertical 'Ant. Tower' is mounted on the turn table, with a '1-4m Variable' height adjustment mechanism. A 'Test Receiver' is connected to the tower, likely via a coaxial cable, to measure the signal. The distance between the EUT and the turn table is marked as 3m. The height of the EUT is indicated as 0.8/1.5m.</p>		
Test Procedure	<p>Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range. 		


	<ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail



Test Data Yes N/A



Test Plot Yes (See below) N/A




Test Plots

Band Edge measurement result

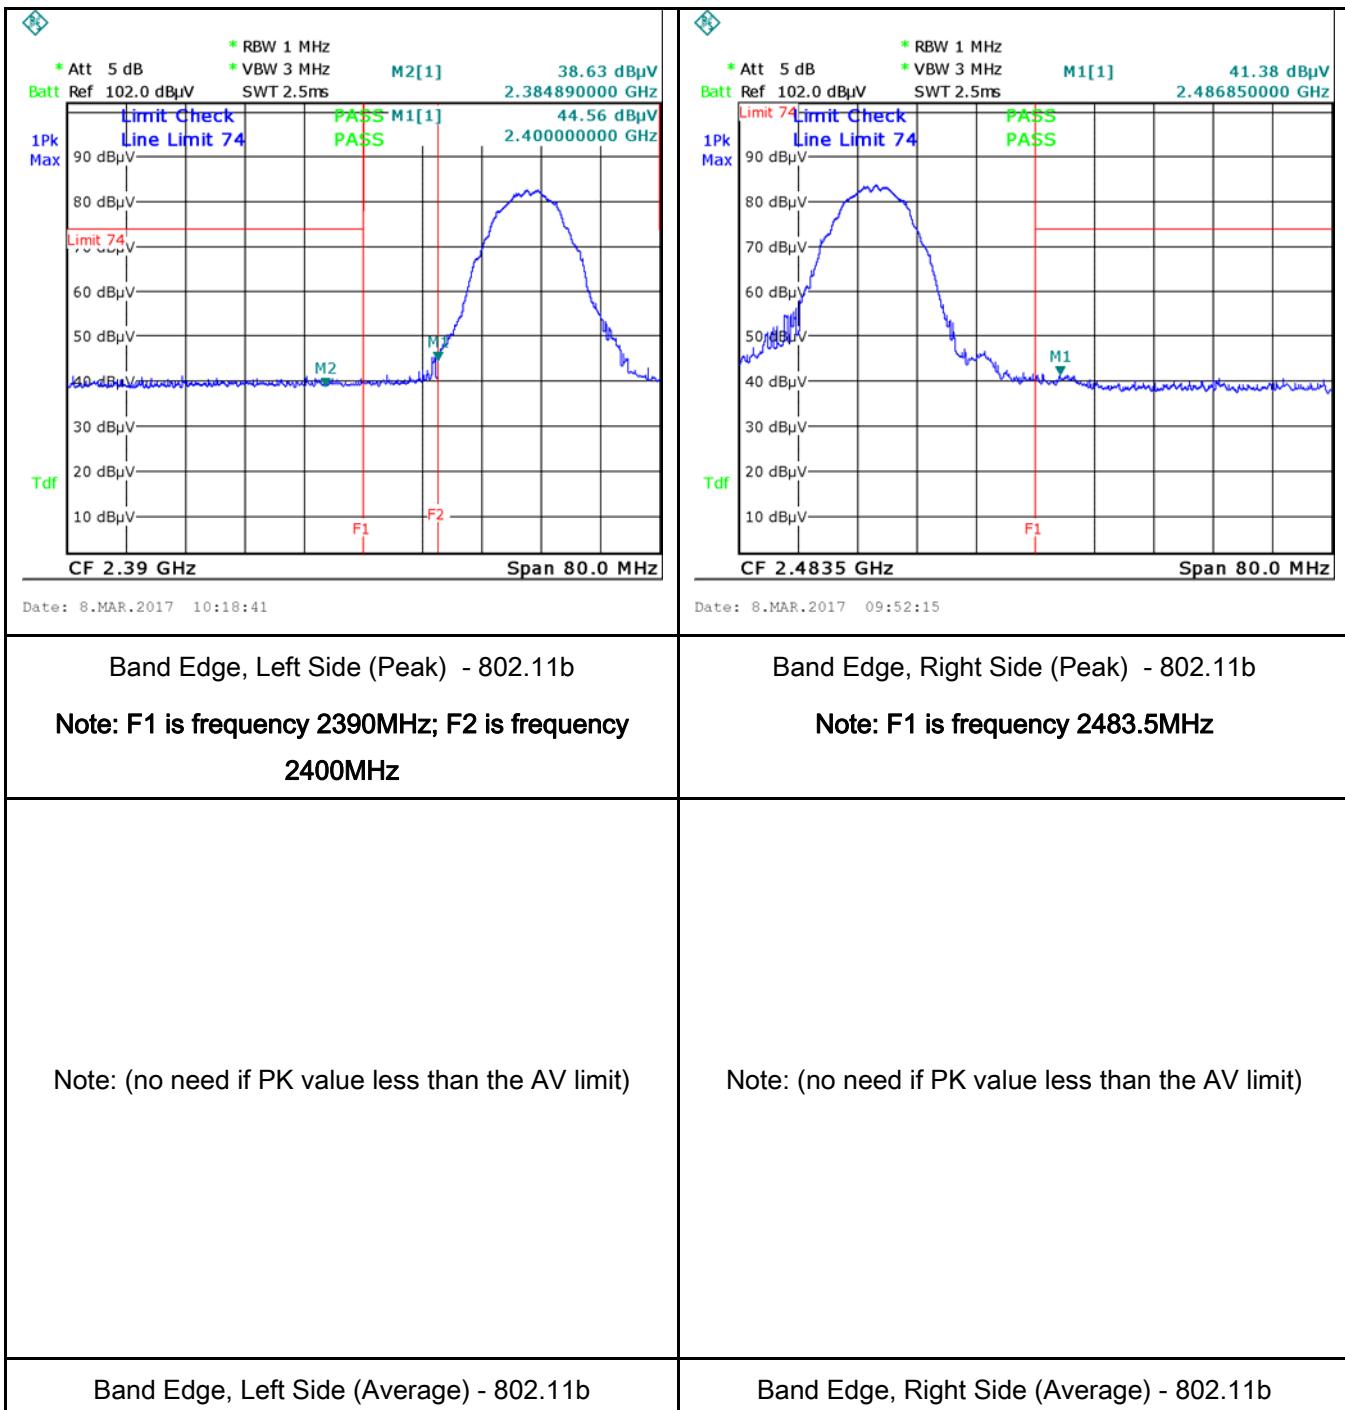

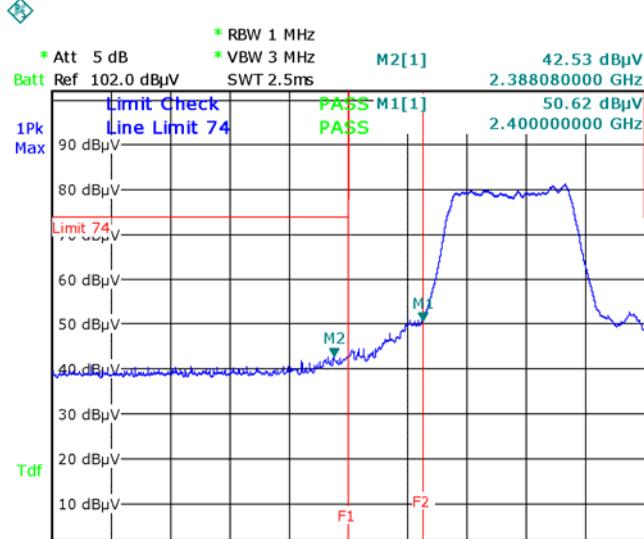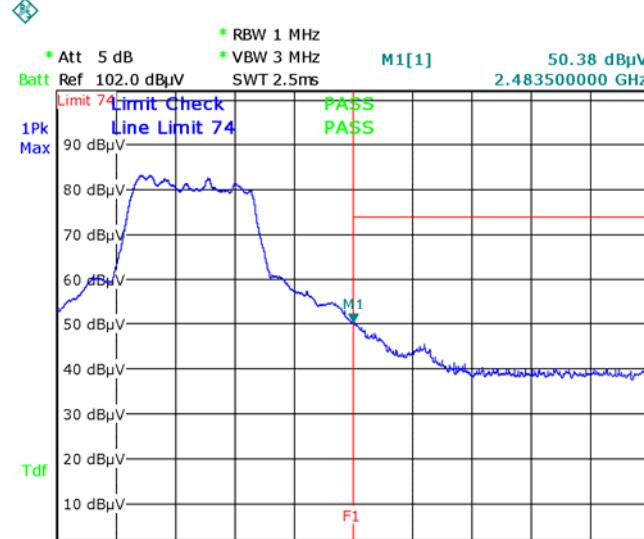 <p>M2[1] * Att 5 dB * RBW 1 MHz Batt Ref 102.0 dBµV * VBW 3 MHz SWT 2.5ms</p> <p>1Pk Max: 90 dBµV Tdf: 10 dBµV</p> <p>Limit Check: Line Limit 74 M2: 42.53 dBµV M1: 50.62 dBµV F1: 2.390 GHz F2: 2.400 GHz</p> <p>Span: 80.0 MHz</p> <p>Date: 8.MAR.2017 10:21:33</p>	 <p>M1[1] * Att 5 dB * RBW 1 MHz Batt Ref 102.0 dBµV * VBW 3 MHz SWT 2.5ms</p> <p>1Pk Max: 90 dBµV Tdf: 10 dBµV</p> <p>Limit 74: 74 dBµV Limit Check: Line Limit 74 M1: 50.38 dBµV M2: 42.53 dBµV F1: 2.4835 GHz</p> <p>Span: 80.0 MHz</p> <p>Date: 8.MAR.2017 09:58:36</p>
<p>Band Edge, Left Side (Peak) - 802.11g</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p> <p>Note: (no need if PK value less than the AV limit)</p>	<p>Band Edge, Right Side (Peak) - 802.11g</p> <p>Note: F1 is frequency 2483.5MHz</p> <p>Note: (no need if PK value less than the AV limit)</p>
<p>Band Edge, Left Side (Average) - 802.11g</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Band Edge, Right Side (Average) - 802.11g</p> <p>Note: F1 is frequency 2483.5MHz</p>

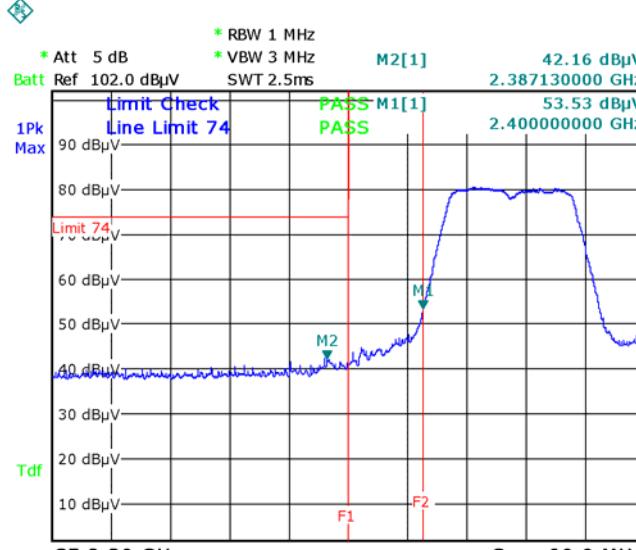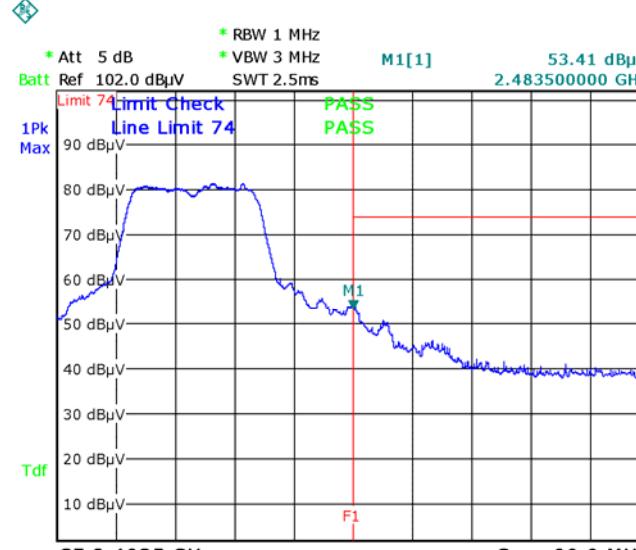 <p>Plot 1: Left Side (Peak) - 802.11n20</p> <p>Test Report No. 17070139-FCC-R3-V1</p> <p>Page 28 of 60</p> <p>Test Date: 8.MAR.2017 10:26:59</p> <p>Test Configuration:</p> <ul style="list-style-type: none"> * Att 5 dB * RBW 1 MHz * VBW 3 MHz SWT 2.5ms Batt Ref 102.0 dBμV <p>Measures:</p> <ul style="list-style-type: none"> 1Pk Max: 42.16 dBμV at 2.387130000 GHz Tdf: 53.53 dBμV at 2.400000000 GHz <p>Limit Check:</p> <ul style="list-style-type: none"> Line Limit 74: PASS 1Pk Max: PASS Tdf: PASS <p>Notes: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	 <p>Plot 2: Right Side (Peak) - 802.11n20</p> <p>Test Report No. 17070139-FCC-R3-V1</p> <p>Page 28 of 60</p> <p>Test Date: 8.MAR.2017 10:05:20</p> <p>Test Configuration:</p> <ul style="list-style-type: none"> * Att 5 dB * RBW 1 MHz * VBW 3 MHz SWT 2.5ms Batt Ref 102.0 dBμV <p>Measures:</p> <ul style="list-style-type: none"> 1Pk Max: 53.41 dBμV at 2.483500000 GHz Tdf: 53.53 dBμV at 2.400000000 GHz <p>Limit Check:</p> <ul style="list-style-type: none"> Line Limit 74: PASS 1Pk Max: PASS Tdf: PASS <p>Notes: F1 is frequency 2483.5MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>Plot 3: Left Side (Average) - 802.11n20</p> <p>Test Report No. 17070139-FCC-R3-V1</p> <p>Page 28 of 60</p> <p>Test Date: 8.MAR.2017 10:26:59</p> <p>Test Configuration:</p> <ul style="list-style-type: none"> * Att 5 dB * RBW 1 MHz * VBW 3 MHz SWT 2.5ms Batt Ref 102.0 dBμV <p>Measures:</p> <ul style="list-style-type: none"> 1Pk Max: 42.16 dBμV at 2.387130000 GHz Tdf: 53.53 dBμV at 2.400000000 GHz <p>Limit Check:</p> <ul style="list-style-type: none"> Line Limit 74: PASS 1Pk Max: PASS Tdf: PASS <p>Notes: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Plot 4: Right Side (Average) - 802.11n20</p> <p>Test Report No. 17070139-FCC-R3-V1</p> <p>Page 28 of 60</p> <p>Test Date: 8.MAR.2017 10:05:20</p> <p>Test Configuration:</p> <ul style="list-style-type: none"> * Att 5 dB * RBW 1 MHz * VBW 3 MHz SWT 2.5ms Batt Ref 102.0 dBμV <p>Measures:</p> <ul style="list-style-type: none"> 1Pk Max: 53.41 dBμV at 2.483500000 GHz Tdf: 53.53 dBμV at 2.400000000 GHz <p>Limit Check:</p> <ul style="list-style-type: none"> Line Limit 74: PASS 1Pk Max: PASS Tdf: PASS <p>Notes: F1 is frequency 2483.5MHz</p>

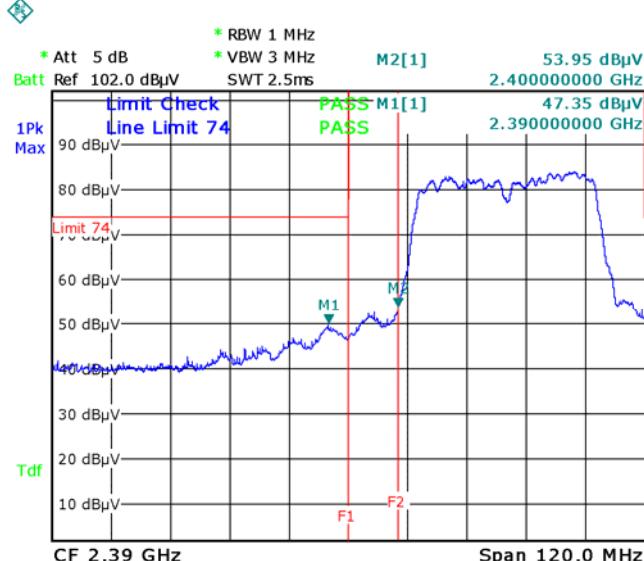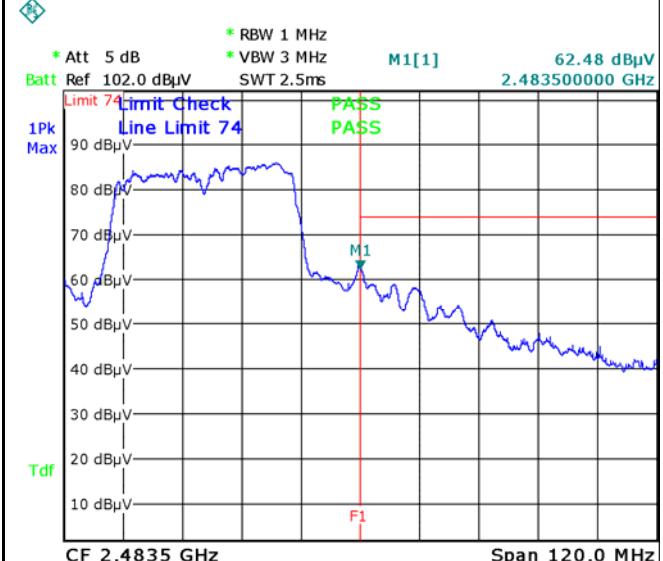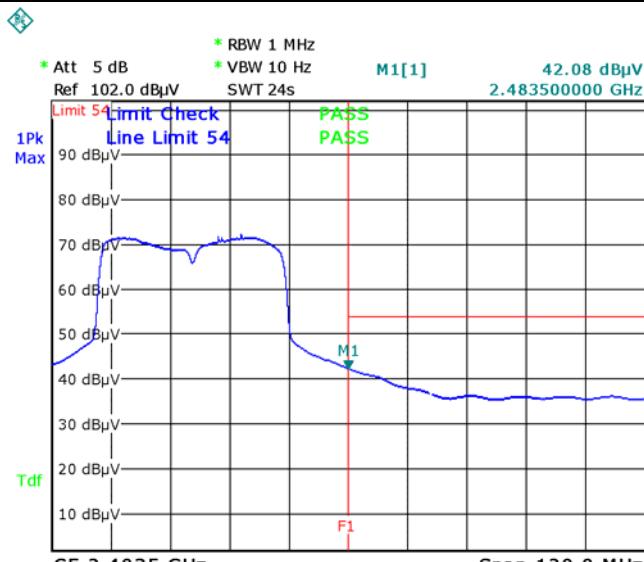	
<p>Date: 8.MAR.2017 14:26:21</p> <p>Band Edge, Left Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2390MHz; F2 is frequency 2400MHz</p>	<p>Date: 8.MAR.2017 14:31:50</p> <p>Band Edge, Right Side (Peak) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>
	
<p>Date: 8.MAR.2017 13:36:00</p> <p>Band Edge, Right Side (Average) - 802.11n40</p> <p>Note: F1 is frequency 2483.5MHz</p>	

6.6 AC Power Line Conducted Emissions

Temperature	24 °C
Relative Humidity	59%
Atmospheric Pressure	1007mbar
Test date :	March 07, 2017
Tested By :	Loren Luo

Requirement(s):


Spec	Item	Requirement	Applicable														
47CFR§15. 207, RSS210 (A8.1)	a)	<p>For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.</p> <table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency ranges (MHz)	Limit (dB μ V)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50	<input checked="" type="checkbox"/>
Frequency ranges (MHz)	Limit (dB μ V)																
	QP	Average															
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															
Test Setup		<p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>															
Procedure		<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss 															

	coaxial cable. 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Transmitting Mode

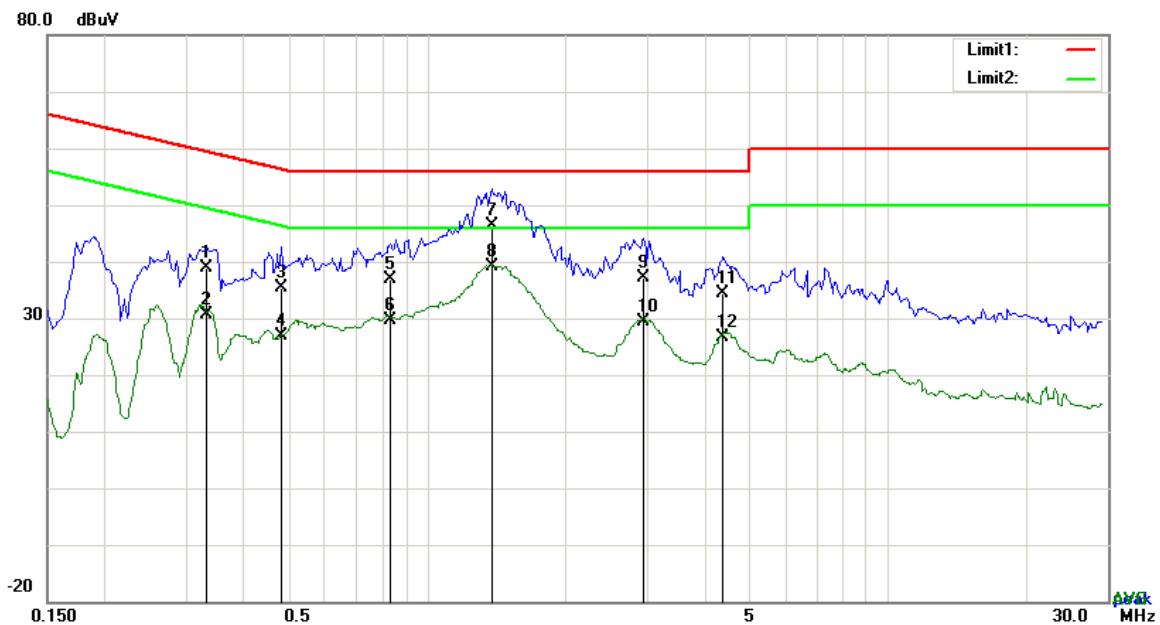


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	L1	0.3333	28.80	QP	10.03	38.83	59.37	-20.54
2	L1	0.3333	20.69	AVG	10.03	30.72	49.37	-18.65
3	L1	0.4815	25.25	QP	10.03	35.28	56.31	-21.03
4	L1	0.4815	16.96	AVG	10.03	26.99	46.31	-19.32
5	L1	0.8325	26.95	QP	10.03	36.98	56.00	-19.02
6	L1	0.8325	19.50	AVG	10.03	29.53	46.00	-16.47
7	L1	1.3824	36.38	QP	10.03	46.41	56.00	-9.59
8	L1	1.3824	28.99	AVG	10.03	39.02	46.00	-6.98
9	L1	2.9580	27.09	QP	10.05	37.14	56.00	-18.86
10	L1	2.9580	19.24	AVG	10.05	29.29	46.00	-16.71
11	L1	4.3962	24.31	QP	10.07	34.38	56.00	-21.62
12	L1	4.3962	16.67	AVG	10.07	26.74	46.00	-19.26

Test Mode: Transmitting Mode

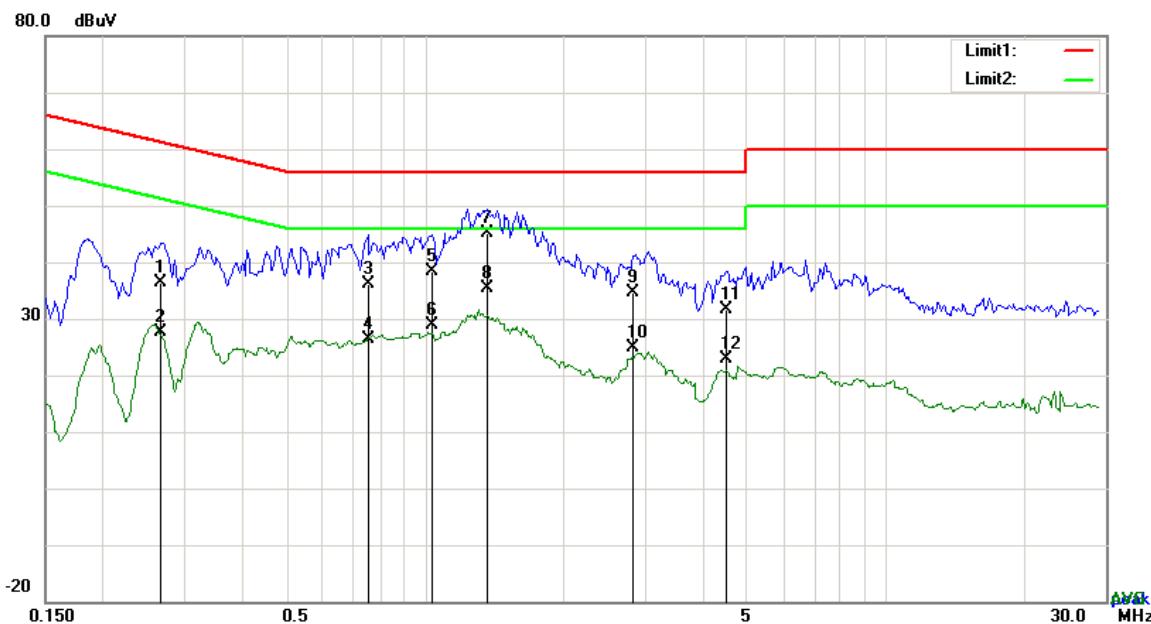


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	N	0.2670	26.24	QP	10.02	36.26	61.21	-24.95
2	N	0.2670	17.59	AVG	10.02	27.61	51.21	-23.60
3	N	0.7545	26.20	QP	10.03	36.23	56.00	-19.77
4	N	0.7545	16.29	AVG	10.03	26.32	46.00	-19.68
5	N	1.0353	28.47	QP	10.03	38.50	56.00	-17.50
6	N	1.0353	18.76	AVG	10.03	28.79	46.00	-17.21
7	N	1.3668	35.12	QP	10.03	45.15	56.00	-10.85
8	N	1.3668	25.28	AVG	10.03	35.31	46.00	-10.69
9	N	2.8254	24.46	QP	10.05	34.51	56.00	-21.49
10	N	2.8254	14.94	AVG	10.05	24.99	46.00	-21.01
11	N	4.5171	21.54	QP	10.07	31.61	56.00	-24.39
12	N	4.5171	12.81	AVG	10.07	22.88	46.00	-23.12

Test Mode: Transmitting Mode

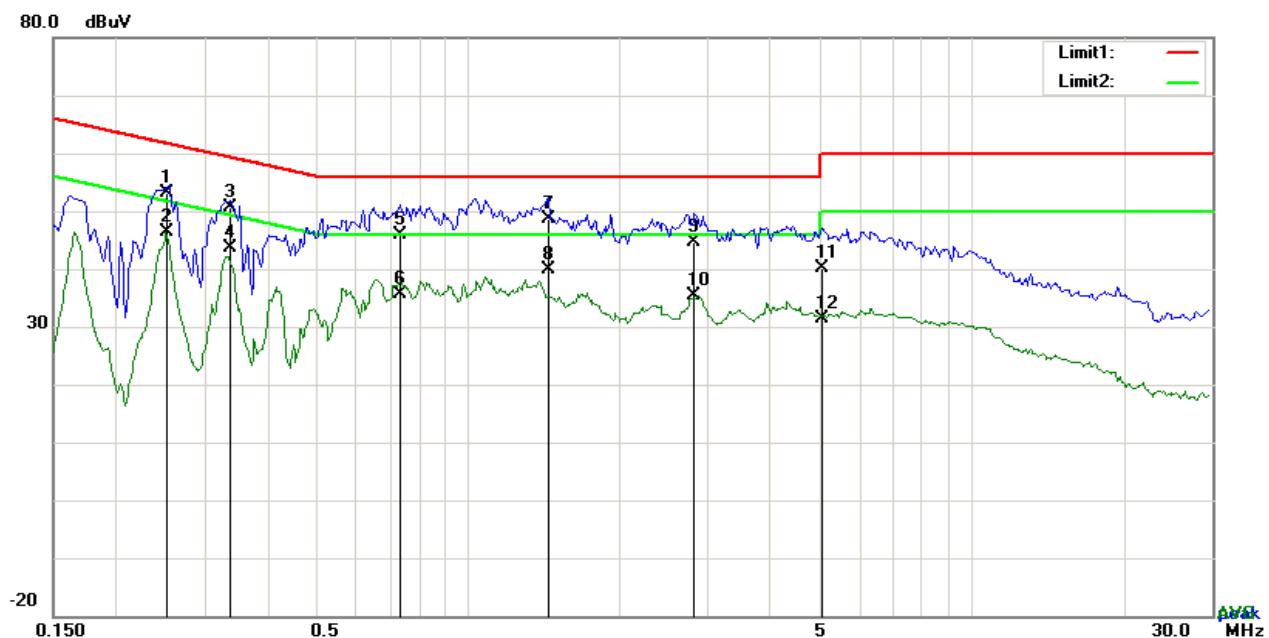


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency (MHz)	Reading (dB μ V)	Detector	Corrected (dB)	Result (dB μ V)	Limit (dB μ V)	Margin (dB)
1	L1	0.2521	43.13	QP	10.03	53.16	61.69	-8.53
2	L1	0.2521	36.29	AVG	10.03	46.32	51.69	-5.37
3	L1	0.3372	40.49	QP	10.03	50.52	59.27	-8.75
4	L1	0.3372	33.56	AVG	10.03	43.59	49.27	-5.68
5	L1	0.7350	35.86	QP	10.03	45.89	56.00	-10.11
6	L1	0.7350	25.57	AVG	10.03	35.60	46.00	-10.40
7	L1	1.4409	38.48	QP	10.04	48.52	56.00	-7.48
8	L1	1.4409	29.92	AVG	10.04	39.96	46.00	-6.04
9	L1	2.8176	34.54	QP	10.05	44.59	56.00	-11.41
10	L1	2.8176	25.40	AVG	10.05	35.45	46.00	-10.55
11	L1	5.0358	30.06	QP	10.08	40.14	60.00	-19.86
12	L1	5.0358	21.40	AVG	10.08	31.48	50.00	-18.52

Test Mode: Transmitting Mode

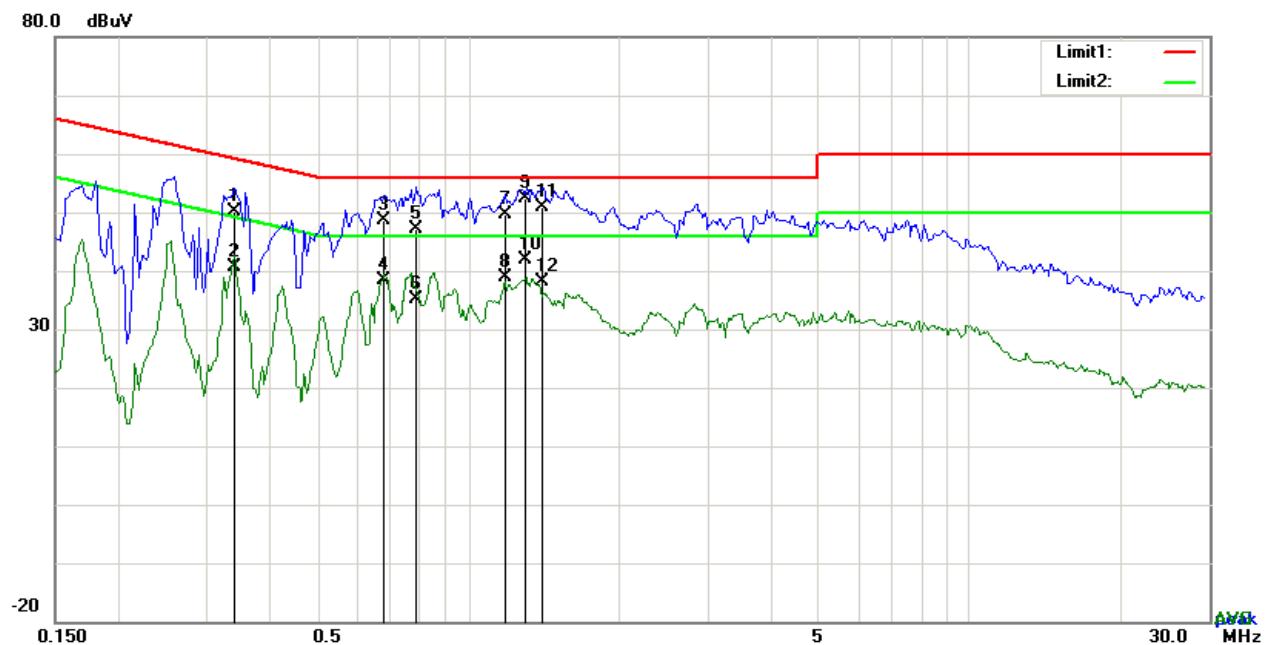

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dBµV)	Detector	Corrected (dB)	Result (dBµV)	Limit (dBµV)	Margin (dB)
1	N	0.3411	40.22	QP	10.02	50.24	59.18	-8.94
2	N	0.3411	30.53	AVG	10.02	40.55	49.18	-8.63
3	N	0.6804	38.70	QP	10.02	48.72	56.00	-7.28
4	N	0.6804	28.41	AVG	10.02	38.43	46.00	-7.57
5	N	0.7857	37.12	QP	10.03	47.15	56.00	-8.85
6	N	0.7857	24.98	AVG	10.03	35.01	46.00	-10.99
7	N	1.1874	39.58	QP	10.03	49.61	56.00	-6.39
8	N	1.1874	28.76	AVG	10.03	38.79	46.00	-7.21
9	N	1.2966	42.29	QP	10.03	52.32	56.00	-3.68
10	N	1.2966	31.75	AVG	10.03	41.78	46.00	-4.22
11	N	1.4058	40.79	QP	10.03	50.82	56.00	-5.18
12	N	1.4058	27.98	AVG	10.03	38.01	46.00	-7.99

6.7 Radiated Spurious Emissions & Restricted Band

Temperature	52%
Relative Humidity	1028mbar
Atmospheric Pressure	March 28, 2017
Test date :	52%
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable							
47CFR§15. 247(d), RSS210 (A8.5)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>							
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (μV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 – 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength (μ V/m)	30 – 88	100	88 – 216	150	216 – 960
Frequency range (MHz)	Field Strength (μ V/m)									
30 – 88	100									
88 – 216	150									
216 – 960	200									
Above 960	500									
b)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>								
c)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input checked="" type="checkbox"/>								

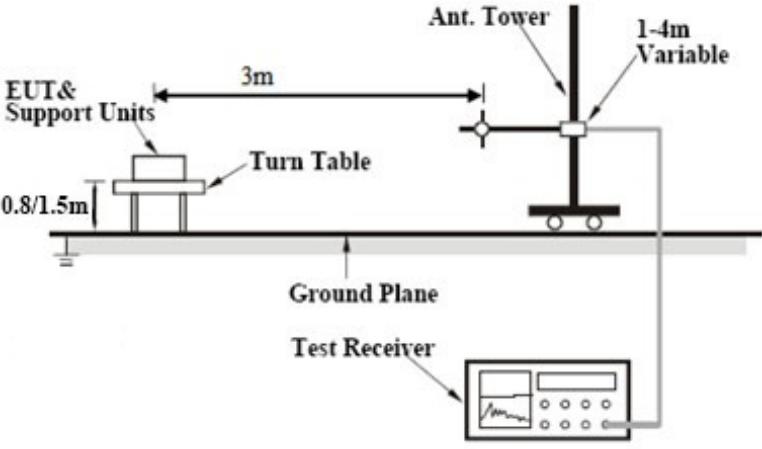
Test Setup	 <p>The diagram illustrates the test setup. An EUT & Support Units assembly is mounted on a Turn Table, which is positioned on a Ground Plane. The Turn Table is 0.8/1.5m from the ground plane. A vertical Ant. Tower is connected to the turn table via a horizontal bar. The tower has a height of 1-4m Variable. A Test Receiver is connected to the tower. A 3m horizontal line connects the EUT & Support Units to the tower.</p>
Procedure	<ol style="list-style-type: none"> 1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> a. Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. 4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. 5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.
Remark	Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n – HT20-2437MHz mode.
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode: Transmitting Mode

(Below 1GHz)

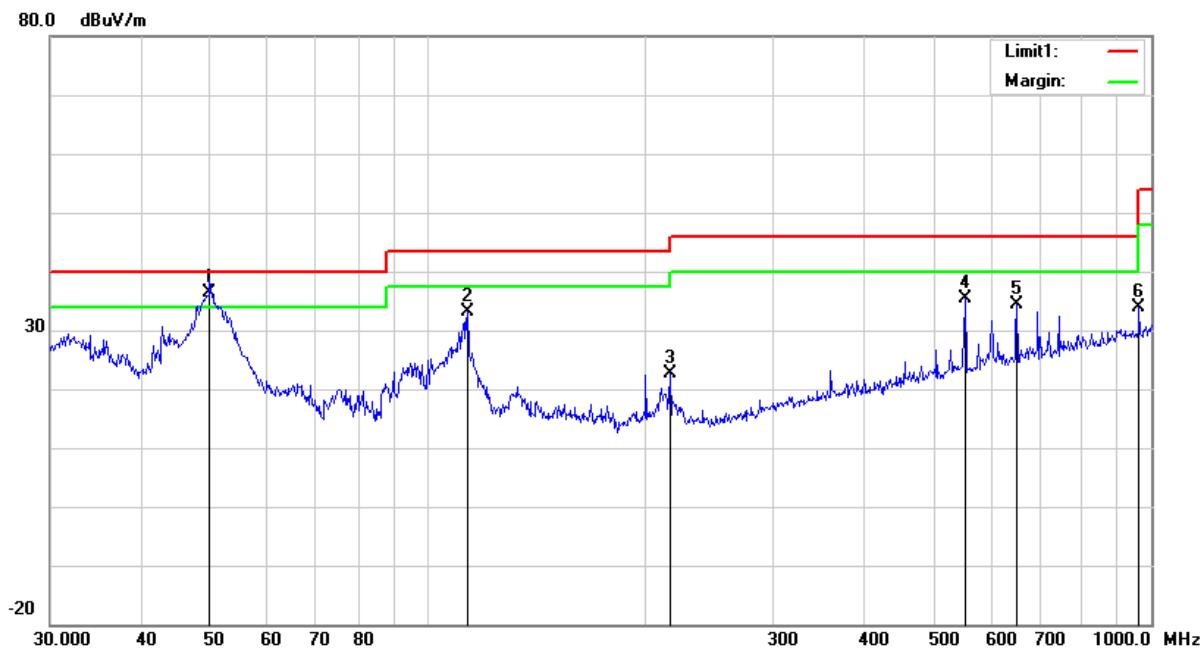

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Readi ng (dBuV /m)	Detecto r	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/ m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	V	49.8814	49.43	QP	8.45	22.38	0.80	36.30	40.00	-3.70	100	132
2	V	113.3163	41.46	peak	12.73	22.35	1.17	33.01	43.50	-10.49	100	231
3	V	216.0240	31.53	peak	11.88	22.35	1.59	22.65	46.00	-23.35	100	113
4	V	552.8833	36.14	peak	18.44	21.69	2.48	35.37	46.00	-10.63	200	68
5	V	651.9417	33.50	peak	19.67	21.47	2.63	34.33	46.00	-11.67	100	204
6	V	962.1623	28.53	peak	22.81	20.76	3.24	33.82	54.00	-20.18	100	83

(Below 1GHz)

80.0 dBuV/m


Test Data
Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Readi ng (dBuV /m)	Detector	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/ m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	H	42.8998	37.31	peak	11.99	22.29	0.77	27.78	40.00	-12.22	100	291
2	H	216.0240	43.66	peak	11.88	22.35	1.59	34.78	46.00	-11.22	100	17
3	H	360.4477	36.36	peak	14.87	22.12	2.03	31.14	46.00	-14.86	100	191
4	H	651.9417	32.96	peak	19.67	21.47	2.63	33.79	46.00	-12.21	100	90
5	H	744.8661	34.67	peak	20.74	21.27	2.84	36.98	46.00	-9.02	100	120
6	H	962.1623	34.09	peak	22.81	20.76	3.24	39.38	54.00	-14.62	100	346

Above 1GHz
Test Mode: Transmitting Mode

Low Channel (2412 MHz) (b mode worst case)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4824	39.64	AV	V	33.8	6.86	32.69	47.61	54	-6.39
4824	38.12	AV	H	33.8	6.86	32.69	46.09	54	-7.91
4824	48.96	PK	V	33.8	6.86	32.69	56.93	74	-17.07
4824	47.55	PK	H	33.8	6.86	32.69	55.52	74	-18.48
17885	24.16	AV	V	45.12	11.57	32.11	48.74	54	-5.26
17885	23.41	AV	H	45.12	11.57	32.11	47.99	54	-6.01
17885	40.39	PK	V	45.12	11.57	32.11	64.97	74	-9.03
17885	39.52	PK	H	45.12	11.57	32.11	64.1	74	-9.9

Middle Channel (2437 MHz) (b mode worst case)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4874	38.79	AV	V	33.6	6.82	32.71	46.5	54	-7.5
4874	38.54	AV	H	33.6	6.82	32.71	46.25	54	-7.75
4874	49.21	PK	V	33.6	6.82	32.71	56.92	74	-17.08
4874	48.56	PK	H	33.6	6.82	32.71	56.27	74	-17.73
17914	24.11	AV	V	45.17	11.63	32.18	48.73	54	-5.27
17914	22.97	AV	H	45.17	11.63	32.18	47.59	54	-6.41
17914	41.32	PK	V	45.17	11.63	32.18	65.94	74	-8.06
17914	40.28	PK	H	45.17	11.63	32.18	64.9	74	-9.1

High Channel (2462 MHz) (b mode worst case)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4924	38.57	AV	V	33.83	6.95	32.79	46.56	54	-7.44
4924	37.94	AV	H	33.83	6.95	32.79	45.93	54	-8.07
4924	48.56	PK	V	33.83	6.95	32.79	56.55	74	-17.45
4924	47.21	PK	H	33.83	6.95	32.79	55.2	74	-18.8
17903	23.55	AV	V	45.19	11.61	32.24	48.11	54	-5.89
17903	22.49	AV	H	45.19	11.61	32.24	47.05	54	-6.95
17903	41.25	PK	V	45.19	11.61	32.24	65.81	74	-8.19
17903	40.67	PK	H	45.19	11.61	32.24	65.23	74	-8.77

Note:

- 1, The testing has been conformed to $10 \times 2462\text{MHz} = 24,620\text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/18/2016	11/17/2017	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>


Annex B. EUT and Test Setup Photographs

Annex B.i. Photograph: EUT External Photo


Whole Package View



Adapter - Front View

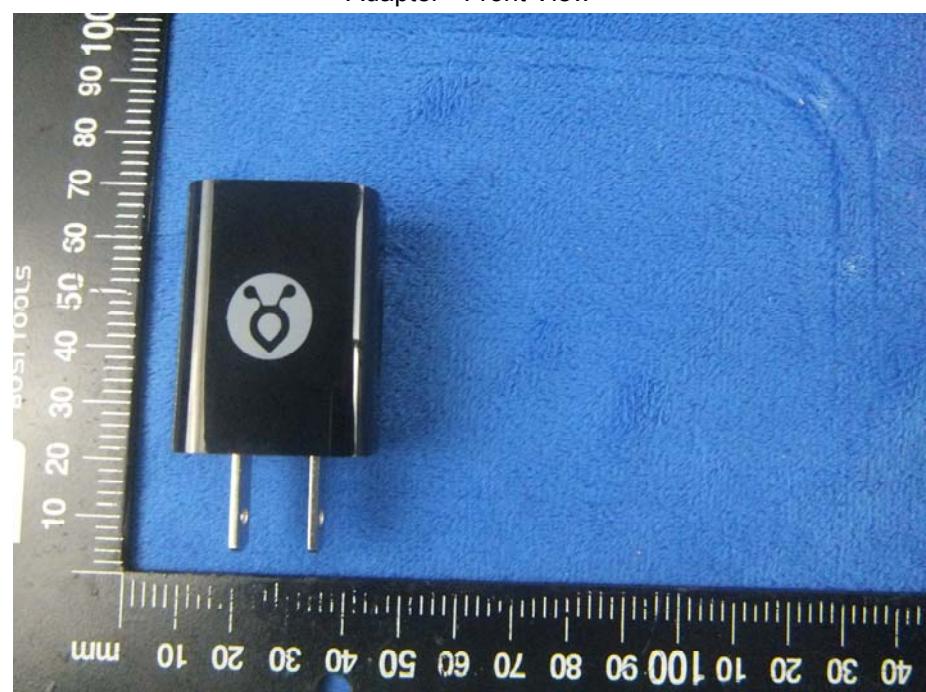

Adapter - Rear View

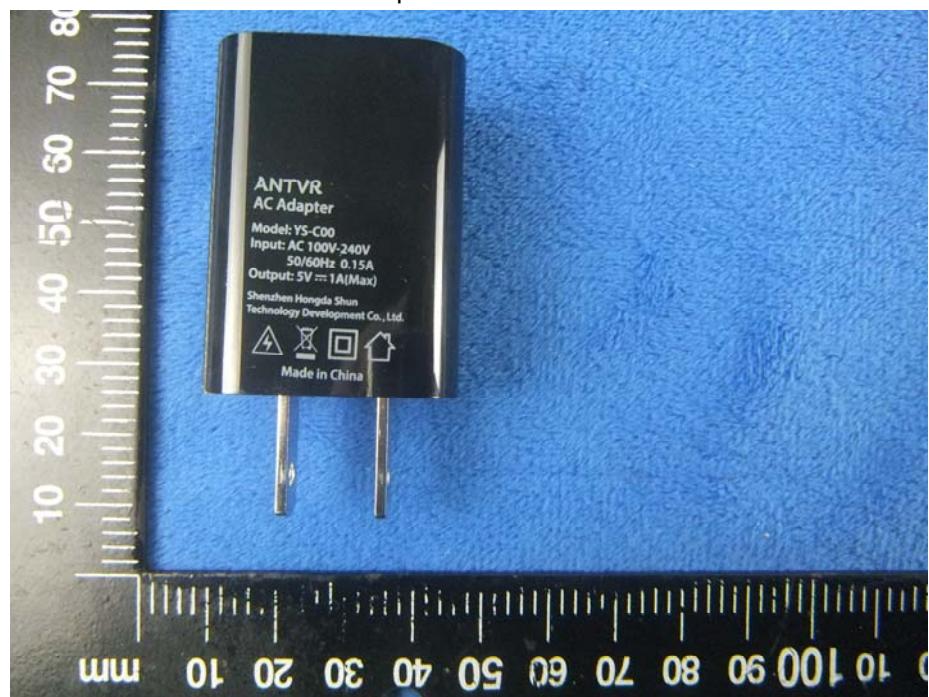

EUT - Front View



EUT - Rear View




EUT - Top View




EUT - Bottom View



EUT - Left View

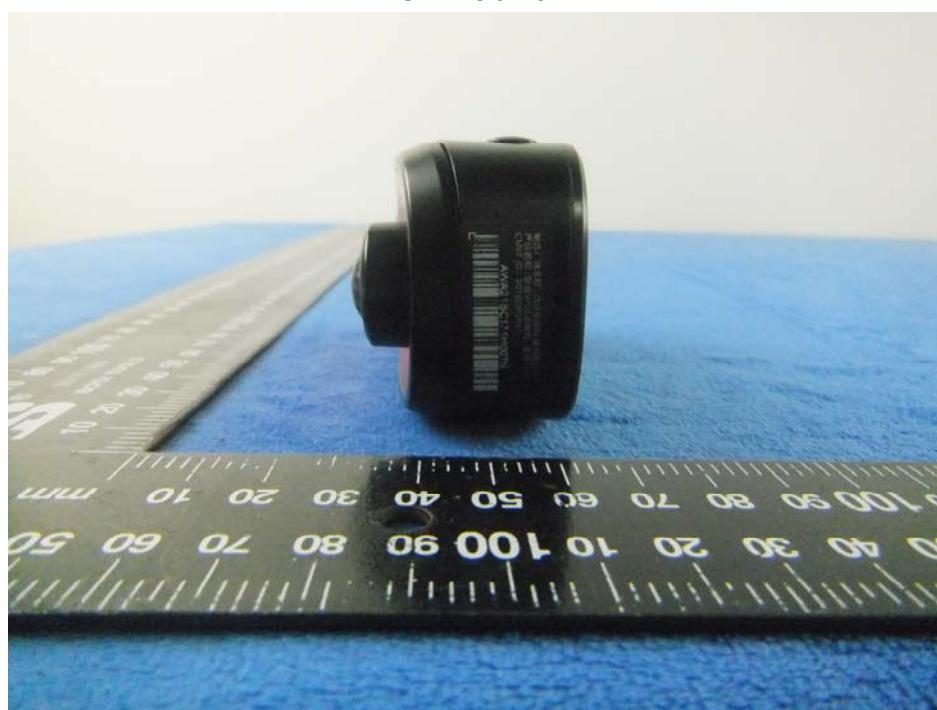


EUT - Right View

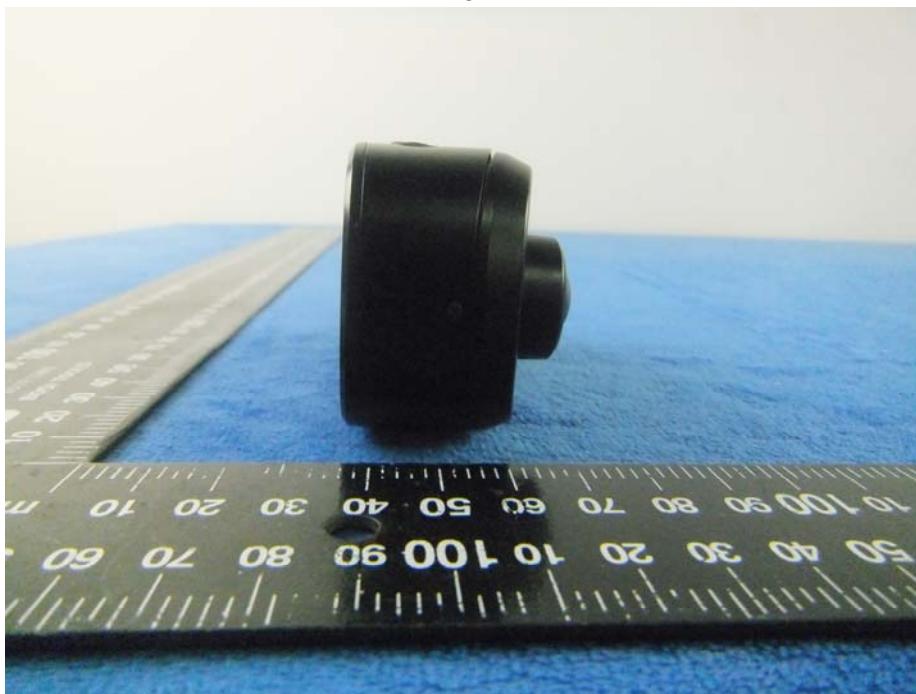

Annex B.ii. Photograph: EUT Internal Photo


Cover Off - Top View 1

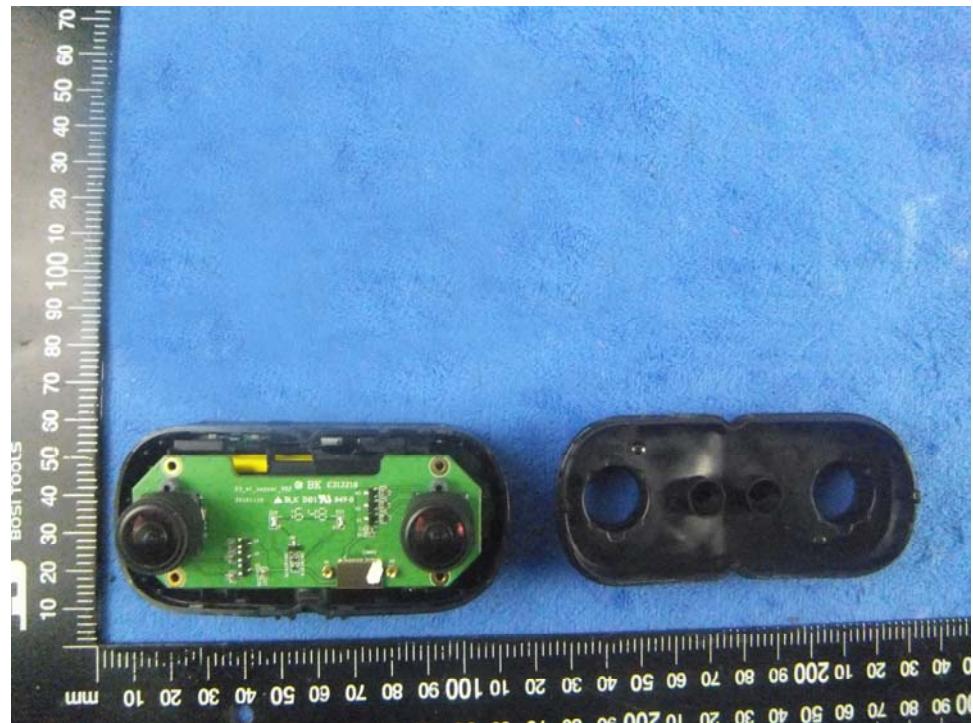


Cover Off - Top View 2




Battery - Front View

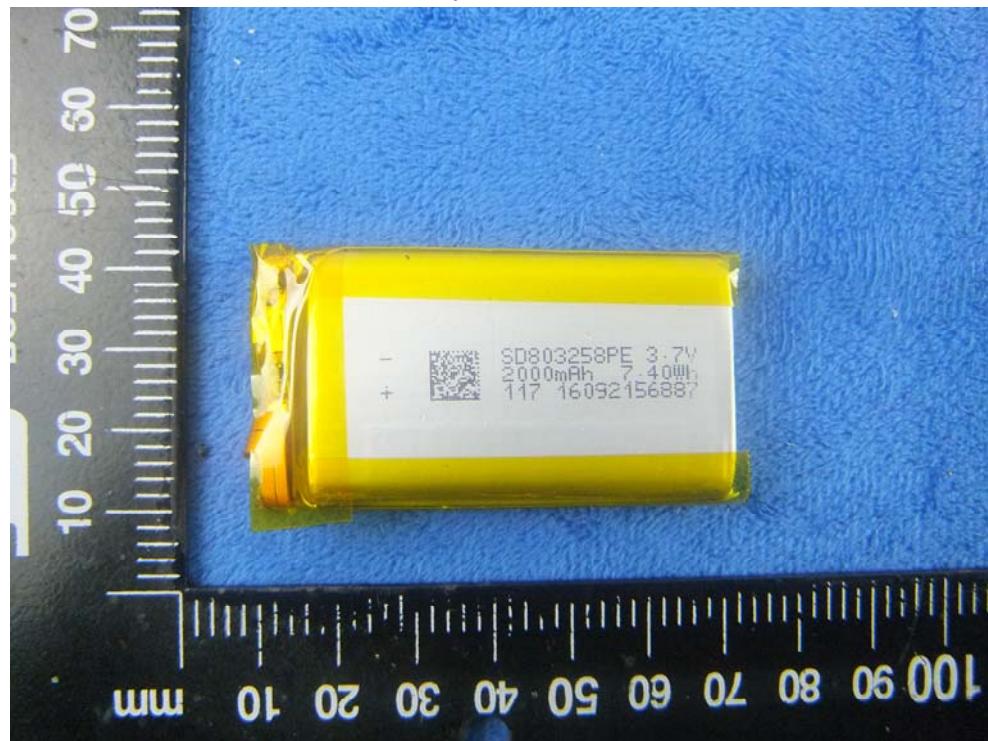


Battery - Rear View

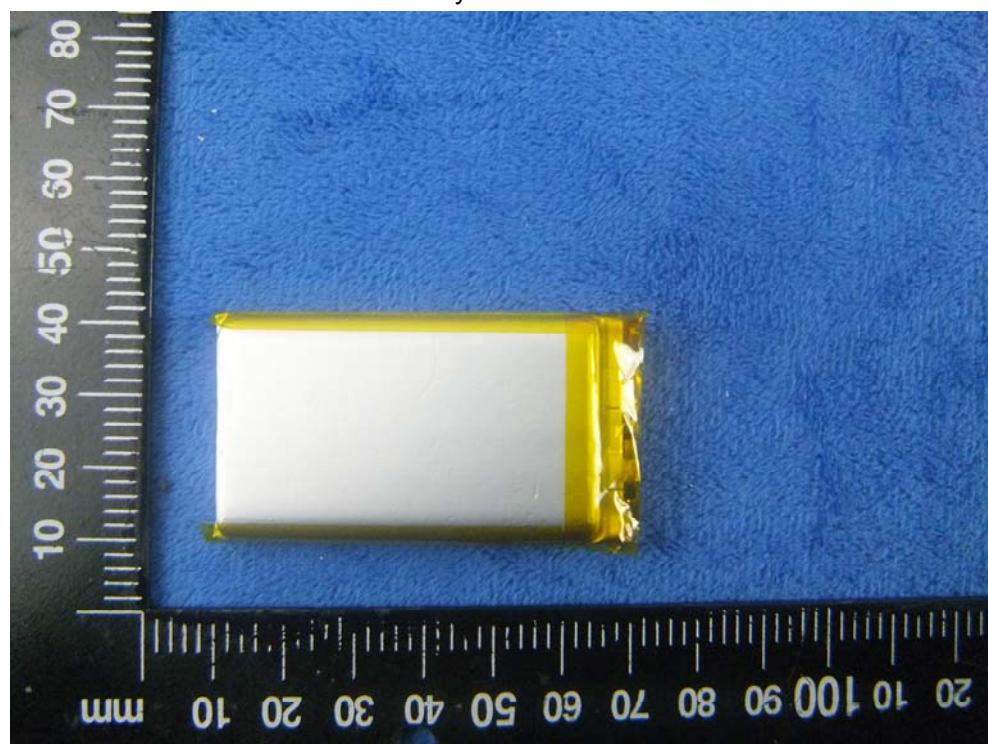


Mainboard - Front View 1

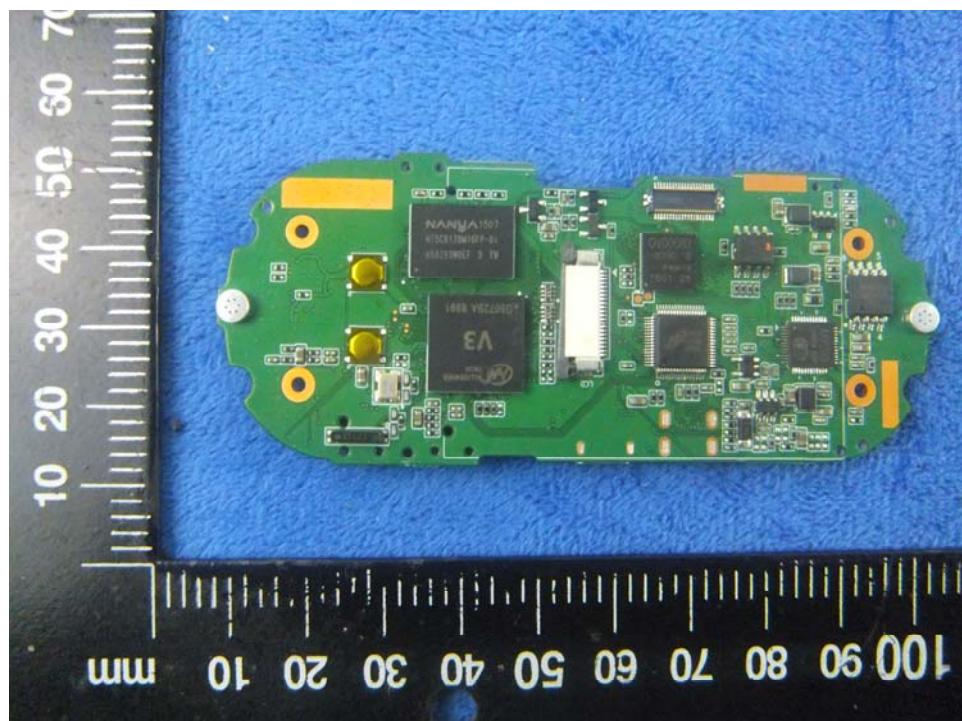


Mainboard - Rear View 1

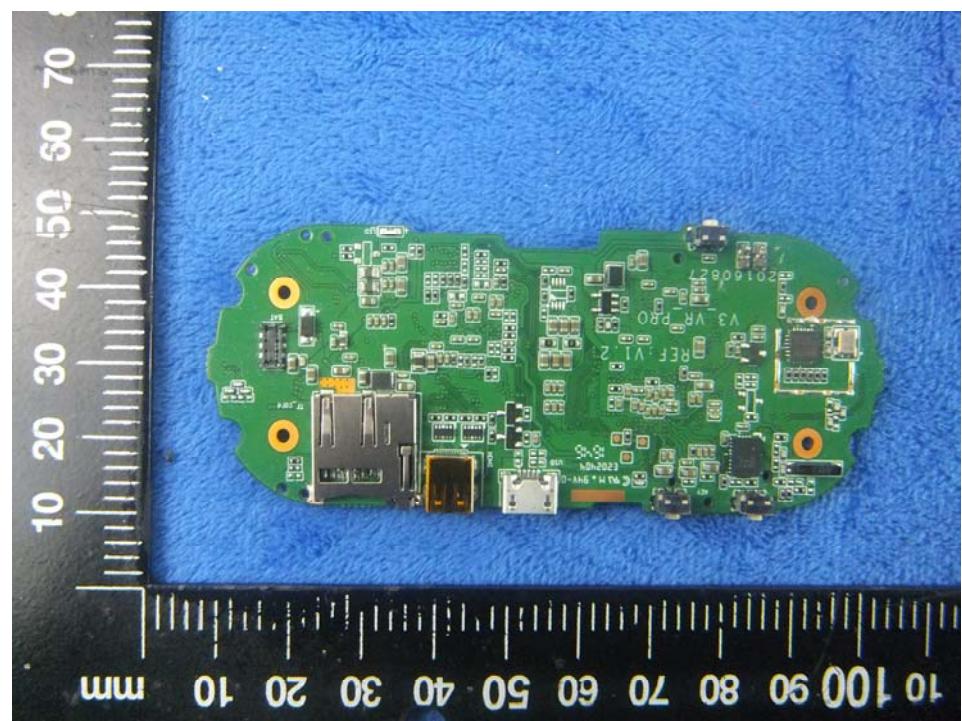


Mainboard – Front View 2

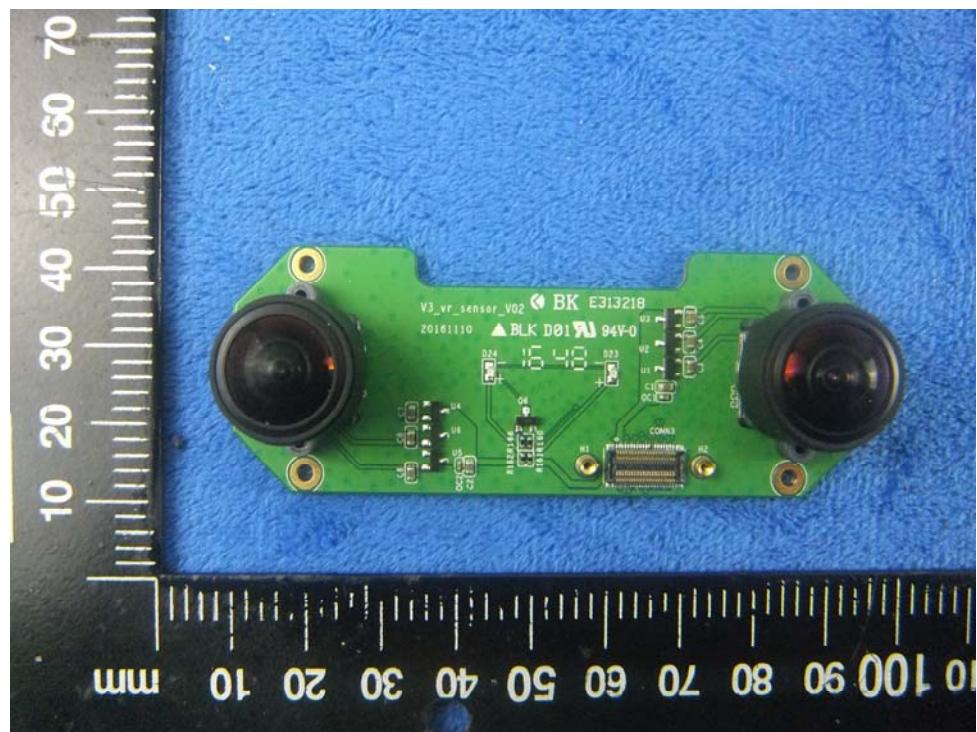


Mainboard - Rear View 2

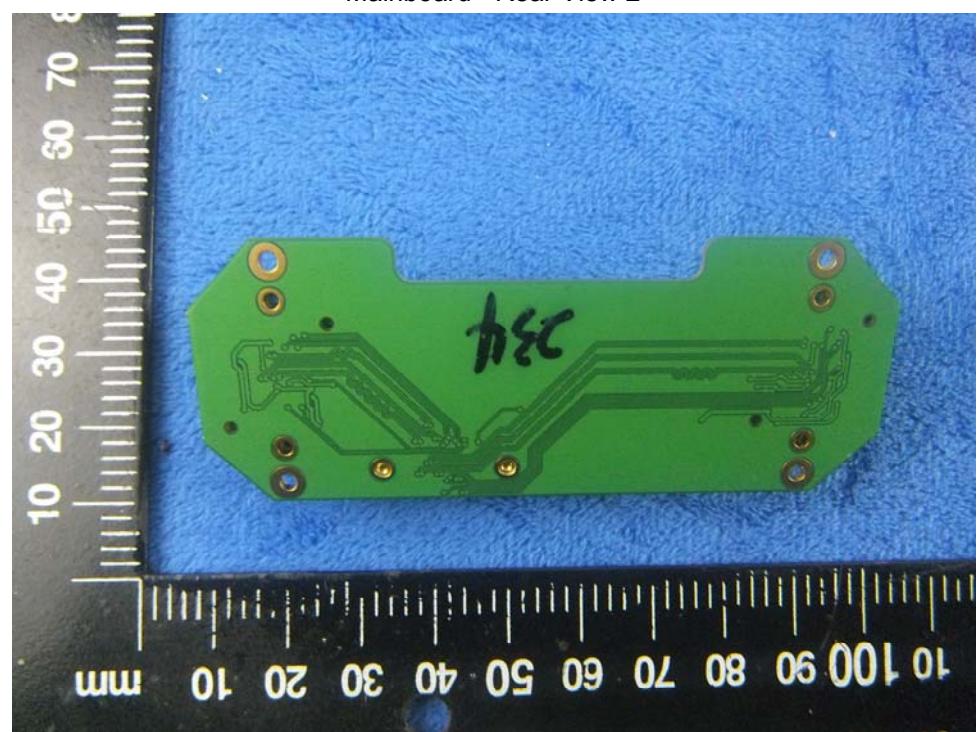

LCD – Front View

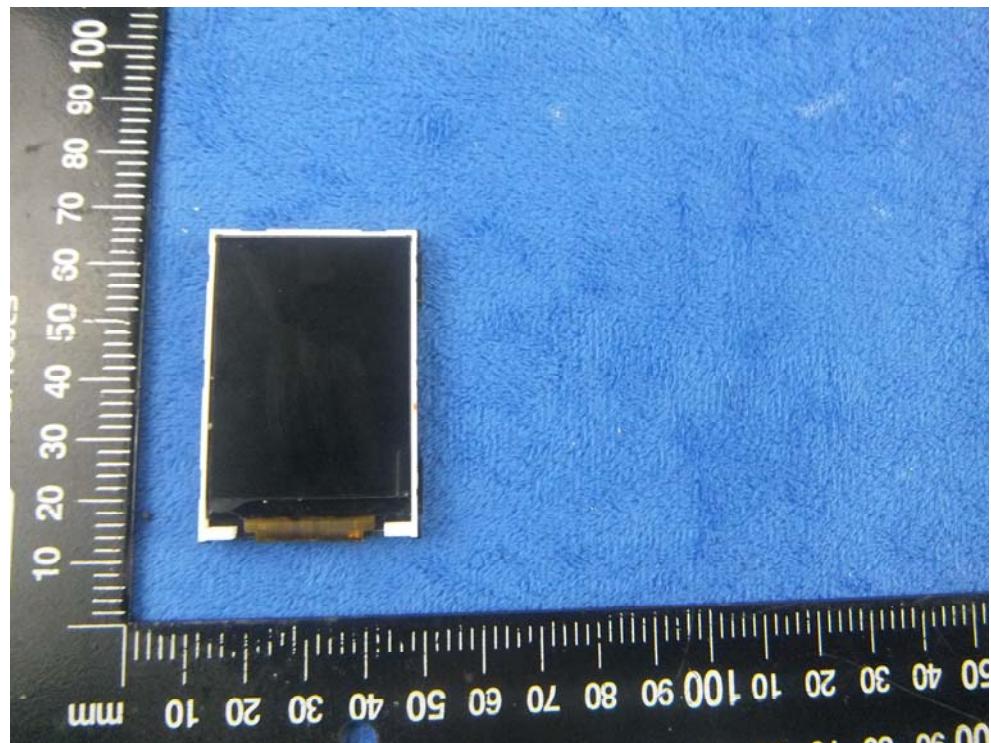


LCD – Rear View

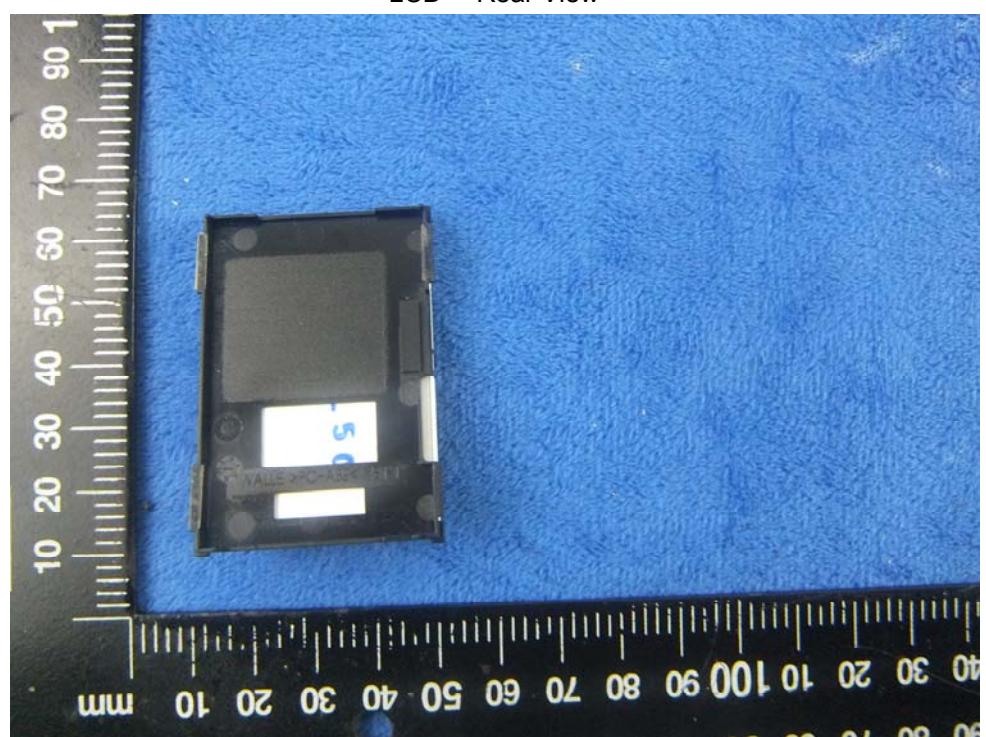

WIFI - Antenna View




Annex B.iii. Photograph: Test Setup Photo

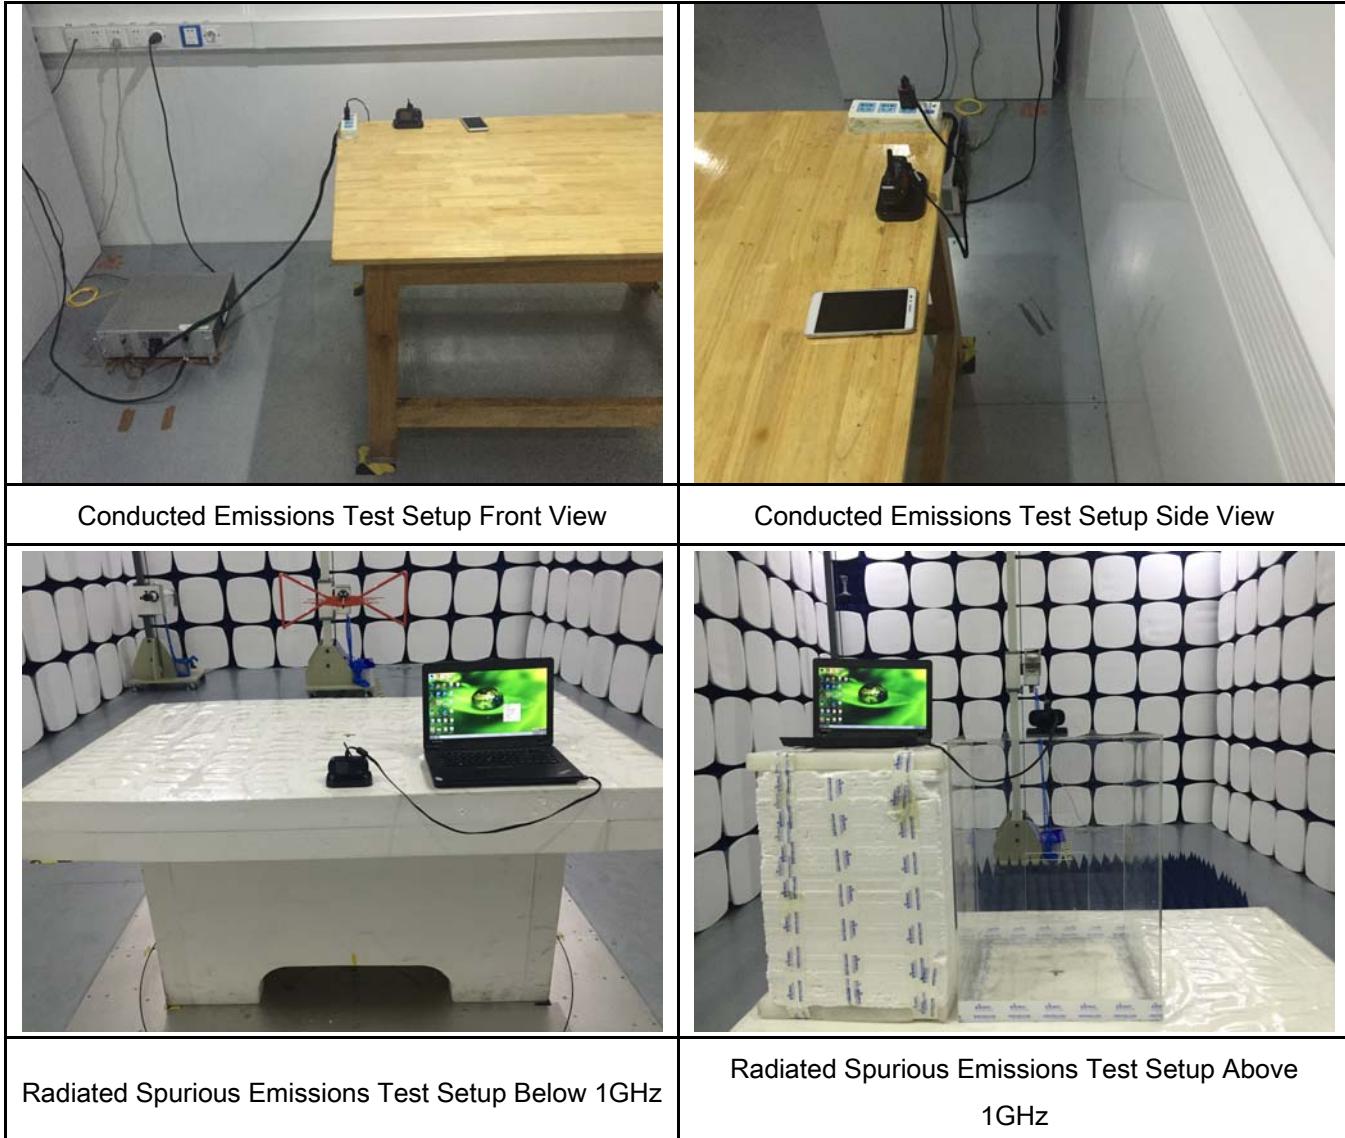


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

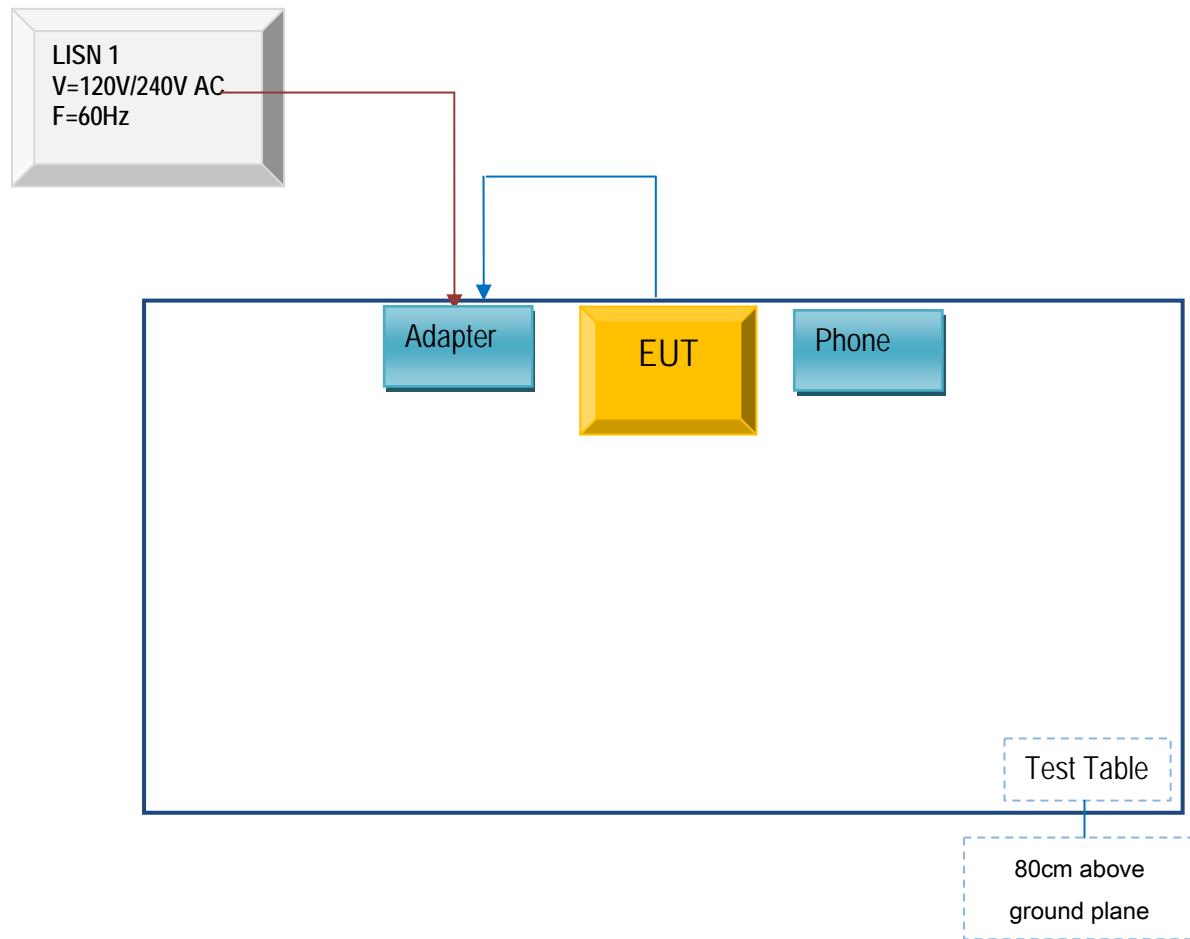

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

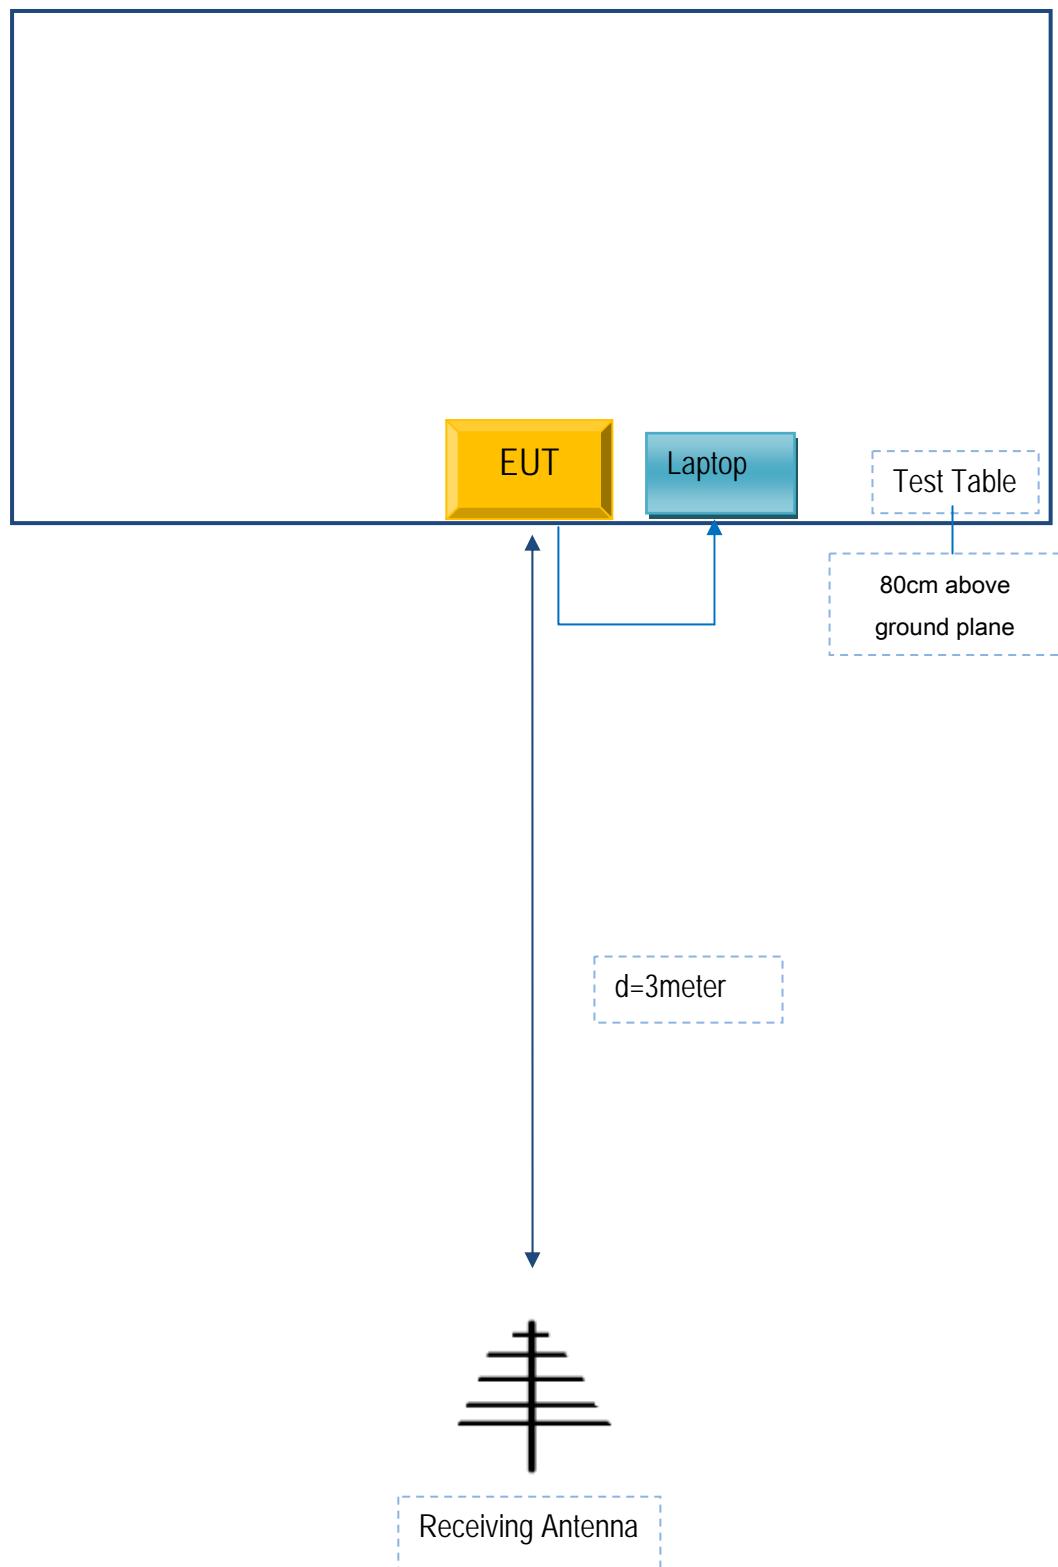

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

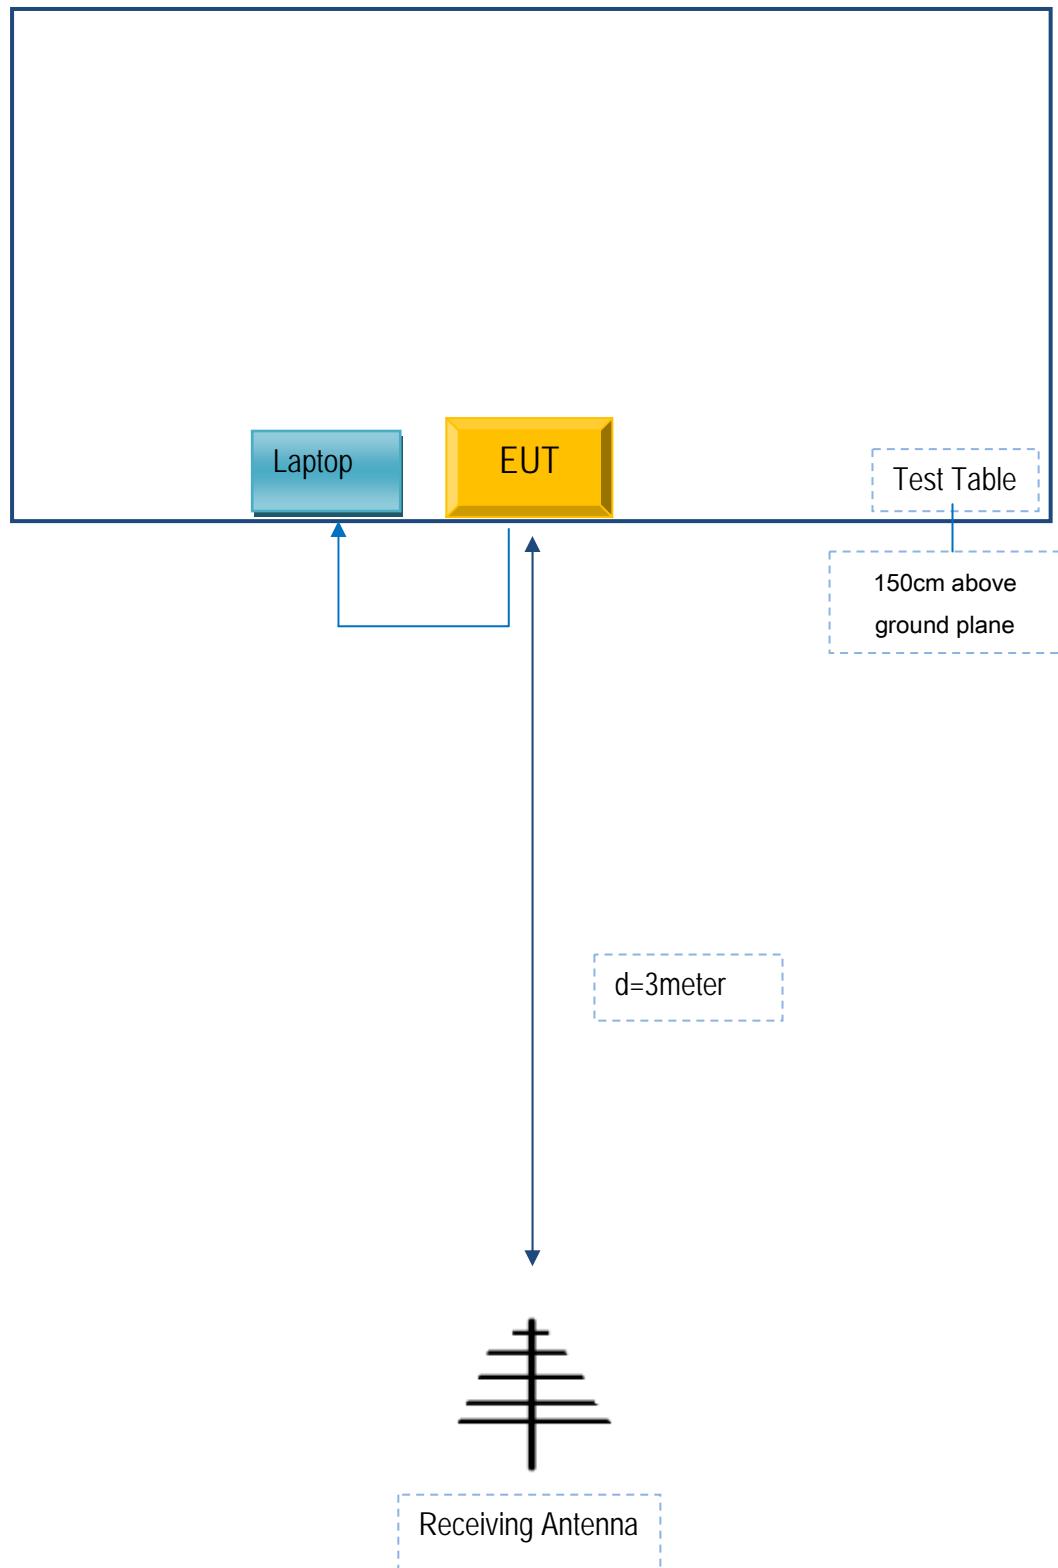

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
Beijing ANTVR Technology Co., LTD	Laptop	C21	A03358
Beijing ANTVR Technology Co., LTD	phone	N9200	AD4500

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	A03358

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Annex E. DECLARATION OF SIMILARITY

N/A