

FCC PART 15 B TEST REPORT

For

SHEN ZHEN HENG FENG DAS CO., LIMITED

16 Floor, Room, 16H Block A modern of windows Building Futian District, Shenzhen, Guangdong province, China

FCC ID: 2ALEIQ10

Report Type:		Product Name:	7	
Original Report	A	mobile phone		
	The state of the s		Lorin Dian	
Test Engineer:	Lorin Biar	1		
Report Number:	RDG170306005B			
Report Date:	2017-03-2	27		
	Henry Dir	ng	Jemy Ding	
Reviewed By:	EMC Lea	der	0 0	
	Bay Area	Compliance Laborator	ies Corp. (Chengdu)	
Test Laboratory:	No.5040,	Huilongwan Plaza,	No.1, Shawan Road,	
	Jinniu Dis	strict, Chengdu, Sichua	ın, China	
	Tel: 028-6	55523123, Fax: 028-65	5525125	
	www.bacl	corp.com		

Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
Test Methodology	
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	
EQUIPMENT MODIFICATIONS	5
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	5
SUPPORT CABLE LIST AND DETAILS	5
CONFIGURATION OF TEST SETUP	
SUMMARY OF TEST RESULTS	7
FCC§15.107 - CONDUCTED EMISSIONS	8
MEASUREMENT UNCERTAINTY	8
EUT SETUP	
EMI TEST RECEIVER SETUP	
TEST EQUIPMENT LIST AND DETAILS	9
Test Procedure	9
CORRECTED AMPLITUDE & MARGIN CALCULATION	9
TEST DATA	10
FCC §15.109 - RADIATED SPURIOUS EMISSIONS	13
MEASUREMENT UNCERTAINTY	
EUT SETUP	
EMI TEST RECEIVER SETUP	
Test Procedure	
TEST EQUIPMENT LIST AND DETAILS	
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST DATA	15

GENERAL INFORMATION

Product Description for Equipment Under Test (EUT)

The **SHEN ZHEN HENG FENG DAS CO., LIMITED**'s product, model number: **Q10 (FCC ID: 2ALEIQ10)** (the "EUT") in this report was a **mobile phone**, which was measured approximately: 18 cm (L) × 5 cm (W) × 1.6 cm (H), rated input voltage: DC3.7V battery or DC5V from adapter.

Adapter information: MODEL: K-T100502000U

INPUT: AC100-240V 50/60Hz 0.35A Max

OUTPU: DC5V 2000mA

Note: The series product, model Q10, Q22, 303 are electrically identical, the difference them is the model name and color, we selected Q10 for fully testing, the details was explained in the attached declaration letter.

*All measurement and test data in this report was gathered from final production sample, serial number: 170306005 (assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2017-03-06, and EUT conformed to test requirement.

Objective

This test report is prepared on behalf of **SHEN ZHEN HENG FENG DAS CO., LIMITED** in accordance with Part 2, Subpart J, and Part 15-Subparts A and B of the Federal Communications Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15 B Class B

Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: 2ALEIQ10. FCC Part 22H, 24E PCE submissions with FCC ID: 2ALEIQ10.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The uncertainty of conducted disturbance at mains port is ±3.17 dB, the uncertainty of any radiation on emissions measurement is:

30M~200MHz: ±4.7 dB; 200M~1GHz: ±6.0 dB; 1G~6GHz: ±5.13dB; 6G~25GHz: ±5.47dB;

And the uncertainty will not be taken into consideration for all test data recorded in the report.

Report No.: RDG170306005B Page 3 of 17

Test Facility

The test site used by BACL to collect test data is located in the No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 24, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Report No.: RDG170306005B Page 4 of 17

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

The software "winthrax.exe" was used during test.

Equipment Modifications

No modification was made to the EUT tested.

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
IBM	PC	8176	99Y7315
DELL	Display	E157FPC	060229-11
ANTER	Modem	EGW802	0508350054-1B
Lenovo	Keyboard	KB-US19EB	IMHYX011071016460
Lenovo	Mouse	MO-5013U	IMJS011041409259

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	
Serial Cable	yes	No	1.6	Serial Port of PC	Modem
Mouse Cable	yes	No	1.4	USB Port of PC	Mouse
Keyboard Cable	yes	No	1.3	USB Port of PC	Keyboard
USB Cable	yes	yes	8.0	USB Port of PC	EUT
VGA Cable	Yes	Yes	1.8	VGA Port of PC	Display
Earphone Cable	No	No	1.15	Audio Port of EUT	Earphone

Report No.: RDG170306005B Page 5 of 17

Configuration of Test Setup

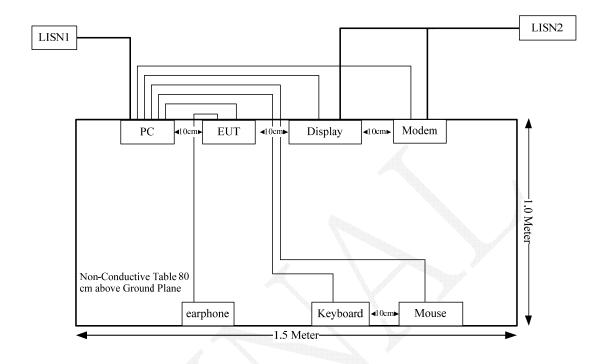

Report No.: RDG170306005B Page 6 of 17

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Results		
§15.107	Conducted Emissions	Compliance	
§15.109	Radiated Emissions	Compliance	

Report No.: RDG170306005B Page 7 of 17

FCC§15.107 - CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are Receiver, cable loss, and LISN.

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 1, then:

- -compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- -non compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 1, then:


- -compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} U_{cispr})$, exceeds the disturbance limit;
- -non compliance is deemed to occur if any measured disturbance level, increased by (U_{lab} U_{cispr}), exceeds the disturbance limit.

Based on CISPR 16-4-2:2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Chengdu) is ±3.17 dB (150 kHz to 30 MHz).

Table 1 – Values of U_{cispr}

Measurement	U_{cispr}
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

EUT Setup

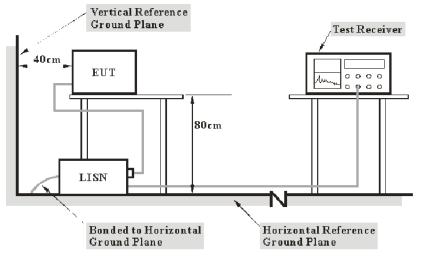

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

Report No.: RDG170306005B Page 8 of 17

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The monitor was connected to a 120V/60Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W	
150 kHz – 30 MHz	9 kHz	

Test Equipment List and Details

		day A	W. ASP	All the second s	
Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS 30	836858/0016	2016-12-02	2017-12-01
Rohde & Schwarz	L.I.S.N.	ENV216	3560.6550.06	2016-12-02	2017-12-01
Rohde & Schwarz	PULSE LIMITER	ESH3Z2	357.8810.52	2016-10-31	2017-10-30
N/A	Conducted Cable	NO.5	N/A	2016-11-10	2017-11-09
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

^{*} **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the monitor was connected to the outlet of the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Report No.: RDG170306005B Page 9 of 17

Bay Area Compliance Laboratories Corp. (Chengdu)

Herein,

V_C: corrected voltage amplitude

V_R: reading voltage amplitude

A_c: attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The "Margin" column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Data

Environmental Conditions


Temperature:	19 °C
Relative Humidity:	58 %
ATM Pressure:	95.8 kPa

The testing was performed by Lorin Bian on 2017-03-07.

Report No.: RDG170306005B Page 10 of 17

Test Mode: Downloading

AC120V, 60Hz, Line:

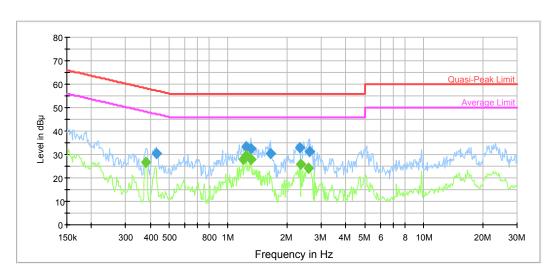


Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.429420	30.5	9.000	L1	19.7	26.8	57.3	Compliance
1.239175	33.3	9.000	L1	19.7	22.7	56.0	Compliance
1.310256	32.3	9.000	L1	19.7	23.7	56.0	Compliance
1.650866	30.2	9.000	L1	19.7	25.8	56.0	Compliance
2.325491	32.9	9.000	L1	19.7	23.1	56.0	Compliance
2.620732	31.4	9.000	L1	19.7	24.6	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.381043	26.5	9.000	L1	19.8	21.8	48.3	Compliance
1.190776	28.0	9.000	L1	19.7	18.0	46.0	Compliance
1.239175	29.7	9.000	L1	19.7	16.3	46.0	Compliance
1.310256	28.0	9.000	L1	19.7	18.0	46.0	Compliance
2.362847	25.7	9.000	L1	19.7	20.3	46.0	Compliance
2.579298	24.4	9.000	L1	19.7	21.6	46.0	Compliance

Report No.: RDG170306005B Page 11 of 17

AC120V, 60Hz, Neutral:

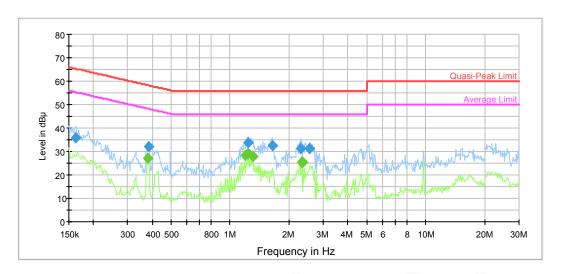

			1000	* SEC SE		***************************************	
Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.162441	35.7	9.000	N	19.7	29.6	65.3	Compliance
0.384091	32.2	9.000	N	19.6	26.0	58.2	Compliance
1.239175	33.8	9.000	N	19.6	22.2	56.0	Compliance
1.650866	32.4	9.000	N	19.7	23.6	56.0	Compliance
2.307034	31.2	9.000	N	19.7	24.8	56.0	Compliance
2.558827	31.2	9.000	N	19.7	24.8	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.381043	27.2	9.000	N	19.6	21.1	48.3	Compliance
1.190776	28.2	9.000	N	19.6	17.8	46.0	Compliance
1.239175	29.4	9.000	N	19.6	16.6	46.0	Compliance
1.310256	27.8	9.000	N	19.6	18.2	46.0	Compliance
2.325491	25.5	9.000	N	19.7	20.5	46.0	Compliance
2.362847	25.4	9.000	N	19.7	20.6	46.0	Compliance

Report No.: RDG170306005B Page 12 of 17

FCC §15.109 - RADIATED SPURIOUS EMISSIONS

Measurement Uncertainty

Compliance or non- compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- -compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- -non compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 2, then:

- -compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} U_{cispr})$, exceeds the disturbance limit;
- -non compliance is deemed to occur if any measured disturbance level, increased by ($U_{lab} U_{cispr}$), exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Chengdu) is:


30M~200MHz: ±4.7 dB; 200M~1GHz: ±6.0 dB; 1G~6GHz: ±5.13dB; 6G~25GHz: ±5.47 dB;

Table 2 – Values of U_{cispr}

Measurement				
Radiated disturbance (electric field strength at an OATS or in a SAC) Radiated disturbance (electric field strength in a FAR) Radiated disturbance (electric field strength in a FAR)	(30 MHz to 1000 MHz) (1 GHz to 6 GHz) (6 GHz to 18 GHz)	6.3 dB 5.2 dB 5.5 dB		


EUT Setup

Below 1GHz:

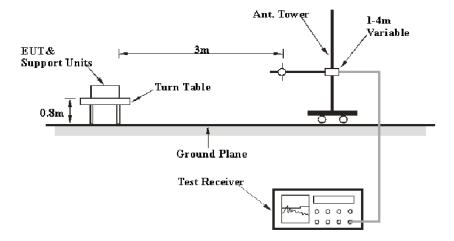

Report No.: RDG170306005B Page 13 of 17

Above 1GHz:

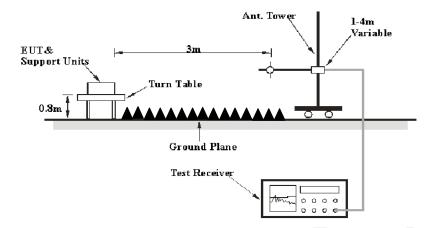

The radiated emission tests were performed at the 3 meters distance in chamber, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 13 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector	
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP	
Above 1 GHz	1 MHz	3 MHz	/	Peak	
Above 1 GHZ	1 MHz	10 Hz	/	AVG	

Test Procedure

During the radiated emissions, the monitor was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

Report No.: RDG170306005B Page 14 of 17

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Amplifier	8447D	2944A10442	2016-12-02	2017-12-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Sunol Sciences	Broadband Antenna	JB3	A101808	2016-04-10	2019-04-09
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
ETS	Horn Antenna	3115	003-6076	2016-12-02	2017-12-01
Mini-circuits	Amplifier	ZVA-183-S+	771001215	2016-05-20	2017-05-19
EMCT	Semi-Anechoic Chamber	966	N/A	2015-04-24	2018-04-23
N/A	RF Cable (below 1GHz)	NO.1	N/A	2016-11-10	2017-11-09
N/A	RF Cable (below 1GHz)	NO.4	N/A	2016-11-10	2017-11-09
N/A RF Cable (above 1GHz)		NO.2	N/A	2016-11-10	2017-11-09

^{*} **Statement of Traceability:** BACL (Chengdu) attested that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Loss + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

Test Data

Environmental Conditions

Temperature:	20 °C		
Relative Humidity:	58 %		
ATM Pressure:	95.8 kPa		


^{*} The testing was performed by Lorin Bian on 2017-03-07

Report No.: RDG170306005B Page 15 of 17

Test Result: Compliance

Test Mode: Downloading

1) Below 1GHz:

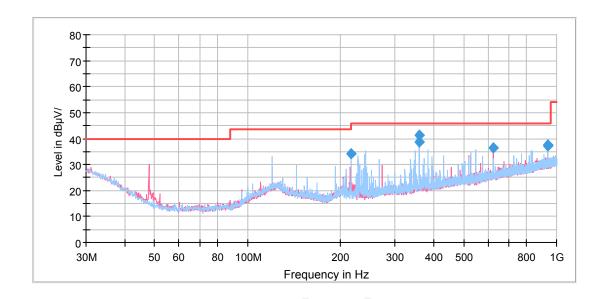

Frequency (MHz)	QuasiPeak (dBµV/m)	Height (cm)	Polarization	Azimuth (deg)	Corr. (dB)	Margin (dB)	Limit (dBµV/m)
215.876250	34.3	100.0	Н	125.0	-8.5	9.2	43.5
359.072500	41.2	100.0	Н	74.0	-4.3	4.8	46.0
359.921250	38.7	100.0	Н	66.0	-4.2	7.3	46.0
624.003750	36.6	100.0	V	345.0	-0.1	9.4	46.0
933.797500	37.2	200.0	Н	337.0	4.8	8.8	46.0
935.980000	37.7	100.0	Н	0.0	4.8	8.3	46.0

Report No.: RDG170306005B Page 16 of 17

2) 1-13GHz:

Frequency	Rec	Receiver		Rx Antenna		Amplifier	Corrected	Limit	Margin
(MHz)	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB)	loss (dB)	Gain (dB)	Amplitude (dBµV/m)	(dBµV/m)	(dB)
3346	32.06	PK	V	26.14	3.95	26.53	35.62	74.00	38.38
3346	22.75	AV	V	26.14	3.95	26.53	26.31	54.00	27.69
3760	33.8	PK	V	28.04	4.56	26.57	39.83	74.00	34.17
3760	24.89	AV	V	28.04	4.56	26.57	30.92	54.00	23.08
2608	32.95	PK	Н	23.42	3.09	26.79	32.67	74.00	41.33
2608	23.74	AV	Н	23.42	3.09	26.79	23.46	54.00	30.54
3250	32.25	PK	Н	25.60	3.81	26.50	35.16	74.00	38.84
3250	23.05	AV	Н	25.60	3.81	26.50	25.96	54.00	28.04
3742	32.81	PK	Н	27.97	4.54	26.57	38.75	74.00	35.25
3742	23.45	AV	Н	27.97	4.54	26.57	29.39	54.00	24.61

***** END OF REPORT *****

Report No.: RDG170306005B Page 17 of 17