



Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:20MHz; Channel:High

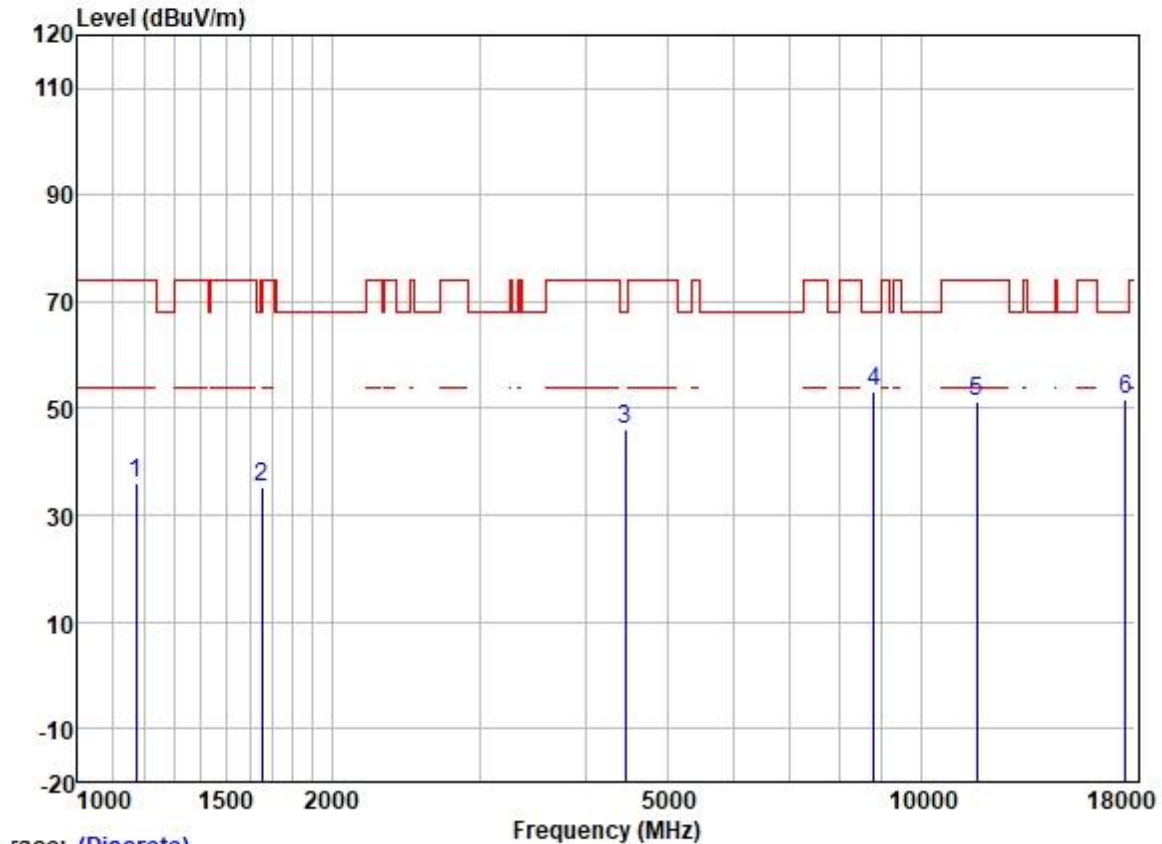


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1172.303	47.48	24.56	2.39	38.40	36.03	74.00	-37.97	HORIZONTAL Peak
2	1653.550	44.85	25.64	2.80	37.93	35.36	68.20	-32.84	HORIZONTAL Peak
3	4456.315	47.11	30.75	4.88	36.81	45.93	68.20	-22.27	HORIZONTAL Peak
4	8789.516	46.04	37.33	7.24	37.54	53.07	68.20	-15.13	HORIZONTAL Peak
5	11650.000	40.26	39.65	8.35	37.13	51.13	74.00	-22.87	HORIZONTAL Peak
6	17475.000	32.32	43.90	10.77	35.32	51.67	68.20	-16.53	HORIZONTAL Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:20MHz; Channel:High

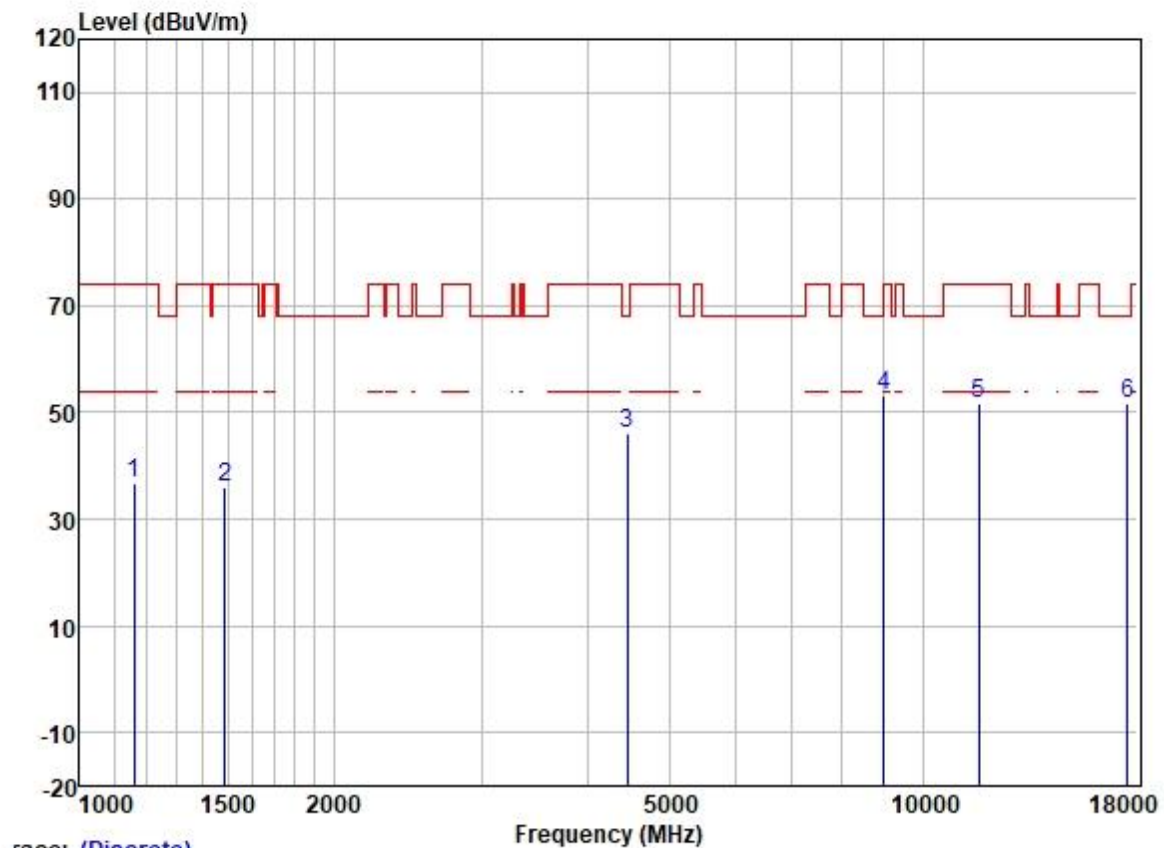


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1158.828	48.06	24.52	2.40	38.42	36.56	74.00	-37.44	VERTICAL Peak
2	1485.841	45.90	25.49	2.78	38.13	36.04	74.00	-37.96	VERTICAL Peak
3	4456.315	47.39	30.75	4.88	36.81	46.21	68.20	-21.99	VERTICAL Peak
4	8995.123	45.87	37.40	7.56	37.50	53.33	68.20	-14.87	VERTICAL Peak
5	11650.000	40.92	39.65	8.35	37.13	51.79	74.00	-22.21	VERTICAL Peak
6	17475.000	32.49	43.90	10.77	35.32	51.84	68.20	-16.36	VERTICAL Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

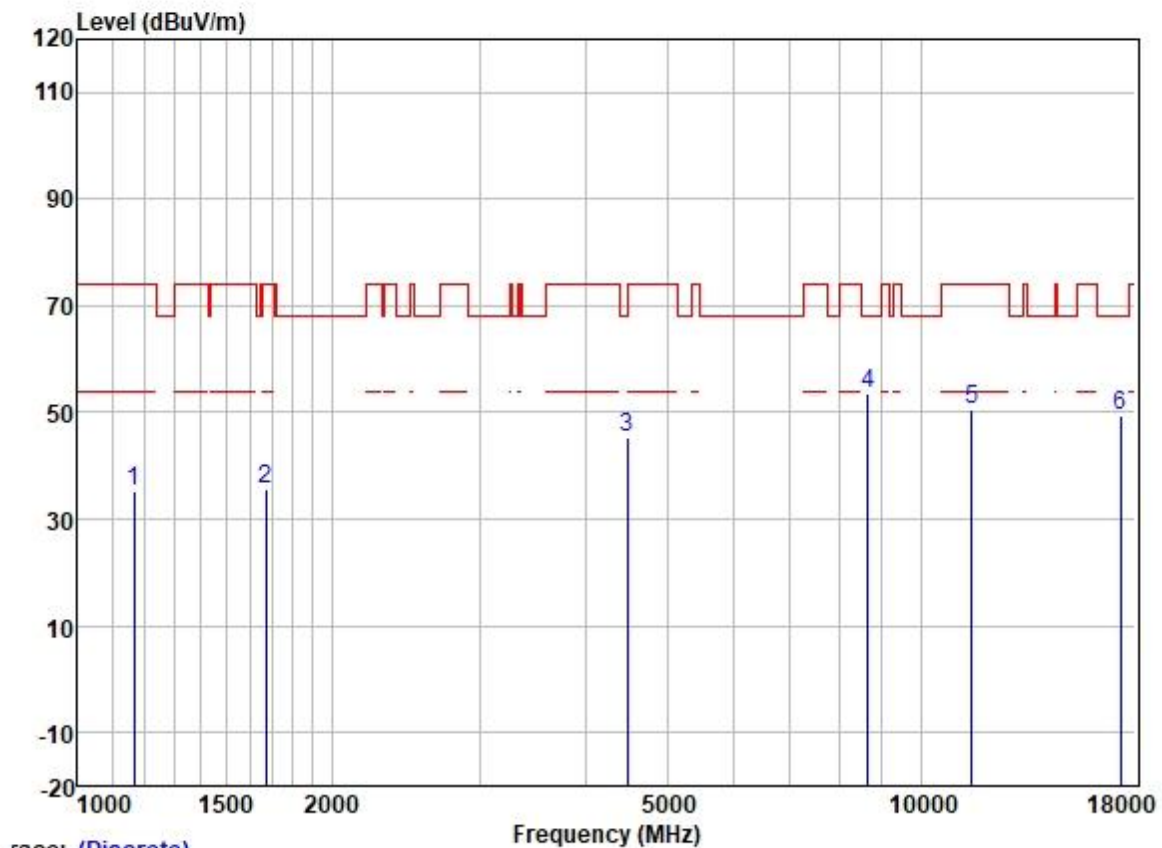


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1165.546	46.82	24.54	2.39	38.40	35.35	74.00	-38.65	HORIZONTAL Peak
2	1672.779	45.15	25.67	2.80	37.91	35.71	74.00	-38.29	HORIZONTAL Peak
3	4482.150	46.21	30.78	4.99	36.81	45.17	68.20	-23.03	HORIZONTAL Peak
4	8663.404	46.77	37.27	6.97	37.55	53.46	68.20	-14.74	HORIZONTAL Peak
5	11510.000	39.53	39.90	8.41	37.15	50.69	74.00	-23.31	HORIZONTAL Peak
6	17265.000	31.39	43.21	10.24	35.33	49.51	68.20	-18.69	HORIZONTAL Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:Low

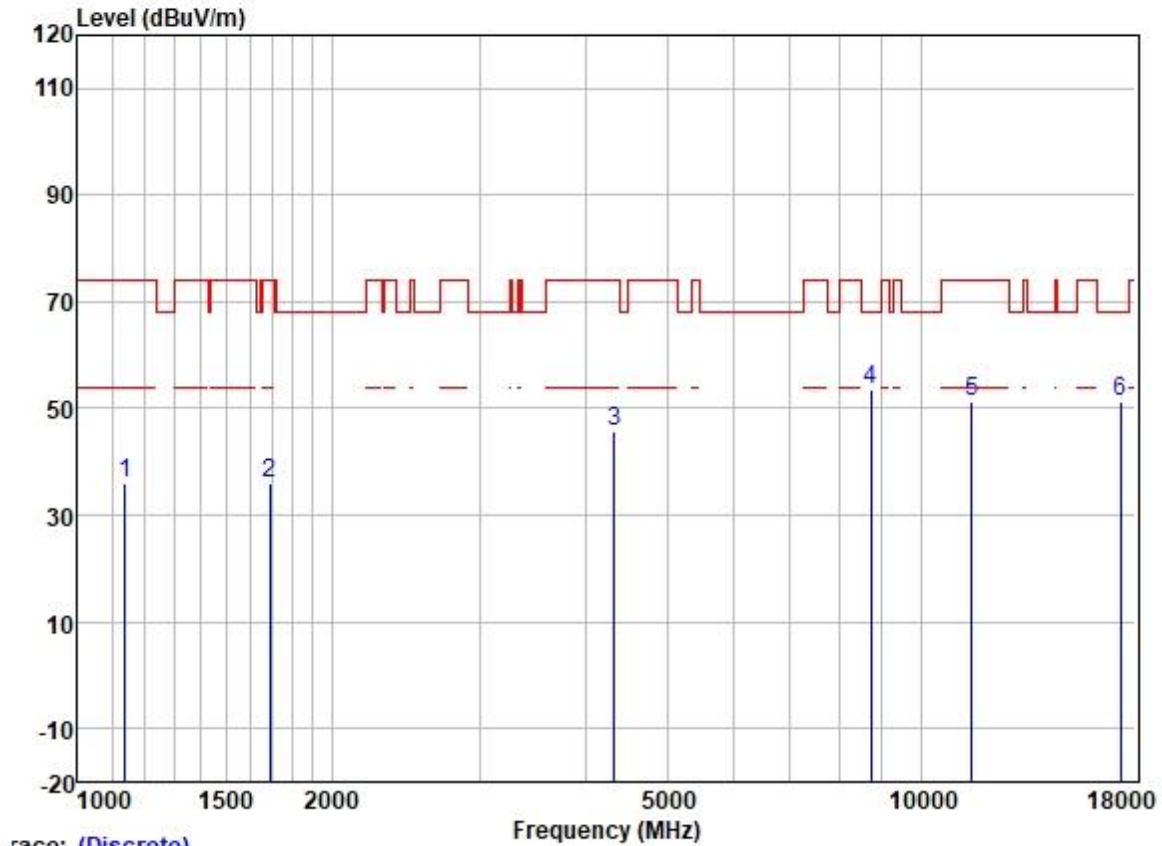


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1138.904	47.61	24.46	2.27	38.42	35.92	74.00	-38.08	VERTICAL Peak
2	1692.231	45.32	25.70	2.80	37.89	35.93	74.00	-38.07	VERTICAL Peak
3	4329.354	47.23	30.54	4.67	36.81	45.63	74.00	-28.37	VERTICAL Peak
4	8738.852	46.56	37.31	7.13	37.54	53.46	68.20	-14.74	VERTICAL Peak
5	11510.000	40.08	39.90	8.41	37.15	51.24	74.00	-22.76	VERTICAL Peak
6	17265.000	33.14	43.21	10.24	35.33	51.26	68.20	-16.94	VERTICAL Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11n; Bandwidth:40MHz; Channel:High

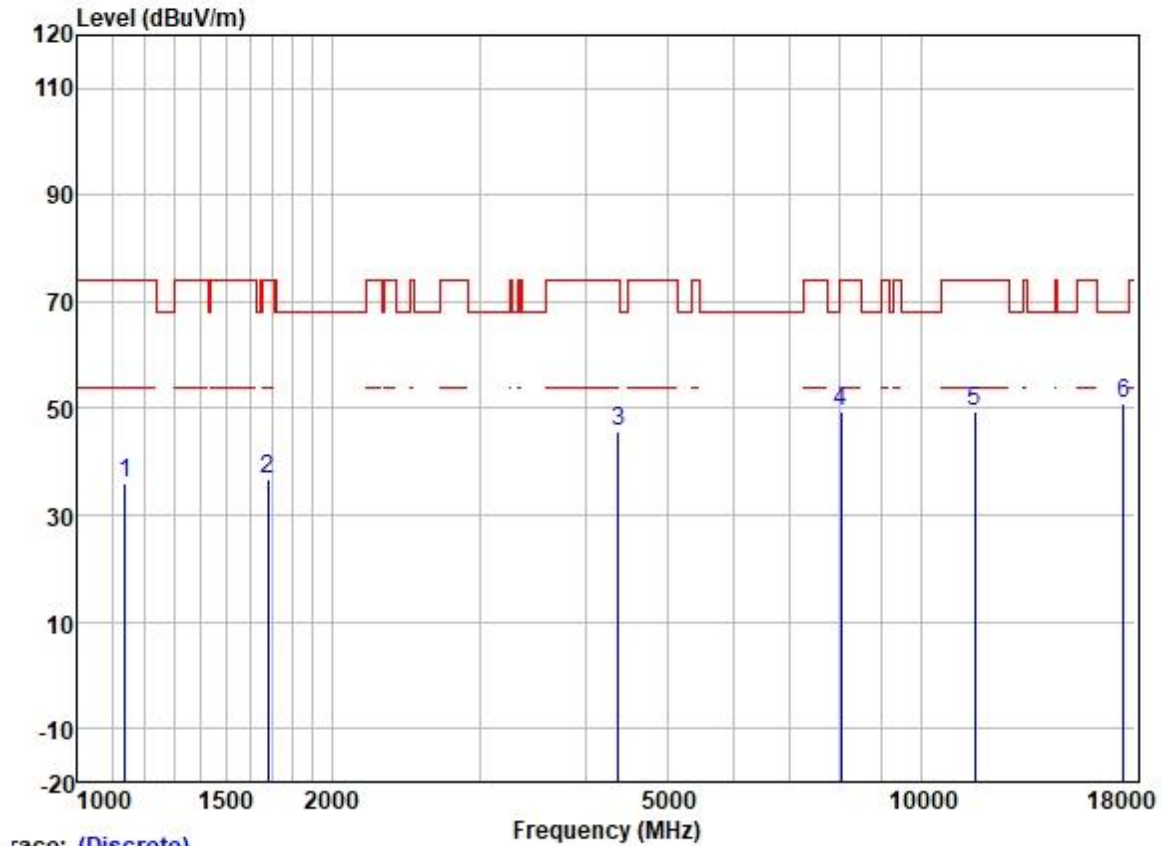


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1138.904	47.75	24.46	2.27	38.42	36.06	74.00	-37.94	HORIZONTAL	Peak
2	1682.477	46.07	25.68	2.80	37.91	36.64	74.00	-37.36	HORIZONTAL	Peak
3	4379.699	47.24	30.64	4.69	36.81	45.76	74.00	-28.24	HORIZONTAL	Peak
4	8036.214	43.98	36.91	6.19	37.60	49.48	74.00	-24.52	HORIZONTAL	Peak
5	11590.000	38.38	39.72	8.37	37.14	49.33	74.00	-24.67	HORIZONTAL	Peak
6	17385.000	32.23	43.57	10.53	35.32	51.01	68.20	-17.19	HORIZONTAL	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11n; Bandwidth:40MHz; Channel:High

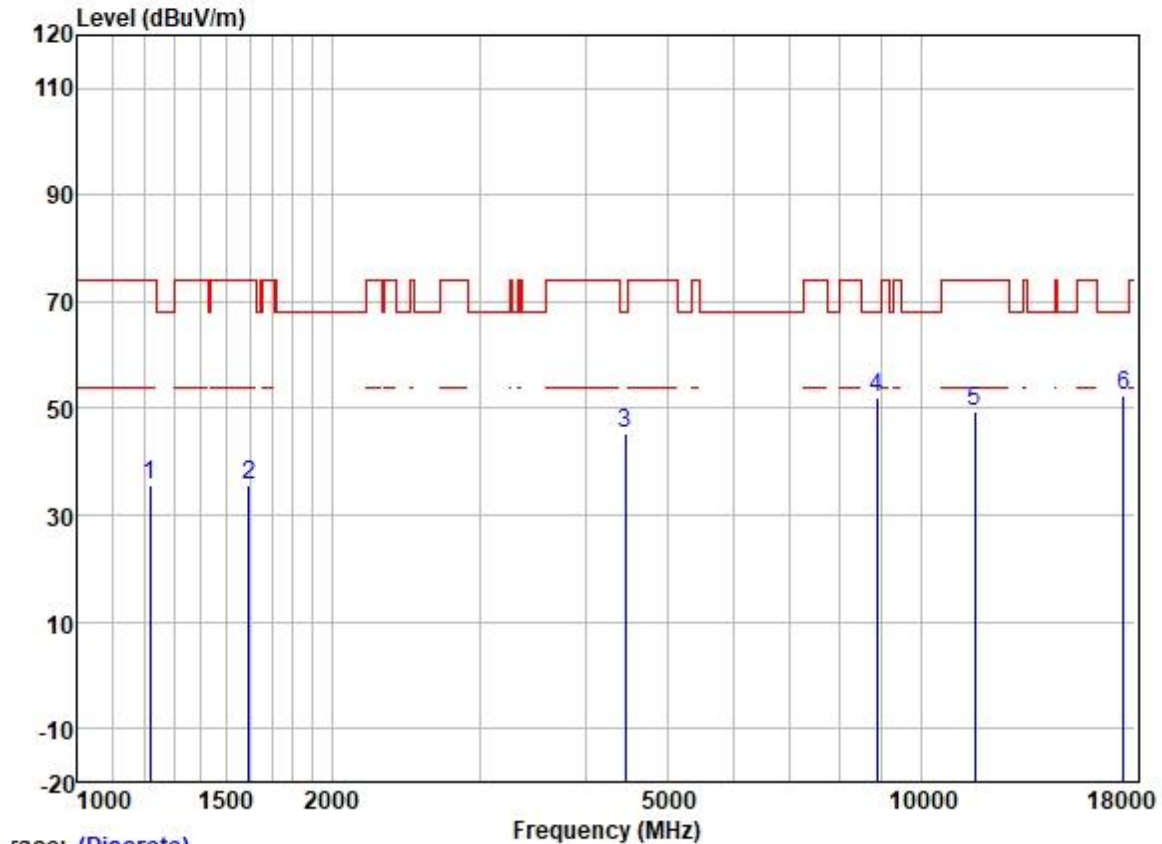


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1217.190	46.98	24.79	2.32	38.37	35.72	74.00	-38.28	VERTICAL Peak
2	1597.181	45.37	25.58	2.80	37.98	35.77	74.00	-38.23	VERTICAL Peak
3	4456.315	46.44	30.75	4.88	36.81	45.26	68.20	-22.94	VERTICAL Peak
4	8866.062	44.79	37.36	7.38	37.53	52.00	68.20	-16.20	VERTICAL Peak
5	11590.000	38.65	39.72	8.37	37.14	49.60	74.00	-24.40	VERTICAL Peak
6	17385.000	33.70	43.57	10.53	35.32	52.48	68.20	-15.72	VERTICAL Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

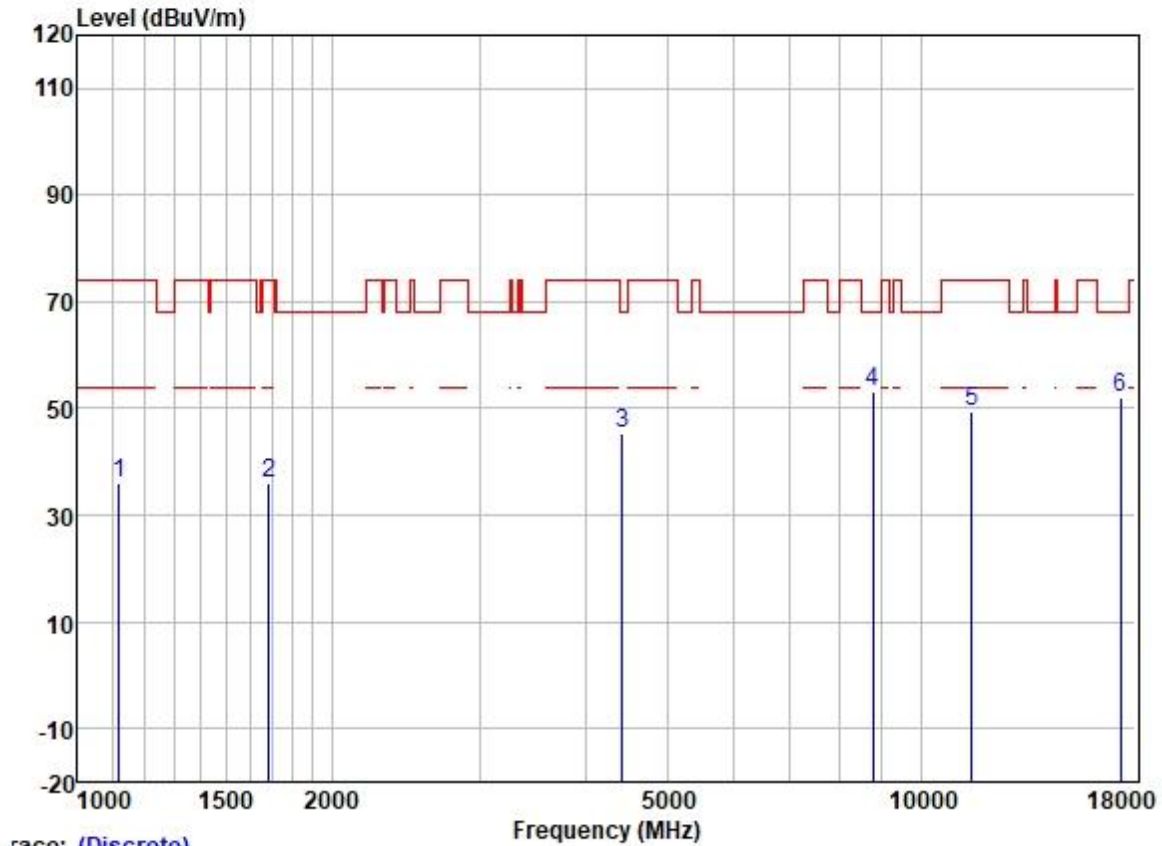

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1119.323	47.79	24.41	2.24	38.43	36.01	74.00	-37.99	HORIZONTAL	Peak
2	1687.347	45.36	25.69	2.80	37.91	35.94	74.00	-38.06	HORIZONTAL	Peak
3	4430.628	46.54	30.72	4.78	36.81	45.23	68.20	-22.97	HORIZONTAL	Peak
4	8764.146	46.12	37.32	7.19	37.54	53.09	68.20	-15.11	HORIZONTAL	Peak
5	11490.000	38.44	39.90	8.41	37.15	49.60	74.00	-24.40	HORIZONTAL	Peak
6	17235.000	34.33	43.01	10.08	35.33	52.09	68.20	-16.11	HORIZONTAL	Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:Low

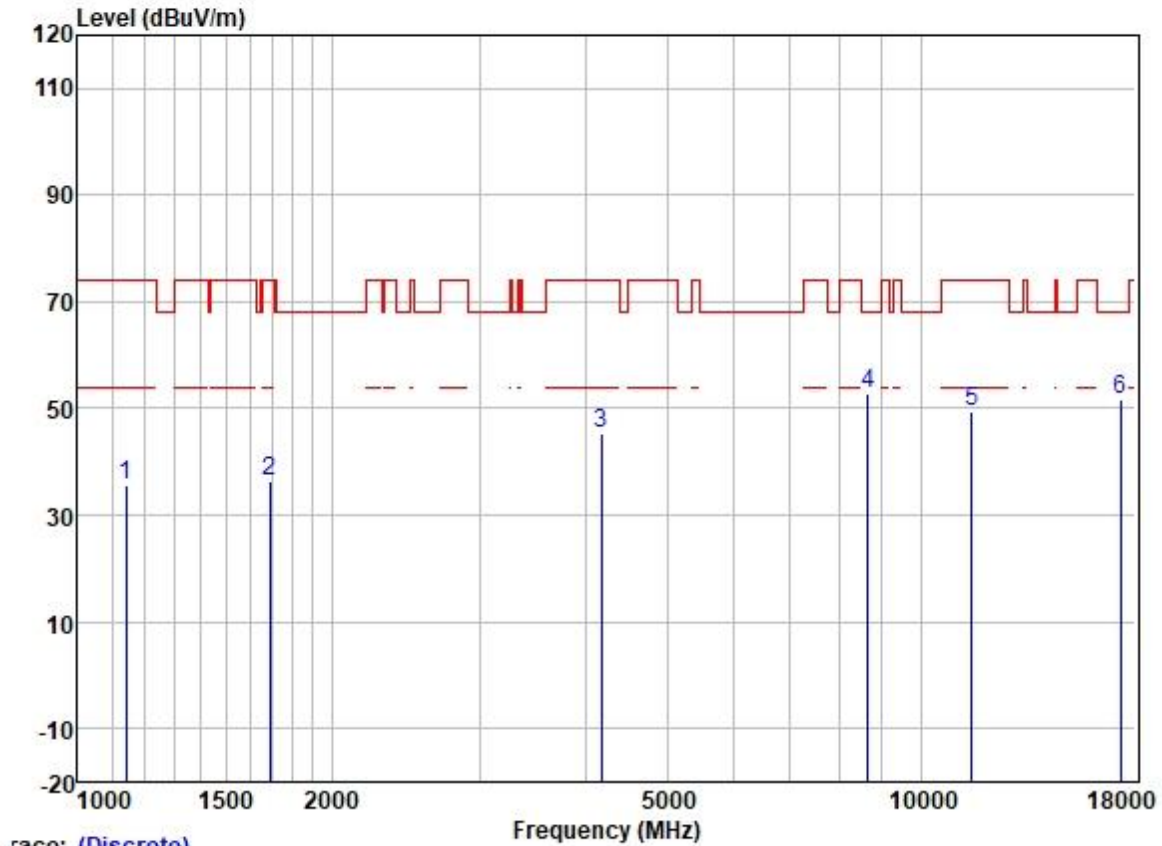

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1142.201	47.40	24.47	2.30	38.42	35.75	74.00	-38.25	VERTICAL	Peak
2	1692.231	45.81	25.70	2.80	37.89	36.42	74.00	-37.58	VERTICAL	Peak
3	4181.768	47.24	30.12	4.60	36.80	45.16	74.00	-28.84	VERTICAL	Peak
4	8663.404	45.95	37.27	6.97	37.55	52.64	68.20	-15.56	VERTICAL	Peak
5	11490.000	38.20	39.90	8.41	37.15	49.36	74.00	-24.64	VERTICAL	Peak
6	17235.000	34.08	43.01	10.08	35.33	51.84	68.20	-16.36	VERTICAL	Peak

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: middle

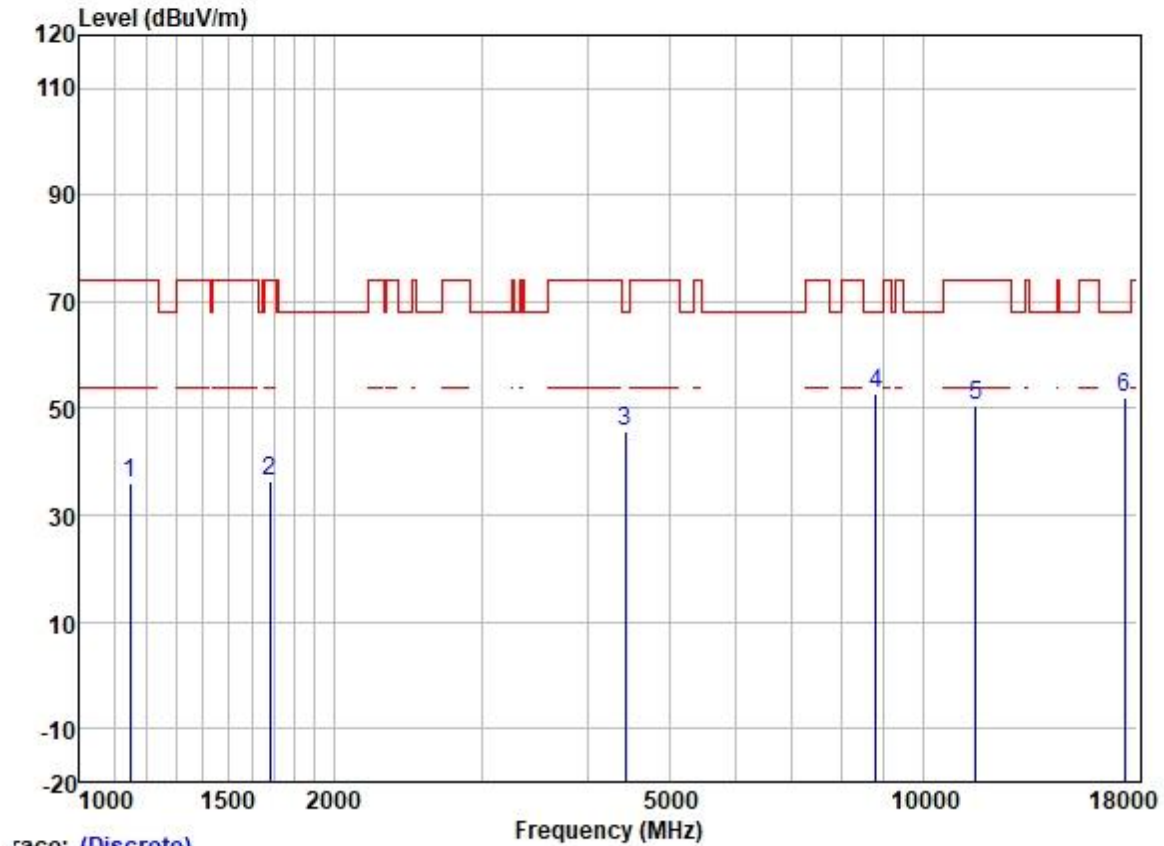


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1148.823	47.63	24.49	2.34	38.42	36.04	74.00	-37.96	HORIZONTAL Peak
2	1682.477	45.83	25.68	2.80	37.91	36.40	74.00	-37.60	HORIZONTAL Peak
3	4443.453	47.04	30.73	4.83	36.81	45.79	68.20	-22.41	HORIZONTAL Peak
4	8789.516	45.65	37.33	7.24	37.54	52.68	68.20	-15.52	HORIZONTAL Peak
5	11570.000	39.44	39.78	8.38	37.14	50.46	74.00	-23.54	HORIZONTAL Peak
6	17355.000	33.51	43.40	10.39	35.32	51.98	68.20	-16.22	HORIZONTAL Peak

Test Mode: 04; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 20MHz; Channel: middle

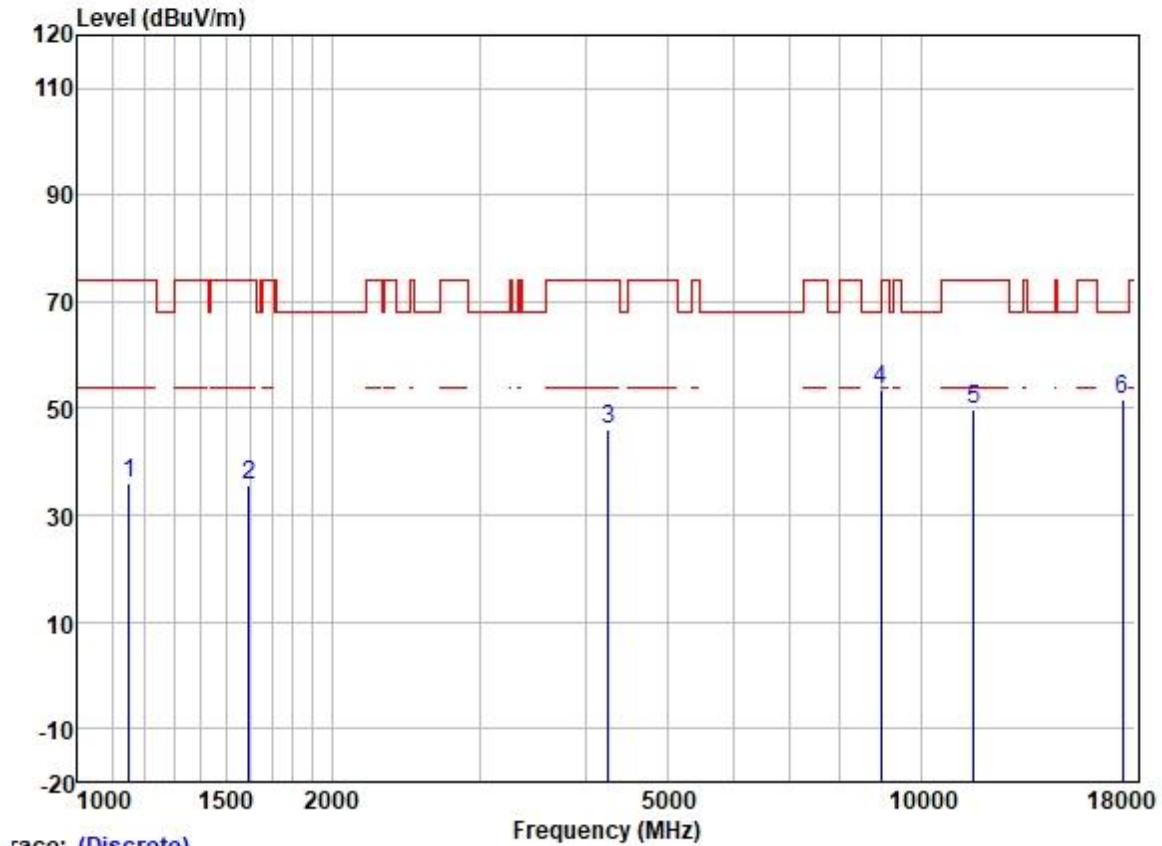

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1152.148	47.73	24.50	2.36	38.42	36.17	74.00	-37.83	VERTICAL Peak
2	1597.181	45.36	25.58	2.80	37.98	35.76	74.00	-38.24	VERTICAL Peak
3	4254.921	47.85	30.34	4.62	36.81	46.00	74.00	-28.00	VERTICAL Peak
4	8969.161	46.23	37.39	7.53	37.51	53.64	68.20	-14.56	VERTICAL Peak
5	11570.000	38.90	39.78	8.38	37.14	49.92	74.00	-24.08	VERTICAL Peak
6	17355.000	33.35	43.40	10.39	35.32	51.82	68.20	-16.38	VERTICAL Peak


Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

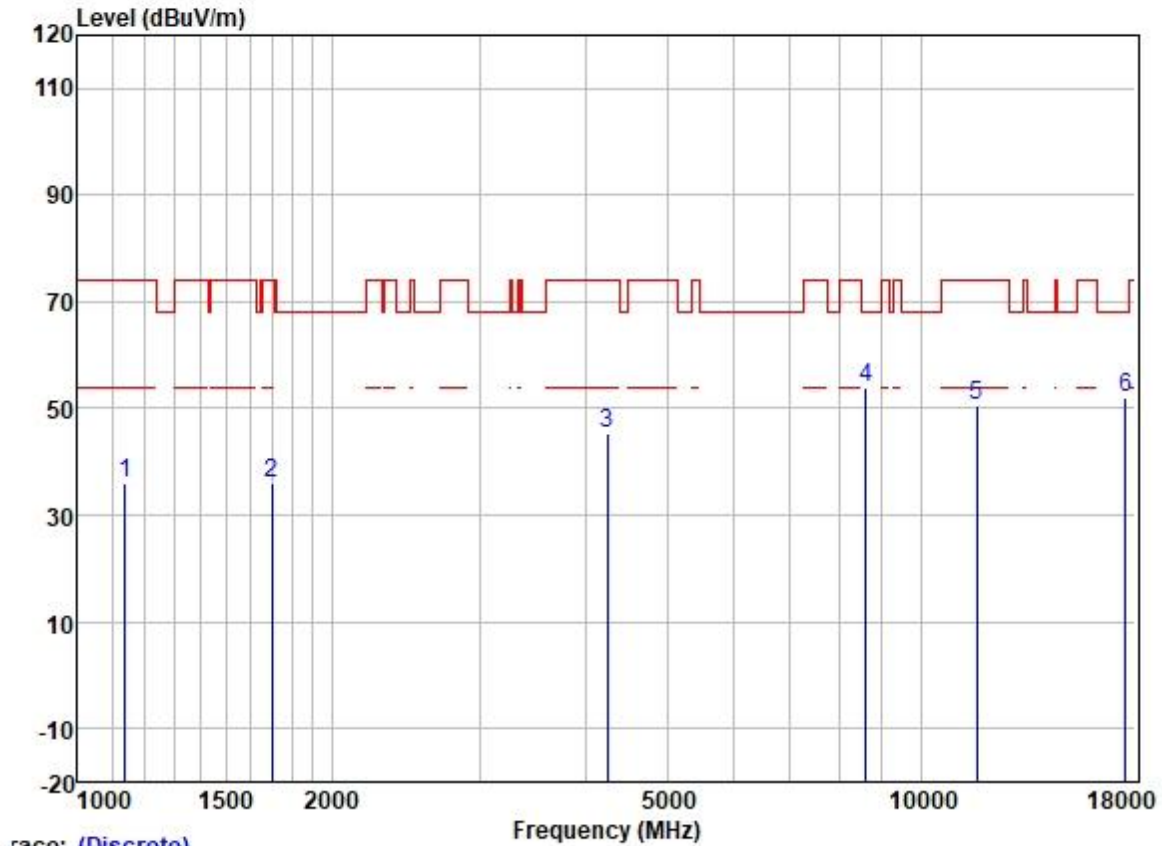

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1138.904	47.87	24.46	2.27	38.42	36.18	74.00	-37.82	HORIZONTAL	Peak
2	1697.129	45.49	25.71	2.80	37.89	36.11	74.00	-37.89	HORIZONTAL	Peak
3	4242.641	47.14	30.30	4.62	36.81	45.25	74.00	-28.75	HORIZONTAL	Peak
4	8613.468	47.43	37.24	6.88	37.56	53.99	68.20	-14.21	HORIZONTAL	Peak
5	11650.000	39.72	39.65	8.35	37.13	50.59	74.00	-23.41	HORIZONTAL	Peak
6	17475.000	32.74	43.90	10.77	35.32	52.09	68.20	-16.11	HORIZONTAL	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:20MHz; Channel:High

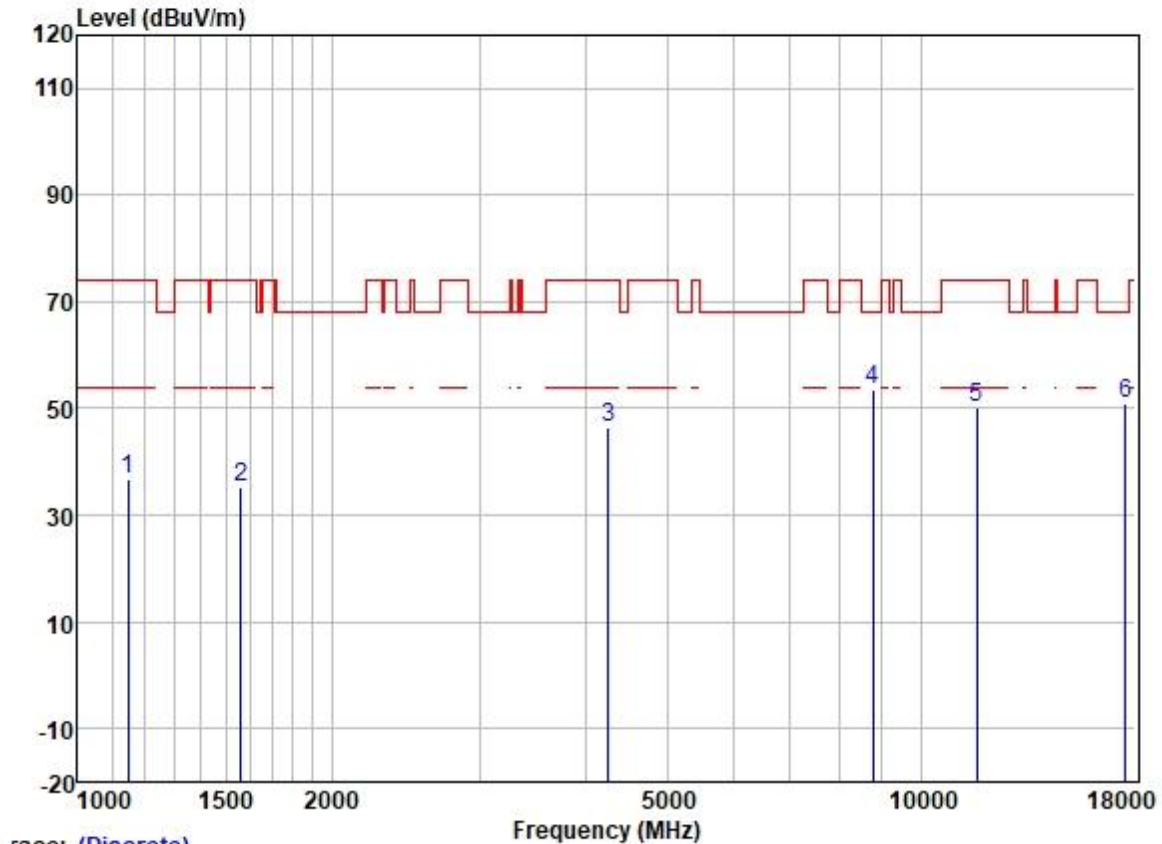


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1148.823	48.41	24.49	2.34	38.42	36.82	74.00	-37.18	VERTICAL	Peak
2	1560.673	45.08	25.54	2.80	38.03	35.39	74.00	-38.61	VERTICAL	Peak
3	4254.921	48.13	30.34	4.62	36.81	46.28	74.00	-27.72	VERTICAL	Peak
4	8764.146	46.65	37.32	7.19	37.54	53.62	68.20	-14.58	VERTICAL	Peak
5	11650.000	39.44	39.65	8.35	37.13	50.31	74.00	-23.69	VERTICAL	Peak
6	17475.000	31.57	43.90	10.77	35.32	50.92	68.20	-17.28	VERTICAL	Peak

Test Mode: 04; Polarity: Horizontal; Modulation: 802.11ac; Bandwidth: 40MHz; Channel: Low

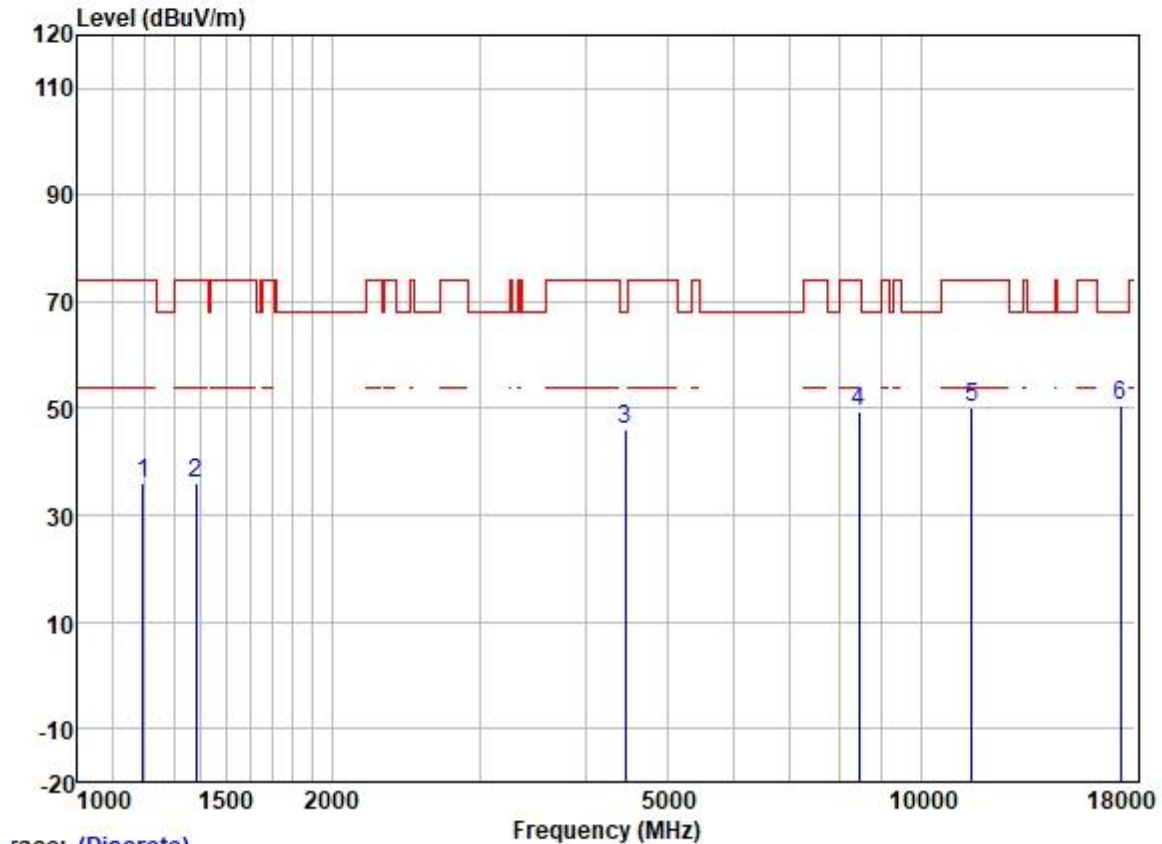

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dB		
1	1196.264	47.32	24.67	2.35	38.39	35.95	74.00	-38.05	HORIZONTAL Peak
2	1382.262	46.23	25.37	2.60	38.25	35.95	74.00	-38.05	HORIZONTAL Peak
3	4456.315	47.28	30.75	4.88	36.81	46.10	68.20	-22.10	HORIZONTAL Peak
4	8440.945	43.38	37.11	6.66	37.57	49.58	74.00	-24.42	HORIZONTAL Peak
5	11510.000	39.05	39.90	8.41	37.15	50.21	74.00	-23.79	HORIZONTAL Peak
6	17265.000	32.36	43.21	10.24	35.33	50.48	68.20	-17.72	HORIZONTAL Peak


Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:Low

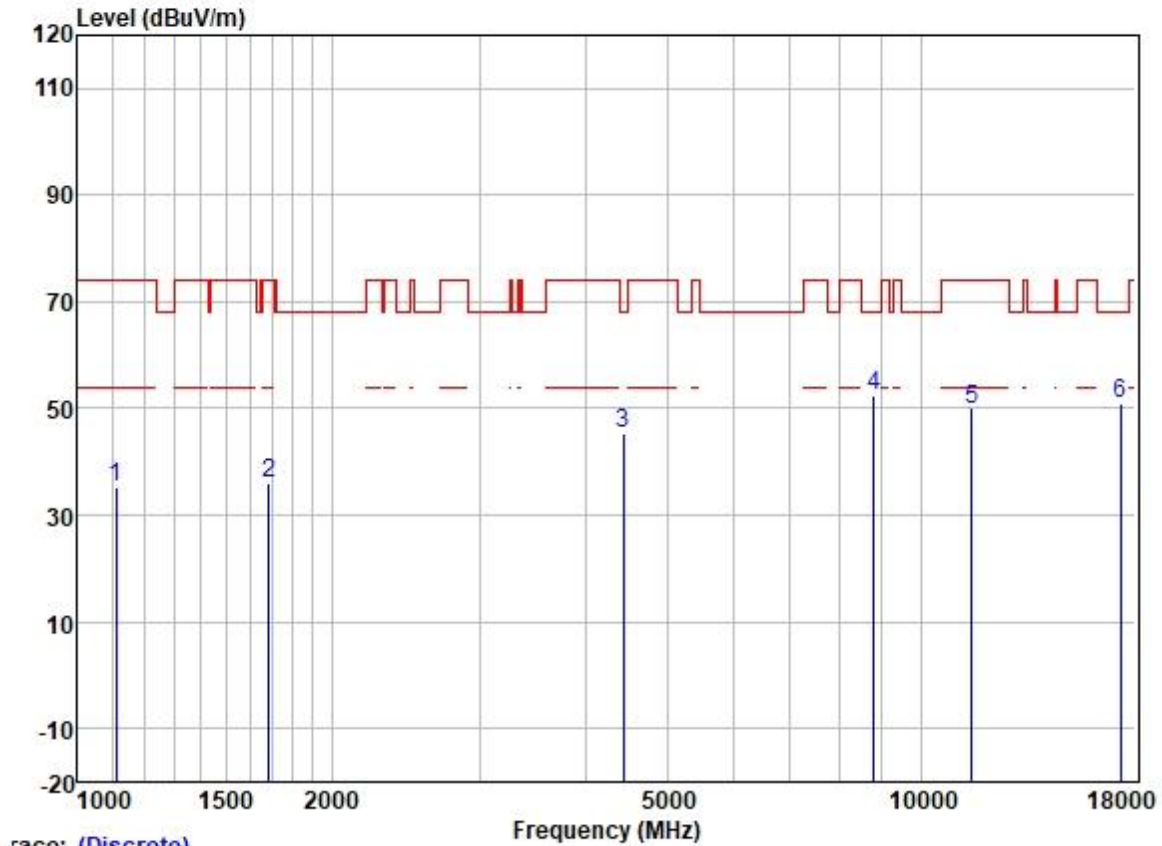

Trace: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1109.660	47.09	24.39	2.27	38.45	35.30	74.00	-38.70	VERTICAL	Peak
2	1687.347	45.60	25.69	2.80	37.91	36.18	74.00	-37.82	VERTICAL	Peak
3	4443.453	46.71	30.73	4.83	36.81	45.46	68.20	-22.74	VERTICAL	Peak
4	8789.516	45.55	37.33	7.24	37.54	52.58	68.20	-15.62	VERTICAL	Peak
5	11510.000	38.84	39.90	8.41	37.15	50.00	74.00	-24.00	VERTICAL	Peak
6	17265.000	32.85	43.21	10.24	35.33	50.97	68.20	-17.23	VERTICAL	Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

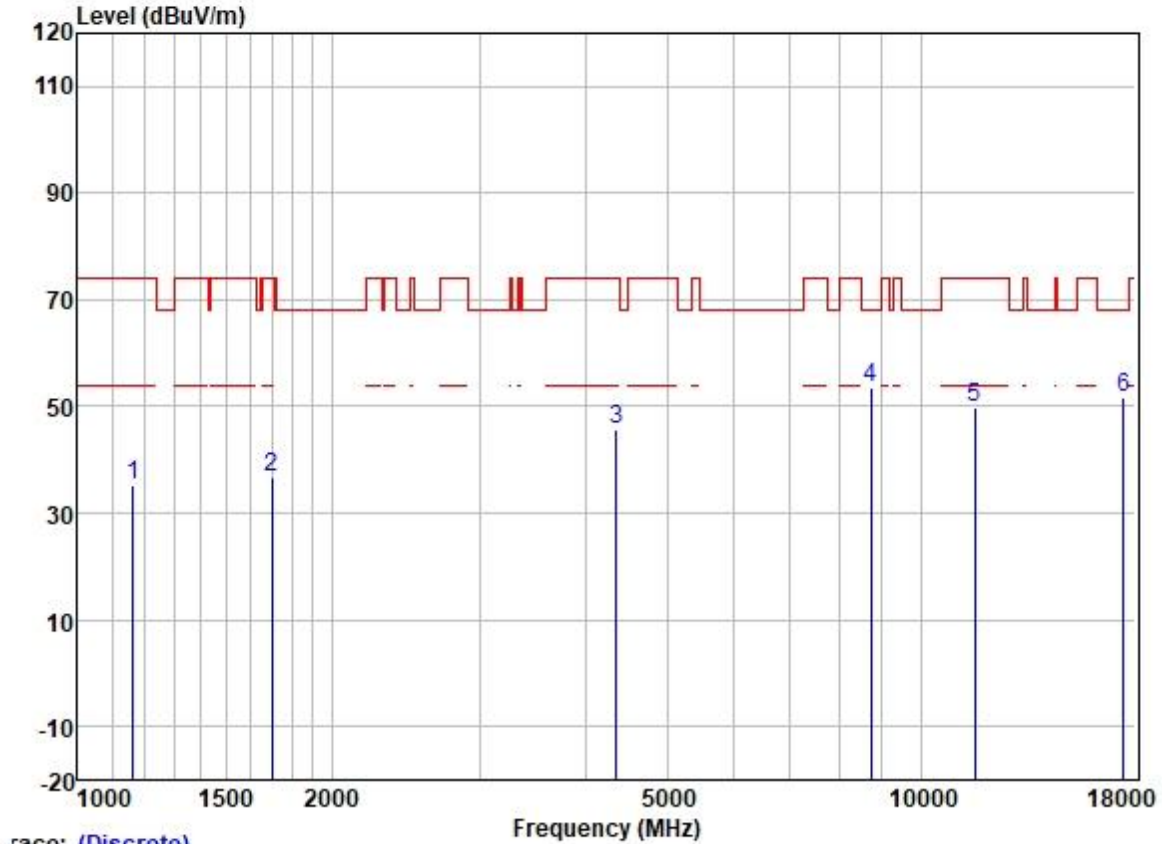


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1162.182	46.80	24.53	2.40	38.42	35.31	74.00	-38.69	HORIZONTAL	Peak
2	1697.129	45.97	25.71	2.80	37.89	36.59	74.00	-37.41	HORIZONTAL	Peak
3	4354.454	47.17	30.59	4.68	36.81	45.63	74.00	-28.37	HORIZONTAL	Peak
4	8738.852	46.71	37.31	7.13	37.54	53.61	68.20	-14.59	HORIZONTAL	Peak
5	11590.000	39.01	39.72	8.37	37.14	49.96	74.00	-24.04	HORIZONTAL	Peak
6	17385.000	32.88	43.57	10.53	35.32	51.66	68.20	-16.54	HORIZONTAL	Peak

Test Mode: 04; Polarity: Vertical; Modulation:802.11ac; Bandwidth:40MHz; Channel:High

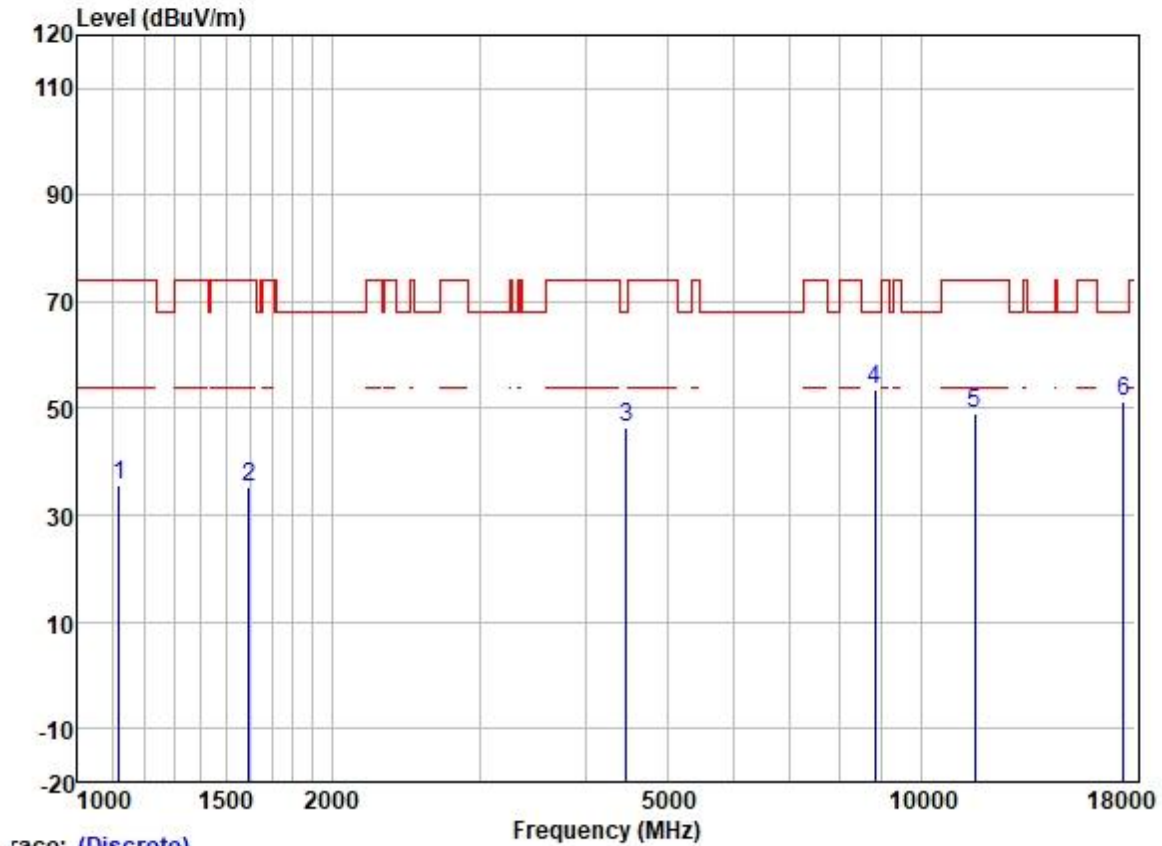


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1119.323	47.42	24.41	2.24	38.43	35.64	74.00	-38.36	VERTICAL Peak
2	1597.181	44.95	25.58	2.80	37.98	35.35	74.00	-38.65	VERTICAL Peak
3	4469.214	47.50	30.77	4.93	36.81	46.39	68.20	-21.81	VERTICAL Peak
4	8814.957	46.40	37.34	7.29	37.53	53.50	68.20	-14.70	VERTICAL Peak
5	11590.000	38.02	39.72	8.37	37.14	48.97	74.00	-25.03	VERTICAL Peak
6	17385.000	32.59	43.57	10.53	35.32	51.37	68.20	-16.83	VERTICAL Peak

Test Mode: 04; Polarity: Horizontal; Modulation:802.11ac; Bandwidth:80MHz; Channel:middle

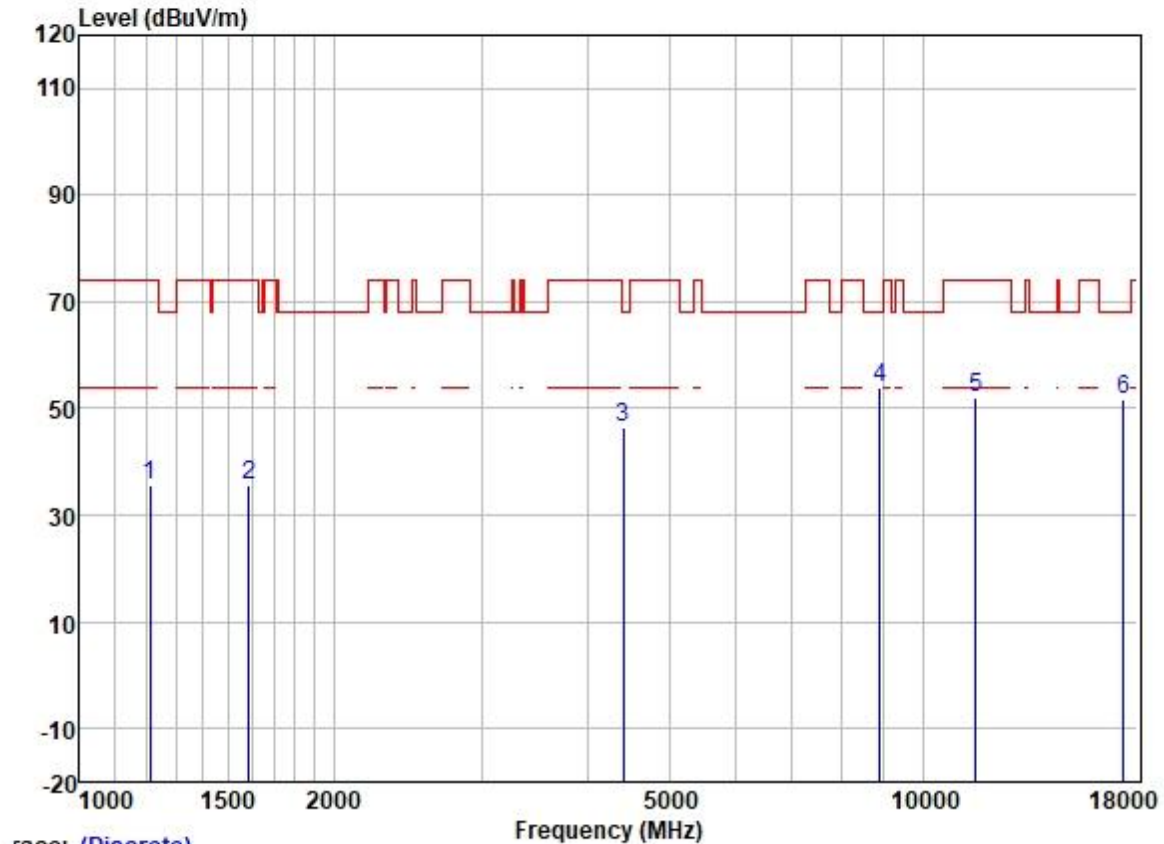

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1210.174	47.12	24.74	2.33	38.39	35.80	74.00	-38.20	HORIZONTAL	Peak
2	1587.975	45.09	25.57	2.80	37.98	35.48	74.00	-38.52	HORIZONTAL	Peak
3	4417.841	47.74	30.70	4.74	36.81	46.37	68.20	-21.83	HORIZONTAL	Peak
4	8891.725	46.50	37.37	7.42	37.52	53.77	68.20	-14.43	HORIZONTAL	Peak
5	11550.000	40.90	39.84	8.40	37.14	52.00	74.00	-22.00	HORIZONTAL	Peak
6	17325.000	33.38	43.40	10.39	35.32	51.85	68.20	-16.35	HORIZONTAL	Peak

Test Mode: 04; Polarity: Vertical; Modulation: 802.11ac; Bandwidth: 80MHz; Channel: middle

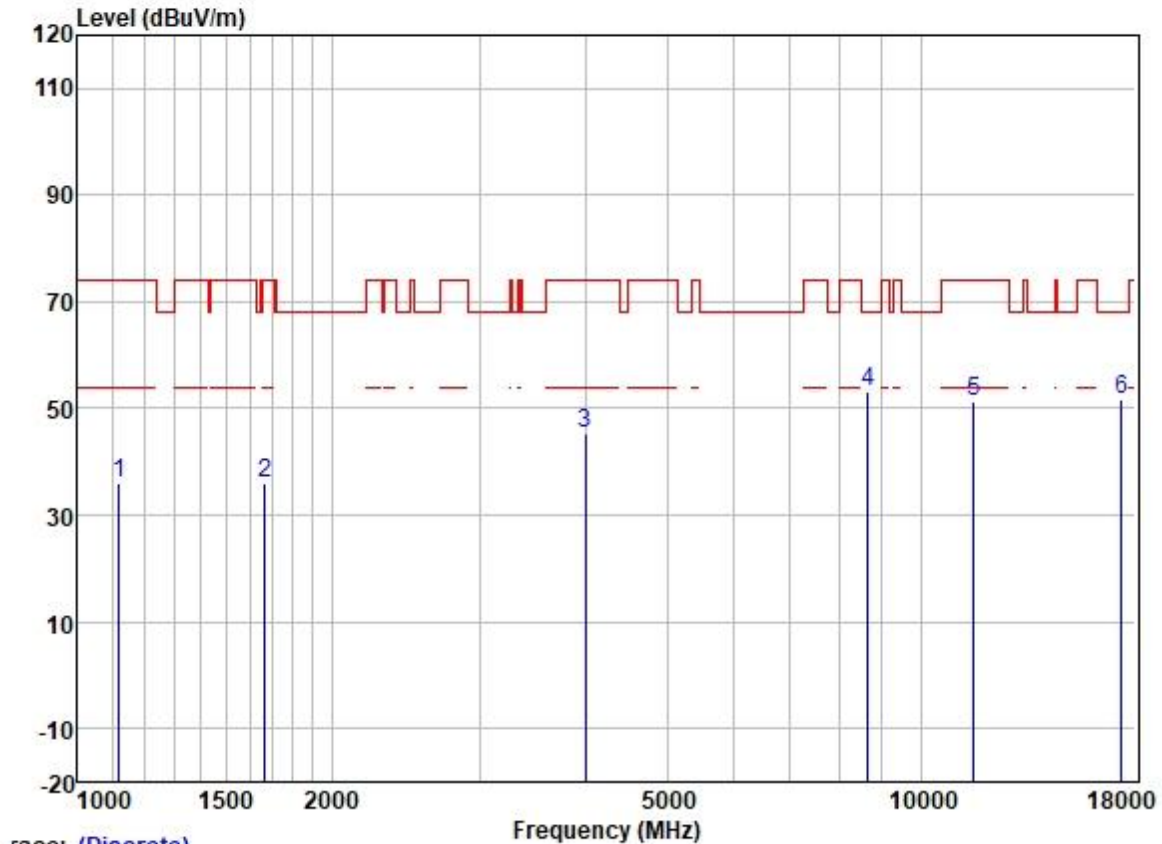

	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1119.323	47.68	24.41	2.24	38.43	35.90	74.00	-38.10	VERTICAL Peak
2	1667.951	45.38	25.66	2.80	37.91	35.93	74.00	-38.07	VERTICAL Peak
3	4004.339	47.59	29.80	4.60	36.80	45.19	74.00	-28.81	VERTICAL Peak
4	8663.404	46.53	37.27	6.97	37.55	53.22	68.20	-14.98	VERTICAL Peak
5	11550.000	40.34	39.84	8.40	37.14	51.44	74.00	-22.56	VERTICAL Peak
6	17325.000	33.18	43.40	10.39	35.32	51.65	68.20	-16.55	VERTICAL Peak

8 Test Setup Photo

Refer to Appendix - Setup Photos-BTWIFI for GZCR2112021463AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix - Photographs of EUT Constructional Details for GZCR2112021463AT

10 Appendix

1. Duty Cycle

1.1 Test Result

Test Mode	Channel Frequency (MHz)	TX Type	ANT No.	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)
802.11a	5180	SISO	1	1.364	1.407	96.94	0.13
	5200	SISO	1	1.366	1.408	97.02	0.13
	5240	SISO	1	1.365	1.407	97.01	0.13
	5260	SISO	1	1.364	1.406	97.01	0.13
	5300	SISO	1	1.365	1.407	97.01	0.13
	5320	SISO	1	1.365	1.407	97.01	0.13
	5745	SISO	1	1.364	1.406	97.01	0.13
	5785	SISO	1	1.364	1.406	97.01	0.13
802.11n(HT20)	5180	SISO	1	1.307	1.349	96.89	0.14
	5200	SISO	1	1.308	1.350	96.89	0.14
	5240	SISO	1	1.308	1.350	96.89	0.14
	5260	SISO	1	1.308	1.350	96.89	0.14
	5300	SISO	1	1.308	1.350	96.89	0.14
	5320	SISO	1	1.307	1.349	96.89	0.14
	5745	SISO	1	1.308	1.350	96.89	0.14
	5785	SISO	1	1.308	1.350	96.89	0.14
802.11n(HT40)	5190	SISO	1	0.618	0.658	93.92	0.27
	5230	SISO	1	0.618	0.658	93.92	0.27
	5270	SISO	1	0.618	0.658	93.92	0.27
	5310	SISO	1	0.618	0.659	93.78	0.28
	5755	SISO	1	0.618	0.658	93.92	0.27
	5795	SISO	1	0.618	0.658	93.92	0.27
802.11ac(VHT20)	5180	SISO	1	1.314	1.356	96.90	0.14
	5200	SISO	1	1.315	1.357	96.90	0.14
	5240	SISO	1	1.316	1.358	96.91	0.14
	5260	SISO	1	1.314	1.356	96.90	0.14
	5300	SISO	1	1.316	1.358	96.91	0.14
	5320	SISO	1	1.316	1.358	96.91	0.14
	5745	SISO	1	1.316	1.358	96.91	0.14
	5785	SISO	1	1.316	1.358	96.91	0.14
802.11ac(VHT40)	5190	SISO	1	0.626	0.665	94.14	0.26
	5230	SISO	1	0.626	0.666	93.99	0.27
	5270	SISO	1	0.626	0.666	93.99	0.27
	5310	SISO	1	0.626	0.666	93.99	0.27
	5755	SISO	1	0.625	0.665	93.98	0.27
	5795	SISO	1	0.626	0.666	93.99	0.27
802.11ac(VHT80)	5210	SISO	1	0.323	0.365	88.49	0.53
	5290	SISO	1	0.326	0.365	89.32	0.49
	5775	SISO	1	0.327	0.365	89.59	0.48

1.2 Test Graph







Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch, EMC Laboratory



No.198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

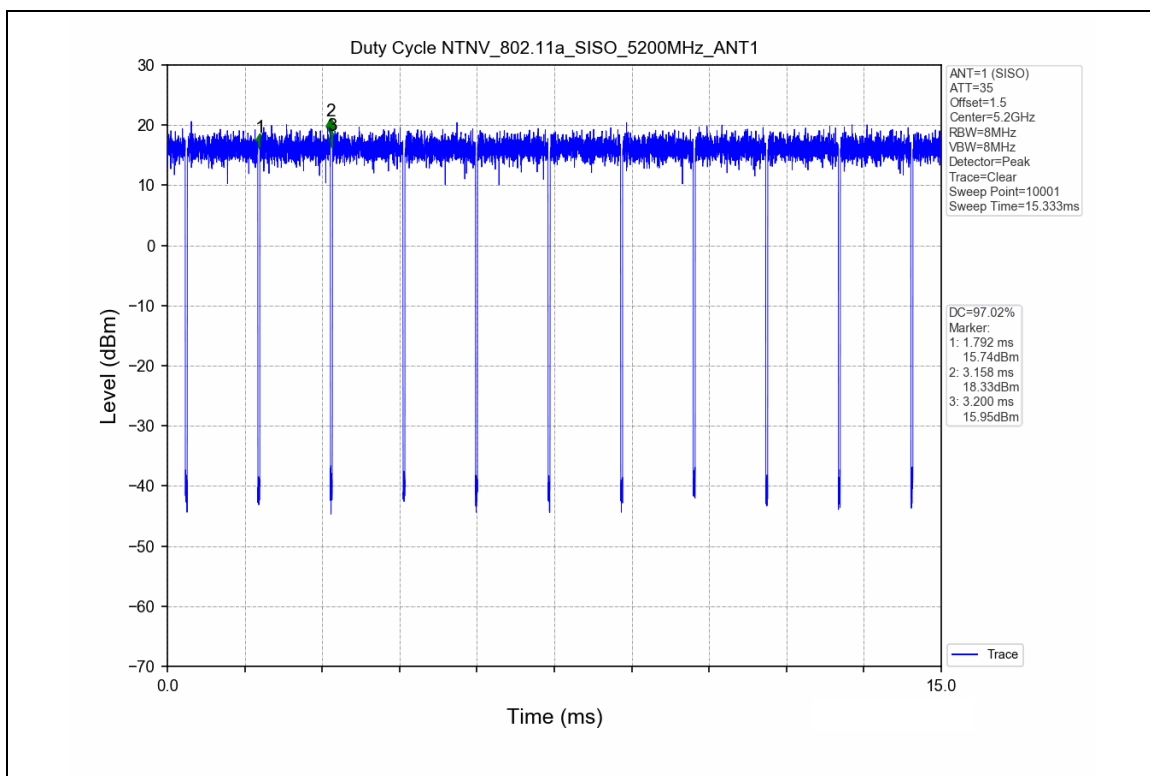
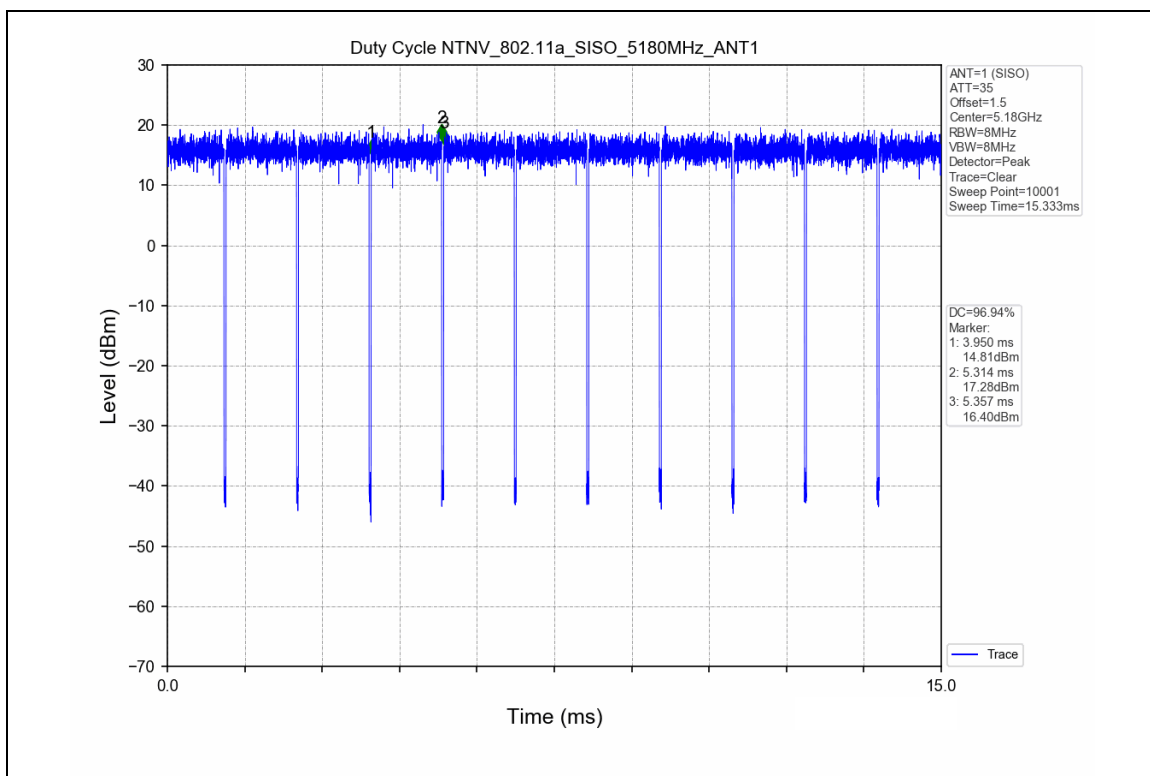


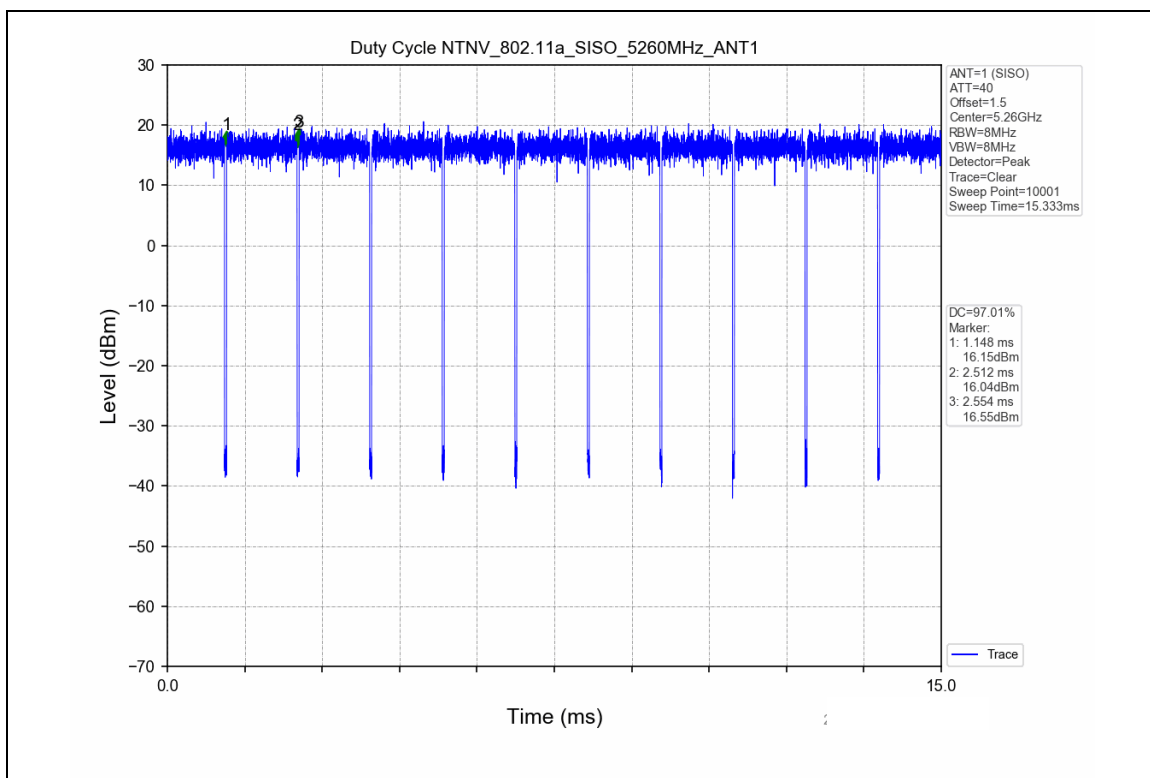
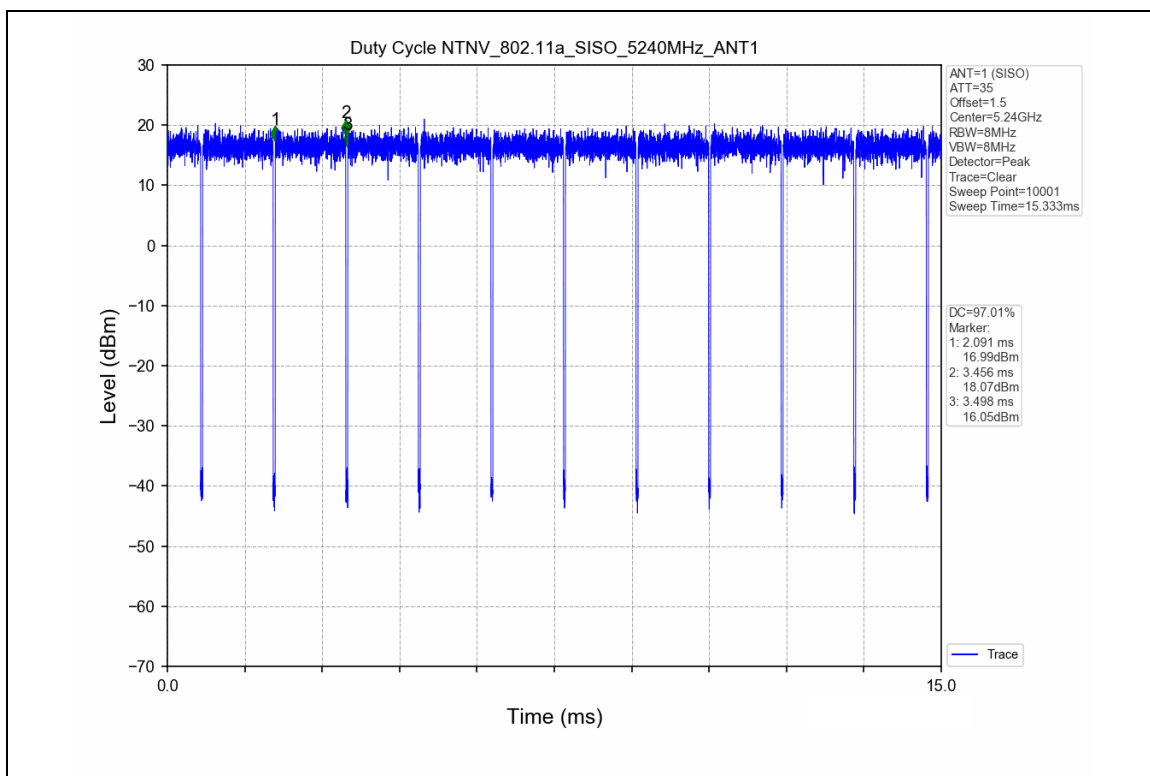


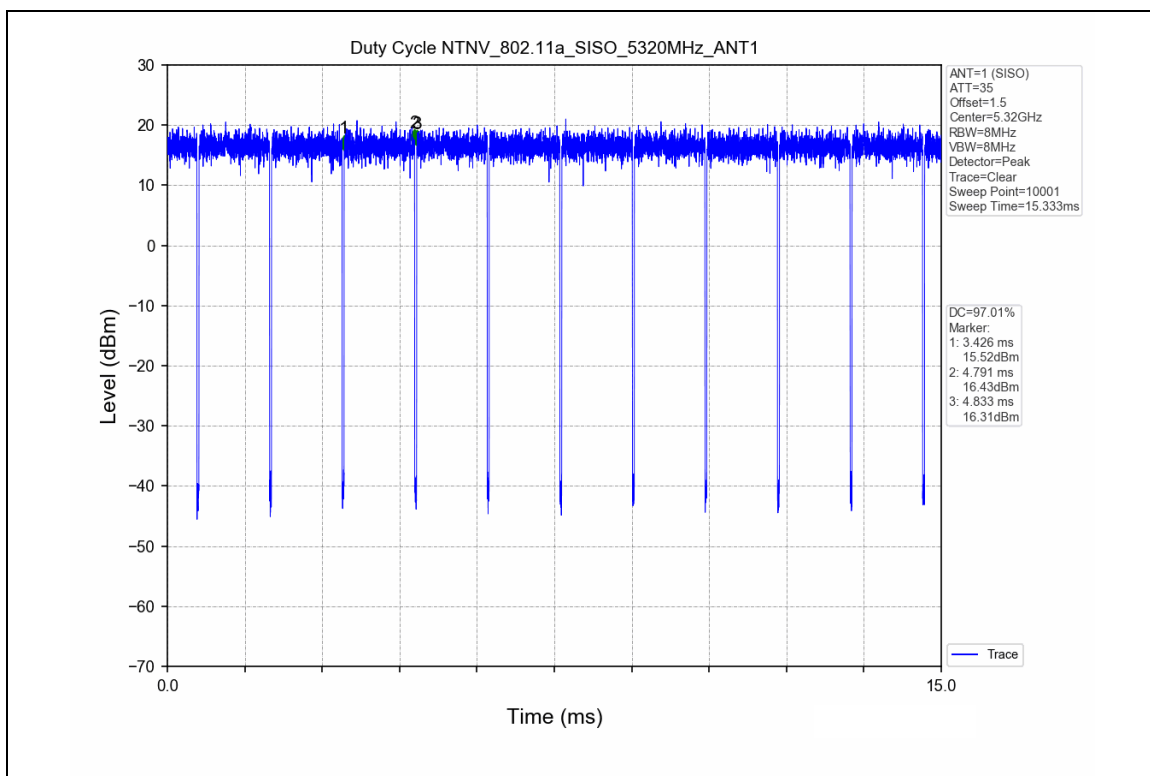
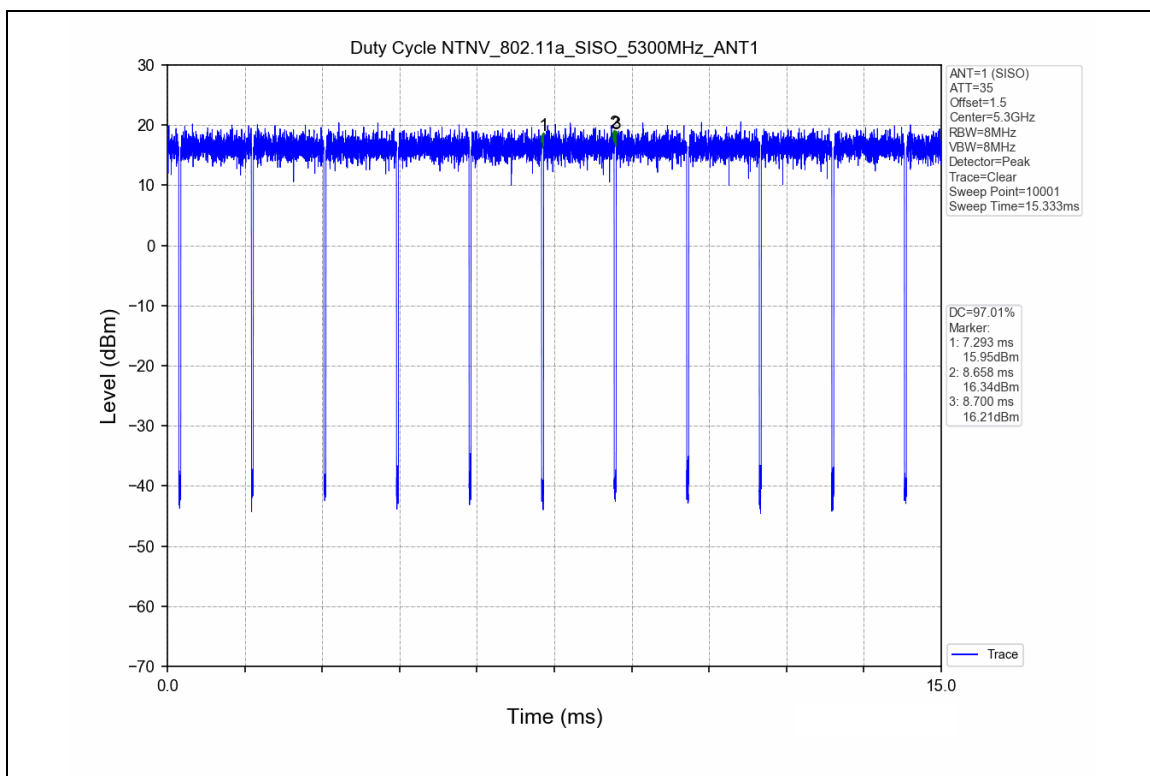


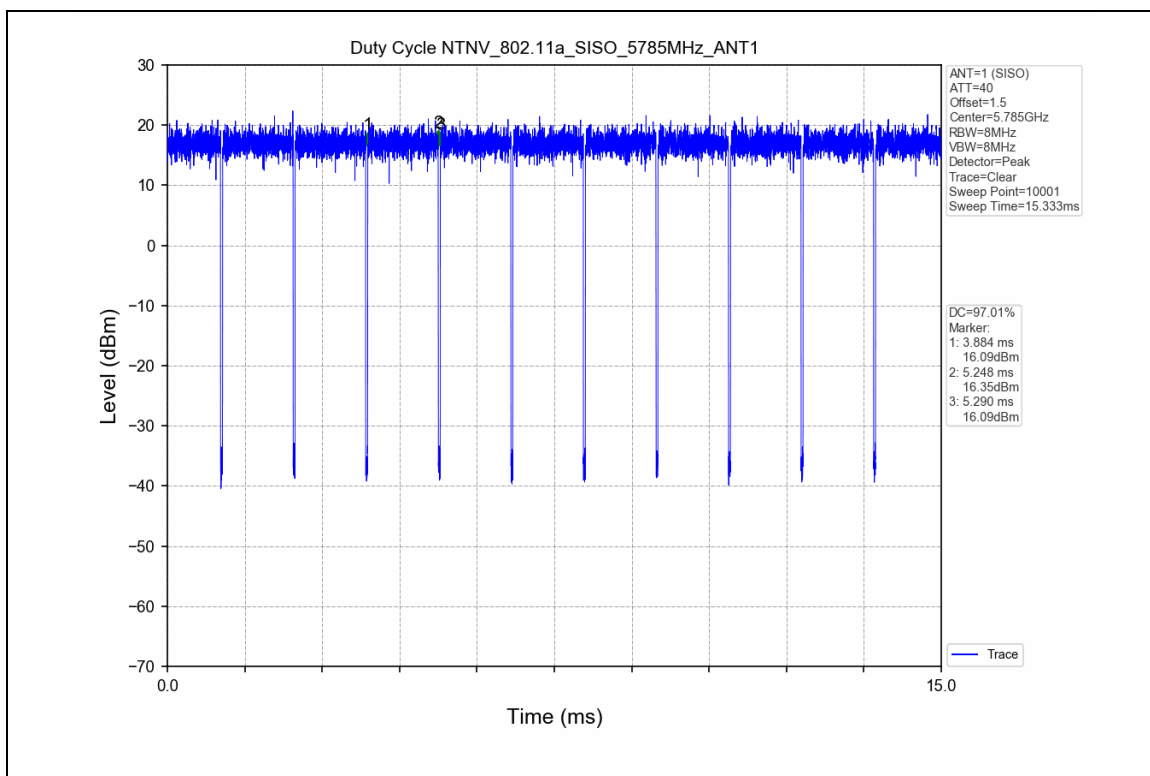
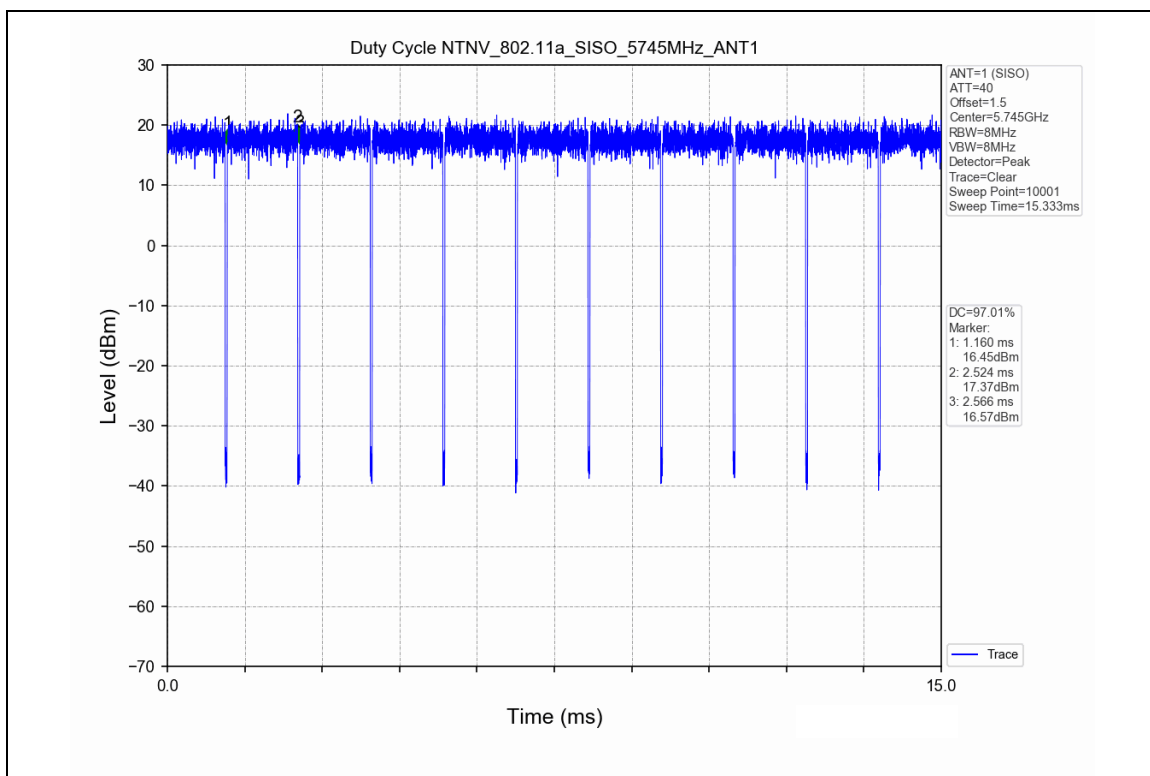


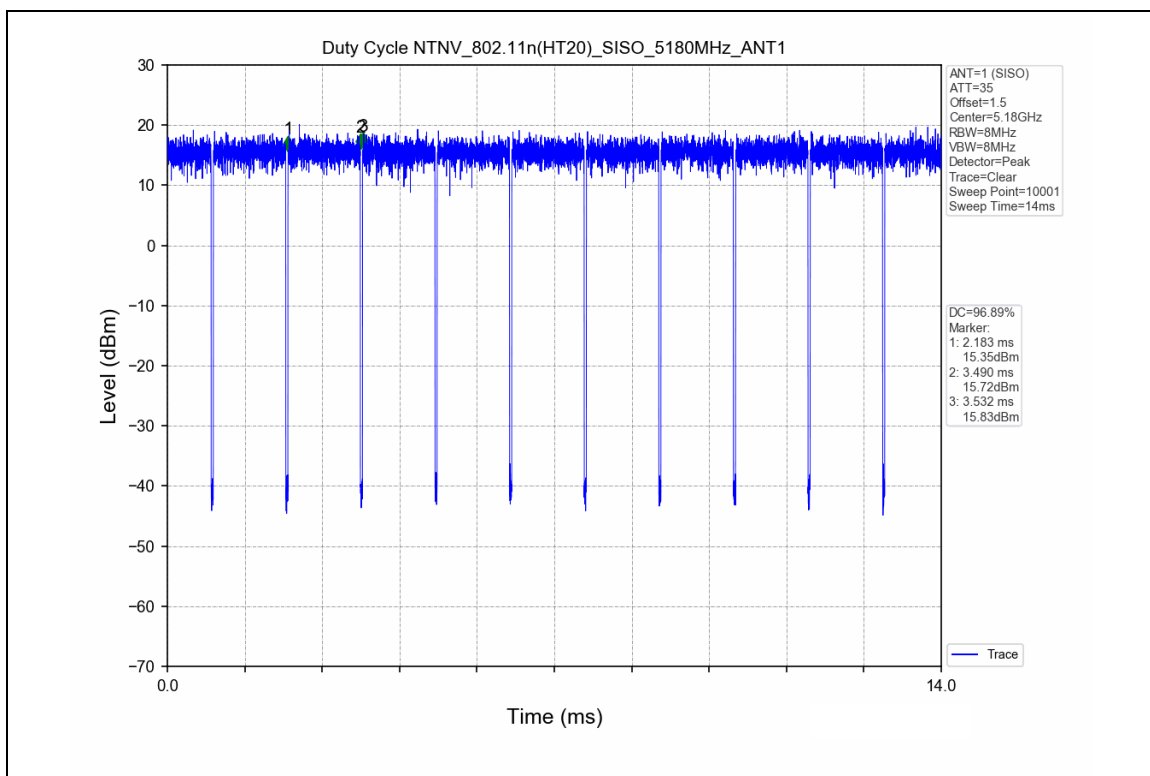
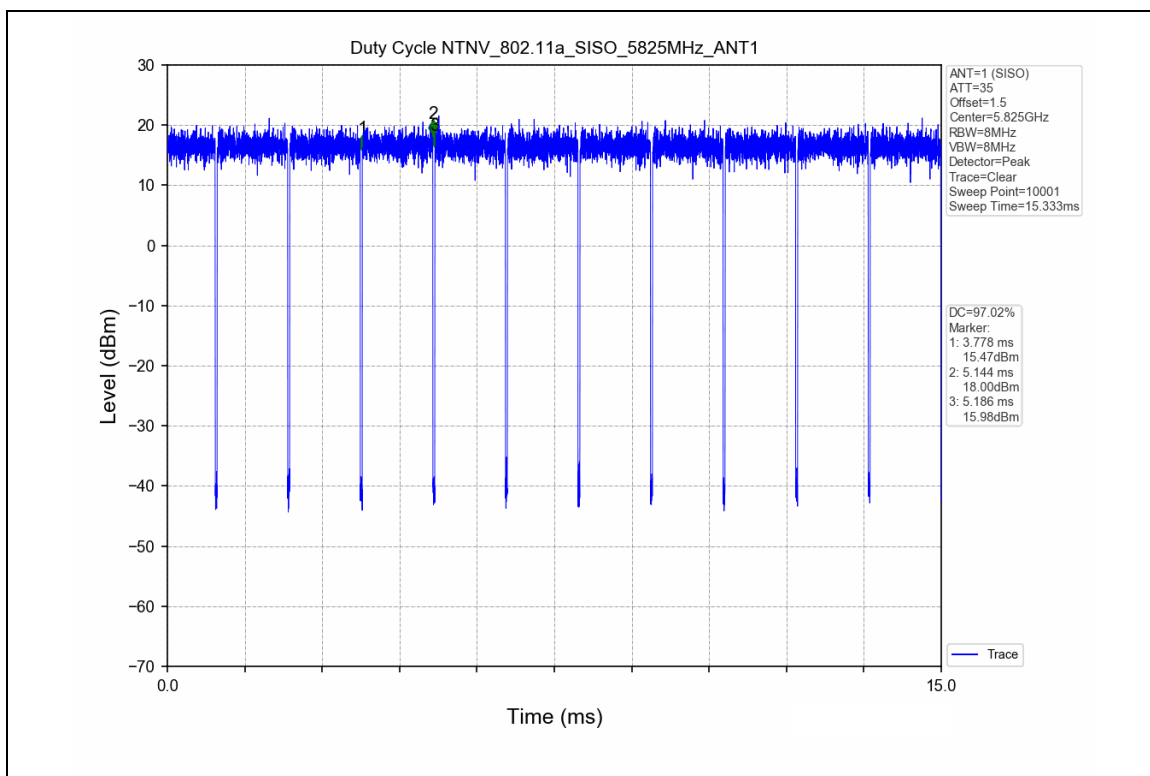


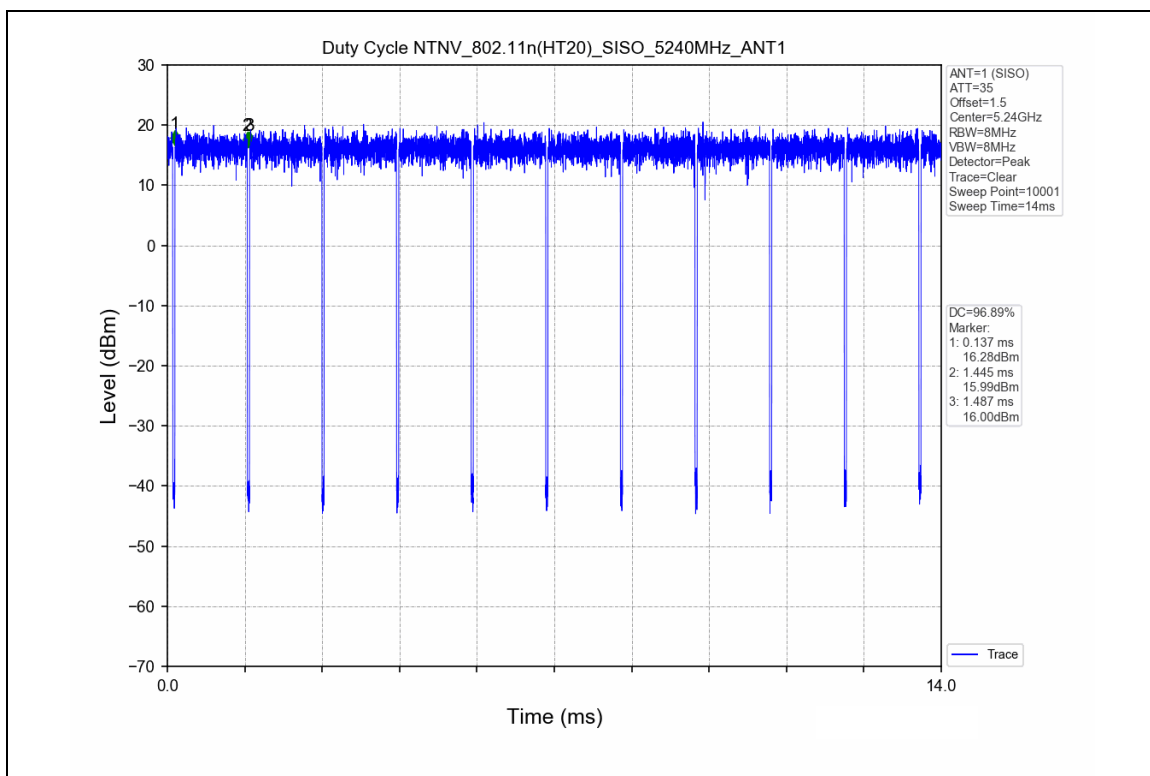
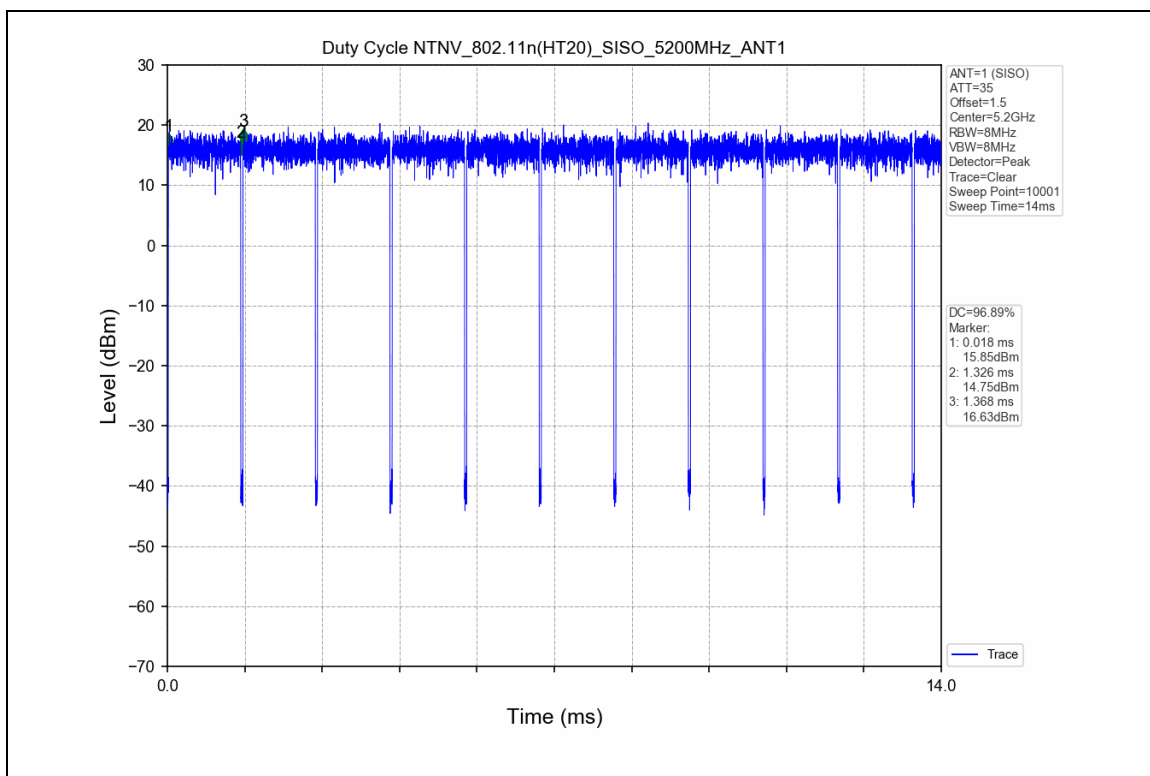


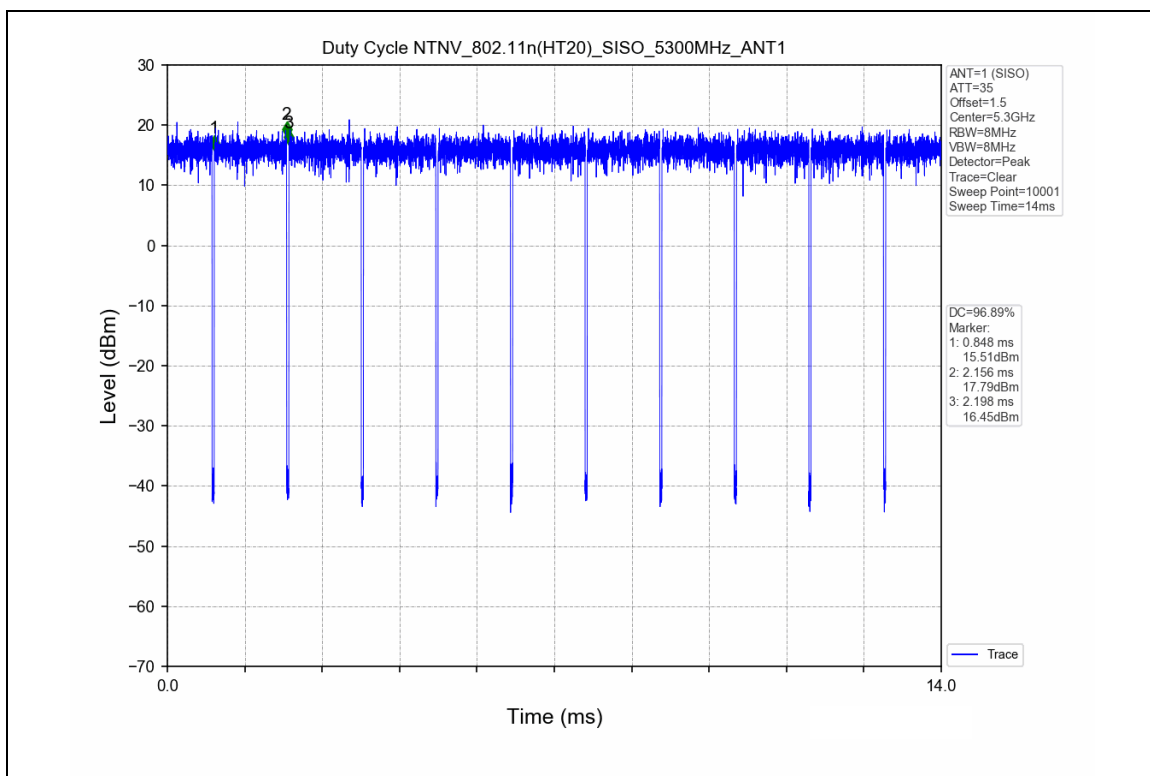
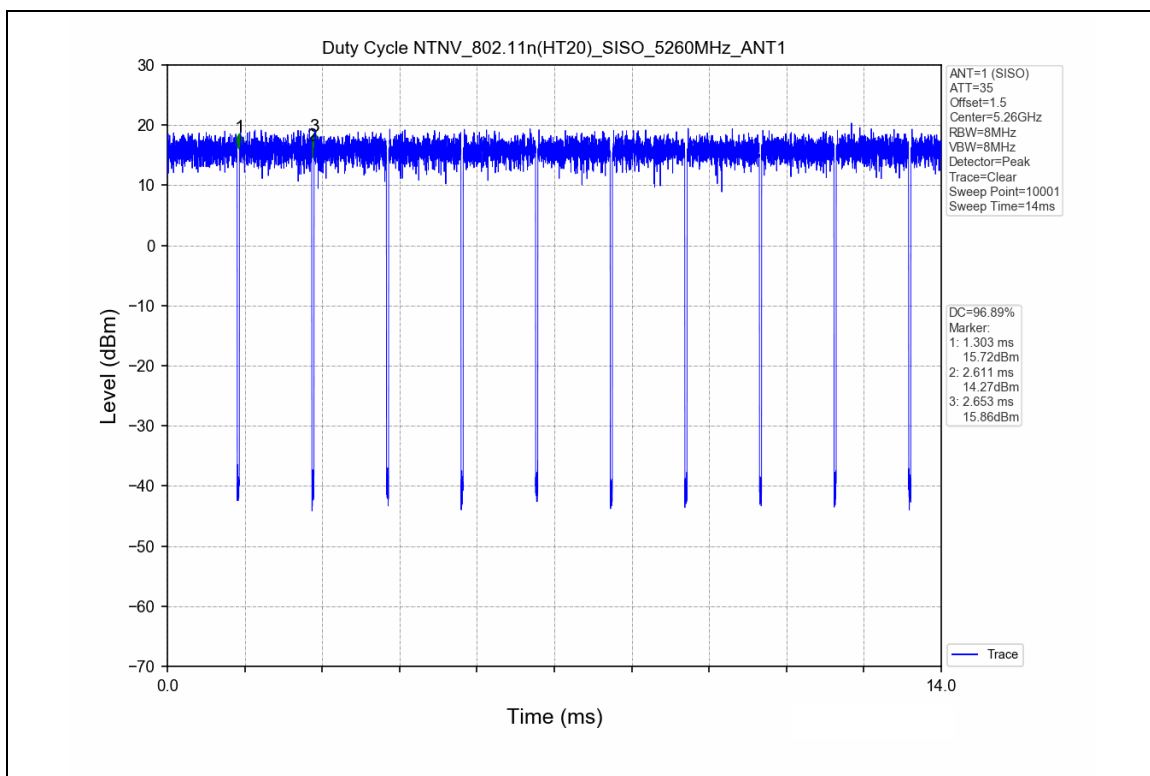


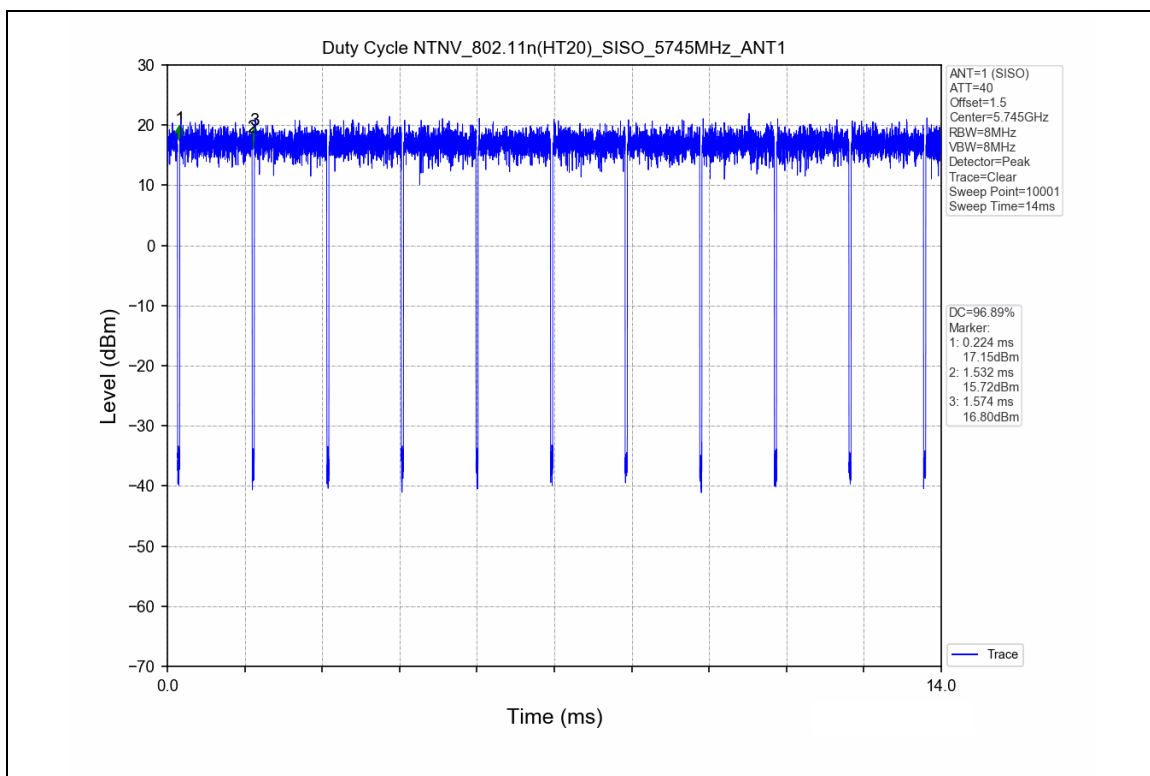
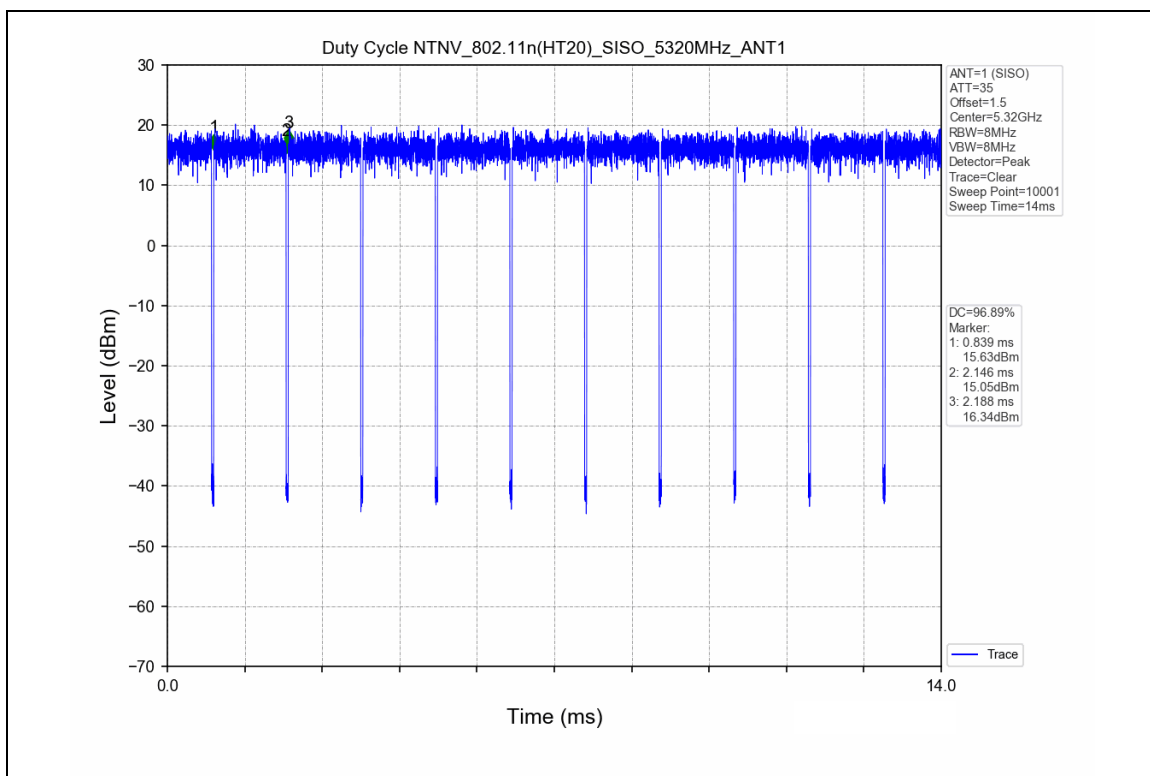


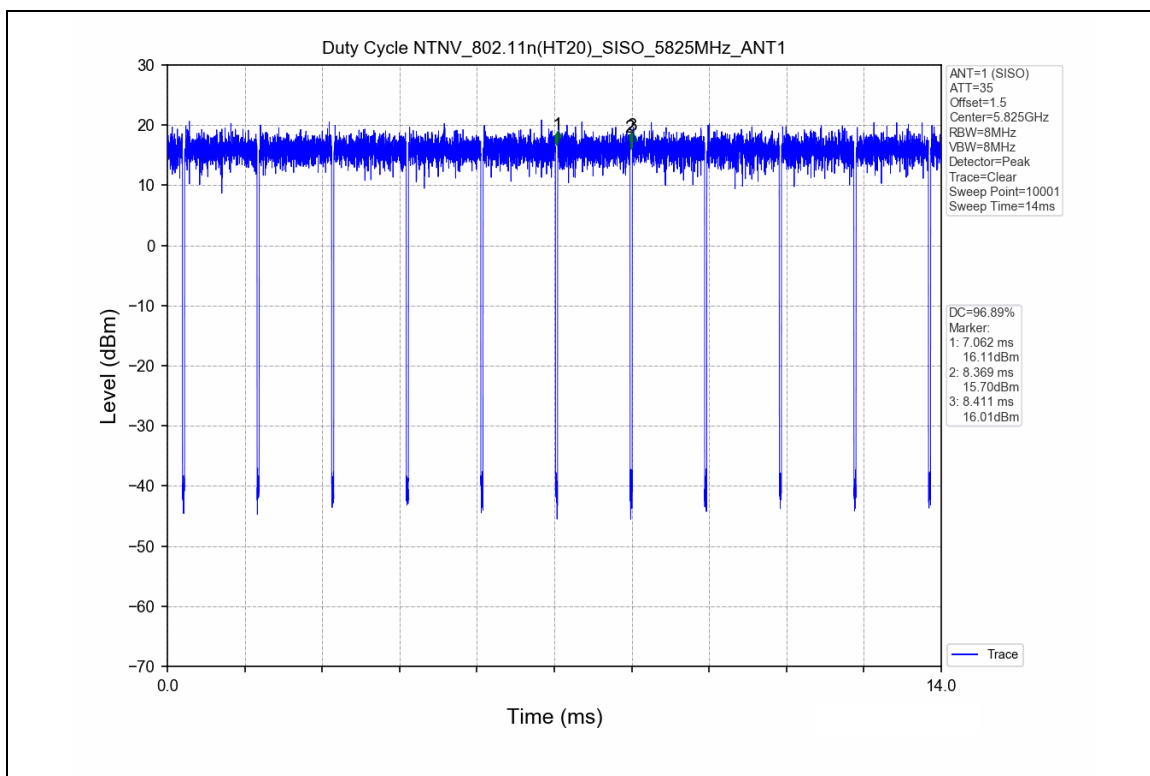
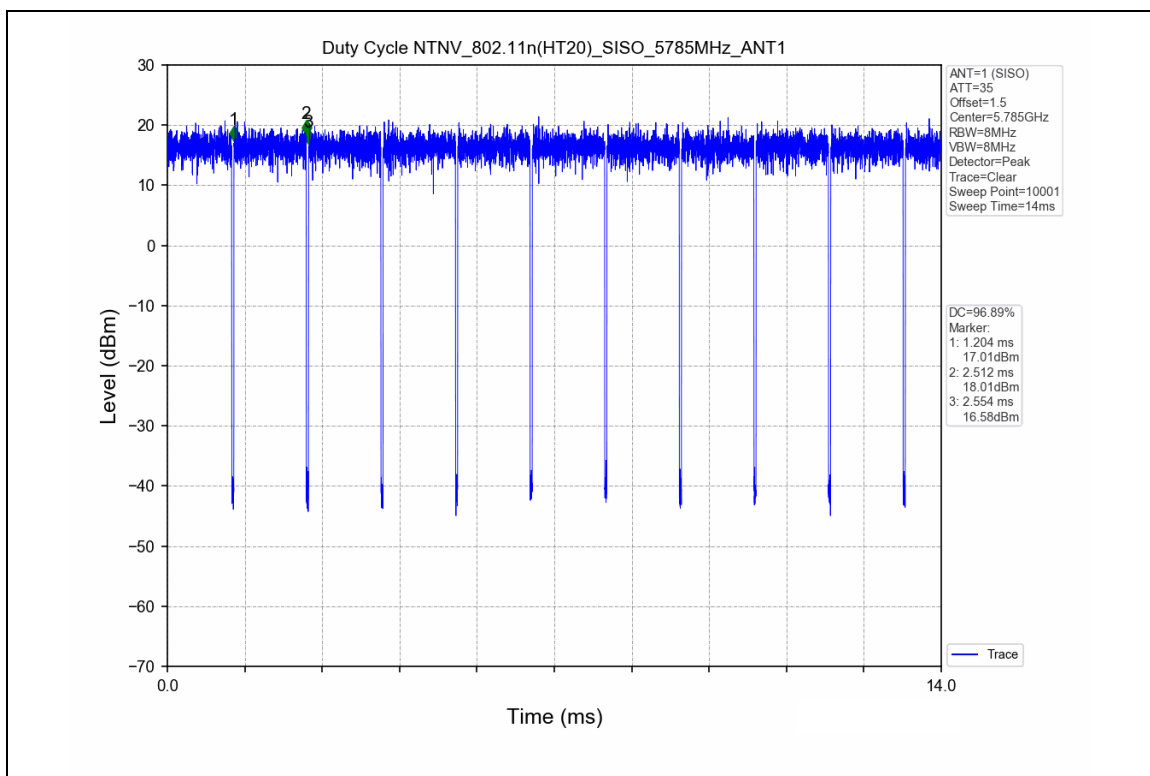


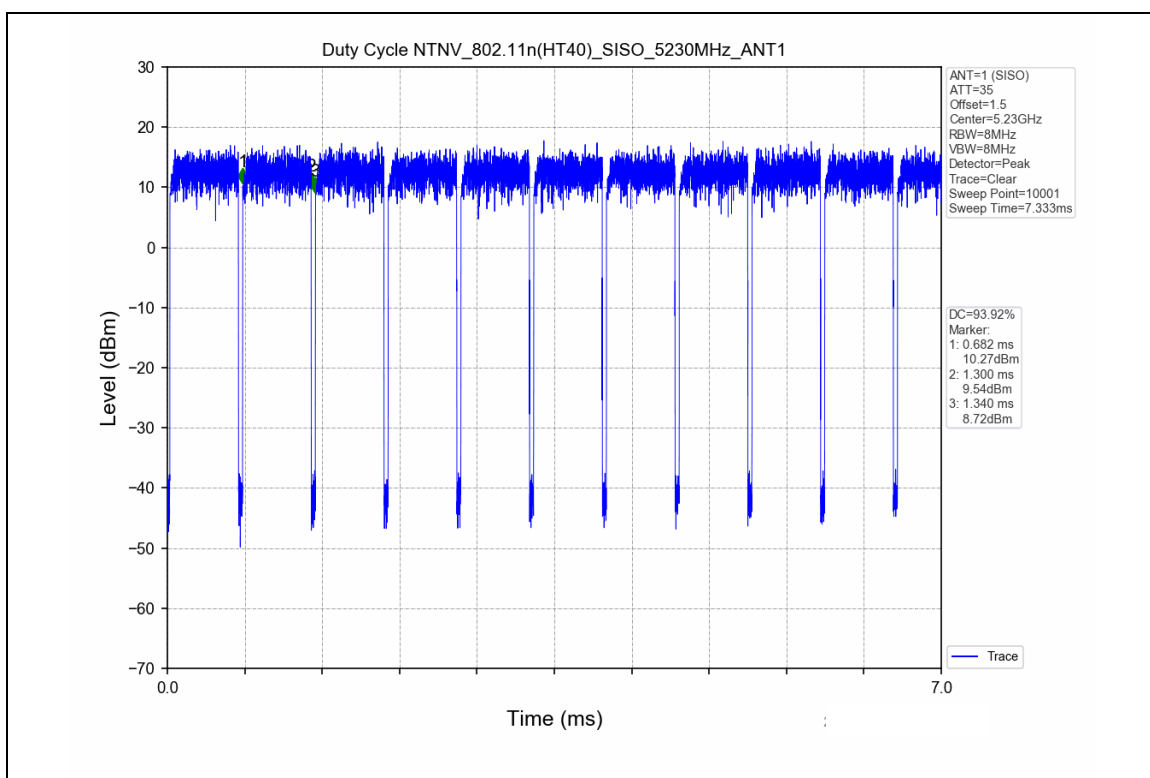
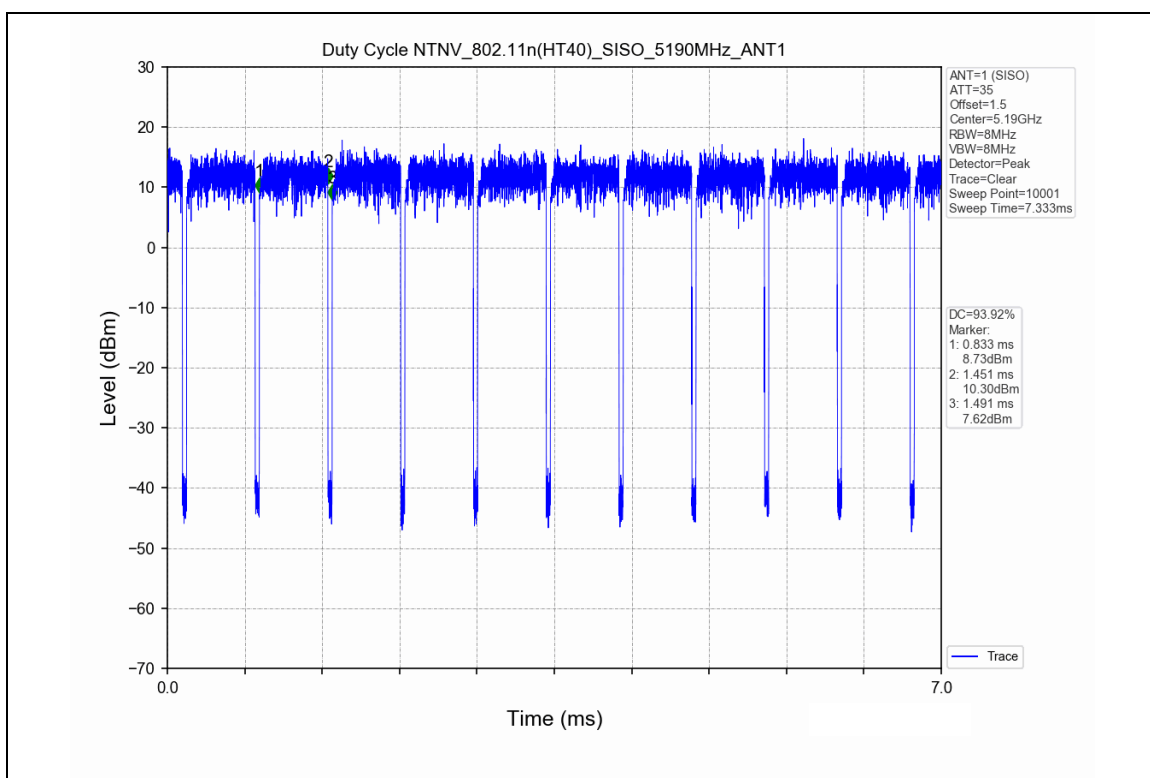


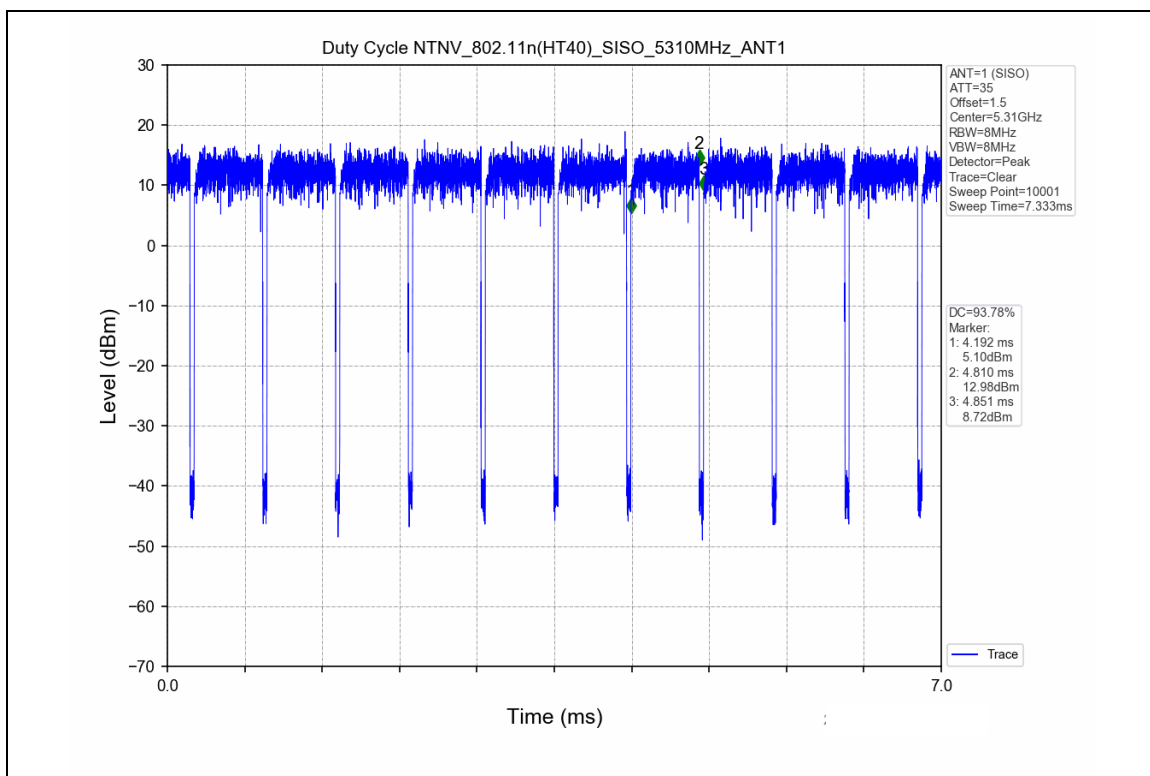
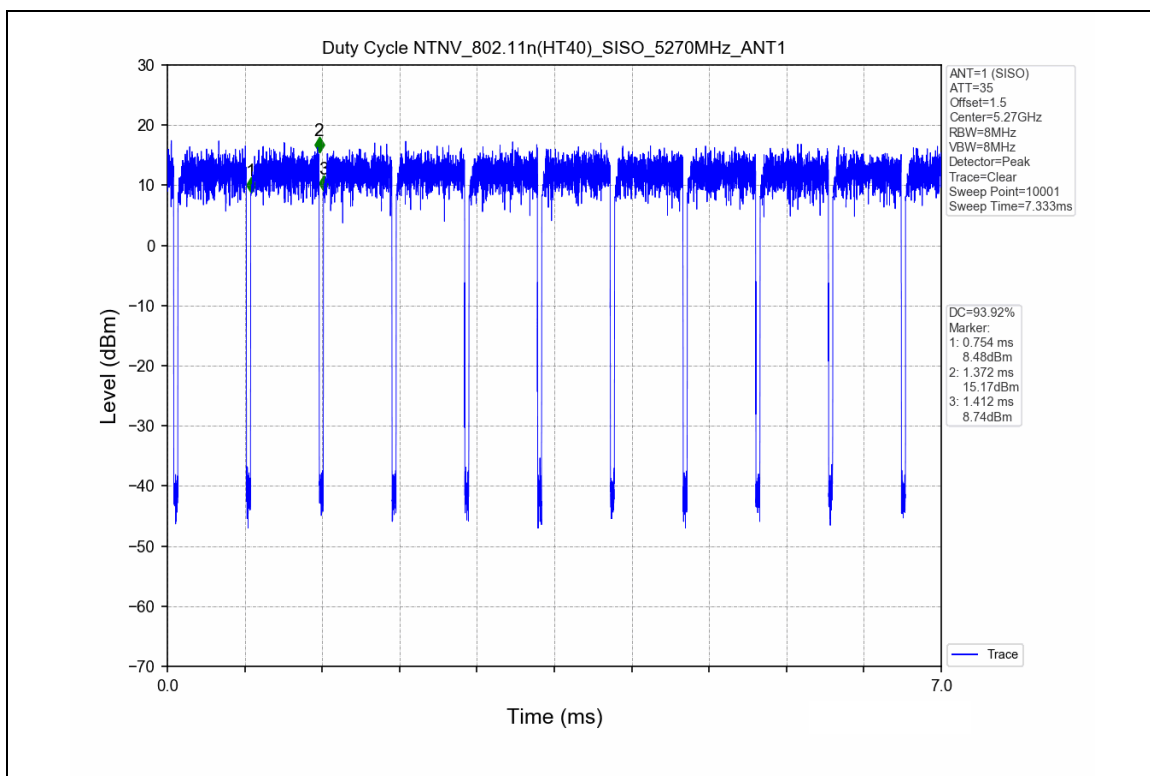


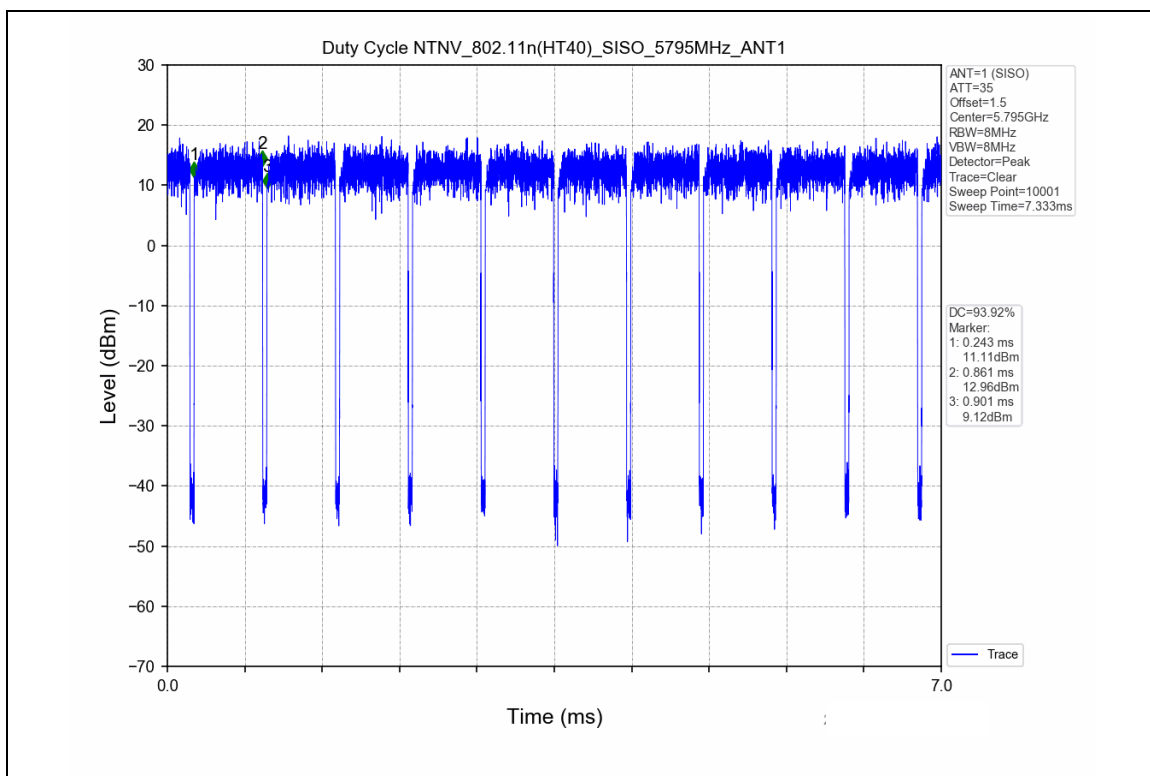
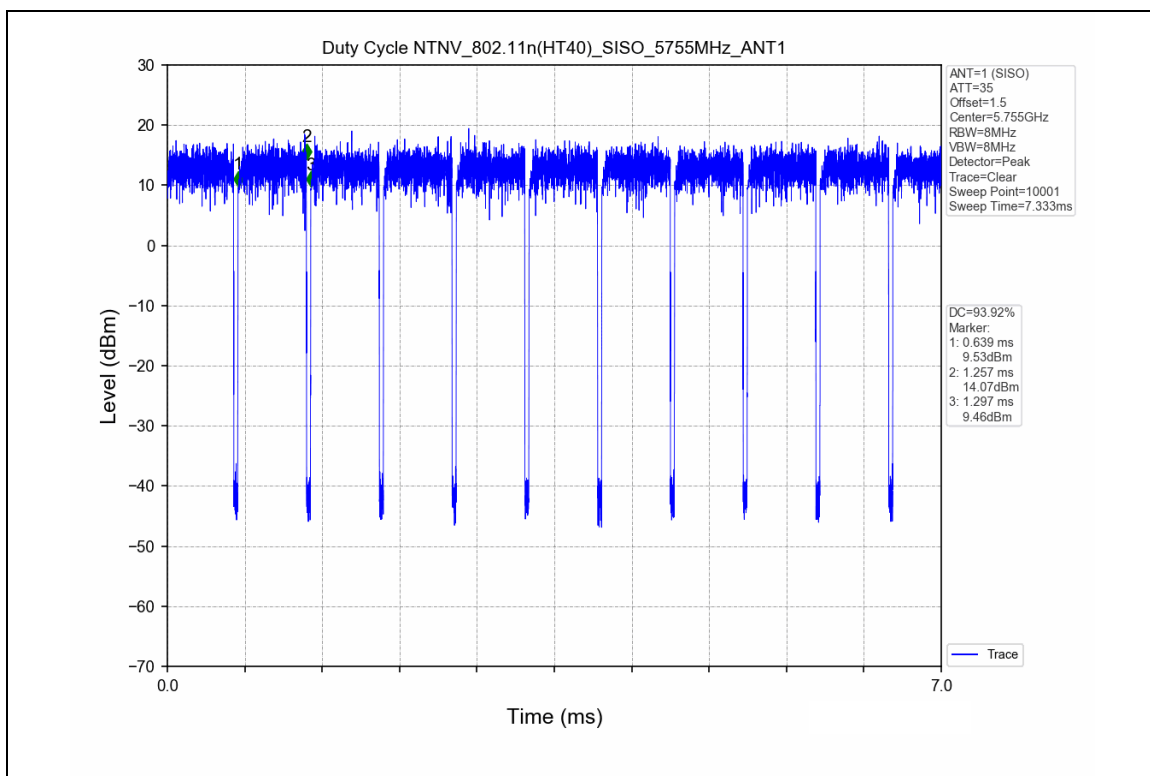


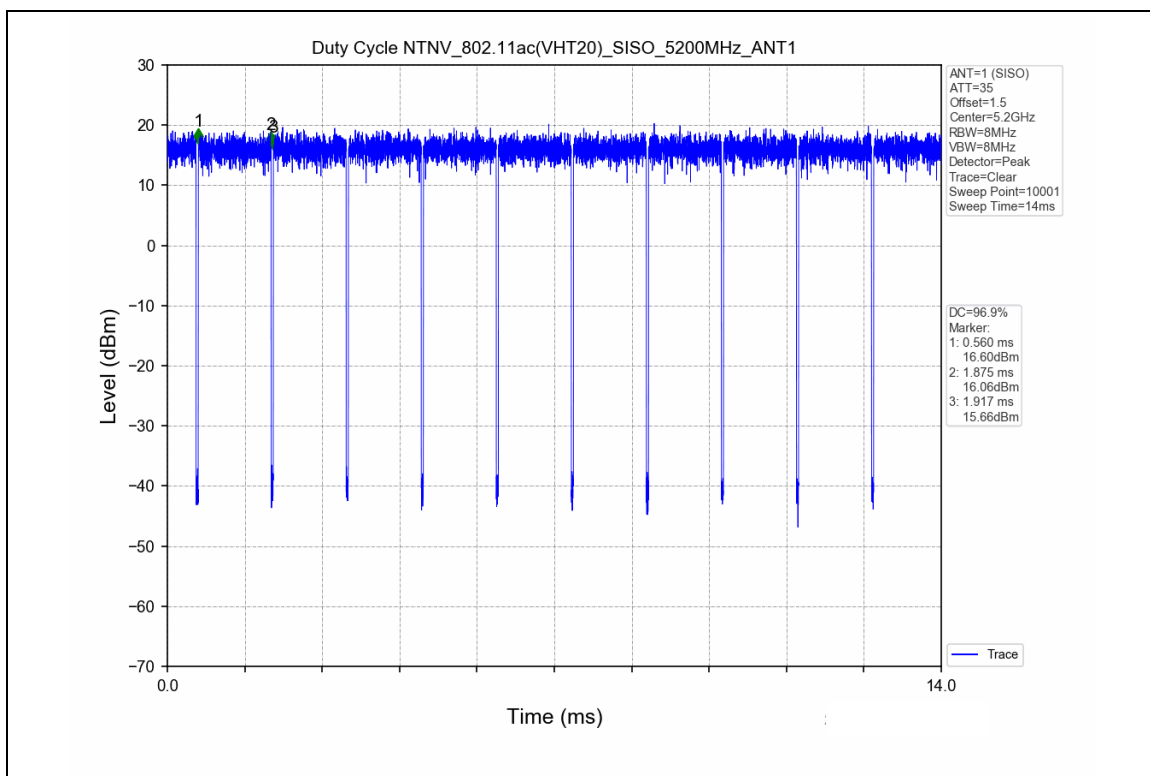
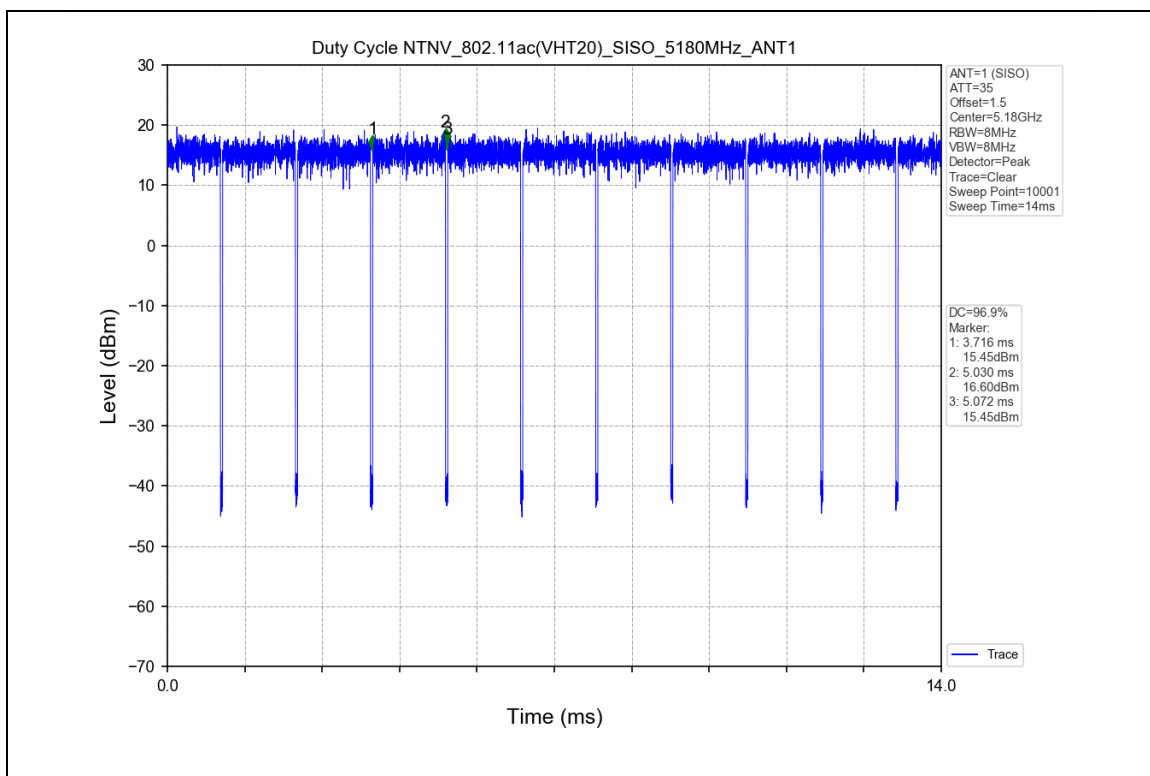


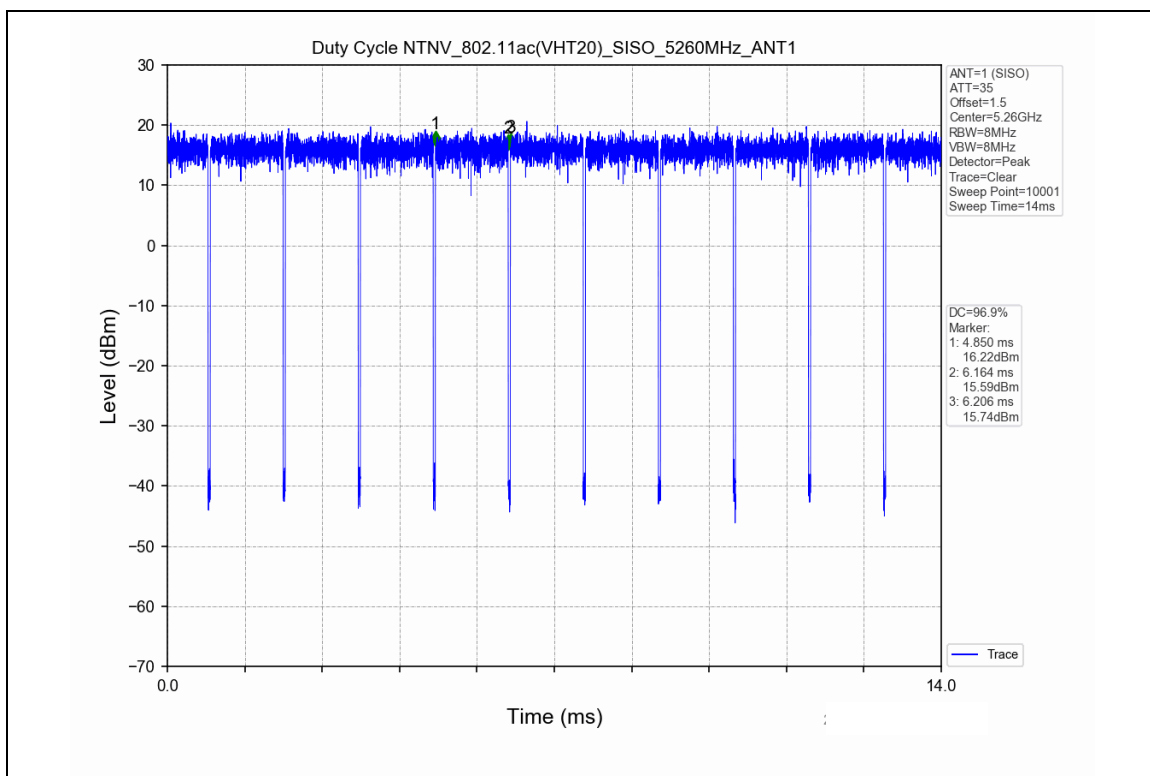
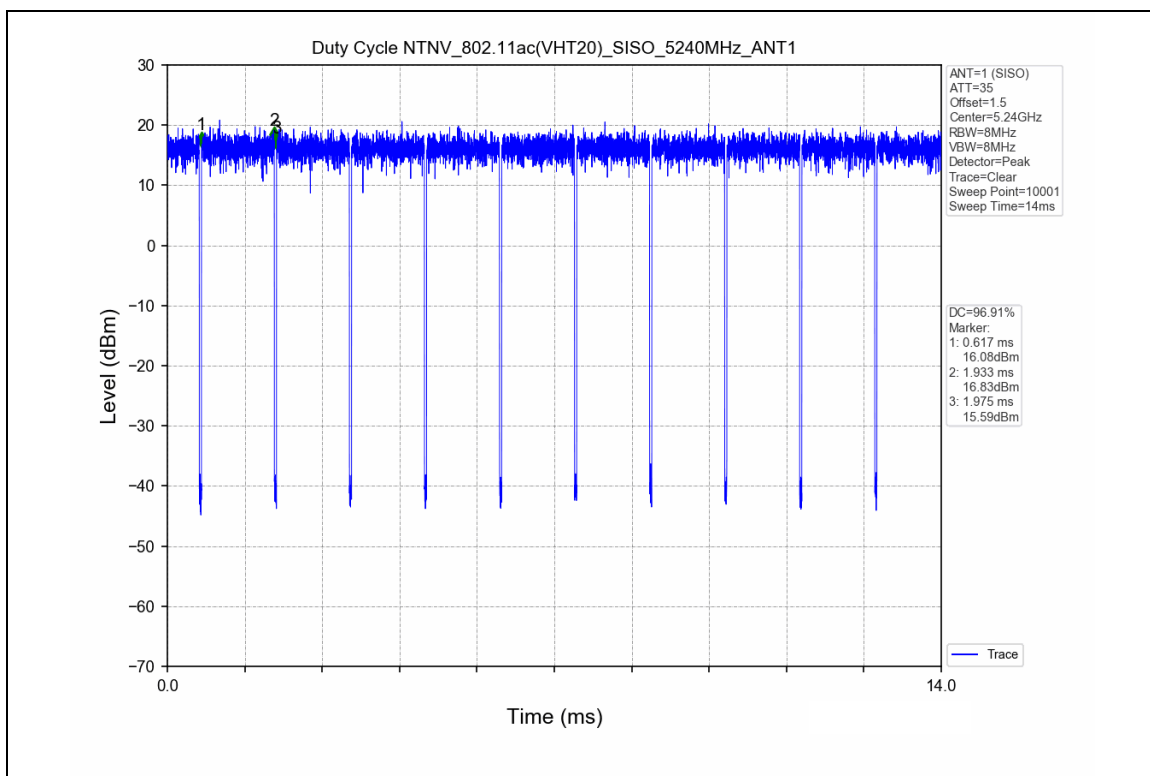


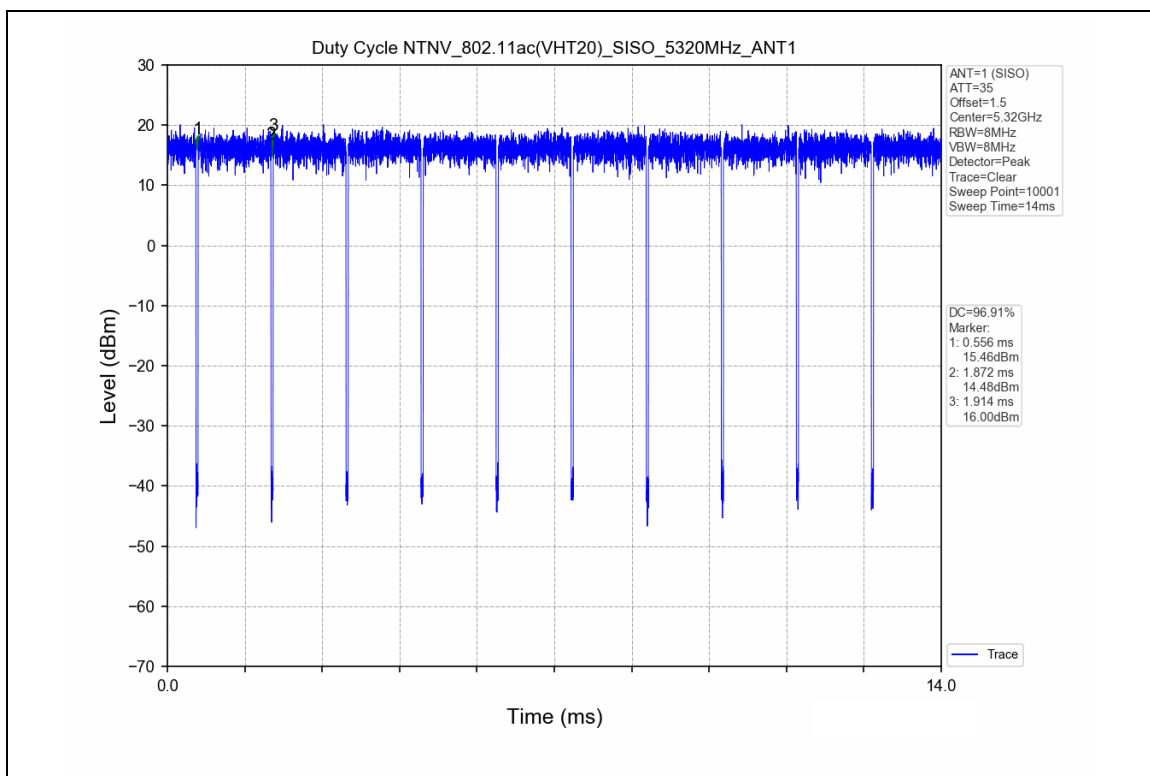
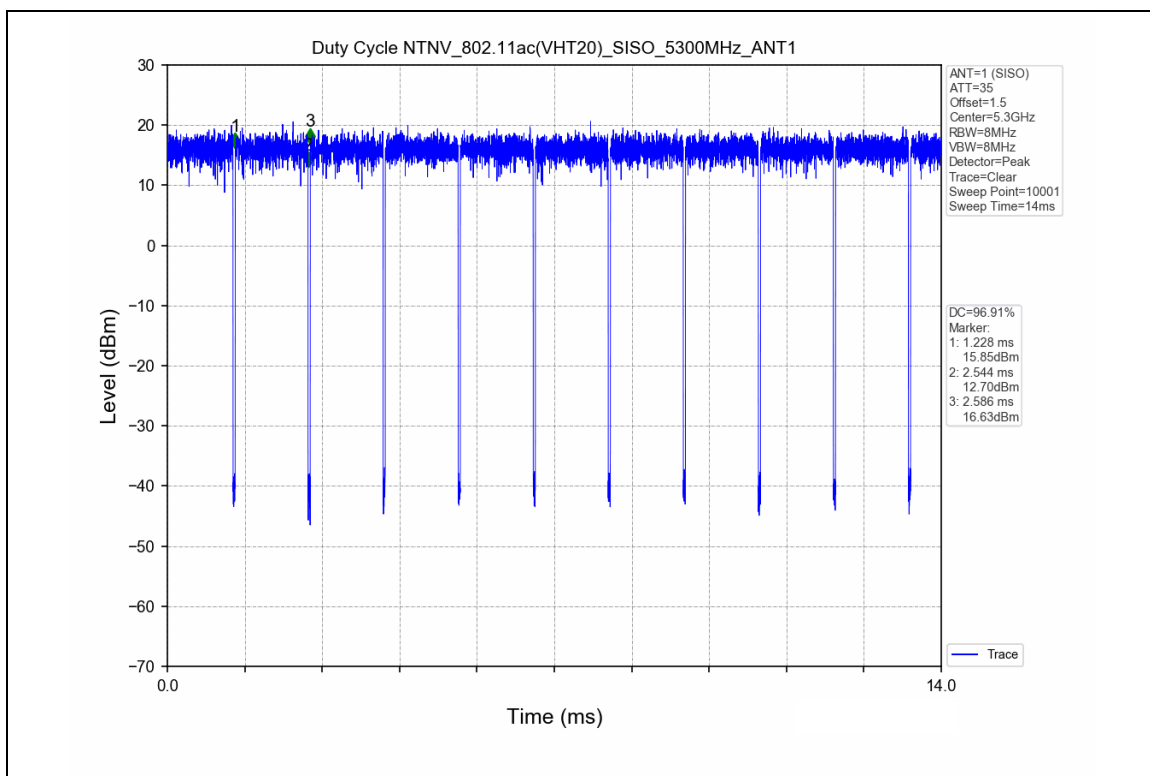


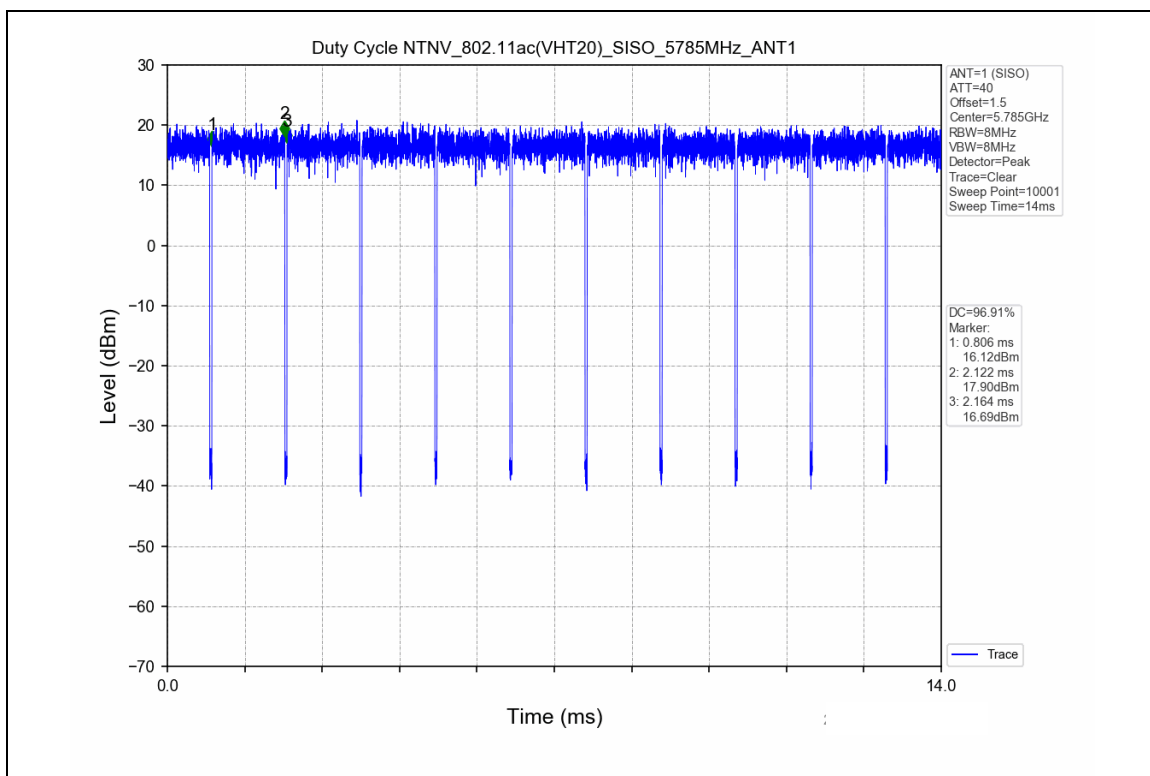
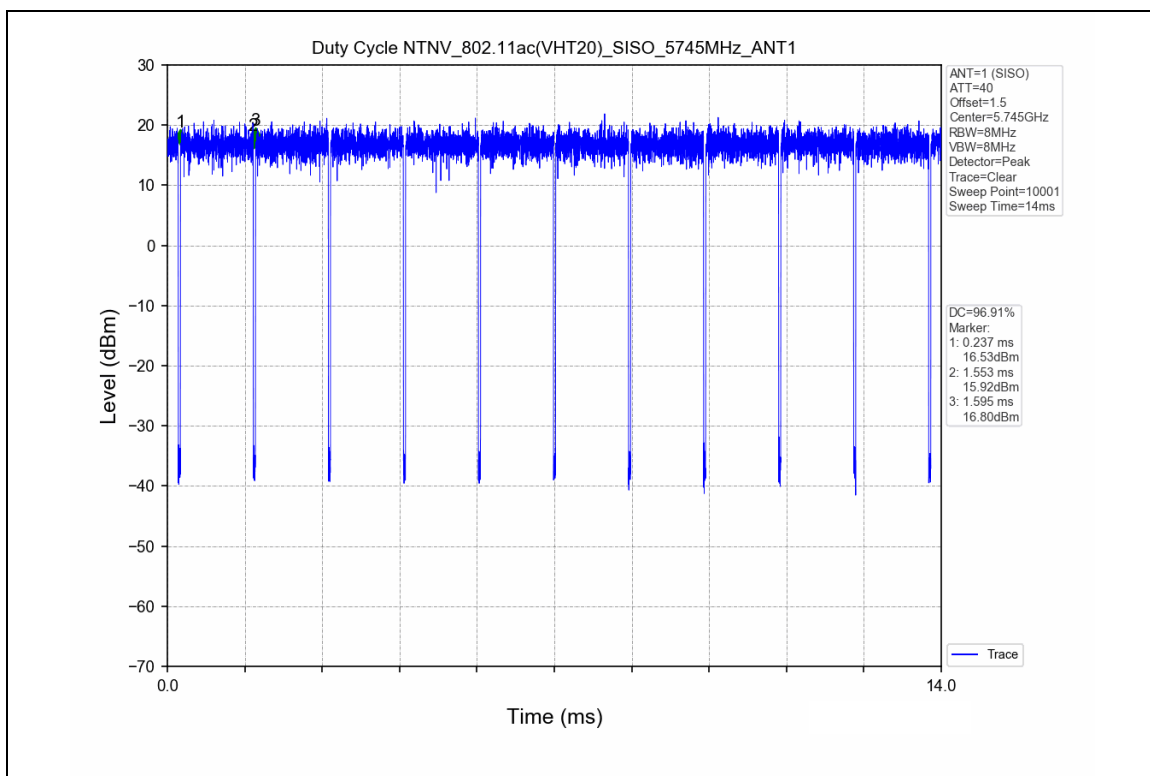


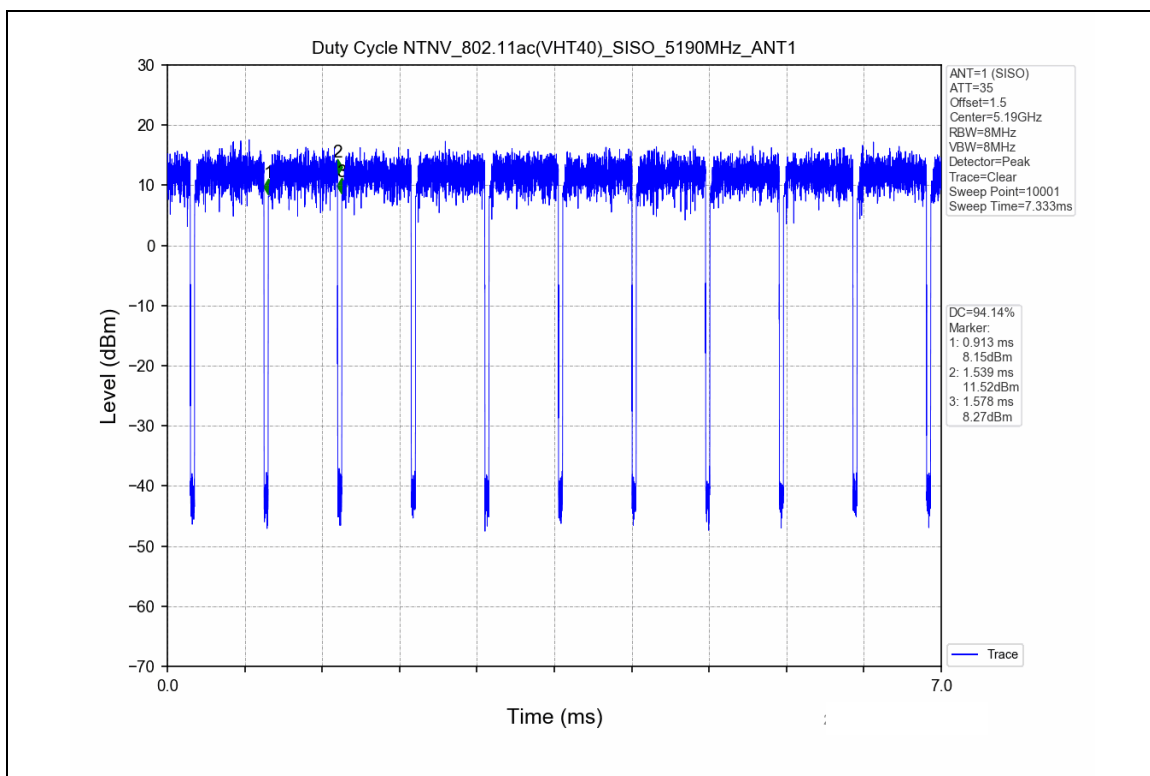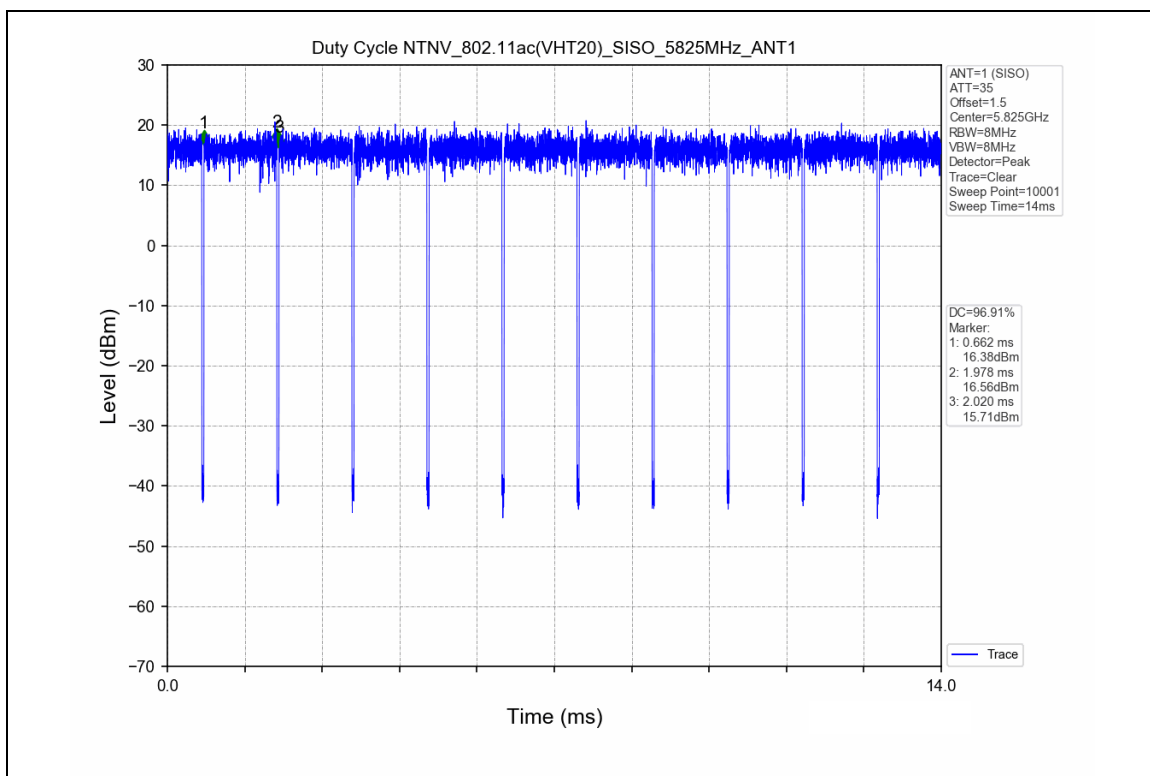

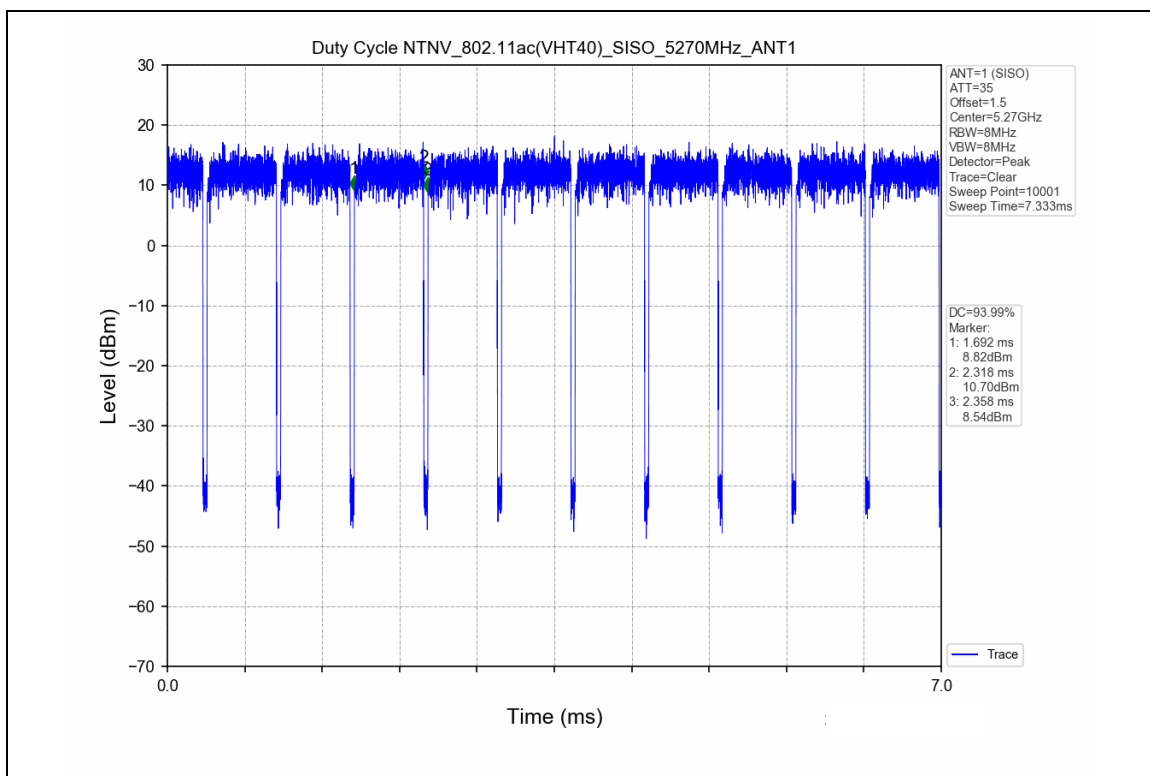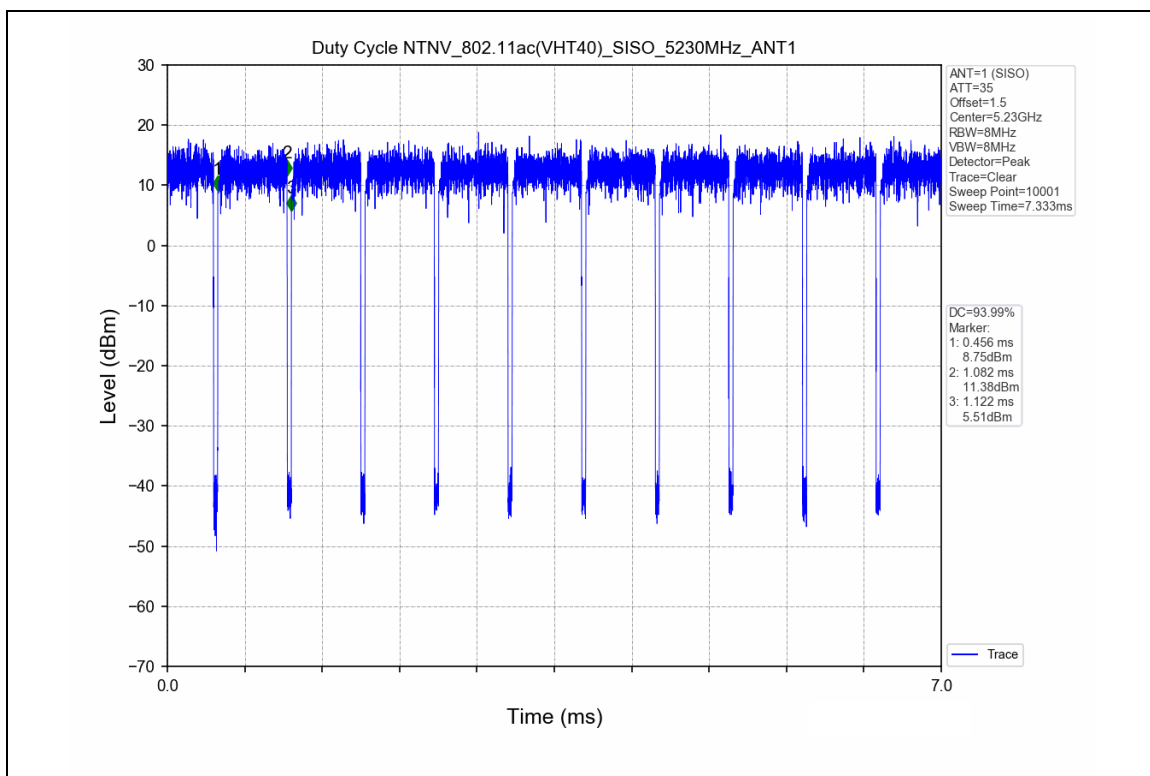

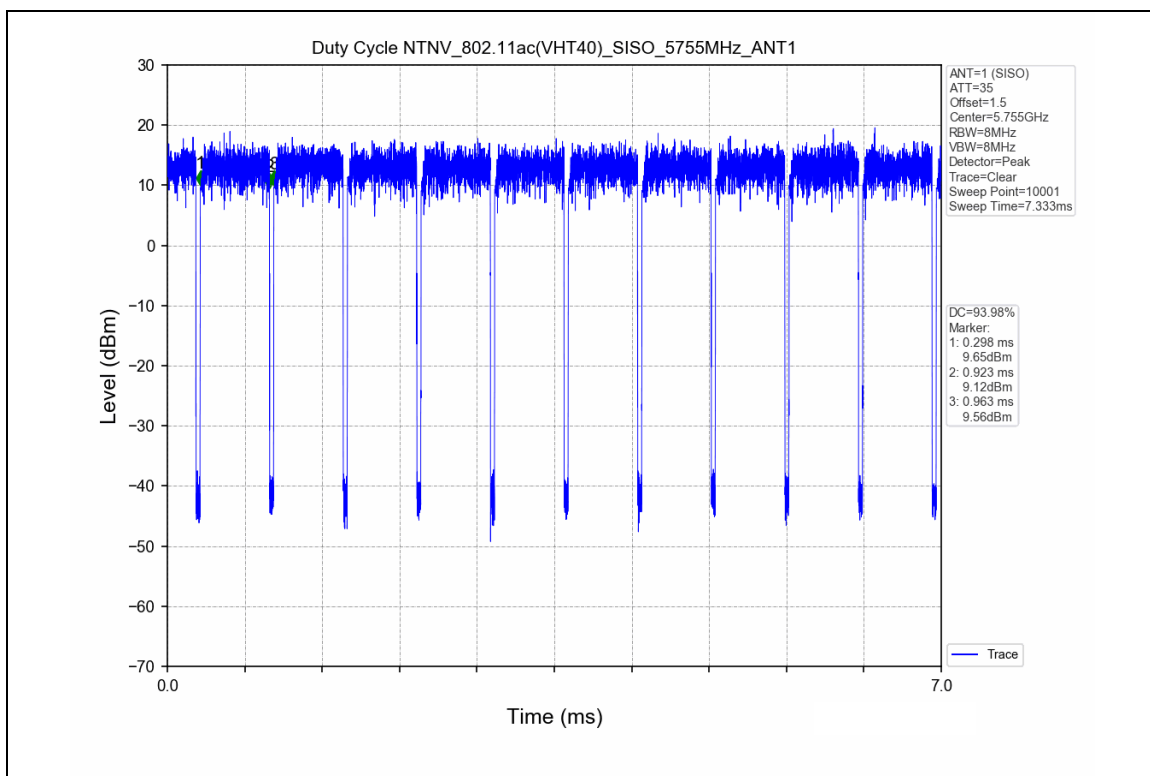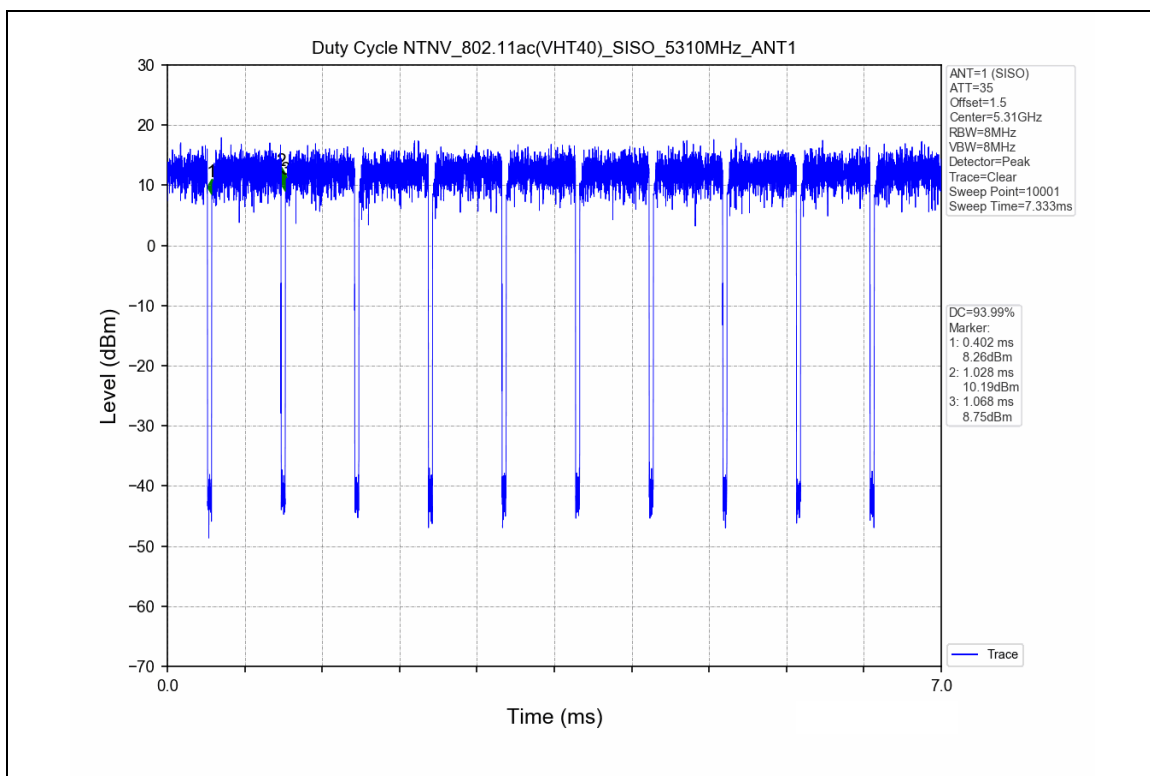

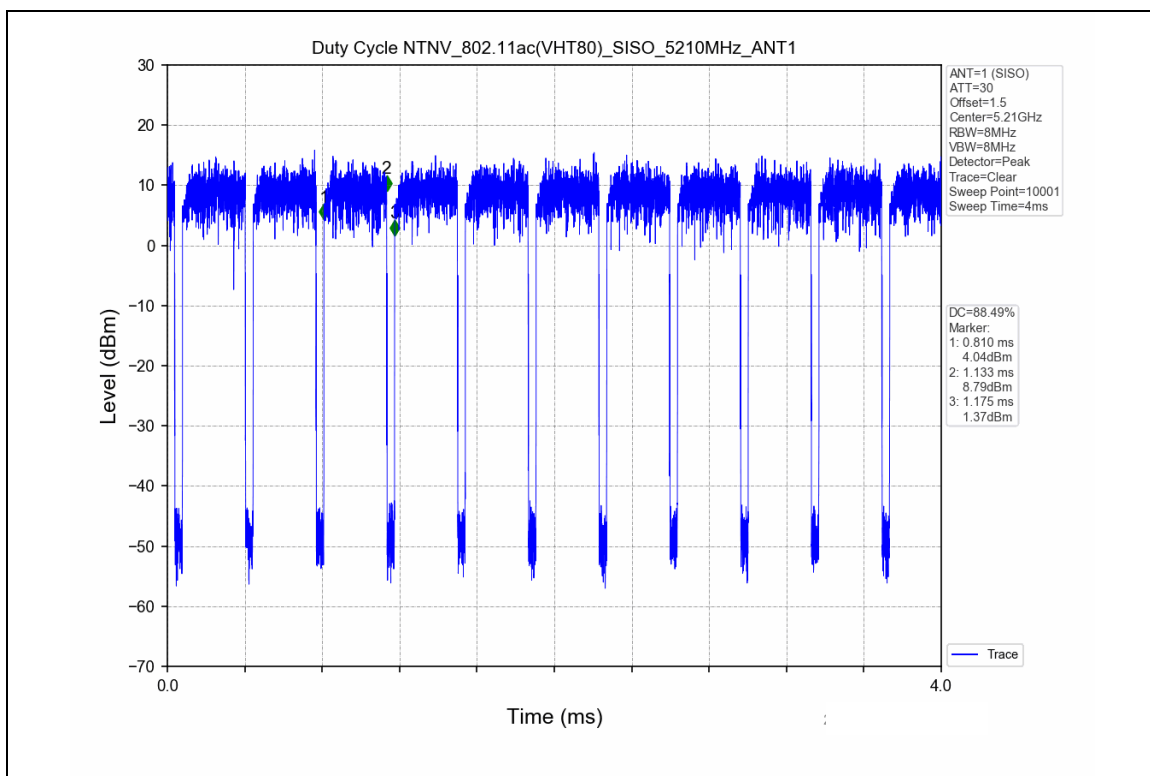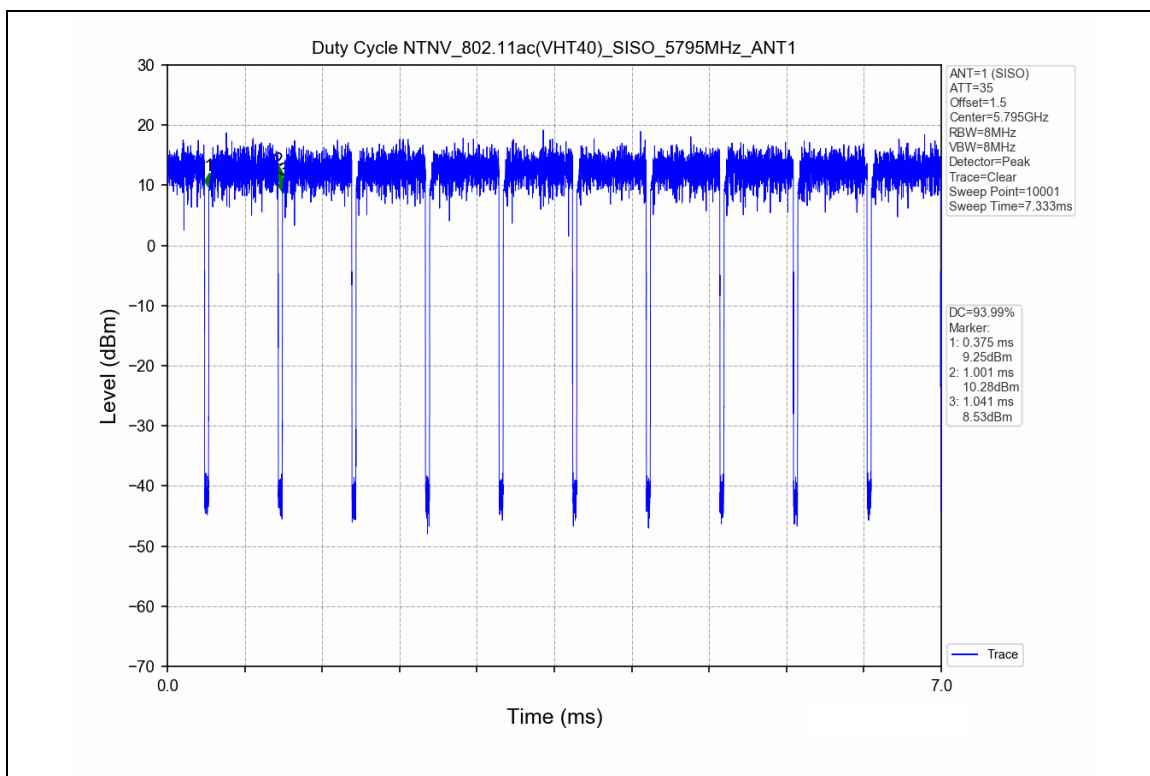

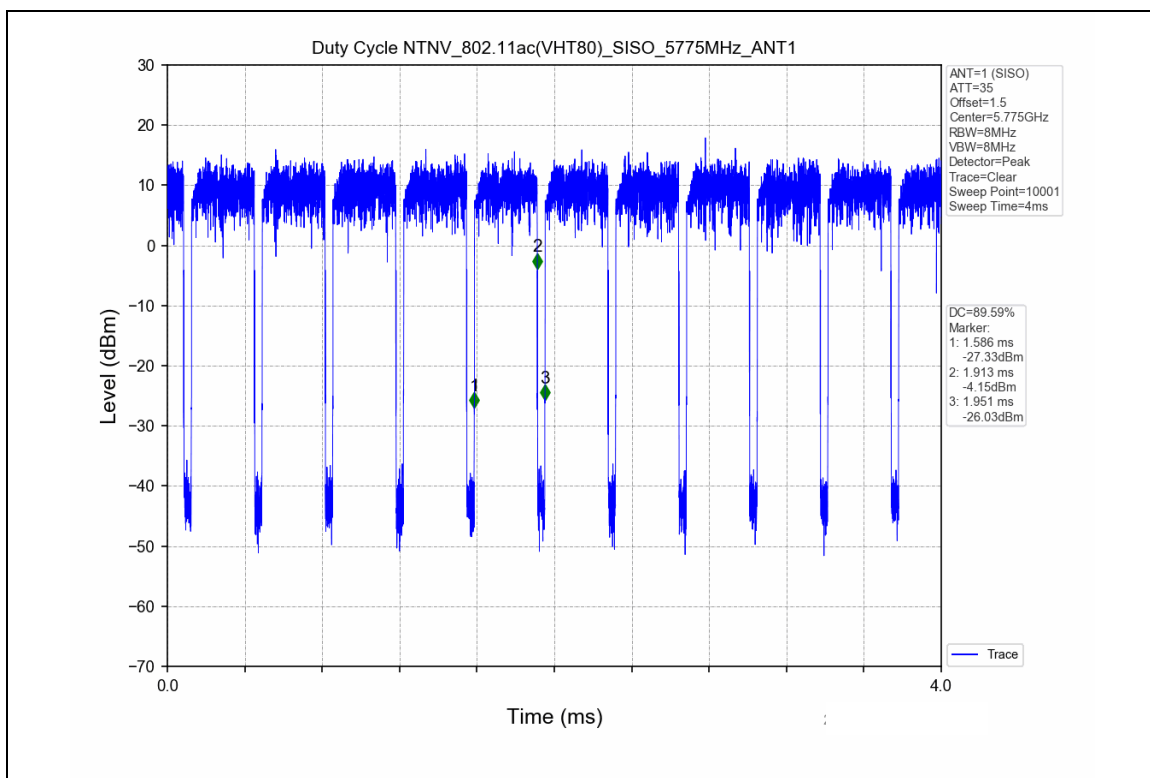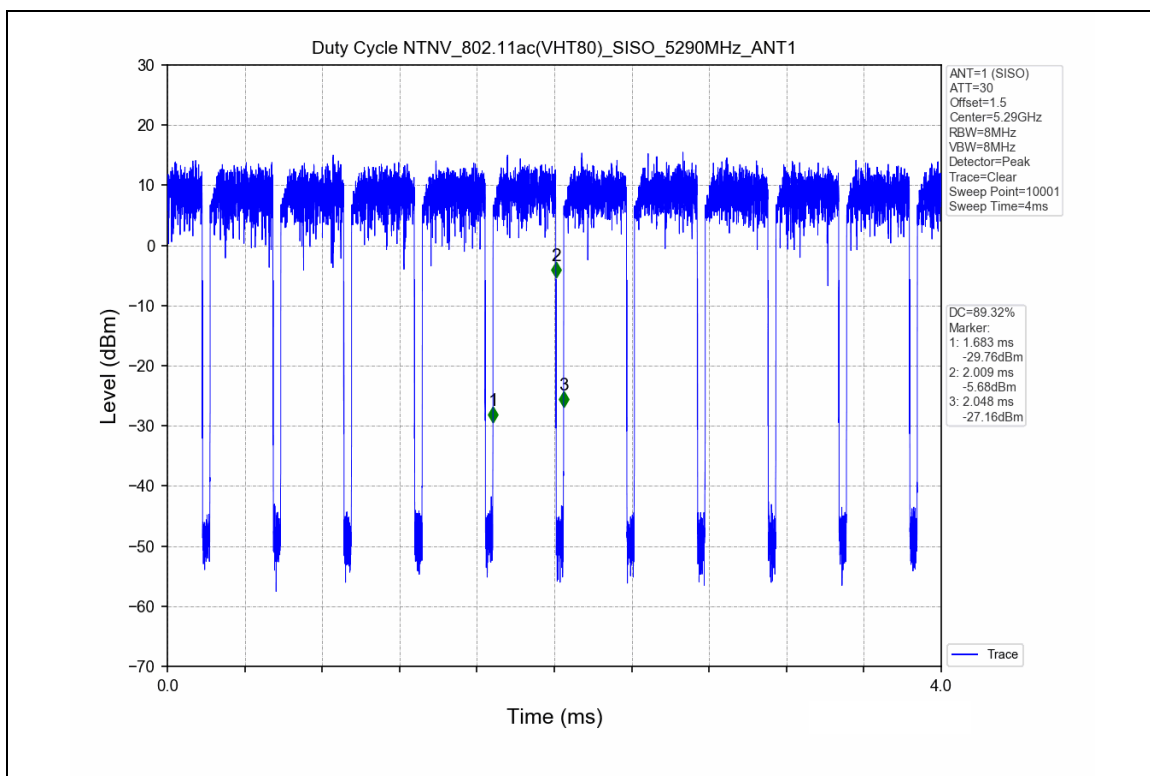

2. Bandwidth

2.1 Test Result

Test Mode	Frequency (MHz)	TX Type	ANT No.	26dB Emission Bandwidth		Verdict
				Test Result (MHz)	Limits (MHz)	
802.11a	5180	SISO	1	29.361	Only for Report Use	PASS
	5200	SISO	1	30.681	Only for Report Use	PASS
	5240	SISO	1	28.695	Only for Report Use	PASS
	5260	SISO	1	30.306	Only for Report Use	PASS
	5300	SISO	1	29.337	Only for Report Use	PASS
802.11n(HT20)	5320	SISO	1	28.398	Only for Report Use	PASS
	5180	SISO	1	29.255	Only for Report Use	PASS
	5200	SISO	1	30.304	Only for Report Use	PASS
	5240	SISO	1	27.778	Only for Report Use	PASS
	5260	SISO	1	26.405	Only for Report Use	PASS
802.11n(HT40)	5300	SISO	1	30.463	Only for Report Use	PASS
	5320	SISO	1	29.978	Only for Report Use	PASS
	5190	SISO	1	58.418	Only for Report Use	PASS
	5230	SISO	1	69.722	Only for Report Use	PASS
	5270	SISO	1	61.060	Only for Report Use	PASS
802.11ac(VHT20)	5310	SISO	1	58.010	Only for Report Use	PASS
	5180	SISO	1	28.392	Only for Report Use	PASS
	5200	SISO	1	28.671	Only for Report Use	PASS
	5240	SISO	1	30.822	Only for Report Use	PASS
	5260	SISO	1	27.270	Only for Report Use	PASS
802.11ac(VHT40)	5300	SISO	1	27.471	Only for Report Use	PASS
	5320	SISO	1	24.555	Only for Report Use	PASS
	5190	SISO	1	60.459	Only for Report Use	PASS
	5230	SISO	1	62.941	Only for Report Use	PASS
	5270	SISO	1	66.978	Only for Report Use	PASS
802.11ac(VHT80)	5310	SISO	1	46.985	Only for Report Use	PASS
	5210	SISO	1	117.745	Only for Report Use	PASS
	5290	SISO	1	113.218	Only for Report Use	PASS

Test Mode	Frequency (MHz)	TX Type	ANT No.	6dB Emission Bandwidth		Verdict
				Test Result (MHz)	Limits (MHz)	
802.11a	5745	SISO	1	16.341	≥0.5	PASS
	5785	SISO	1	16.348	≥0.5	PASS
	5825	SISO	1	16.358	≥0.5	PASS
802.11n(HT20)	5745	SISO	1	16.944	≥0.5	PASS
	5785	SISO	1	16.948	≥0.5	PASS
	5825	SISO	1	17.207	≥0.5	PASS
802.11n(HT40)	5755	SISO	1	35.548	≥0.5	PASS
	5795	SISO	1	35.664	≥0.5	PASS
802.11ac(VHT20)	5745	SISO	1	17.536	≥0.5	PASS
	5785	SISO	1	17.556	≥0.5	PASS
	5825	SISO	1	16.682	≥0.5	PASS
802.11ac(VHT40)	5755	SISO	1	35.945	≥0.5	PASS
	5795	SISO	1	35.536	≥0.5	PASS
802.11ac(VHT80)	5775	SISO	1	75.500	≥0.5	PASS

Test Mode	Frequency (MHz)	TX Type	ANT No.	99% Occupied Bandwidth	
				Test Result (MHz)	
802.11a	5180	SISO	1	17.591	Only for Report Use
	5200	SISO	1	17.661	Only for Report Use



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

	5240	SISO	1	17.923	Only for Report Use
	5260	SISO	1	17.411	Only for Report Use
	5300	SISO	1	17.609	Only for Report Use
	5320	SISO	1	17.563	Only for Report Use
	5745	SISO	1	17.119	Only for Report Use
	5785	SISO	1	17.248	Only for Report Use
	5825	SISO	1	17.184	Only for Report Use
	5180	SISO	1	18.419	Only for Report Use
802.11n(HT20)	5200	SISO	1	18.410	Only for Report Use
	5240	SISO	1	18.369	Only for Report Use
	5260	SISO	1	18.276	Only for Report Use
	5300	SISO	1	18.322	Only for Report Use
	5320	SISO	1	18.288	Only for Report Use
	5745	SISO	1	18.092	Only for Report Use
	5785	SISO	1	18.124	Only for Report Use
	5825	SISO	1	18.126	Only for Report Use
802.11n(HT40)	5190	SISO	1	37.007	Only for Report Use
	5230	SISO	1	36.888	Only for Report Use
	5270	SISO	1	36.924	Only for Report Use
	5310	SISO	1	36.814	Only for Report Use
	5755	SISO	1	36.789	Only for Report Use
	5795	SISO	1	36.675	Only for Report Use
802.11ac(VHT20)	5180	SISO	1	18.461	Only for Report Use
	5200	SISO	1	18.351	Only for Report Use
	5240	SISO	1	18.344	Only for Report Use
	5260	SISO	1	18.294	Only for Report Use
	5300	SISO	1	18.288	Only for Report Use
	5320	SISO	1	18.356	Only for Report Use
	5745	SISO	1	18.119	Only for Report Use
	5785	SISO	1	18.135	Only for Report Use
802.11ac(VHT40)	5825	SISO	1	18.220	Only for Report Use
	5190	SISO	1	37.223	Only for Report Use
	5230	SISO	1	37.062	Only for Report Use
	5270	SISO	1	37.053	Only for Report Use
	5310	SISO	1	36.894	Only for Report Use
	5755	SISO	1	36.664	Only for Report Use
802.11ac(VHT80)	5795	SISO	1	36.821	Only for Report Use
	5210	SISO	1	75.956	Only for Report Use
	5290	SISO	1	75.993	Only for Report Use
	5775	SISO	1	75.886	Only for Report Use

2.2 Test Graph - Emission Bandwidth

