FCC Test Report

Report No.: AGC09657170301FE03

FCC ID : 2ALID-Q3

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Wireless headset

BRAND NAME : N/A

MODEL NAME : Q3

CLIENT: KONCEN ELECTRONICS COMPANY LIMITED

DATE OF ISSUE : Mar.16, 2017

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC09657170301FE03 Page 2 of 57

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar.16, 2017	Valid	Original Report

TABLE OF CONTENTS

1 VERIFICATION OF CONFORMITY	4
2 GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3 MEASUREMENT UNCERTAINTY	6
4 DESCRIPTION OF TEST MODES	6
5 SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6 TEST FACILITY	9
7 TEST METHOD	9
8 TEST EQUIPMENT LIST	
9 RADIATED EMISSION	11
9.1TEST LIMIT	11
9.2. MEASUREMENT PROCEDURE	12
9.3. TEST SETUP	14
9.4. TEST RESULT	16
10 BAND EDGE EMISSION	31
10.1. MEASUREMENT PROCEDURE	
10.2 TEST SETUP	31
10.3 RADIATED TEST RESULT	
11 20DB BANDWIDTH	
11.1. MEASUREMENT PROCEDURE	36
11.2. TEST SET-UP	36
11.3. LIMITS AND MEASUREMENT RESULTS	36
12 FCC LINE CONDUCTED EMISSION TEST	43
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	43
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	44
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	44
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	45
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX B: PHOTOGRAPHS OF EUT	50

Page 4 of 57

1. VERIFICATION OF CONFORMITY

Applicant	KONCEN ELECTRONICS COMPANY LIMITED		
Address	8/F Building B, No. 3 1st Road, Shangxue Industrial Park, Bantian, Longgang District, Shenzhen, China		
Manufacturer	KONCEN ELECTRONICS COMPANY LIMITED		
Address	8/F Building B, No. 3 1st Road, Shangxue Industrial Park, Bantian, Longgang District, Shenzhen, China		
Product Designation	Wireless headset		
Brand Name	N/A		
Test Model	Q3		
Date of test	Mar.09, 2017 to Mar.14, 2017		
Deviation	None		
Condition of Test Sample	Normal		
Report Template	AGCRT-US-BR/RF		

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By	Honry Zhang	
	Henry Zhang(Zhang Zhuorui)	Mar.14, 2017
Reviewed By	Forest ce	
	Forrest Lei(Lei Yonggang)	Mar.16, 2017
Approved By	Solya shong	
	Solger Zhang(Zhang Hongyi) Authorized Officer	Mar.16, 2017

Page 5 of 57

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

2.402 GHz to 2.480GHz		
3.52dBm(Max EIRP Power=Max radiation field-95.2)		
V 4.1		
GFSK ,π /4-DQPSK, 8DPSK		
79 for BR/EDR		
Q3-8615-V1.3		
Q3-8615-English-1610261		
PCB Antenna (Met 15.203 Antenna requirement)		
1.65dBi		
DC 3.7V by battery		

Note: 1. The USB port only be used for charging and can't be used to transfer data with PC.

2. The EUT didn't support BLE.

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR channel List

Frequency Band	Channel Number	Frequency		
	0	2402MHz		
	1	2403MHz		
	÷	:		
	38	2440 MHz		
2400~2483.5MHz	39	2441 MHz		
	40	2442 MHz		
	••	:		
	77	2479 MHz		
	78	2480 MHz		

Page 6 of 57

3. MEASUREMENT UNCERTAINTY


The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions,radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π /4-DQPSK
5	Middle channel π /4-DQPSK
6	High channel π /4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link with charging
11	BT Link

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.

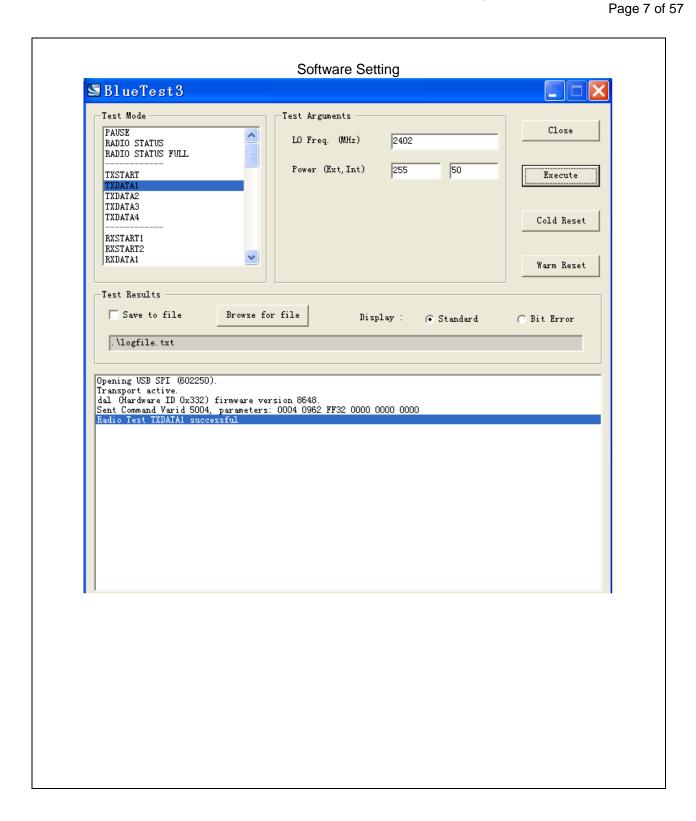


Page 8 of 57

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Note: Owing to the EUT has own battery, Testing will be performed while PC or adapter remove.

Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Wirelessheadset	KONCEN	Q3	EUT
2	Battery	ннх	450920	Accessory
3	PC	Sony	E1412AYCW	A.E
	PC Adapter	Sony	AC-L100	A.E
4	Control box	CSR	USB_SPI_TOOLS	A.E
5	Adapter	IPRO	NTR-S01	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant

Page 9 of 57

6. TEST FACILITY

Site Dongguan Precise Testing Service Co., Ltd.		
Location Building D,Baoding Technology Park,Guangming Road2,Dongcheng District Dongguan, Guangdong, China,		
FCC Registration No.	371540	
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.	

7.TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

Radiated Emission Test Site						
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration	
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017	
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017	
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017	
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017	
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017	
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A	
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2016	June 5, 2017	
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2016	June 5, 2017	
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017	
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017	

Report No.: AGC09657170301FE03 Page 10 of 57

FOR RADIATED EMISSION TEST (1GHz ABOVE)

TOTAL DELINIOS	,	ed Emission Tes	t Site		
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2016	June 5, 2017
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017

	Conducted Emission Test Site												
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration								
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	101417	July 4, 2016	July 3, 2017								
Artificial Mains Network	NARDA	L2-16B	000WX31025	July 8, 2016	July 7, 2017								
Artificial Mains Network (AUX)	NARDA	L2-16B	000WX31026	July 8, 2016	July 7, 2017								
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2016	July 3, 2017								
Shielded Room	CHENGYU	843	PTS-002	June 6, 2016	June 5, 2017								
Conduction Cable	MXT	SE1	S003	June 6, 2016	June 5, 2017								

Page 11 of 57

9. RADIATED EMISSION

9.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics			
	(millivolts/meter)	(microvolts/meter)			
900-928MHz	50	500			
2400-2483.5MHz	50	500			
5725-5875MHz	50	500			
24.0-24.25GHz	250	2500			

Standard FCC 15.209

Frequency	Distance	Field Strei	ngths Limit
(MHz)	Meters	μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(µV)/m (Peal	k) 54.0 dB(µV)/m (Average)

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Page 12 of 57

9.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)

- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

Report No.: AGC09657170301FE03 Page 13 of 57


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting								
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP								
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP								
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP								
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average								
Receiver Parameter	Setting								
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP								
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP								
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP								


Report No.: AGC09657170301FE03 Page 14 of 57

9.3. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

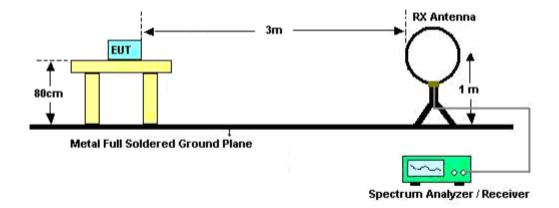


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

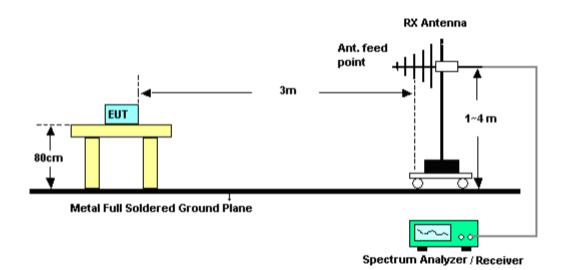

Page 15 of 57

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

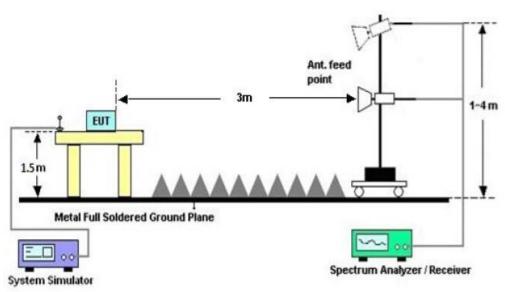

Page 16 of 57

9.4. TEST RESULT

(Worst modulation: GFSK)


FOR BR/EDR

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

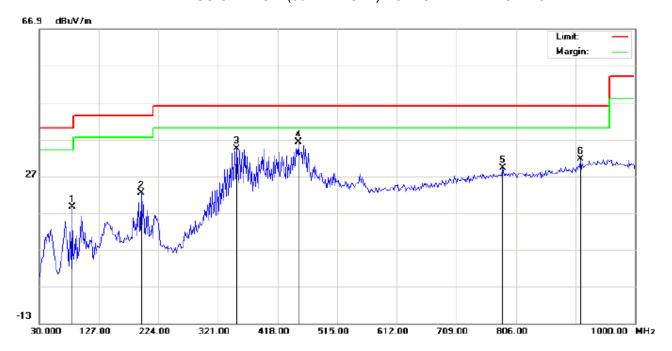

Site: site #1

Limit: FCC Class B 3M Radiation

M/N: Q3

Mode:Low Channel TX

EUT:Wireless headset

Note:


Polarization: Horizontal Temperature: 23.6 Power: Humidity: 52.9 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		83.3499	18.07	0.50	18.57	40.00	-21.43	peak			
2		196.5166	10.50	11.84	22.34	43.50	-21.16	peak			
3		351.7167	15.67	18.75	34.42	46.00	-11.58	peak			
4	*	451.9499	15.52	20.61	36.13	46.00	-9.87	peak			
5		784.9832	2.19	27.11	29.30	46.00	-16.70	peak			
6		911.0833	2.73	28.92	31.65	46.00	-14.35	peak	·	·	

Page 17 of 57

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

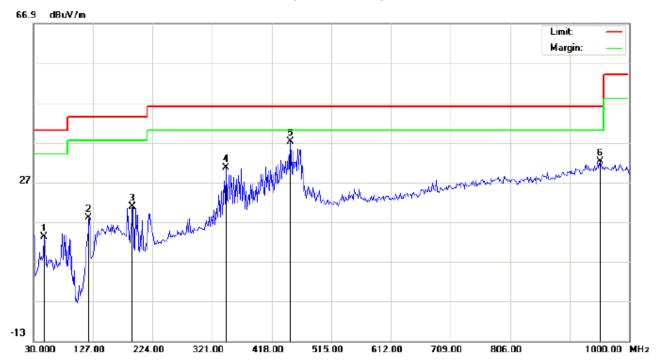

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Wireless headset

M/N: Q3

Mode:Low Channel TX

Note:

Polarization:	Vertical	Temperature: 23.6
Power:		Humidity: 52.9 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		47.7832	4.77	8.39	13.16	40.00	-26.84	peak			
2		120.5332	10.87	7.08	17.95	43.50	-25.55	peak			
3		191.6666	9.70	11.11	20.81	43.50	-22.69	peak			
4		343.6333	12.27	18.32	30.59	46.00	-15.41	peak			
5	*	448.7167	16.65	20.55	37.20	46.00	-8.80	peak			
6		953.1167	2.17	29.97	32.14	46.00	-13.86	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 18 of 57

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

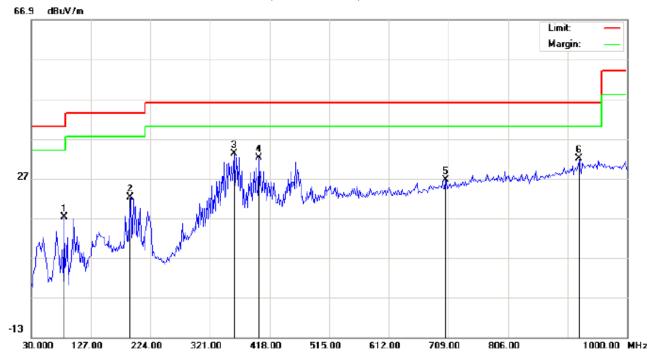

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:Wireless headset

M/N: Q3

Mode:Middle Channel TX

Note:


Polarization: Horizontal Temperature: 23.6
Power: Humidity: 52.9 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		83.3499	16.66	0.50	17.16	40.00	-22.84	peak			
2		191.6666	10.62	11.61	22.23	43.50	-21.27	peak			
3	*	359.8000	14.40	18.80	33.20	46.00	-12.80	peak			
4		400.2167	13.18	19.08	32.26	46.00	-13.74	peak			
5		704.1499	1.20	25.31	26.51	46.00	-19.49	peak		·	
6		922.3999	2.78	29.23	32.01	46.00	-13.99	peak			

Page 19 of 57

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

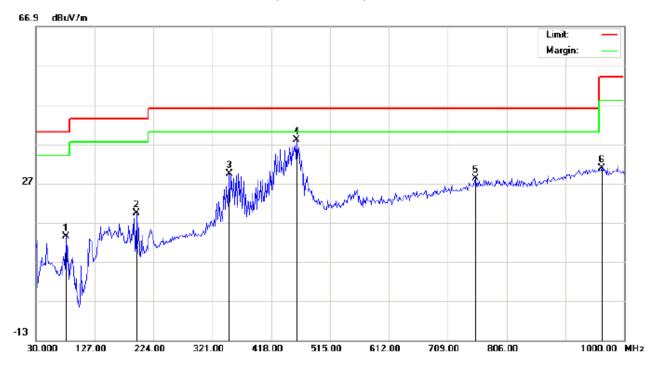

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Wireless headset

M/N: Q3

Mode:Middle Channel TX

Note:

Polarization:	Vertical	Temperature: 23.6
Power:		Humidity: 52.9 %

Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		80.1166	11.62	1.84	13.46	40.00	-26.54	peak			
2		196.5166	9.53	9.88	19.41	43.50	-24.09	peak			
3		348.4832	10.85	18.64	29.49	46.00	-16.51	peak			
4	*	460.0332	17.24	20.70	37.94	46.00	-8.06	peak			
5		754.2667	1.46	26.69	28.15	46.00	-17.85	peak	·	·	-
6		962.8166	1.02	29.88	30.90	54.00	-23.10	peak			


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 20 of 57

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

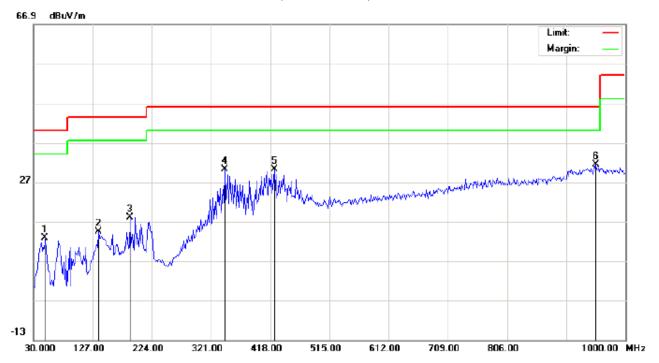

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Wireless headset

M/N: Q3

Mode:High Channel TX

Note:

Polarization: *Horizontal* Temperature: 23.6 Power: Humidity: 52.9 %


Distance:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		49.3998	1.46	11.28	12.74	40.00	-27.26	peak			
2		136.6999	0.67	13.66	14.33	43.50	-29.17	peak			
3		188.4333	6.59	11.46	18.05	43.50	-25.45	peak			
4		343.6333	11.89	18.32	30.21	46.00	-15.79	peak			
5		424.4667	10.34	19.81	30.15	46.00	-15.85	peak			
6	*	951.5000	1.33	29.99	31.32	46.00	-14.68	peak			

Temperature: 23.6 Humidity: 52.9 %

Page 21 of 57

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

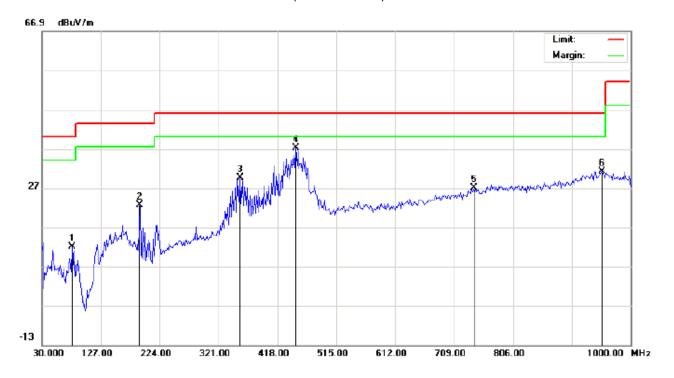

Polarization:

Power:

Distance:

Vertical

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:Wireless headset

M/N: Q3

Mode:High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		80.1166	10.12	1.84	11.96	40.00	-28.04	peak			
2		191.6666	11.49	11.11	22.60	43.50	-20.90	peak			
3		356.5667	10.74	18.78	29.52	46.00	-16.48	peak			
4	*	448.7167	16.72	20.55	37.27	46.00	-8.73	peak			
5		741.3333	0.56	26.38	26.94	46.00	-19.06	peak			
6		953 1167	1 24	29 97	31.21	46 00	-14 79	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


Page 22 of 57

RADIATED EMISSION ABOVE 1GHz

(Worst modulation: GFSK)

FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

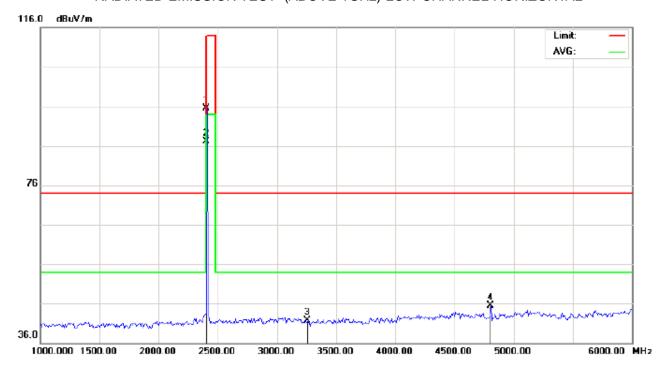

Site: site #1 Polarization: Horizontal Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %

EUT:Wireless headset Distance:

M/N: Q3


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	85.19	10.32	95.51	114.00	-18.49	peak			
2	*	2402.000	76.74	10.32	87.06	94.00	-6.94	AVG	100	32	
3		3259.000	29.80	11.88	41.68	74.00	-32.32	peak			
4		4804.000	37.74	7.69	45.43	74.00	-28.57	peak			

Page 23 of 57

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

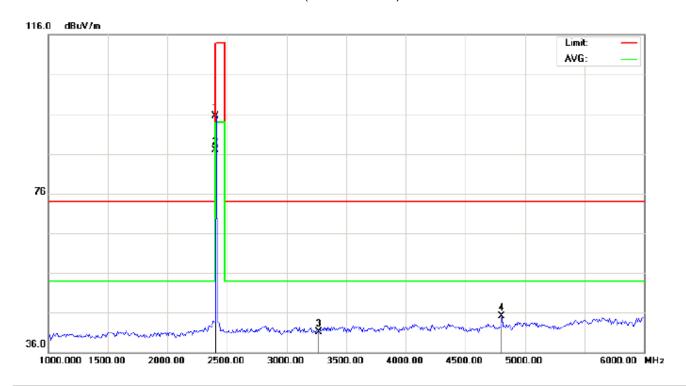

Site: site #1 Polarization: Vertical Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %

Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humid
EUT:Wireless headset Distance:

M/N: Q3


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	85.15	10.32	95.47	114.00	-18.53	peak			
2	*	2402.000	76.66	10.32	86.98	94.00	-7.02	AVG	100	72	
3		3269.000	29.25	11.89	41.14	74.00	-32.86	peak			
4		4804.000	37.38	7.69	45.07	74.00	-28.93	peak			

Page 24 of 57

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

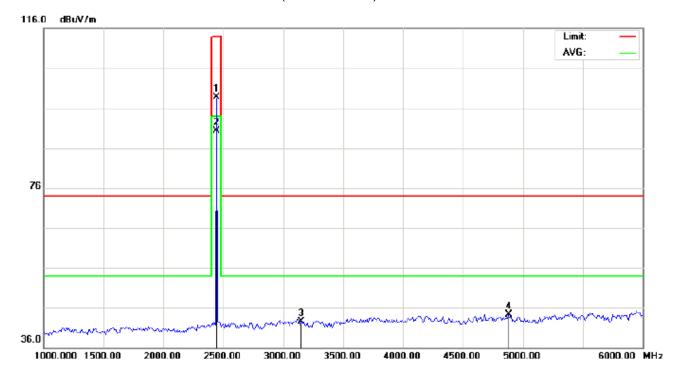

Site: site #1 Polarization: Horizontal Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %

EUT:Wireless headset Distance:

M/N: Q3


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2441.000	88.36	10.36	98.72	114.00	-15.28	peak			
2	*	2441.000	79.88	10.36	90.24	94.00	-3.76	AVG	100	31	
3		3152.000	30.68	11.78	42.46	74.00	-31.54	peak			
4		4882.000	36.38	7.89	44.27	74.00	-29.73	peak			

Page 25 of 57

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

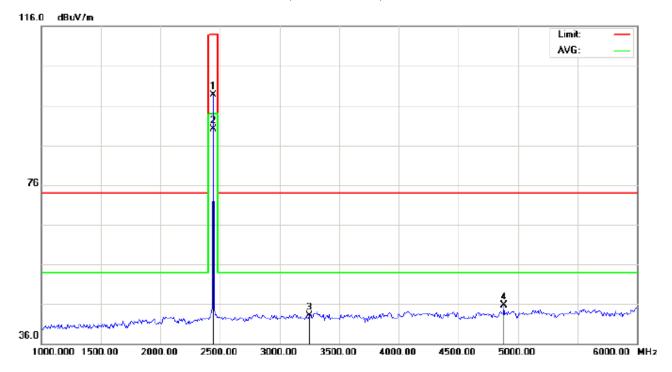

Site: site #1 Polarization: Vertical Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %

EUT:Wireless headset Distance:

M/N: Q3


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2441.000	88.33	10.36	98.69	114.00	-15.31	peak			
2	*	2441.000	79.82	10.36	90.18	94.00	-3.82	AVG	100	73	
3		3249.000	31.24	11.87	43.11	74.00	-30.89	peak			
4		4882.000	37.81	7.89	45.70	74.00	-28.30	peak			

Page 26 of 57

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

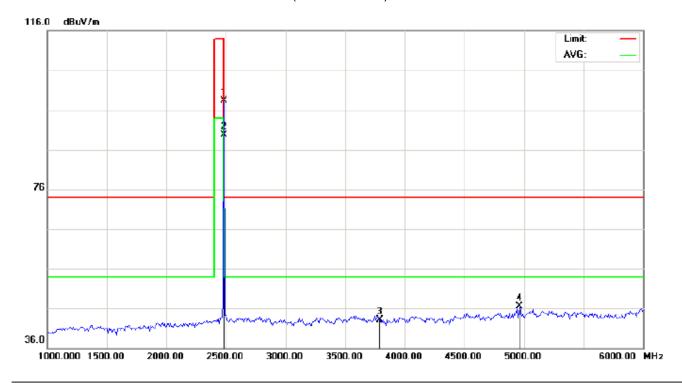

Site: site #1 Polarization: Horizontal Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %

EUT:Wireless headset Distance:

M/N: Q3


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2480.000	87.81	10.41	98.22	114.00	-15.78	peak			
2	*	2480.000	79.32	10.41	89.73	94.00	-4.27	AVG	100	30	
3		3791.000	29.26	13.90	43.16	74.00	-30.84	peak			
4		4960.000	38.51	8.09	46.60	74.00	-27.40	peak			

Page 27 of 57

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

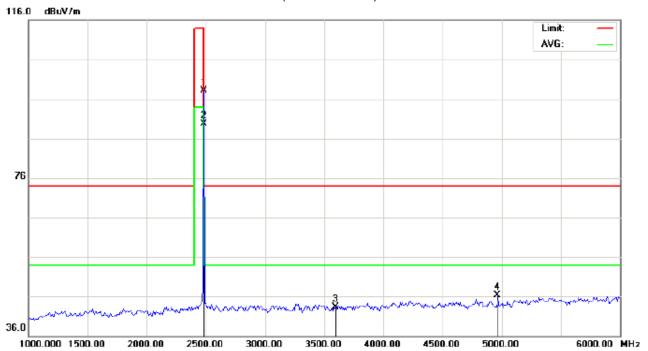

Site: site #1 Polarization: Vertical Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %

EUT:Wireless headset Distance:

M/N: Q3

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2480.000	87.73	10.41	98.14	114.00	-15.86	peak			
2	*	2480.000	79.24	10.41	89.65	94.00	-4.35	AVG	100	75	
3		3597.000	30.67	12.71	43.38	74.00	-30.62	peak			
4		4960.000	38.16	8.09	46.25	74.00	-27.75	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Report No.: AGC09657170301FE03 Page 28 of 57

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	85.19	10.32	95.51	114	-18.49	Horizontal
2402	85.15	10.32	95.47	114	-18.53	Vertical
2441	88.36	10.36	98.72	114	-15.28	Horizontal
2441	88.33	10.36	98.69	114	-15.31	Vertical
2480	87.81	10.41	98.22	114	-15.78	Horizontal
2480	87.73	10.41	98.14	114	-15.86	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	76.74	10.32	87.06	94	-6.94	Horizontal
2402	76.66	10.32	86.98	94	-7.02	Vertical
2441	79.88	10.36	90.24	94	-3.76	Horizontal
2441	79.82	10.36	90.18	94	-3.82	Vertical
2480	79.32	10.41	89.73	94	-4.27	Horizontal
2480	79.24	10.41	89.65	94	-4.35	Vertical

Report No.: AGC09657170301FE03 Page 29 of 57

2Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	85.16	10.32	95.48	114	-18.52	Horizontal
2402	85.10	10.32	95.42	114	-18.58	Vertical
2441	88.32	10.36	98.68	114	-15.32	Horizontal
2441	88.27	10.36	98.63	114	-15.37	Vertical
2480	87.74	10.41	98.15	114	-15.85	Horizontal
2480	87.66	10.41	98.07	114	-15.93	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	76.69	10.32	87.01	94	-6.99	Horizontal
2402	76.61	10.32	86.93	94	-7.07	Vertical
2441	79.80	10.36	90.16	94	-3.84	Horizontal
2441	79.71	10.36	90.07	94	-3.93	Vertical
2480	79.21	10.41	89.62	94	-4.38	Horizontal
2480	79.18	10.41	89.59	94	-4.41	Vertical

Report No.: AGC09657170301FE03 Page 30 of 57

3Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	85.06	10.32	95.38	114	-18.62	Horizontal
2402	85.04	10.32	95.36	114	-18.64	Vertical
2441	88.25	10.36	98.61	114	-15.39	Horizontal
2441	88.18	10.36	98.54	114	-15.46	Vertical
2480	87.70	10.41	98.11	114	-15.89	Horizontal
2480	87.60	10.41	98.01	114	-15.99	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	76.64	10.32	86.96	94	-7.04	Horizontal
2402	76.53	10.32	86.85	94	-7.15	Vertical
2441	79.76	10.36	90.12	94	-3.88	Horizontal
2441	79.66	10.36	90.02	94	-3.98	Vertical
2480	79.16	10.41	89.57	94	-4.43	Horizontal
2480	79.12	10.41	89.53	94	-4.47	Vertical

Page 31 of 57

10. BAND EDGE EMISSION

10.1. MEASUREMENT PROCEDURE


1The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.

2Max hold the trace of the setup 1,and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.

3Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

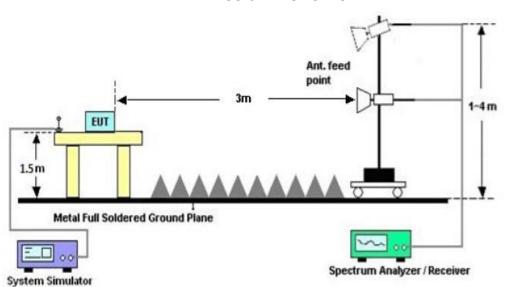


Page 32 of 57

10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

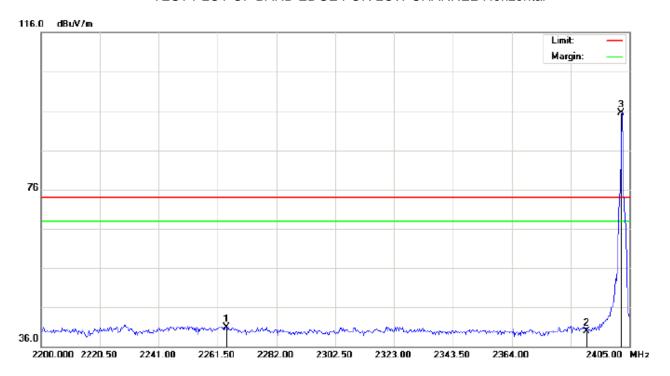

Temperature: 26 Site: site #1 Polarization: Horizontal Limit: FCC Class B 3M Radiation above 1GHz(PK) Humidity: 60 % Power:

EUT:Wireless headset

Distance:

M/N:Q3

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu√/m	dB		cm	degree	
1		2264.575	30.75	10.17	40.92	74.00	-33.08	peak			
2		2390.000	29.50	10.31	39.81	74.00	-34.19	peak			
3	*	2402.000	85.21	10.32	95.53	74.00	21.53	peak			

Page 33 of 57

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical



Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %

EUT:Wireless headset

Distance:


M/N:Q3

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2260.133	30.10	10.17	40.27	74.00	-33.73	peak			
2		2390.000	29.71	10.31	40.02	74.00	-33.98	peak			
3	*	2402.000	85.17	10.32	95.49	74.00	21.49	peak			

Page 34 of 57

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

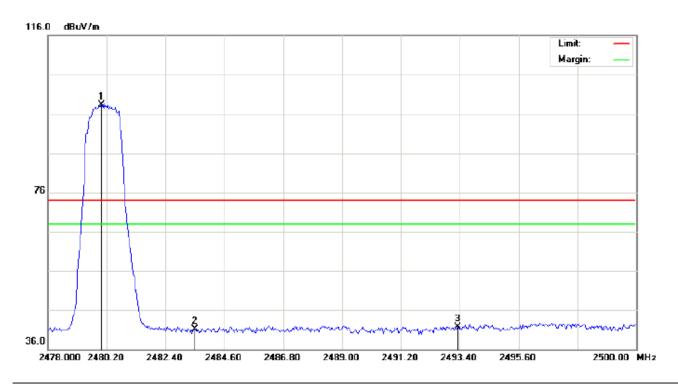

Site: site #1 Polarization: Horizontal Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %

EUT:Wireless headset Distance:


M/N:Q3

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.80	10.41	98.21	74.00	24.21	peak			
2		2483.500	30.69	10.41	41.10	74.00	-32.90	peak			
3		2493.327	31.36	10.42	41.78	74.00	-32.22	peak			

Page 35 of 57

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

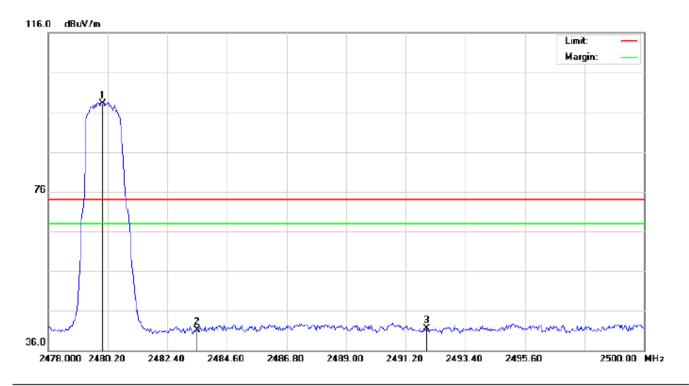

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %

EUT:Wireless headset Distance:

M/N:Q3

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	87.76	10.41	98.17	74.00	24.17	peak			
2		2483.500	30.76	10.41	41.17	74.00	-32.83	peak			
3		2491.970	31.09	10.42	41.51	74.00	-32.49	peak			

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.


Page 36 of 57

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

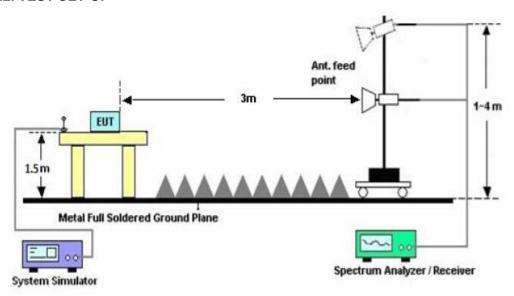


11.3. LIMITS AND MEASUREMENT RESULTS

FOR BR/EDR

BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Doorle								
		99%OBW (MHz)	-20dB BW(MHz)	Result						
	Low Channel	0.930	1.098	PASS						
N/A	Middle Channel	0.920	1.080	PASS						
	High Channel	0.935	1.104	PASS						

Page 37 of 57

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

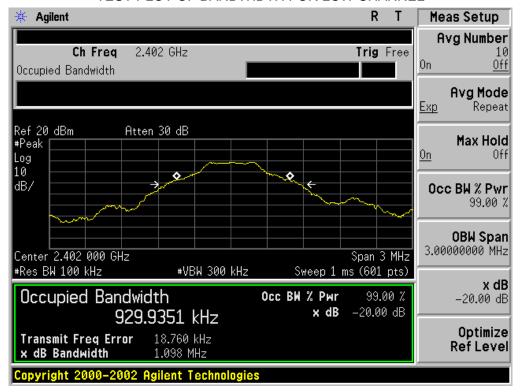


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL



Page 38 of 57


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

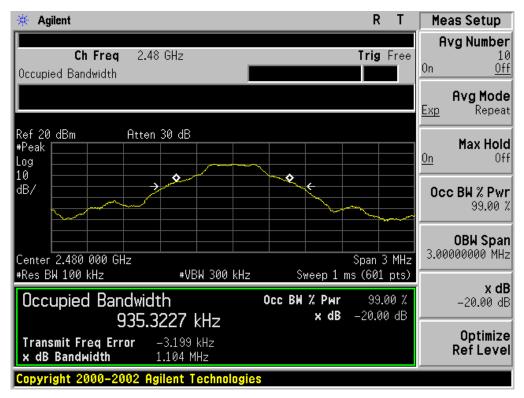

Report No.: AGC09657170301FE03 Page 39 of 57


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT										
Measurement Result										
Applicable Limits		Decult								
		99%OBW (MHz)	-20dB BW(MHz)	Result						
	Low Channel	1.207	1.374	PASS						
N/A	Middle Channel	1.200	1.346	PASS						
	High Channel	1.192	1.343	PASS						

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

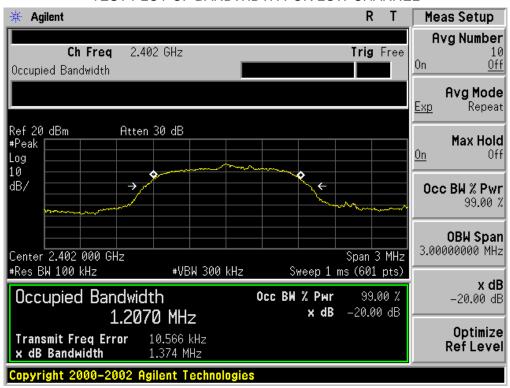


Page 40 of 57

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

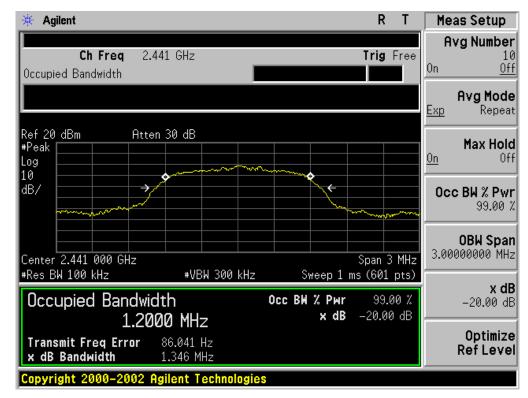


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

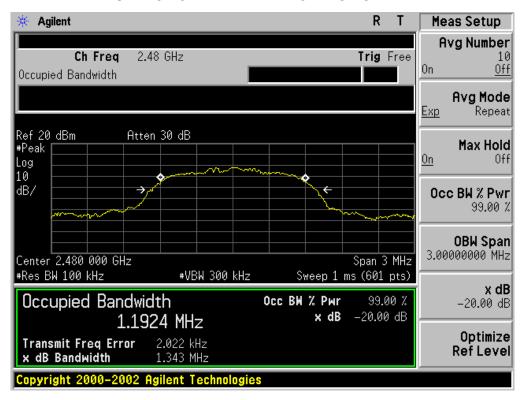

Report No.: AGC09657170301FE03 Page 41 of 57


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Doorle								
		Result								
	Low Channel	1.207	1.341	PASS						
N/A	Middle Channel	1.199	1.367	PASS						
	High Channel	1.204	1.364	PASS						

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

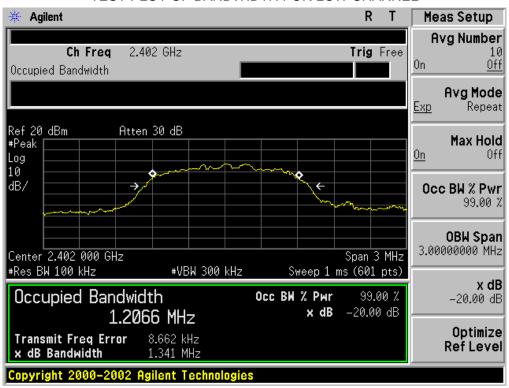


Page 42 of 57

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

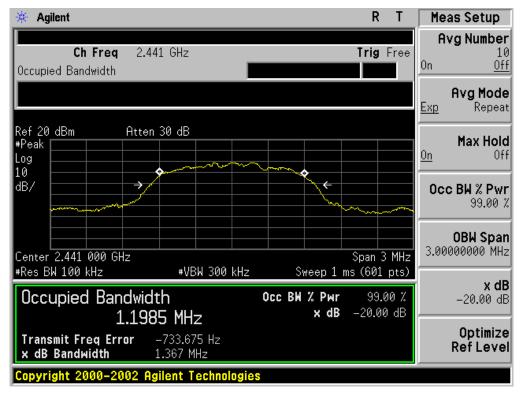

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

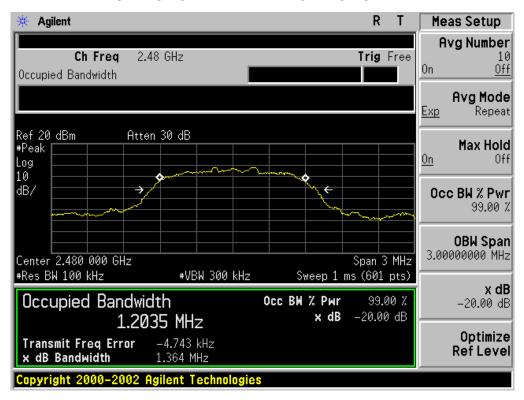

Page 43 of 57

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Fraguency	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

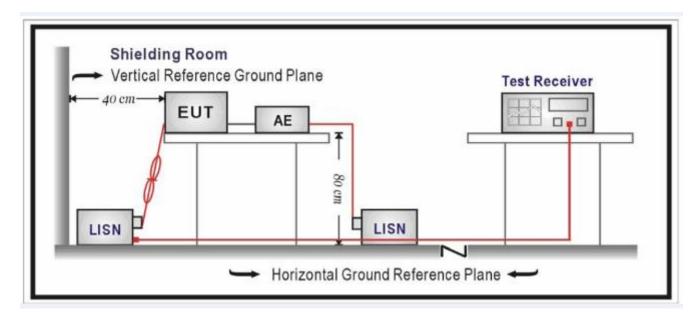

Page 44 of 57

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

Humidity: 60 %


Page 45 of 57

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

By adapter(worst case)

FOR BR/EDR

Line Conducted Emission Test Line 1-L

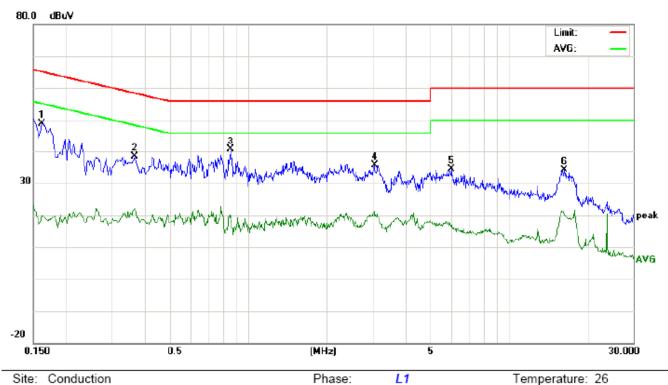

Site: Conduction Phase: L1

Limit: FCC Class B Conduction(QP) Power:

EUT:Wireless headset

M/N: Q3

Mode:BT Link with charging


Note:

No.	Freq.	Reading_Leve (dBuV)				Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
	(MHz)	Peak	Q.	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	38.75		9.79	10.17	48.92		19.96	65.36	55.36	-16.44	-35.40	Р	
2	0.3660	27.94		11.70	10.32	38.26		22.02	58.59	48.59	-20.33	-26.57	Р	
3	0.8580	30.28		9.48	10.36	40.64		19.84	56.00	46.00	-15.36	-26.16	Р	
4	3.0420	25.10		10.65	10.55	35.65		21.20	56.00	46.00	-20.35	-24.80	Р	
5	6.0299	24.21		6.61	10.28	34.49		16.89	60.00	50.00	-25.51	-33.11	Р	
6	16.3859	24.12		10.22	10.12	34.24		20.34	60.00	50.00	-25.76	-29.66	Р	

Humidity: 60 %

Page 46 of 57

Line Conducted Emission Test Line 2-N

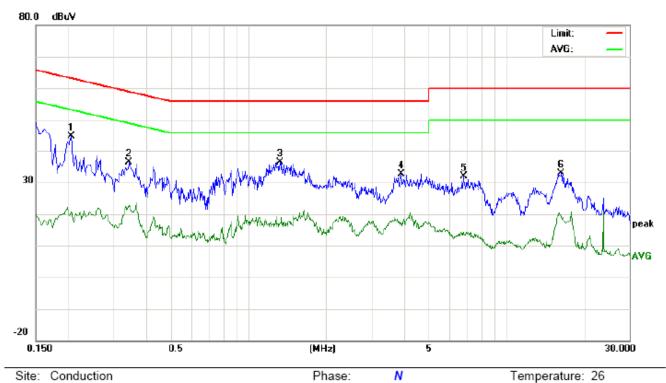

one. Conduction

Limit: FCC Class B Conduction(QP)

EUT:Wireless headset

M/N: Q3

Mode:BT Link with charging

Note:

No.	Freq.	Reading_Level (dBuV)		Correct Measurement Factor (dBuV)		Limit (dBuV)		Margin (dB)		P/F	Comment			
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.2060	34.71		10.32	10.22	44.93		20.54	63.36	53.36	-18.43	-32.82	Р	
2	0.3460	25.94		12.36	10.31	36.25		22.67	59.06	49.06	-22.81	-26.39	Р	
3	1.3260	25.96		6.67	10.38	36.34		17.05	56.00	46.00	-19.66	-28.95	Р	
4	3.9020	22.17		6.76	10.45	32.62		17.21	56.00	46.00	-23.38	-28.79	Р	
5	6.8339	21.46		4.00	10.34	31.80		14.34	60.00	50.00	-28.20	-35.66	Р	
6	16.3299	22.81		8.90	10.12	32.93		19.02	60.00	50.00	-27.07	-30.98	Р	

Power:


Page 47 of 57

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

FCC LINE CONDUCTED EMISSION TEST SETUP




FCC RADIATED EMISSION TEST SETUP

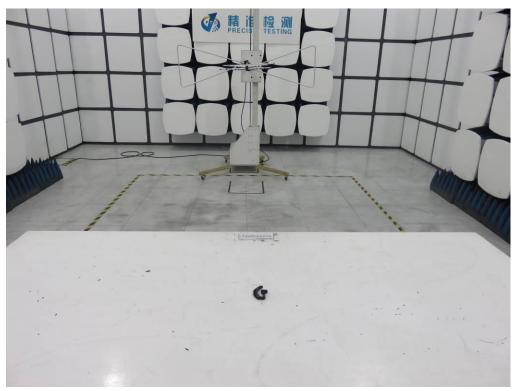



Report No.: AGC09657170301FE03 Page 49 of 57

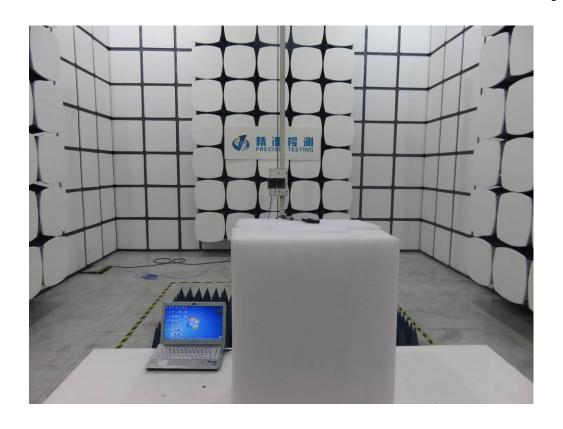

Report No.: AGC09657170301FE03 Page 50 of 57

APPENDIX B: PHOTOGRAPHS OF EUT

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



Report No.: AGC09657170301FE03 Page 51 of 57

FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT




VIEW OF EUT (PORT)




OPEN VIEW OF EUT



INTERNAL VIEW OF EUT-1

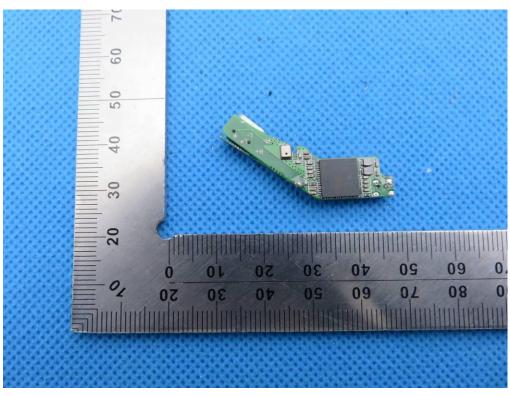


INTERNAL VIEW OF EUT-2

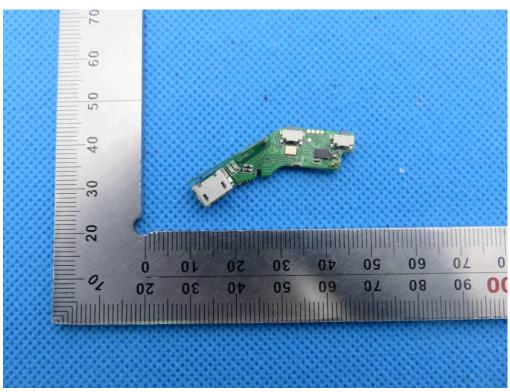


Page 55 of 57


INTERNAL VIEW OF EUT-3

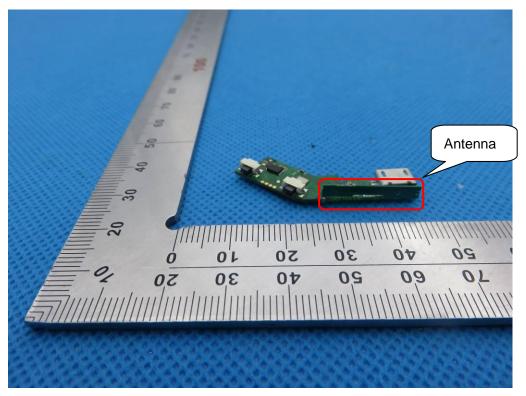


INTERNAL VIEW OF EUT-4

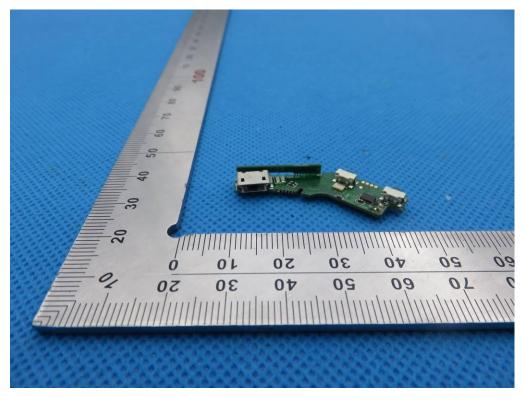


INTERNAL VIEW OF EUT-5

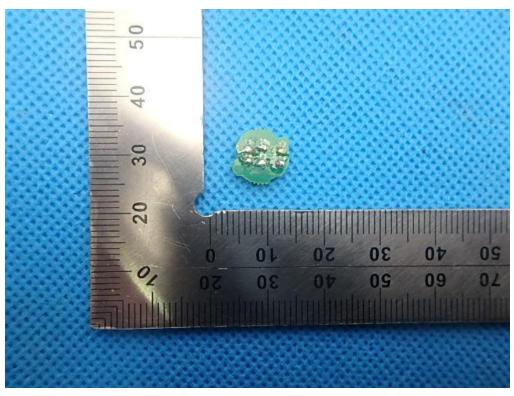

INTERNAL VIEW OF EUT-6

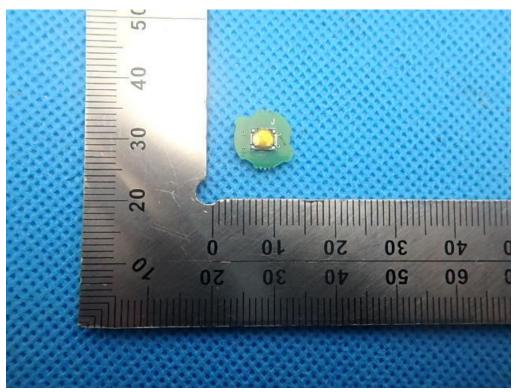

INTERNAL VIEW OF EUT-7

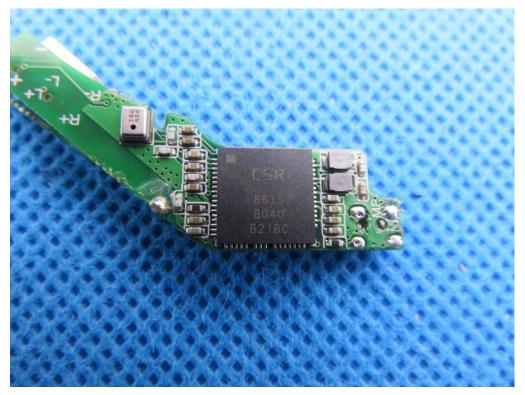

VIEW OF ADAPTER(AE)



The adapter was supplied by AGC

----END OF REPORT----