



FCC ID: 2ALIE-GWS1XX  
Report No.: T180807D10-RP1

Page: 1 / 118  
Rev.: 01

# RADIO TEST REPORT

## FCC 47 CFR PART 15 SUBPART C

|               |                 |
|---------------|-----------------|
| Test Standard | FCC Part 15.247 |
| Brand name    | SIMPNIC         |
| Product name  | IoT Gateway     |
| Model No.     | S1              |
| Test Result   | Pass            |

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Approved by:

Tested by:

Sam Chuang  
Manager

Jerry Chuang  
Engineer

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.  
除非另有說明，此報告結果僅對測試之樣品負責，同時此樣品僅保留90天。本報告未經本公司書面許可，不可部分複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Report No.: T180807D10-RP1

Page: 2 / 118

Rev.: 01

## **Revision History**

| Rev. | Issue Date        | Revisions                           | Revised By   |
|------|-------------------|-------------------------------------|--------------|
| 00   | November 19, 2018 | Initial Issue                       | Allison Chen |
| 01   | November 26, 2018 | 1. Revised antenna brand in page.5. | Allison Chen |



Report No.: T180807D10-RP1

Page: 3 / 118

Rev.: 01

## Table of contents

|     |                                                  |    |
|-----|--------------------------------------------------|----|
| 1.  | GENERAL INFORMATION.....                         | 4  |
| 1.1 | EUT INFORMATION.....                             | 4  |
| 1.2 | EUT CHANNEL INFORMATION.....                     | 5  |
| 1.3 | ANTENNA INFORMATION.....                         | 5  |
| 1.4 | MEASUREMENT UNCERTAINTY .....                    | 6  |
| 1.5 | FACILITIES AND TEST LOCATION.....                | 6  |
| 1.6 | INSTRUMENT CALIBRATION .....                     | 7  |
| 1.7 | SUPPORT AND EUT ACCESSORIES EQUIPMENT .....      | 8  |
| 1.8 | TEST METHODOLOGY AND APPLIED STANDARDS.....      | 8  |
| 2.  | TEST SUMMERY.....                                | 9  |
| 3.  | DESCRIPTION OF TEST MODES.....                   | 10 |
| 3.1 | THE WORST MODE OF OPERATING CONDITION .....      | 10 |
| 3.2 | THE WORST MODE OF MEASUREMENT.....               | 11 |
| 4.  | EUT DUTY CYCLE .....                             | 12 |
| 5.  | TEST RESULT.....                                 | 13 |
| 5.1 | AC POWER LINE CONDUCTED EMISSION.....            | 13 |
| 5.2 | 6dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%) ..... | 16 |
| 5.3 | OUTPUT POWER MEASUREMENT .....                   | 34 |
| 5.4 | POWER SPECTRAL DENSITY .....                     | 38 |
| 5.5 | CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....    | 48 |
| 5.6 | RADIATION BANDEDGE AND SPURIOUS EMISSION.....    | 73 |
|     | APPENDIX 1 - PHOTOGRAPHS OF EUT                  |    |



Report No.: T180807D10-RP1

## 1. GENERAL INFORMATION

### 1.1 EUT INFORMATION

|                   |                                                                                                                                |                         |  |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------|-------------------------|--|
| Applicant         | CONNECTION TECHNOLOGY SYSTEMS INC.<br>18F-6, No.79, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei City<br>221, TAIWAN, R.O.C. |                         |  |
| Manufacturer      | CONNECTION TECHNOLOGY SYSTEMS INC.<br>18F-6, No.79, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei City<br>221, TAIWAN, R.O.C. |                         |  |
| Equipment         | IoT Gateway                                                                                                                    |                         |  |
| Model Name        | S1                                                                                                                             |                         |  |
| Model Discrepancy | N/A                                                                                                                            |                         |  |
| Received Date     | August 7, 2018                                                                                                                 |                         |  |
| Date of Test      | September 10 ~ September 17, 2018                                                                                              |                         |  |
| Output Power(W)   | <b>Mode</b>                                                                                                                    | <b>Output Power (W)</b> |  |
|                   | IEEE 802.11b Mode                                                                                                              | 0.2495                  |  |
|                   | IEEE 802.11g Mode                                                                                                              | 0.7870                  |  |
|                   | IEEE 802.11n HT20 Mode                                                                                                         | 0.8630                  |  |
|                   | IEEE 802.11n HT40 Mode                                                                                                         | 0.8147                  |  |
| Power Supply      | Power from AC adapter.<br>I/P: 100-240Vac, 50/60Hz, 0.3A<br>O/P: 5Vdc, 2000mA                                                  |                         |  |

## 1.2 EUT CHANNEL INFORMATION

|                   |                                                                                                                                                                                                                           |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Frequency Range   | 802.11b/g/n HT 20: 2412MHz ~ 2462MHz<br>802.11n HT 40: 2422MHz ~ 2452MHz                                                                                                                                                  |
| Modulation Type   | 1. IEEE 802.11b Mode: DSSS(DBPSK/DQPSK/CCK)<br>2. IEEE 802.11g Mode: OFDM (BPSK/QPSK/16QAM/64QAM)<br>3. IEEE 802.11n HT20 Mode : OFDM (BPSK/QPSK/16QAM/64QAM)<br>4. IEEE 802.11n HT40 Mode : OFDM (BPSK/QPSK/16QAM/64QAM) |
| Number of channel | 1. IEEE 802.11b Mode: 11 Channels<br>2. IEEE 802.11g Mode: 11 Channels<br>3. IEEE 802.11n HT20 Mode : 11 Channels<br>4. IEEE 802.11n HT40 Mode : 7 Channels                                                               |

**Remark:**

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 for test channels

| Number of frequencies to be tested                   |                       |                                              |
|------------------------------------------------------|-----------------------|----------------------------------------------|
| Frequency range in which device operates             | Number of frequencies | Location in frequency range of operation     |
| <input type="checkbox"/> 1 MHz or less               | 1                     | Middle                                       |
| <input type="checkbox"/> 1 MHz to 10 MHz             | 2                     | 1 near top and 1 near bottom                 |
| <input checked="" type="checkbox"/> More than 10 MHz | 3                     | 1 near top, 1 near middle, and 1 near bottom |

## 1.3 ANTENNA INFORMATION

|                   |                                                                                                                                      |                            |                     |           |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------|-----------|
| Antenna Type      | <input checked="" type="checkbox"/> PIFA <input type="checkbox"/> PCB <input type="checkbox"/> Dipole <input type="checkbox"/> Coils |                            |                     |           |
| Antenna Gain      |                                                                                                                                      |                            |                     |           |
|                   |                                                                                                                                      | Brand                      | P/N                 | Peak Gain |
|                   | Antenna 1                                                                                                                            | Aristotle Enterprises Inc. | RFA-02-AP633-70B-40 | 3.24dBi   |
|                   | Antenna 2                                                                                                                            | Aristotle Enterprises Inc. | RFA-02-AP633-70-35  | 3.46dBi   |
|                   |                                                                                                                                      |                            |                     |           |
|                   | Power Directional Gain                                                                                                               |                            | 3.35dBi             |           |
| Antenna Connector | IPEX                                                                                                                                 |                            |                     |           |

**Notes:**

1. Power Directional Gain:  $10 * \log(((10^{(Ant1/10)} + 10^{(Ant2/10)})/2))$

## 1.4 MEASUREMENT UNCERTAINTY

| PARAMETER                             | UNCERTAINTY |
|---------------------------------------|-------------|
| AC Powerline Conducted Emission       | +/- 1.2575  |
| Emission bandwidth, 20dB bandwidth    | +/- 1.4003  |
| RF output power, conducted            | +/- 1.1372  |
| Power density, conducted              | +/- 1.4003  |
| 3M Semi Anechoic Chamber / 30M~200M   | +/- 4.0138  |
| 3M Semi Anechoic Chamber / 200M~1000M | +/- 3.9483  |
| 3M Semi Anechoic Chamber / 1G~8G      | +/- 2.5975  |
| 3M Semi Anechoic Chamber / 8G~18G     | +/- 2.6112  |
| 3M Semi Anechoic Chamber / 18G~26G    | +/- 2.7389  |

**Remark:**

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

## 1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at  
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

| Test site          | Test Engineer | Remark |
|--------------------|---------------|--------|
| AC Conduction Room | Dally Hong    | -      |
| Radiation          | Jerry Chuang  | -      |
| RF Conducted       | Jerry Chuang  | -      |

**Remark:** The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.



Report No.: T180807D10-RP1

## 1.6 INSTRUMENT CALIBRATION

| RF Conducted Test Site |              |         |         |            |            |
|------------------------|--------------|---------|---------|------------|------------|
| Equipment              | Manufacturer | Model   | S/N     | Cal Date   | Cal Due    |
| Coaxial Cable          | Woken        | WC12    | CC001   | 06/29/2018 | 06/28/2019 |
| Power Meter            | Anritsu      | ML2495A | 1149001 | 02/06/2018 | 02/05/2019 |
| Power Seneor           | Anritsu      | MA2491A | 030982  | 02/07/2018 | 02/06/2019 |
| Signal Analyzer        | R&S          | FSV 40  | 101073  | 10/02/2017 | 10/01/2018 |

| 3M 966 Chamber Test Site               |                |                    |             |            |            |
|----------------------------------------|----------------|--------------------|-------------|------------|------------|
| Equipment                              | Manufacturer   | Model              | S/N         | Cal Date   | Cal Due    |
| Band Reject Filters                    | MICRO TRONICS  | BRM 50702          | 120         | 05/14/2018 | 05/13/2019 |
| Bilog Antenna                          | Sunol Sciences | JB3                | A030105     | 07/13/2018 | 07/12/2019 |
| Cable                                  | HUBER SUHNER   | SUCOFLEX<br>104PEA | 25157       | 06/29/2018 | 06/28/2019 |
| Cable                                  | HUBER SUHNER   | SUCOFLEX<br>104PEA | 20995       | 06/29/2018 | 06/28/2019 |
| Digital<br>Thermo-Hygro<br>Meter       | WISEWIND       | 1206               | D07         | 02/08/2018 | 02/07/2019 |
| double Ridged<br>Guide Horn<br>Antenna | ETC            | MCTD 1209          | DRH13M02003 | 08/20/2018 | 08/19/2019 |
| Loop Ant                               | COM-POWER      | AL-130             | 121051      | 03/21/2018 | 03/20/2019 |
| Pre-Amplifier                          | EMEC           | EM330              | 060609      | 06/29/2018 | 06/28/2019 |
| Pre-Amplifier                          | HP             | 8449B              | 3008A00965  | 06/29/2018 | 06/28/2019 |
| PSA Series<br>Spectrum Analyzer        | Agilent        | E4446A             | MY46180323  | 05/31/2018 | 05/30/2019 |
| Antenna Tower                          | CCS            | CC-A-1F            | N/A         | N.C.R      | N.C.R      |
| Controller                             | CCS            | CC-C-1F            | N/A         | N.C.R      | N.C.R      |
| Turn Table                             | CCS            | CC-T-1F            | N/A         | N.C.R      | N.C.R      |

| AC Conducted Emissions Test Site |              |           |          |            |            |
|----------------------------------|--------------|-----------|----------|------------|------------|
| Equipment                        | Manufacturer | Model     | S/N      | Cal Date   | Cal Due    |
| CABLE                            | EMCI         | CFD300-NL | CERF     | 06/29/2018 | 06/28/2019 |
| EMI Test Receiver                | R&S          | ESCI      | 100064   | 07/24/2018 | 07/23/2019 |
| LISN                             | SCHWARZBECK  | NSLK 8127 | 8127-541 | 02/09/2018 | 02/08/2019 |
| LISN                             | SCHAFFNER    | NNB41     | 03/10013 | 02/06/2018 | 02/05/2019 |

**Remark:** Each piece of equipment is scheduled for calibration once a year.



Report No.: T180807D10-RP1

Page: 8 / 118

Rev.: 01

## 1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

| EUT Accessories Equipment |           |       |       |            |        |
|---------------------------|-----------|-------|-------|------------|--------|
| No.                       | Equipment | Brand | Model | Series No. | FCC ID |
|                           | N/A       |       |       |            |        |

| Support Equipment |           |         |               |            |          |
|-------------------|-----------|---------|---------------|------------|----------|
| No.               | Equipment | Brand   | Model         | Series No. | FCC ID   |
| 1                 | NB(B)     | Toshiba | PORTEGE R30-A | N/A        | PD97260H |

## 1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247, KDB 558074 D01, KDB 662911 D01.





Report No.: T180807D10-RP1

Page: 9 / 118

Rev.: 01

## 2. TEST SUMMERY

| FCC Standard Section | Report Section | Test Item                   | Result |
|----------------------|----------------|-----------------------------|--------|
| 15.203               | 1.3            | Antenna Requirement         | Pass   |
| 15.207(a)            | 5.1            | AC Conducted Emission       | Pass   |
| 15.247(a)(2)         | 5.2            | 6 dB Bandwidth              | Pass   |
| 2.1049               | 5.2            | Occupied Bandwidth (99%)    | Pass   |
| 15.247(b)            | 5.3            | Output Power Measurement    | Pass   |
| 15.247(e)            | 5.4            | Power Spectral Density      | Pass   |
| 15.247(d)            | 5.5            | Conducted Band Edge         | Pass   |
| 15.247(d)            | 5.5            | Conducted Spurious Emission | Pass   |
| 15.247(d)            | 5.6            | Radiation Band Edge         | Pass   |
| 15.247(d)            | 5.6            | Radiation Spurious Emission | Pass   |

### 3. DESCRIPTION OF TEST MODES

#### 3.1 THE WORST MODE OF OPERATING CONDITION

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Operation mode           | IEEE 802.11b Mode :1Mbps<br>IEEE 802.11g Mode :6Mbps<br>IEEE 802.11n HT20 Mode: MCS8<br>IEEE 802.11n HT40 Mode: MCS8                                                                                                                                                                                                                                                                                                                                                                                   |
| Test Channel Frequencies | <b>IEEE 802.11b Mode:</b><br>1. Lowest Channel: 2412MHz<br>2. Middle Channel: 2437MHz<br>3. Highest Channel: 2462MHz<br><b>IEEE 802.11g Mode:</b><br>1. Lowest Channel: 2412MHz<br>2. Middle Channel: 2437MHz<br>3. Highest Channel: 2462MHz<br><b>IEEE 802.11n HT20 Mode:</b><br>1. Lowest Channel: 2412MHz<br>2. Middle Channel: 2437MHz<br>3. Highest Channel: 2462MHz<br><b>IEEE 802.11n HT40 Mode:</b><br>1. Lowest Channel: 2422MHz<br>2. Middle Channel: 2437MHz<br>3. Highest Channel: 2452MHz |
| Operation Transmitter    | IEEE 802.11b Mode: 1T1R<br>IEEE 802.11g Mode: 1T1R<br>IEEE 802.11n HT20 Mode: 2T2R<br>IEEE 802.11n HT40 Mode: 2T2R                                                                                                                                                                                                                                                                                                                                                                                     |

**Remark:**

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

### 3.2 THE WORST MODE OF MEASUREMENT

| AC Power Line Conducted Emission |                                                                                                                                            |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Test Condition                   | AC Power line conducted emission for line and neutral                                                                                      |
| Power supply Mode                | Mode 1:EUT power by adapter                                                                                                                |
| Worst Mode                       | <input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4 |

| Radiated Emission Measurement Above 1G |                                                                                                                                                                                                                                                                                               |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Condition                         | Band edge, Emission for Unwanted and Fundamental                                                                                                                                                                                                                                              |
| Power supply Mode                      | Mode 1:EUT power by adapter                                                                                                                                                                                                                                                                   |
| Worst Mode                             | <input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4                                                                                                                                                    |
| Worst Position                         | <input type="checkbox"/> Placed in fixed position.<br><input type="checkbox"/> Placed in fixed position at X-Plane (E2-Plane)<br><input checked="" type="checkbox"/> Placed in fixed position at Y-Plane (E1-Plane)<br><input type="checkbox"/> Placed in fixed position at Z-Plane (H-Plane) |
| Worst Polarity                         | <input checked="" type="checkbox"/> Horizontal <input type="checkbox"/> Vertical                                                                                                                                                                                                              |

| Radiated Emission Measurement Below 1G |                                                                                                                                            |
|----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Test Condition                         | Radiated Emission Below 1G                                                                                                                 |
| Power supply Mode                      | Mode 1:EUT power by adapter                                                                                                                |
| Worst Mode                             | <input checked="" type="checkbox"/> Mode 1 <input type="checkbox"/> Mode 2 <input type="checkbox"/> Mode 3 <input type="checkbox"/> Mode 4 |


#### Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis ,X,Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case(Y-Plane and Horizontal) were recorded in this report
3. AC power line conducted emission and for below 1G radiation emission were performed the EUT transmit at the highest output power channel as worse case.

Report No.: T180807D10-RP1

## 4. EUT DUTY CYCLE

| Duty Cycle    |            |             |                |
|---------------|------------|-------------|----------------|
| Configuration | TX ON (ms) | TX ALL (ms) | Duty Cycle (%) |
| 802.11b       | 1.0000     | 1.0000      | 100.00%        |
| 802.11g       | 1.0000     | 1.0000      | 100.00%        |
| 802.11n HT20  | 1.0000     | 1.0000      | 100.00%        |
| 802.11n HT40  | 1.0000     | 1.0000      | 100.00%        |

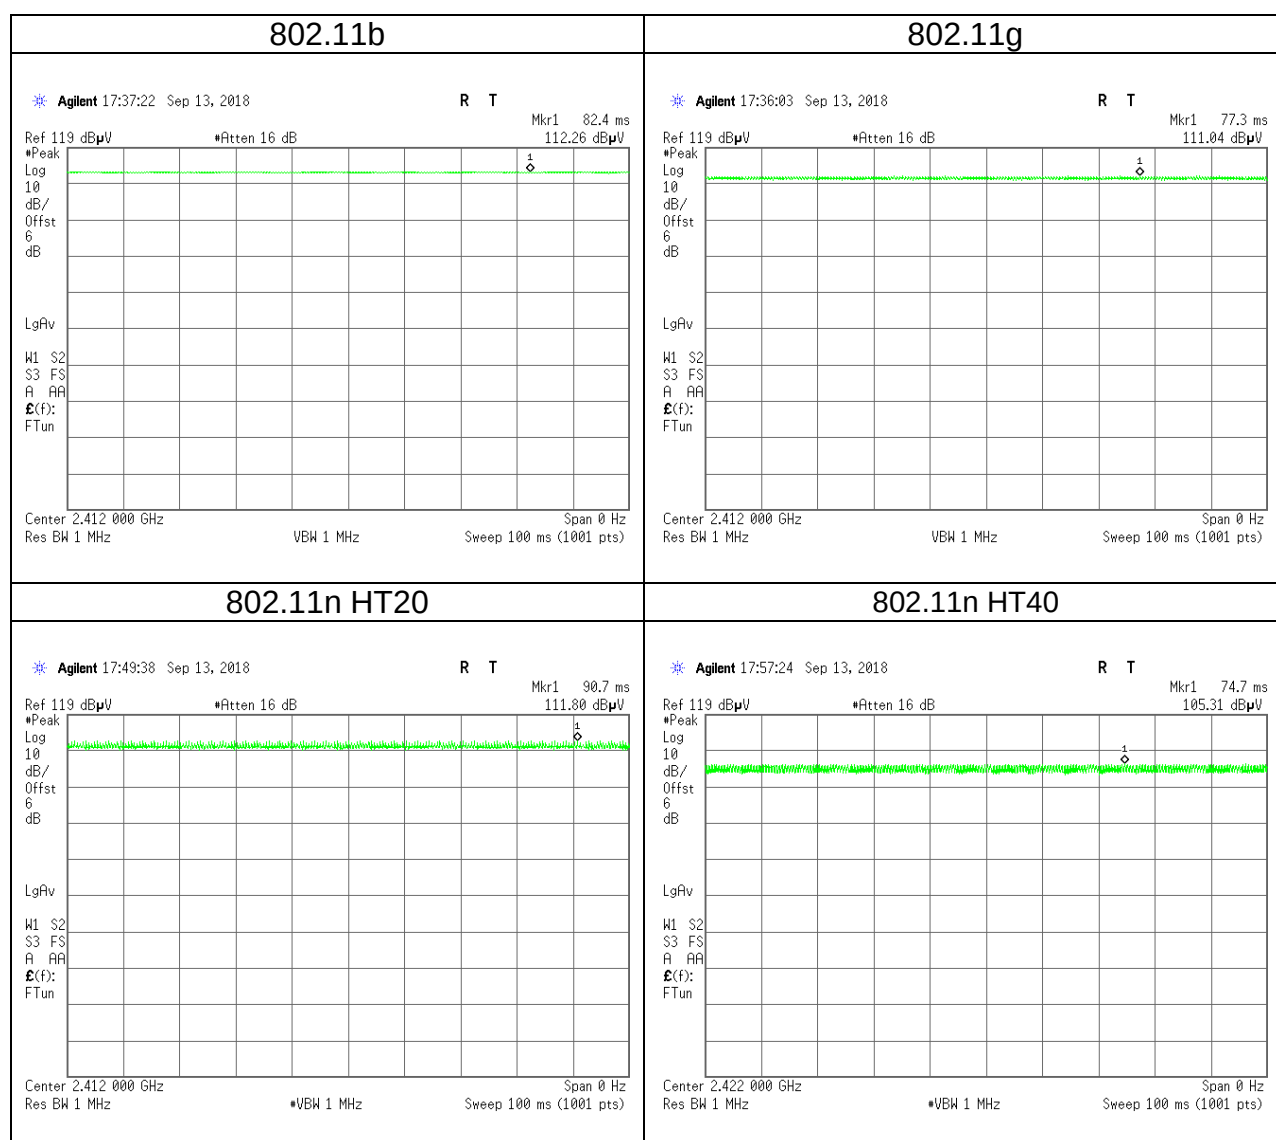

## 5. TEST RESULT

### 5.1 AC POWER LINE CONDUCTED EMISSION

#### 5.1.1 Test Limit

According to §15.207(a),

| Frequency Range<br>(MHz) | Limits(dBμV) |           |
|--------------------------|--------------|-----------|
|                          | Quasi-peak   | Average   |
| 0.15 to 0.50             | 66 to 56*    | 56 to 46* |
| 0.50 to 5                | 56           | 46        |
| 5 to 30                  | 60           | 50        |


\* Decreases with the logarithm of the frequency.

#### 5.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

#### 5.1.3 Test Setup

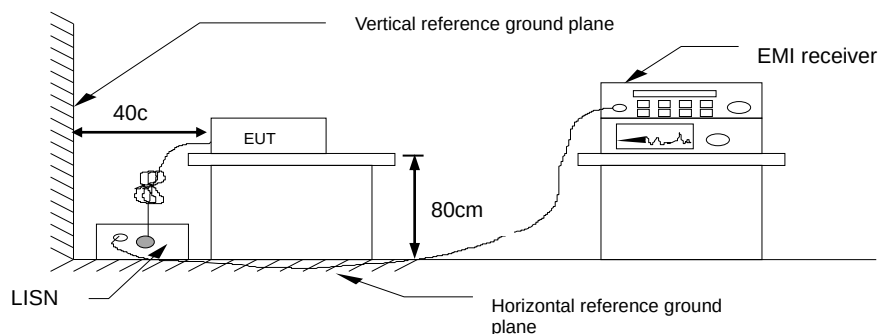


#### 5.1.4 Test Result

**Pass.**

## Test Data

|               |        |               |                    |
|---------------|--------|---------------|--------------------|
| Test Mode:    | Mode 1 | Temp/Hum      | 24(°C)/ 50%RH      |
| Phase:        | Line   | Test Date     | September 17, 2018 |
| Test Voltage: | 120V   | Test Engineer | Dally Hong         |

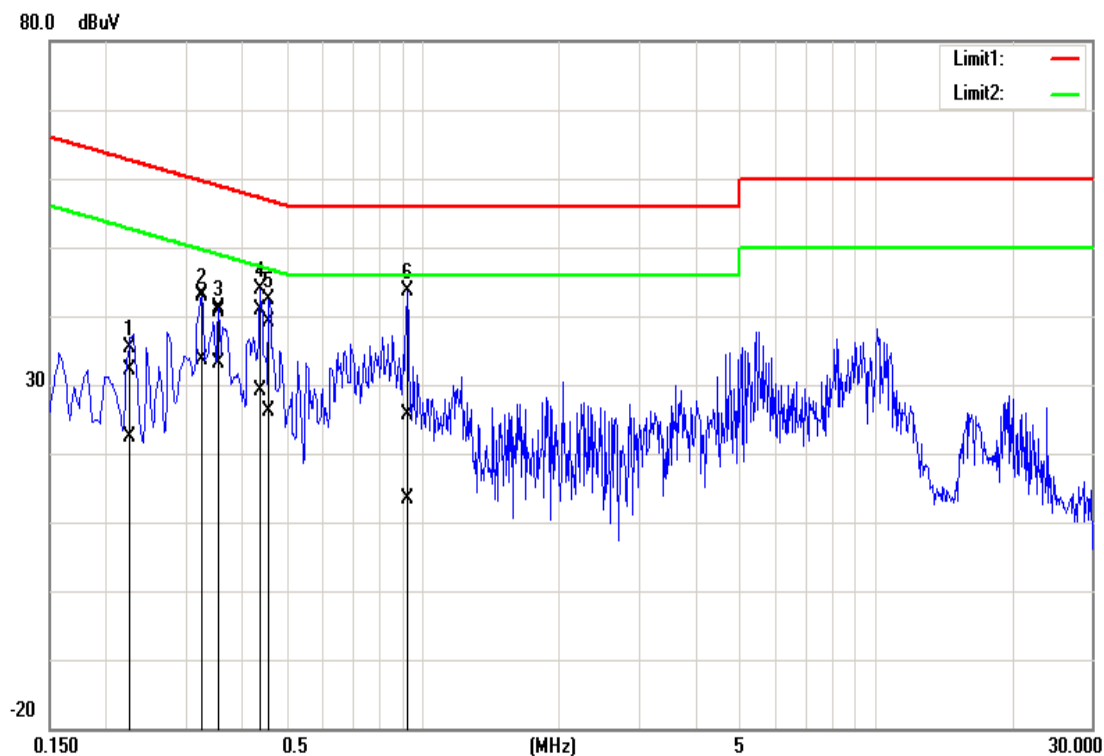


| No. | Frequency<br>(MHz) | QuasiPeak<br>reading<br>(dBuV) | Average<br>reading<br>(dBuV) | Correction<br>factor<br>(dB) | QuasiPeak<br>result<br>(dBuV) | Average<br>result<br>(dBuV) | QuasiPeak<br>limit<br>(dBuV) | Average<br>limit<br>(dBuV) | QuasiPeak<br>margin<br>(dB) | Average<br>margin<br>(dB) | Remark |
|-----|--------------------|--------------------------------|------------------------------|------------------------------|-------------------------------|-----------------------------|------------------------------|----------------------------|-----------------------------|---------------------------|--------|
| 1   | 0.2220             | 31.92                          | 22.29                        | 0.11                         | 32.03                         | 22.40                       | 62.74                        | 52.74                      | -30.71                      | -30.34                    | Pass   |
| 2   | 0.3260             | 43.12                          | 33.44                        | 0.12                         | 43.24                         | 33.56                       | 59.55                        | 49.55                      | -16.31                      | -15.99                    | Pass   |
| 3*  | 0.3540             | 40.47                          | 32.90                        | 0.12                         | 40.59                         | 33.02                       | 58.87                        | 48.87                      | -18.28                      | -15.85                    | Pass   |
| 4   | 0.4380             | 40.76                          | 29.05                        | 0.12                         | 40.88                         | 29.17                       | 57.10                        | 47.10                      | -16.22                      | -17.93                    | Pass   |
| 5   | 0.4580             | 38.94                          | 25.94                        | 0.12                         | 39.06                         | 26.06                       | 56.73                        | 46.73                      | -17.67                      | -20.67                    | Pass   |
| 6   | 0.9260             | 25.40                          | 13.31                        | 0.13                         | 25.53                         | 13.44                       | 56.00                        | 46.00                      | -30.47                      | -32.56                    | Pass   |

Report No.: T180807D10-RP1

Page: 15 / 118

Rev.: 01

|               |         |               |                    |
|---------------|---------|---------------|--------------------|
| Test Mode:    | Mode 1  | Temp/Hum      | 24(°C)/ 50%RH      |
| Phase:        | Neutral | Test Date     | September 17, 2018 |
| Test Voltage: | 120V    | Test Engineer | Dally Hong         |

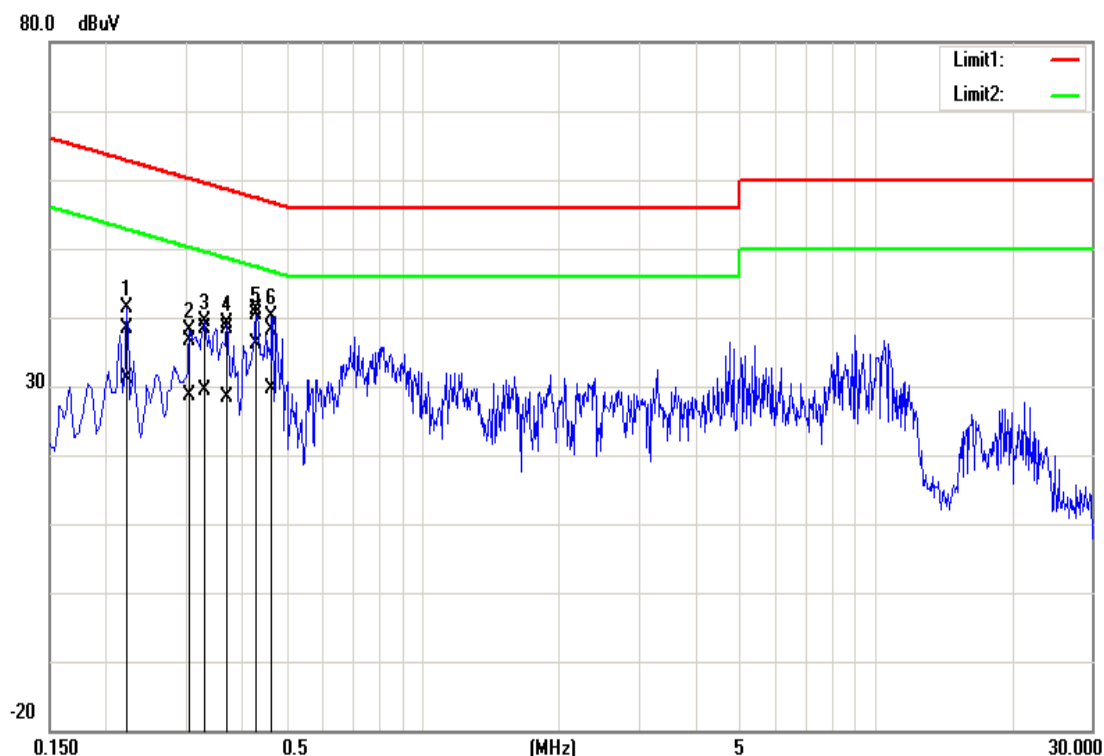

| No. | Frequency<br>(MHz) | QuasiPeak<br>reading<br>(dBuV) | Average<br>reading<br>(dBuV) | Correction<br>factor<br>(dB) | QuasiPeak<br>result<br>(dBuV) | Average<br>result<br>(dBuV) | QuasiPeak<br>limit<br>(dBuV) | Average<br>limit<br>(dBuV) | QuasiPeak<br>margin<br>(dB) | Average<br>margin<br>(dB) | Remark |
|-----|--------------------|--------------------------------|------------------------------|------------------------------|-------------------------------|-----------------------------|------------------------------|----------------------------|-----------------------------|---------------------------|--------|
| 1   | 0.2220             | 38.37                          | 31.09                        | 0.13                         | 38.50                         | 31.22                       | 62.74                        | 52.74                      | -24.24                      | -21.52                    | Pass   |
| 2   | 0.3060             | 36.52                          | 28.48                        | 0.13                         | 36.65                         | 28.61                       | 60.08                        | 50.08                      | -23.43                      | -21.47                    | Pass   |
| 3   | 0.3300             | 38.28                          | 29.29                        | 0.13                         | 38.41                         | 29.42                       | 59.45                        | 49.45                      | -21.04                      | -20.03                    | Pass   |
| 4   | 0.3700             | 38.31                          | 28.37                        | 0.13                         | 38.44                         | 28.50                       | 58.50                        | 48.50                      | -20.06                      | -20.00                    | Pass   |
| 5*  | 0.4300             | 41.02                          | 36.04                        | 0.13                         | 41.15                         | 36.17                       | 57.25                        | 47.25                      | -16.10                      | -11.08                    | Pass   |
| 6   | 0.4660             | 38.00                          | 29.61                        | 0.13                         | 38.13                         | 29.74                       | 56.58                        | 46.58                      | -18.45                      | -16.84                    | Pass   |

## 5.2 6dB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

### 5.2.1 Test Limit

According to §15.247(a)(2),

**6 dB Bandwidth** :

|       |                          |
|-------|--------------------------|
| Limit | Shall be at least 500kHz |
|-------|--------------------------|


**Occupied Bandwidth(99%)** : For reporting purposes only.

### 5.2.2 Test Procedure

Test method Refer as KDB 558074 D01 and ANSI 63.10:2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 100kHz, VBW = 300kHz and Detector = Peak, to measurement 6 dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

### 5.2.3 Test Setup





## 5.2.4 Test Result

| Test mode: IEEE 802.11b Mode / 2412-2462 MHz |                 |                        |                        |                      |                      |                 |
|----------------------------------------------|-----------------|------------------------|------------------------|----------------------|----------------------|-----------------|
| Channel                                      | Frequency (MHz) | Chain A OBW(99%) (MHz) | Chain B OBW(99%) (MHz) | Chain A 6dB BW (MHz) | Chain B 6dB BW (MHz) | 6dB limit (kHz) |
| Low                                          | 2412            | 14.2836                | 14.1968                | 10.0435              | 10.0435              | ≥500            |
| Mid                                          | 2437            | 14.2836                | 14.1534                | 10.0435              | 10.0435              |                 |
| High                                         | 2462            | 14.2836                | 14.1534                | 10.0435              | 10.0435              |                 |


| Test mode: IEEE 802.11g Mode / 2412-2462 MHz |                 |                        |                        |                      |                      |                 |
|----------------------------------------------|-----------------|------------------------|------------------------|----------------------|----------------------|-----------------|
| Channel                                      | Frequency (MHz) | Chain A OBW(99%) (MHz) | Chain B OBW(99%) (MHz) | Chain A 6dB BW (MHz) | Chain B 6dB BW (MHz) | 6dB limit (kHz) |
| Low                                          | 2412            | 16.4109                | 16.3241                | 16.3913              | 16.3913              | ≥500            |
| Mid                                          | 2437            | 16.3675                | 16.3241                | 16.3913              | 16.3913              |                 |
| High                                         | 2462            | 16.3675                | 16.3241                | 16.3913              | 16.3913              |                 |

| Test mode: IEEE 802.11n HT20 Mode / 2412-2462 MHz |                 |                        |                        |                      |                      |                 |
|---------------------------------------------------|-----------------|------------------------|------------------------|----------------------|----------------------|-----------------|
| Channel                                           | Frequency (MHz) | Chain A OBW(99%) (MHz) | Chain B OBW(99%) (MHz) | Chain A 6dB BW (MHz) | Chain B 6dB BW (MHz) | 6dB limit (kHz) |
| Low                                               | 2412            | 17.2793                | 17.2793                | 16.9565              | 16.6087              | ≥500            |
| Mid                                               | 2437            | 17.2358                | 17.2358                | 16.9565              | 16.5652              |                 |
| High                                              | 2462            | 17.2358                | 17.2793                | 17.0000              | 16.7826              |                 |

| Test mode: IEEE 802.11n HT40 Mode / 2422-2452 MHz |                 |                        |                        |                      |                      |                 |
|---------------------------------------------------|-----------------|------------------------|------------------------|----------------------|----------------------|-----------------|
| Channel                                           | Frequency (MHz) | Chain A OBW(99%) (MHz) | Chain B OBW(99%) (MHz) | Chain A 6dB BW (MHz) | Chain B 6dB BW (MHz) | 6dB limit (kHz) |
| Low                                               | 2422            | 35.5426                | 35.0795                | 35.362               | 33.739               | >500            |
| Mid                                               | 2437            | 35.5426                | 35.0795                | 35.362               | 33.739               |                 |
| High                                              | 2452            | 35.5426                | 35.3111                | 35.362               | 35.13                |                 |


Report No.: T180807D10-RP1

## Test Data (6dB BANDWIDTH)

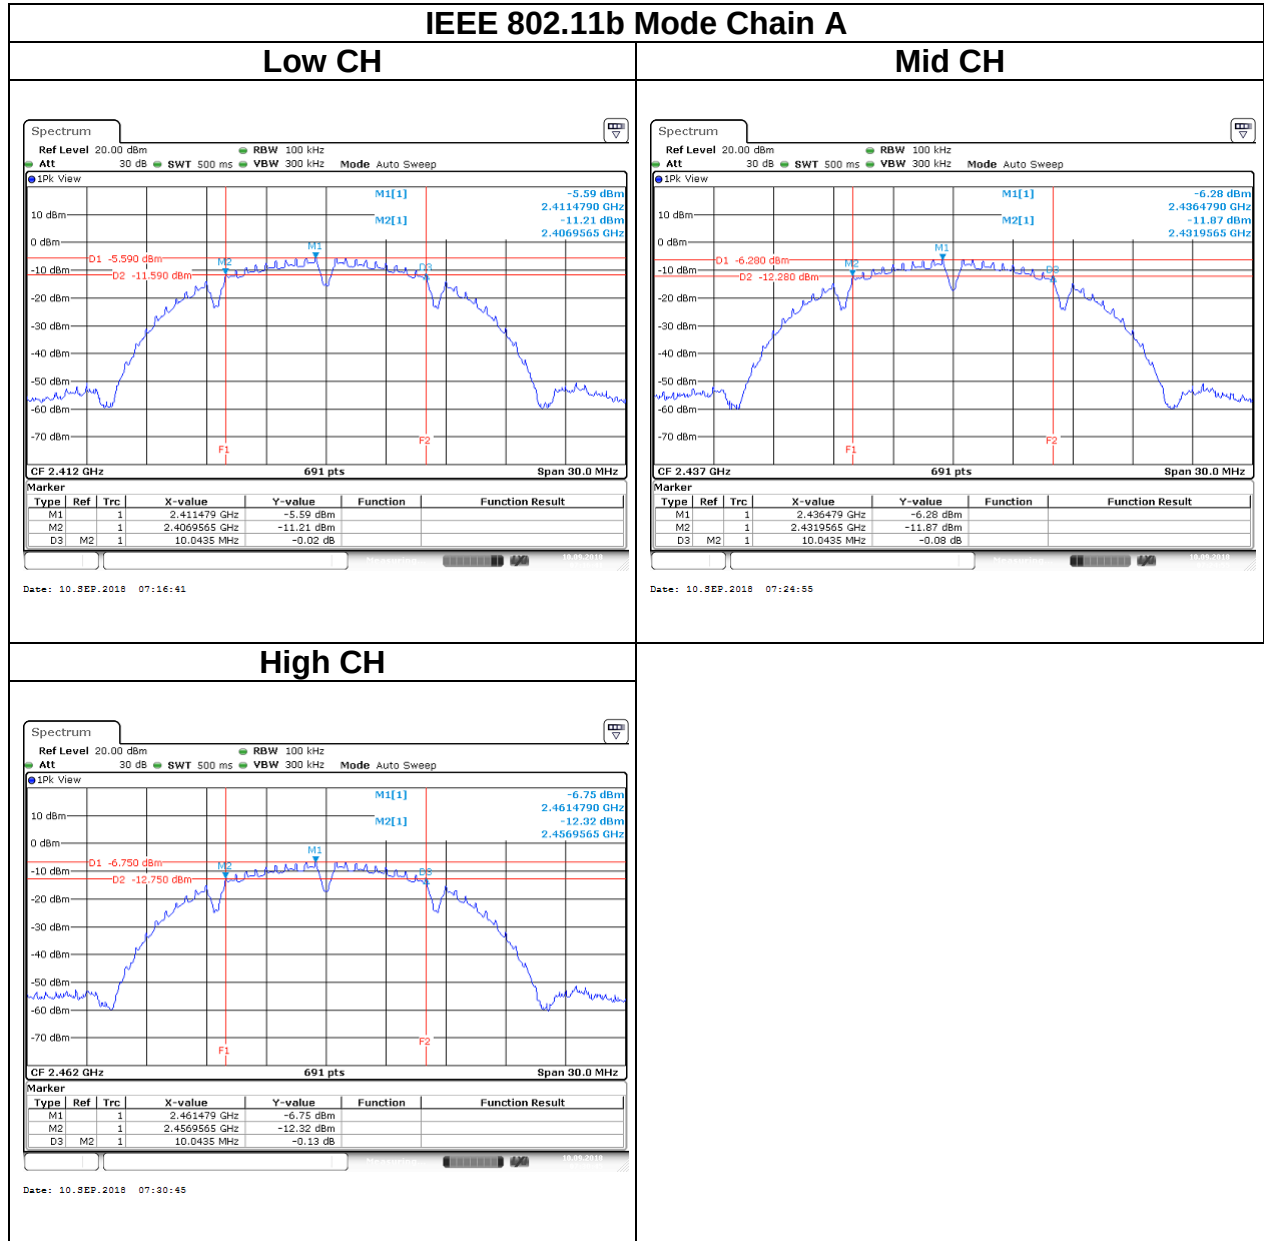


## IEEE 802.11g Mode Chain A


### Low CH

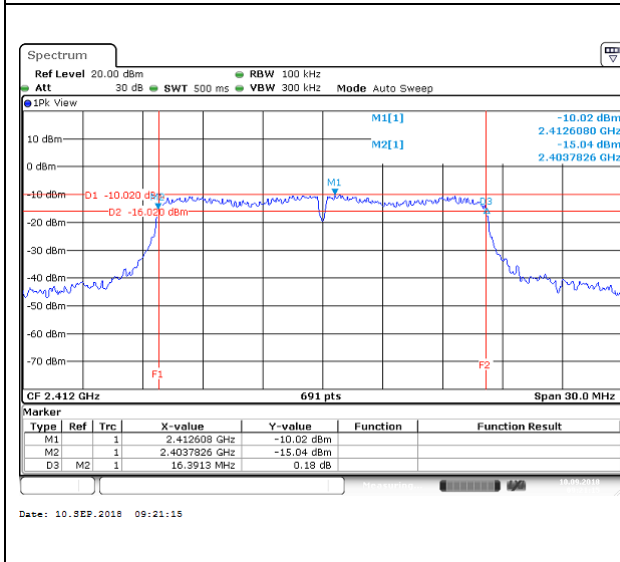


### Mid CH

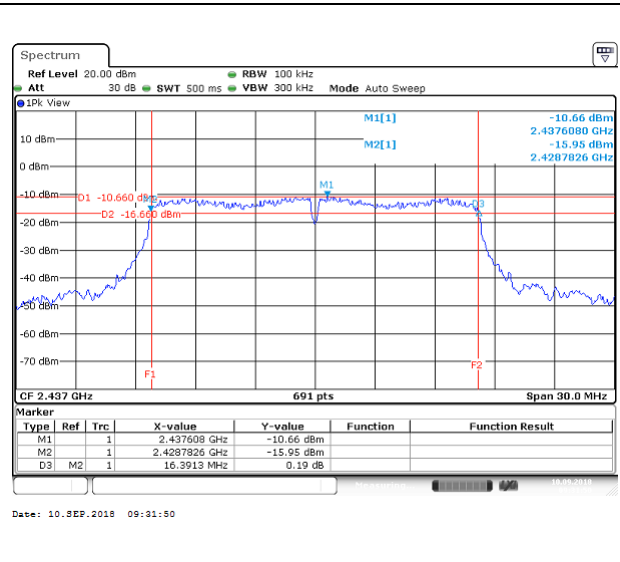

### High CH

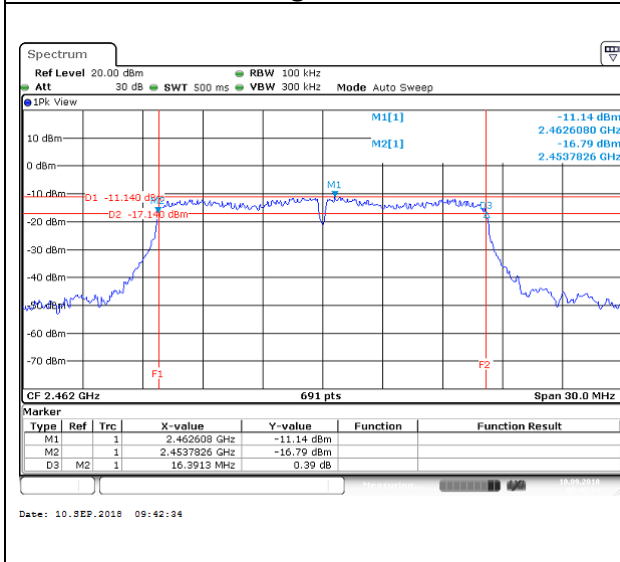


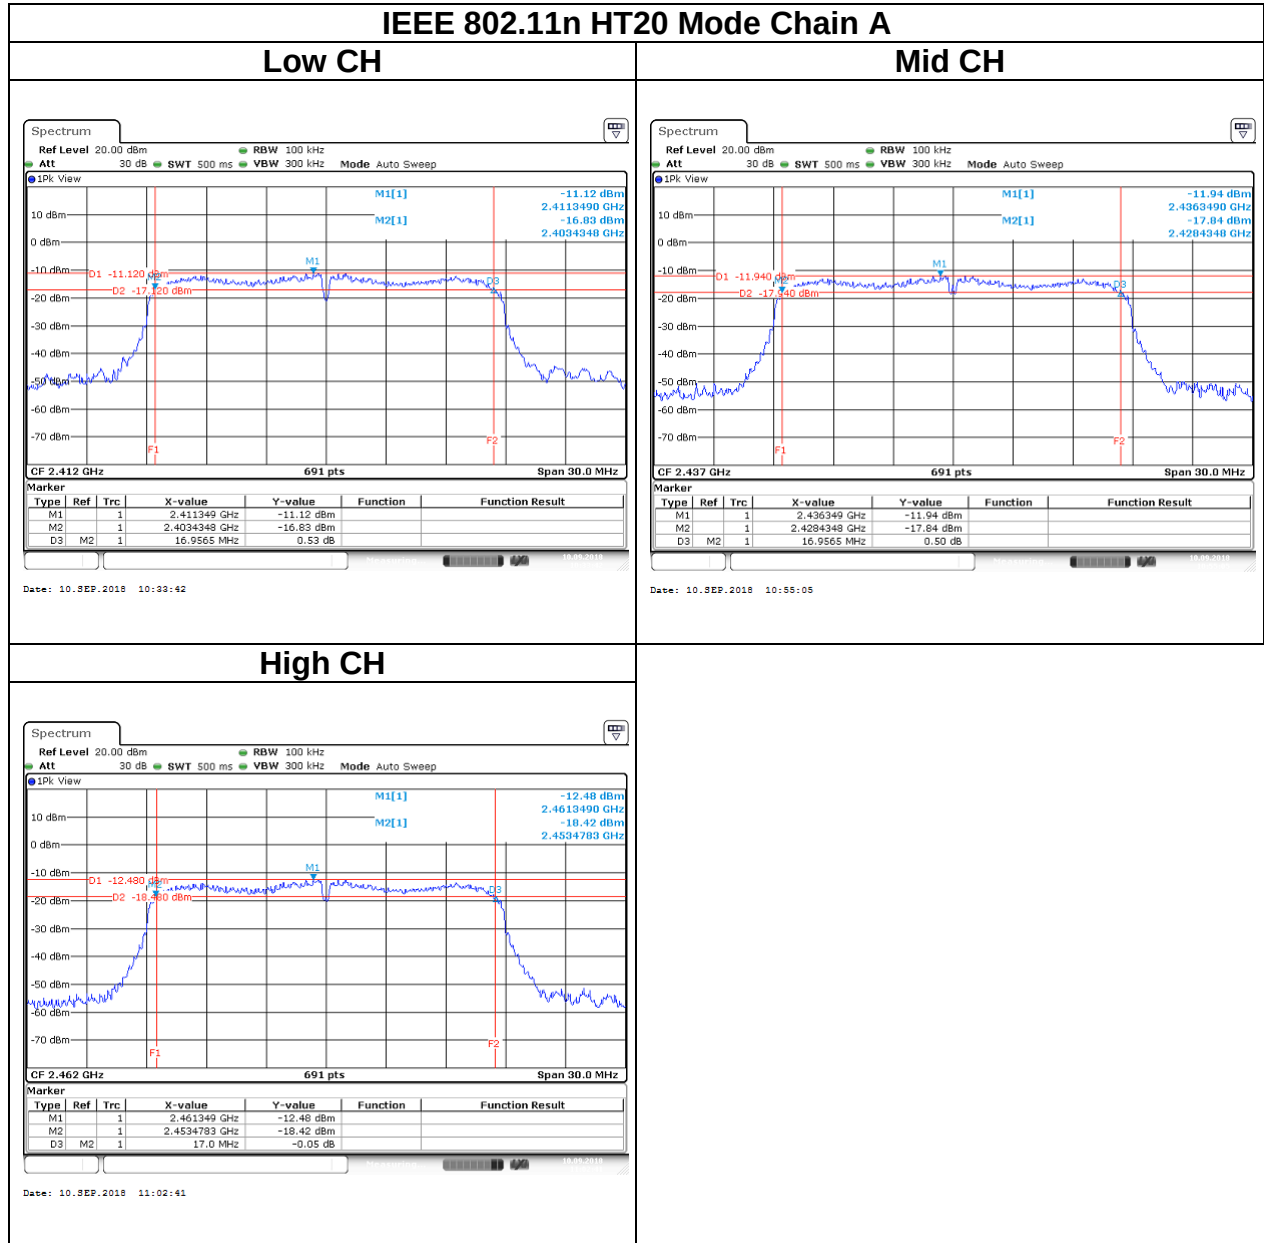


Report No.: T180807D10-RP1

## IEEE 802.11n HT40 Mode Chain A


### Low CH

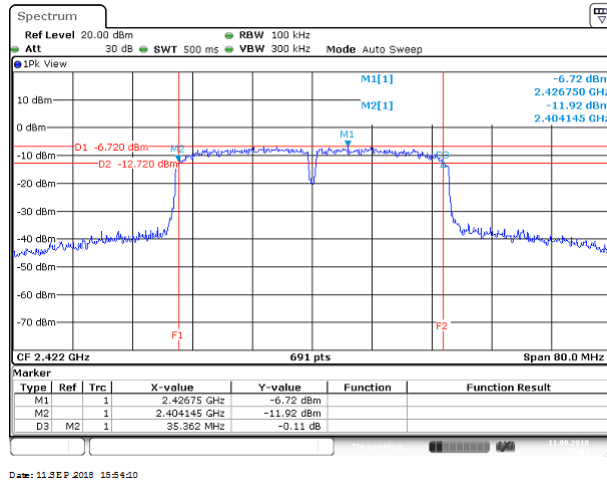


### Mid CH

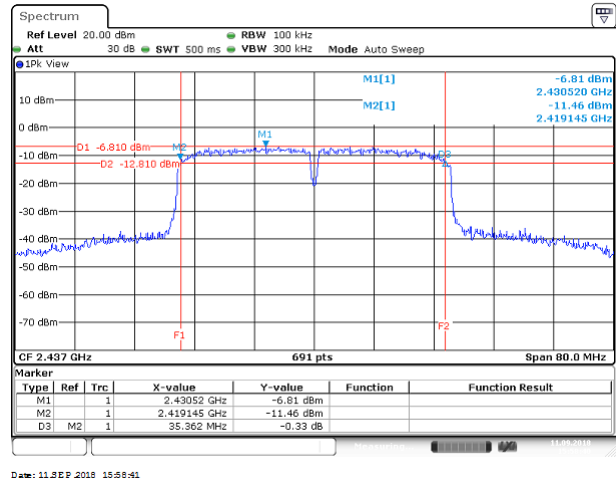


### High CH

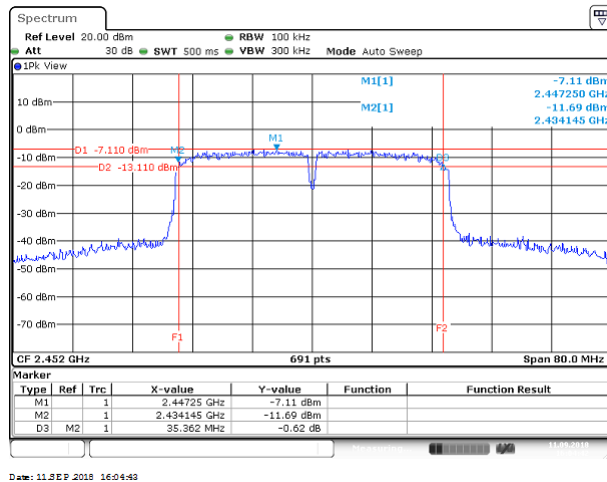

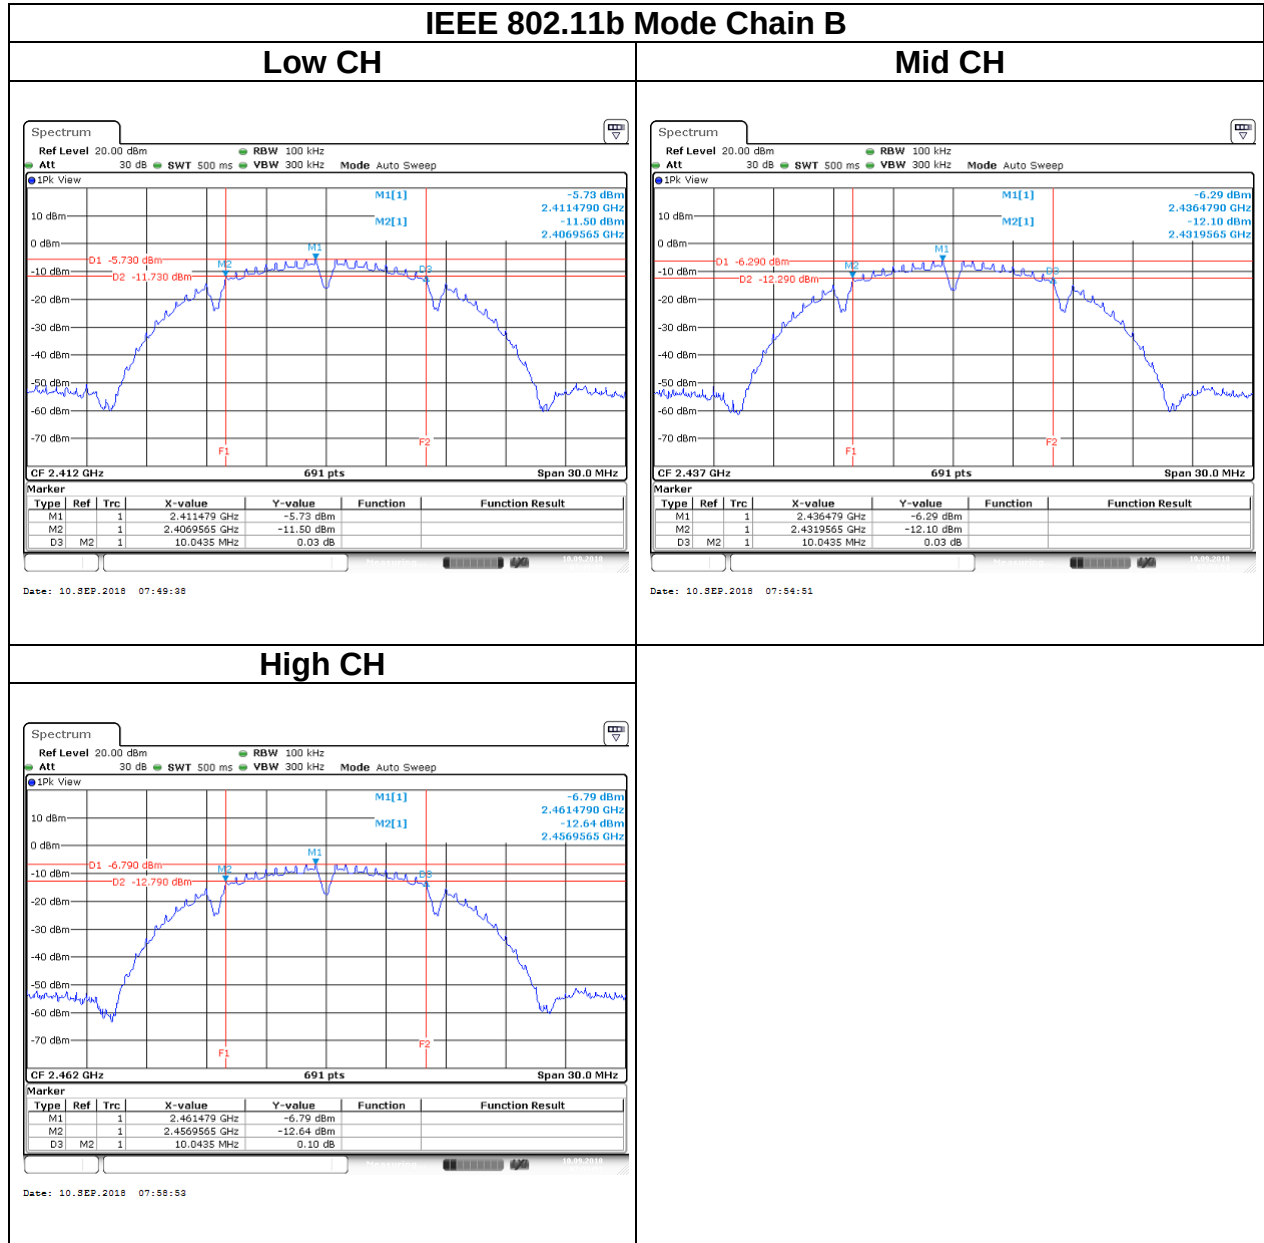


## IEEE 802.11g Mode Chain B


### Low CH

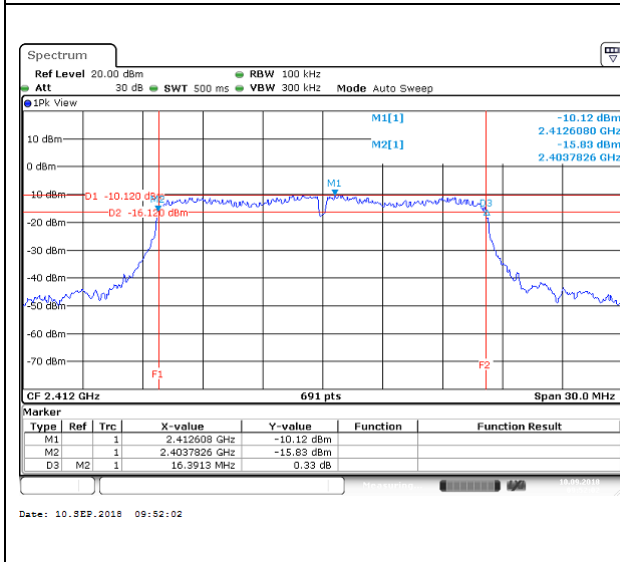


### Mid CH

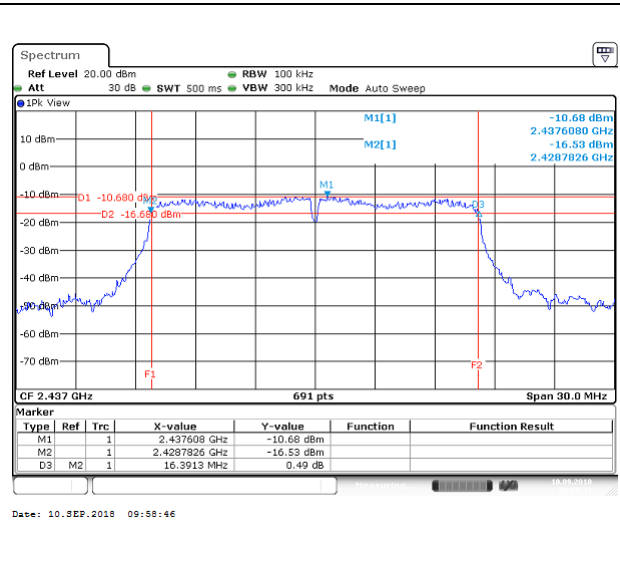


### High CH

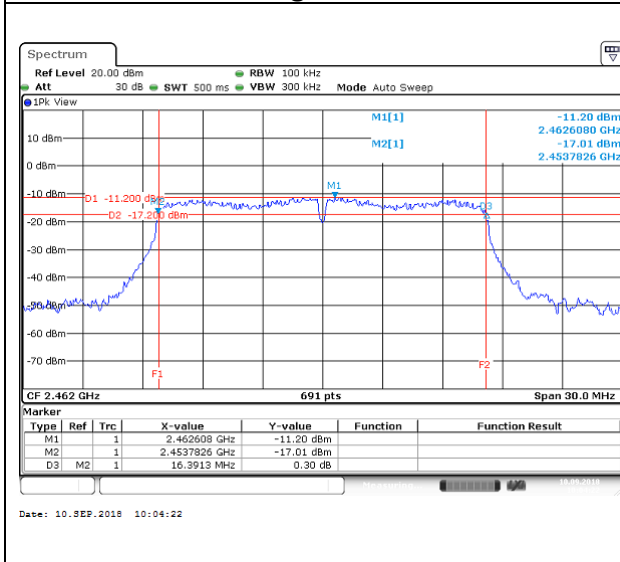

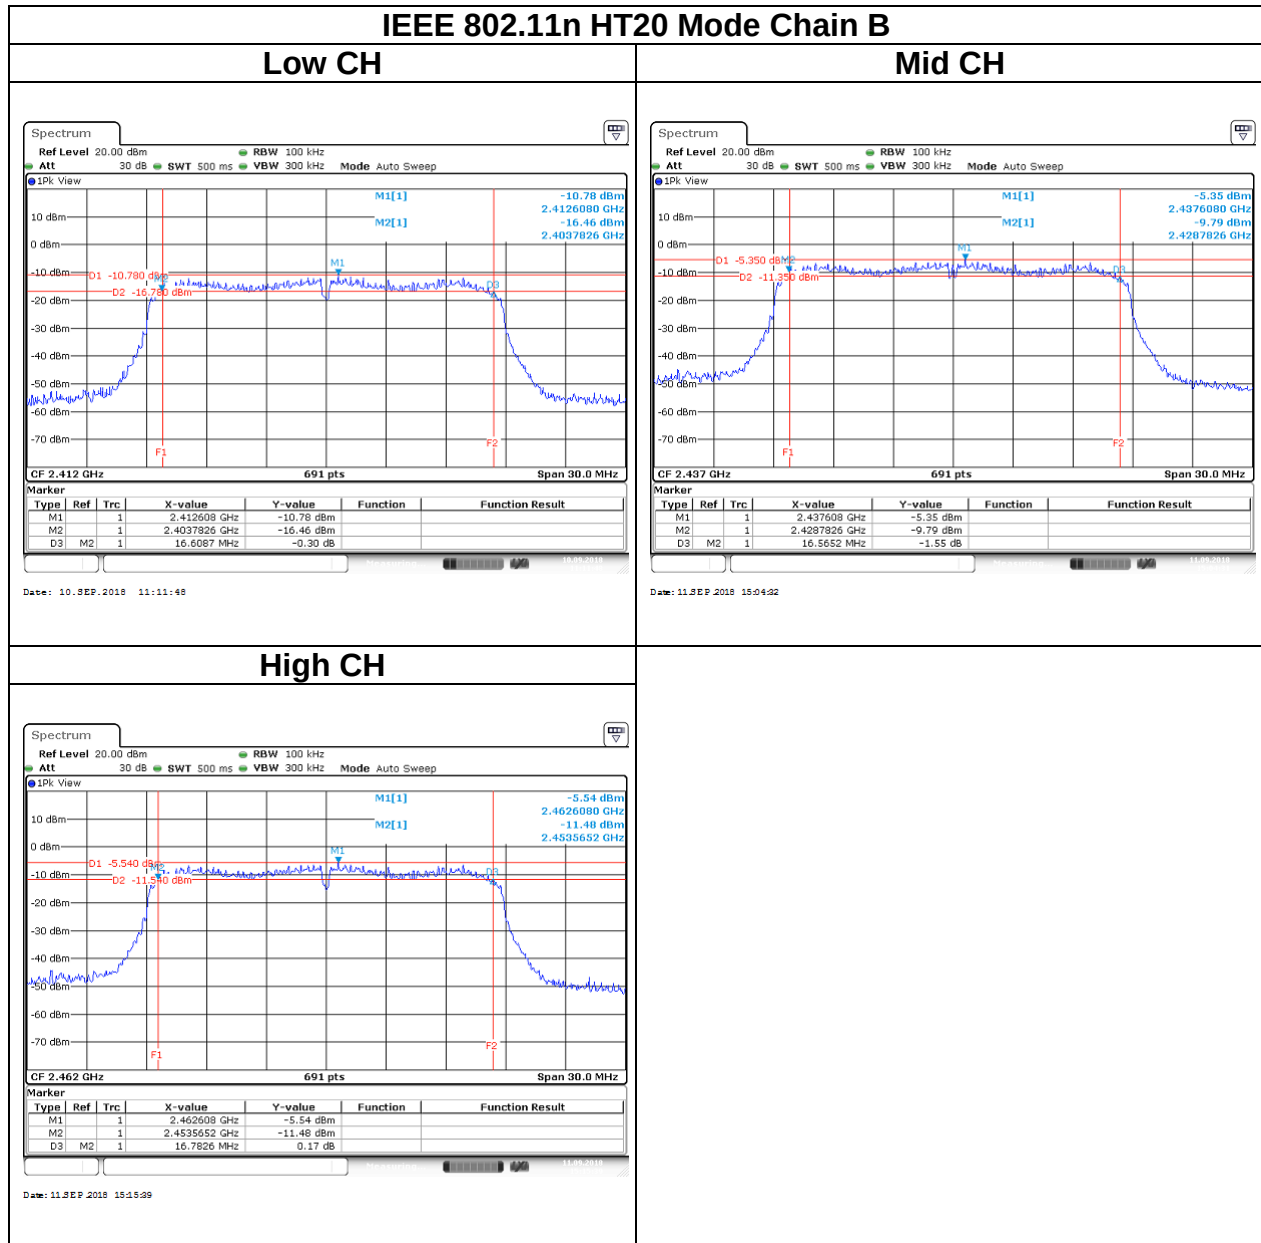




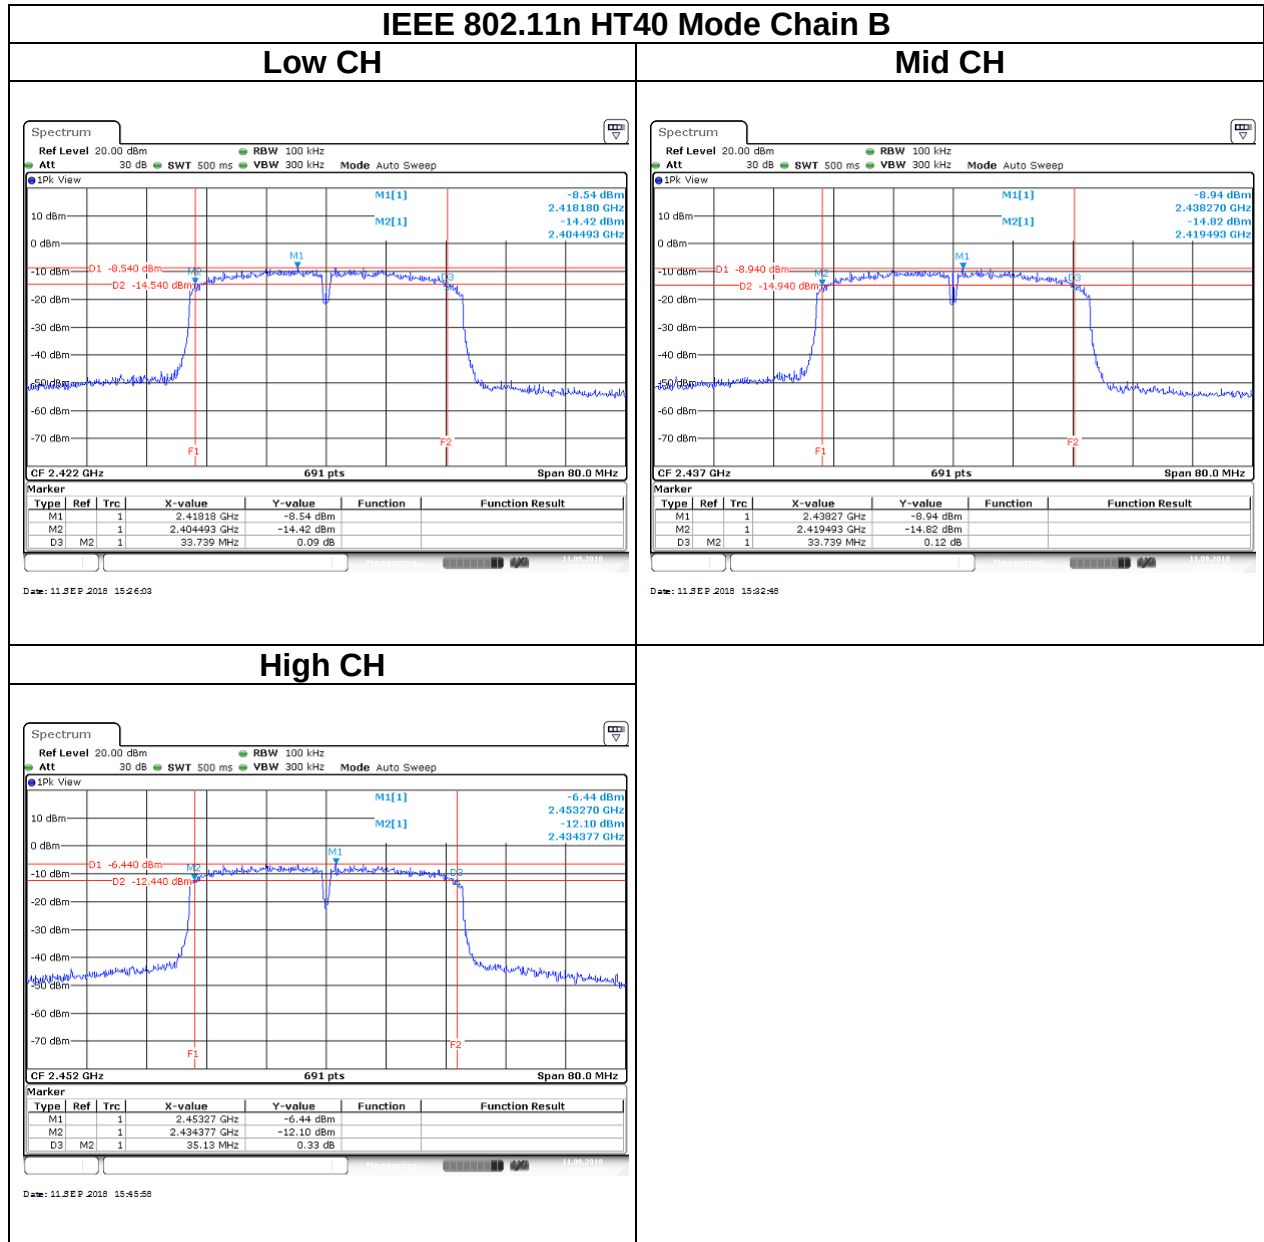





Report No.: T180807D10-RP1

## Test Data (BANDWIDTH 99%)

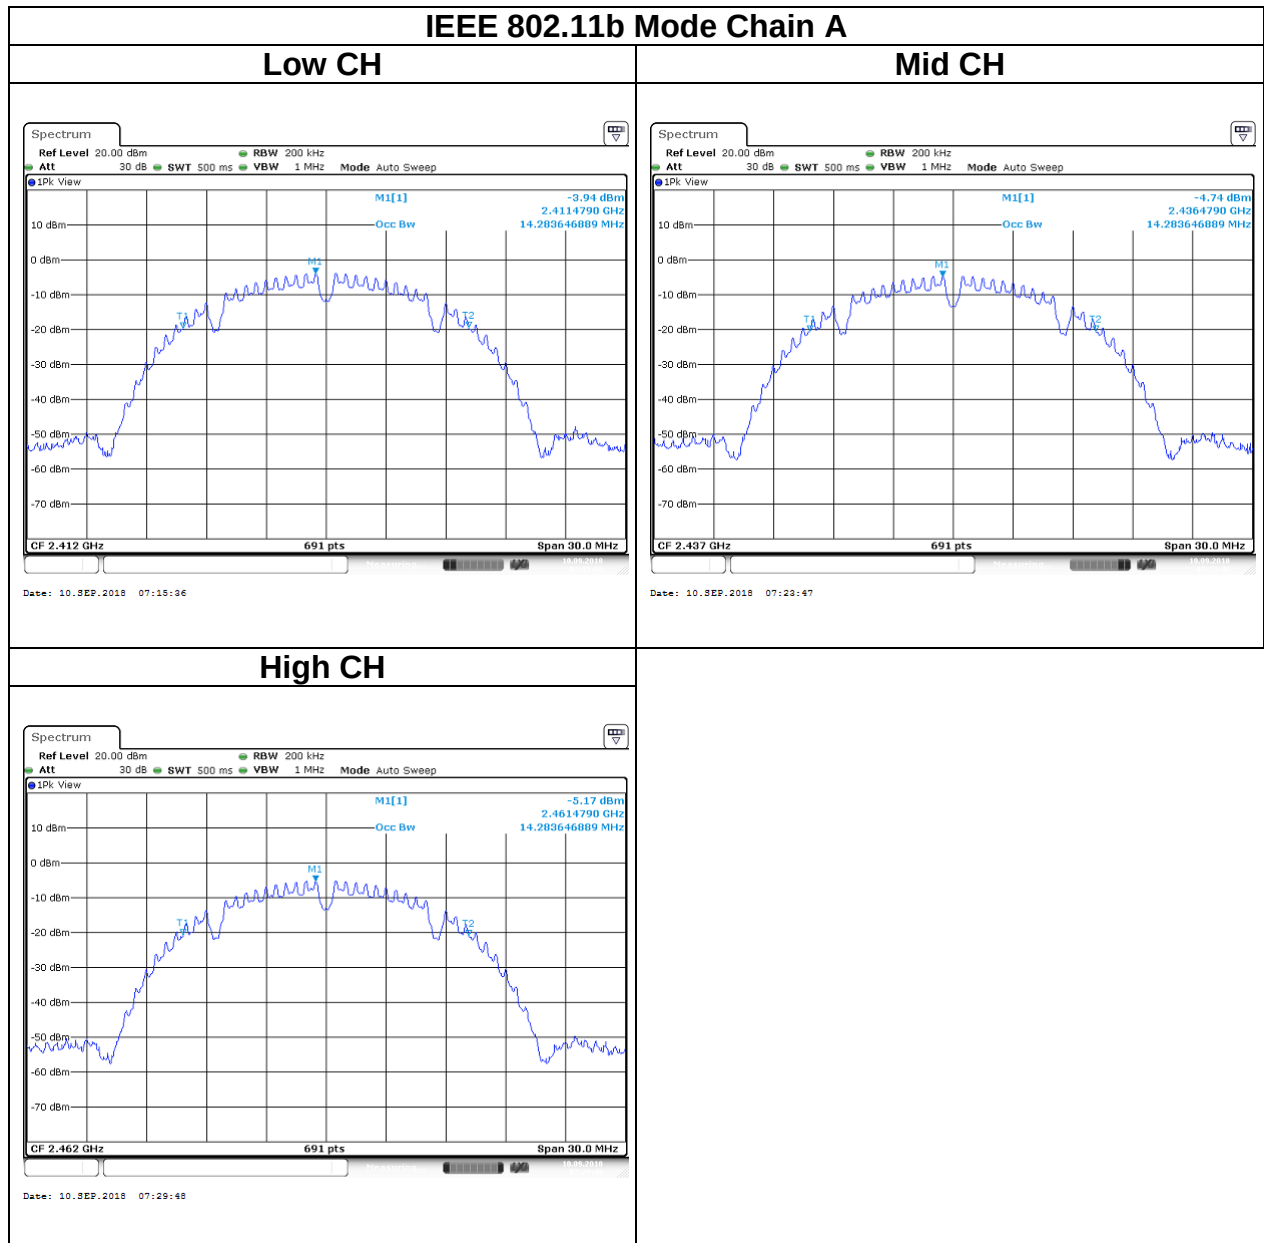


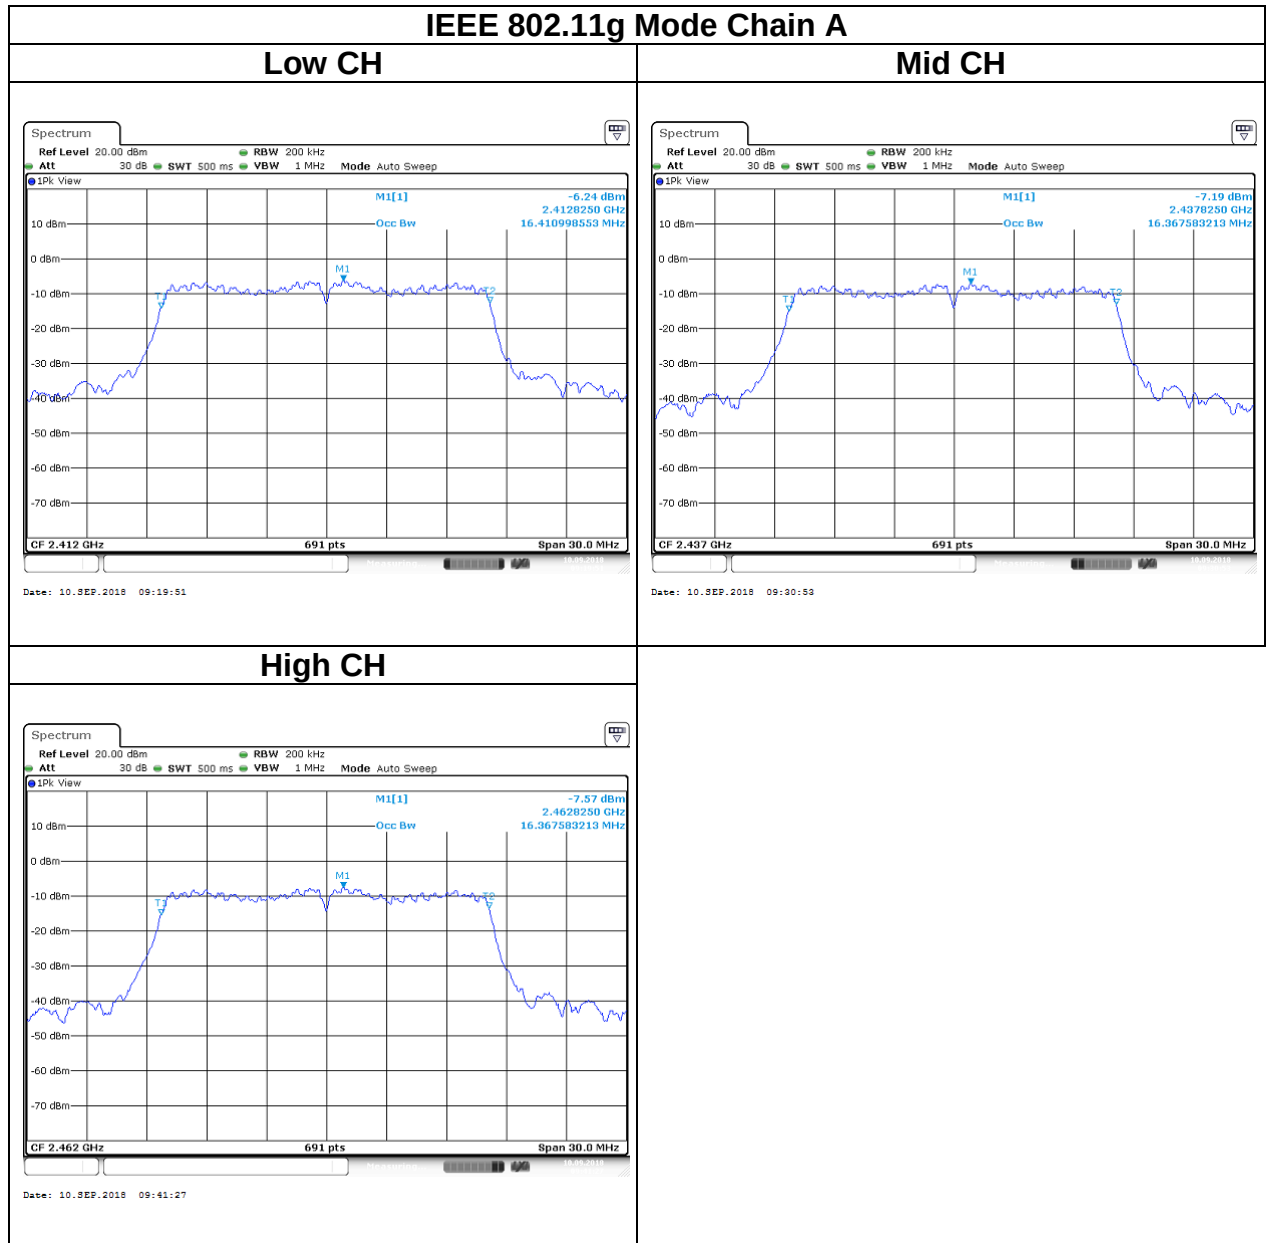

Report No.: T180807D10-RP1

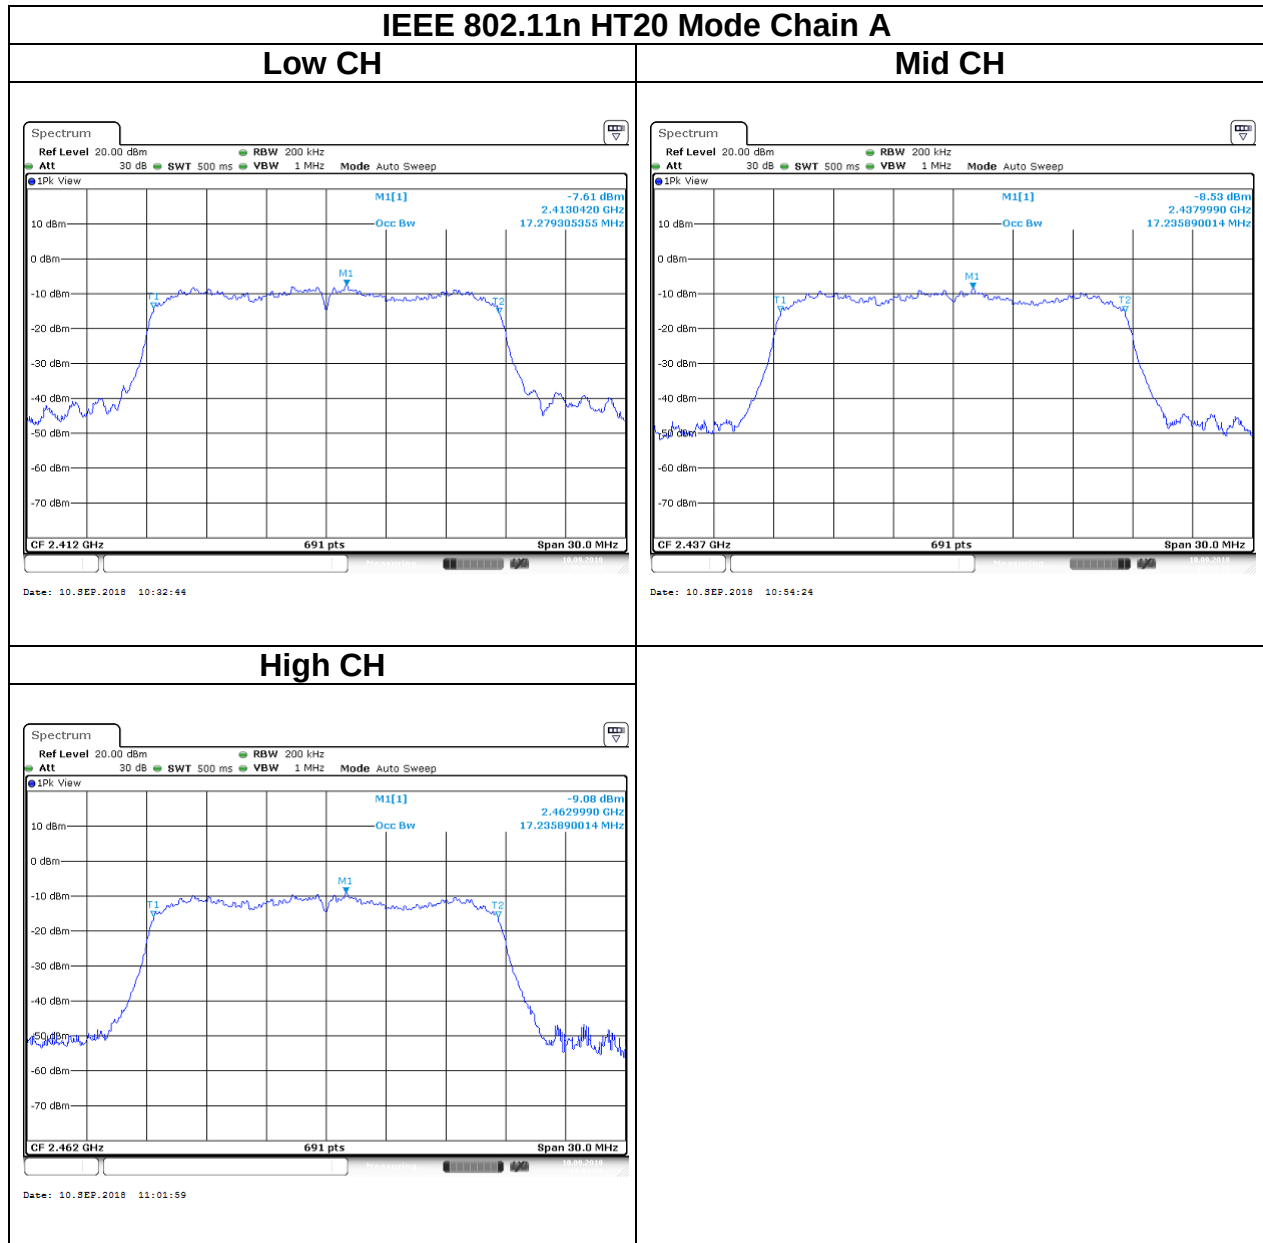


Report No.: T180807D10-RP1

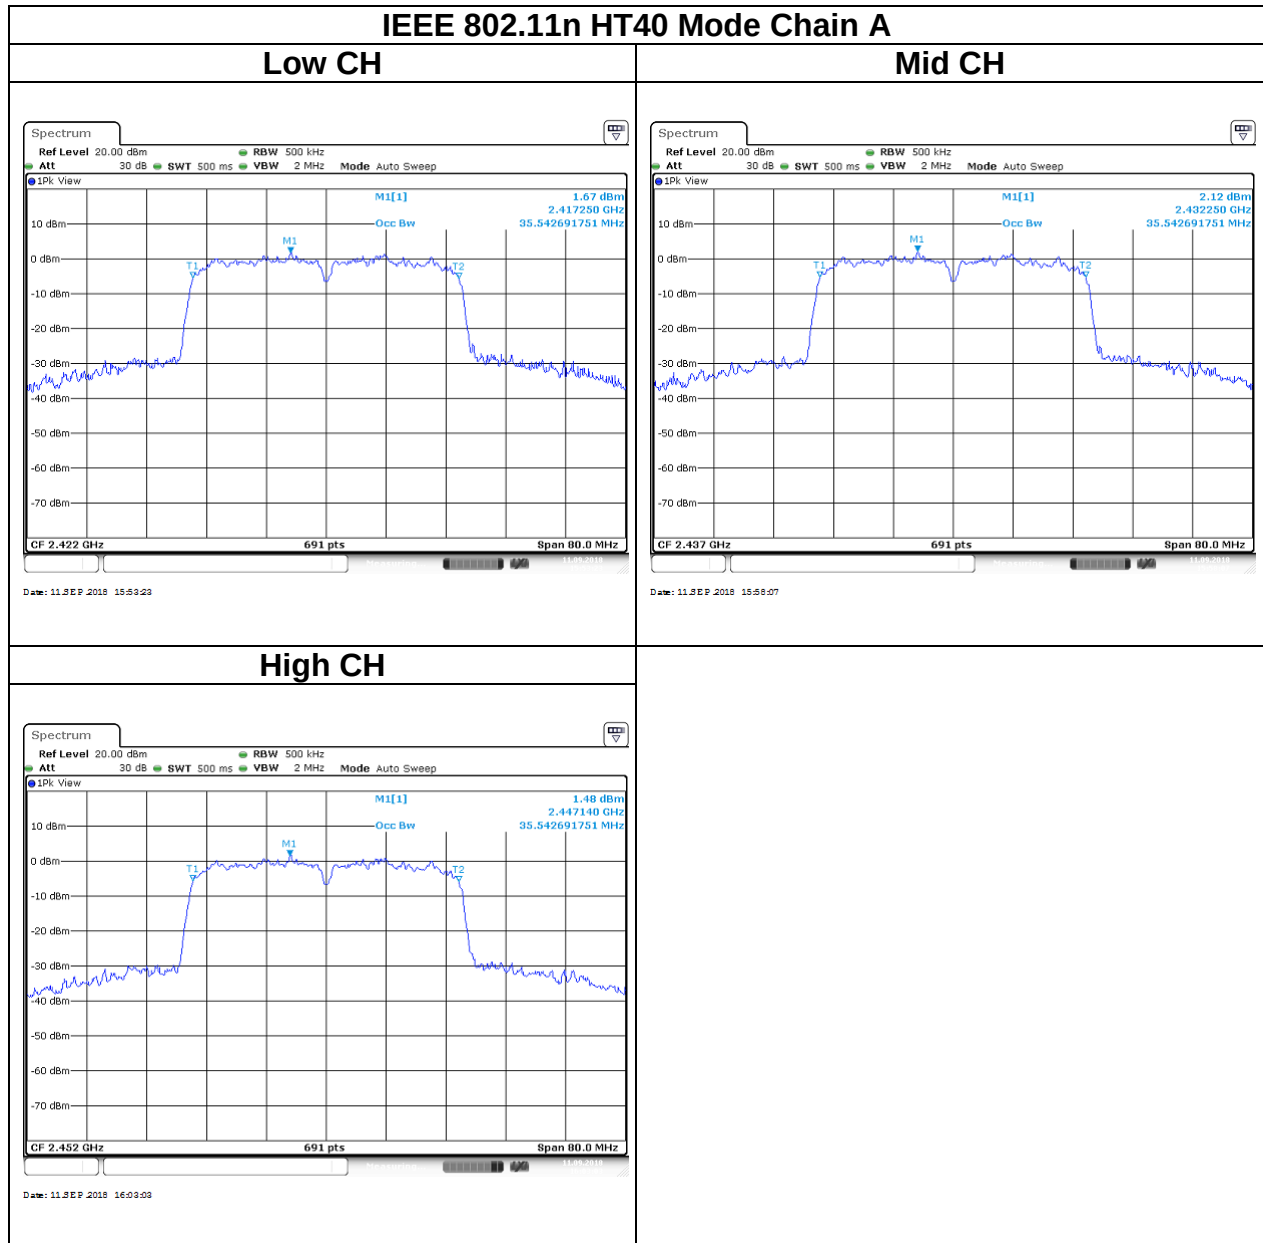


Report No.: T180807D10-RP1

## IEEE 802.11b Mode Chain B


### Low CH

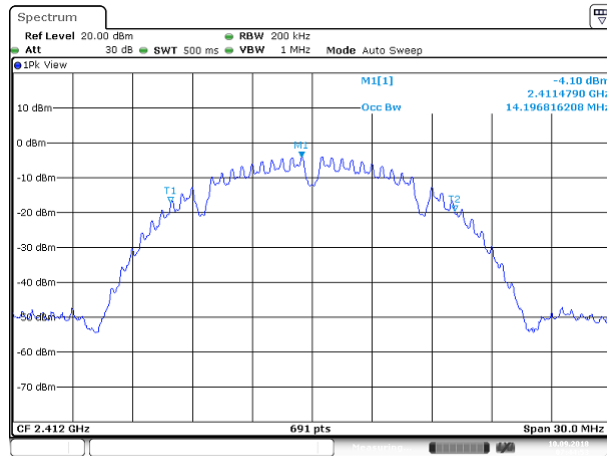


### Mid CH

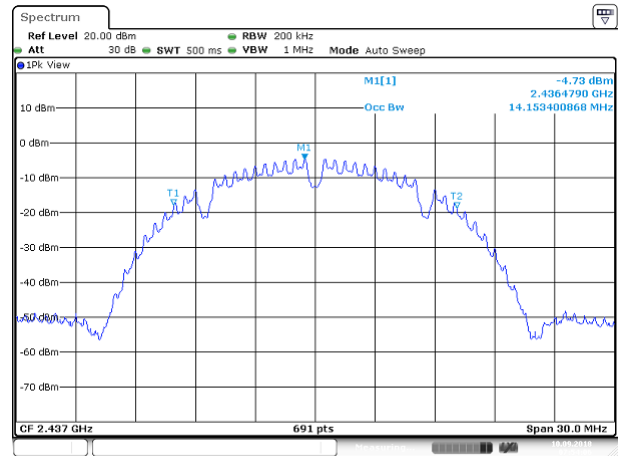

### High CH

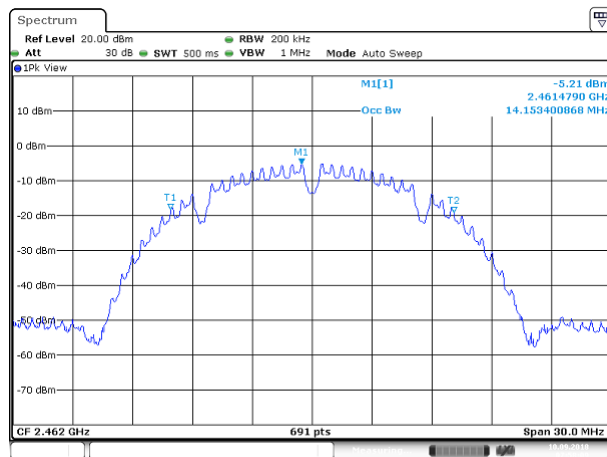

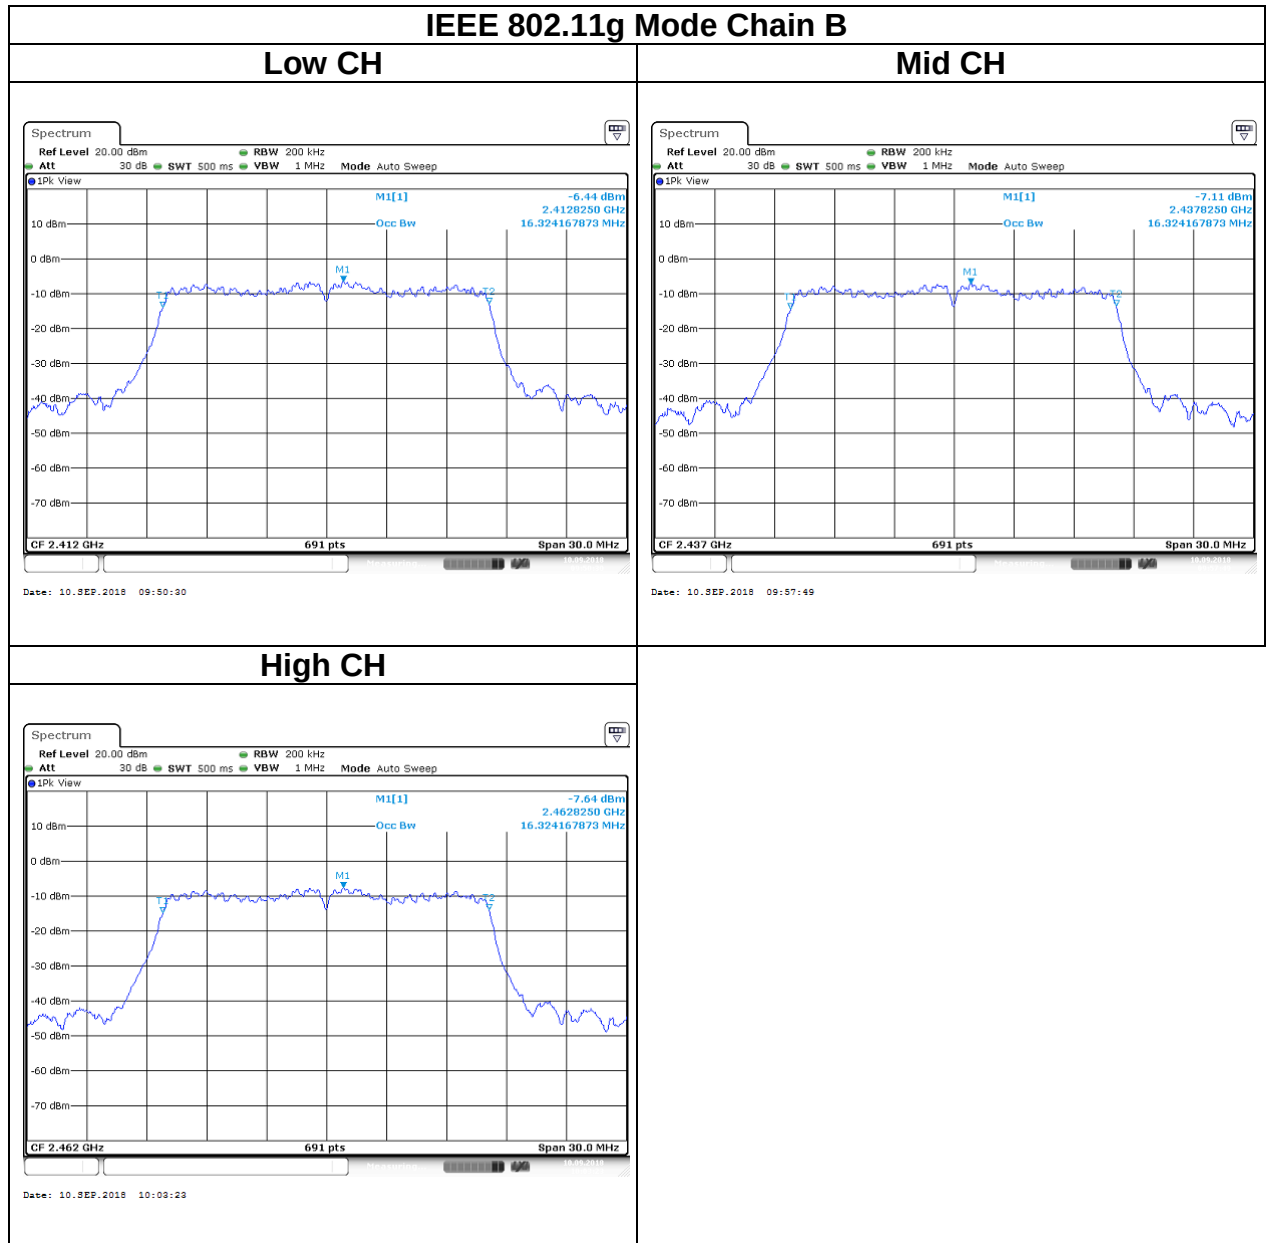





Report No.: T180807D10-RP1

Page: 32 / 118

Rev.: 01

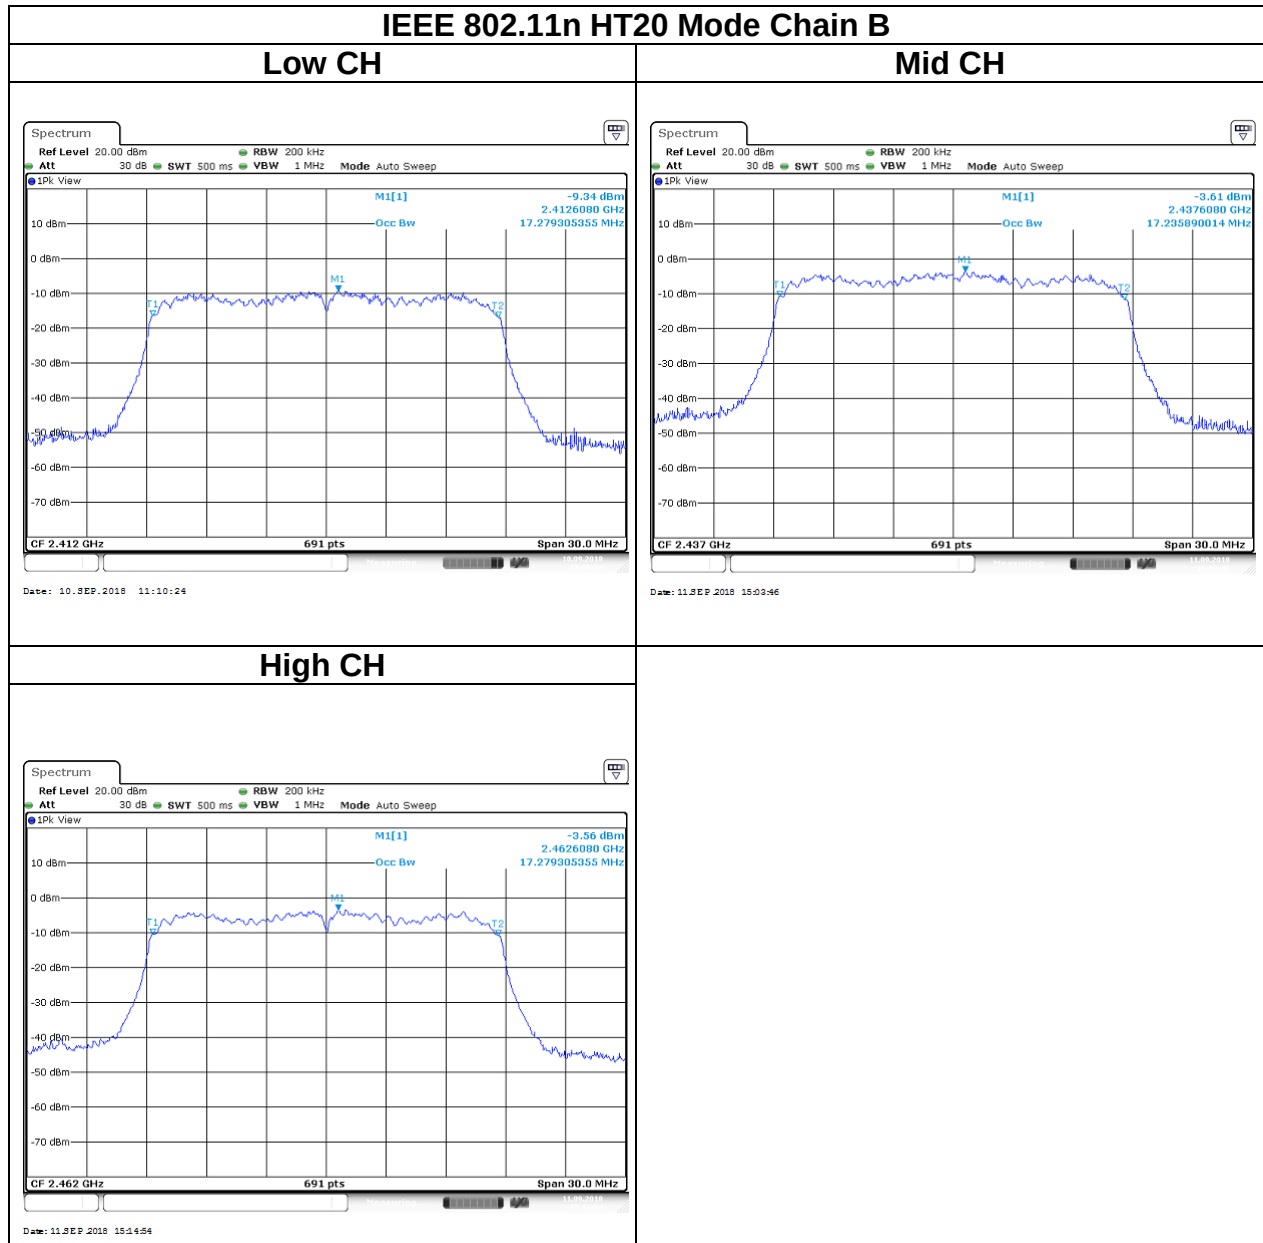



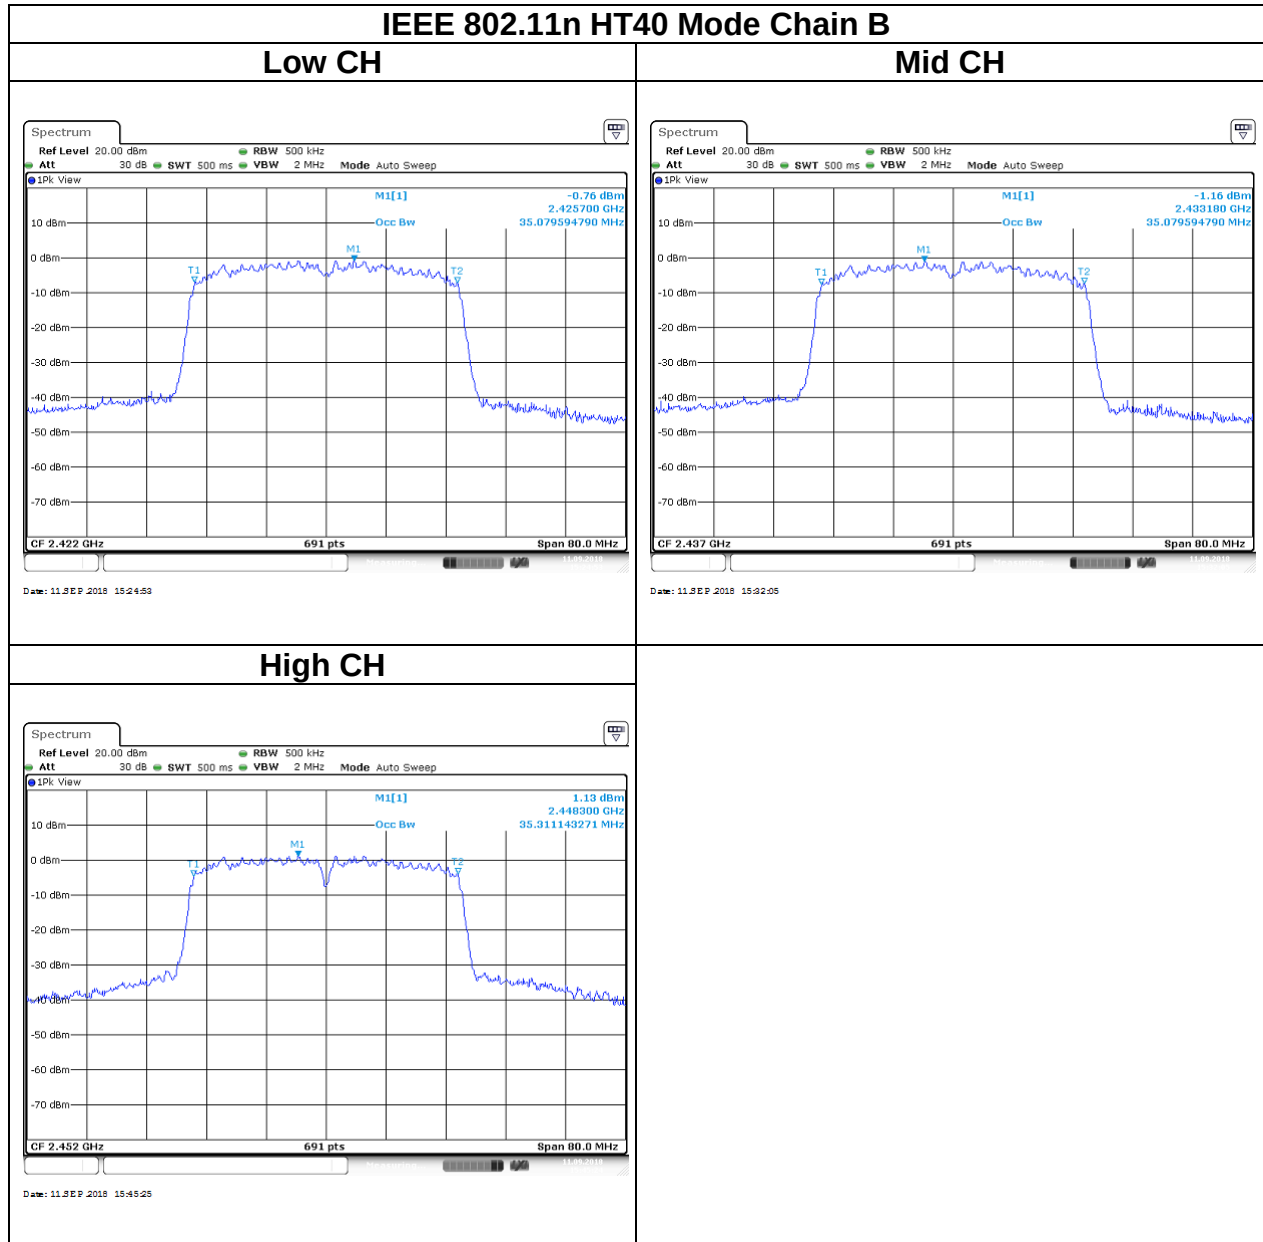

## 5.3 OUTPUT POWER MEASUREMENT

### 5.3.1 Test Limit

According to §15.247(b),

#### Peak output power :

For systems using digital modulation in the 2400-2483.5 MHz: 1 Watt(30 dBm), base on the use of antennas with directional gain not exceed 6 dBi If transmitting antennas of directional gain greater than 6dBi are used the peak output power the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

|       |                                                                                                                                                                                                                         |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Limit | <input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 30dBm<br><input type="checkbox"/> Antenna with DG greater than 6 dBi :<br>[Limit = 30 – (DG – 6)]<br><input type="checkbox"/> Point-to-point operation : |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|


Average output power : For reporting purposes only.

### 5.3.2 Test Procedure

Test method Refer as KDB 558074 D01.

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

### 5.3.3 Test Setup



### 5.3.4 Test Result

#### Peak output power :

| Wifi 2.4G                        |      |             |           |                |                      |                    |             |
|----------------------------------|------|-------------|-----------|----------------|----------------------|--------------------|-------------|
| Config                           | CH   | Freq. (MHz) | power set | PK Power (dBm) | PK Total Power (dBm) | PK Total Power (W) | Limit (dBm) |
|                                  |      |             | chain A   | chain A        |                      |                    |             |
| IEEE 802.11b<br>Data rate: 1Mbps | Low  | 2412        | 16        | 23.22          | 23.22                | 0.2099             | 30          |
|                                  | Mid  | 2437        | 18        | 23.78          | 23.78                | 0.2388             |             |
|                                  | High | 2462        | 20        | 23.97          | 23.97                | 0.2495             |             |
| IEEE 802.11g<br>Data rate: 6Mbps | Low  | 2412        | 27        | 28.34          | 28.34                | 0.6823             |             |
|                                  | Mid  | 2437        | 30        | 28.77          | 28.77                | 0.7534             |             |
|                                  | High | 2462        | 30        | 28.83          | 28.83                | 0.7638             |             |

| Wifi 2.4G                        |      |             |           |                |                      |                    |             |
|----------------------------------|------|-------------|-----------|----------------|----------------------|--------------------|-------------|
| Config                           | CH   | Freq. (MHz) | power set | PK Power (dBm) | PK Total Power (dBm) | PK Total Power (W) | Limit (dBm) |
|                                  |      |             | chain B   | chain B        |                      |                    |             |
| IEEE 802.11b<br>Data rate: 1Mbps | Low  | 2412        | 16        | 22.99          | 22.99                | 0.1991             | 30          |
|                                  | Mid  | 2437        | 18        | 23.59          | 23.59                | 0.2286             |             |
|                                  | High | 2462        | 20        | 23.84          | 23.84                | 0.2421             |             |
| IEEE 802.11g<br>Data rate: 6Mbps | Low  | 2412        | 27        | 28.35          | 28.35                | 0.6839             |             |
|                                  | Mid  | 2437        | 30        | 28.96          | 28.96                | 0.7870             |             |
|                                  | High | 2462        | 30        | 28.76          | 28.76                | 0.7516             |             |



Report No.: T180807D10-RP1

Page: 36 / 118

Rev.: 01

| Wifi 2.4G                                      |      |                |           |         |               |         |                            |                          |                |
|------------------------------------------------|------|----------------|-----------|---------|---------------|---------|----------------------------|--------------------------|----------------|
| Config                                         | CH   | Freq.<br>(MHz) | power set |         | PK Power(dBm) |         | PK Total<br>Power<br>(dBm) | PK Total<br>Power<br>(W) | Limit<br>(dBm) |
|                                                |      |                | chain A   | chain B | chain A       | chain B |                            |                          |                |
| IEEE<br>802.11n HT<br>20<br>Data rate:<br>MCS8 | Low  | 2412           | 25        | 25      | 26.43         | 26.27   | 29.36                      | 0.8630                   | 30             |
|                                                | Mid  | 2437           | 25        | 25      | 26.66         | 25.80   | 29.26                      | 0.8433                   |                |
|                                                | High | 2462           | 27        | 27      | 26.59         | 25.48   | 29.08                      | 0.8091                   |                |
| IEEE<br>802.11n HT<br>40<br>Data rate:<br>MCS8 | Low  | 2422           | 20        | 20      | 26.08         | 25.60   | 28.86                      | 0.7691                   |                |
|                                                | Mid  | 2437           | 27        | 27      | 26.31         | 25.88   | 29.11                      | 0.8147                   |                |
|                                                | High | 2452           | 26        | 26      | 26.01         | 25.33   | 28.69                      | 0.7396                   |                |

### Average output power :

#### Chain A:

| Wifi 2.4G                        |      |             |                |
|----------------------------------|------|-------------|----------------|
| Config                           | CH   | Freq. (MHz) | AV Power (dBm) |
| IEEE 802.11b<br>Data rate: 1Mbps | Low  | 2412        | 20.76          |
|                                  | Mid  | 2437        | 21.19          |
|                                  | High | 2462        | 21.27          |
| IEEE 802.11g<br>Data rate: 6Mbps | Low  | 2412        | 19.87          |
|                                  | Mid  | 2437        | 20.84          |
|                                  | High | 2462        | 20.82          |

#### Chain B:

| Wifi 2.4G                        |      |             |                |
|----------------------------------|------|-------------|----------------|
| Config                           | CH   | Freq. (MHz) | AV Power (dBm) |
| IEEE 802.11b<br>Data rate: 1Mbps | Low  | 2412        | 16.50          |
|                                  | Mid  | 2437        | 16.68          |
|                                  | High | 2462        | 15.68          |
| IEEE 802.11g<br>Data rate: 6Mbps | Low  | 2412        | 17.63          |
|                                  | Mid  | 2437        | 17.96          |
|                                  | High | 2462        | 14.89          |

| Wifi 2.4G                               |      |             |                |                |                      |
|-----------------------------------------|------|-------------|----------------|----------------|----------------------|
| Config                                  | CH   | Freq. (MHz) | AV Power (dBm) | AV Power (dBm) | AV Total Power (dBm) |
|                                         |      |             | Chain A        | Chain B        |                      |
| IEEE 802.11n<br>HT20<br>Data rate: MCS0 | Low  | 2412        | 17.61          | 17.51          | 20.57                |
|                                         | Mid  | 2437        | 17.73          | 17.01          | 20.40                |
|                                         | High | 2462        | 17.62          | 16.85          | 20.26                |
| IEEE 802.11n<br>HT40<br>Data rate: MCS0 | Low  | 2422        | 17.37          | 16.75          | 20.08                |
|                                         | Mid  | 2437        | 17.71          | 17.18          | 20.46                |
|                                         | High | 2452        | 17.55          | 16.46          | 20.05                |

## 5.4 POWER SPECTRAL DENSITY

### 5.4.1 Test Limit

According to §15.247(e),

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


|       |                                                                                                                                                                                                                         |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Limit | <input checked="" type="checkbox"/> Antenna not exceed 6 dBi : 8dBm<br><input type="checkbox"/> Antenna with DG greater than 6 dBi :<br>[ Limit = 8 – (DG – 6) ]<br><input type="checkbox"/> Point-to-point operation : |
|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

### 5.4.2 Test Procedure

Test method Refer as KDB 558074 D01

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW = 3kHz, VBW = 30kHz, Span = 1.5 times DTS Bandwidth (6 dB BW), Detector = Peak, Sweep Time = Auto and Trace = Max hold.
4. The path loss and Duty Factor were compensated to the results for each measurement by SA.
5. Mark the maximum level.
6. Measure and record the result of power spectral density. in the test report.

### 5.4.3 Test Setup



#### 5.4.4 Test Result

| Test mode: IEEE 802.11b Mode / 2412-2462 MHz |                 |                    |                    |             |
|----------------------------------------------|-----------------|--------------------|--------------------|-------------|
| Channel                                      | Frequency (MHz) | Chain A PPSD (dBm) | Chain B PPSD (dBm) | Limit (dBm) |
| Low                                          | 2412            | -15.87             | -15.87             | 8           |
| Mid                                          | 2437            | -16.48             | -16.45             |             |
| High                                         | 2462            | -16.63             | -16.83             |             |

| Test mode: IEEE 802.11g Mode / 2412-2462 MHz |                 |                    |                    |             |
|----------------------------------------------|-----------------|--------------------|--------------------|-------------|
| Channel                                      | Frequency (MHz) | Chain A PPSD (dBm) | Chain B PPSD (dBm) | Limit (dBm) |
| Low                                          | 2412            | -14.99             | -16.23             | 8           |
| Mid                                          | 2437            | -15.76             | -15.92             |             |
| High                                         | 2462            | -15.80             | -15.88             |             |


| Test mode: IEEE 802.11n HT20 Mode / 2412-2462 MHz |                 |                    |                    |                  |             |
|---------------------------------------------------|-----------------|--------------------|--------------------|------------------|-------------|
| Channel                                           | Frequency (MHz) | Chain A PPSD (dBm) | Chain B PPSD (dBm) | Total PPSD (dBm) | Limit (dBm) |
| Low                                               | 2412            | -15.60             | -16.15             | -12.86           | 8           |
| Mid                                               | 2437            | -16.10             | -15.54             | -12.80           |             |
| High                                              | 2462            | -14.86             | -16.10             | -12.43           |             |

| Test mode: IEEE 802.11n HT40 Mode / 2422-2452 MHz |                 |                    |                    |                  |             |
|---------------------------------------------------|-----------------|--------------------|--------------------|------------------|-------------|
| Channel                                           | Frequency (MHz) | Chain A PPSD (dBm) | Chain B PPSD (dBm) | Total PPSD (dBm) | Limit (dBm) |
| Low                                               | 2422            | -19.41             | -19.22             | -16.30           | 8           |
| Mid                                               | 2437            | -15.83             | -15.47             | -12.64           |             |
| High                                              | 2452            | -16.91             | -16.29             | -13.58           |             |



Report No.: T180807D10-RP1

## Test Data

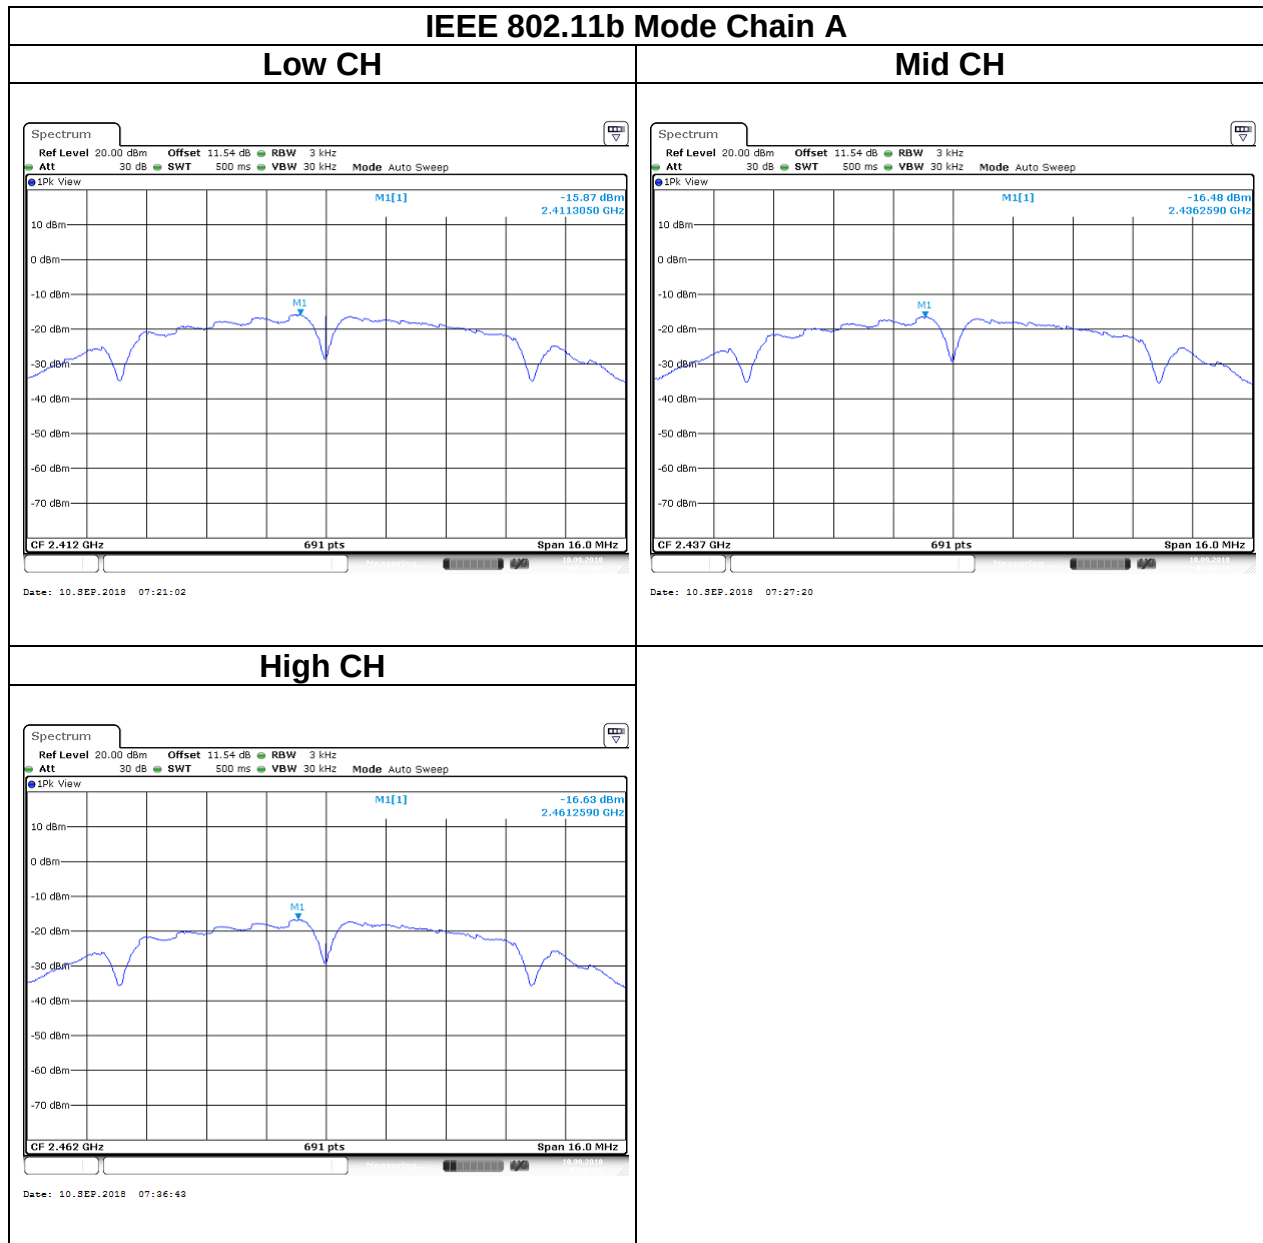






Report No.: T180807D10-RP1

Page: 41 / 118

Rev.: 01

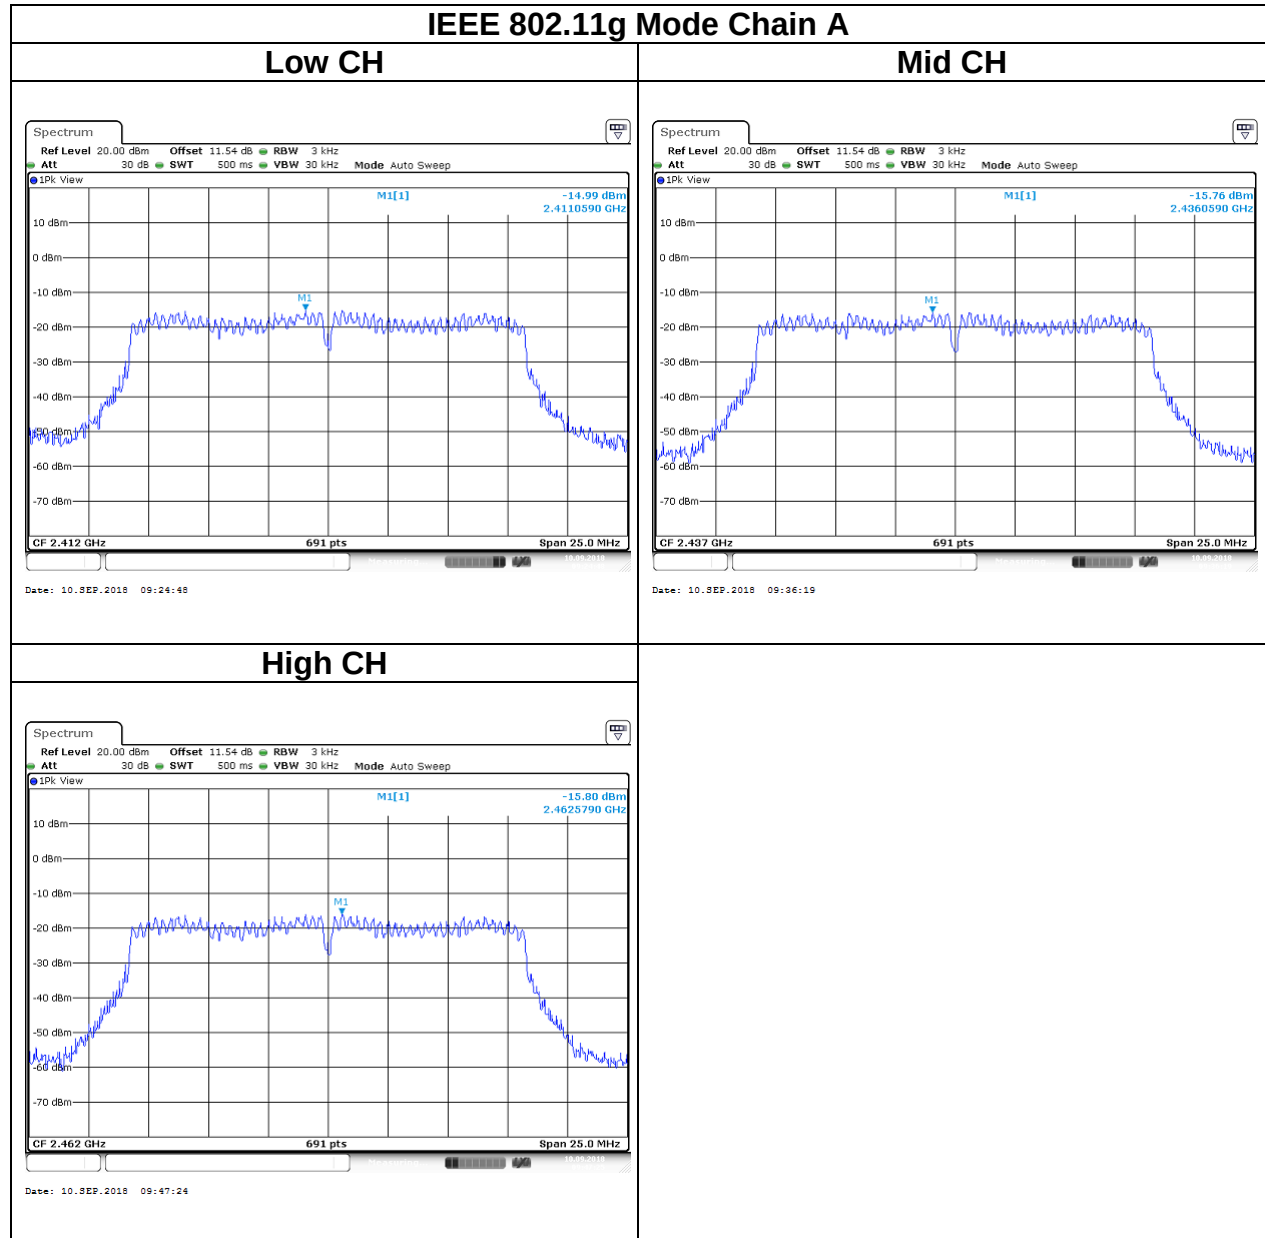




Report No.: T180807D10-RP1

Page: 42 / 118

Rev.: 01

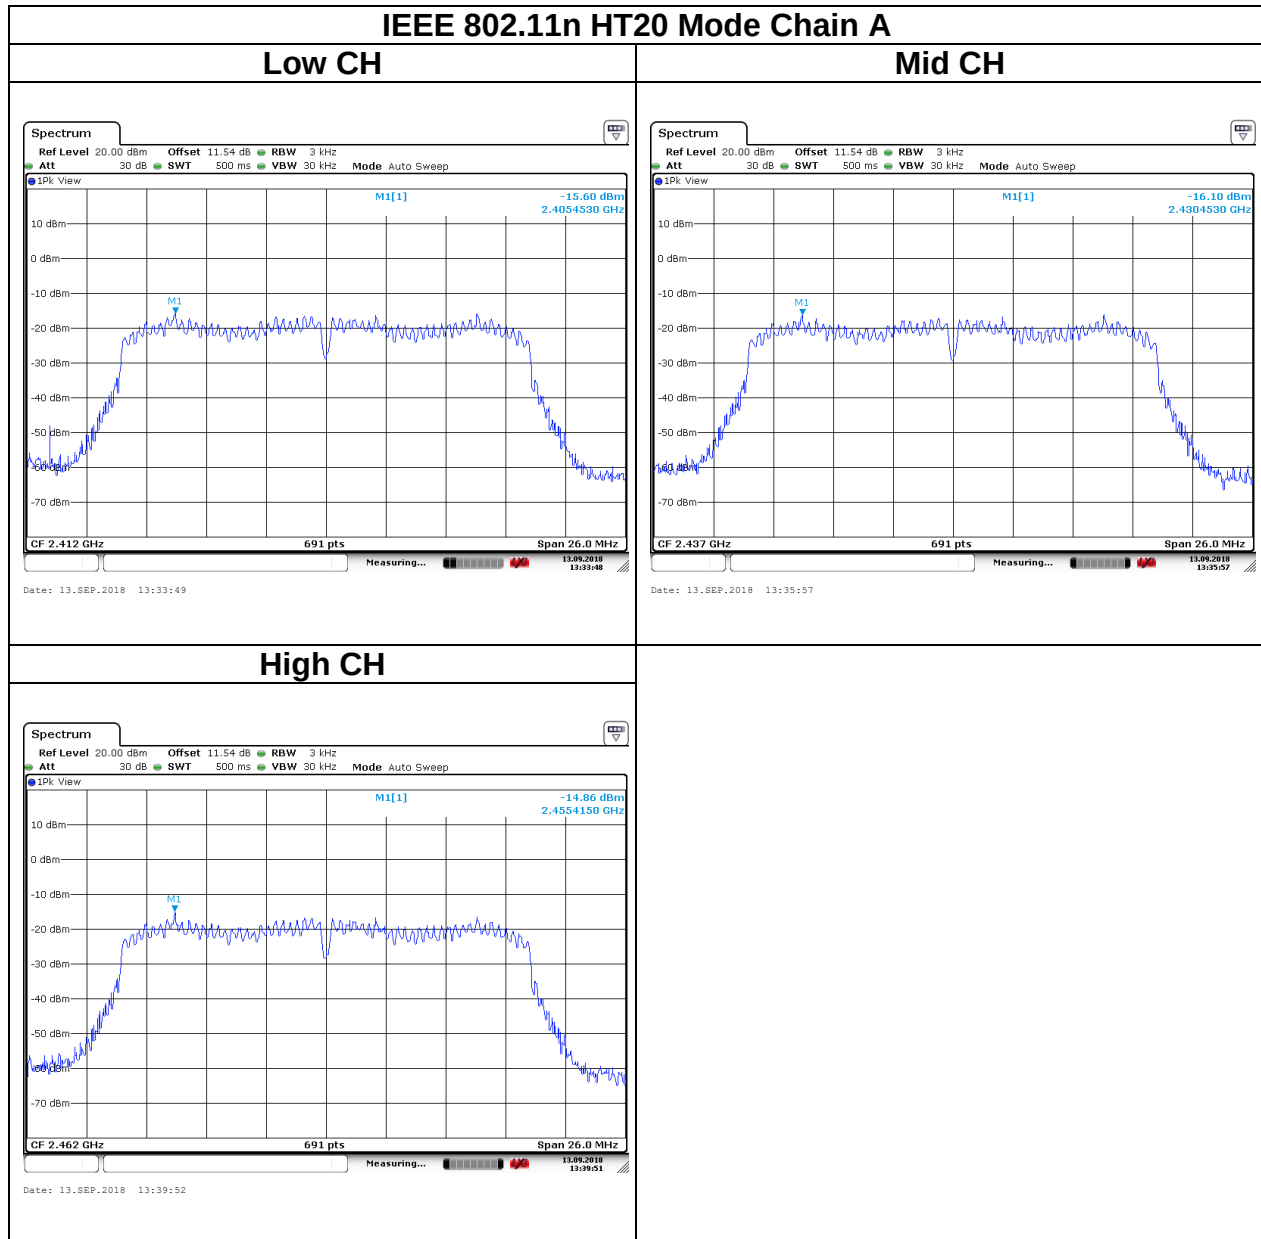




Report No.: T180807D10-RP1


Page: 43 / 118

Rev.: 01

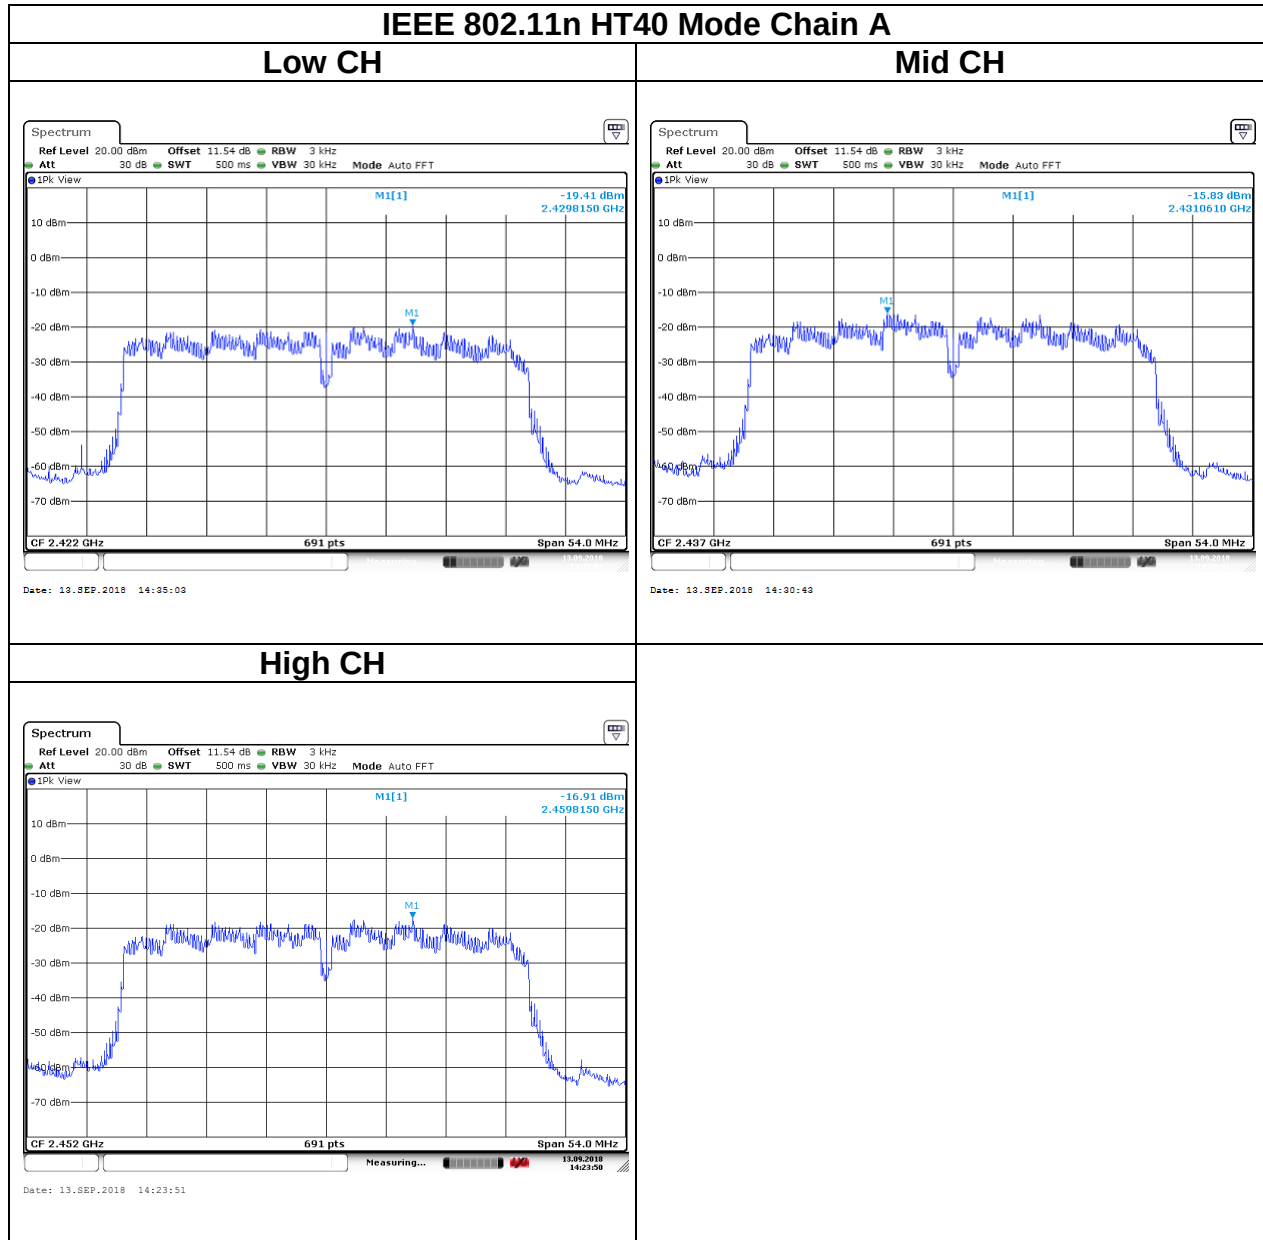



Report No.: T180807D10-RP1

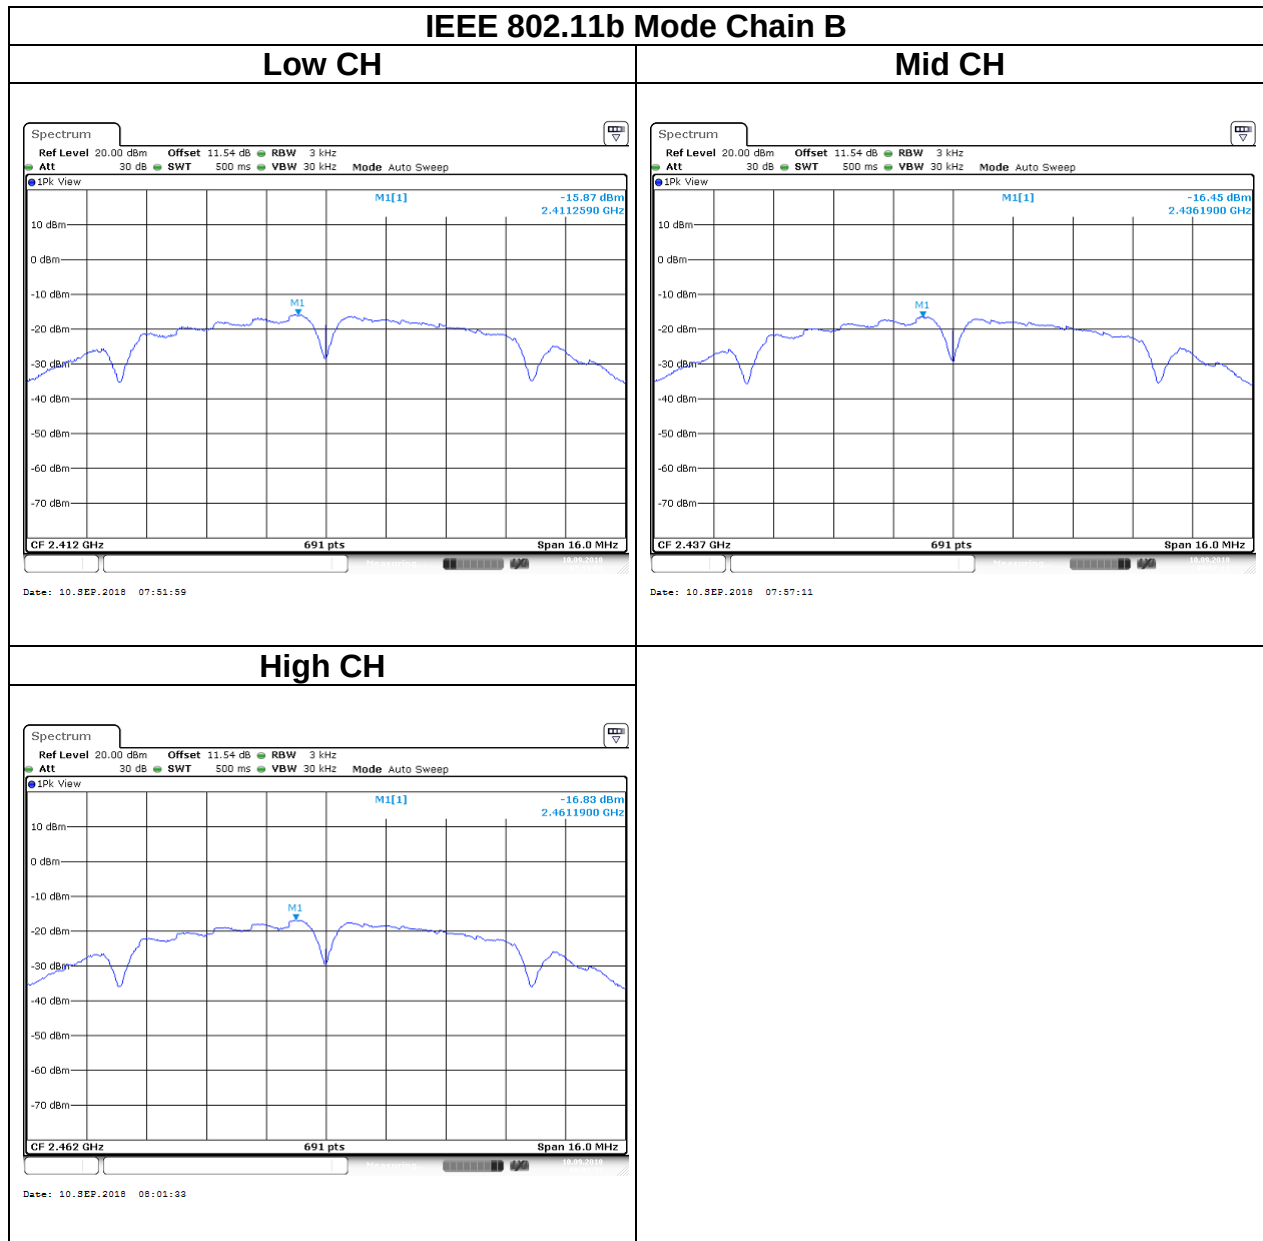




Report No.: T180807D10-RP1

Page: 45 / 118

Rev.: 01

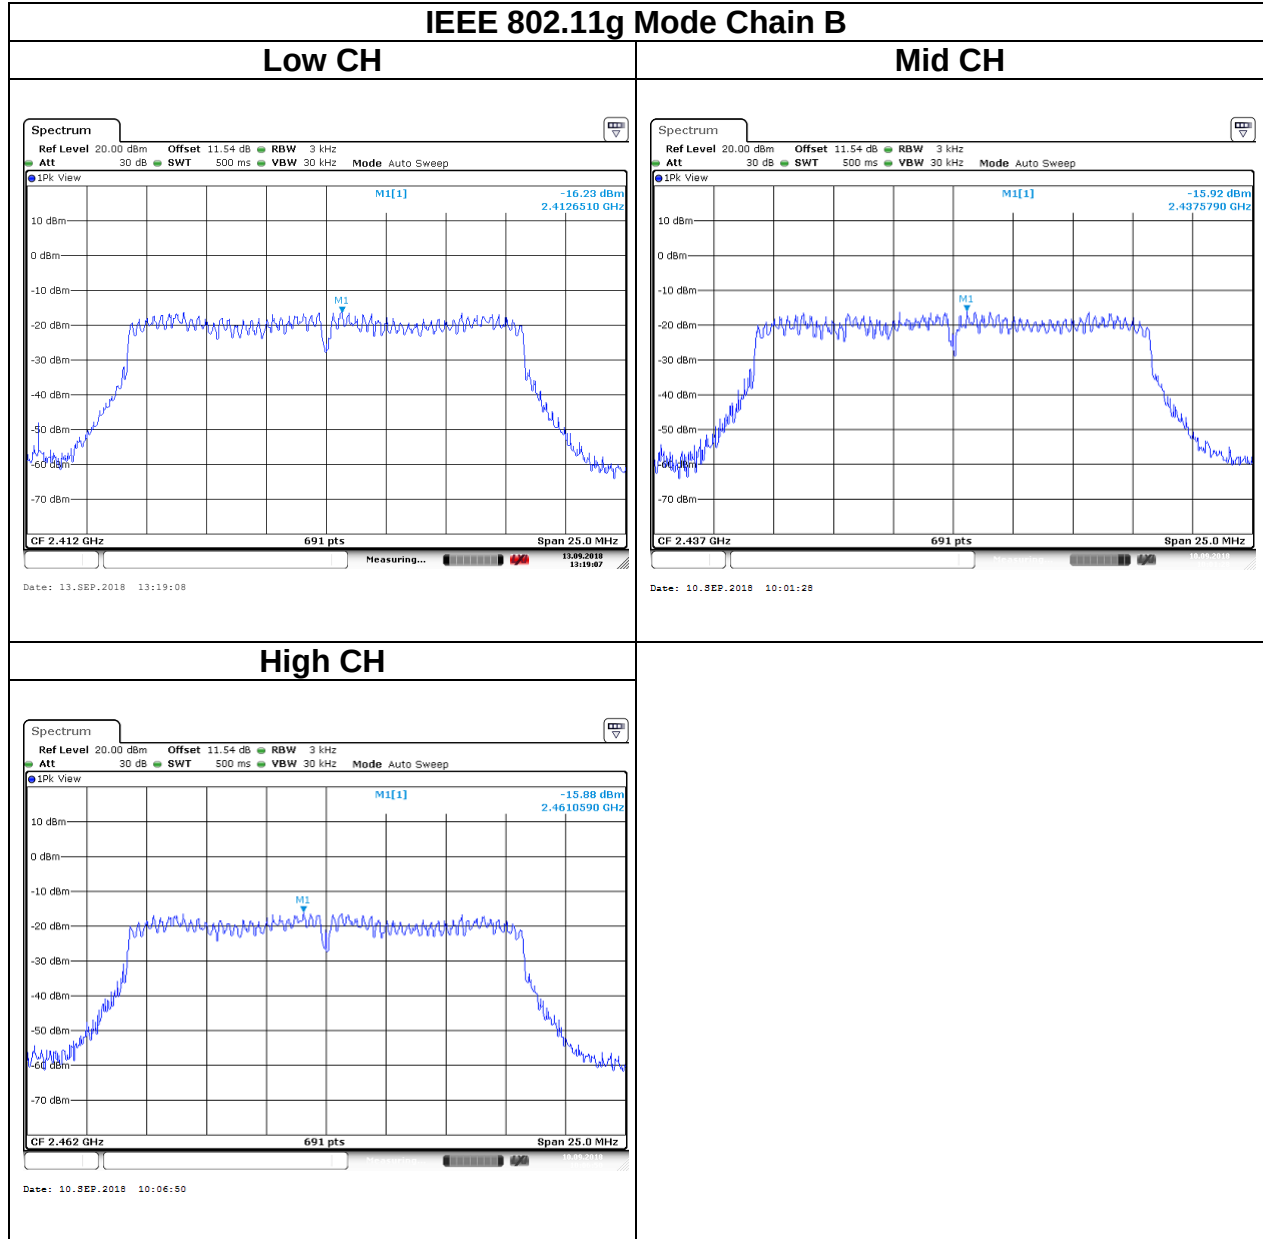




Report No.: T180807D10-RP1


Page: 46 / 118

Rev.: 01

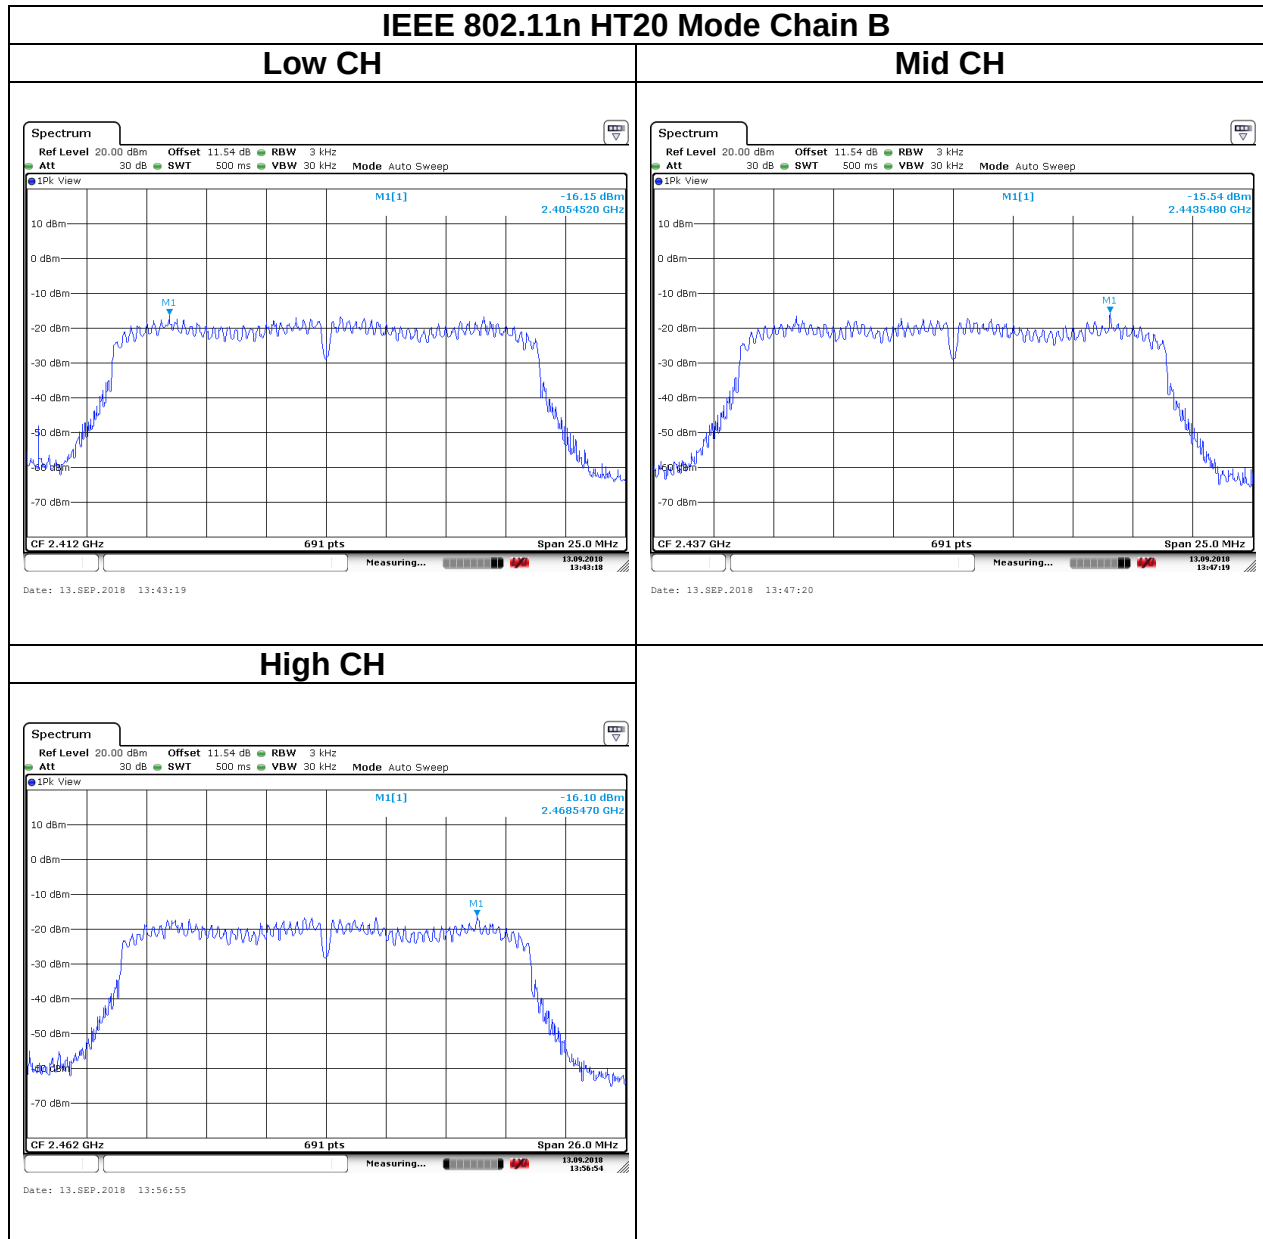



Report No.: T180807D10-RP1

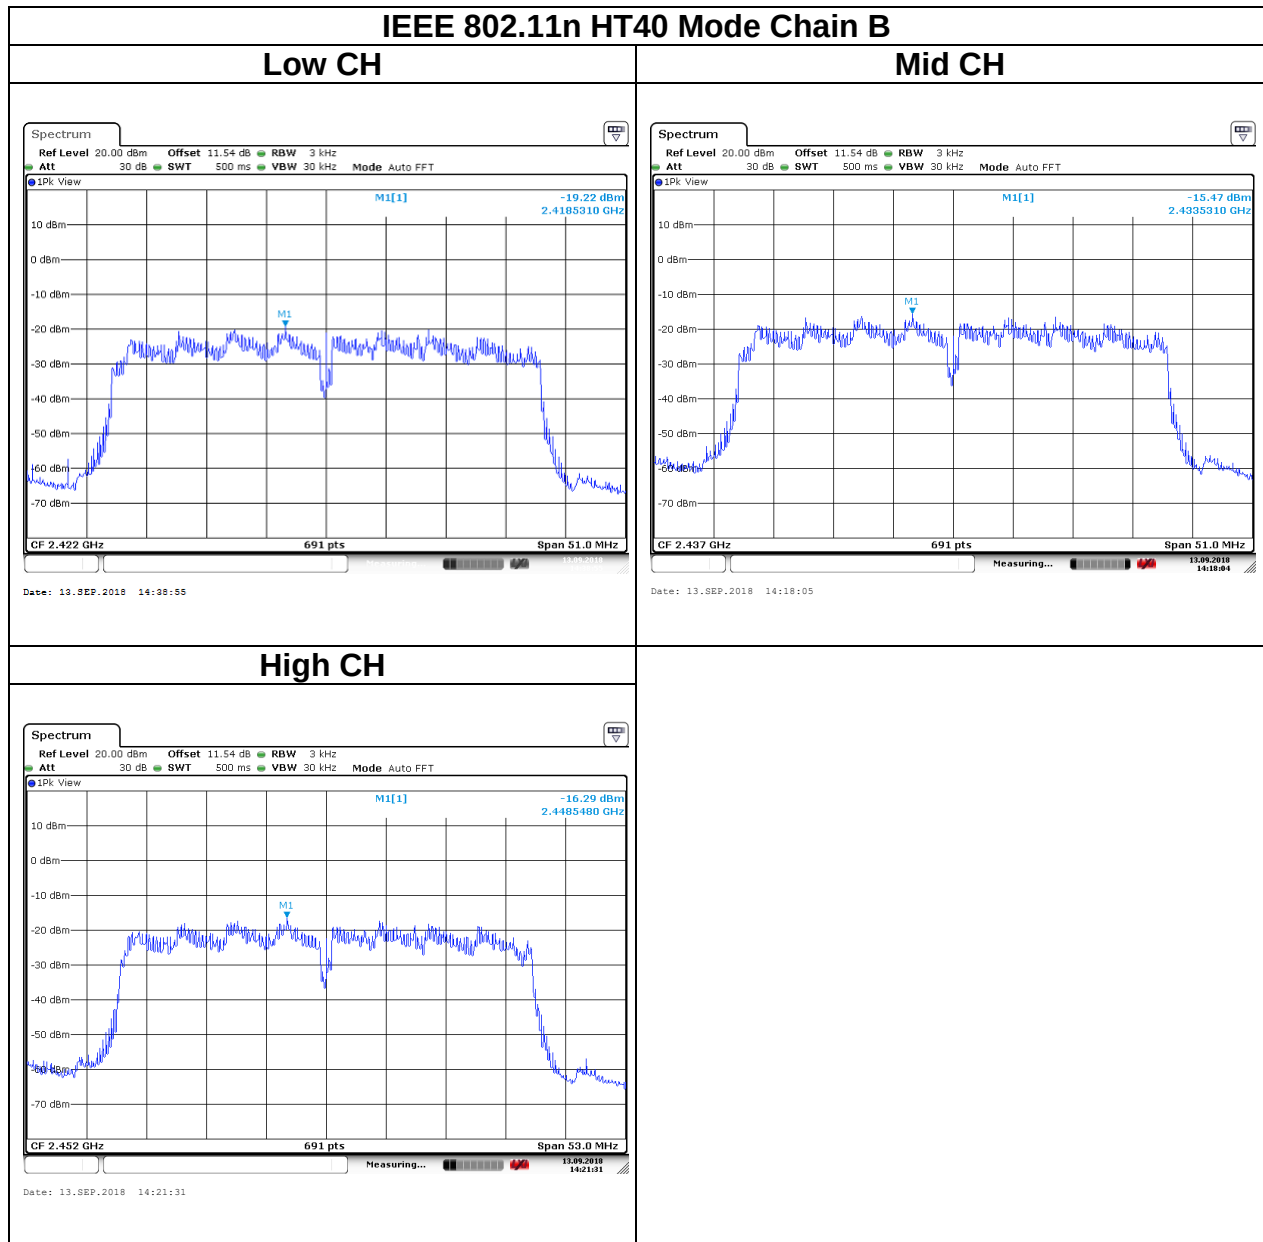

## 5.5 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

### 5.5.1 Test Limit

According to §15.247(d)

In any 100 kHz bandwidth outside the authorized frequency band,


Non-restricted bands shall be attenuated at least 20 dB/30 dB relative to the maximum PSD level in 100 kHz by RF conducted or a radiated measurement which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 5.5.2 Test Procedure

Test method Refer as, KDB 558074 D01.

1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. In any 100 kHz bandwidth outside the authorized frequency band, shall be attenuated at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when conducted power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 5.5.3 Test Setup








Report No.: T180807D10-RP1


## 5.5.4 Test Result

### Test Data

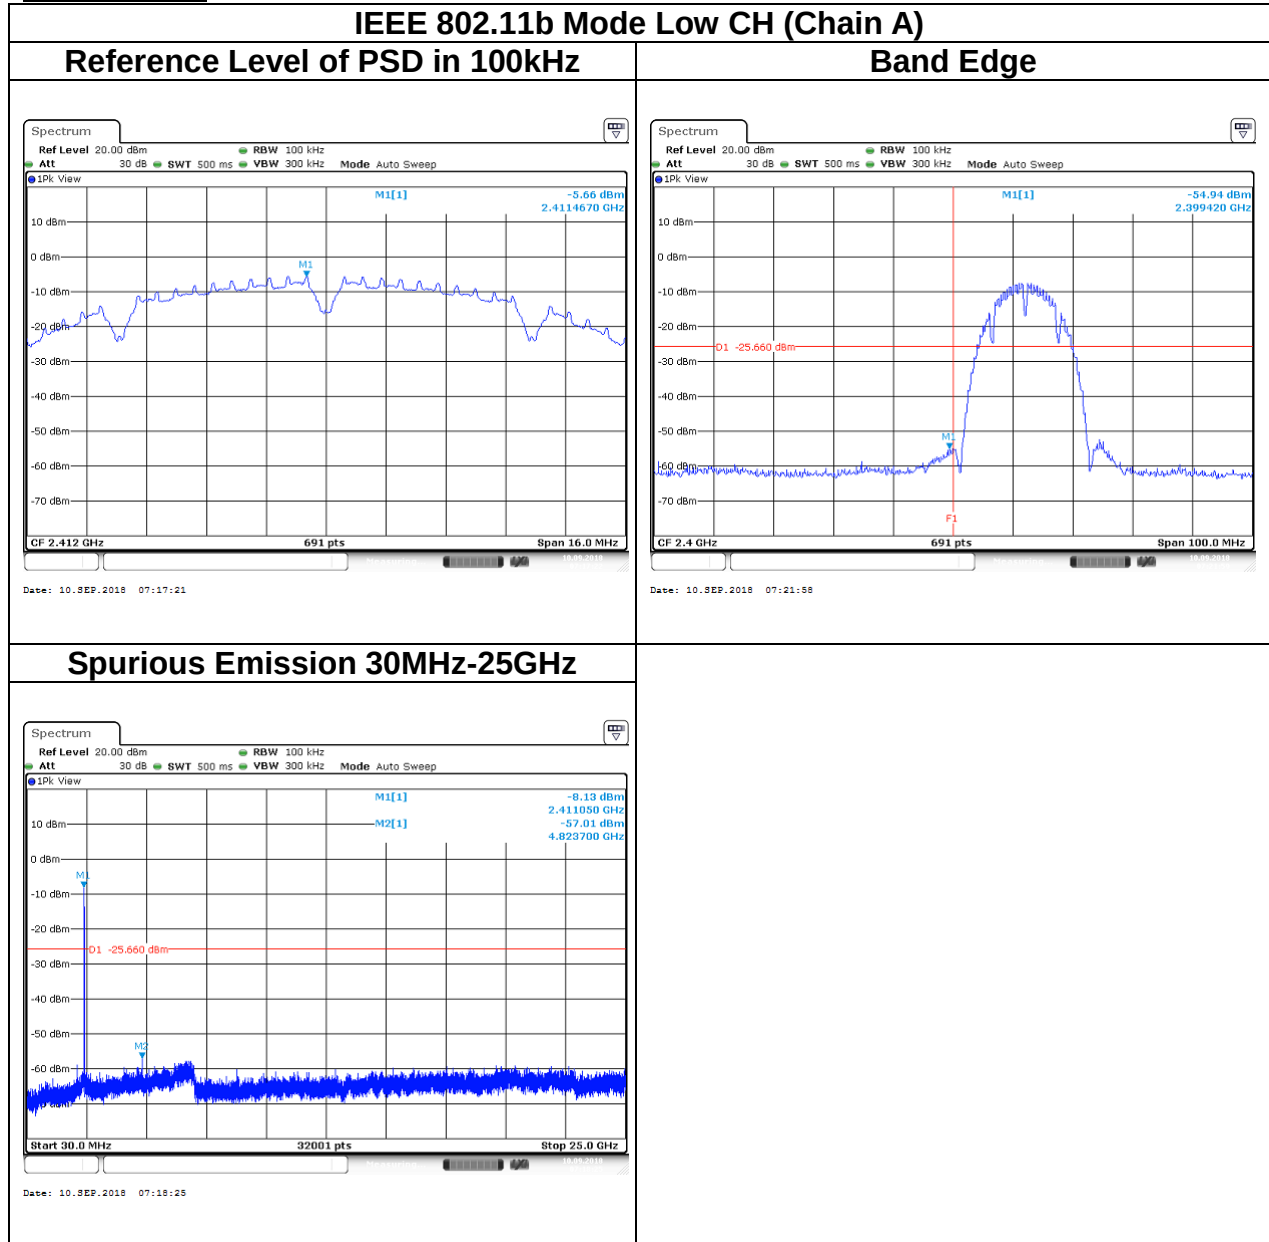

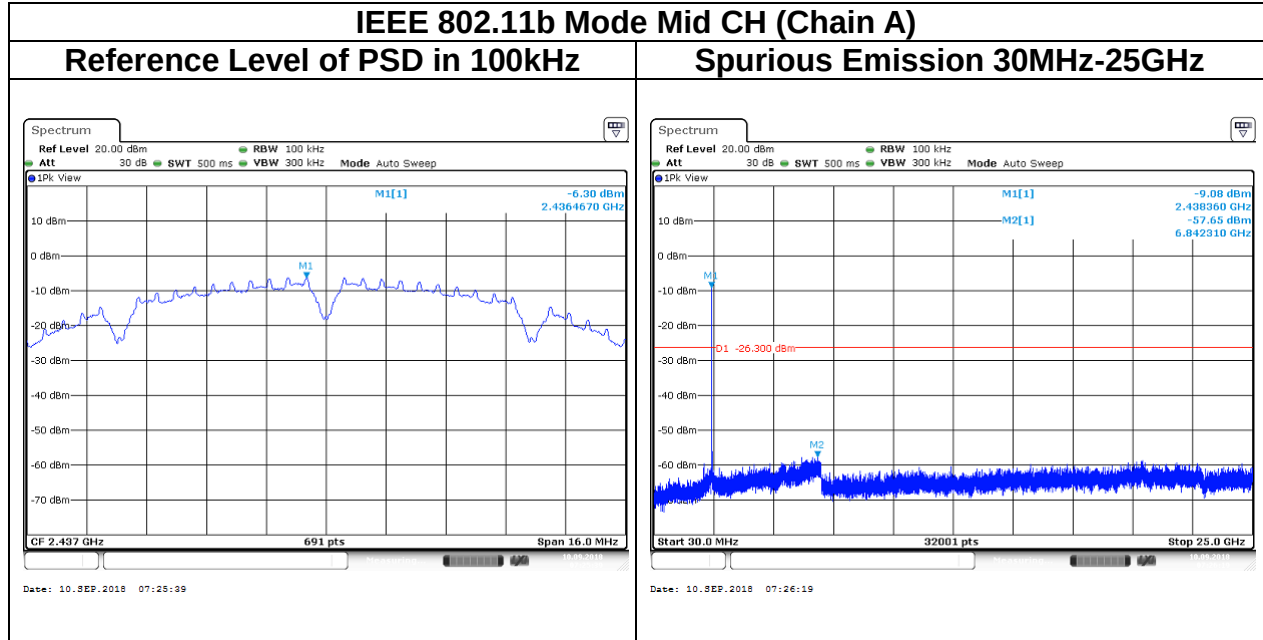

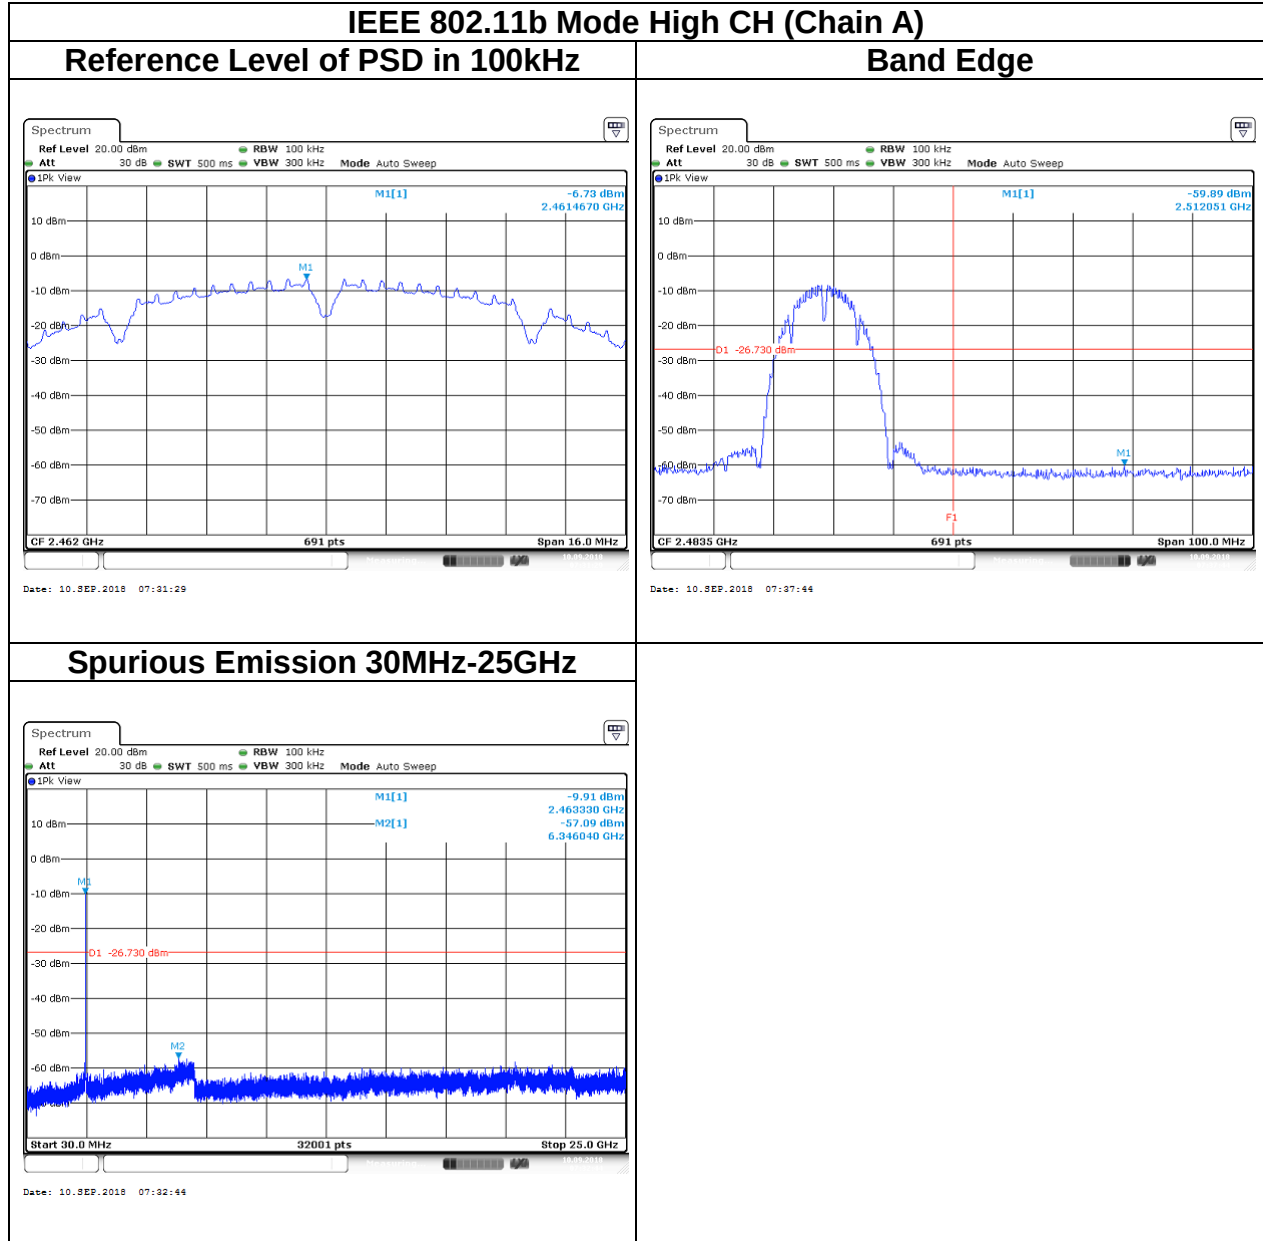

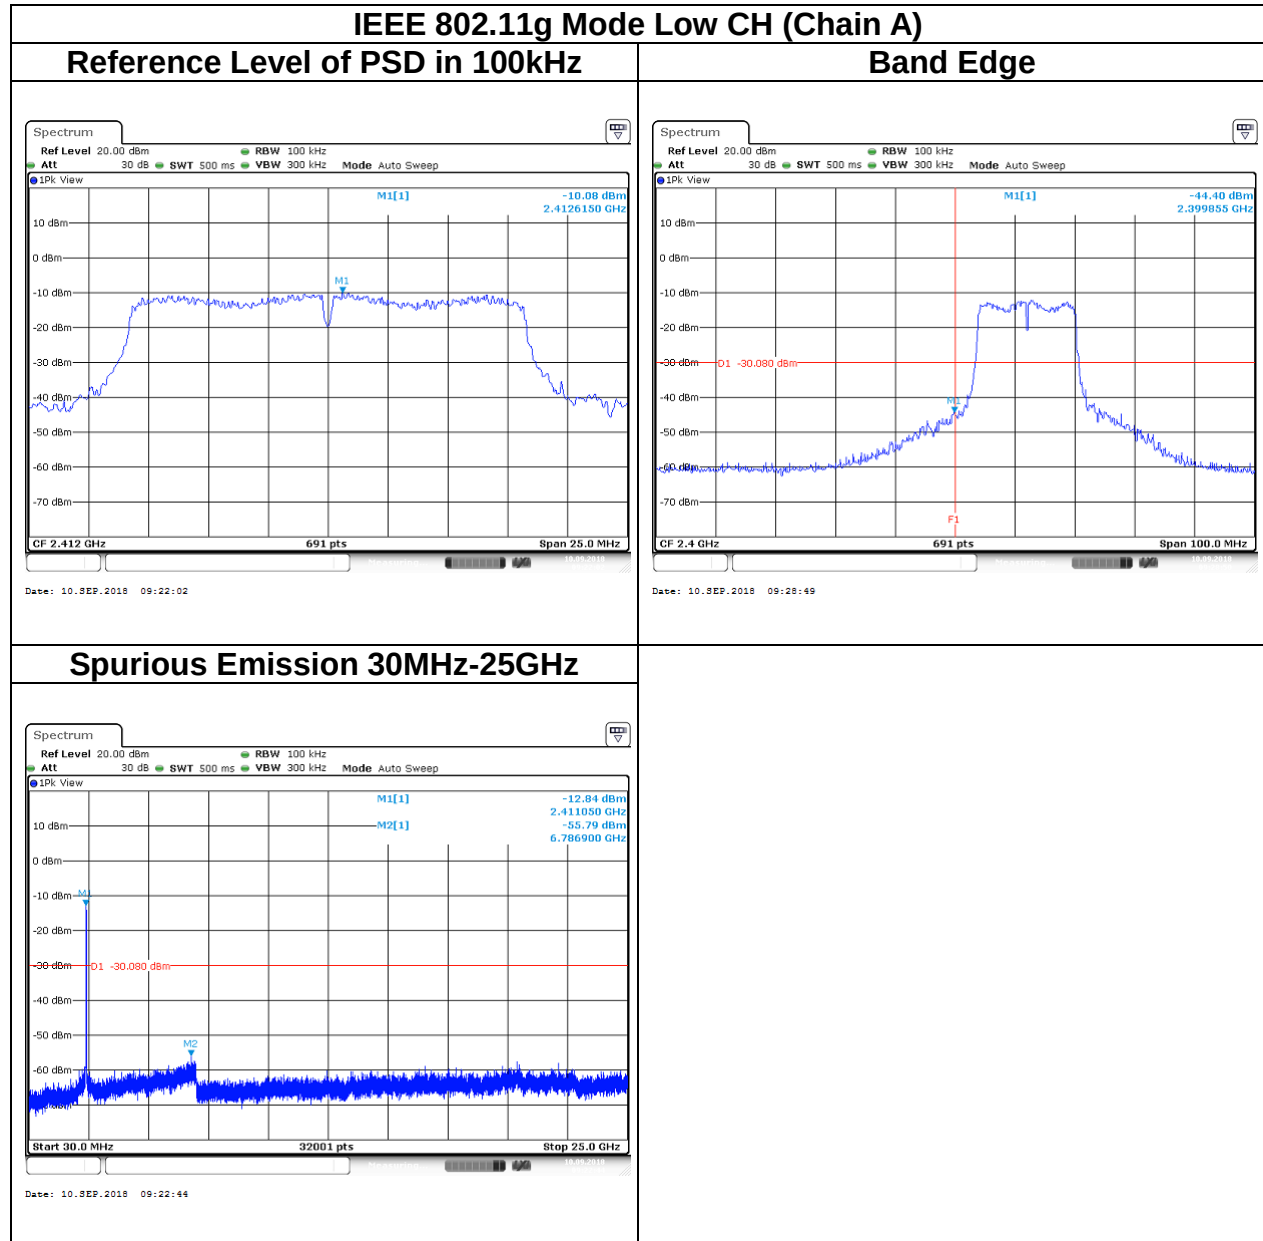






Report No.: T180807D10-RP1


Page: 53 / 118

Rev.: 01

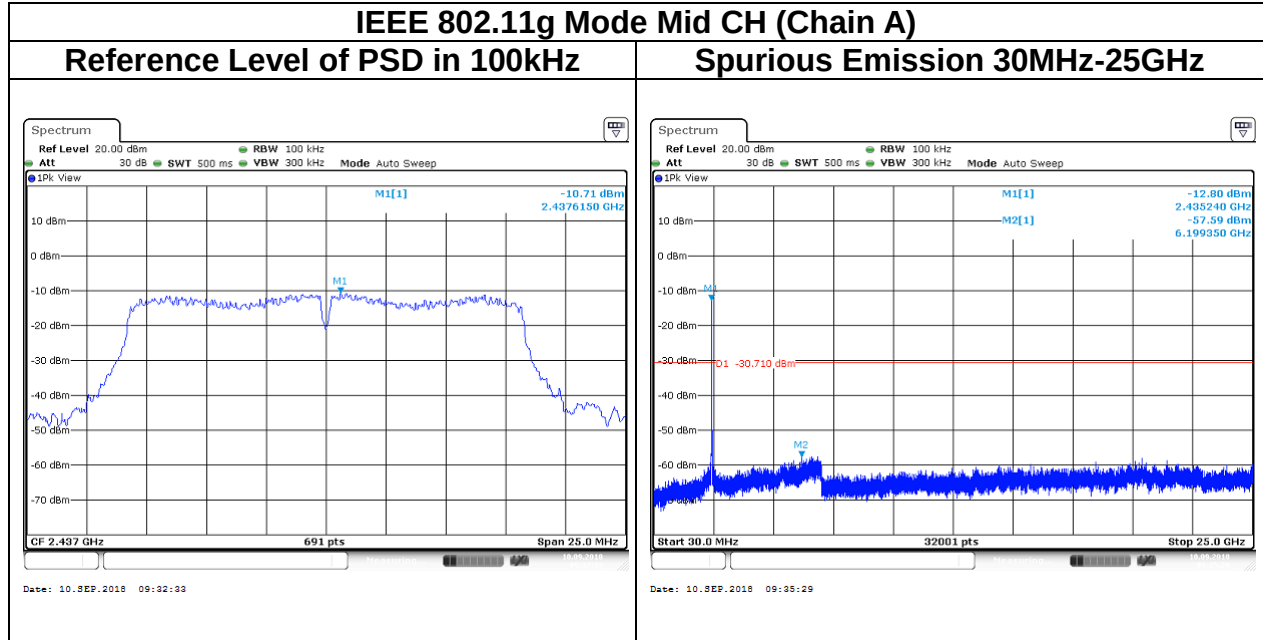


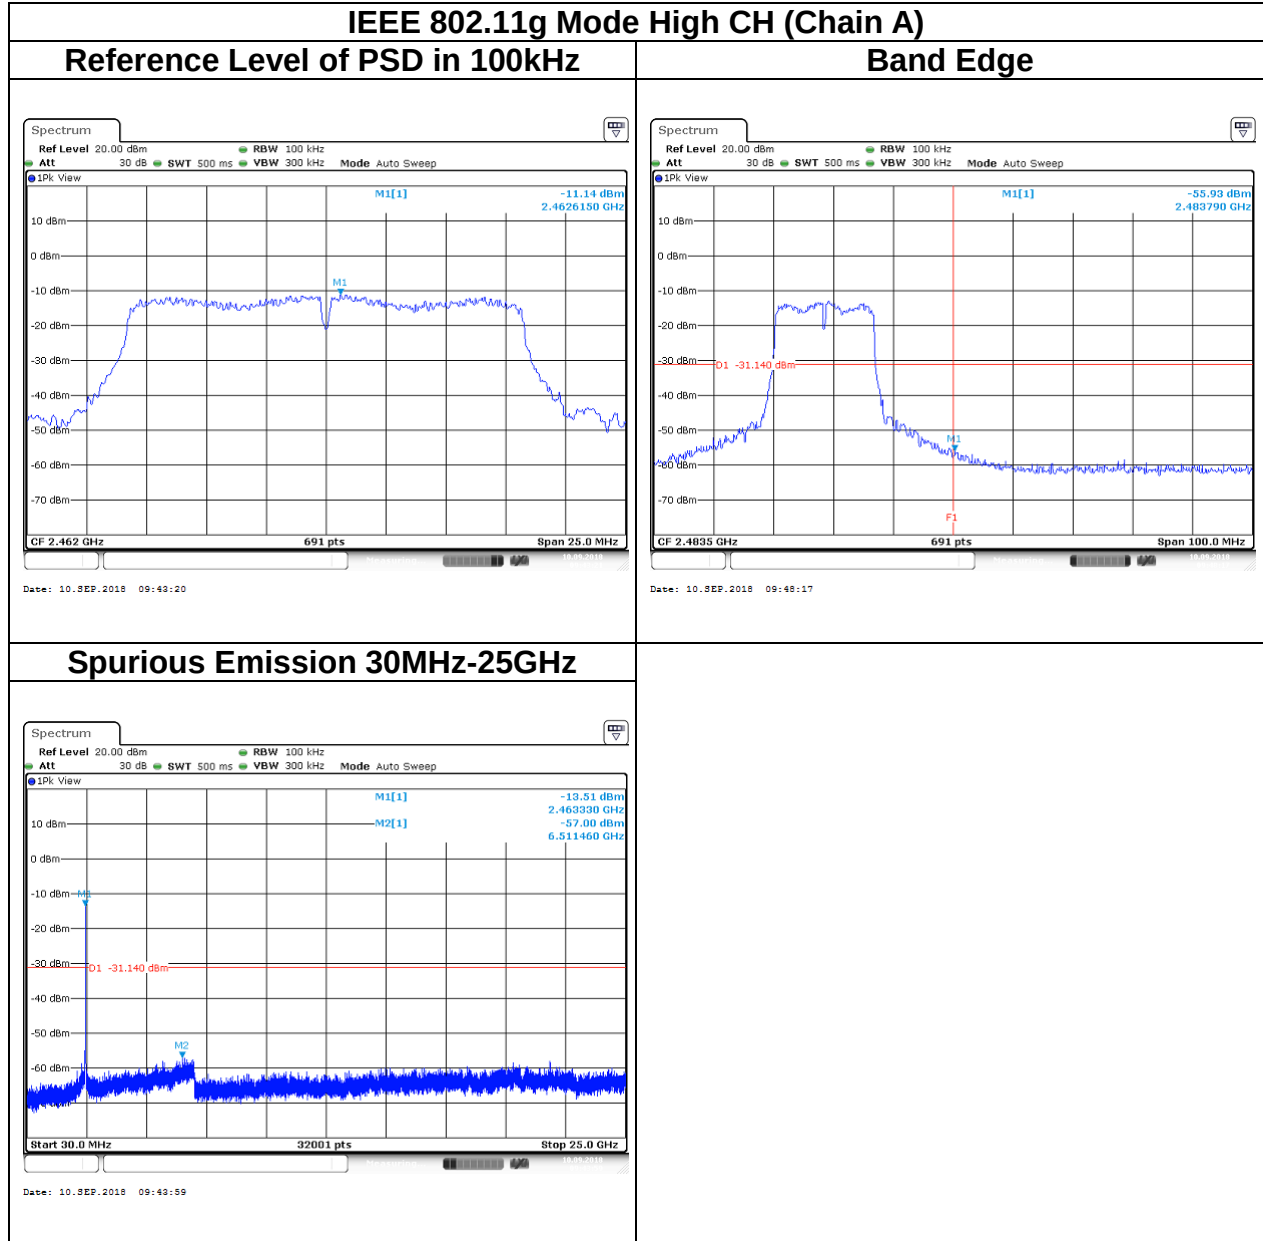

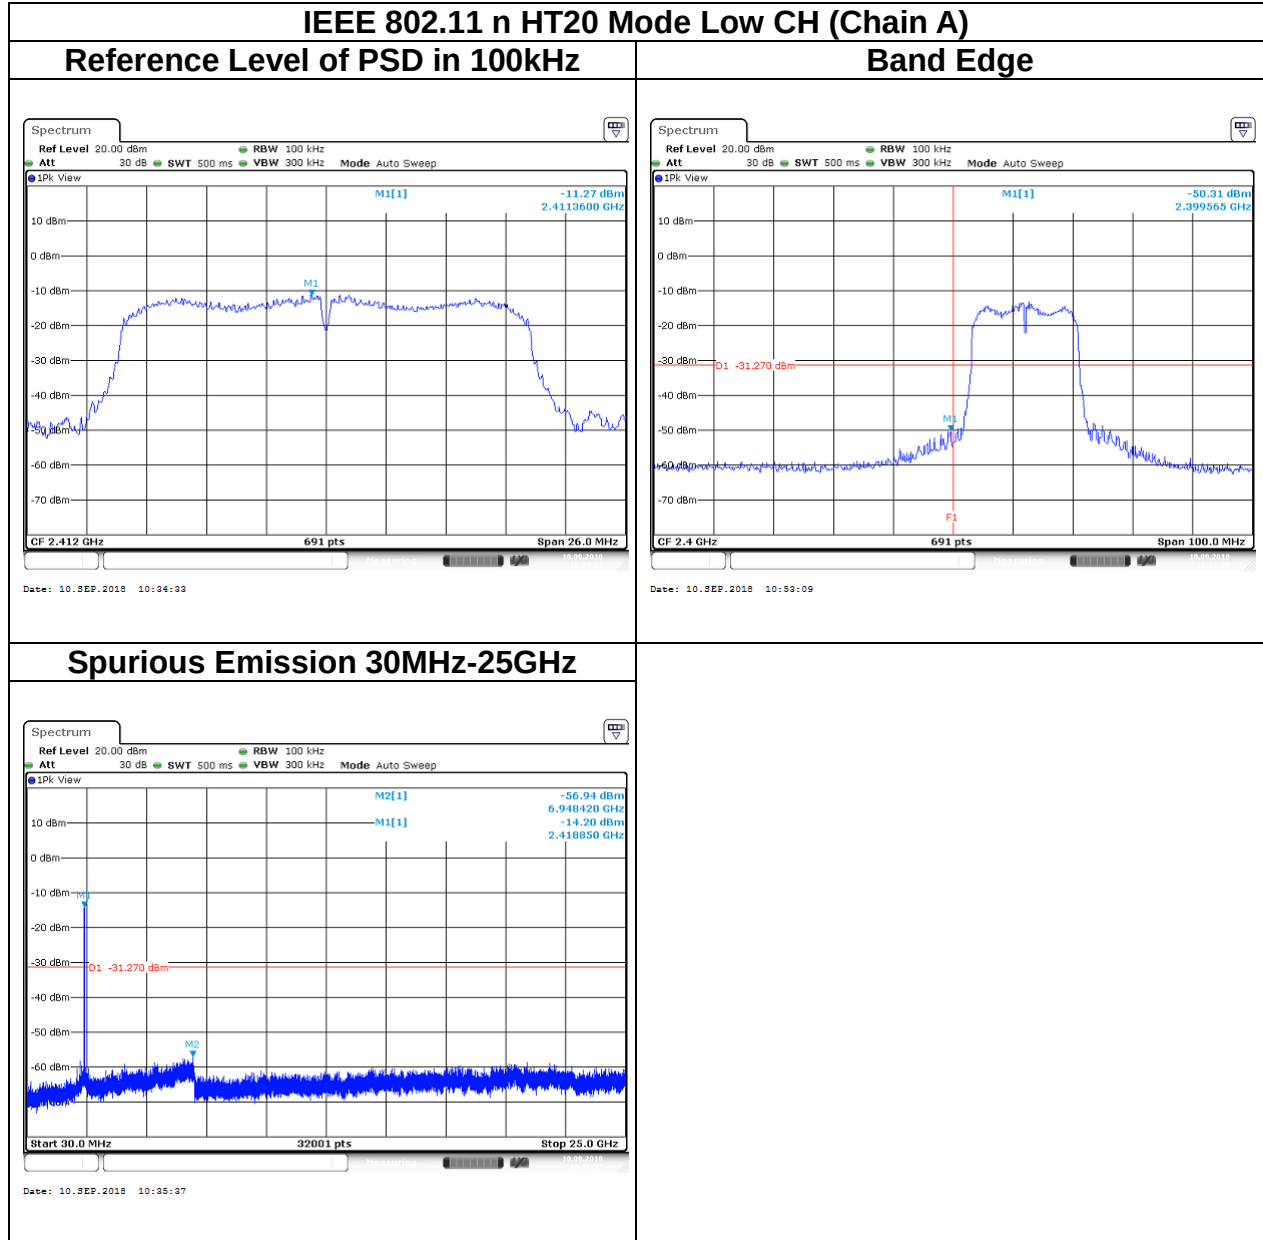


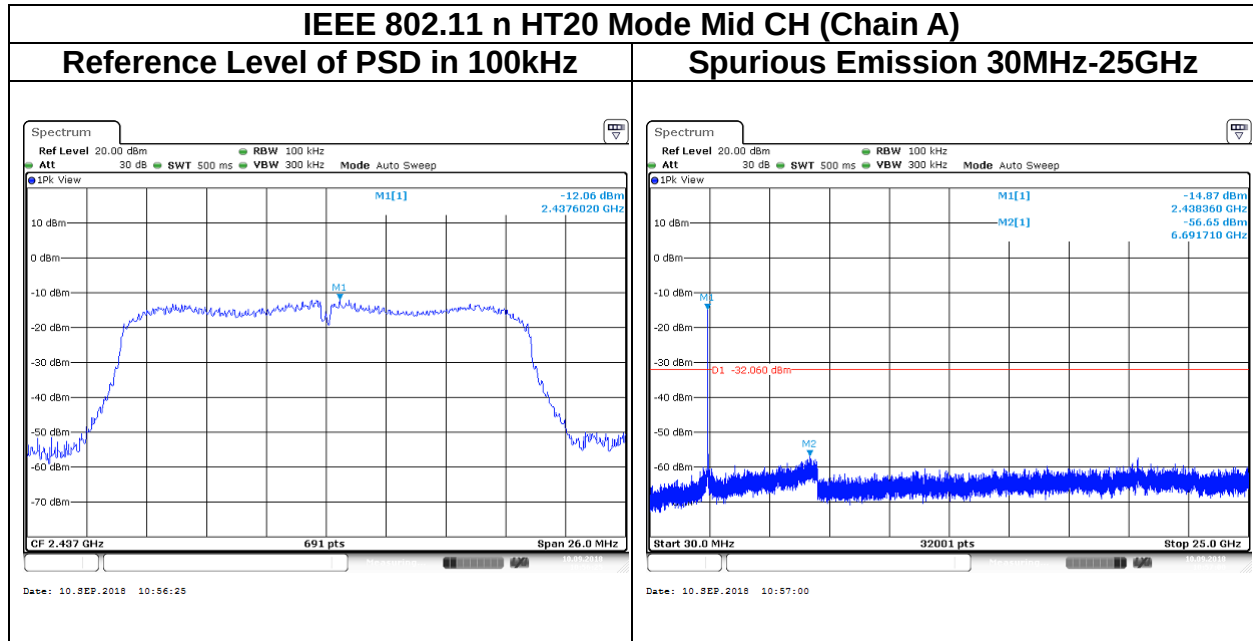



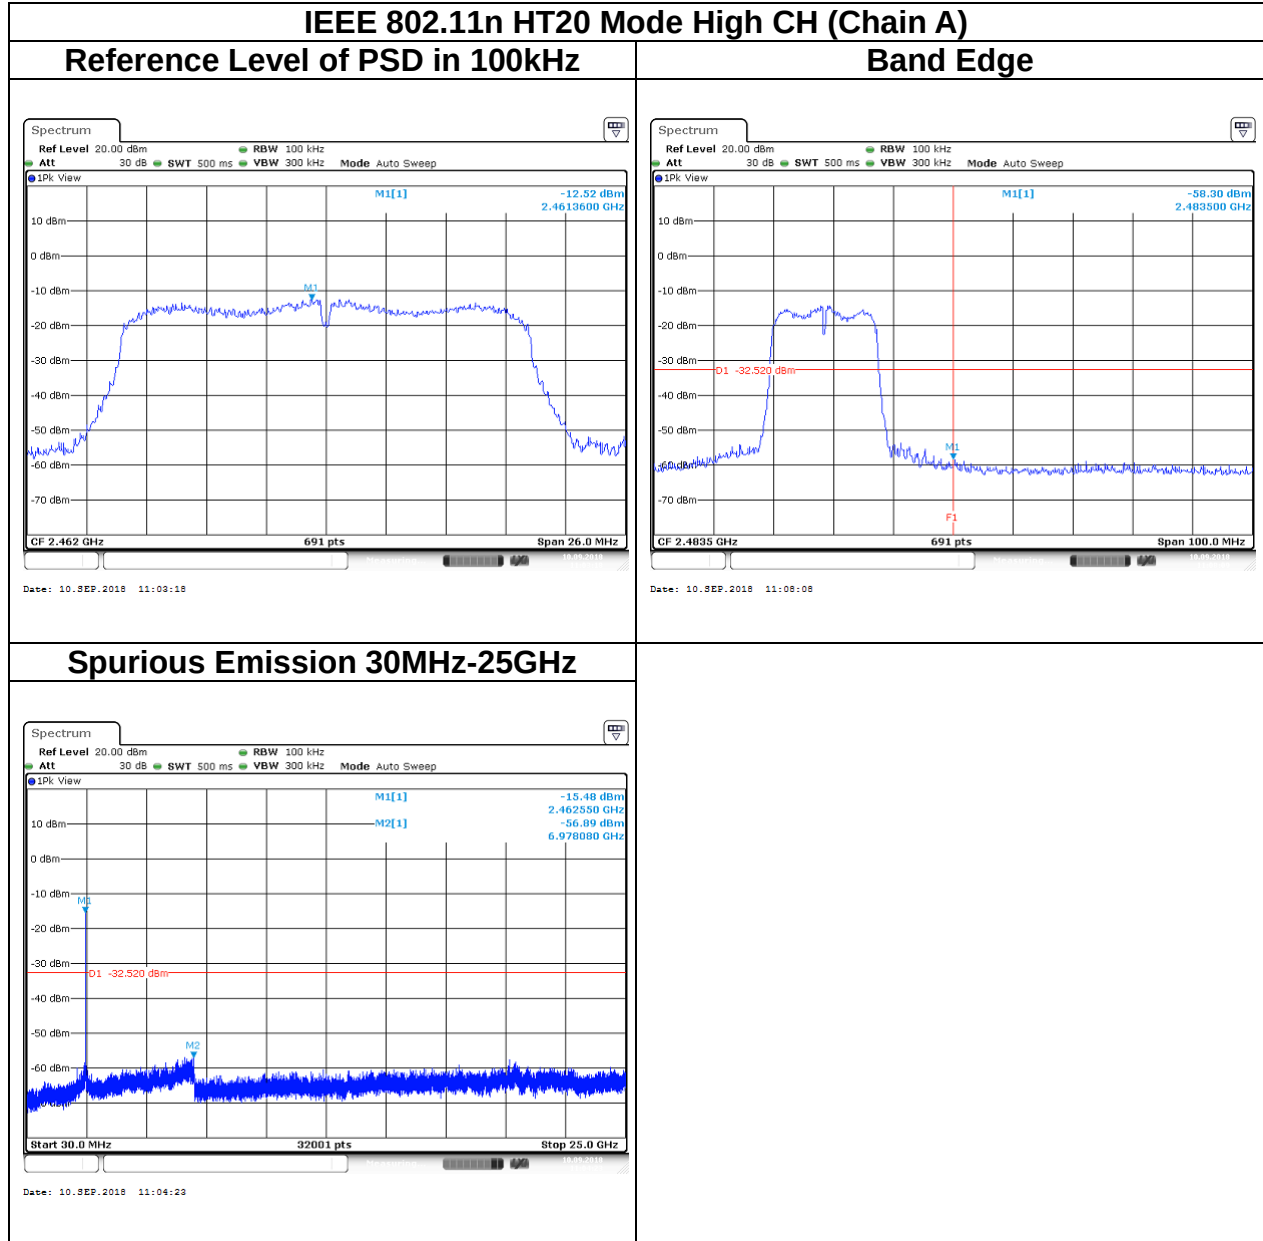

Report No.: T180807D10-RP1

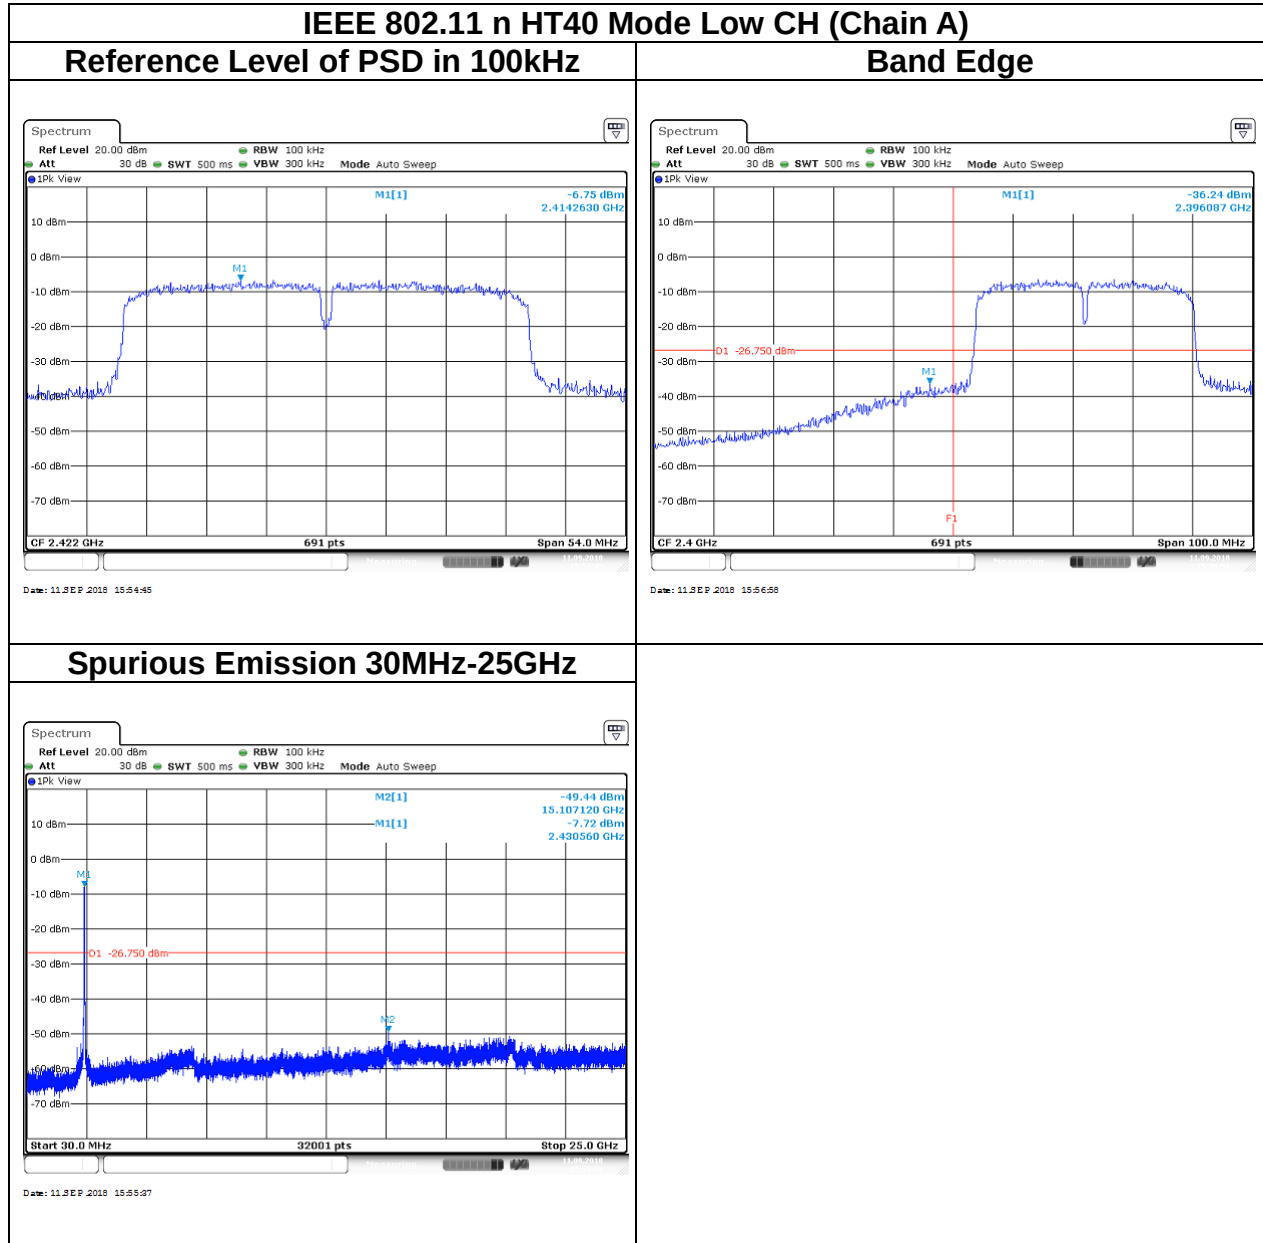

Report No.: T180807D10-RP1

