

### **Application**

For

Part 2, Subpart J, Paragraph 2.907 Equipment Authorization of Certification for an Intentional Radiator per Part 15, Subpart C, paragraphs 15.207, 15.209 and 15.249

And

For the

**ElectroniXIQ LLC** 

Model: Stinger Model 001

FCC ID: 2ALIF-STR01

UST Project: 17-0027 Issue Date: March 27, 2017

Total Pages in This Report: 37

3505 Francis Circle Alpharetta, GA 30004 PH: 770-740-0717 Fax: 770-740-1508 www.ustech-lab.com



I certify that I am authorized to sign for the Test Agency and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US TECH (Agent Responsible For Test):

By: George Yang

Name:

Title: Laboratory Manager

Date: March 27, 2017



NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

3505 Francis Circle Alpharetta, GA 30004 PH: 770-740-0717 Fax: 770-740-1508 www.ustech-lab.com

Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

#### **MEASUREMENT TECHNICAL REPORT**

**COMPANY NAME:** ElectroniXIQ

MODEL: Stinger Model 001

FCC ID: 2ALIF-STR01

**DATE:** March 27, 2017

Phone Number: (770) 740-0717 Fax Number: (770) 740-1508 US Tech Test Report: FCC ID: Test Report Number: Issue Date:

Customer:

Model:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

## **Table Of Contents**

Paragraph Title P	<u>age</u>
1 General Information	7
1.1 Purpose of this Report	
1.2 Characterization of Test Sample	7
1.3 Product Description	7
1.4 Configuration of Tested System	
1.5 Test Facility	
1.6 Related Submittals	8
2 Tests and Measurements	9
2.1 Test Equipment	9
2.2 Modifications to EUT Hardware	
2.3 Number of Measurements for Intentional Radiators (15.31(m))	9
2.4 Frequency Range of Radiated Measurements (Part 15.33)	10
2.4.1 Intentional Radiator	
2.4.2 Unintentional Radiator	_
2.5 Measurement Detector Function and Bandwidth (CFR 15.35)	
2.6 EUT Antenna Requirements (CFR 15.203)	
2.7 Restricted Bands of Operation (Part 15.205)	
2.8 Transmitter Duty Cycle (CFR 35 (c))	13
2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207) 2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(a),(c)) (IC	
RSS 210, A2.9 (a))	
2.11 Band Edge Measurements – (CFR 15.249 (d))	24
2.12 99% Occupied Bandwidth (Part 2.1049)	
2.13 Unintentional Radiator, Powerline Conducted Emissions (CFR 15.107)	
2.14 Unintentional Radiator, Radiated Emissions (CFR 15.109)	
2.15 Measurement Uncertainty	
2.15.1 Conducted Emissions Measurement Uncertainty	
2.15.2 Radiated Emissions Measurement Uncertainty	

US Tech Test Report: FCC ID: Test Report Number: Issue Date:

Customer:

Model:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

# **List of Figures**

<u>Figures</u>	<u>Title</u>	<u>Page</u>
Figure 1. Blo	ck Diagram of Test Configuration	12
•	ty Cycle 100ms Sweep	
Figure 3. Tra	nsmitter Pulse Width	
•	nd Edge Compliance, Low Channel Delta - Peak	
•	nducted Restricted Band 2310 MHz to 2390 MHz	
•	nd Edge Compliance, High Channel Delta – Peak	
•	nducted Restricted Band 2483.5 MHz to 2500 MH	
•	% Occupied Bandwidth – Low Channel	•
•	% Occupied Bandwidth – Mid Channel	
•	9% Occupied Bandwidth – High Channel	

US Tech Test Report: FCC ID: Test Report Number: Issue Date:

Customer:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

Model:

### **List of Tables**

<u>Table</u> <u>Title</u>	<u>Page</u>
Table 1. EUT and Peripherals	8
Table 2. Test Instruments	9
Table 3. Number of Test Frequencies for Intentional Radiators	10
Table 4. Allowed Antenna(s)	12
Table 5. Transmitter Power Line Conducted Emissions Test Dat	
Table 6. Spurious Radiated Emissions Below 30 MHz (X-Position	on) 17
Table 7. Spurious Radiated Emissions Below 30 MHz (Y-Position	
Table 8. Spurious Radiated Emissions Below 30 MHz (Z-Positio	
Table 9. Unintentional Radiator, Peak LF Radiated Emissions (C	•
Table 10. Unintentional Radiator, Peak HF Radiated Emissions	(CFR 15.209) 21
Table 11. Fundamental Spurious Emissions	22
Table 12. Harmonic Spurious Emissions	
Table 13. Conducted Restricted Band 2310 MHz to 2390 MHz, I	Peak27
Table 14. Conducted Restricted Band 2483.5 MHz to 2500 MHz	z, Peak30
Table 15. 99% Occupied Bandwidth	31
Table 16. Transmitter Power Line Conducted Emissions Test Da	ata, Part 15.107 35
Table 17. Unintentional Radiator, Peak Radiated Emissions (CF	R 15.109),37
Table 18. Unintentional Radiator, Peak Radiated Emissions (CF	R 15.109),37

### **List of Attachments**

Agency Agreement
Application Forms
Letter of Confidentiality
Equipment Label(s)
Block Diagram(s)
Schematic(s)
Test Configuration Photographs
Internal Photographs
External Photographs
Theory of Operation
User's Manual

Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

#### **1 General Information**

#### 1.1 Purpose of this Report

This report is prepared as a means of conveying test results and information concerning the suitability of this exact product for public distribution according to the FCC Rules and Regulations Part 15, Section 249.

### 1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on February 17, 2017 in good operating condition.

### 1.3 Product Description

The Equipment under Test (EUT) is the ElectroniXIQ Stinger Model 001. The Stinger Model 001 is a keyless vehicle security, activation and engagement system with dynamic mobile platform interactivity. The EUT incorporates a Bluetooth Low Energy radio module to allow it to sync with smart phones and other smart device through the use of an online application (app).

The maximum rated output for the device is 0 dBm Type of modulation: DSSS
The Date Rate= Bluetooth Specification 4.0
Packet Type= Bluetooth Specification 4.0

### 1.4 Configuration of Tested System

The Test Sample was tested per ANSI C63.4:2014, Methods of Measurement of Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014), and ANSI C63.10.2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

A list of EUT and Peripherals is found in Table 1 below. A block diagram of the tested system is shown in Figure 1. Test configuration photographs are provided in separate Appendices US Tech Test Report: FCC ID:

Test Report Number: Issue Date: Customer:

Model:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

#### 1.5 Test Facility

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA 30004. This site has been fully described and registered with the FCC. Its designation number is 186022. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1.

#### 1.6 Related Submittals

The EUT is subject to the following FCC authorizations:

- a) Certification under section 15.249 as a transmitter.
- b) Verification under 15.101 as a digital device and receiver.

The Verification requirement shares many common report elements with the Certification report. Therefore, though this report is mostly intended to provide data for the Certification process, the Verification authorization report (part 15.107 and 15.109) for the EUT is included herein.

**Table 1. EUT and Peripherals** 

PERIPHERAL MANUFACTURER	MODEL NUMBER	SERIAL NUMBER	FCC ID:	CABLES P/D
ElectroniXIQ	Stinger Model 001	Engineering Sample	2ALIF-STR01	0.5 m U P
DC Power Supply TekPower	TP3005T	None	None	1.5 m U P

U= Unshielded S= Shielded P= Power D= Data

Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

#### 2 Tests and Measurements

### 2.1 Test Equipment

The table below lists test equipment used to evaluate this product. Model numbers, serial numbers and their calibration status are indicated.

**Table 2. Test Instruments** 

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	5/11/2017 Extended 90 days
LOOP ANTENNA	SAS- 200/562	A.H. Systems	142	9/28/2017 2 yr
BICONICAL ANTENNA	3110B	EMCO	9307-1431	8/25/2017 2 yr
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	9/21/2018 2 yr
HORN ANTENNA	3115	EMCO	9107-3723	9/22/2018 2 yr
PRE-AMPLIFIER	8449B	HEWLETT- PACKARD	3008A00480	10/26/2017
PRE-AMPLIFIER	8477D	HEWLETT- PACKARD	2434A02157	9/26/2017

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

#### 2.2 Modifications to EUT Hardware

No modifications were made by US Tech in order to bring the EUT into compliance.

### 2.3 Number of Measurements for Intentional Radiators (15.31(m))

Measurements of intentional radiators or receivers shall be performed and reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in Table 3 below.

US Tech Test Report: FCC ID:

Test Report Number: Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

**Table 3. Number of Test Frequencies for Intentional Radiators** 

Frequency Range over which the device operates	Number of Frequencies	Location in the Range of operation
1 MHz or less	1	Middle
1 to 10 MHz	2	1 near the top 1 near the bottom
Greater than 10 MHz	3	1 near top 1 near middle 1 near bottom

Because the EUT operates at 2402 MHz to 2480 MHz, 3 test frequencies were used.

### 2.4 Frequency Range of Radiated Measurements (Part 15.33)

#### 2.4.1 Intentional Radiator

The spectrum was investigated for the intentional radiator from the lowest RF signal generated in the EUT, without going below 9 kHz to the 10<sup>th</sup> harmonic of the highest fundamental frequency generated or 40 GHz, whichever is the lowest.

#### 2.4.2 Unintentional Radiator

For the digital device, an unintentional radiator, the frequency range tested was 30 MHz to 1000 MHz, or to 5 times the highest internal clock frequency.

Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

#### 2.5 Measurement Detector Function and Bandwidth (CFR 15.35)

The radiated and conducted emissions limits shown herein are based on the following:

#### 1. Detector Function and Associated Bandwidth

On frequencies below 1000 MHz, the limits herein are based upon measurement equipment employing a CISPR Quasi-peak detector function and related measurement bandwidths (i.e. 9 kHz from 150 kHz to 30 MHz and 120 kHz from 30 MHz to 1000 MHz). Alternatively, measurements may be made with equipment employing a peak detector function as long as the same bandwidths specified for the Quasi-peak device are used.

### 2. Corresponding Peak and Average Requirements

Above 1000 MHz, radiated limits are based on measuring instrumentation employing an average detector function. When average radiated emissions are specified there is also a corresponding Peak requirement, as measured using a peak detector, of 20 dB greater than the average limit. For all measurements above 1000 MHz the Resolution Bandwidth shall be at least 1 MHz.

#### 3. Pulsed Transmitter Averaging

When the radiated emissions limit is expressed as an average value, and the transmitter is pulsed, the measured field strength shall be determined by applying a Duty Cycle Correction Factor based upon dividing the total ON time during the first 100 ms period by 100 ms (or by the period if less than 100 ms). The duty cycle may be expressed logarithmically in dB.

NOTE: If the transmitter was programmed to transmit at >98% duty cycle, then, wherever applicable (where the detection mode was AVG), the duty cycle factor calculated will be applied.

Test Report Number: Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

## 2.6 EUT Antenna Requirements (CFR 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. Only the antenna(s) listed in Table 4 will be used with this module.

Table 4. Allowed Antenna(s)

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB <sub>i</sub>	TYPE OF CONNECTOR
Antenna	ElectroniXIQ	Inverted F PCB trace antenna	None	2.0	trace

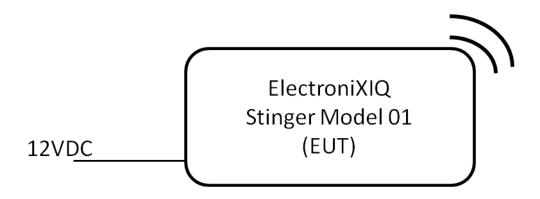


Figure 1. Block Diagram of Test Configuration

US Tech Test Report:
FCC ID:
Test Report Number:
Issue Date:
Customer:
Model:
FCC Part 15.249 Certification
2ALIF-STR01
17-0027
March 27, 2017
ElectroniXIQ
Stinger Model 001

### 2.7 Restricted Bands of Operation (Part 15.205)

Only spurious emissions can fall in the frequency bands of Part 15.205. The field strength of these spurious cannot exceed the limits of 15.209. Radiated harmonics and other spurious emissions are examined for this requirement; see test data presented in the sections below.

### 2.8 Transmitter Duty Cycle (CFR 35 (c))

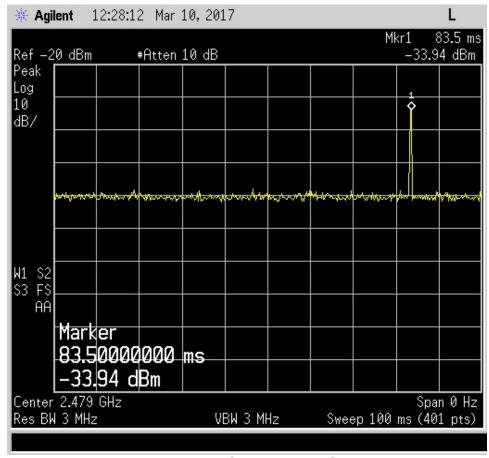


Figure 2. Duty Cycle 100ms Sweep

US Tech Test Report: FCC ID: Test Report Number: Issue Date: Customer:

Model:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

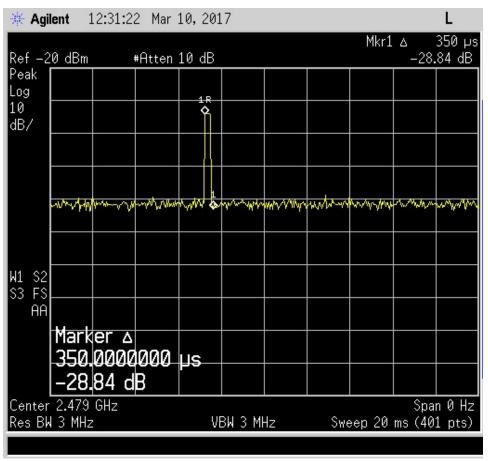


Figure 3. Transmitter Pulse Width

Pulse Width from Figure 3 = .3500 ms Total Pulses in 100ms from Figure 2 = 1

(.3500 ms Pulse Width \* 1) / (100 ms Total Pulses) = .0035 Numeric Duty Cycle Duty Cycle = 20 Log (.015) = -49.1 dB

Since the Duty Cycle is less than -20 dB, only a -20 dB Duty Cycle correction factor will be applied in this test report.

NOTE: The transmitter was programmed to transmit at >98% duty cycle, therefore wherever applicable (where the detection mode was AVG) the duty cycle factor calculated above will be applied.

Issue Date: Customer: Model:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

### 2.9 Intentional Radiator, Power Line Conducted Emissions (CFR 15.207)

Since the EUT is battery powered, this test was not applied.

Table 5. Transmitter Power Line Conducted Emissions Test Data, Part 15 207/107

Conducted Emissions 150 kHz to 30 MHz								
Tested By: Specification Requirement: Project No.: Manufacturer: ElectroniXIQ RKM FCC Part 15.207 17-0027 Model: Stinger Model 001								
Frequency (MHz)	Test Data (dBuV)	LISN+CL (dB)	Corrected Results (dBuV)	Avg Limits (dBuV)	Margin (dB)	Detector		
The EUT is battery powered, therefore this test was deemed not applicable.								

(\*)= Quasi-Peak limit used

SAMPLE CALCULATION AT N/A MHz:

Magnitude of Measured Frequency N/A dBuV + Cable Loss+ LISN Loss N/A dΒ Corrected Result N/A dBuV

Test Date: March 10, 2017

Tested By

Signature: Name: **ROBERT K. MILLS** 

2ALIF-STR01 17-0027 Issue Date: March 27, 2017 Customer: ElectroniXIQ Model: Stinger Model 001

FCC Part 15.249 Certification

### 2.10 Intentional Radiator, Radiated Emissions (CFR 15.209, 15.249(a),(c)) (IC RSS 210, A2.9 (a))

Radiated Spurious measurements: the EUT was placed into a continuous transmit mode of operation (>98% duty cycle) and tested per FCC KDB Publication 558074 and ANSI C63.10:2013. A preliminary scan was performed on the EUT to find signal frequencies that were caused by the transmitter part of the device. To obtain worse case results the EUT was tested in X, Y, and Z axes or in the orientation of normal operation if the device is designed to operation in a fixed position.

Radiated measurements were then conducted between the frequency range of 9 KHz (or lowest frequency used/generated by the device) up to the tenth harmonic of the device (no greater than 40 GHz). In the band below 30 MHz a resolution bandwidth (RBW) of 9 kHz was used; emissions below 1 GHz were tested with a RBW of 120 KHz and emissions above 1 GHz were tested with a RBW of 1 MHz. All video bandwidth settings were at least three times the RBW value.

The EUT was investigated to CFR 15.209, General requirements for unwanted spurious emissions.

FCC ID:

Test Report Number:

Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ

Stinger Model 001

Table 6. Spurious Radiated Emissions Below 30 MHz (X-Position)

	9 kHz to 30 MHz, 15.209 limits									
Те	st: Radia	ted Emission	ons		Client: Electron	niXIQ				
	Project	: 17-0027			Model: Stinger Mo	odel 001				
Frequency (MHz)	Test Data (dBuv)	AF+CA- AMP (dB/m)	P Results Limits Antenna Margin PK,							
0.07	28.38	62.40	90.78	110.9	3m./meters	20.1	PK			
0.15	22.11	57.54	79.65	103.9	3m./meters	21.5	PK			
0.94	22.20	38.92	61.12	68.1	3m./meters	12.2	PK			
4.54	21.39	26.17	47.56	54.5	3m./meters	6.6	PK			
9.87	22.04	17.19	39.23	47.7	3m./meters	35.0	PK			
18.12	34.26	-9.08	25.18	42.4	3m./meters	42.2	PK			
20.12	25.87	1.96	27.83	41.5	3m./meters	42.4	PK			

Sample Calculation at 0.07 MHz:

Magnitude of Measured Frequency 28.38 dBuV +Antenna Factor + Cable Loss - Amplifier Gain 62.40 dB/m Corrected Result 90.78 dBuV/m

Test Date: March 9, 2017

Tested By

Signature: Name: ROBERT K. MILLS

FCC ID:

Test Report Number:

Issue Date: Customer: Model:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ

Stinger Model 001

Table 7. Spurious Radiated Emissions Below 30 MHz (Y-Position)

9 kHz to 30 MHz, 15.209 limits									
Те	st: Radia	ted Emissio	ons		Client: Electron	niXIQ			
	Project	: 17-0027			Model: Stinger Mo	odel 001			
Frequency (MHz)	Test Data (dBuv)	AF+CA- AMP (dB/m)	Results (dBuV/m)	QP Limits (dBuV/m)  Antenna Distance  Margin PK, o AVG					
0.07	36.90	62.40	99.30	116.3	3m./meters	17.0	PK		
0.15	24.21	57.54	81.75	103.9	3m./meters	22.1	PK		
0.61	17.28	42.32	59.60	71.9	3m./meters	12.3	PK		
1.13	16.94	38.27	55.21	66.5	3m./meters	11.3	PK		
9.93	16.57	17.19	33.76	69.5	3m./meters	35.8	PK		
17.75	34.82	-4.18	30.64	69.5	3m./meters	38.9	PK		
20.05	21.19	1.96	23.15	69.5	3m./meters	46.4	PK		

Sample Calculation at 0.07 MHz:

Magnitude of Measured Frequency	36.90	dBuV
+Antenna Factor + Cable Loss - Amplifier Gain	62.40	dB/m
Corrected Result	99.30	dBuV/m

Test Date: March 9, 2017

Tested By Signature: Name: ROBERT K. MILLS

FCC ID:

Test Report Number:

Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ

Stinger Model 001

Table 8. Spurious Radiated Emissions Below 30 MHz (Z-Position)

Table 6. Spurious Radiated Ellissions below 30 Minz (2-Position)									
			9 kHz to 30 N	1Hz, 15.209 li	mits				
To	est: Radiat	ed Emissior	าร		Client: Electro	niXIQ			
	Project:	17-0027			Model: Stinger M	lodel 001			
requency Data AMP Results Limits Antenna Margin (MHz) Compared (MHz) Postance (MHz)				Detector PK, or AVG					
0.01	31.78	78.40	110.18	127.6	3m./meters	17.4	PK		
0.07	34.81	62.40	97.21	111.0	3m./meters	13.8	PK		
0.15	25.14	57.54	82.68	104.0	3m./meters	21.4	PK		
0.68	20.13	42.32	62.45	70.9	3m./meters	8.5	PK		
9.46	17.26	17.19	34.45	69.5	3m./meters	35.1	PK		
17.95	33.30	-4.18	29.12	69.5	3m./meters	40.4	PK		

Sample Calculation at 0.01 MHz:

Magnitude of Measured Frequency 31.78 dBuV
+Antenna Factor + Cable Loss - Amplifier Gain 78.40 dB/m
Corrected Result 110.18 dBuV/m

Test Date: March 9, 2017

Tested By

Signature: Name: ROBERT K. MILLS

FCC ID:

Test Report Number:

Issue Date: Customer: Model:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

Table 9. Unintentional Radiator, Peak LF Radiated Emissions (CFR 15.209)

Table 9. Offilite Itiolial Radiator, Fear LF Radiated Ellissions (CFR 13.209)											
	30 MHz to 1000 MHz										
T	Test: Radiated Emissions Client: ElectroniXIQ										
	Project:	17-0027			Model: Stinger Mo	odel 001					
Frequency (MHz) Test AF+CA-AMP (dBuV/m) Results (dBuV/m)				QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or QP				
75.97	45.46	-17.56	27.90	40.0	3m./HORZ	12.1	PK				
75.97	37.72	-18.06	19.66	40.0	3m./VERT	20.3	PK				
92.20	35.39	-16.64	18.75	43.5	3m./VERT	24.7	PK				
202.00	37.30	-13.52	23.78	43.5	3m./HORZ	19.7	PK				
204.04	35.07	-14.72	20.35	43.5	3m./VERT	23.1	PK				
222.71	33.37	-14.57	18.80	46.0	3m./VERT	27.2	PK				
292.25	37.47	-11.76	25.71	46.0	3m./HORZ	20.3	PK				
607.50	28.63	-4.54	24.09	460	3m./VERT	21.9	PK				
876.25	28.07	-0.01	28.06	46.0	3m./HORZ	17.9	PK				
960.70	28.15	1.65	29.80	54.0	3m./HORZ	24.2	PK				
961.90	27.99	0.55	28.54	54.0	3m./VERT	25.5	PK				

Sample Calculation at 75.97 MHz:

Magnitude of Measured Frequency 45.46 dBuV +Antenna Factor + Cable Loss - Amplifier Gain -17.56 dB/m Corrected Result 27.90 dBuV/m

Test Date: March 8-9, 2017

Tested By

Signature: Name: ROBERT K. MILLS

FCC ID:

Test Report Number:

Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

Table 10. Unintentional Radiator, Peak HF Radiated Emissions (CFR 15.209)

1 0.1010	1000-12000 MHz										
Test: Radiated Emissions Client: ElectroniXIQ											
	Project	: 17-0027			Model: Stinger	Model 001					
Frequency (MHz)	Test Data (dBuv)	AF+CA- AMP (dB/m)	Results (dBuV/m)	QP Antenna Margin Dete (dBuV/m) Polarization (dB) PK, o							
1125.00	48.16	-10.33	37.83	54.0	3.0m./HORZ	16.2	PK				
1137.50	47.99	-10.11	37.88	54.0	3.0m./VERT	16.1	PK				
10005.00	44.17	5.48	49.65	54.0	3.0m./HORZ	4.3	PK				
10425.00	44.44	6.45	50.89	54.0	3.0m./VERT	3.1	PK				

Sample Calculation at 1125.00 MHz:

Magnitude of Measured Frequency	48.16	dBuV
+Antenna Factor + Cable Loss - Amplifier Gain	-10.33	dB/m
Corrected Result	37.83	dBuV/m

Test Date: March 8-9, 2017

Tested By

Signature: Name: ROBERT K. MILLS

FCC ID:

Test Report Number:

Issue Date: Customer: Model:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

**Table 11. Fundamental Spurious Emissions** 

<b>Test:</b> FCC Part 15, Part 15.209, 15.249(a)				Client: ElectroniXIQ				
	Proj	ect: 17-0	027		N	<b>/lodel:</b> Stinger I	Model 001	
Frequency (MHz)  Test Data (dBuV)  Factor (dB)  Factor (dB)  AF+CA -AMP (dB/m)  Results (dBuV/m)					AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
				Low - Cha	nnel			
2402.00	46.88	-	30.16	77.04	94.0	3.0m./HORZ	17.0	PK
				Mid - Cha	nnel			
2426.04	47.02	-	30.16	77.18	94.0	3.0m./HORZ	16.8	PK
			•	High – Cha	nnel		•	
2480.00	43.44	-	30.13	73.57	94.0	3.0m./HORZ	20.4	PK

#### Notes:

- 1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 15.249
- 2. The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.
- 3. All Fundamental measurements passed AVG Limits over Peak values, Therefore the AVG values were not measured or deemed applicable.

Sample Calculation at 2402 MHz:

Magnitude of Measured Frequency 46.88 dBuV +Antenna Factor + Cable Loss - Amplifier Gain 30.16 dB/m 77.04 dBuV/m Corrected Result

Test Date: March 8, 2017

Tested By

Signature: Name: ROBERT K. MILLS US Tech Test Report: FCC ID:

Test Report Number: Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

**Table 12. Harmonic Spurious Emissions** 

<b>Test:</b> FCC Part 15, Part 15.209, 15.249(a)				Client: ElectroniXIQ				
	<b>Project:</b> 17-0027				Model: Stinger Model 001			
Frequency (MHz)	Test Data (dBuV)	Factor (dB)	AF+CA -AMP (dB/m)	Results (dBuV/m)	AVG Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector Mode
		•	•	Low - Chai	nnel			
4803.79	48.69	-	1.97	50.66	54.0	3.0m./HORZ	3.3	PK
7205.58	48.88	-	6.82	55.70	74.0	3.0m./HORZ	18.3	PK
7205.58	42.79	-	6.82	49.61	54.0	3.0m./HORZ	4.4	AVG
9569.79	46.08	-	6.49	52.57	54.0	3.0m./HORZ	1.4	PK
12010.84	42.93	-	8.41	51.34	54.0	3.0m./HORZ	2.7	PK
				Mid – Char	nnel			
4851.67	47.29	-	2.17	49.46	54.0	3.0m./HORZ	4.5	PK
7277.92	46.40	-	6.82	53.22	54.0	3.0m./HORZ	0.8	PK
9737.16	46.13	-	6.39	52.52	54.0	3.0m./HORZ	1.5	PK
12147.75	42.75	-	8.29	51.04	54.0	3.0m./HORZ	2.9	PK
				High - Cha	nnel			,
4959.79	47.46	-	1.32	48.78	54.0	3.0m./HORZ	5.2	PK
7439.37	43.97	-	6.48	50.45	54.0	3.0m./HORZ	3.6	PK
9889.73	43.98	-	8.90	52.88	54.0	3.0m./HORZ	1.1	PK
12434.86	42.42	-	6.09	48.51	54.0	3.0m./HORZ	5.5	PK

#### Notes:

- 1. (\*) Falls within the restricted bands of CFR 15.205. Limits based on CFR15.209 & 15.249
- 2. No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic
- 3. The EUT was placed in three orthogonal positions and the transmitter was in constant broadcast mode, with a duty cycle of greater than 98%. The emissions were measured with the receive antenna in vertical and horizontal polarizations. The data listed in the above table was worst case.

Sample Calculation at 4803.79 MHz:

Magnitude of Measured Frequency 48.69 dBuV +Antenna Factor + Cable Loss+ Amplifier Gain – Duty Cycle 1.97 dB/m Duty Cycle Correction Factor N/A dB Corrected Result 50.66 dBuV/m

Test Date: March 8, 2017

Tested By

Signature: Name: ROBERT K. MILLS

US Tech Test Report: FCC ID: Test Report Number: Issue Date: Customer:

Model:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

### 2.11 Band Edge Measurements – (CFR 15.249 (d))

Band Edge measurements are made following the guidelines in FCC KDB Publication No. 558074 with the EUT initially operating on the Lowest Channel and then operating on the Highest Channel within its band of operation. Radiated measurements are performed to demonstrate compliance with the requirement of 15.249(d) that all emissions outside of the band edges be attenuated by at least 50 dB or 15.209 limits, when compared to its highest in-band value (contained in a 100 kHz band).

To capture the band edge, set the Spectrum Analyzer frequency span was set to 2 MHz to capture the peak level of the emission operating on the channel closest to the band edge as well as any modulation products falling outside of the authorized band of operation. See the following figures and calculations for more detail.

For restricted band measurements the conducted method per 12.2.2 of KDB 558071 v03r05 was used. The measured output power was converted to field strength using the following relationship:

E= EIRP - 20log D + 104.8

E= electric field strength in dBuV/m EIRP= equivalent isotropic radiated power in dBm D= specified measurement distance in meters US Tech Test Report: FCC ID: Test Report Number: Issue Date: Customer: Model:

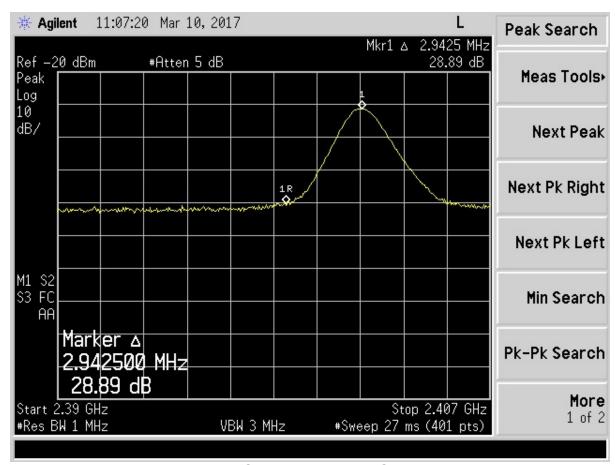


Figure 4. Band Edge Compliance, Low Channel Delta - Peak

Low Channel Corrected Measured Value from Table 11	77.04	dBuV/m
Low Channel Band Edge Delta from Figure 4	28.89	dB
Calculated Result	48.15	dBuV/m
Band Edge Limit	54.00	dBuV/m
Calculated Result	48.15	dBuV/m
Band Edge Margin	5.85	dB

US Tech Test Report: FCC ID: Test Report Number: Issue Date: Customer:

Model:

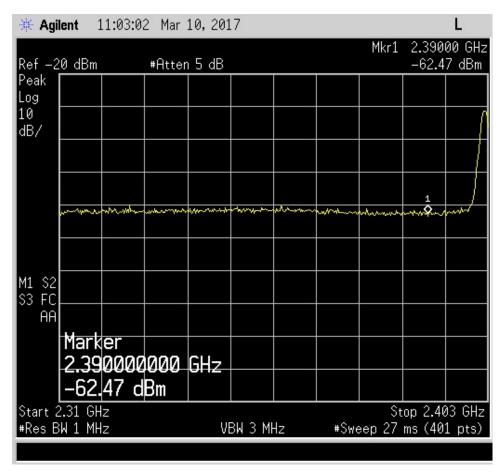


Figure 5. Conducted Restricted Band 2310 MHz to 2390 MHz, Peak

FCC ID:

Test Report Number:

Issue Date: Customer: 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ

FCC Part 15.249 Certification

Model: Stinger Model 001

Table 13. Conducted Restricted Band 2310 MHz to 2390 MHz, Peak

	2310 MHz to 2390 MHz Restricted Band Peak Measurements								
7	Test: Conducted Emissions Client: ElectroniXIQ								
	Projec	<b>t</b> : 17-0027		-	Model: Stinger	Model 001			
Frequency (MHz)	Test Data (dBm)	Antenna Gain (dBi)	Results EIRP (dBm)	Results Limit Margin PK, or AVG					
2390.00 -62.47 2.0 -60.47 34.79 74.0 39.21							PK		
2390.00 -62.47 2.0 -60.47 34.79 54.0* 16.21									

<sup>\* =</sup> AVG Limit

Test Date: March 10, 2017

Tested By

Signature: Name: ROBERT K. MILLS

US Tech Test Report: FCC ID: Test Report Number: Issue Date: Customer:

Model:

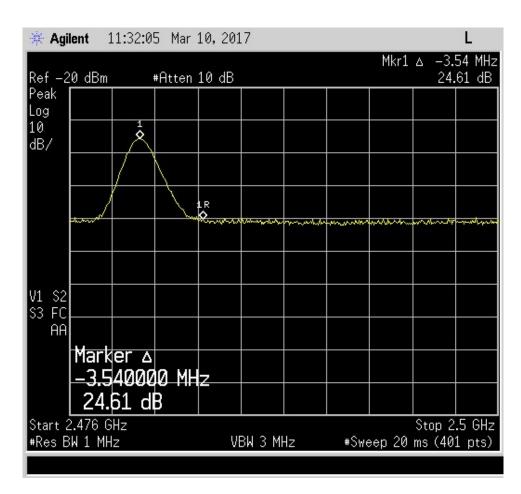


Figure 6. Band Edge Compliance, High Channel Delta - Peak

High Channel Corrected Measured Value from Table 11	73.57	dBuV/m
High Channel Band Edge Delta from Figure 6	24.61	dB
Calculated Result	48.96	dBuV/m
Band Edge Limit	54.00	dBuV/m
Calculated Result	48.96	dBuV/m
Band Edge Margin	5.04	dB

US Tech Test Report: FCC ID: Test Report Number: Issue Date: Customer:

Model:

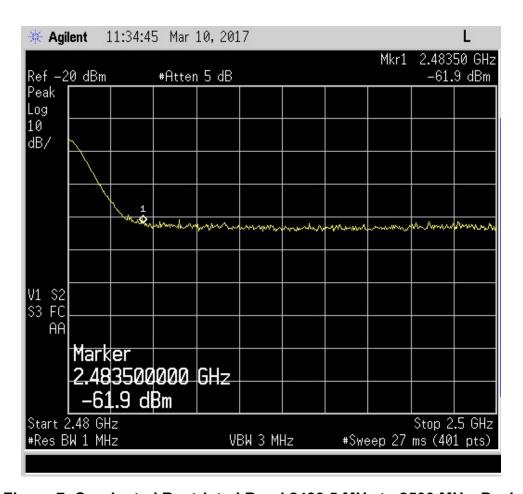


Figure 7. Conducted Restricted Band 2483.5 MHz to 2500 MHz, Peak

FCC ID:

Test Report Number:

Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ

Stinger Model 001

Table 14. Conducted Restricted Band 2483.5 MHz to 2500 MHz, Peak

	Table 14: Colladoted Rooti lotted Balla 240010 Mill2 to 2000 Mill2, 1 Car									
	2483.5 MHz to 2500 MHz Restricted Band Peak Measurements									
	Test: Conducted Emissions Client: ElectroniXIQ									
	Projec	<b>t</b> : 17-0027			Model: Stinger	Model 001				
Frequency (MHz)	uency Data Antenna EIRP Results Limit Margin P						Detector PK, or AVG			
2483.50	-61.90	2.0	35.36	74.0	38.64	PK				
2483.50	-61.90	54.0*	18.64	PK						

<sup>\* =</sup> AVG Limit

Test Date: March 10, 2017

Tested By

Signature: Name: ROBERT K. MILLS

Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

### 2.12 99% Occupied Bandwidth (Part 2.1049)

These measurements were performed while the EUT was in a constant transmit mode. A method similar to the marker delta method was used to capture the points. The RBW was set to approximately 1/100 of the manufacturers claimed RBW and with the VBW  $\geq$  RBW. The results of this test are given in Table 14 and Figures 8-10.

Table 15. 99% Occupied Bandwidth

Frequency (MHz)	99% Occupied Bandwidth (MHz)
2402	3.6588
2425	3.8957
2480	4.7599

Test Date: March 9, 2017

Tested By

Signature: Name: ROBERT K. MILLS

US Tech Test Report: FCC ID: Test Report Number: Issue Date: Customer: Model:

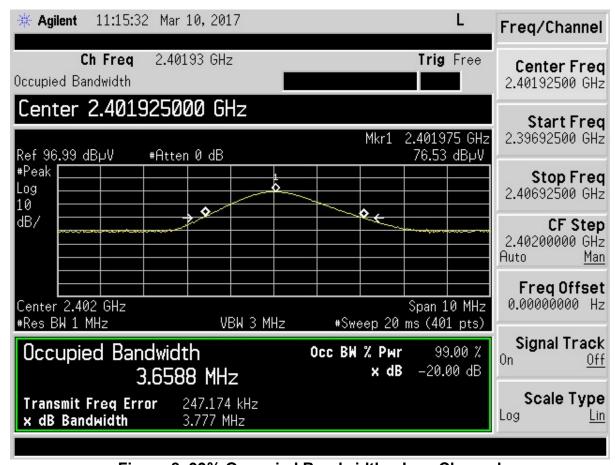


Figure 8. 99% Occupied Bandwidth – Low Channel

US Tech Test Report: FCC ID: Test Report Number: Issue Date: Customer: Model:

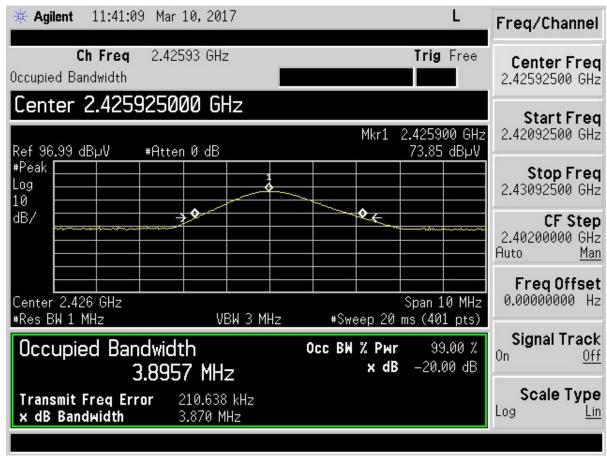


Figure 9. 99% Occupied Bandwidth - Mid Channel

US Tech Test Report: FCC ID: Test Report Number: Issue Date: Customer:

Model:

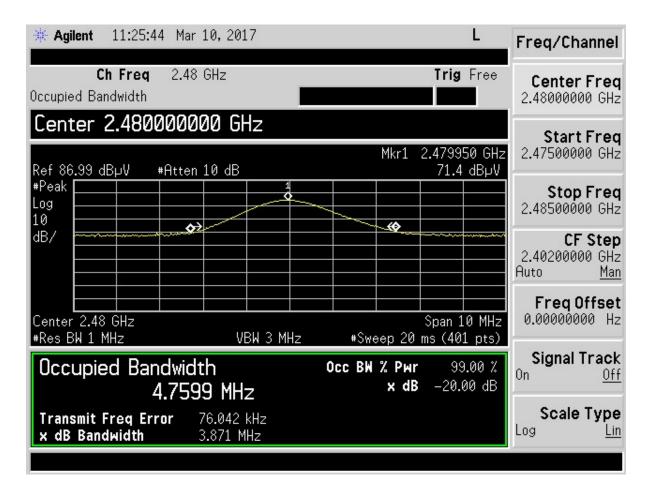


Figure 10. 99% Occupied Bandwidth - High Channel

Issue Date: Customer: Model:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

#### 2.13 Unintentional Radiator, Powerline Conducted Emissions (CFR 15.107)

The EUT is DC powered only. Therefore this test is not applicable.

Power line conducted emissions testing was performed to ensure that with the EUT in operation (exercising all transmitter functions), the complete system will meet the applicable requirements for CFR 15.107. These measurements were completed and are displayed in the sections below.

### NOTE: The test data provided in this section is to support the Verification requirement for the digital apparatus and the radio(s) within.

Table 16. Transmitter Power Line Conducted Emissions Test Data. Part 15.107

	Conducted Emissions 150 kHz to 30 MHz									
Tested By: Specification Requirement: Project No.: Manufacturer: ElectroniXIQ RKM FCC Part 15.107 Class B 17-0027 Model: Stinger Model 001										
Frequency (MHz)	Test Data (dBuV)	LISN+CL (dB)	Corrected Results (dBuV)	Avg Limits (dBuV)	Margin (dB)	Detector				

The EUT is DC battery powered ONLY, therefore this test was deemed not applicable.

SAMPLE CALCULATION; N/A

Test Date: March 10, 2017

Tested By

Signature: Name: ROBERT K. MILLS

Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

### 2.14 Unintentional Radiator, Radiated Emissions (CFR 15.109)

Radiated emissions disturbance Measurements were performed with an instrument having both peak and quasi-peak detectors over the frequency range of 30 MHz to 12.5 GHz. Measurements of the radiated emissions were made with the receiver antenna at a distance of 3 m from the boundary of the test unit.

The test antenna was varied from 1 m to 4 m in height while watching the analyzers' display for the maximum magnitude of the signal at the test frequency. The antenna polarization (horizontal or vertical) and test sample azimuth were varied during the measurements to find the maximum field strength readings to record.

The worst-case radiated emissions in the range of 30 MHz to 12.5 GHz are more than 20 dB below the limit.

NOTE: The test data provided in this section is to support the Verification requirement for the digital apparatus and the radio(s) within.

FCC ID:

Test Report Number:

Issue Date: Customer: Model:

FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ

Stinger Model 001

Table 17. Unintentional Radiator, Peak Radiated Emissions (CFR 15.109).

Table	Table 17. Offitteritional Radiator, I can Radiated Emissions (OFR 10.103),								
	30 MHz to 1000 MHz with Class B Limits								
Test: Radiated Emissions Client: ElectroniXIQ									
	Project:	17-0027		Model: Stinger Model 001					
Frequency (MHz)									
No emissions within 20 dB of the limit were detected.									

Test Date: March 8-9, 2017

Tested By

Signature: Name: ROBERT K. MILLS

Table 18 Unintentional Radiator Peak Radiated Emissions (CFR 15 109)

Table 16. Offintentional Radiator, Feak Radiated Emissions (CFR 15.109),										
1 GHz to 18 GHz with Class B Limits										
Test: Radiated Emissions						Client: ElectroniXIQ				
<b>Project</b> : 17-0027						Model: Stinger Model 001				
Frequency (MHz)	Test Data (dBuv)	Factor (dB)	AF+CA- AMP (dB/m)	Results (dBuV/m)		QP Limits (dBuV/m)	Antenna Distance/ Polarization	Margin (dB)	Detector PK, or QP	
No emissions within 20 dB of the limit were detected.										

Test Date: March 8-9, 2017

Tested By

Signature: (lust / L Name: ROBERT K. MILLS

Test Report Number: Issue Date: Customer: Model: FCC Part 15.249 Certification 2ALIF-STR01 17-0027 March 27, 2017 ElectroniXIQ Stinger Model 001

### 2.15 Measurement Uncertainty

The measurement uncertainties given were calculated using the method detailed in CISPR 16-4. A coverage factor of k=2 was used to give a level of confidence of approximately 95%.

### 2.15.1 Conducted Emissions Measurement Uncertainty

Measurement Uncertainty (within a 95% confidence level) for this test is  $\pm$  2.85 dB.

#### 2.15.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is ± 5.4 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is  $\pm$  5.19 dB.

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is  $\pm$  5.08dB.