

FCC Radio Test Report

FCC ID: 2ALJ8-CTL001A

This report concerns (check one): Original Grant Class II Change

Project No. : 1702C003
Equipment : WCDMA/GPRS Wireless Data Terminal
Test Model : CTL-001A
Series Model : CTL-001
Applicant : Cathay Tri-Tech.,Inc
Address : 3-24-5,Shinyokohama Kohoku-ku,Yokohama
222-0033,Japan

Date of Receipt : Feb. 05, 2017
Date of Test : Feb. 05, 2017 ~ Apr. 07, 2017
Issued Date : Apr. 10, 2017
Tested by : BTL Inc.

Technical Engineer : Shawn Xiao
(Shawn Xiao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3,Jinshagang 1st Road, Shixia,Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents

	Page
REPORT ISSUED HISTORY	5
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION	10
3.3 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED FOR RADIATED	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 . TEST RESULT	12
4.1 OUTPUT POWER MEASUREMENT	12
4.1.1 LIMIT	12
4.1.2 TEST PROCEDURE	12
4.1.3 TESTSETUP LAYOUT	12
4.1.4 TEST DEVIATION	12
4.1.5 TEST RESULTS	12
4.2 OCCUPIED BANDWIDTH MEASUREMENT	13
4.2.1 TEST PROCEDURE	13
4.2.2 TEST SETUP LAYOUT	13
4.2.3 TEST DEVIATION	13
4.2.4 TEST RESULTS	13
4.3 CONDUCTED EMISSIONS MEASUREMENT	14
4.3.1 LIMIT	14
4.3.2 TEST PROCEDURES	14
4.3.3 TESTSETUP LAYOUT	14
4.3.4 TESTDEVIATION	14
4.3.5 TEST RESULTS	14
4.4 RADIATED EMISSIONS MEASUREMENT	15
4.4.1 LIMIT	15
4.4.2 TEST PROCEDURES	15
4.4.3 TESTSETUP LAYOUT	15
4.4.4 TESTDEVIATION	15
4.4.5 TEST RESULTS	15
4.5 BAND EDGE MEASUREMENT	16
4.5.1 LIMIT	16

	Page
4.5.2 TEST PROCEDURES	16
4.5.3 TESTSETUP LAYOUT	16
4.5.4 TESTDEVIATION	16
4.5.5 TEST RESULTS	16
4.6 PEAK TO AVERAGE RATIO MEASUREMENT	17
4.6.1 LIMIT	17
4.6.2 TEST PROCEDURES	17
4.6.3 TESTSETUP LAYOUT	17
4.6.4 TESTDEVIATION	17
4.6.5 TEST RESULTS	17
4.7 FREQUENCY STABILITY MEASUREMENT	18
4.7.1 LIMIT	18
4.7.2 TEST PROCEDURES	18
4.7.3 TESTSETUP LAYOUT	18
4.7.4 TESTDEVIATION	18
4.7.5 TEST RESULTS	18
5. LIST OF MEASUREMENT EQUIPMENTS	19
ATTACHMENT A - OUTPUT POWER	21
ATTACHMENT B - OCCUPIED BANDWIDTH	24
ATTACHMENT C - CONDUCTED EMISSIONS	29
ATTACHMENT D - RADIATED EMISSION	33
ATTACHMENT E - BAND EDGE	54
ATTACHMENT F - PEAK TO AVERAGE RATIO	57
ATTACHMENT G - FREQUENCY STABILITY	61

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-2-1702C003	Original Issue.	Apr. 10, 2017

1. CERTIFICATION

Equipment : WCDMA/GPRS Wireless Data Terminal
Brand Name : Cathay Tri-Tech.,Inc
Test Model CTL-001A
Series Model : CTL-001
Applicant : Cathay Tri-Tech.,Inc
Manufacturer : Cathay Tri-Tech.,Inc
Address : 3-24-5,Shinyokohama Kohoku-ku,Yokohama 222-0033,Japan
Factory : Shanghai Simcom Wireless Solutions Limited
Address : SIM Technology Building, No.633 Jinzhong Road, Changning District, Shanghai P.R.China 200335
Date of Test : Feb. 05, 2017 ~ Apr. 07, 2017
Test Sample : Engineering Sample
Standard(s) : 47 CFR FCC Part 24 Subpart E
47 CFR FCC Part 2
ANSI/TIA-603-D-2010
KDB 971168 D01 Power Meas License Digital Systems v02r02

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-2-1702C003) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Test results included in this report is only for the DCS1900, WCDMA Band 2 part.

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 22 Subpart H & Part 2			
Standard(s) Section	Test Item	Judgment	Tested By
2.1046 24.232(c)	Radiated power	PASS	Paul Li
2.1046 24.232(c)	Conducted Output Power	PASS	Paul Li
2.1049 24.238(a)	Occupied Bandwidth	PASS	Paul Li
2.1051 24.238(a)	Conducted Spurious Emissions	PASS	Paul Li
2.1053 24.238(a)	Radiated Spurious Emissions	PASS	Paul Li
24.238(a)	Band Edge Measurements	PASS	Paul Li
24.232(d)	Peak To Average Ratio	PASS	Paul Li
2.1055 24.235	Frequency Stability	PASS	Paul Li

NOTE:

(1)" N/A" denotes test is not applicable to this device.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.
BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cisp} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

A. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U_{cisp} (dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U_{cisp} (dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68

Test Site	Method	Measurement Frequency Range	Ant. H / V	U_{cisp} (dB)
DG-CB03 (1m)	CISPR	18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	WCDMA/GPRS Wireless Data Terminal						
Brand Name	Cathay Tri-Tech.,Inc						
Test Model	CTL-001A						
Model Name	CTL-001						
Model Difference	Only differ in model name.						
Modulation Type	GRPS	GMSK					
	EDGE	GMSK, 8PSK					
	WCDMA	Uplink: BPSK Downlink: QPSK					
	WCDMA(HSDPA)	16QAM					
	LTE	QPSK, 16QAM					
Operation Frequency	EDGE/GPRS	1850.2 ~ 1909.8 MHz					
	WCDMA Band 2	1852.4 ~ 1907.6 MHz					
Max. EIRP Power	GSM/GPRS	GMSK	32.04	dBm			
	EDGE	8PSK	27.73	dBm			
	WCDMA	BPSK	25.63	dBm			
	WCDMA_HSDPA	16QAM	25.62	dBm			
Antenna Type	External Antenna						
Antenna Gain	DCS 1900 & WCDMA Band 2	2.01dBi					
IMEI No.1	014682000628106						
Power Source	DC Voltage Supplied from AC/DC Adapter.						
Power Rating	I/P: 100-240Vac, 50/60Hz 0.35A O/P: 5V - - - 2A						

Note:-

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

3.2 DESCRIPTION OF TEST MODES AND TEST CONDITION


Following channel(s) was (were) selected for the final test as listed below:

GSM MODE			
Test Item	Available Channel	Tested Channel	Mode
EIRP	512 to 810	512, 661, 810	GPRS, EDGE
Conducted Output Power	512 to 810	512, 661, 810	GPRS, EDGE
Occupied Bandwidth	512 to 810	512, 661, 810	GPRS, EDGE
Concdudeted Emission	512 to 810	661	GPRS, EDGE
Radiated Emission	512 to 810	661	GPRS, EDGE
Band Edge	512 to 810	512, 810	GPRS, EDGE
Peak to Average Ratio	512 to 810	512, 661, 810	GPRS, EDGE
Frequency Stability	512 to 810	661	GPRS, EDGE

WCDMA MODE			
Test Item	Available Channel	Tested Channel	Mode
EIRP	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA
Conducted Output Power	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA
Concdudeted Emission	9262 to 9538	9400	WCDMA, HSDPA
Radiated Emission	9262 to 9538	9400	WCDMA, HSDPA
Band Edge	9262 to 9538	9262, 9538	WCDMA, HSDPA
Peak to Average Ratio	9262 to 9538	9262, 9400, 9538	WCDMA, HSDPA
Frequency Stability	9262 to 9538	9262	WCDMA, HSDPA

EUT TEST CONDITIONS:

Test Item	Environmental Conditions	Test Voltage
EIRP	25°C, 60%RH	AC 120V/60Hz
Conducted Output Power	25°C, 65%RH	AC 120V/60Hz
Occupied Bandwidth	25°C, 65%RH	AC 120V/60Hz
Conducted Emission	25°C, 65%RH	AC 120V/60Hz
Radiated Emission	25°C, 60%RH	AC 120V/60Hz
Band Edge	25°C, 65%RH	AC 120V/60Hz
Peak to Average Ratio	25°C, 65%RH	AC 120V/60Hz
Frequency Stability	25°C, 65%RH	AC 120V/60Hz

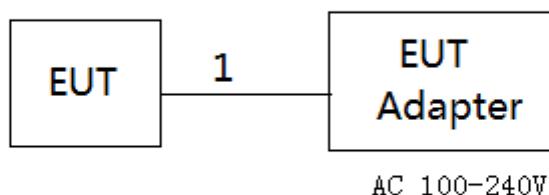3.3 BLOCKDIAGRAMSHOWINGTHECONFIGURATIONOFSYSTEMTESTED FOR RADIATED

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
-	-		-	-	-

Item	Shielded Type	Ferrite Core	Length	Note
1	NO	NO	1.5m	AC Cable

Note:

(1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. TEST RESULT

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMIT

Mobile / Portable station are limited to 2 watts e.i.r.p.

4.1.2 TEST PROCEDURE

EIRP/ERP:

EIRP= Conducted Power +Antenan gain


ERP power=EIPR power-2.15dBi.

Conducted Power:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

4.1.3 TESTSETUP LAYOUT

Conducted Power Measurement



4.1.4 TEST DEVIATION

No deviation

4.1.5 TEST RESULTS


Please refer to the Attachment A.

4.2 OCCUPIED BANDWIDTH MEASUREMENT

4.2.1 TEST PROCEDURE

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.

4.2.2 TEST SETUP LAYOUT

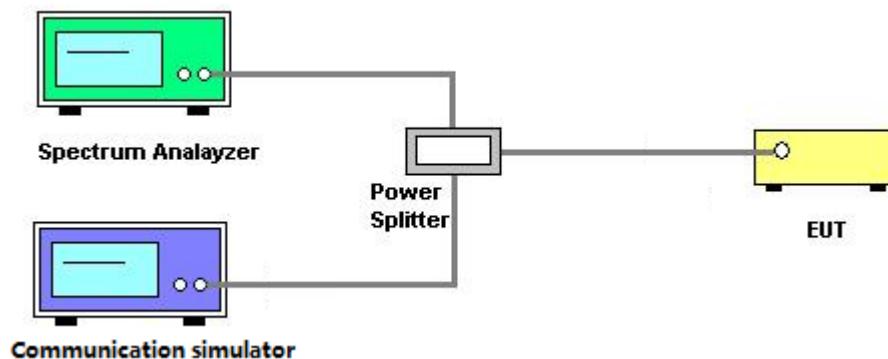

4.2.3 TEST DEVIATION

No deviation

4.2.4 TEST RESULTS

Please refer to the Attachment B.

4.3 CONDUCTED EMISSIONS MEASUREMENT


4.3.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

4.3.2 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 6.0.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set $RBW \geq 1\% EBW$ in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS detector.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43+10\log(P)$ dB below the transmitter power P(Watts)
 $=P(W)-[43+10\log(P)](\text{dB})$
 $=[30+10\log(P)](\text{dBm})-[43+10\log(P)](\text{dB})$
 $=-13\text{dBm}$

4.3.3 TESTSETUP LAYOUT

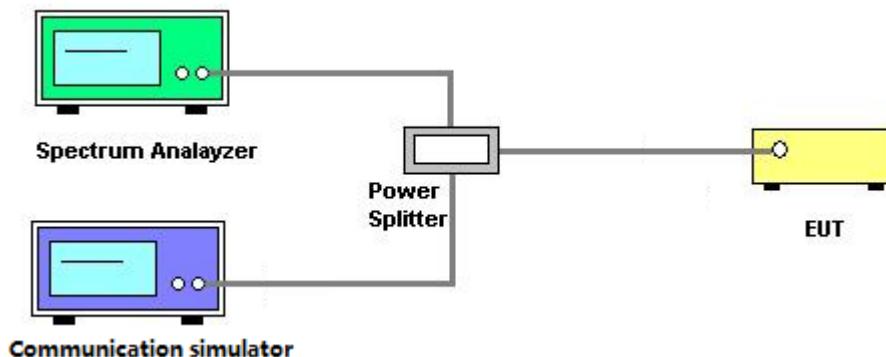

4.3.4 TESTDEVIATION

No deviation

4.3.5 TEST RESULTS

Please refer to the Attachment C.

4.4 RADIATED EMISSIONS MEASUREMENT

4.4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

4.4.2 TEST PROCEDURES

1. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
2. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
3. EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
4. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, E.R.P power = E.I.P.R power - 2.15dBi.
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.4.3 TESTSETUP LAYOUT

This test setup layout is the same as that shown in **section 4.1.3**.

4.4.4 TESTDEVIATION

No deviation

4.4.5 TEST RESULTS

Please refer to the Attachment D.

4.5 BAND EDGE MEASUREMENT


4.5.1 LIMIT

A Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.5.2 TEST PROCEDURES

1. All measurements were done at low and high operational frequency range.
2. The center frequency of spectrum is the band edge frequency and span is 1MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS/EDGE).
3. The center frequency of spectrum is the band edge frequency and span is 5MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
4. Record the max trace plot into the test report.

4.5.3 TESTSETUP LAYOUT

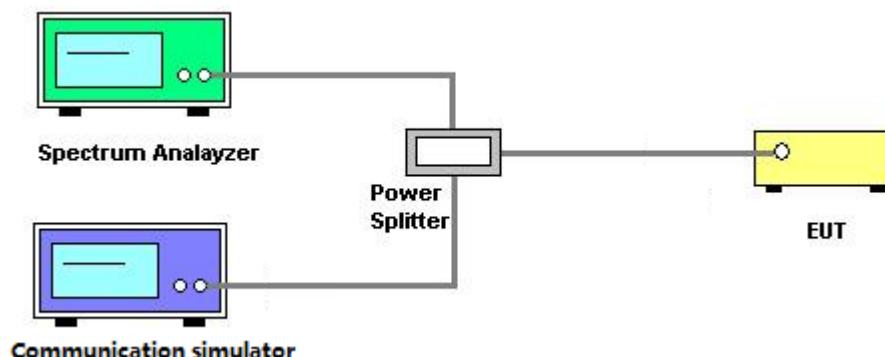

4.5.4 TESTDEVIATION

No deviation

4.5.5 TEST RESULTS

Please refer to the Attachment E.

4.6 PEAK TO AVERAGE RATIO MEASUREMENT


4.6.1 LIMIT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

4.6.2 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

4.6.3 TESTSETUP LAYOUT

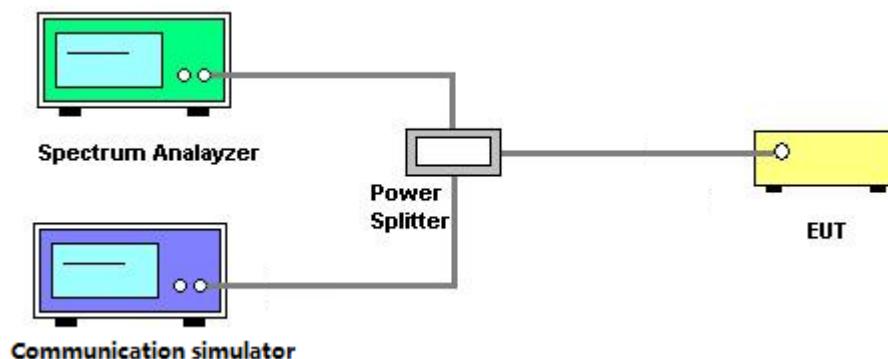

4.6.4 TESTDEVIATION

No deviation

4.6.5 TEST RESULTS

Please refer to the Attachment F.

4.7 FREQUENCY STABILITY MEASUREMENT


4.7.1 LIMIT

1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

4.7.2 TEST PROCEDURES

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

4.7.3 TESTSETUP LAYOUT

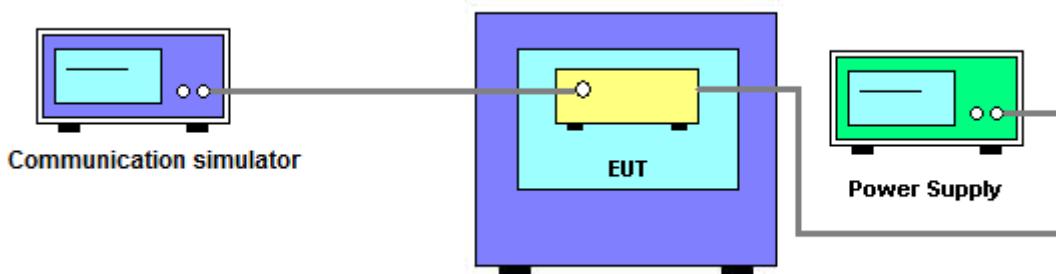

4.7.4 TESTDEVIATION

No deviation

4.7.5 TEST RESULTS

Please refer to the Attachment G.

5. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Test receiver	R&S	ESU26	100387	Jul. 21, 2017
2	LOOP Antennas(9kHz-30M Hz)	R&S	HFH2-Z2	100263	Apr. 29, 2017
3	Spectrum analyzer	R&S	FSU3	200474	May 24, 2017
4	Spectrum analyzer	R&S	FSU43	100144	Jun. 02, 2017
5	Trilog Broadband Antenna (30M~3GHz)	SCHWARZBECK	VULB 9163	9163-521	Apr. 07, 2018
6	Double-Ridged Waveguide Horn Antenna (1G~18GHz)	R&S	HF907	100304	Apr. 29, 2017
7	Pyramidal Horn Antenna(18GHz-26.5 GHz)	ETS-Lindgren	Sep-60	5140299	Jul. 14, 2017
8	Radio Communication Tester	R&S	CMU200	3608082535	Mar. 29, 2018
9	Radio Communication Tester	Anritsu	MT8820C	A110518805	May 23, 2017

Conducted Emission & Band Edge & Occupied Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 26, 2018
2	EXA Spectrum Analyzer	Agilent	N9010A	MY50520044	Mar. 26, 2018
3	Spectrum Analyzer	R&S	FSP40	100185	Sep. 04, 2017
4	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Feb. 25, 2018
5	wideband radio communication tester	R&S	CMW500	152372	Mar. 26, 2018
6	Cable	N/A	RG316(0.3m)	N/A	Jul. 06, 2017
7	Cable	N/A	RG316(0.3m)	N/A	Jul. 06, 2017

Frequency Stability Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Wireless Communication Test SET	Agilent	E5515C	MY48364183	Mar. 26, 2018
2	DC power supply	GW Instek	GPC-3030DN	EK880675	Oct. 13, 2017
3	POWER SPLITTER	Mini-Circuits	ZFRSC-123-S+	331000910-1	Feb. 25, 2018
4	wideband radio communication tester	R&S	CMW500	152372	Mar. 26, 2018
5	Const Temp,& Humidity Chamber	Giant?Force	ITH-225-20-S	IAB0309-001	Sep. 04, 2017
6	Cable	N/A	RG316(0.3m)	N/A	Jul. 06, 2017

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

ATTACHMENT A - OUTPUT POWER

Conducted Power:

DCS1900 (Capsensor Off)	Burst Conducted Power (dBm)		
	512CH	661CH	810CH
	1850.2MHz	1880MHz	1909.8MHz
GPRS/EDGE (GMSK)	30.03	29.70	29.17
	28.34	28.48	28.38
	26.42	26.27	25.93
	27.92	28.02	27.86
EDGE (8PSK)	25.64	25.72	25.28
	25.58	25.52	25.32
	24.27	24.11	23.98
	23.38	23.17	22.99

Modulation	Band	WCDMA Band 2(Capsensor Off)		
	Tx Channel	9262CH	9400CH	9538CH
	Rx Channel	9662CH	9800CH	9938CH
	Frequency	1852.4MHz	1880MHz	1907.6MHz
BPSK	RMC 12.2K	23.44	23.48	23.33
	RMC 64K	23.62	23.55	23.49
	RMC 144K	23.46	23.49	23.26
	RMC 384K	23.36	23.56	23.38
16QAM	HSDPA Subtest-1	23.41	23.53	23.46
	HSDPA Subtest-2	23.61	23.60	23.44
	HSDPA Subtest-3	23.54	23.48	23.32
	HSDPA Subtest-4	23.50	23.42	23.40


EIRP Power

DCS1900 (Capsensor Off)	EIRP Power (dBm)		
	512CH	661CH	810CH
	1850.2MHz	1880MHz	1909.8MHz
GPRS/EDGE (GMSK)	32.04	31.71	31.18
	30.35	30.49	30.39
	28.43	28.28	27.94
	29.93	30.03	29.87
EDGE (8PSK)	27.65	27.73	27.29
	27.59	27.53	27.33
	26.28	26.12	25.99
	25.39	25.18	25.00

Modulation	Band	WCDMA Band 2(Capsensor Off)		
	Tx Channel	9262CH	9400CH	9538CH
	Rx Channel	9662CH	9800CH	9938CH
	Frequency	1852.4MHz	1880MHz	1907.6MHz
BPSK	RMC 12.2K	25.45	25.49	25.34
	RMC 64K	25.63	25.56	25.50
	RMC 144K	25.47	25.50	25.27
	RMC 384K	25.37	25.57	25.39
16QAM	HSDPA Subtest-1	25.42	25.54	25.47
	HSDPA Subtest-2	25.62	25.61	25.45
	HSDPA Subtest-3	25.55	25.49	25.33
	HSDPA Subtest-4	25.51	25.43	25.41

ATTACHMENT B - OCCUPIED BANDWIDTH

DCS1900					
GPRS			EDGE		
GMSK			8PSK		
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)
512	1850.2	0.2456	512	1850.2	0.2421
661	1880	0.2426	661	1880	0.2491
810	1909.8	0.2480	810	1909.8	0.2410
Channel	Frequency (MHz)	26dB Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
512	1850.2	0.3147	512	1850.2	0.3118
661	1880	0.3111	661	1880	0.3138
810	1909.8	0.3222	810	1909.8	0.3092

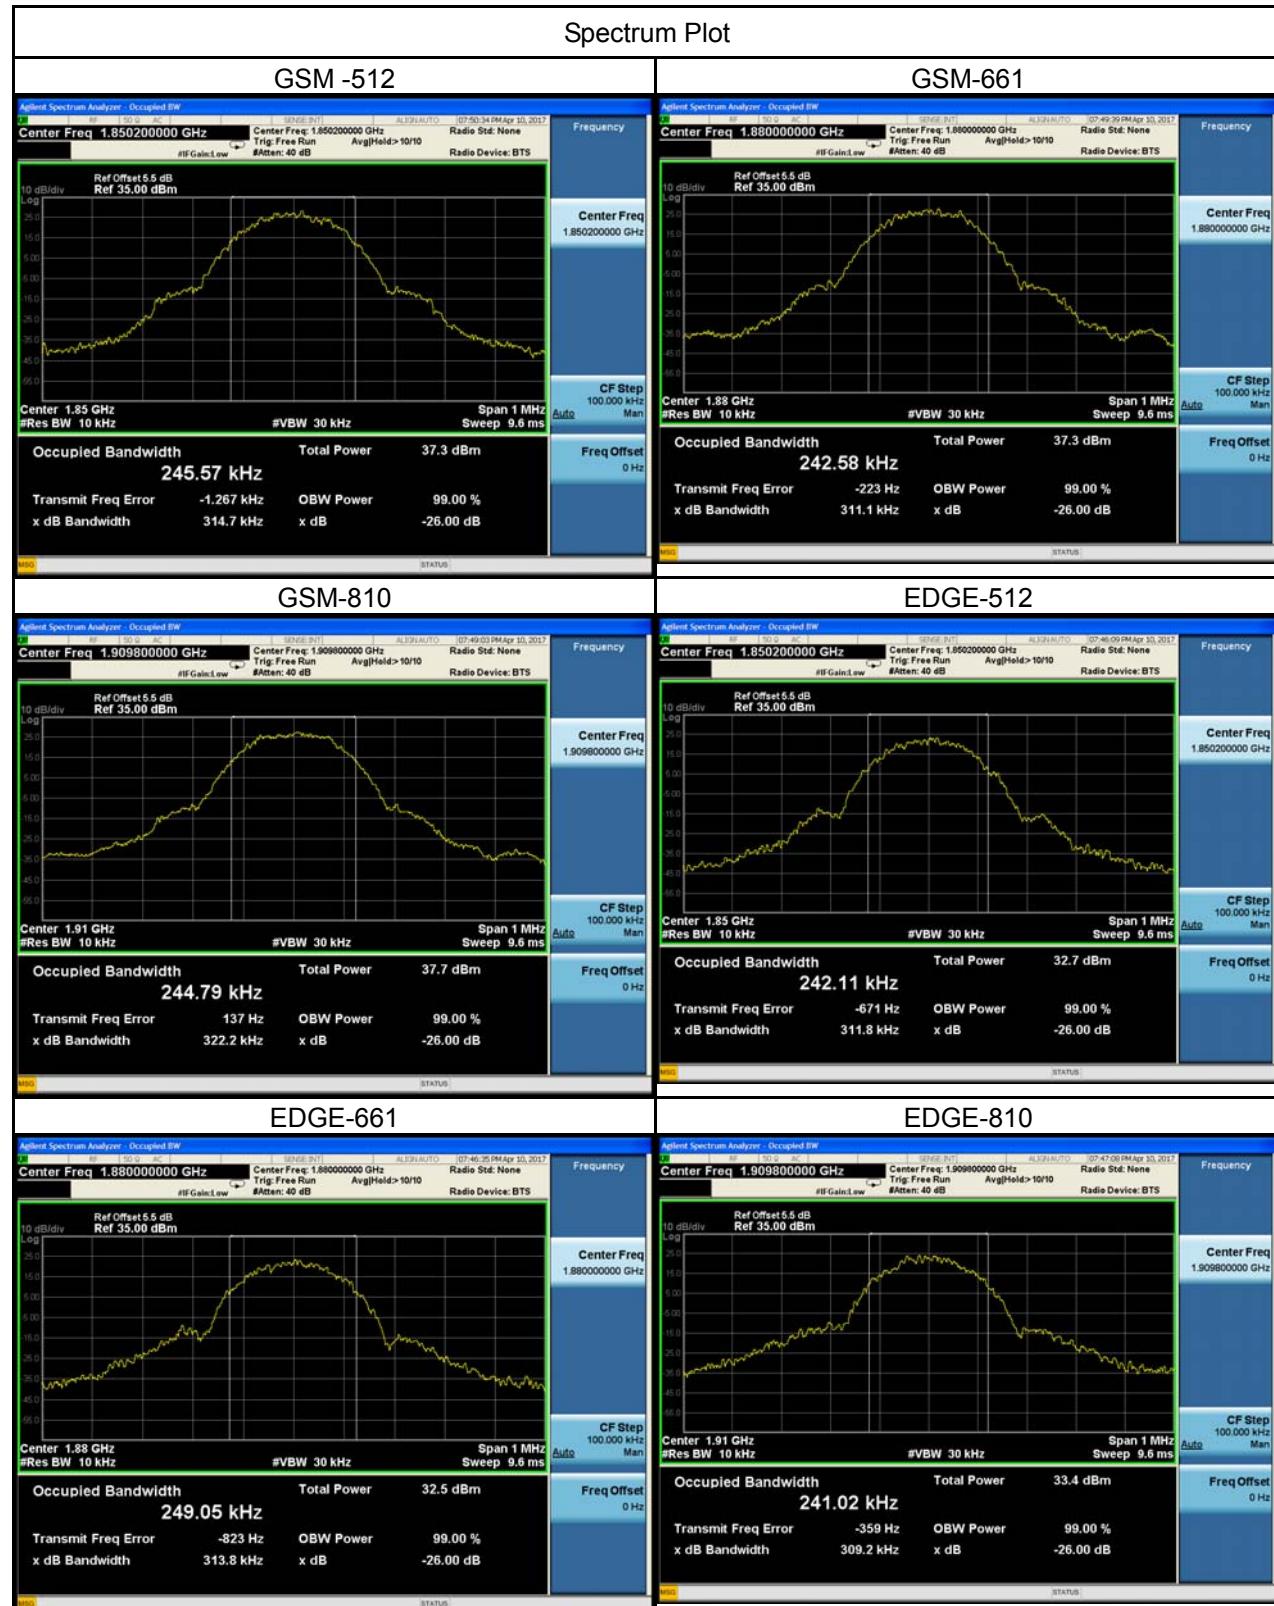


WCDMA Band 2


Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
9262	1852.4	4.1632	9262	1852.4	4.694
9400	1880	4.1649	9400	1880	4.694
9538	1907.6	4.1813	9538	1907.6	4.712

Spectrum Plot

9262

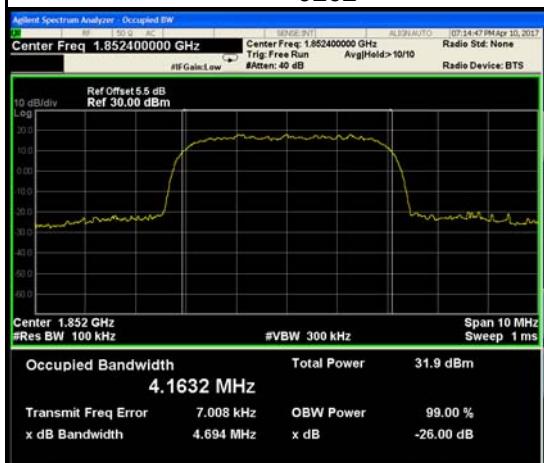

9400

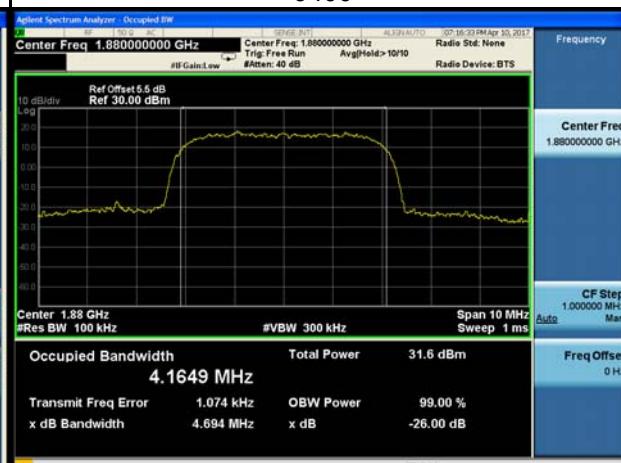


9538





WCDMA_HSDPA Band 2					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
9262	1852.4	4.1765	9262	1852.4	4.700
9400	1880	4.1757	9400	1880	4.678
9538	1907.6	4.1666	9538	1907.6	4.685



ATTACHMENT C - CONDUCTED EMISSIONS

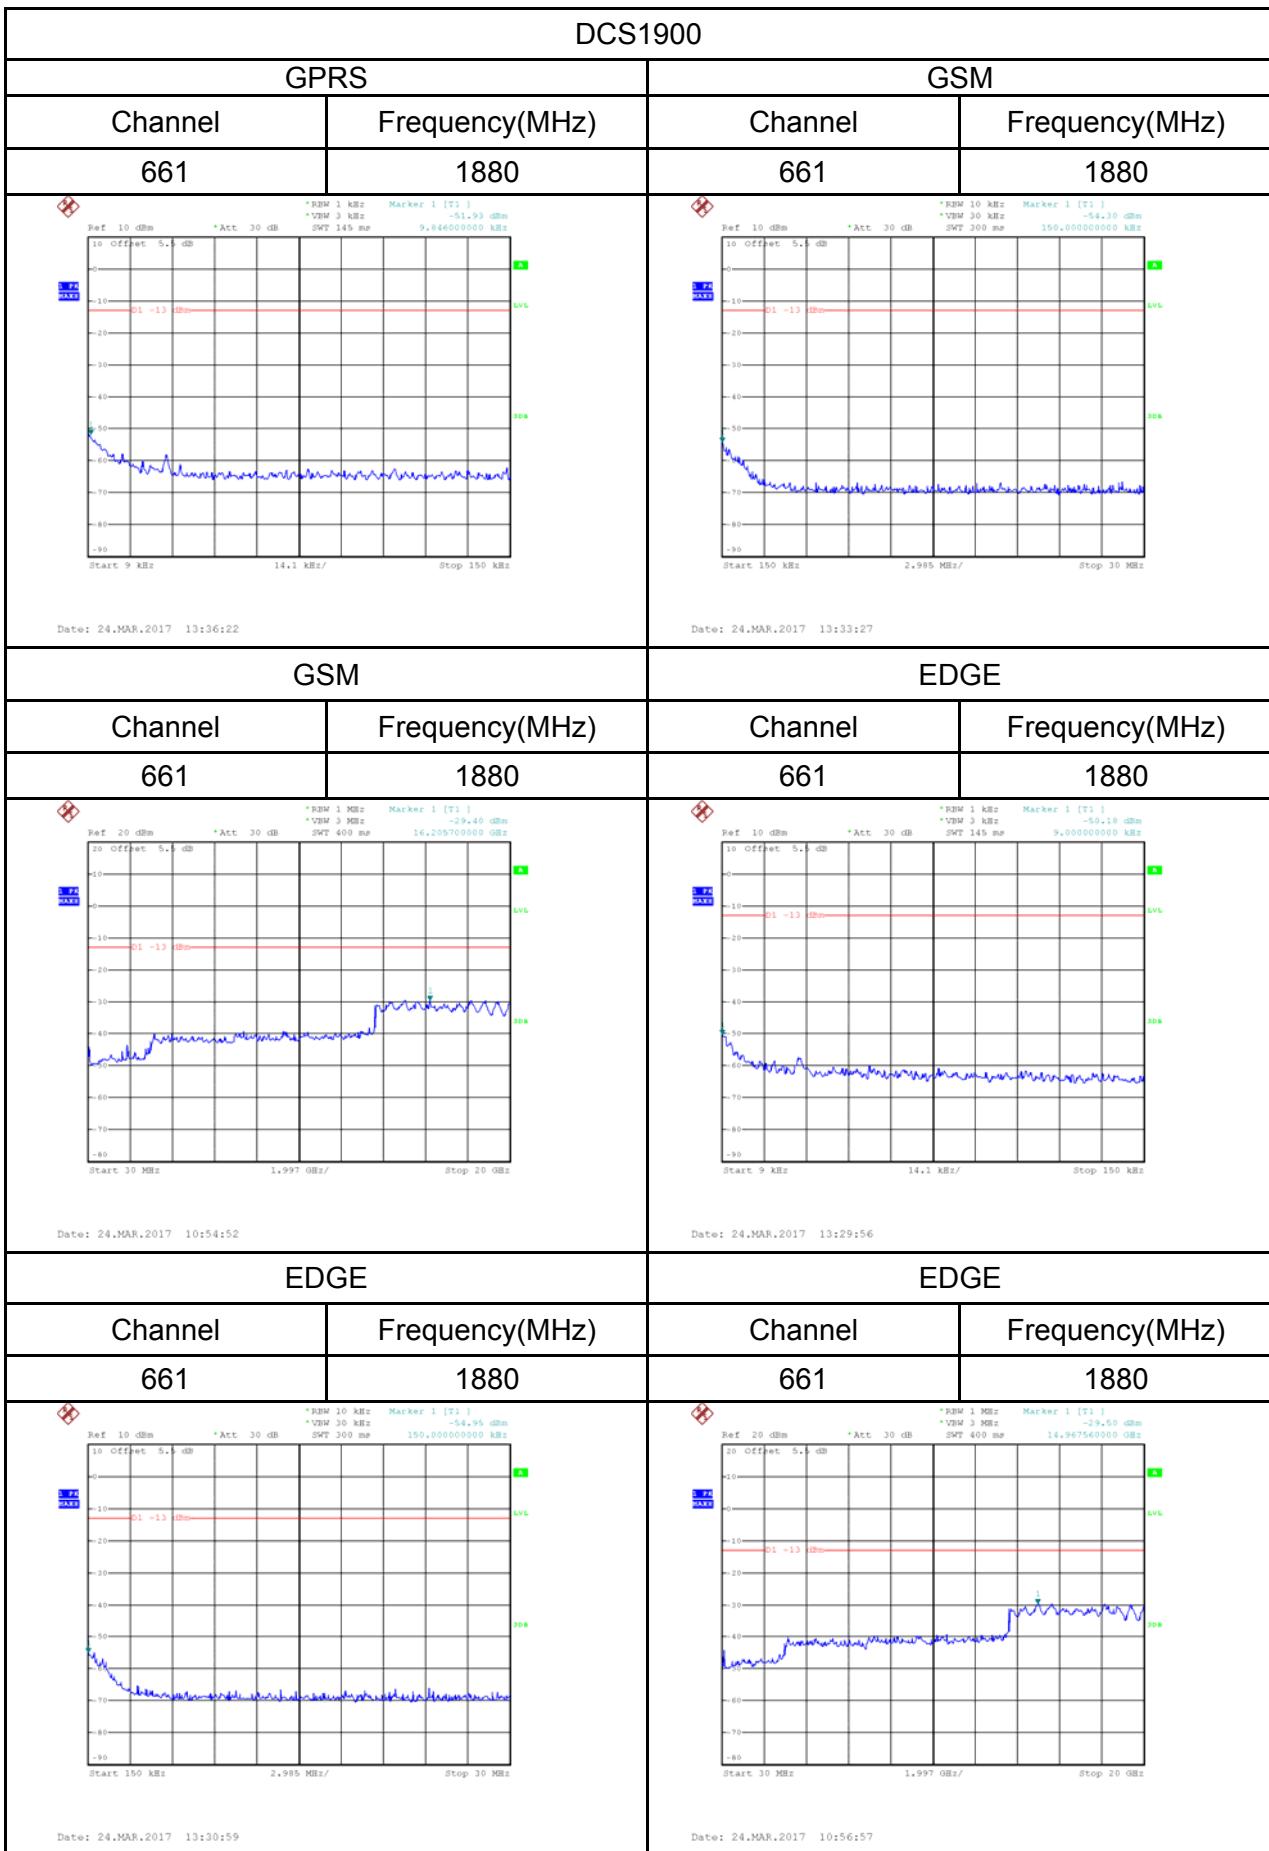

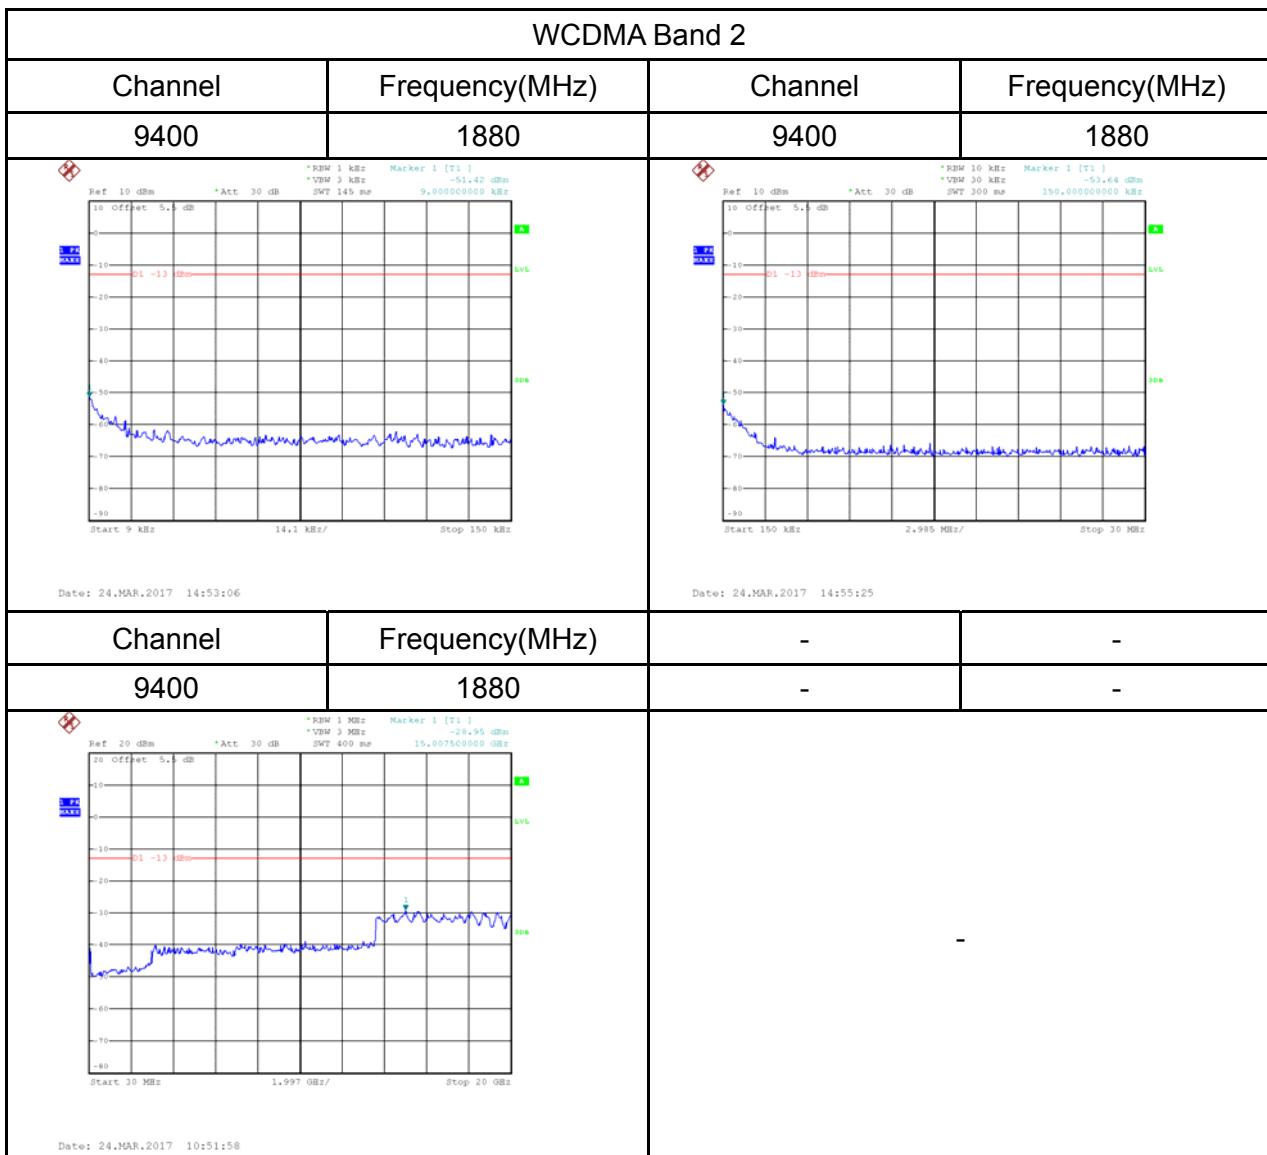


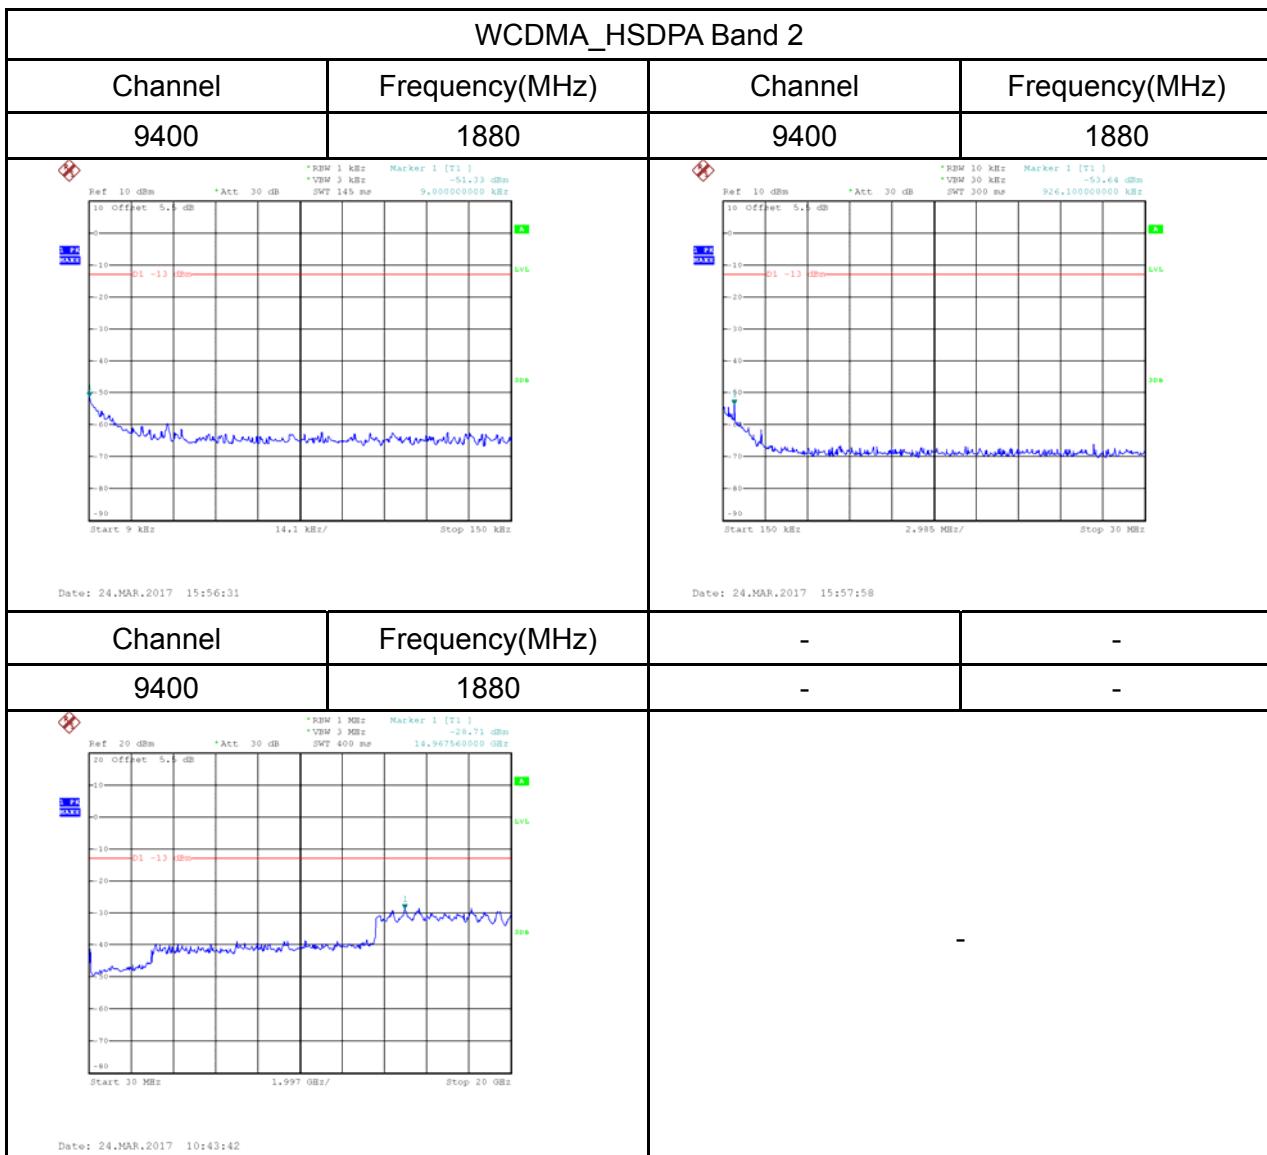

ATTACHMENT D - RADIATED EMISSION

Test Mode: TX Mode


Ant 0°

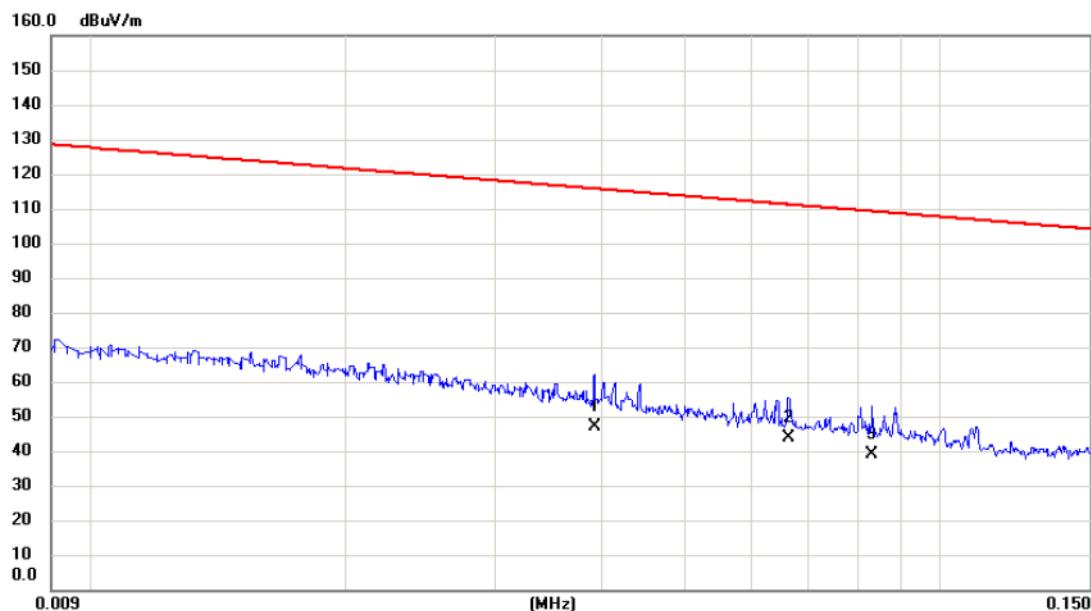

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		0.0393	26.03	21.14	47.17	115.72	-68.55	AVG	
2	*	0.0663	24.06	19.63	43.69	111.17	-67.48	AVG	
3		0.0831	20.03	19.17	39.20	109.21	-70.01	AVG	

Test Mode: TX Mode


Ant 0°

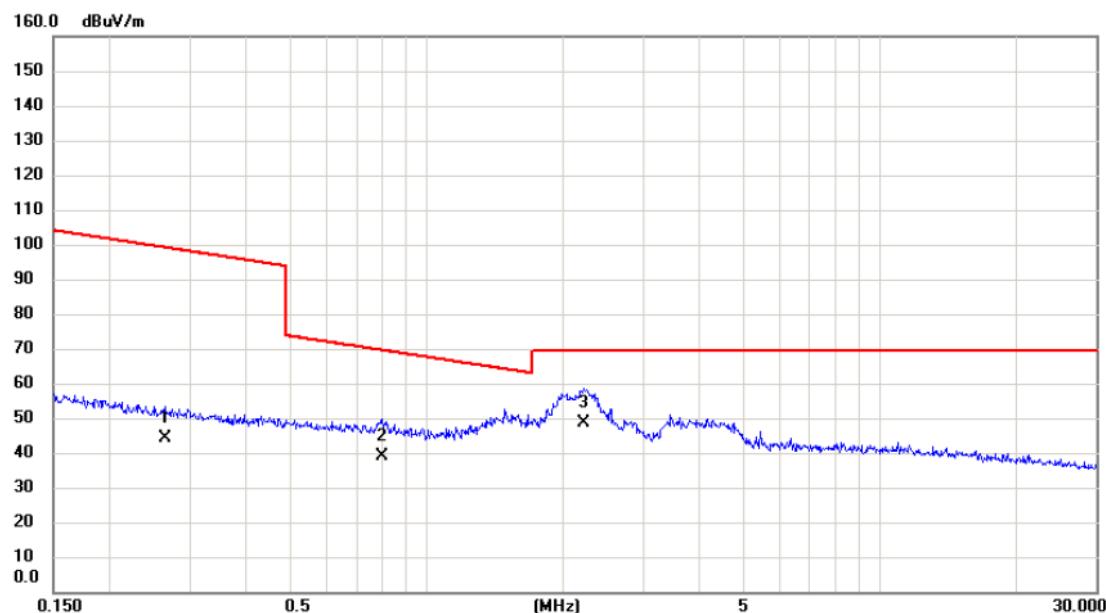

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1		0.2644	25.60	18.63	44.23	99.16	-54.93	AVG
2		0.7960	20.70	18.33	39.03	69.59	-30.56	QP
3	*	2.2250	31.06	17.62	48.68	69.54	-20.86	QP

Test Mode: TX Mode


Ant 90°

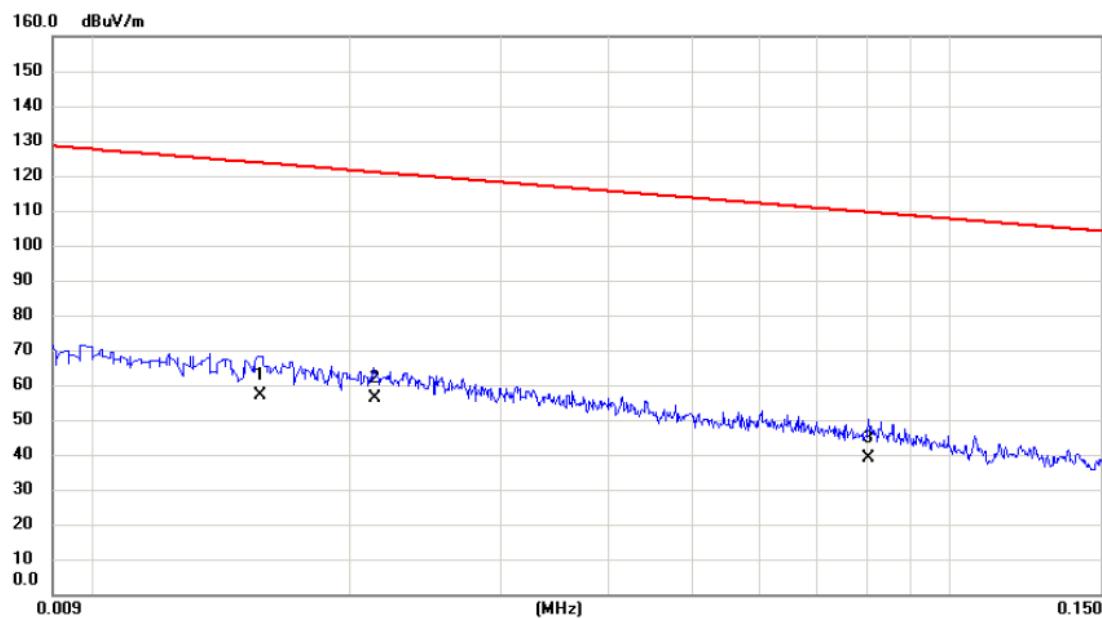

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		0.0157	33.39	23.78	57.17	123.69	-66.52	AVG	
2	*	0.0214	32.79	23.35	56.14	121.00	-64.86	AVG	
3		0.0803	19.60	19.30	38.90	109.51	-70.61	AVG	


Test Mode: TX Mode

Ant 90°

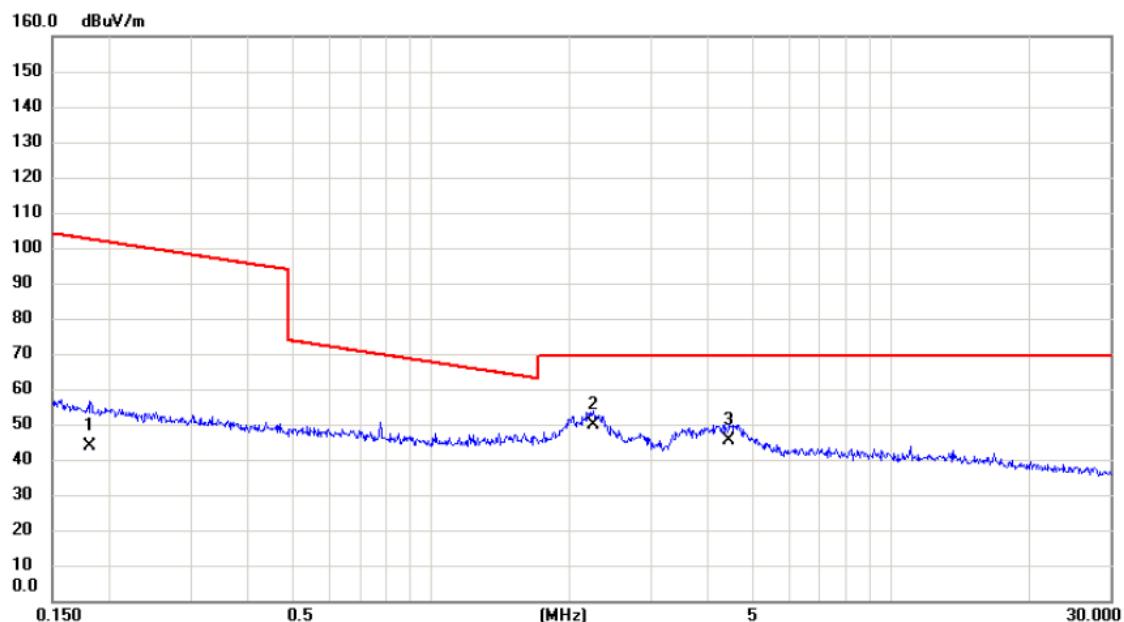


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1		0.1815	24.90	18.71	43.61	102.43	-58.82	AVG
2	*	2.2486	32.11	17.59	49.70	69.54	-19.84	QP
3		4.4305	27.50	17.87	45.37	69.54	-24.17	QP

Test Mode: DCS1900_TX CH512_GSM

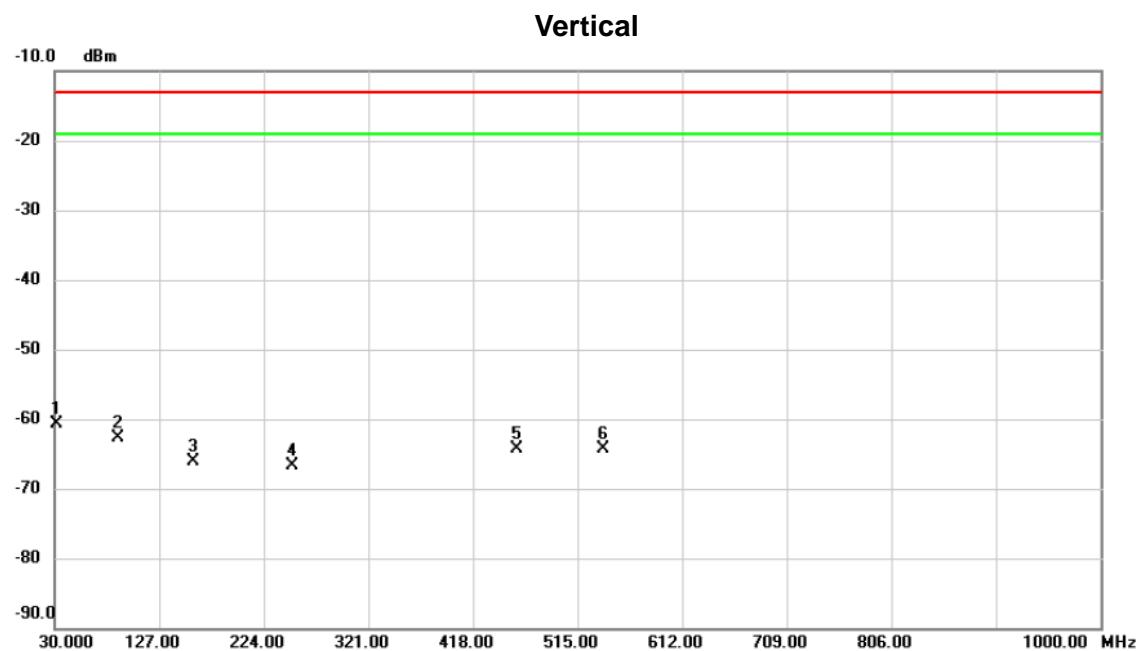

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	31.940	-60.05	-0.73	-60.78	-13.00	-47.78	peak	
2		89.170	-58.07	-4.58	-62.65	-13.00	-49.65	peak	
3		158.040	-69.36	3.17	-66.19	-13.00	-53.19	peak	
4		250.190	-66.83	0.16	-66.67	-13.00	-53.67	peak	
5		458.740	-70.04	5.77	-64.27	-13.00	-51.27	peak	
6		538.280	-71.86	7.47	-64.39	-13.00	-51.39	peak	


Test Mode: DCS1900_TX CH512_GSM

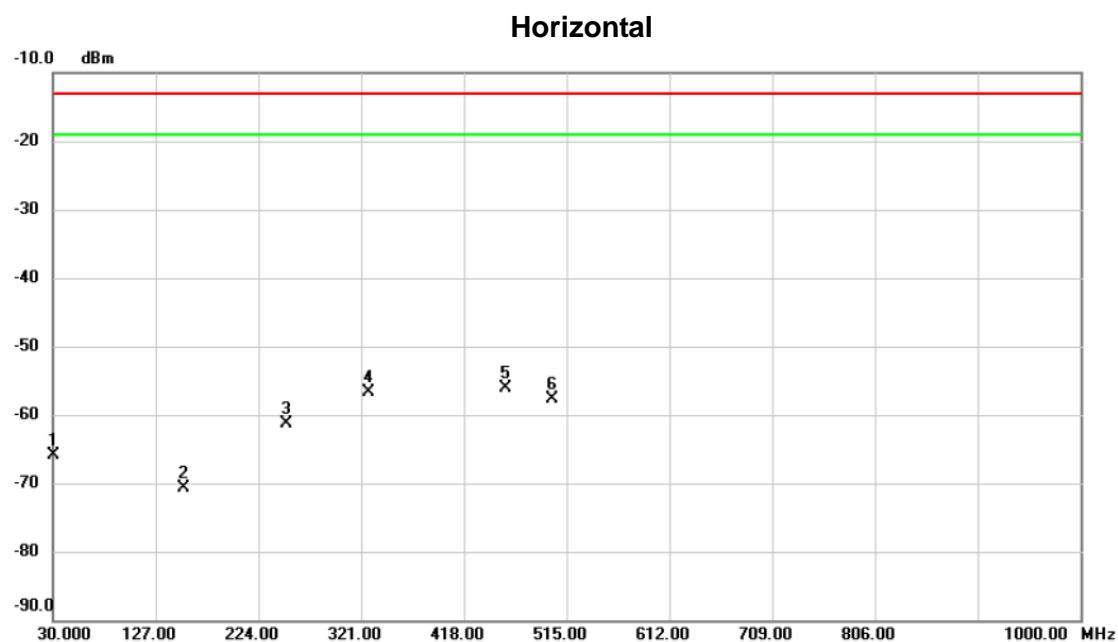

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		30.000	-67.78	1.88	-65.90	-13.00	-52.90	peak	
2		153.190	-74.46	3.76	-70.70	-13.00	-57.70	peak	
3		250.190	-63.09	1.87	-61.22	-13.00	-48.22	peak	
4		327.790	-59.14	2.38	-56.76	-13.00	-43.76	peak	
5	*	456.800	-61.58	5.52	-56.06	-13.00	-43.06	peak	
6		501.420	-65.85	8.06	-57.79	-13.00	-44.79	peak	

Test Mode: DCS1900_TX CH512_GSM


Vertical

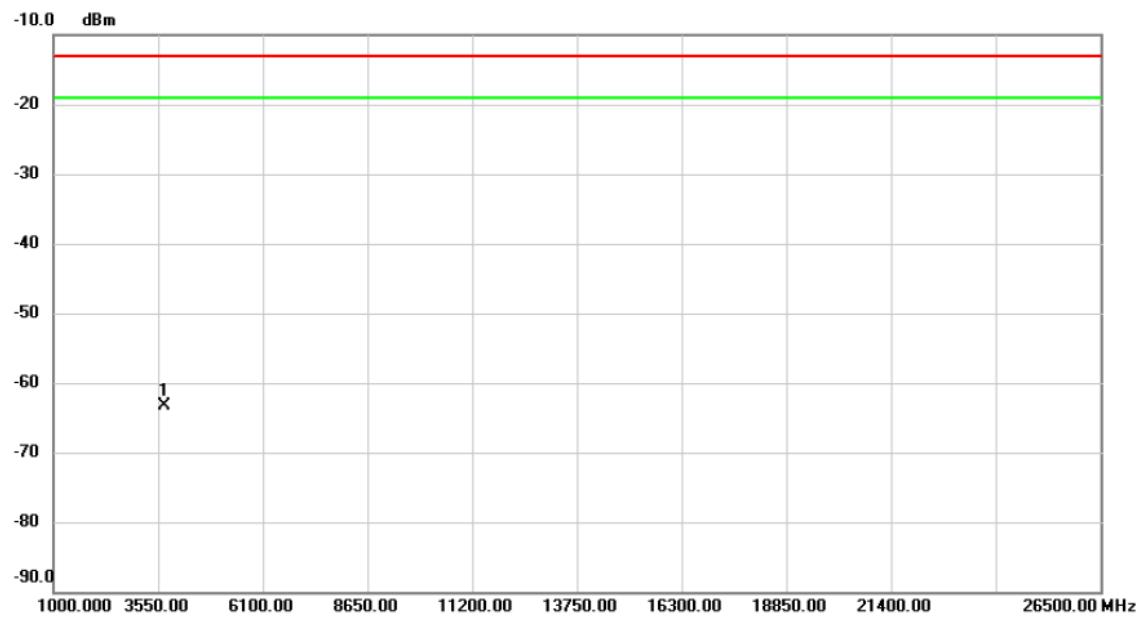

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBm	dB	dBm	dBm	dB	Detector Comment
1	*	3703.768	-77.68	14.46	-63.22	-13.00	-50.22	peak


Test Mode: DCS1900_TX CH512_GSM

Horizontal

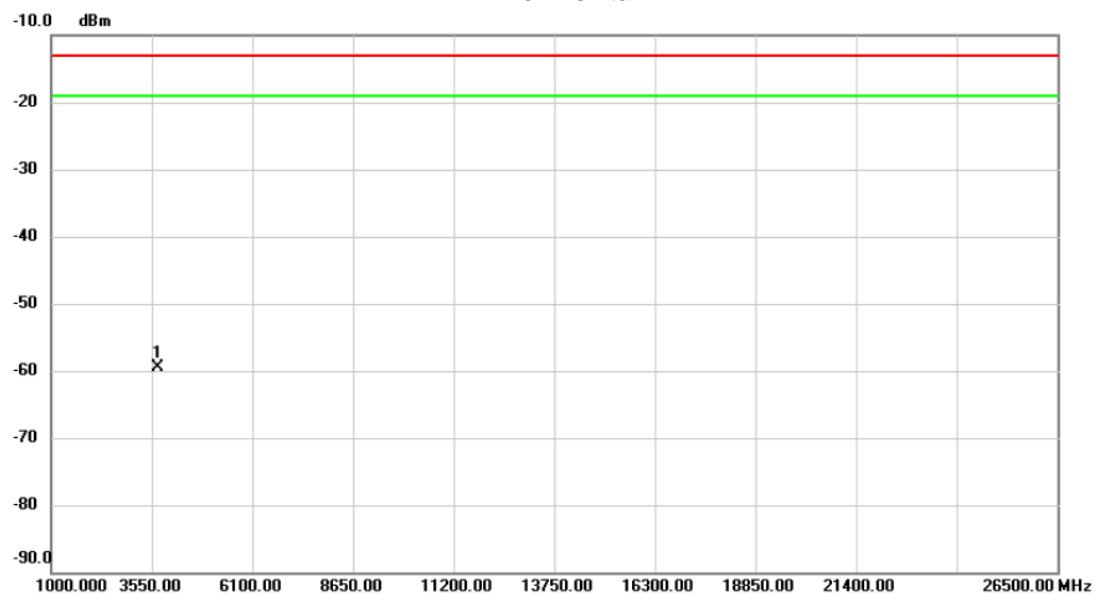


No.	Mk.	Reading Freq. MHz	Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3702.278	-70.65	11.18	-59.47	-13.00	-46.47	peak	

Test Mode: DCS1900_TX CH512_EDGE

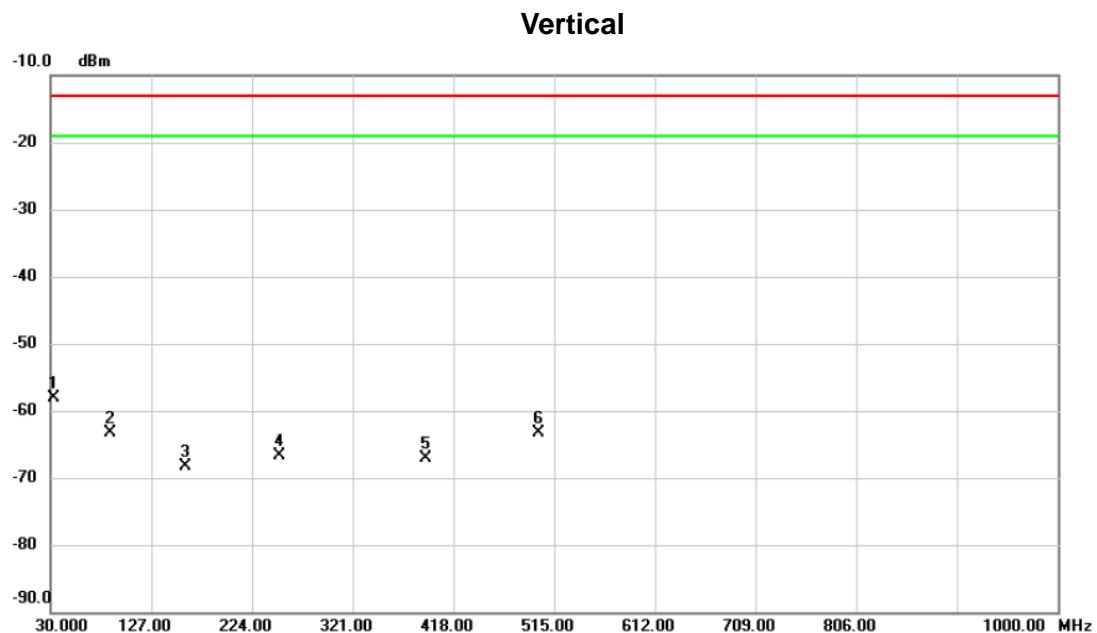

No. Mk.	Freq. MHz	Reading Level	Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		dBm	dB	dBm	dB			
1 *	32.910	-57.14	-0.96	-58.10	-13.00	-45.10	peak	
2	87.230	-57.90	-5.46	-63.36	-13.00	-50.36	peak	
3	159.980	-71.57	3.18	-68.39	-13.00	-55.39	peak	
4	250.190	-66.86	0.16	-66.70	-13.00	-53.70	peak	
5	391.810	-71.00	4.00	-67.00	-13.00	-54.00	peak	
6	500.450	-70.92	7.55	-63.37	-13.00	-50.37	peak	


Test Mode: DCS1900_TX CH512_EDGE

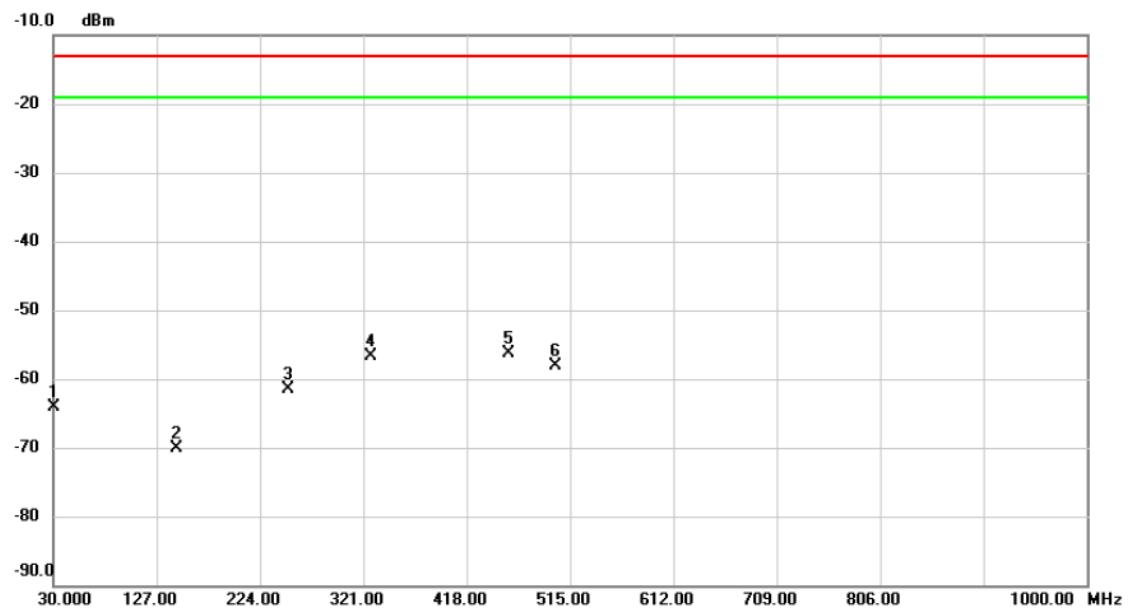Horizontal

No. Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	30.000	-65.92	1.88	-64.04	-13.00	-51.04	peak	
2	145.430	-73.75	3.73	-70.02	-13.00	-57.02	peak	
3	250.190	-63.32	1.87	-61.45	-13.00	-48.45	peak	
4	327.790	-59.02	2.38	-56.64	-13.00	-43.64	peak	
5 *	456.800	-61.75	5.52	-56.23	-13.00	-43.23	peak	
6	501.420	-66.07	8.06	-58.01	-13.00	-45.01	peak	

Test Mode: DCS1900_TX CH512_EDGE


Vertical

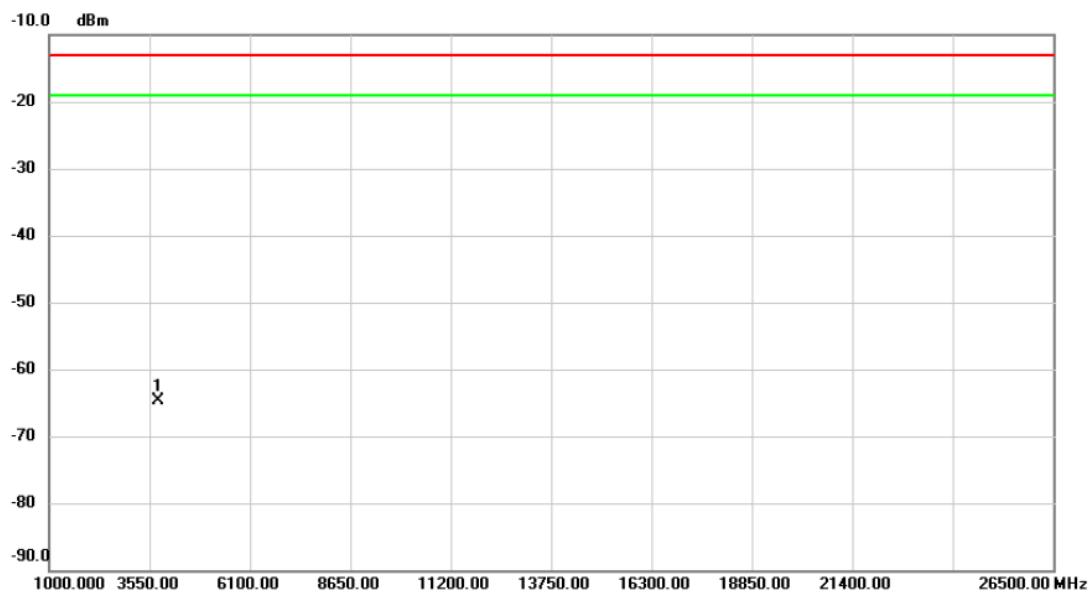

No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	3764.538	-79.29	14.51	-64.78	-13.00	-51.78	peak	


Test Mode: DCS1900_TX CH512_EDGE

Horizontal

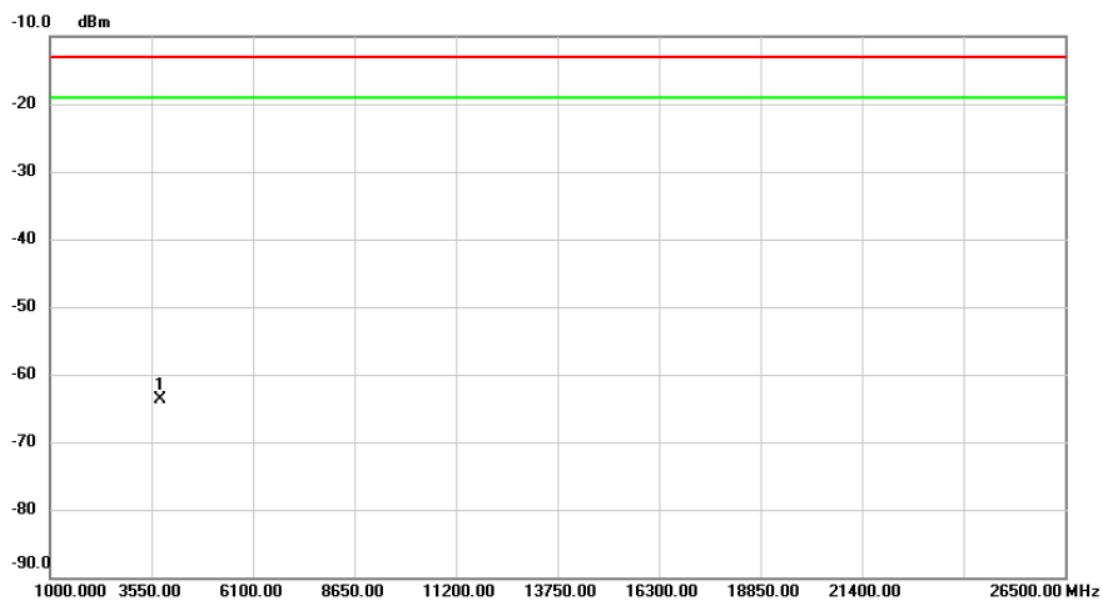


No.	Mk.	Reading		Correct Factor	Measure- ment	Limit	Margin	
		Freq.	Level					
		MHz	dBm	dB	dBm	dB	Detector	Comment
1	*	3763.860	-75.05	11.35	-63.70	-13.00	-50.70	peak

Test Mode: WCDMA Band II_TX CH9400

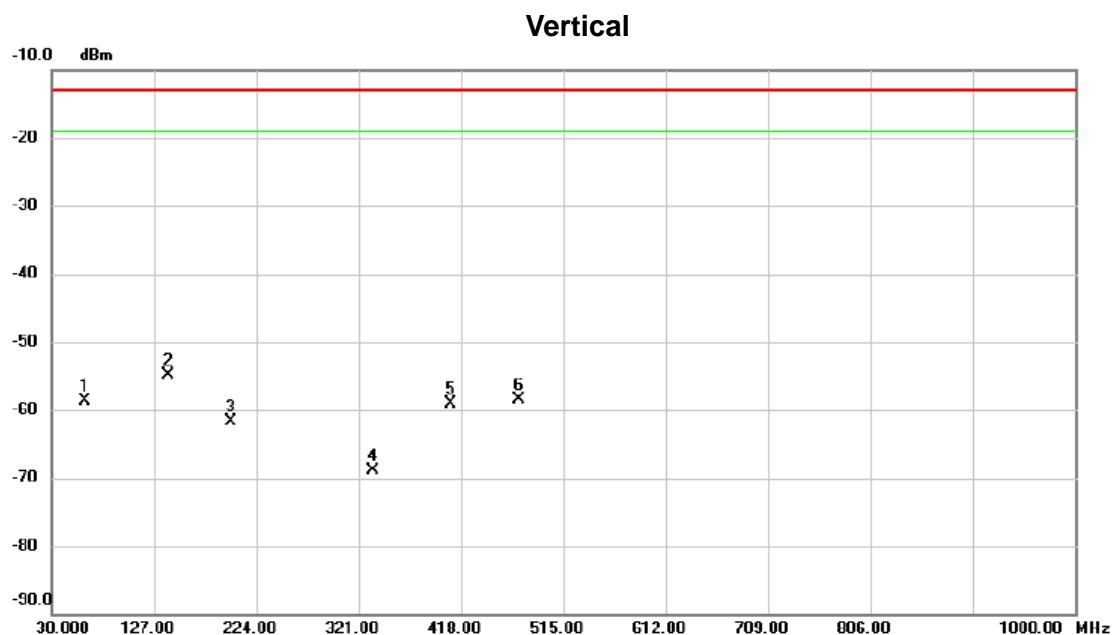

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBm	dB	dBm	dBm	dB	Detector Comment
1		61.040	-59.38	0.60	-58.78	-13.00	-45.78	peak
2	*	140.580	-57.16	2.21	-54.95	-13.00	-41.95	peak
3		199.750	-59.49	-2.30	-61.79	-13.00	-48.79	peak
4		334.580	-70.24	1.36	-68.88	-13.00	-55.88	peak
5		408.300	-63.43	4.33	-59.10	-13.00	-46.10	peak
6		472.320	-64.72	6.18	-58.54	-13.00	-45.54	peak


Test Mode: WCDMA Band II_TX CH9400

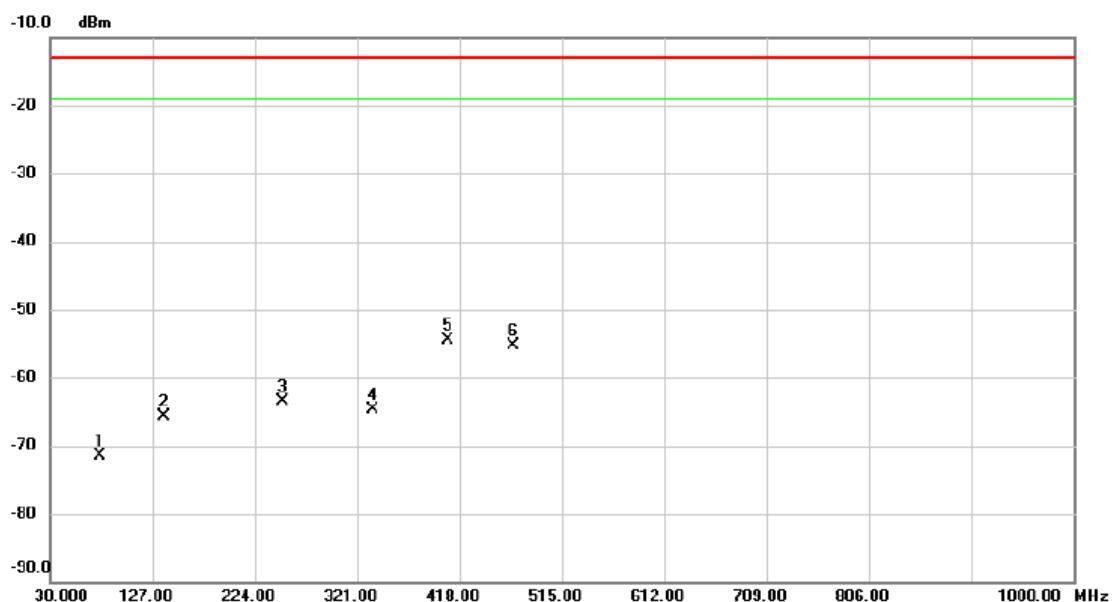Horizontal

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBm	dB	dBm	dBm	dB		
1		76.560	-64.24	-7.19	-71.43	-13.00	-58.43	peak	
2		138.640	-68.41	2.61	-65.80	-13.00	-52.80	peak	
3		250.190	-65.45	1.87	-63.58	-13.00	-50.58	peak	
4		335.550	-67.17	2.48	-64.69	-13.00	-51.69	peak	
5 *		407.330	-60.72	6.25	-54.47	-13.00	-41.47	peak	
6		469.410	-61.39	6.13	-55.26	-13.00	-42.26	peak	

Test Mode: WCDMA Band II_TX CH9400


Vertical

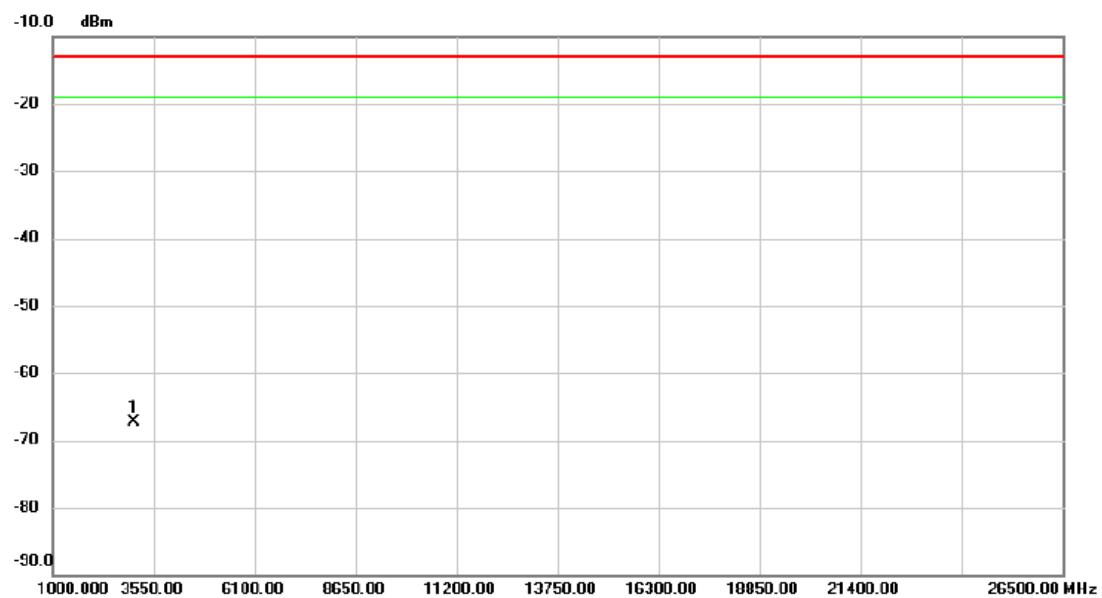

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBm	dB	dBm	dB	Detector	Comment
1	*	3041.900	-79.99	12.60	-67.39	-13.00	-54.39	peak


Test Mode: WCDMA Band II_TX CH9400

Horizontal

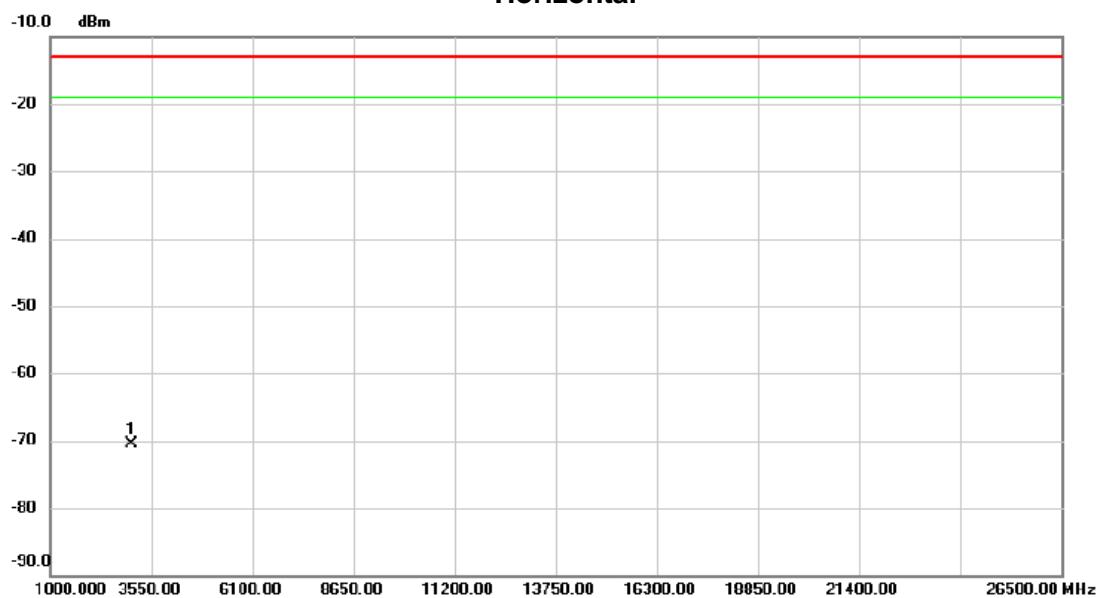


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	3047.000	-79.46	8.89	-70.57	-13.00	-57.57	peak	

Test Mode: WCDMA Band II_HSDPA_TX CH9400

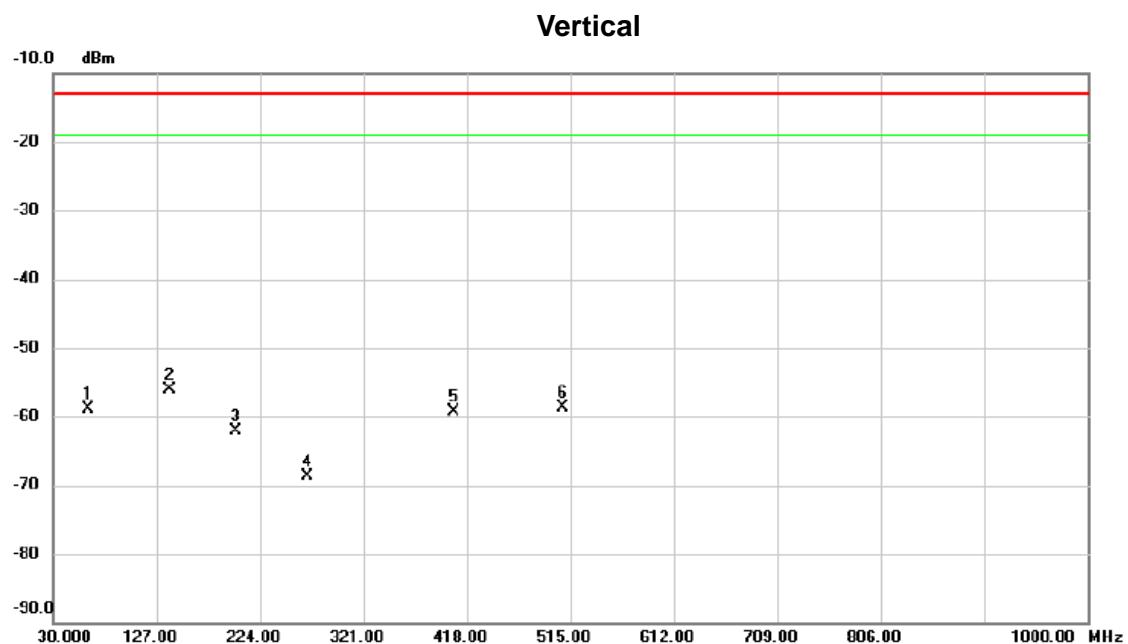


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBm	dB	dBm	dBm	dB		
1		62.980	-59.76	0.85	-58.91	-13.00	-45.91	peak	
2 *		139.610	-58.17	2.04	-56.13	-13.00	-43.13	peak	
3		200.720	-59.80	-2.32	-62.12	-13.00	-49.12	peak	
4		268.620	-70.75	1.99	-68.76	-13.00	-55.76	peak	
5		405.390	-63.51	4.26	-59.25	-13.00	-46.25	peak	
6		508.210	-66.21	7.53	-58.68	-13.00	-45.68	peak	

Test Mode: WCDMA Band II_HSDPA_TX CH9400

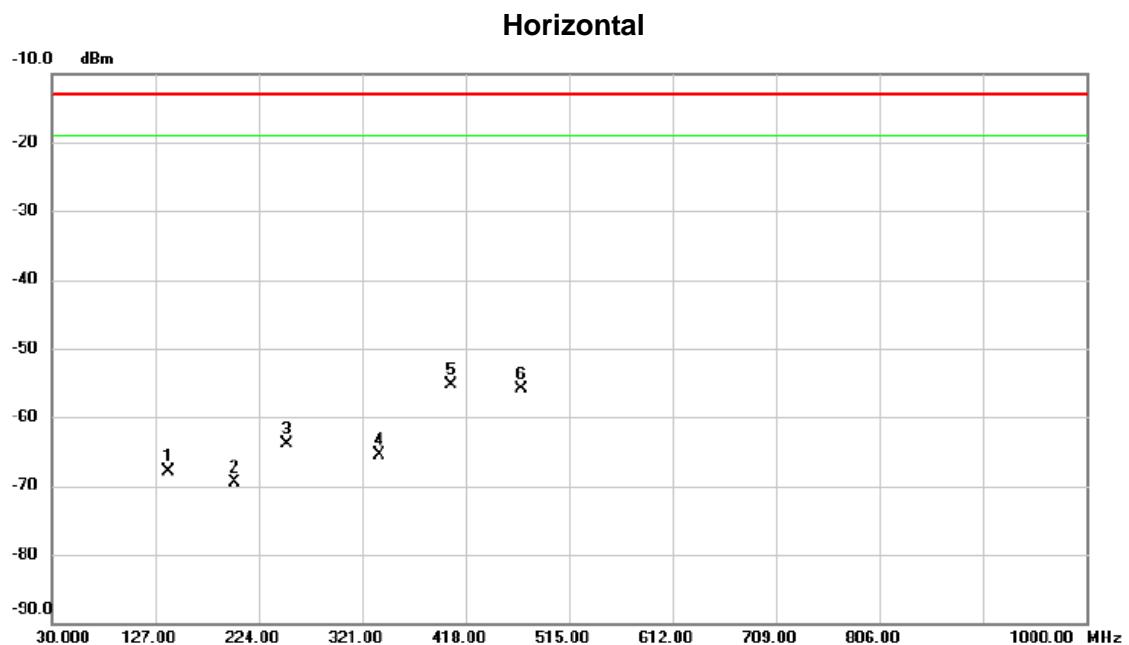

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBm	dB	dBm	dBm	dB		
1		139.610	-70.79	2.98	-67.81	-13.00	-54.81	peak	
2		200.720	-67.59	-1.91	-69.50	-13.00	-56.50	peak	
3		250.190	-65.74	1.87	-63.87	-13.00	-50.87	peak	
4		337.490	-68.00	2.50	-65.50	-13.00	-52.50	peak	
5	*	404.420	-61.32	6.10	-55.22	-13.00	-42.22	peak	
6		470.380	-62.00	6.17	-55.83	-13.00	-42.83	peak	


Test Mode: WCDMA Band II_HSDPA_TX CH9400

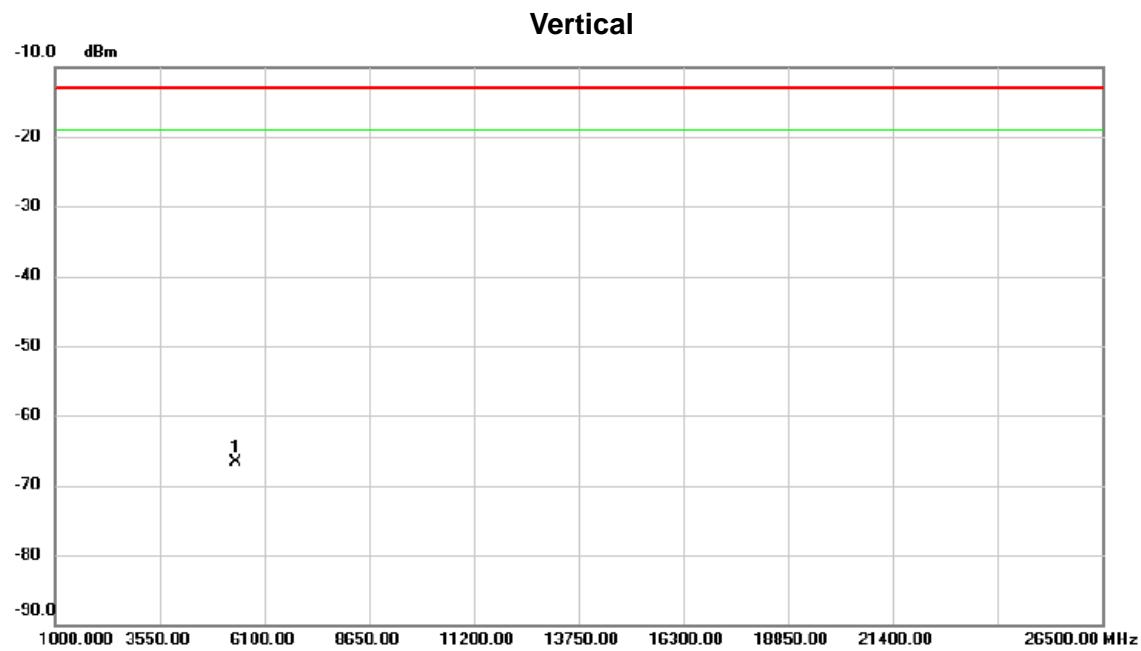

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBm	dB	dBm	dB	Detector	Comment
1	*	5390.820	-82.52	15.74	-66.78	-13.00	-53.78	peak


Test Mode: WCDMA Band II_HSDPA_TX CH9400



Horizontal

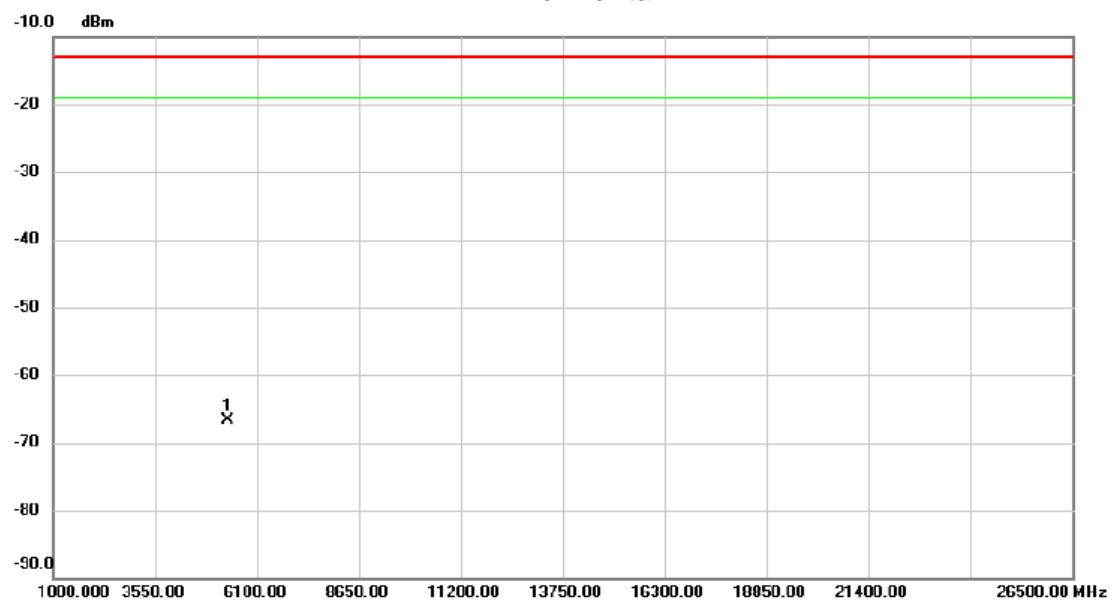

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBm	dB	dBm	dB	Detector	Comment
1	*	5384.860	-82.85	16.15	-66.70	-13.00	-53.70	peak


ATTACHMENT E - BAND EDGE

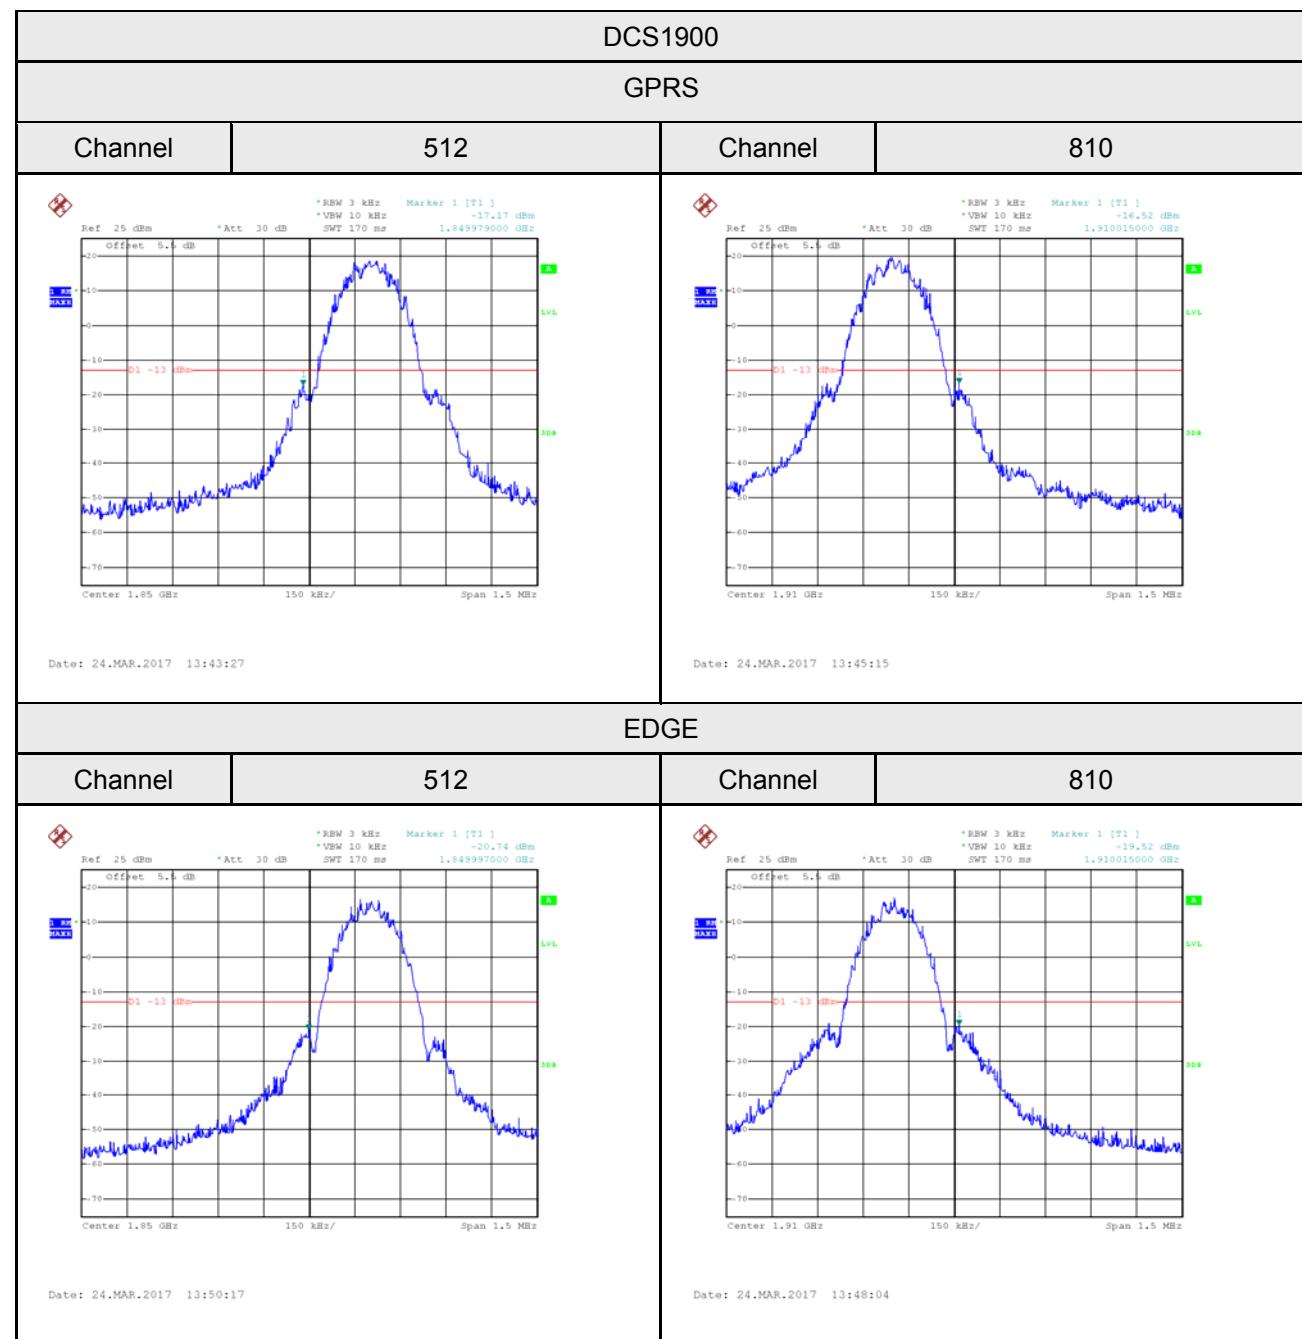

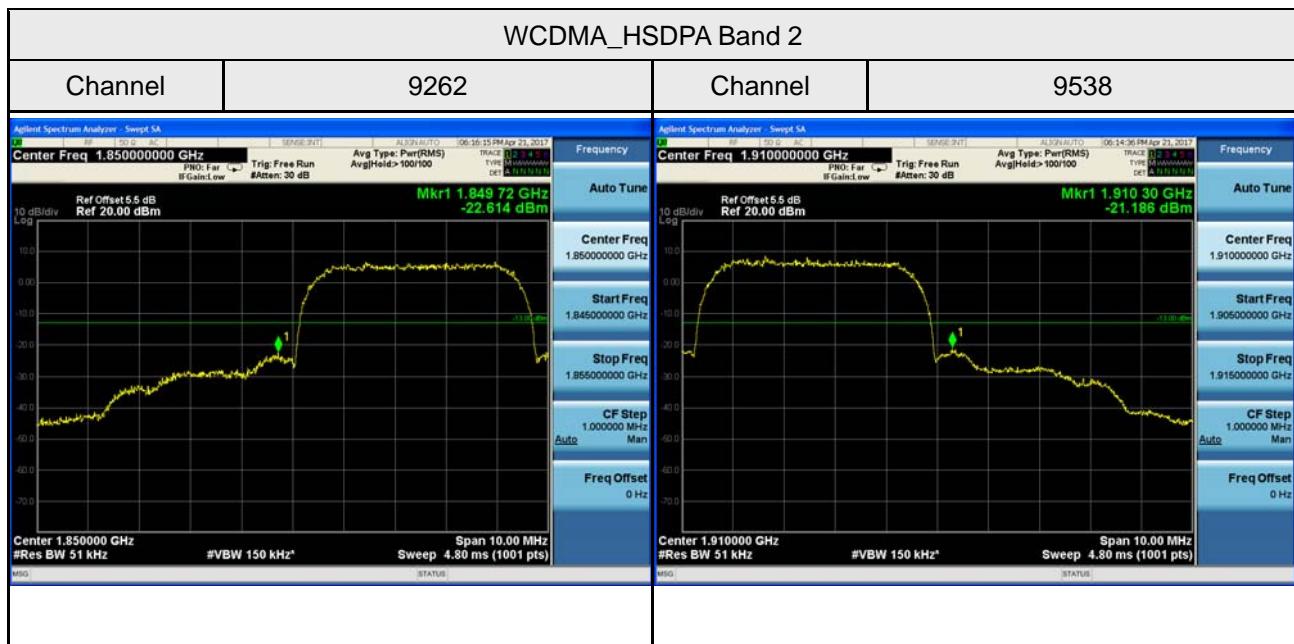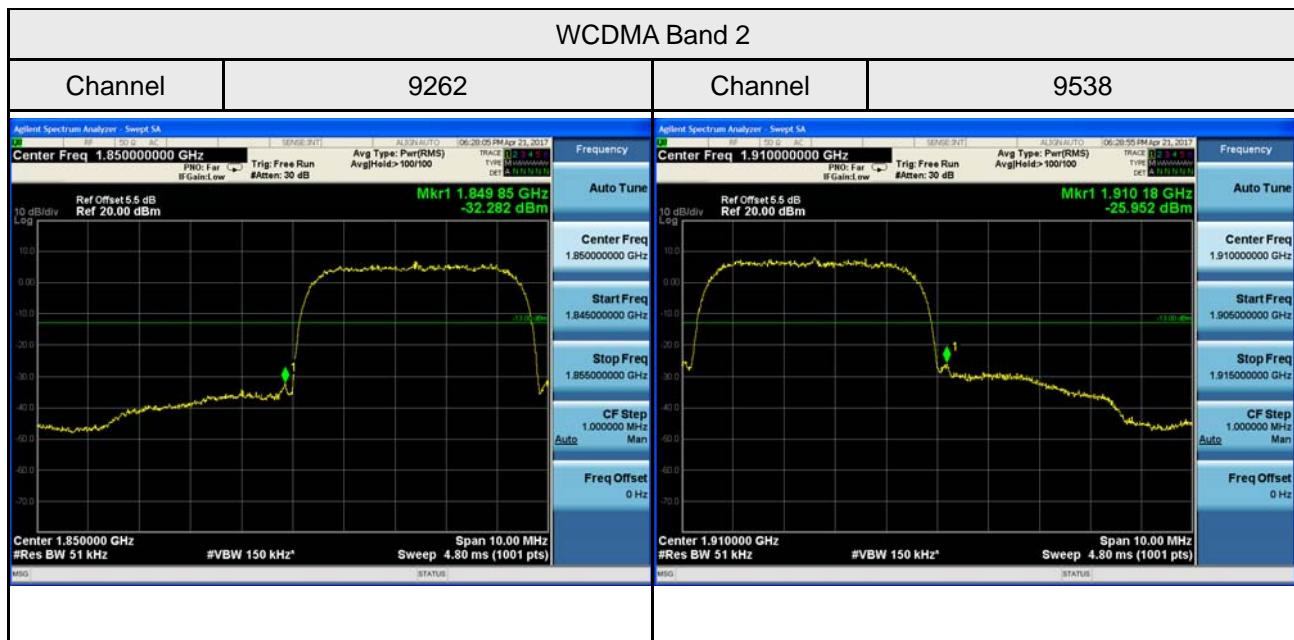

ATTACHMENT F - PEAK TO AVERAGE RATIO

DCS1900 Spectrum Plot

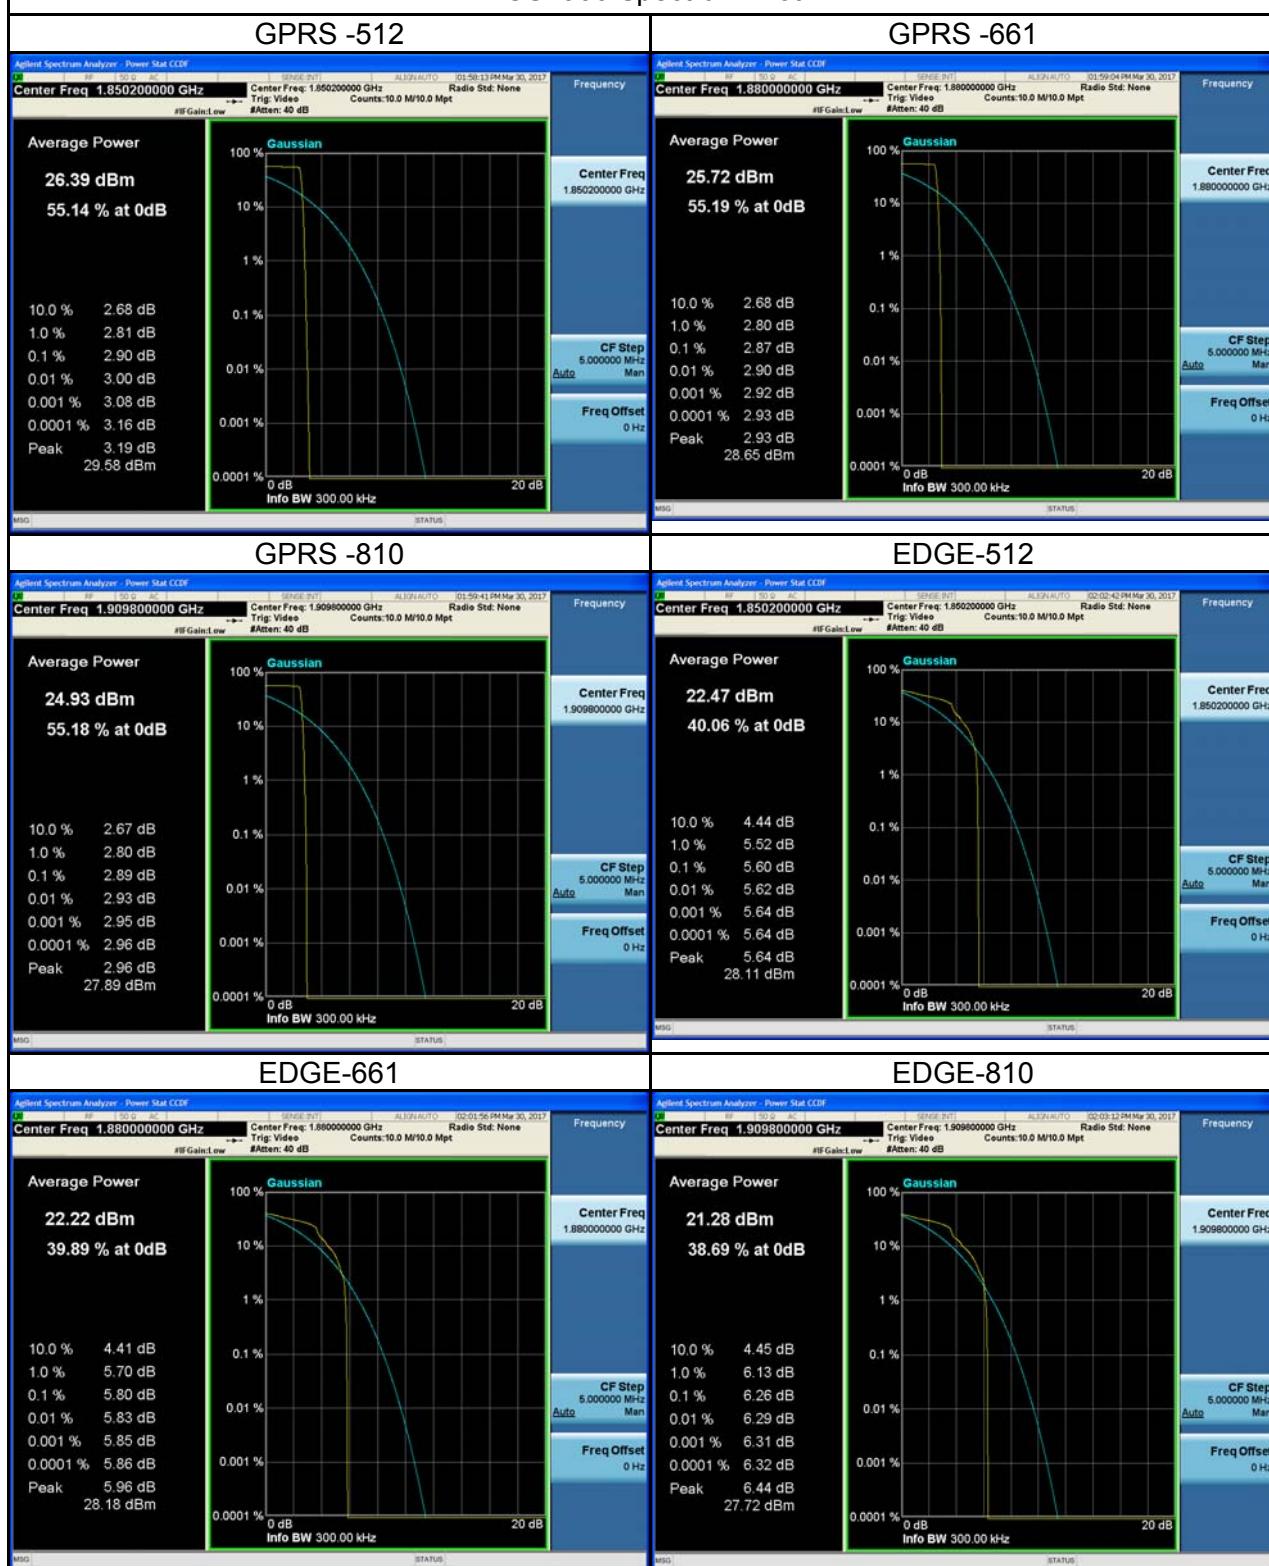

WCDMA Band 2 Spectrum Plot

9262




9400



9538



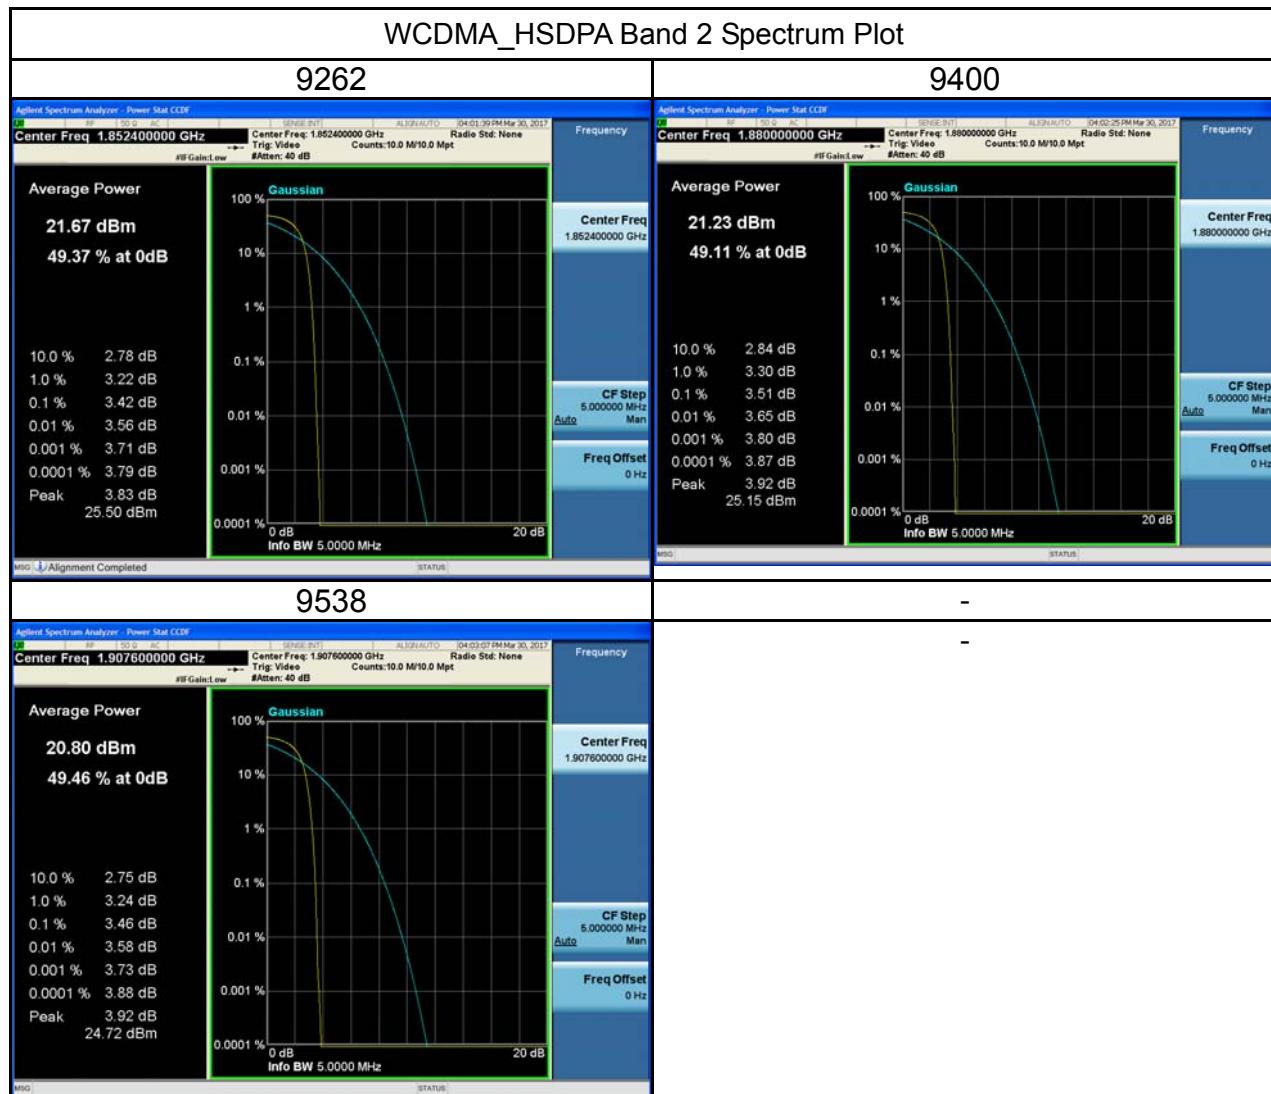

ATTACHMENT G - FREQUENCY STABILITY

Test Mode: DCS1900_CH661

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-20	4.15	0.002243001	2.5
-10	4.92	0.002659172	2.5
0	7.91	0.004275213	2.5
10	5.49	0.002967247	2.5
20	6.76	0.003653659	2.5
30	7.88	0.004258999	2.5
40	6.27	0.003388823	2.5
50	5.24	0.002832126	2.5
60	8.43	0.004556264	2.5
Max. Deviation (ppm)	8.43	0.004556264	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
Low	4.1	0.002215977	2.5
Middle	3.86	0.002086261	2.5
High	4.52	0.002442979	2.5
Max. Deviation (ppm)	4.52	0.002442979	2.5

Test Mode:	WCDMA Band 2_CH9400
------------	---------------------

Temperature vs. Frequency Stability

Temperature(°C)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
-20	8.34	0.009971306	2.5
-10	7.43	0.008883309	2.5
0	8.44	0.010090866	2.5
10	7.54	0.009014825	2.5
20	8.93	0.01067671	2.5
30	7.29	0.008715925	2.5
40	7.98	0.00954089	2.5
50	6.66	0.007962697	2.5
60	8.27	0.009887614	2.5
Max. Deviation (ppm)	8.93	0.01067671	2.5

Voltage vs. Frequency Stability

Voltage(Volts)	Frequency Error (Hz)	Frequency Error (ppm)	Limit(ppm)
Low	9.27	0.011083214	2.5
Middle	7.54	0.009014825	2.5
High	8.81	0.010533238	2.5
Max. Deviation (ppm)	9.27	0.011083214	2.5