

Report No. ATT-2016SZ1219182F - Page 53 of 84 -

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

FCC Part15 (15.247) , Subpart C					
Section	Test Item	Limit	Frequency Range (MHz)	Result	
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS	


4.1.1 TEST PROCEDURE

- 1. Set analyzer center frequency to DTS channel center frequency.
- 2. Set the span to 1.5 times DTS bandwith.
- 3. Set the RBW ≥ 3 kHz.
- 4. Set the VBW \geq 3 x RBW.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.



Report No. ATT-2016SZ1219182F - Page 54 of 84 -


4.1.5 TEST RESULTS

EUT:	Wi-Fi Multi-function Socket	Model Name :	WP40
Temperature:	25 ℃	Relative Humidity:	56%
Pressure :	1015 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX b Mode /CH01, CH06, CH1	1	

Note: The relevant measured result has the offset with cable loss already.

Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-15.63	8	PASS
2437 MHz	-15.01	8	PASS
2462 MHz	-14.66	8	PASS

TX CH01

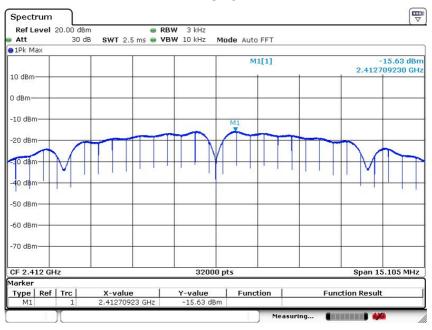


Date: 17 M AR 2017 11:02:33




Report No. ATT-2016SZ1219182F - Page 55 of 84 -

TX CH06

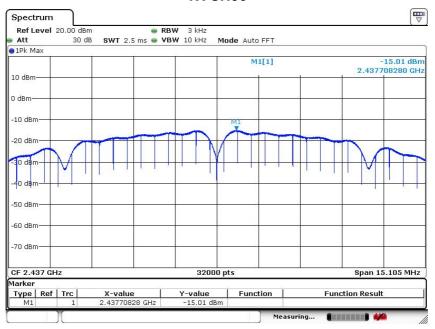

Date: 17 M AR 2017 11:02:52

TX CH11

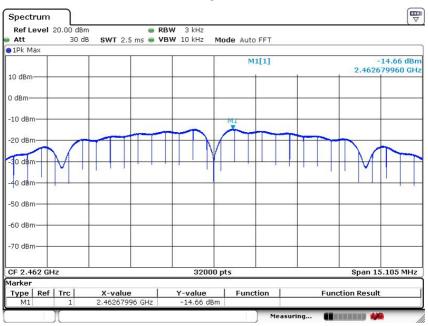

Date: 17 M AR .2017 11:03:15




Report No. ATT-2016SZ1219182F - Page 56 of 84 -

EUT:	Wi-Fi Multi-function Socket	Model Name :	WP40
Temperature:	25 ℃	Relative Humidity:	56%
Pressure :	1015 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX g Mode /CH01, CH06, CH1	1	

Note: The relevant measured result has the offset with cable loss already.

Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-17.00	8	PASS
2437 MHz	-16.65	8	PASS
2462 MHz	-16.33	8	PASS

TX CH01

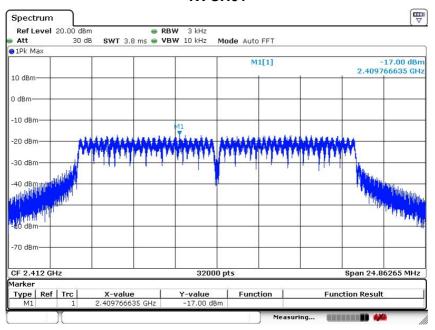


Date: 17 M AR 2017 10:54:11




Report No. ATT-2016SZ1219182F - Page 57 of 84 -

TX CH06

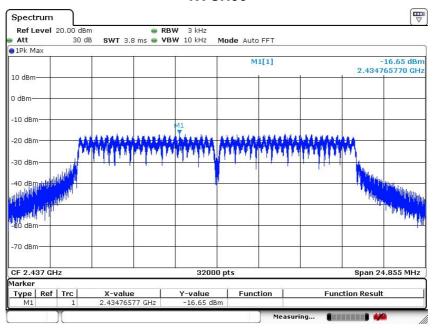

Date:17 M AR 2017 10:53:43

TX CH11

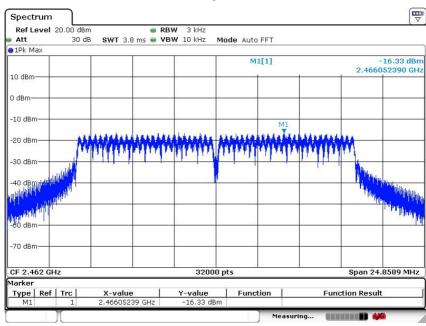

Date:17 M AR 2017 10:53:17




Report No. ATT-2016SZ1219182F - Page 58 of 84 -

EUT:	Wi-Fi Multi-function Socket	Model Name :	WP40	
Temperature:	25 ℃	Relative Humidity:	56%	
Pressure:	1015 hPa	Test Voltage :	AC 120V/60Hz	
Test Mode :	TX n(HT20) Mode /CH01, CH06, CH11			

Note: The relevant measured result has the offset with cable loss already.

Frequency	Power Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2412 MHz	-16.69	8	PASS
2437 MHz	-16.19	8	PASS
2462 MHz	-15.68	8	PASS

TX CH01

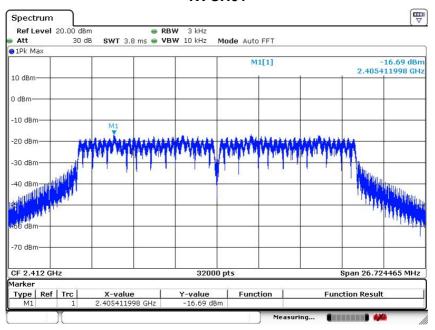


Date: 17 M AR 2017 10:51:00




Report No. ATT-2016SZ1219182F - Page 59 of 84 -

TX CH06

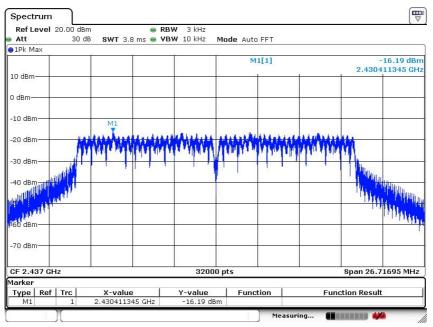

Date: 17 M AR .2017 10:51:53

TX CH11

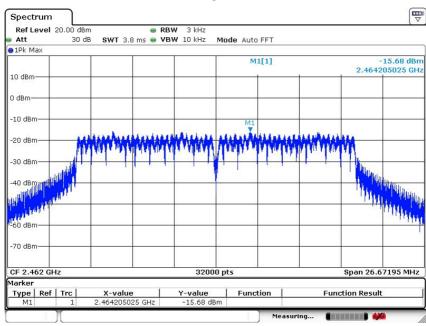

Date:17 M AR 2017 10:52:30



Report No. ATT-2016SZ1219182F - Page 60 of 84 -

5. BANDWIDTH TEST


5.1 APPLIED PROCEDURES / LIMIT

	FCC Part15 (15.247) , Subpart C					
Section Test Item Limit Frequency Range (MHz) Result						
15.247(a)(2)	Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS		

5.1.1 TEST PROCEDURE

According to KDB 558074 D01 DTS Meas Guidance v03r03

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator
- 2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- 3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
- 4. Repeat above procedures until all frequencies measured were complete.



5.1.2 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




Report No. ATT-2016SZ1219182F - Page 61 of 84 -

5.1.3 TEST RESULTS

EUT:	Wi-Fi Multi-function Socket	Model Name :	WP40
Temperature:	25 ℃	Relative Humidity:	56%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX b Mode /CH01, CH06, CH1	1	


Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.070	500	Pass
Middle	2437	10.068	500	Pass
High	2462	10.071	500	Pass

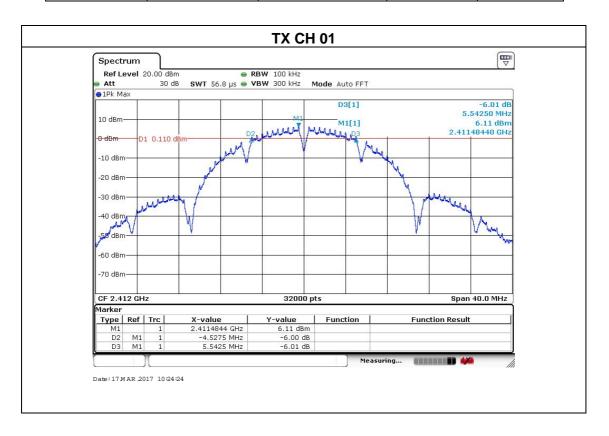

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No. ATT-2016SZ1219182F - Page 62 of 84 -

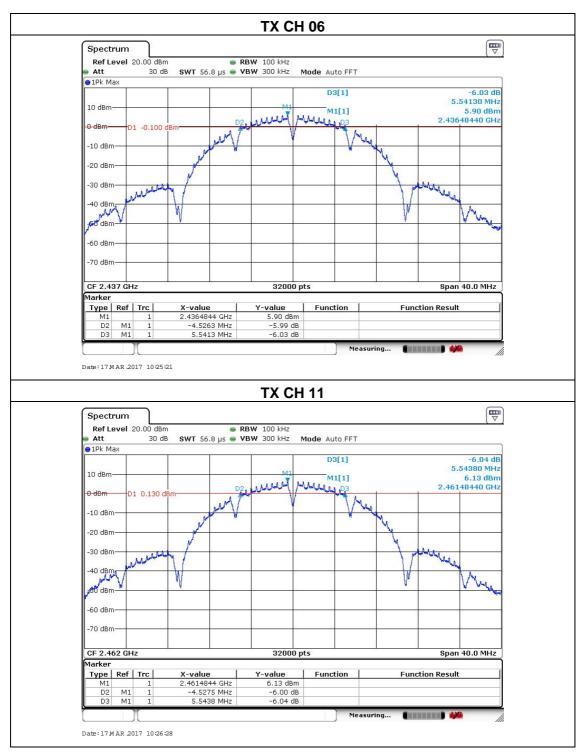




Report No. ATT-2016SZ1219182F - Page 63 of 84 -


EUT:	Wi-Fi Multi-function Socket	Model Name :	WP40
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX g Mode /CH01, CH06, CH1	1	

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.575	500	Pass
Middle	2437	16.570	500	Pass
High	2462	16.573	500	Pass

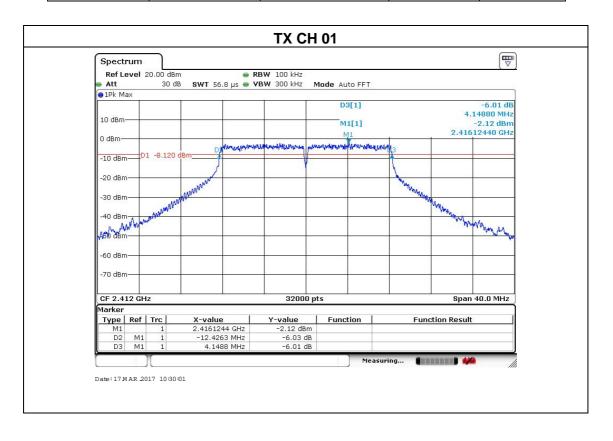



Report No. ATT-2016SZ1219182F - Page 64 of 84 -

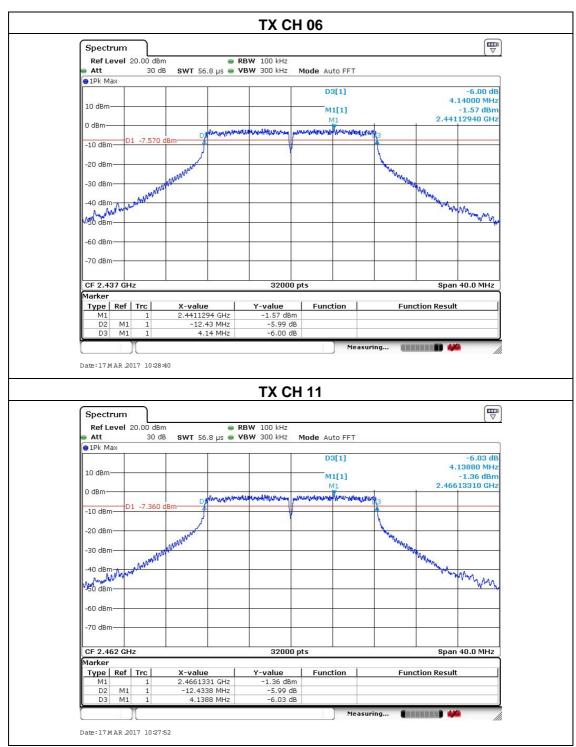



Report No. ATT-2016SZ1219182F - Page 65 of 84 -


EUT:	Wi-Fi Multi-function Socket	Model Name :	WP40	
Temperature:	25 ℃	Relative Humidity:	60%	
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz	
Test Mode :	TX n(HT20) Mode /CH01, CH06, CH11			

Channel	Frequency (MHz)	6dB bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.816	500	Pass
Middle	2437	17.811	500	Pass
High	2462	17.811	500	Pass





Report No. ATT-2016SZ1219182F - Page 66 of 84 -

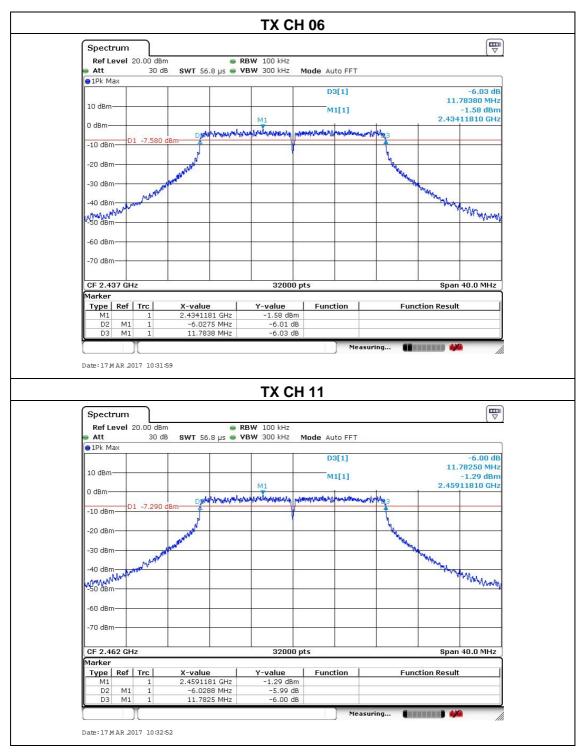



Report No. ATT-2016SZ1219182F - Page 67 of 84 -

6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

1					
	FCC Part15 (15.247) , Subpart C				
Section Test Item Limit		Frequency Range (MHz)			
	15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

a. The EUT was directly connected to the Power meter

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

EUT		POWER	METER
-----	--	-------	-------

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



Report No. ATT-2016SZ1219182F - Page 68 of 84 -

6.1.5 TEST RESULTS

EUT:	Wi-Fi Multi-function Socket	Model Name :	WP40
Temperature:	25 ℃	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	TX b/g/n Mode		

Test Channe	Frequency	Maximum Conducted Output Power(PK)	Max. Tune up Power	LIMIT		
	(MHz)	(dBm) (dBm)		(dBm)		
		802	.11b			
CH01	2412	16.85	17.00	30		
CH06	2437	16.47	17.00	30		
CH11	2462	16.58 17.00		30		
	802.11g					
CH01	CH01 2412 16.27 17.00			30		
CH06	2437	16.38	17.00	30		
CH11	2462	16.55 17.00		30		
	802.11n(HT20)					
CH01	CH01 2412 14.12 15.0		15.00	30		
CH06	2437	14.52	15.00	30		
CH11	2462	14.23	15.00	30		

Note: the highest powers for:

802.11b: 1Mbps 802.11g: 6Mbps

802.11n(HT20):11Mbps



Report No. ATT-2016SZ1219182F - Page 69 of 84 -

7. 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE APPLICABLE STANDARD

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.

7.1 DEVIATION FROM STANDARD

No deviation.

7.2 TEST SETUP



7.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

This document cannot be reproduced except in full, without prior written approval of ATT. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Report No. ATT-2016SZ1219182F - Page 70 of 84 -

7.4 TEST RESULTS


EUT:	Wi-Fi Multi-function Socket	Model Name :	WP40
Temperature:	25 ℃	Relative Humidity:	56%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz

	Meter		Emission				
Frequency	Reading	Factor	Level	Limits	Margin	Detector	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Туре	Comment
			802	.11b			
2390	40.18	9.86	50.04	74	-23.96	Pk	Vertical
2390	29.24	9.86	39.1	54	-14.9	Av	Vertical
2483.5	41.12	10.14	51.26	74	-22.74	Pk	Vertical
2483.5	30.29	10.14	40.43	54	-13.57	Av	Vertical
			802	.11g			
2390	42.35	9.86	52.21	74	-21.79	Pk	Vertical
2390	30.82	9.86	40.68	54	-13.32	Av	Vertical
2483.5	41.12	10.14	51.26	74	-22.74	Pk	Vertical
2483.5	30.56	10.14	40.7	54	-13.3	Av	Vertical
	802.11n(HT20)						
2390	42.33	9.86	52.19	74	-21.81	Pk	Vertical
2390	30.78	9.86	40.64	54	-13.36	Av	Vertical
2483.5	41.65	10.14	51.79	74	-22.21	Pk	Vertical
2483.5	30.59	10.14	40.73	54	-13.27	Av	Vertical




Report No. ATT-2016SZ1219182F - Page 71 of 84 -



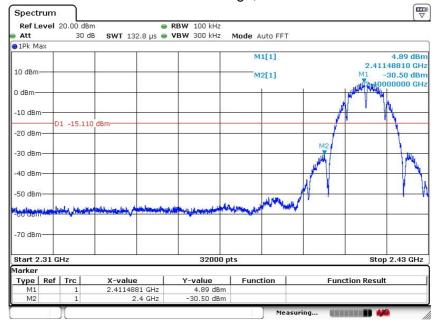

Date: 17 M AR .2017 11:04:13

802.11b: Band Edge, Right Side

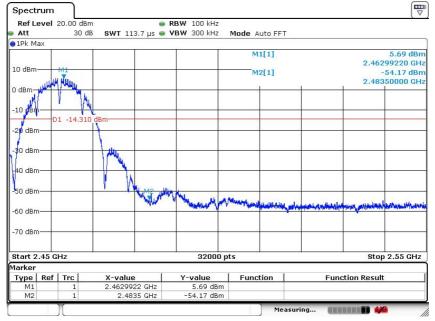


Date: 17 M AR .2017 11:04:57




Report No. ATT-2016SZ1219182F - Page 72 of 84 -



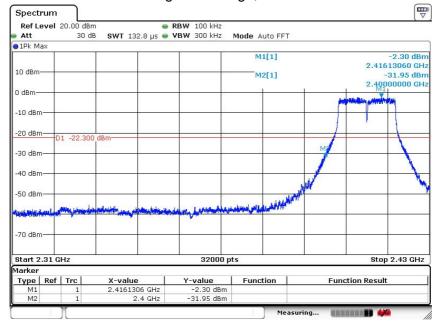

Date: 17 M AR .2017 11:06:10

802.11g: Band Edge, Right Side

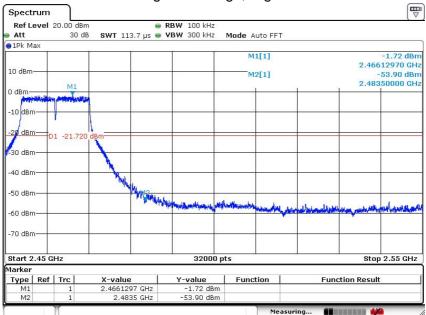


Date: 17 M AR .2017 11:05:25





Report No. ATT-2016SZ1219182F - Page 73 of 84 -

802.11n(HT20): Band Edge, Left Side

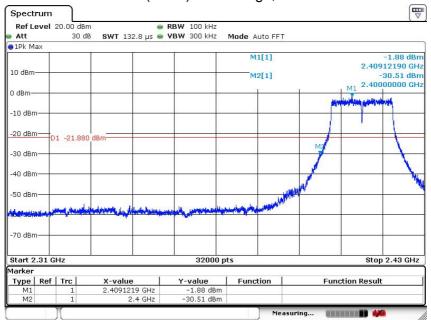

Date: 17 M AR .2017 11:06:37



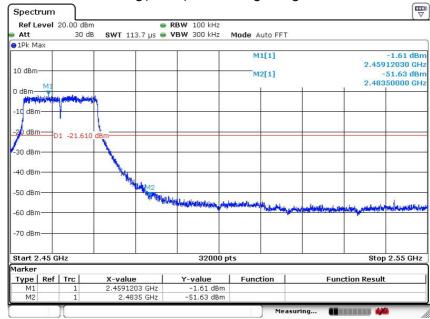

Date: 17 M AR .2017 11:07:21



Report No. ATT-2016SZ1219182F - Page 74 of 84 -

8. ANTENNA REQUIREMENT

8.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.2 EUT ANTENNA

The EUT antenna is PCB antenna. It comply with the standard requirement.