



COMPLIANCE WORLDWIDE INC. TEST REPORT 364-17

In Accordance with the Requirements of

**Federal Communications Commission 47 CFR Part 15.250, Subpart C
Wideband Systems within the band 5925 to 7250 MHz**

Issued to


**The Museum of the Bible, Inc.
7507 SW 44th Street
Oklahoma City, OK 73179**

For the
DGuide
EX3117

FCC ID: 2ALMG-DGUIDE1-2


Report Issued on December 14, 2017

Tested By



Larry K. Stillings

Reviewed By



Brian F. Breault

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

Table of Contents

1. Scope.....	3
2. Product Details	3
2.1. Manufacturer	3
2.2. Model Number.....	3
2.3. Serial Number	3
2.4. Description	3
2.5. Power Source.....	3
2.6. Hardware Revision.....	3
2.7. Software Revision	3
2.8. Modulation Type.....	3
2.9. Operating Frequency	3
2.10. EMC Modifications	3
3. Product Configuration.....	3
3.1. Operational Characteristics & Software	3
3.2. Cables	3
3.3. EUT Hardware	4
3.4. Support Equipment	4
3.5. Test Setup.....	4
4. Measurements Parameters	5
4.1. Measurement Equipment Used to Perform Test	5
4.2. Measurement & Equipment Setup	6
4.3. Measurement Procedure	6
4.4. Measurement Uncertainty	6
5. Measurement Summary	7
6. Measurement Data	8
6.1. Antenna Requirement	8
6.2. Operational Requirements	8
6.3. UWB Bandwidth	9
6.4. Spurious Radiated Emissions	13
6.5. Radiated Emissions in GPS Bands.....	35
6.6. RMS Power in a 1 MHz Bandwidth.....	38
6.7. Peak Emissions in a 50 MHz Bandwidth	42
6.8. Conducted Emissions Test Setup.....	46
6.9. Conducted Emissions Test Data.....	47
6.10. Public Exposure to Radio Frequency Energy Levels.....	49
7. Test Site Description	50
8. Test Images.....	51
8.1. Spurious and Harmonic Emissions - 10 kHz to 1 GHz Front	51
8.2. Spurious and Harmonic Emissions - 10 kHz to 30 MHz Rear	52
8.3. Spurious and Harmonic Emissions - 30 MHz to 1 GHz Rear	53
8.4. Spurious and Harmonic Emissions - 1 to 18 GHz Front	54
8.5. Spurious and Harmonic Emissions - 1 to 18 GHz Rear.....	55
8.6. Spurious and Harmonic Emissions - 18 to 40 GHz Side	56
8.7. Conducted Emissions Front	57
8.8. Conducted Emissions Rear	58
8.9. Frequency Stability Setup	59

Test Number: 364-17**Issue Date: 12/14/2017**

1. Scope

This test report certifies that the DGuide as tested, meets the FCC Part 15.250, Subpart C requirements. The scope of this test report is limited to the test sample provided by the client, only in as much as that sample represents other production units. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

2. Product Details

2.1. Manufacturer:	The Museum of the Bible, Inc.
2.2. Model Number:	DGuide
2.3. Serial Number:	Pre production unit
2.4. Description:	A DGuide is a guide and educator assigned for a specific purpose, such as a museum tour. The DGuide is a tablet type device that performs this task. The DGuide Dock is the wireless charging station for the DGuide.
2.5. Power Source:	120 Volts, 60 Hz
2.6. Hardware Revision:	2.0
2.7. Software Revision:	N/A
2.8. Modulation Type:	Pulse Modulation, Frequency Hopping
2.9. Operating Frequency:	6489.6 GHz Center Frequency Nominal (Channel 5 – 500 MHz BW)
2.10. EMC Modifications:	None

3. Product Configuration

3.1 Operational Characteristics & Software

Hardware Setup:

Power up the DGuide. Using the laptop and special software configure the DGuide to transmit at 16M or 64M PRF on Channel 5.

3.2. Cables

Cable Type	Length	Shield	From	To
Headphones	Amazon	HP01-V2	N/A	To populate DUT headphone port

Test Number: 364-17
Issue Date: 12/14/2017

3. Product Configuration (cont.)


3.3. EUT Hardware

Manufacturer	Model/Part # / Options	Serial Number	Input Volts	Freq (Hz)	Description/Function
MotB	DGuide	Pre Production	120	60	

3.4. Support Equipment

Description	Manufacturer	Model/Part #	
Laptop	Lenovo	ThinkPad	

3.5. Test Setup Diagram

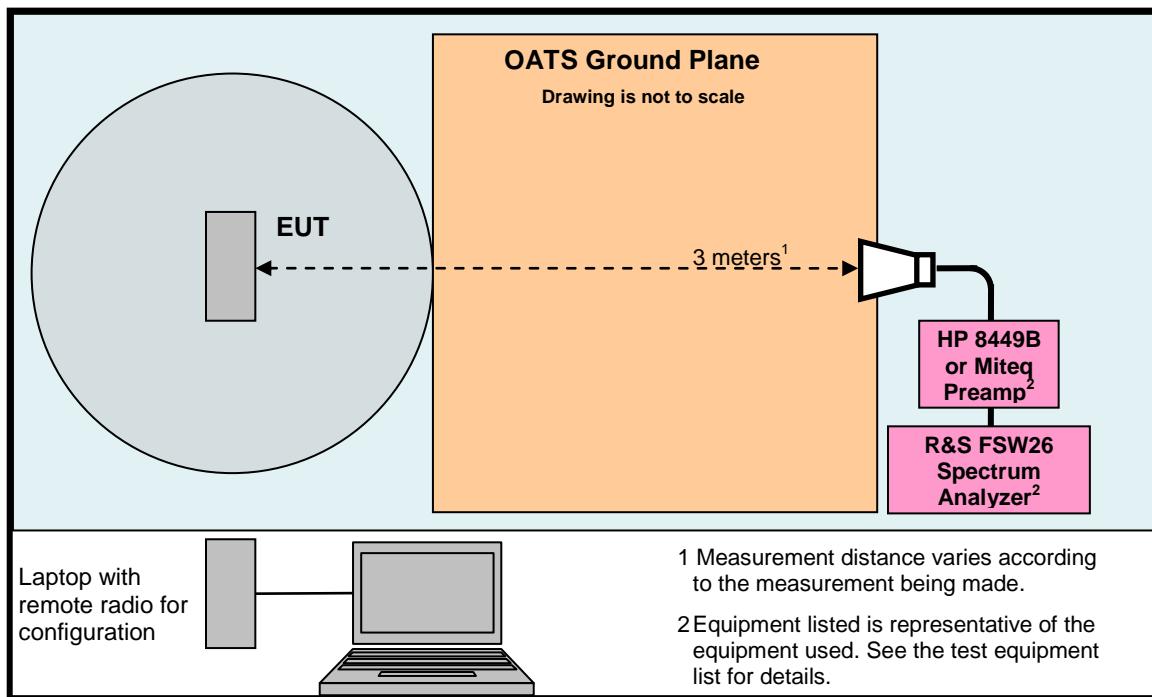

Test Number: 364-17

Issue Date: 12/14/2017

4. Measurements Parameters

4.1. Measurement Equipment Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due	Interval
EMI Test Receiver, 9kHz - 7GHz ¹	Rohde & Schwarz	ESR7	101156	7/23/2018	3 Years
Spectrum Analyzer 20 Hz – 40 GHz ²	Rohde & Schwarz	FSV40	100899	7/23/2018	3 Years
Spectrum Analyzer, 9 kHz - 40 GHz ³	Rohde & Schwarz	FSVR40	100909	5/3/2019	2 Years
Spectrum Analyzer, 2 Hz - 26 GHz ⁴	Rohde & Schwarz	FSW26	102057	12/7/2018	2 Years
EMI Receiver	Hewlett Packard	8546A	3650A00360	12/6/2018	3 Years
Biconilog Antenna 30 MHz to 2 GHz	Sunol Sciences	JB1	A050913	6/3/2019	3 Years
Loop Antenna 9 kHz to 30 MHz	EMCO	6512	9309-1139	10/26/2018	2 Years
Preamplifier 100 MHz to 7 GHz	Miteq	AFS3-00100200-10-15P-4	988773	6/2/2018	1 Year
Preamplifier 100 MHz to 18 GHz	Miteq	AMF-7D-00101800-30-10P	1953081	6/1/2018	1 Year
Preamplifier 2 to 12 GHz	JCA	JCA48-4111B1	7087S	6/2/2018	1 Year
Preamplifier 1 to 26.5 GHz	Hewlett Packard	8449B	3008A01323	7/22/2018	3 Years
Preamplifier 18 to 40 GHz	Avantek	AWT-40039	FM22038832	6/2/2018	1 Year
Horn Antenna 960 MHz to 18 GHz	ETS-Lindgren	3117	00143292	2/22/2019	3 Years
Horn Antenna 18 to 40 GHz	Com Power	AH-840	101032	2/24/2018	2 Years
High Pass Filter 8 to 18 GHz	Micro-Tronics	HPM50107	G036	6/1/2018	1 Year
Barometer	Control Company	4195	Cal ID# 236	10/8/2018	2 Years

¹ ESR7 Firmware revision: V2.28,SP1 Date installed: 9/2/2016 Previous V2.26, installed 8/15/2014.

² FSV40 Firmware revision: V2.30 SP4, Date installed: 5/4/2016 Previous V2.30 SP1, installed 10/22/2014.

³ FSVR40 Firmware revision: V2.23, Date installed: 10/20/2014 Previous V1.63 SP1, installed 8/28/2013.

⁴ FSW26 Firmware revision: V2.50, Date installed: 9/12/2016 Previous V2.40, installed 5/4/2016.

Test Number: 364-17**Issue Date: 12/14/2017**

4. Measurements Parameters (continued)

4.2. Measurement & Equipment Setup

Test Dates:	8/22/2017, 8/23/2017, 8/24/2017, 8/25/2017, 8/29/2017, 12/13/2017
Test Engineers:	Brian Breault, Larry Stillings
Normal Site Temperature (15 - 35°C):	21.6
Relative Humidity (20 -75%RH):	35
Frequency Range:	10 kHz to 40 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	200 Hz – 10 kHz to 150 kHz 9 kHz – 10 to 30 MHz 120 kHz - 30 MHz to 1 GHz 1 MHz - Above 1 GHz
EMI Receiver Avg Bandwidth:	300 Hz – 10 kHz to 150 kHz 30 kHz – 10 to 30 MHz 300 kHz - 30 MHz to 1 GHz 3 MHz - Above 1 GHz
Detector Function:	Peak, Quasi-Peak & Average

4.3. Measurement Procedure

Test measurements were made in accordance FCC Parts 15.209, 15.250 Subpart C.

The test methods used to generate the data in this test report is in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

4.4. Measurement Uncertainty

The following uncertainties are expressed for an expansion/coverage factor of K=2.

RF Frequency (out of band)	$\pm 1 \times 10^{-8}$
Radiated Emission of Transmitter to 100 GHz	± 4.55 dB
Radiated Emission of Receiver	± 4.55 dB
Temperature	$\pm 0.91^\circ$ C
Humidity	$\pm 5\%$

Test Number: 364-17

Issue Date: 12/14/2017

5. Measurements Summary

Test Requirement	FCC Rule Requirement	Test Report Section	Result	Comment
Antenna Requirement	15.203	6.1	Compliant	The antenna is a surface mount PCB type antenna.
Operational Requirements	15.250 (a)	6.2	Compliant	
Wideband Bandwidth	15.250 (b)	6.3	Compliant	
Spurious Radiated Emissions	15.250 (d) (1) 15.209	6.4	Compliant	
Radiated Emissions in GPS Bands	15.250 (d) (2)	6.5	Compliant	
RMS Power in a 1 MHz Bandwidth	15.250 (d) (1)	6.6	Compliant	
Peak Emissions in a 50 MHz Bandwidth	15.250 (d) (3)	6.7	Compliant	
Conducted Emissions	15.207	6.8 6.9	Compliant	
Radio Frequency Exposure	FCC OET Bulletin 65 1.1307 (b) (1)	6.10	Compliant	

Test Number: 364-17

Issue Date: 12/14/2017

6. Measurement Data

6.1. Antenna Requirement (15.203)

Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply

Result: The antenna utilized by the device under test is a surface mount PCB Type, non user replaceable unit.

6.2. Operational Requirements of the Device under Test (15.250 (a))

Requirement: The -10 dB bandwidth of a device operating under the provisions of this section must be contained within the 5925 to 7250 MHz band under all conditions of operation including the effects from stepped frequency, frequency hopping or other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage.

Result: Compliant

6.2.1 Frequency Stability over Temperature

Marker	Temp °C	Meas Freq.	-10 dB Band Edges		15.250 Frequency Band		Result	
			(MHz)	Lower	Upper	F _{MIN} (MHz)	F _{MAX} (MHz)	
-	OATS	6505		6207.3	6817.7	5925	7250	Compliant
-	Ambient	6505		6234.3	6808.7	5925	7250	Compliant
1	-20	6505		6893.3	6824.7	5925	7250	Compliant
2	-10	6505		6190.3	6811.7	5925	7250	Compliant
3	0	6505		6189.3	6812.7	5925	7250	Compliant
4	+10	6505		6190.3	6810.7	5925	7250	Compliant
5	+20	6505		6189.3	6811.7	5925	7250	Compliant
6	+30	6505		6193.3	6812.7	5925	7250	Compliant
7	+40	6505		6201.3	6811.7	5925	7250	Compliant
8	+50	6505		6194.3	6814.7	5925	7250	Compliant

Test Number: 364-17
Issue Date: 12/14/2017

6. Measurement Data (continued)

6.3. Wideband Bandwidth (15.250 (b))


Requirement: The -10 dB bandwidth of the fundamental emission shall be at least 50 MHz.

Result: Compliant

6.3.1. Measurement Data – Values in GHz

f_M	The highest emission peak	6.4530
f_L	10 dB below the highest peak	6.1573
f_H	10 dB above the highest peak	6.8307
Bandwidth	Calculated: $(f_H - f_L)$	0.6733

6.3.2. Measurement Plot of 10 dB frequencies (Channel 5, PRF 16M, long packets)

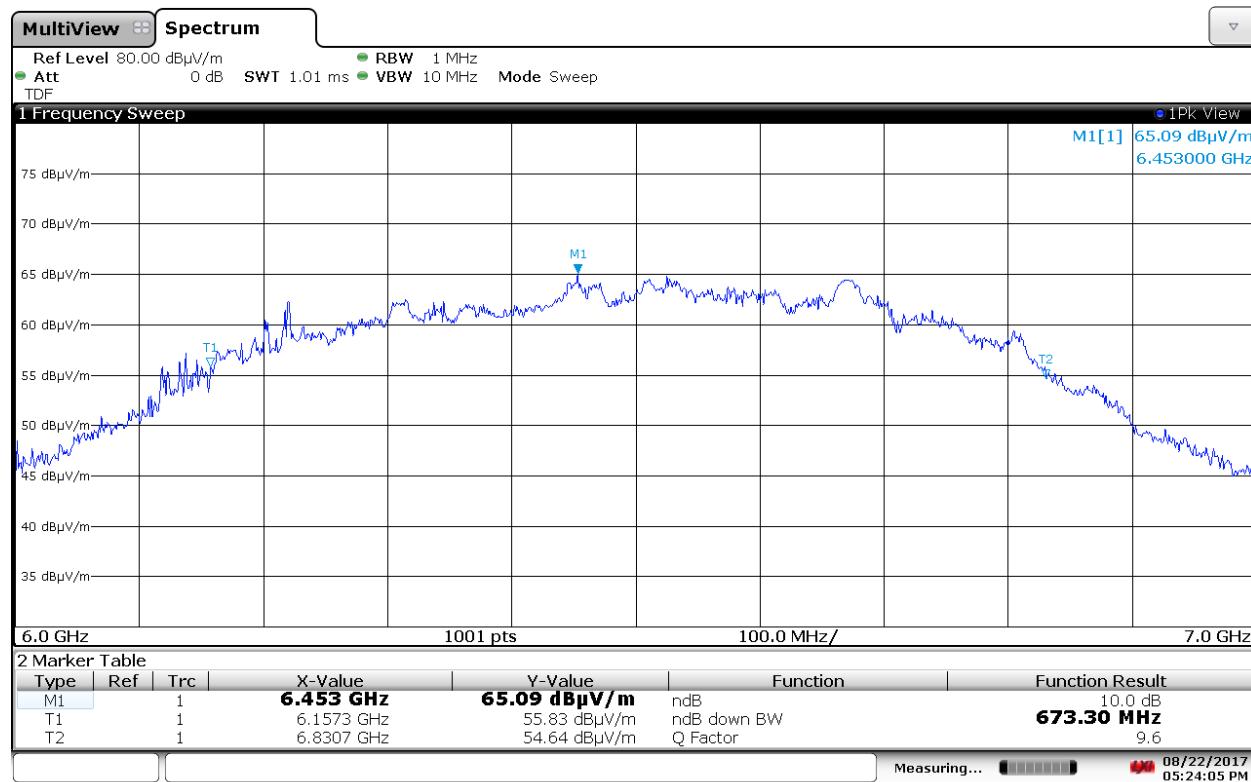

05:24:05 PM 08/22/2017

Test Number: 364-17
Issue Date: 12/14/2017


6. Measurement Data (continued)

6.3. Wideband Bandwidth (15.250 (b)) (continued)

6.3.3. Measurement Data – Values in GHz

f_M	The highest emission peak	6.5180
f_L	10 dB below the highest peak	6.2582
f_H	10 dB above the highest peak	6.7498
Bandwidth	Calculated: $(f_H - f_L)$	0.4915

6.3.4. Measurement Plot of 10 dB frequencies (Channel 5, PRF 16M, short packets)

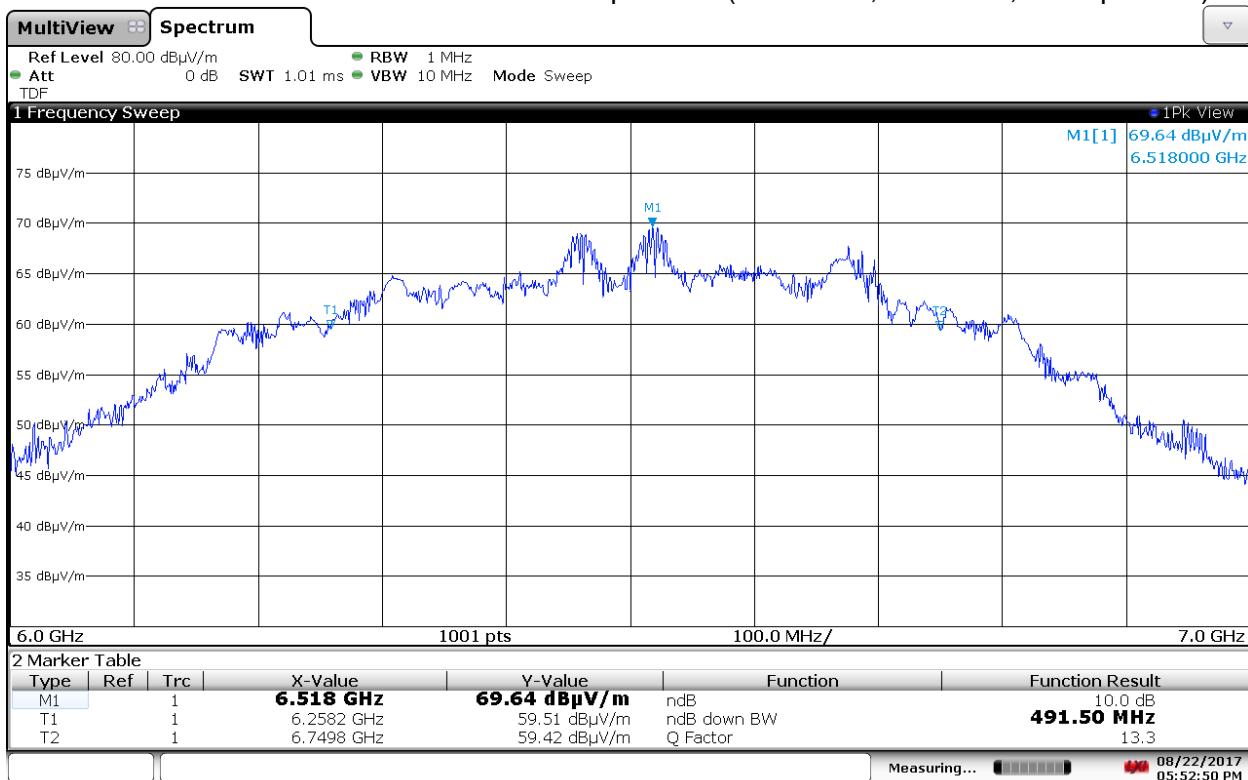

05:52:51 PM 08/22/2017

Test Number: 364-17
Issue Date: 12/14/2017


6. Measurement Data (continued)

6.3. Wideband Bandwidth (15.250 (b)) (continued)

6.3.5. Measurement Data – Values in GHz

f_M	The highest emission peak	6.5040
f_L	10 dB below the highest peak	6.2133
f_H	10 dB above the highest peak	6.8057
Bandwidth	Calculated: $(f_H - f_L)$	0.5924

6.3.6. Measurement Plot of 10 dB frequencies (Channel 5, PRF 64M, long packets)

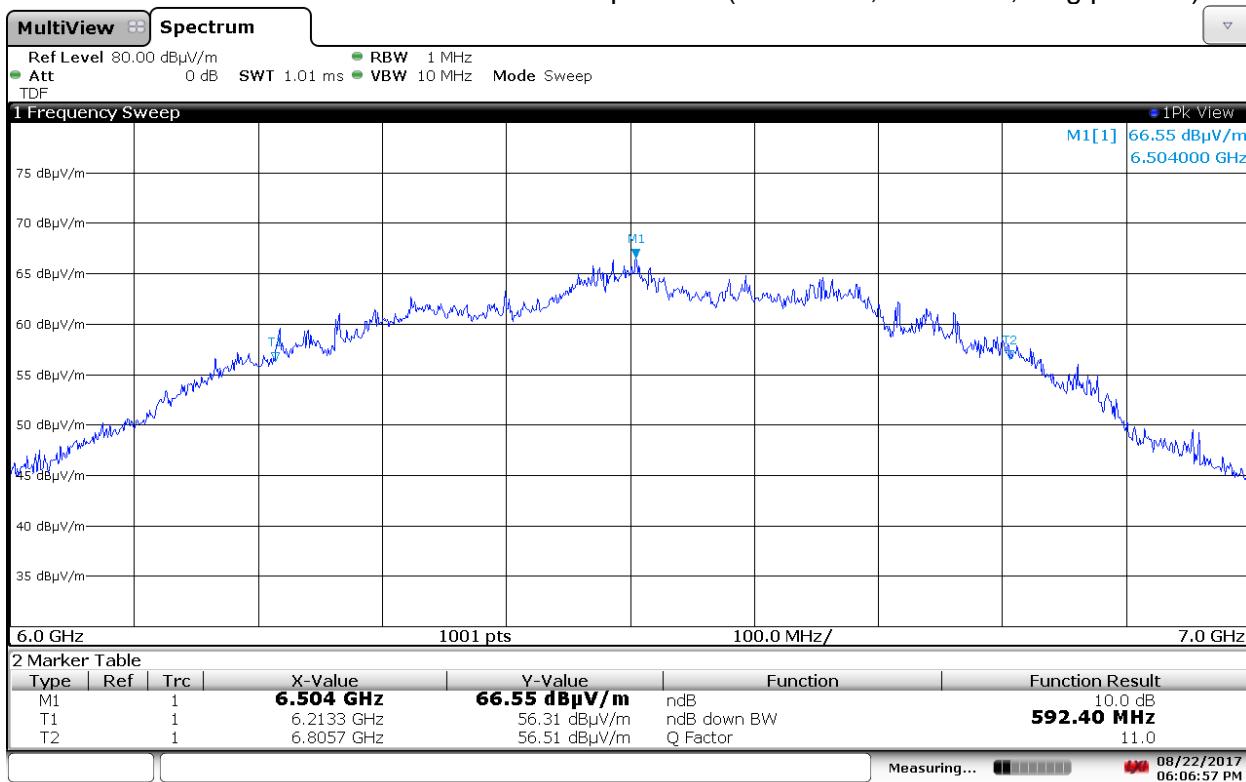

06:06:57 PM 08/22/2017

Test Number: 364-17
Issue Date: 12/14/2017


6. Measurement Data (continued)

6.3. Wideband Bandwidth (15.250 (b)) (continued)

6.3.7. Measurement Data – Values in GHz

f_M	The highest emission peak	6.5480
f_L	10 dB below the highest peak	6.1743
f_H	10 dB above the highest peak	6.8147
Bandwidth	Calculated: $(f_H - f_L)$	0.6404

6.3.8. Measurement Plot of 10 dB frequencies (Channel 5, PRF 64M, short packets)

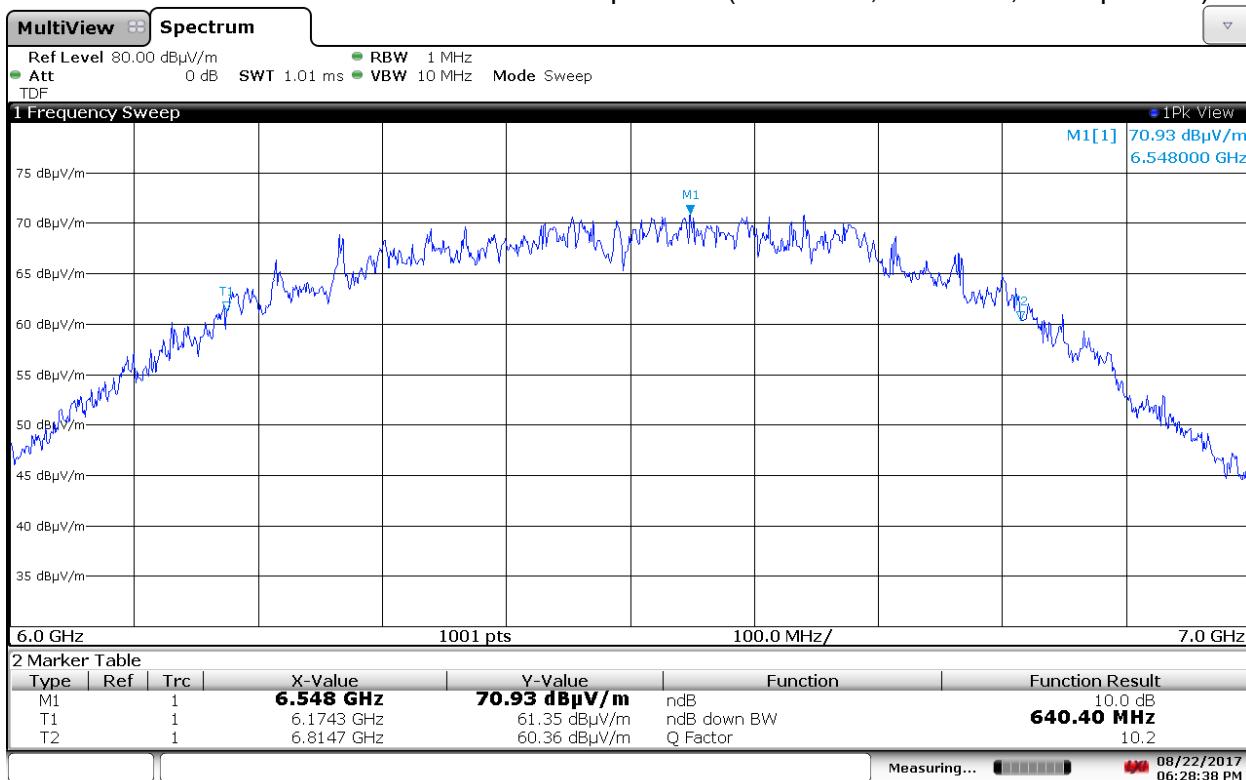

06:28:38 PM 08/22/2017

Test Number: 364-17

Issue Date: 12/14/2017

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (1), 15.209)

Requirement: The radiated emissions at or below 960 MHz from a device operating under the provisions of this section shall not exceed the emission levels in Section 15.209. The radiated emissions above 960 MHz from a device operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of 1 MHz:

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
960 - 1610	-75.3	19.9
1610 - 1990	-63.3	31.9
1990 - 3100	-61.3	33.9
3100 - 5925	-51.3	43.9
5925 - 7250	-41.3	53.9
7250 - 10,600	-51.3	43.9
Above 10,600	-61.3	33.9

Test Number: 364-17

Issue Date: 12/14/2017

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (1), 15.209 Continued)

Radiated Emissions Field Strength Limits at 3 Meters (Section 15.250 (d), 15.209)

Frequency (MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)
0.009 to 0.490	2,400/F	128.5 to 93.8
0.490 to 1.705	24,000/F	73.8 to 63
1.705 - 30	30	69.5
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
960 - 40,000	500	54

Test Notes: Refer to Section 4.1 for the test equipment used.

Frequency Range:	10 kHz to 40 GHz
Measurement Distance:	3 Meters
EMI Receiver IF Bandwidth:	200 Hz – 10 kHz to 150 kHz 9 kHz – 150 kHz to 30 MHz 120 kHz - 30 MHz to 1 GHz 1 MHz - Above 1 GHz
EMI Receiver Avg Bandwidth (minimum):	300 Hz – 10 kHz to 150 kHz 30 kHz – 150 kHz to 30 MHz 300 kHz - 30 MHz to 1 GHz 3 MHz - Above 1 GHz
Detector Function:	Peak, Quasi-Peak & Average

Notes: The signals in the 960 MHz to 3 GHz range on the 960 MHz to 8 GHz plots in sections 6.4.2 to 6.4.17 are due to the Ethernet packet traffic from the processor to the UWB chipset and fall under the requirements of 15.209, where the average limit is 54 dB μ V/m.

Test Number: 364-17

Issue Date: 12/14/2017


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.1 Parallel Measurement Antenna – 10 to 150 kHz

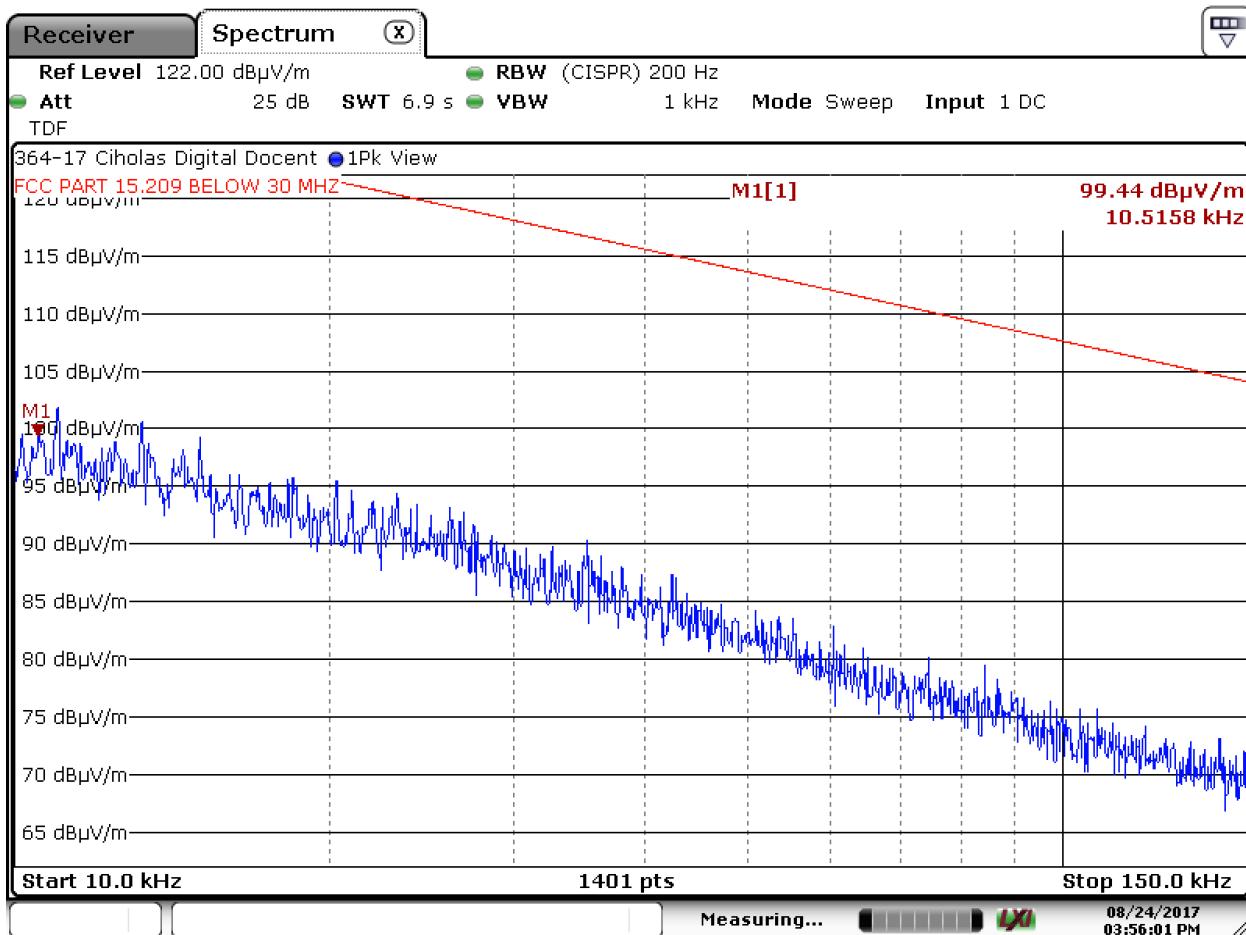

Date: 24.AUG.2017 15:56:01

Test Number: 364-17

Issue Date: 12/14/2017


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.2 Perpendicular Measurement Antenna – 10 to 150 kHz

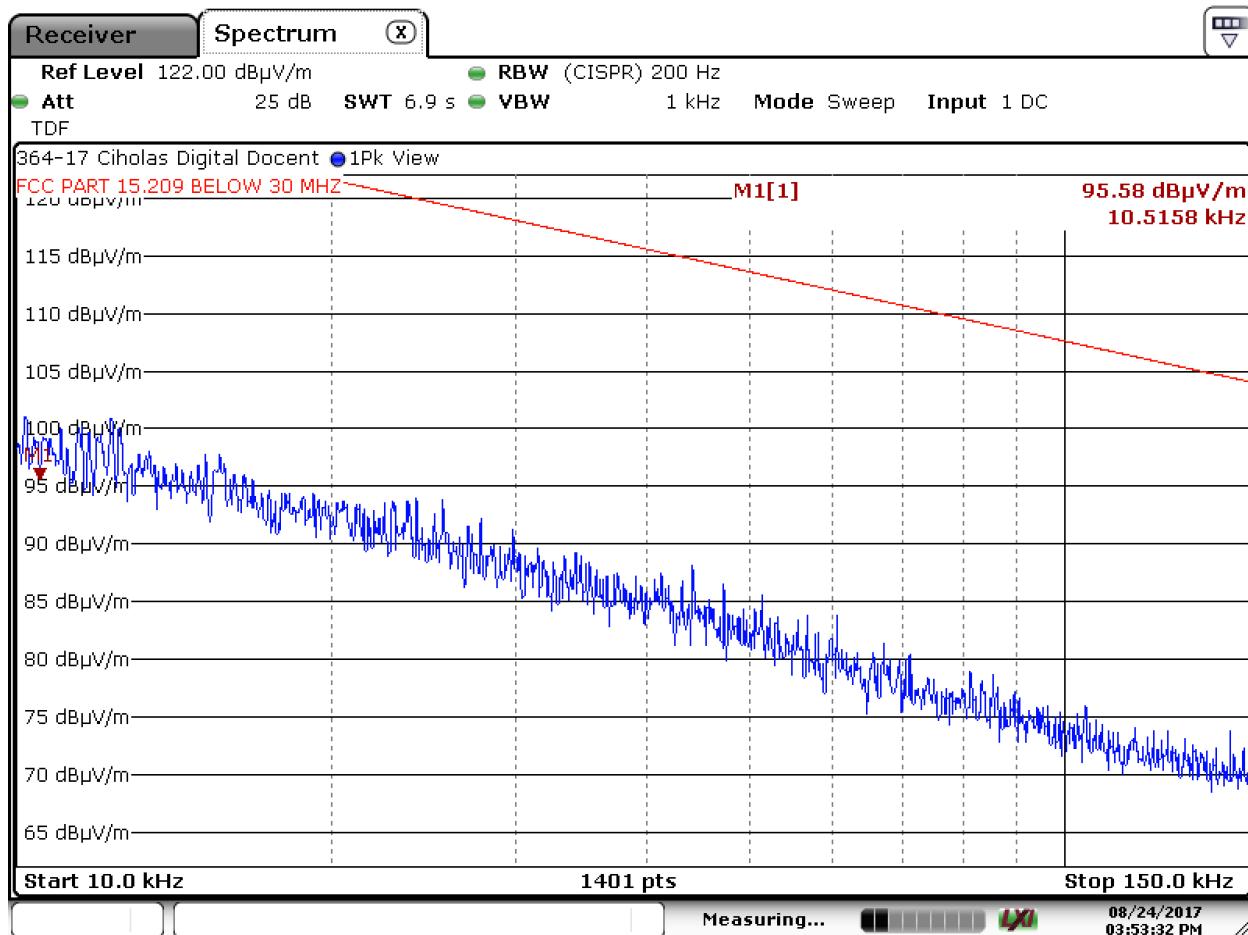

Date: 24.AUG.2017 15:53:32

Test Number: 364-17

Issue Date: 12/14/2017


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.3 Ground Parallel Measurement Antenna – 10 to 150 kHz

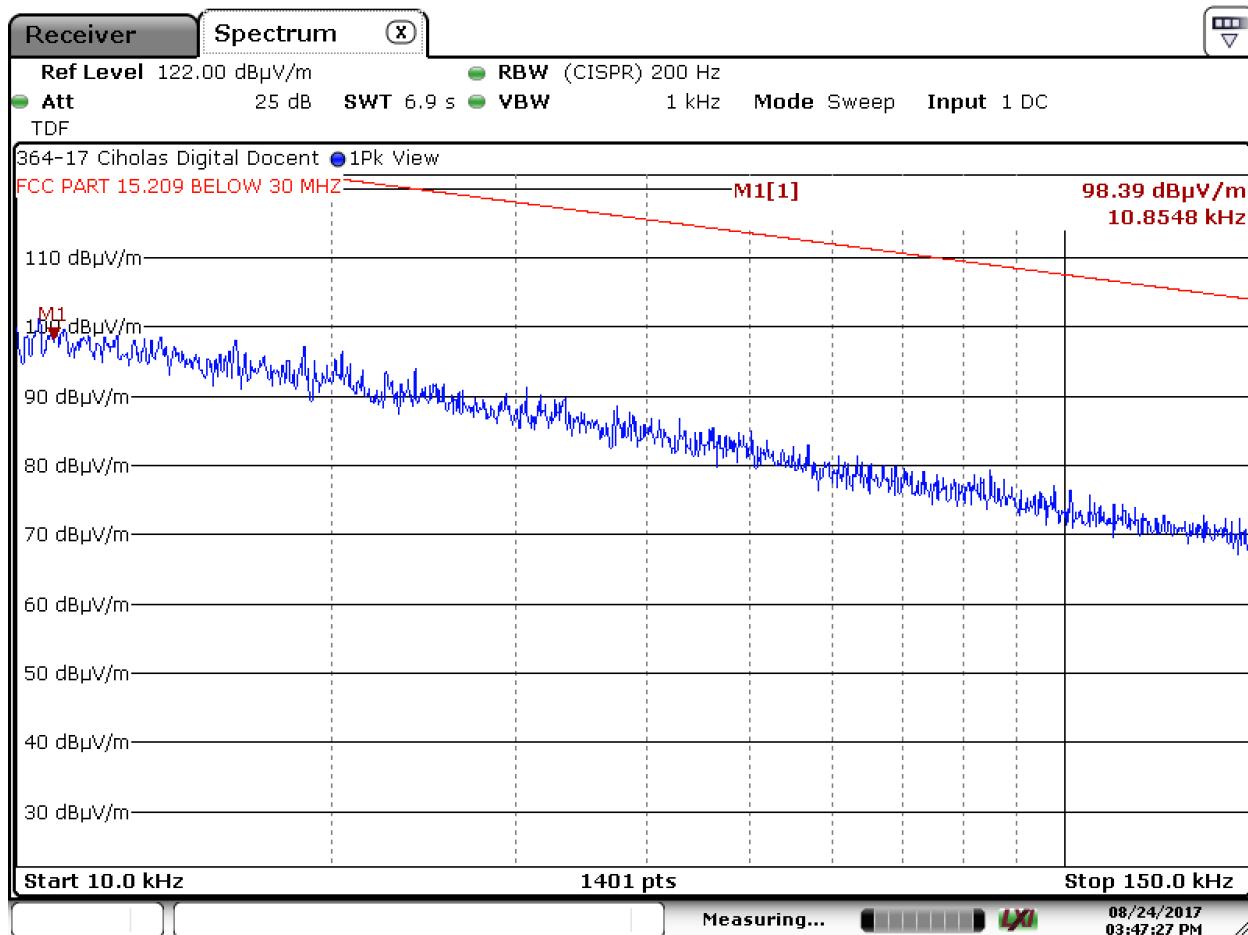

Date: 24.AUG.2017 15:47:27

Test Number: 364-17

Issue Date: 12/14/2017


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.4 Parallel Measurement Antenna – 150 kHz to 30 MHz

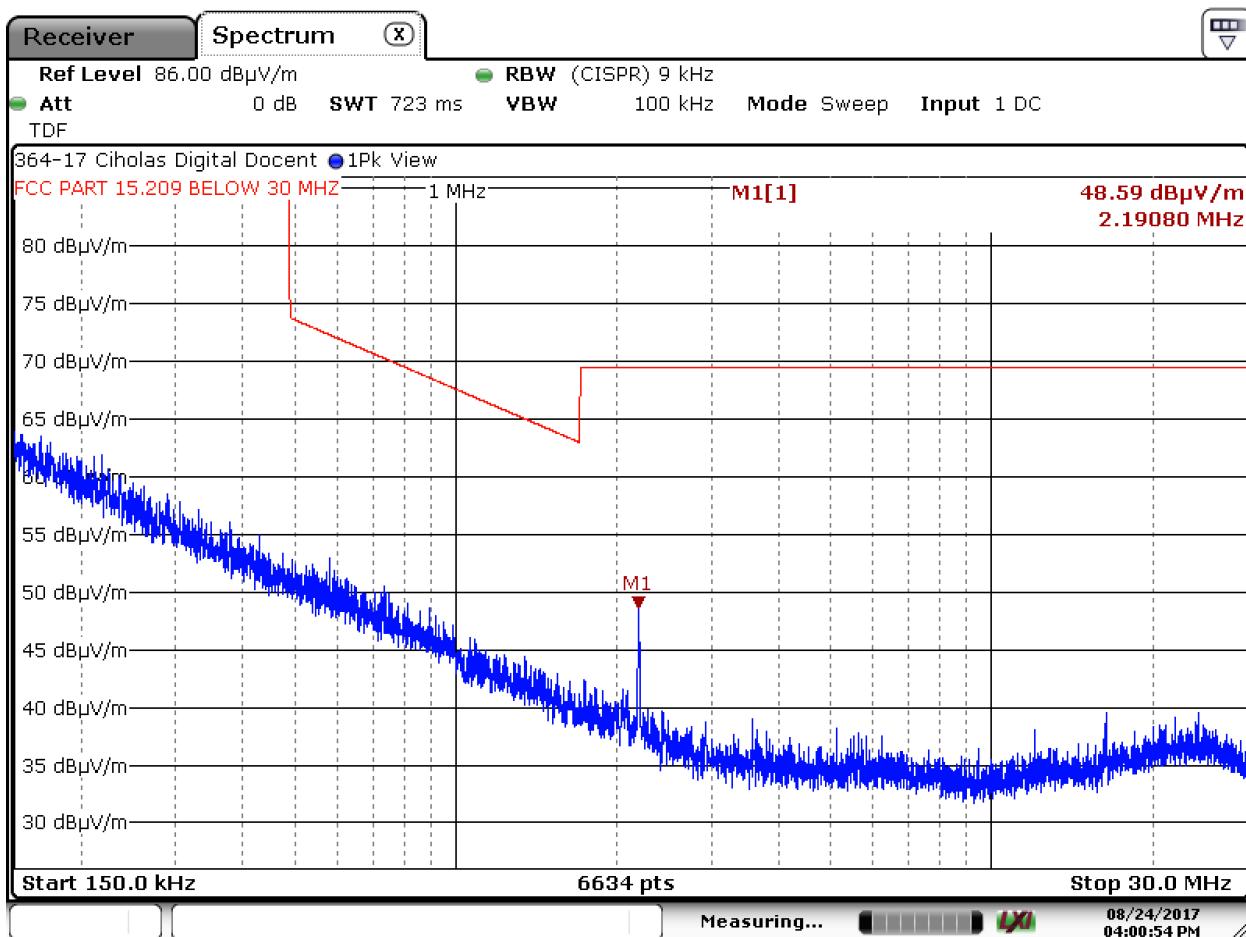

Date: 24.AUG.2017 16:00:54

Test Number: 364-17

Issue Date: 12/14/2017


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.5 Perpendicular Measurement Antenna – 150 kHz to 30 MHz

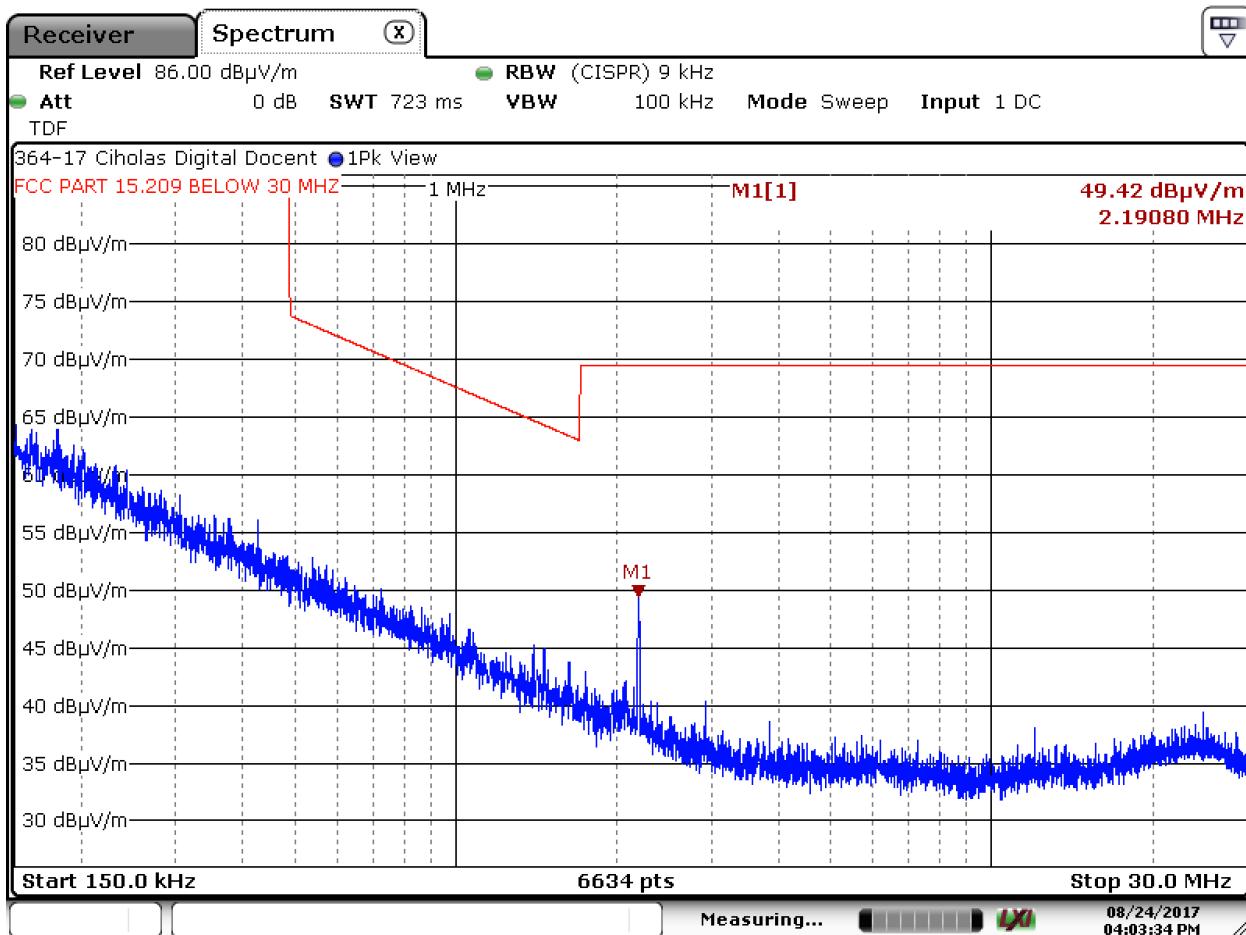

Date: 24.AUG.2017 16:03:34

Test Number: 364-17

Issue Date: 12/14/2017


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions below 960 MHz on our 3 Meter OATS.

6.4.1.6 Ground Parallel Measurement Antenna – 150 kHz to 30 MHz

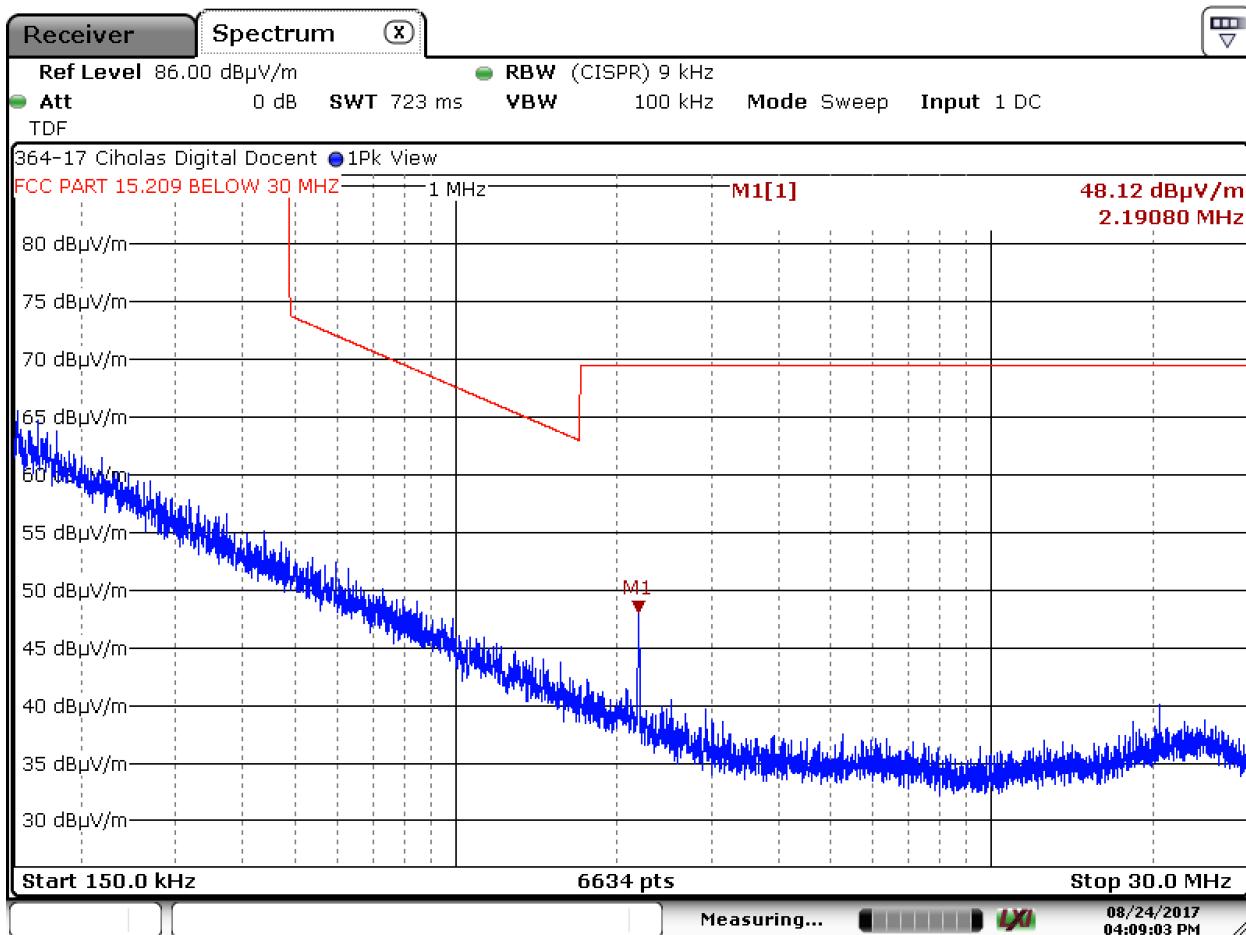

Date: 24.AUG.2017 16:09:03

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no emissions within 6 dB of the limits below 960 MHz on our 3 Meter OATS.

6.4.1.7 Horizontal Polarity – 30 to 960 MHz – 16M PRF, short packets

14:04:42 AUG 23, 2017 364-17 Cjholas Digital Do
 Chamber FCC Part 15.209, Radiated Emissions Prescan

MARKER ACTV DET: PEAK
 960.0 MHz MEAS DET: PEAK
 31.17 dB μ V MKR 960.0 MHz
 31.17 dB μ V

LOG REF 46.0 dB μ V PREAMP ON

5
 dB/
 #ATN
 0 dB

VA SB
 SC FC
 ACORR

START 30.0 MHz STOP 960.0 MHz
 L #1F BW 120 kHz AVG BW 300 kHz SWP 872 msec

Test Number: 364-17

Issue Date: 12/14/2017


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions within 6 dB of the limits below 960 MHz on our 3 Meter OATS.

6.4.1.8 Vertical Polarity – 30 to 960 MHz – 16M PRF, short packets

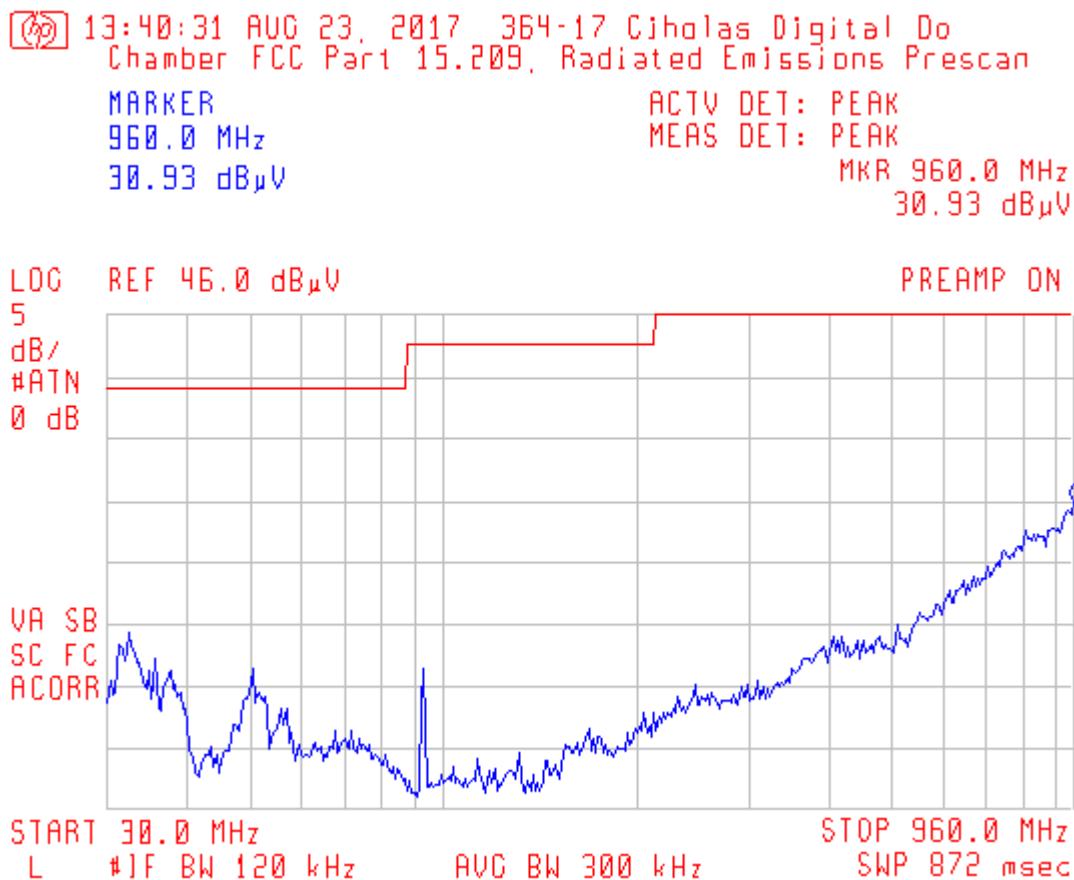

6. Measurement Data (continued)


6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no emissions within 6 dB of the limits below 960 MHz on our 3 Meter OATS.

6.4.1.9 Horizontal Polarity – 30 to 960 MHz – 16M PRF, long packets

14:04:42 AUG 23, 2017 364-17 Ciholas Digital Do
Chamber FCC Part 15.209, Radiated Emissions Prescan
MARKER ACTV DET: PEAK
960.0 MHz MEAS DET: PEAK
31.17 dB μ V MKR 960.0 MHz
31.17 dB μ V

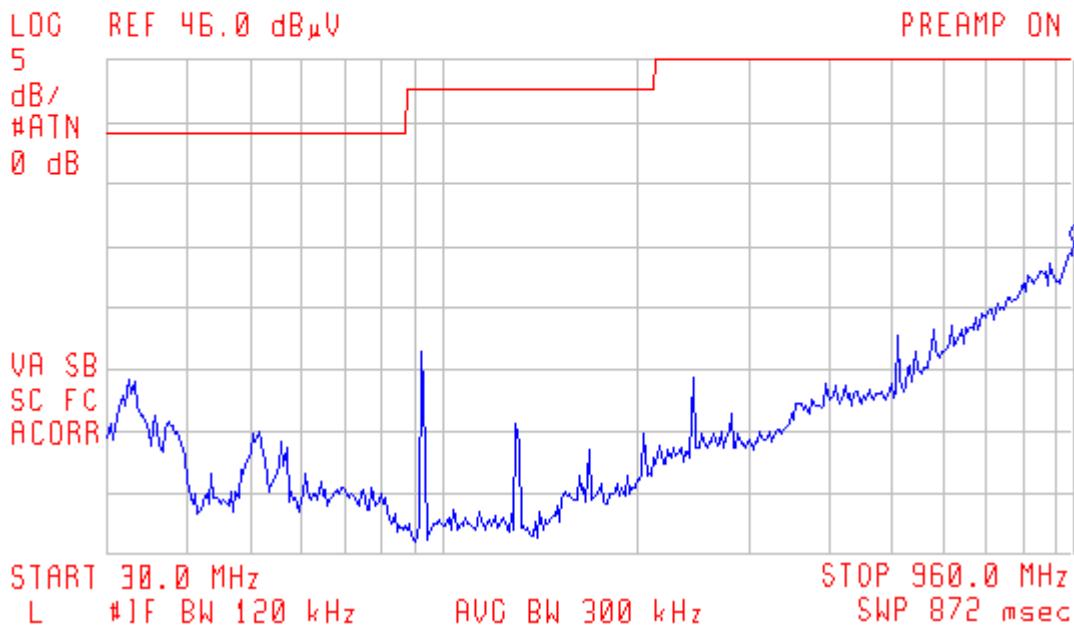

6. Measurement Data (continued)


6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions within 6 dB of the limits below 960 MHz on our 3 Meter OATS.

6.4.1.10 Vertical Polarity – 30 to 960 MHz – 16M PRF, long packets

13:49:38 AUG 23, 2017 364-17 Cjholas Digital Do
Chamber FCC Part 15.209, Radiated Emissions Prescan
MARKER ACTV DET: PEAK
960.0 MHz MEAS DET: PEAK
31.17 dB μ V MKR 960.0 MHz
31.17 dB μ V

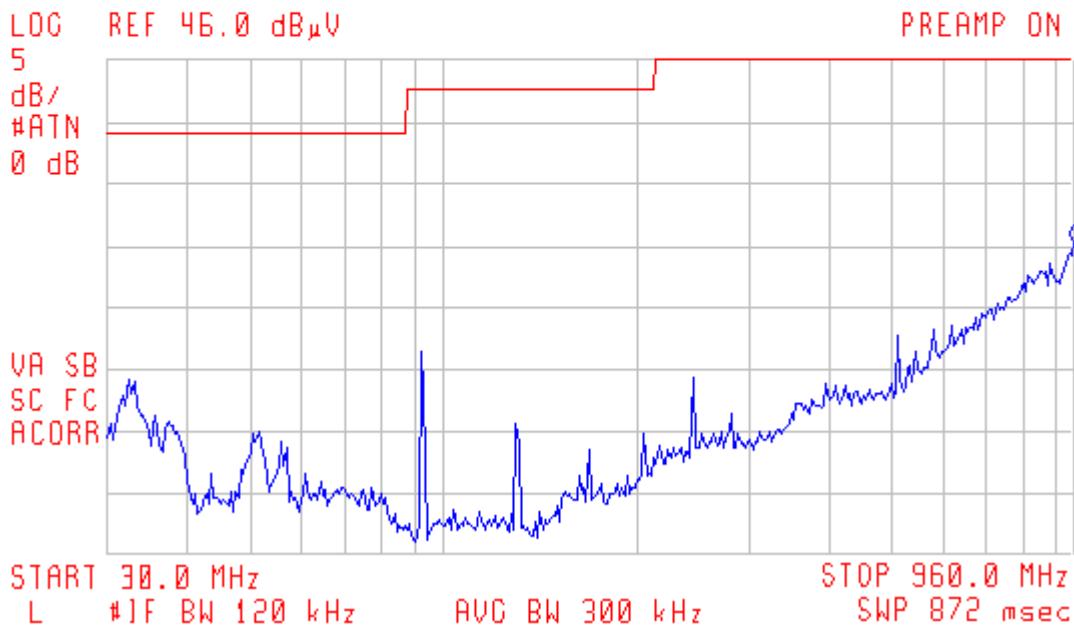

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no emissions within 6 dB of the limits below 960 MHz on our 3 Meter OATS.

6.4.1.11 Horizontal Polarity – 30 to 960 MHz – 64M PRF, short packets

14:37:34 AUG 23, 2017 364-17 Cjholas Digital Do
Chamber FCC Part 15.209, Radiated Emissions Prescan

MARKER ACTV DET: PEAK
960.0 MHz MEAS DET: PEAK
34.65 dB μ V MKR 960.0 MHz
34.65 dB μ V

LOG REF 46.0 dB μ V PREAMP ON

5
dB/
#ATN
0 dB

VA SB
SC FC
ACORR

START 30.0 MHz STOP 960.0 MHz
L #1F BW 120 kHz AVO BW 300 kHz SWP 872 msec

6. Measurement Data (continued)


6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions within 6 dB of the limits below 960 MHz on our 3 Meter OATS.

6.4.1.12 Vertical Polarity – 30 to 960 MHz – 64M PRF, short packets

14:34:38 AUG 23, 2017 364-17 Ciholas Digital Do
Chamber FCC Part 15.209, Radiated Emissions Prescan
MARKER ACTV DET: PEAK
960.0 MHz MEAS DET: PEAK
30.51 dB μ V MKR 960.0 MHz
30.51 dB μ V

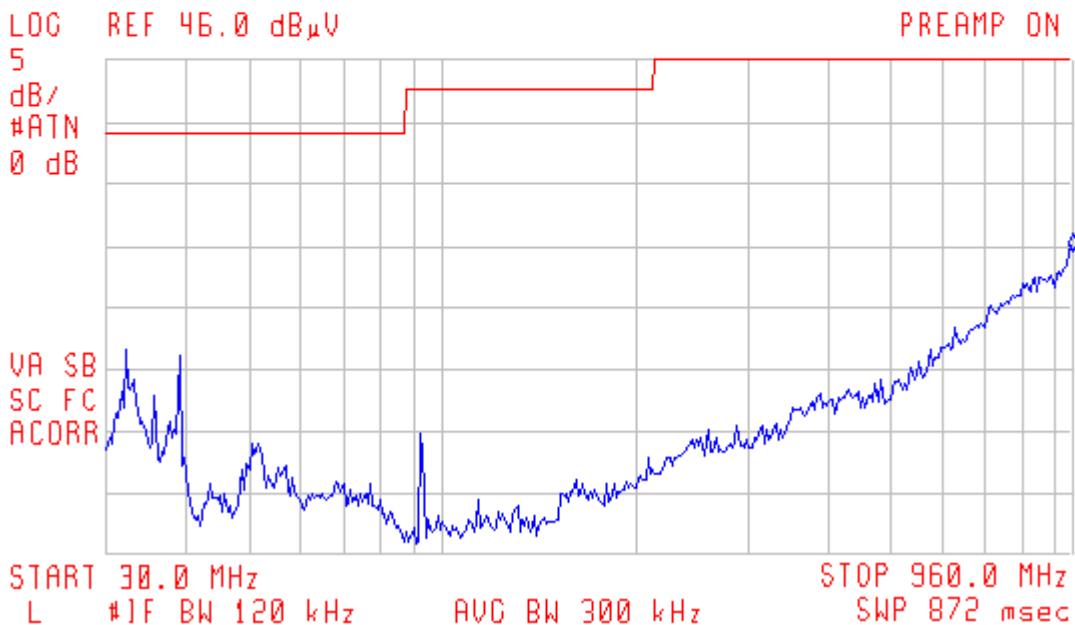

6. Measurement Data (continued)


6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no emissions within 6 dB of the limits below 960 MHz on our 3 Meter OATS.

6.4.1.13 Horizontal Polarity – 30 to 960 MHz – 64M PRF, long packets

[C] 14:24:24 AUG 23, 2017 364-17 Cjholas Digital Do
Chamber FCC Part 15.209, Radiated Emissions Prescan
MARKER ACTV DET: PEAK
960.0 MHz MEAS DET: PEAK
36.23 dB μ V MKR 960.0 MHz
36.23 dB μ V

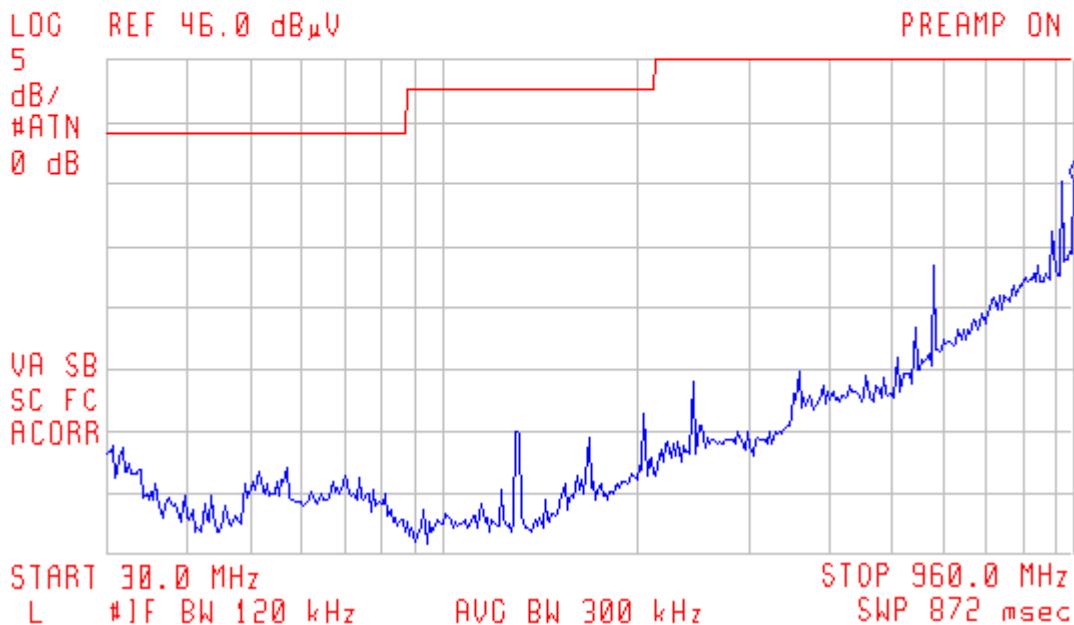

6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (5), 15.209)

6.4.1. 10 kHz to 960 MHz, measured at 3 Meters

The device was prescreened in our 3 Meter Semi-Anechoic Chamber. There were no measurable emissions within 6 dB of the limits below 960 MHz on our 3 Meter OATS.

6.4.1.14 Vertical Polarity – 30 to 960 MHz – 64M PRF, long packets

14:28:07 AUG 23, 2017 364-17 Cjholas Digital Do
 Chamber FCC Part 15.209, Radiated Emissions Prescan

MARKER ACTV DET: PEAK
 960.0 MHz MEAS DET: PEAK
 30.58 dB μ V MKR 960.0 MHz
 30.58 dB μ V

LOG REF 46.0 dB μ V PREAMP ON

5

dB/
 #ATN

0 dB

VA SB

SC FC

ACORR

START 30.0 MHz STOP 960.0 MHz

L #1F BW 120 kHz AVO BW 300 kHz SWP 872 msec


Test Number: 364-17

Issue Date: 12/14/2017

6. Measurement Data (continued)


6.4. Spurious Radiated Emissions (15.250 (d) (1))

6.4.15. 960 MHz to 8 GHz Horizontal at 1 Meter (16M PRF, long packets)

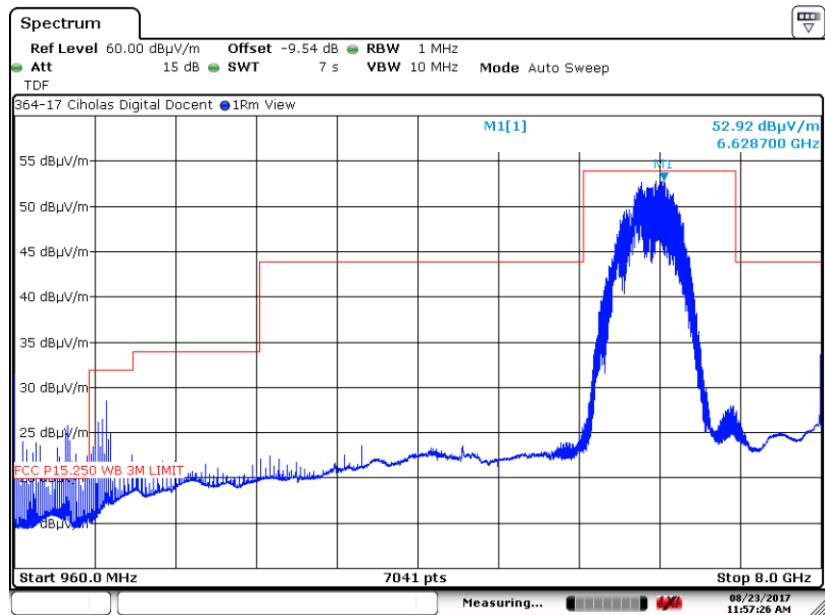

Date: 23.AUG.2017 11:57:27

6.4.16. 960 MHz to 8 GHz Vertical at 1 Meter (16M PRF, long packets)

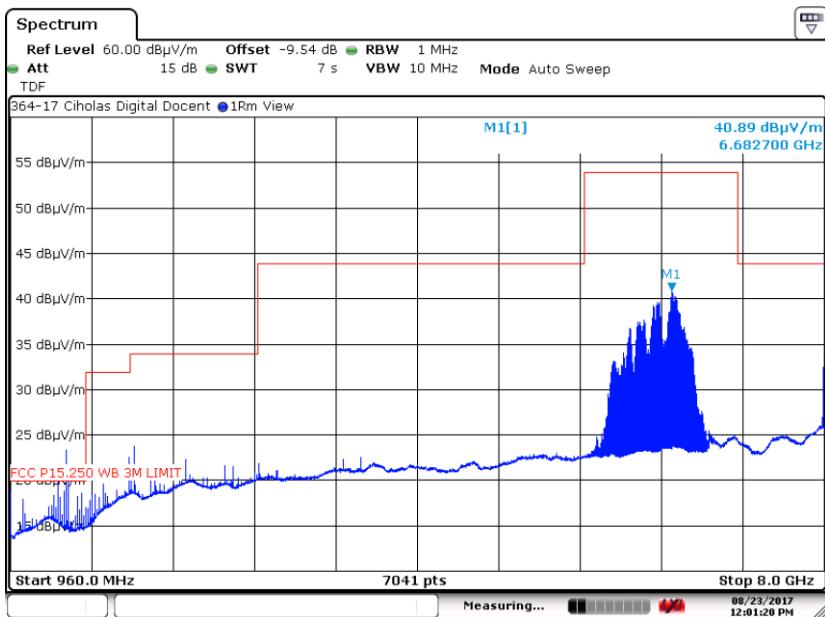

Date: 23.AUG.2017 12:01:21


Test Number: 364-17

Issue Date: 12/14/2017


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (1) continued)

6.4.17. 960 MHz to 8 GHz Horizontal at 1 Meter (16M PRF, short packets)

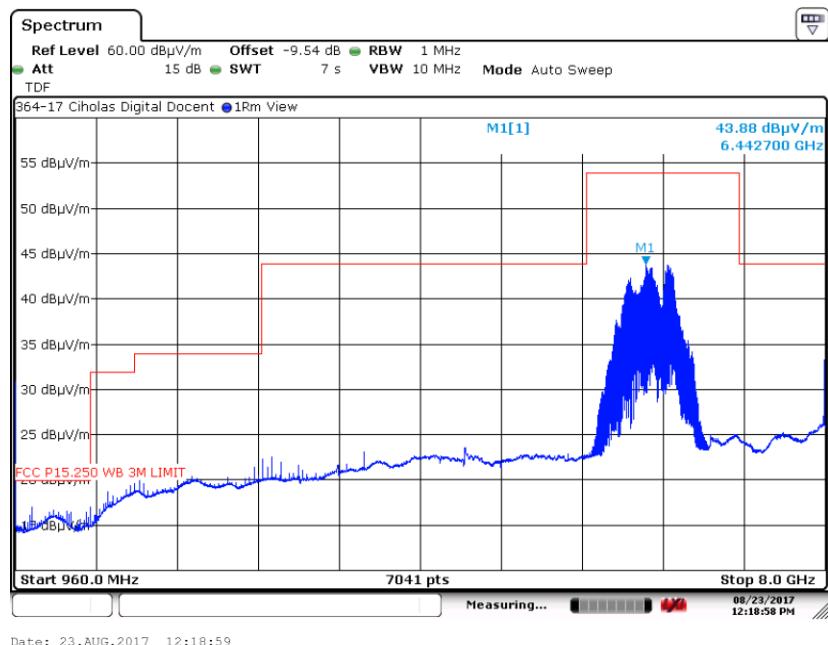

6.4.18. 960 MHz to 8 GHz Vertical at 1 Meter (16M PRF, short packets)

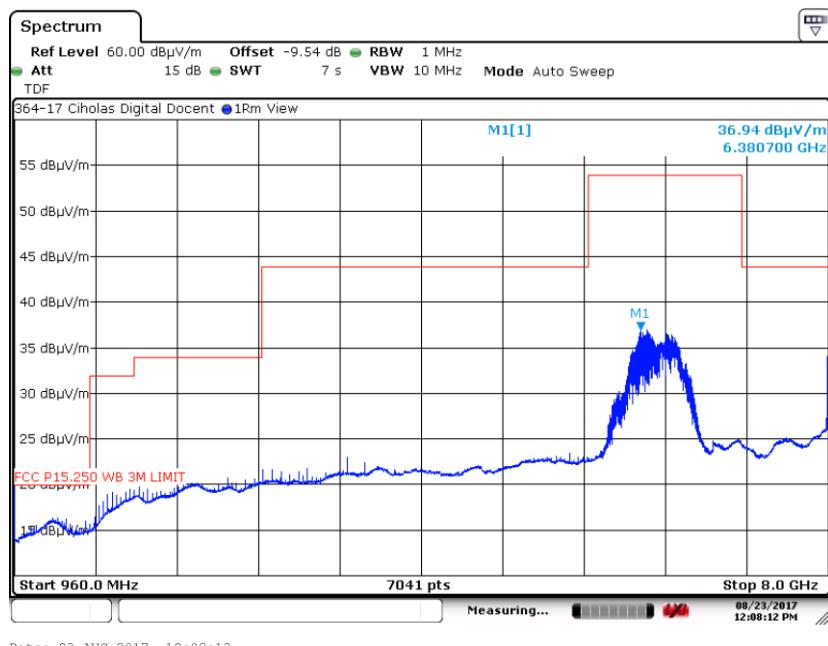


Test Number: 364-17

Issue Date: 12/14/2017

6. Measurement Data (continued)


6.4. Spurious Radiated Emissions (15.250 (d) (1) continued)

6.4.19. 960 MHz to 8 GHz Horizontal at 1 Meter (64M PRF, long packets)

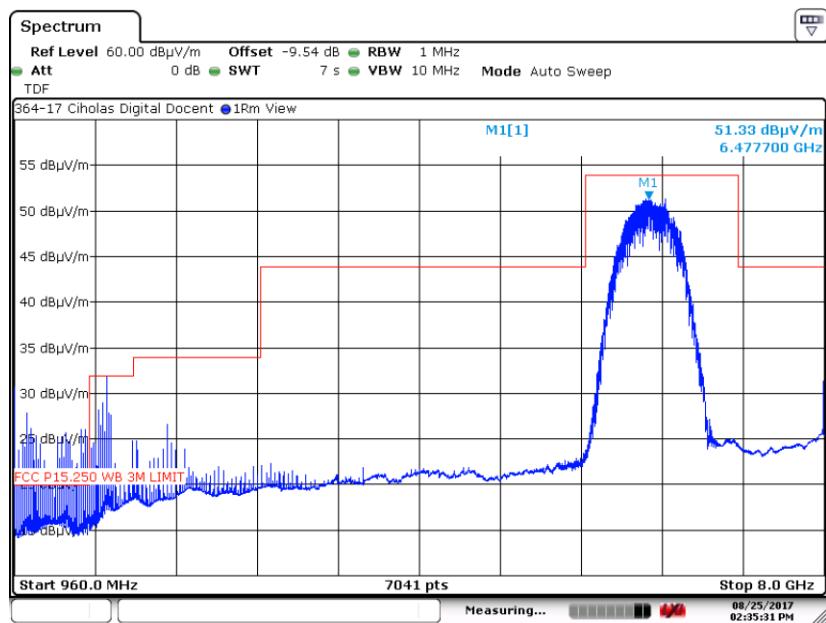

Date: 25.AUG.2017 14:35:32

6.4.20. 960 MHz to 8 GHz Vertical at 1 Meter (64M PRF, long packets)

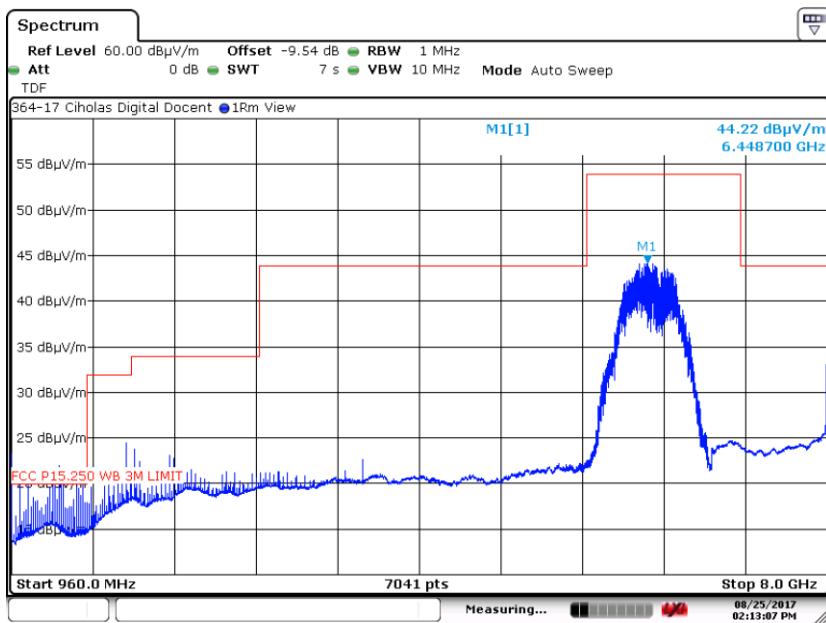

Date: 25.AUG.2017 14:13:07


Test Number: 364-17

Issue Date: 12/14/2017

6. Measurement Data (continued)


6.4. Spurious Radiated Emissions (15.250 (d) (1) continued)

6.4.21. 960 MHz to 8 GHz Horizontal at 1 Meter (64M PRF, short packets)

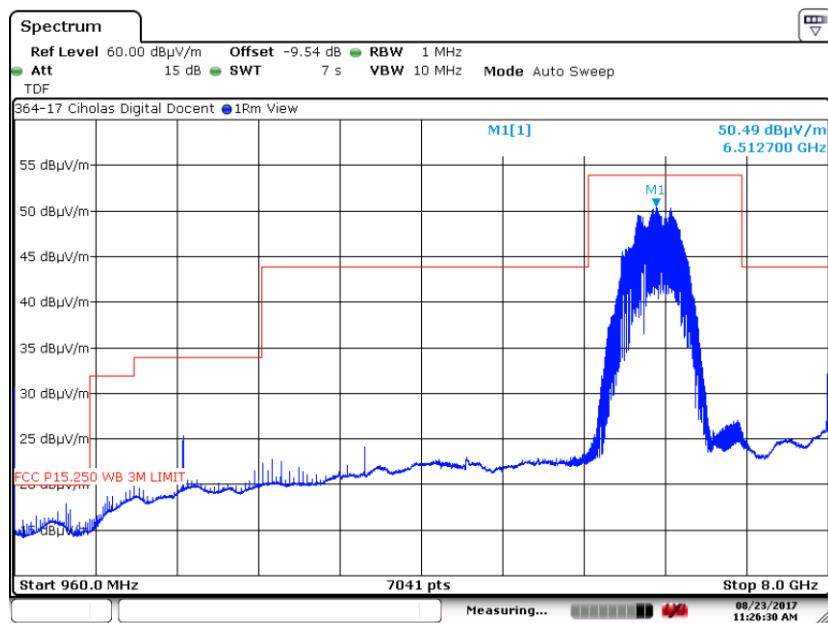

Date: 23.AUG.2017 11:26:30

6.4.22. 960 MHz to 8 GHz Vertical at 1 Meter (64M PRF, short packets)

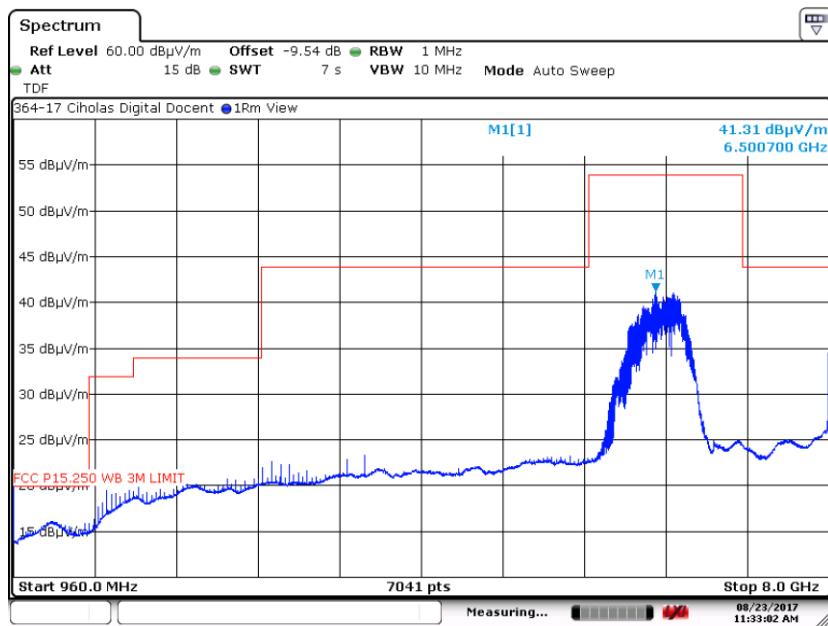

Date: 23.AUG.2017 11:33:03


Test Number: 364-17

Issue Date: 12/14/2017


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (1) continued)

6.4.23. 8 to 18 GHz Horizontal at 1 Meter

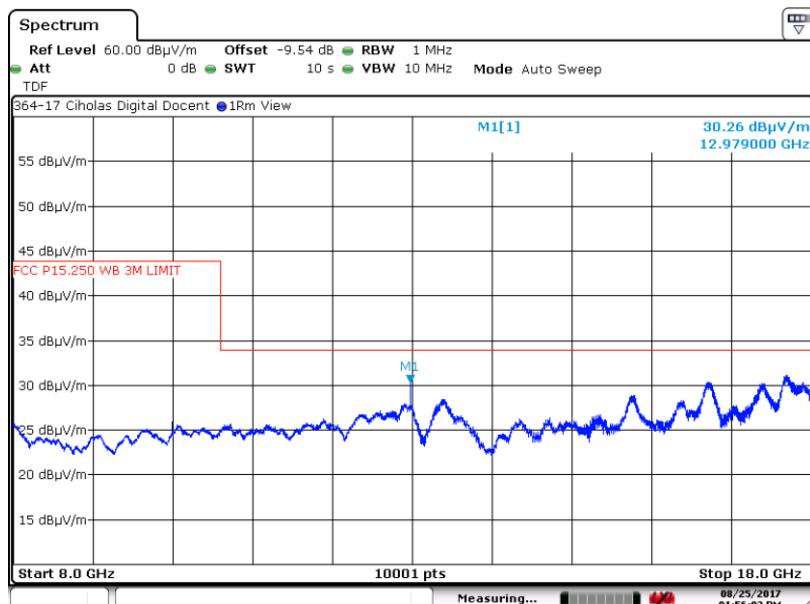

6.4.24. 8 to 18 GHz Vertical at 1 Meter

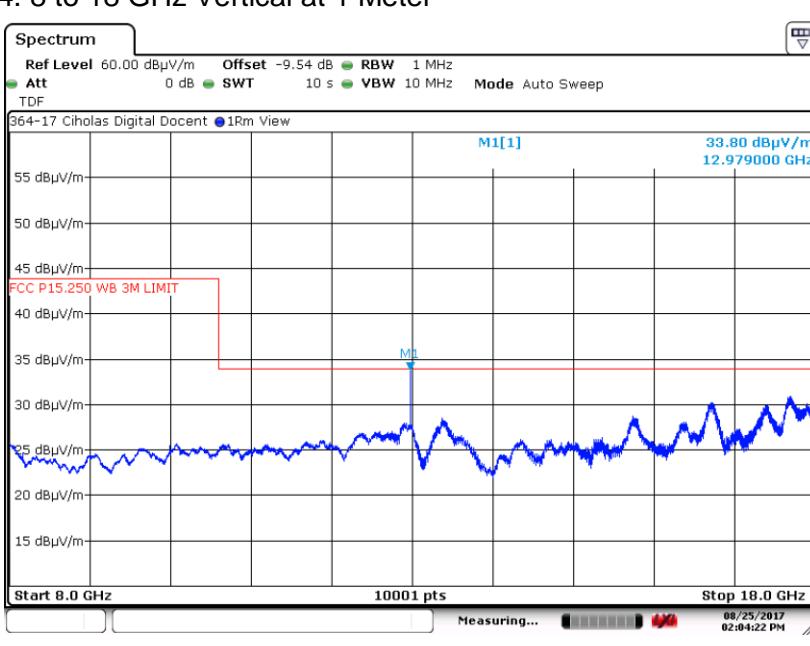


Test Number: 364-17

Issue Date: 12/14/2017


6. Measurement Data (continued)

6.4. Spurious Radiated Emissions (15.250 (d) (1) continued)

6.4.25. 18 to 40 GHz Horizontal at 0.3 Meter

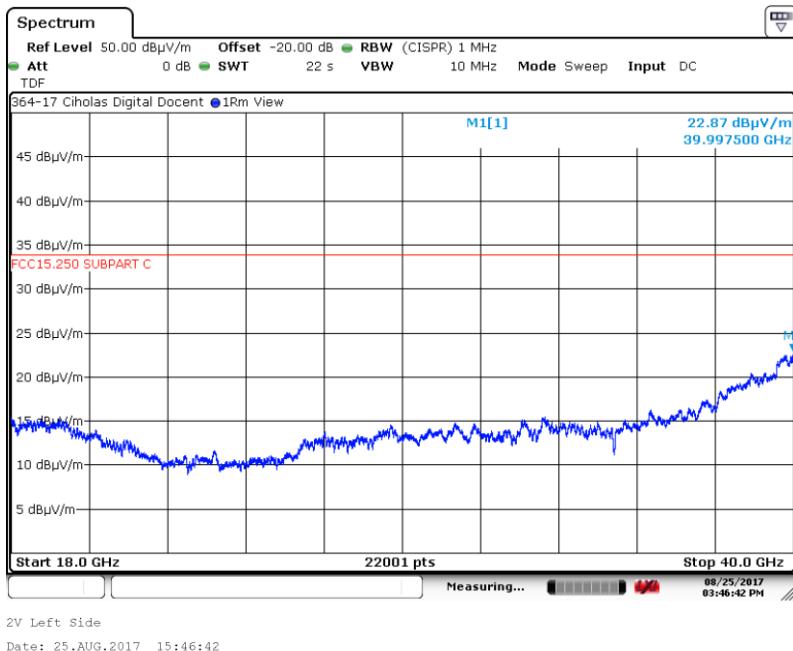

6.4.26. 18 to 40 GHz Vertical at 0.3 Meter

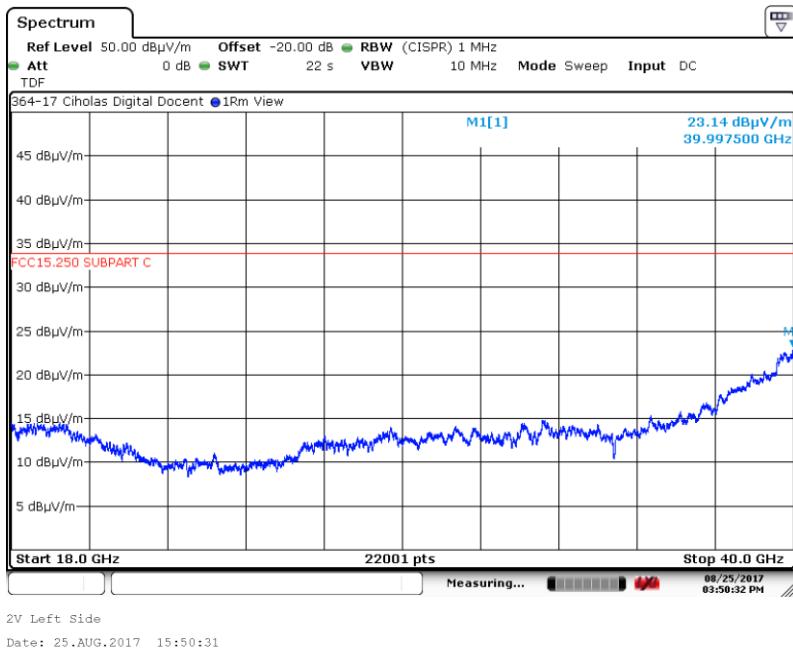

Test Number: 364-17**Issue Date: 12/14/2017**

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions in GPS Bands (15.250 (d) (2))

Requirement: In addition to the radiated emission limits specified in the table in paragraph (d) of this section, UWB transmitters operating under the provisions of this section shall not exceed the following average limits when measured using a resolution bandwidth of no less than 1 kHz:

Frequency (MHz)	EIRP (dBm)	EIRP at 3 Meters (dB μ V/m)
1164 - 1240	-85.3	9.9
1559 - 1610	-85.3	9.9

6.5.1. Measurement & Equipment Setup

EMI Receiver IF Bandwidth: 1 kHz
EMI Receiver Avg Bandwidth: 10 kHz
Detector Function: RMS

6.5.2. Test Procedure

Test measurements were made in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

6.5.3. 1164 to 1240 MHz & 1559 to 1610 MHz

There were no broadband emissions related to the UWB transmitter. Measured signals were narrowband and related to the microprocessor / clocks and do not fall under the requirements of this section. Measurements were made at 3 Meters and the -85.3 dBm limit was converted to a field strength limit of 9.9 dB μ V/m using a distance correction factor of 95.2.

NOTE: Special Code was written so that it could be verified that with the transmitter turned off, that these narrowband digital signals remained in the GPS bands. The signals in the plots on the following pages are related to digital circuitry and falls under the requirements of 15.209.


Test Number: 364-17
Issue Date: 12/14/2017

6. Measurement Data (continued)

6.5. Spurious Radiated Emissions in GPS Bands (15.250 (d) (2))


6.5.4 1164 to 1240 MHz Band

6.5.4.1 Horizontal Measurement Polarity 1164 to 1240 MHz

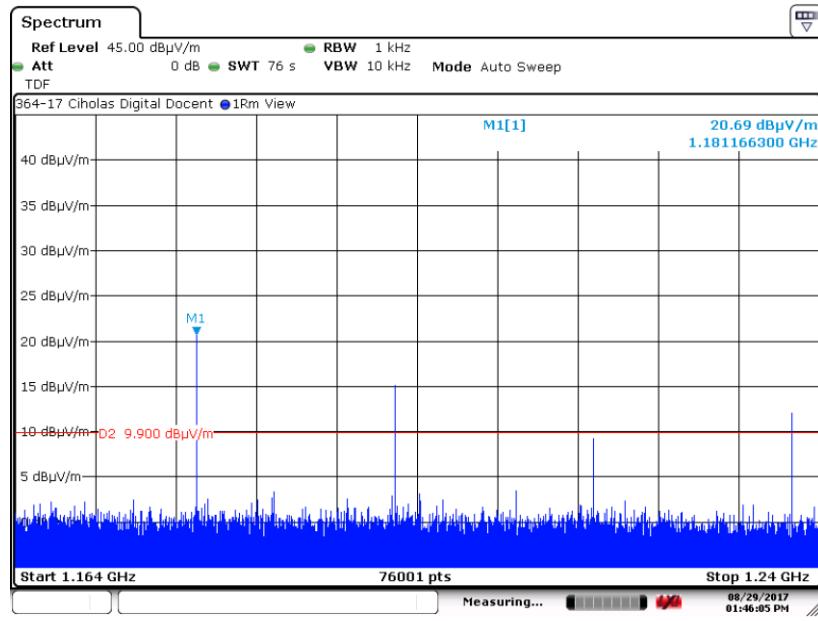

Date: 29.AUG.2017 13:46:05

6.5.4.2 Vertical Measurement Polarity 1164 to 1240 MHz

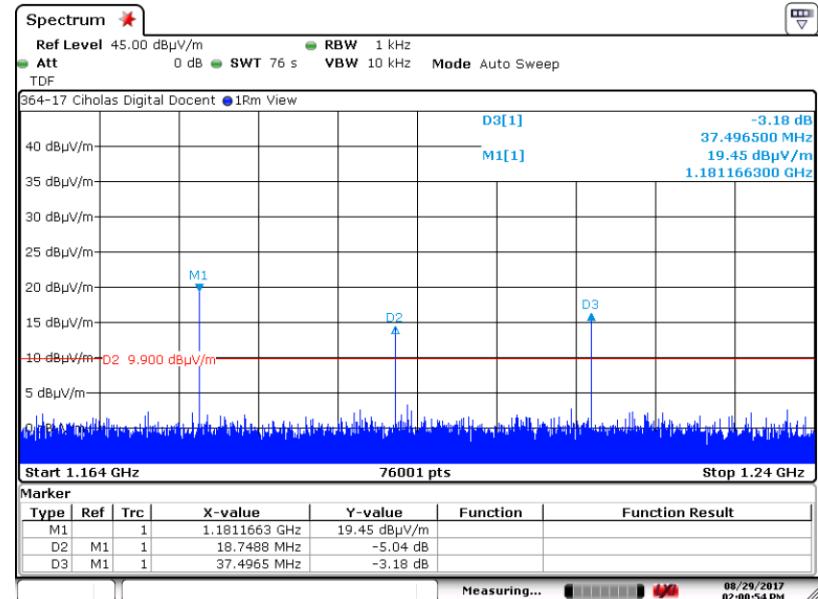

Date: 29.AUG.2017 14:00:55

Test Number: 364-17


Issue Date: 12/14/2017

6. Measurement Data (continued)


6.5. Spurious Radiated Emissions in GPS Bands (15.250 (d) (2) continued)

6.5.5 1559 to 1610 MHz Band

6.5.5.1 Horizontal Measurement Polarity 1559 to 1610 MHz

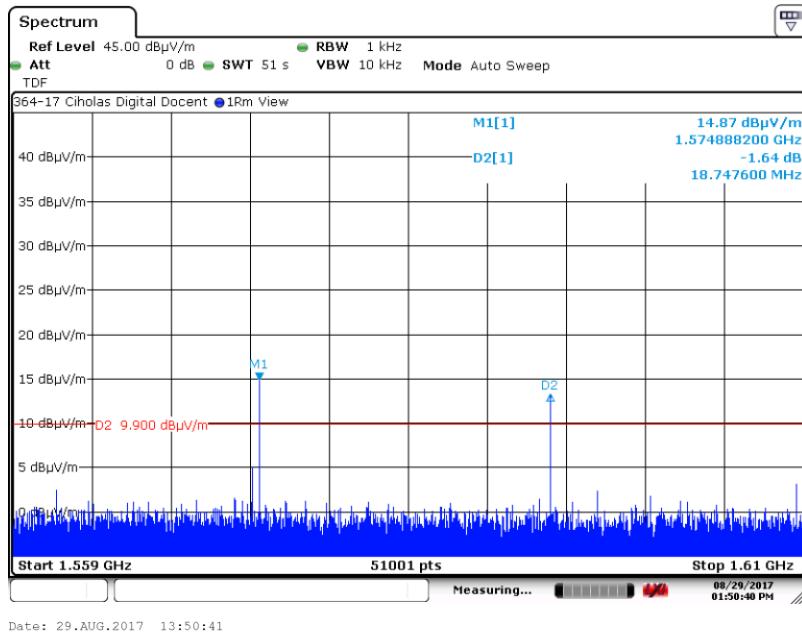

6.5.5.2 Vertical Measurement Polarity 1559 to 1610 MHz

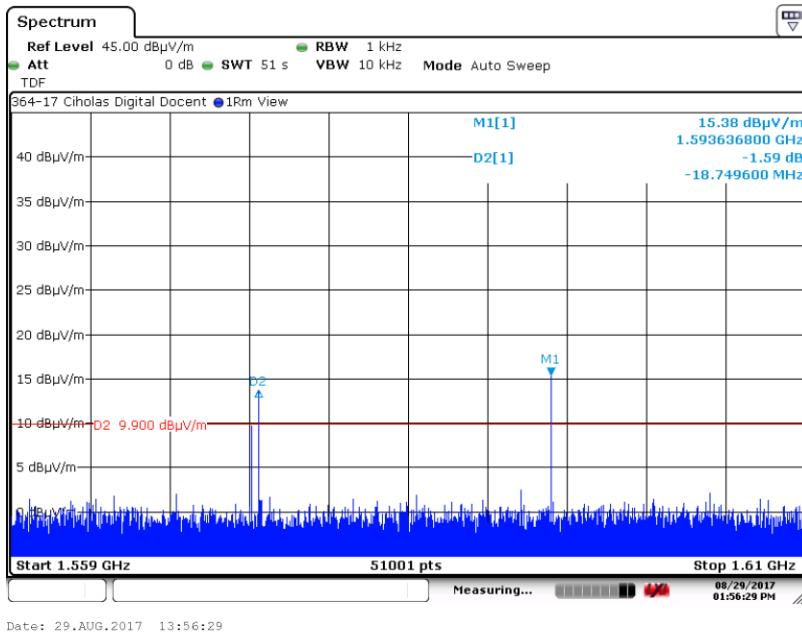

Test Number: 364-17
Issue Date: 12/14/2017

6. Measurement Data (continued)

6.6. RMS Power in a 1 MHz Bandwidth (15.250 (d) (1))

Requirement: The limit for operation in the 5925 to 7250 MHz band is -41.3 dBm EIRP.

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dB μ V/m)	(dB μ V/m)	(dB)	H/V	cm	Deg	
6.5929	53.78	53.90	-0.12	H	153	111	Compliant


Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Preamplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, EIRP = E_{meas} + 20 log (d_{meas}) - 104.7; d_{meas} = 3

EIRP (dBm) = E_{meas} (dB μ V/m) - 95.2

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
6.5929	-41.42	-41.30	-0.12	H	153	111	Compliant

6.6.1. Plot of RMS Power at 3 Meters (16M PRF, long packets)

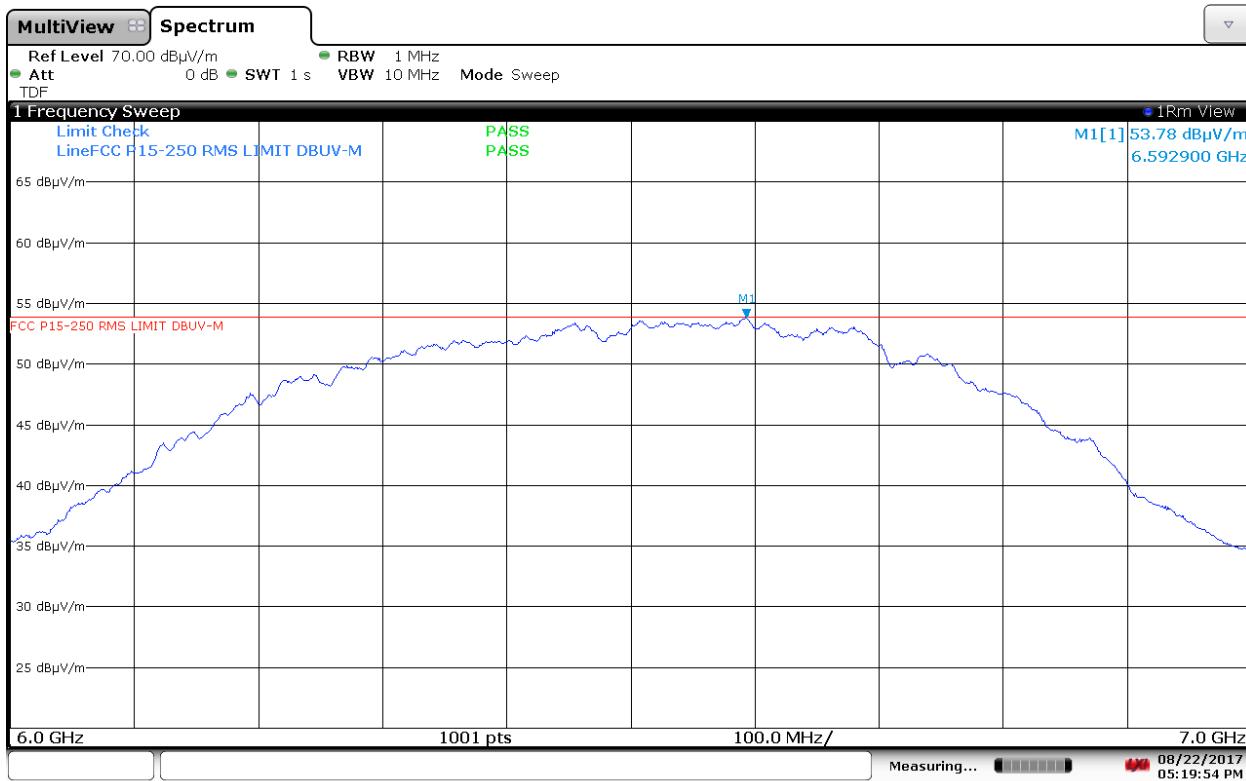

05:19:55 PM 08/22/2017

Test Number: 364-17
Issue Date: 12/14/2017

6. Measurement Data (continued)

6.6. RMS Power in a 1 MHz Bandwidth (15.250 (d) (1) continued)

Requirement: The limit for operation in the 5925 to 7250 MHz band is -41.3 dBm EIRP.

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dB μ V/m)	(dB μ V/m)	(dB)	H/V	cm	Deg	
6.4900	47.50	53.90	-6.40	H	153	111	Compliant


Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Preamplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, EIRP = E_{meas} + 20 log (d_{meas}) - 104.7; d_{meas} = 3

EIRP (dBm) = E_{meas} (dB μ V/m) - 95.2

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
6.4900	-47.70	-41.30	-6.40	H	153	111	Compliant

6.6.2. Plot of RMS Power at 3 Meters (16M PRF, short packets)

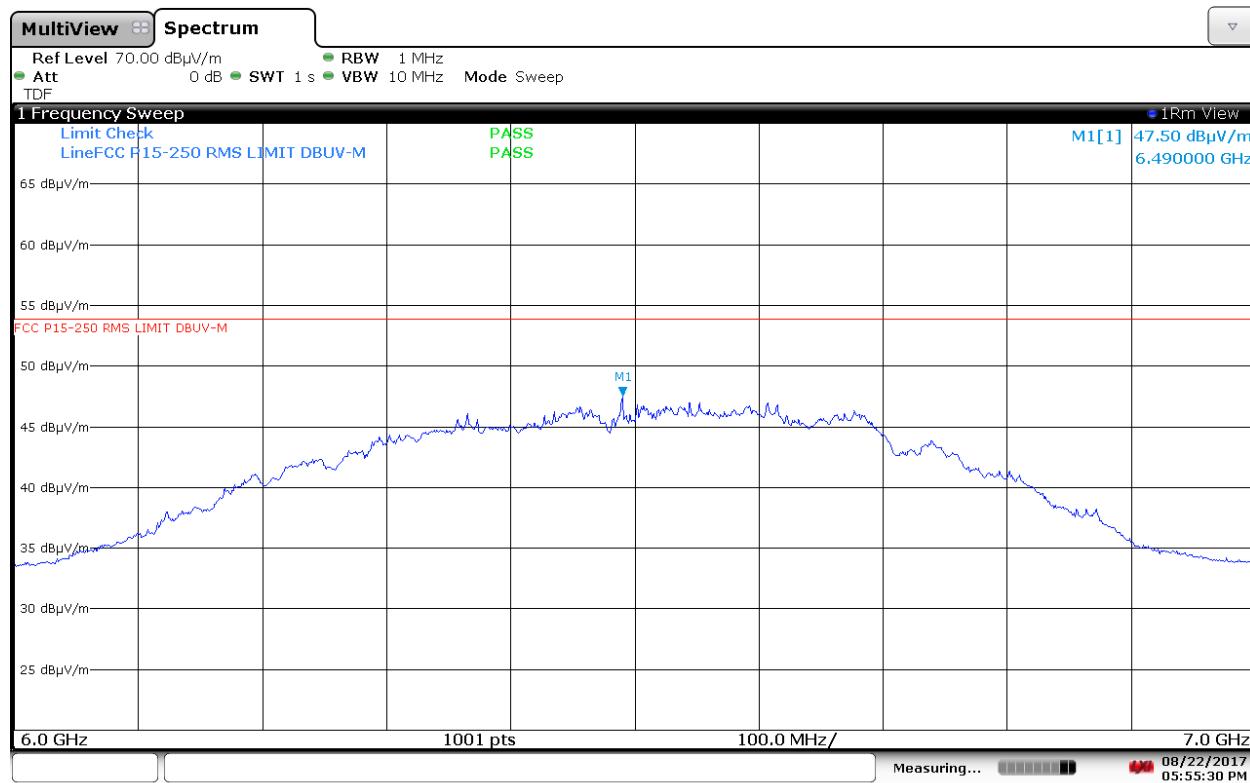

05:55:30 PM 08/22/2017

Test Number: 364-17
Issue Date: 12/14/2017

6. Measurement Data (continued)

6.6. RMS Power in a 1 MHz Bandwidth (15.250 (d) (1) continued)

Requirement: The limit for operation in the 5925 to 7250 MHz band is -41.3 dBm EIRP.

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dB μ V/m)	(dB μ V/m)	(dB)	H/V	cm	Deg	
6.5909	53.59	53.90	-0.31	H	153	111	Compliant


Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Preamplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, EIRP = E_{meas} + 20 log (d_{meas}) - 104.7; d_{meas} = 3

EIRP (dBm) = E_{meas} (dB μ V/m) - 95.2

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
6.5909	-41.61	-41.30	-0.31	H	153	111	Compliant

6.6.3. Plot of RMS Power at 3 Meters (64M PRF, long packets)

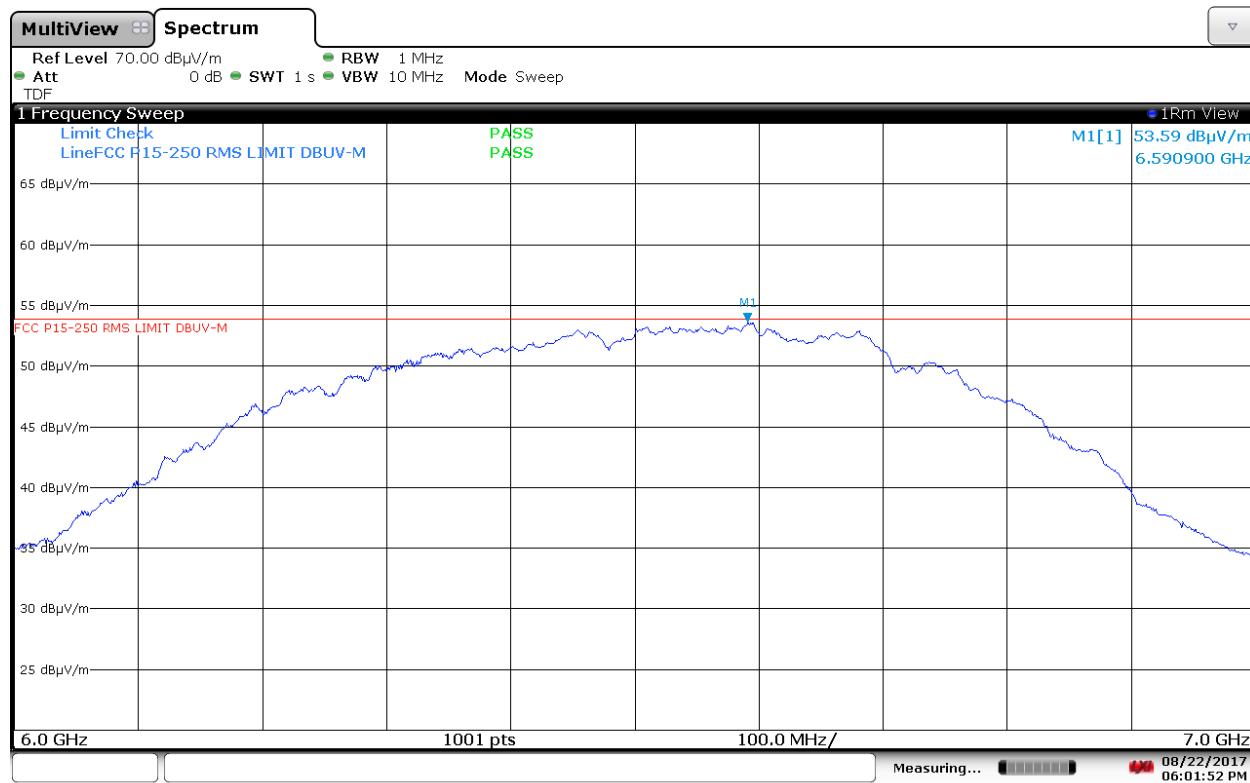

06:01:53 PM 08/22/2017

Test Number: 364-17
Issue Date: 12/14/2017

6. Measurement Data (continued)

6.6. RMS Power in a 1 MHz Bandwidth (15.250 (d) (1) continued)

Requirement: The limit for operation in the 5925 to 7250 MHz band is -41.3 dBm EIRP.


Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dB μ V/m)	(dB μ V/m)	(dB)	H/V	cm	Deg	
6.5899	51.40	53.90	-2.50	H	153	111	Compliant

Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Preamplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, EIRP = E_{meas} + 20 log (d_{meas}) - 104.7; d_{meas} = 3
 EIRP (dBm) = E_{meas} (dB μ V/m) - 95.2

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
6.5899	-43.80	-41.30	-2.50	H	153	111	Compliant

6.6.4. Plot of RMS Power at 3 Meters (64M PRF, short packets)

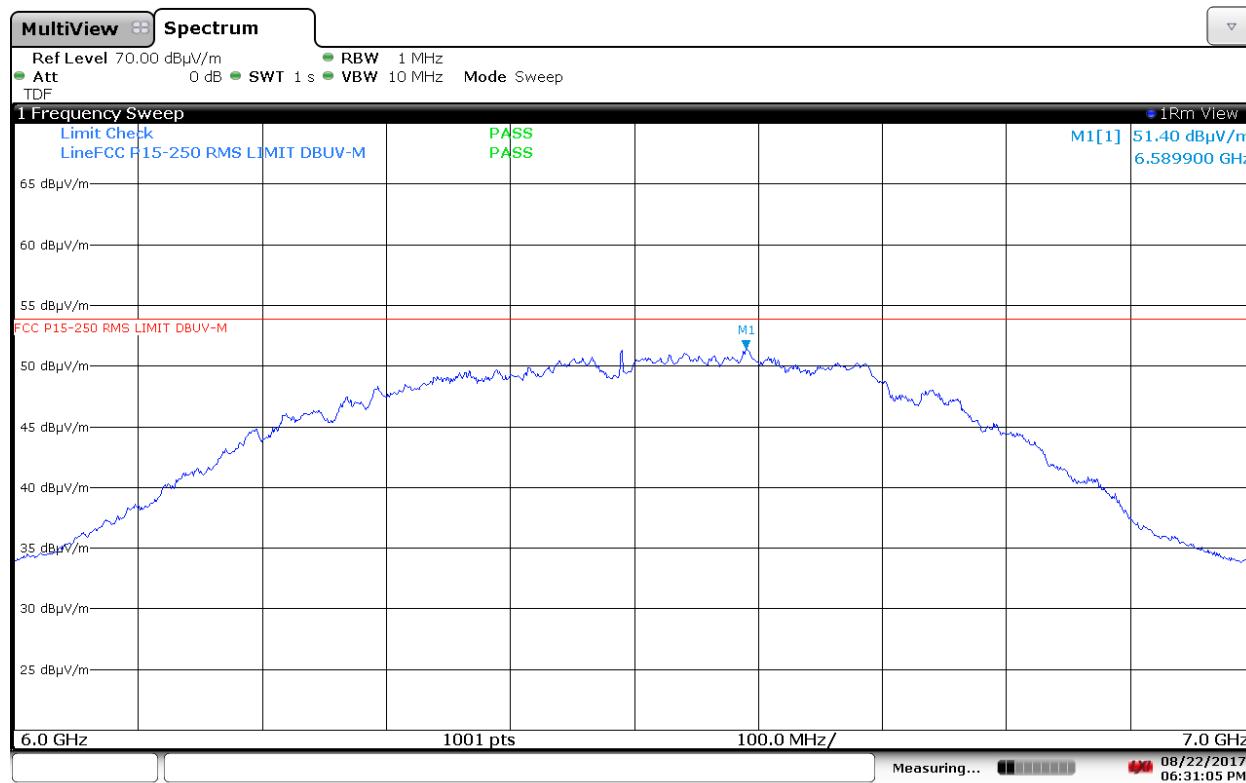

06:31:06 PM 08/22/2017

Test Number: 364-17
Issue Date: 12/14/2017

6. Measurement Data (continued)

6.7. Peak Emissions in a 50 MHz Bandwidth (15.250 (d) (3))

Requirement: There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP.


Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dB μ V/m)	(dB μ V/m)	(dB)	H/V	cm	Deg	
6.5080	92.22	95.20	-2.98	H	153	111	Compliant

Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Preamplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log (d_{meas}) - 104.7$; $d_{meas} = 3$
 $EIRP (\text{dBm}) = E_{meas} (\text{dB}\mu\text{V/m}) - 95.2$

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dBm)	(dBm)	(dB)	H/V	cm	Deg	
6.5080	-2.98	0.00	-2.98	H	153	111	Compliant

6.7.1 Plot of Peak Power at 3 Meters (16M PRF, long packets)

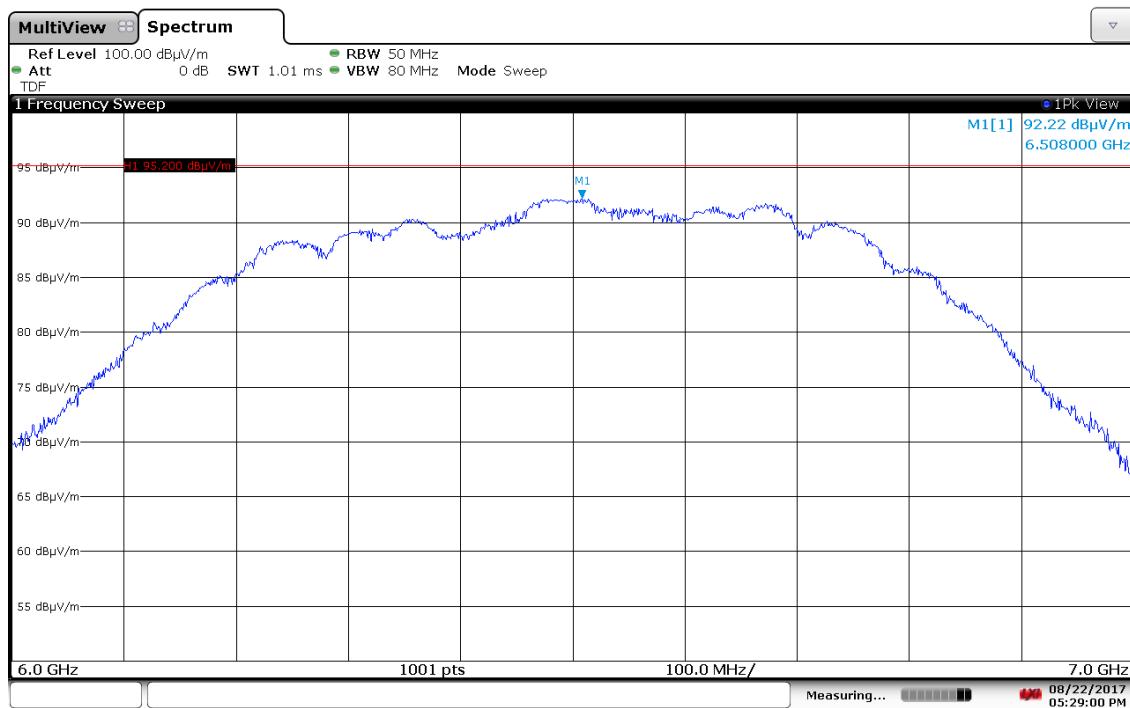

05:29:00 PM 08/22/2017

08/22/2017
05:29:00 PM

Test Number: 364-17
Issue Date: 12/14/2017

6. Measurement Data (continued)

6.7. Peak Emissions in a 50 MHz Bandwidth (15.250 (d) (3) continued)

Requirement: There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP.

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dB μ V/m)	(dB μ V/m)	(dB)	H/V	cm	Deg	
6.4790	94.70	95.20	-0.50	H	153	111	Compliant


Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Preamplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log (d_{meas}) - 104.7$; $d_{meas} = 3$

$$EIRP (\text{dBm}) = E_{meas} (\text{dB}\mu\text{V/m}) - 95.2$$

Frequency (GHz)	Amplitude ¹ (dBm)	Limit (dBm)	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	EIRP	EIRP	(dB)	H/V	cm	Deg	
6.4790	-0.50	0.00	-0.50	H	153	111	Compliant

6.7.2 Plot of Peak Power at 3 Meters (16M PRF, short packets)

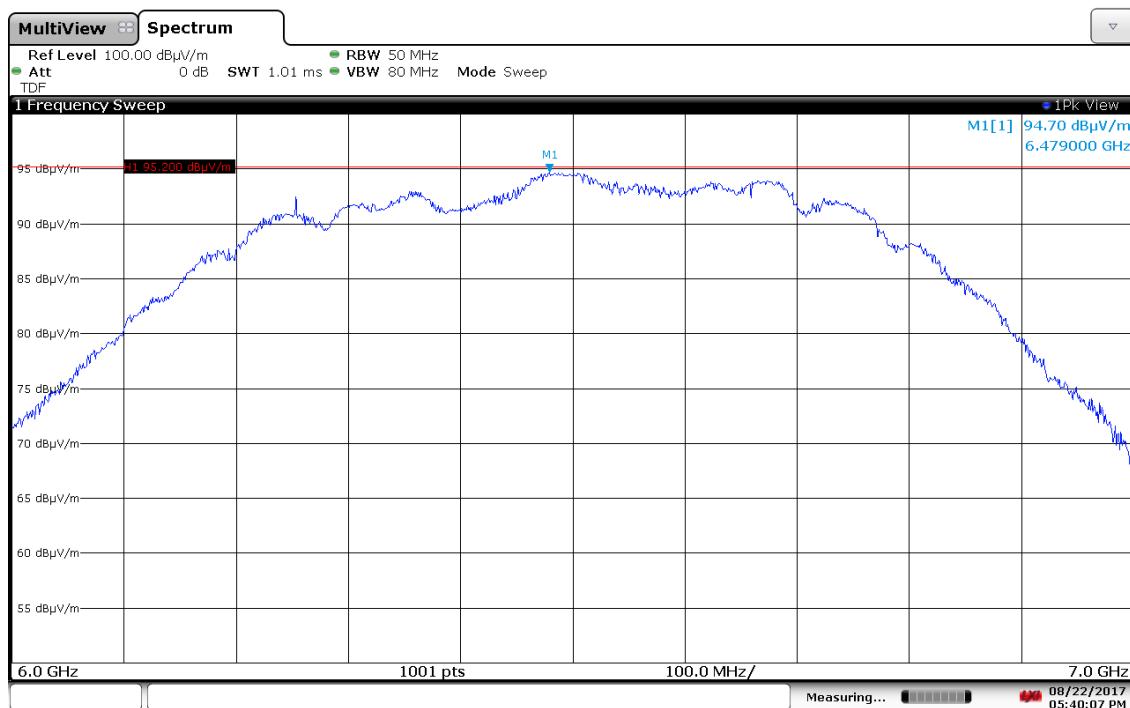

05:40:07 PM 08/22/2017

 08/22/2017
05:40:07 PM

Test Number: 364-17
Issue Date: 12/14/2017

6. Measurement Data (continued)

6.7. Peak Emissions in a 50 MHz Bandwidth (15.250 (d) (3) continued)

Requirement: There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP.

Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dB μ V/m)	(dB μ V/m)	(dB)	H/V	cm	Deg	
6.5040	87.37	95.20	-7.83	H	153	111	Compliant


Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Preamplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log (d_{meas}) - 104.7$; $d_{meas} = 3$

$$EIRP (\text{dBm}) = E_{meas} (\text{dB}\mu\text{V/m}) - 95.2$$

Frequency (GHz)	Amplitude ¹ (dBm)	Limit (dBm)	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	EIRP	EIRP	(dB)	H/V	cm	Deg	
6.5040	-7.83	0.00	-7.83	H	153	111	Compliant

6.7.3 Plot of Peak Power at 3 Meters (64M PRF, long packets)

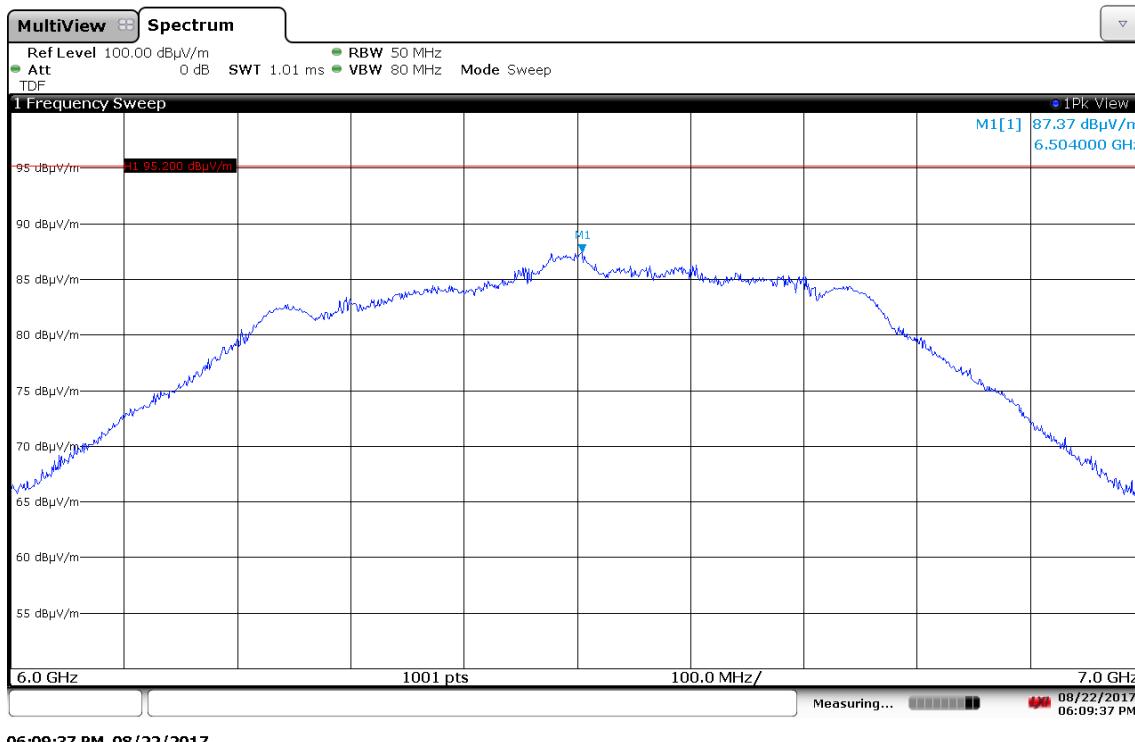

Test Number: 364-17
Issue Date: 12/14/2017

6. Measurement Data (continued)

6.7. Peak Emissions in a 50 MHz Bandwidth (15.250 (d) (3) continued)

Requirement: There is a limit on the peak level of the emissions contained within a 50 MHz bandwidth centered on the frequency at which the highest radiated emission occurs, f_M . That limit is 0 dBm EIRP.


Frequency (GHz)	Amplitude ¹	Limit	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	(dB μ V/m)	(dB μ V/m)	(dB)	H/V	cm	Deg	
6.5020	94.55	95.20	-0.65	H	153	111	Compliant

Notes: ¹ Antenna Factor (AF), Cable Factor (CF) and External Preamplifier Gain (PAG) have been entered into the analyzer as transducer factors.

Equation (22) from ANSI C63.10-2013, $EIRP = E_{meas} + 20 \log (d_{meas}) - 104.7$; $d_{meas} = 3$
 $EIRP (\text{dBm}) = E_{meas} (\text{dB}\mu\text{V/m}) - 95.2$

Frequency (GHz)	Amplitude ¹ (dBm)	Limit (dBm)	Margin	Ant Polarity	Ant Height	Turntable Azimuth	Result
	EIRP	EIRP	(dB)	H/V	cm	Deg	
6.5020	-0.65	0.00	-0.65	H	153	111	Compliant

6.7.4 Plot of Peak Power at 3 Meters (64M PRF, short packets)

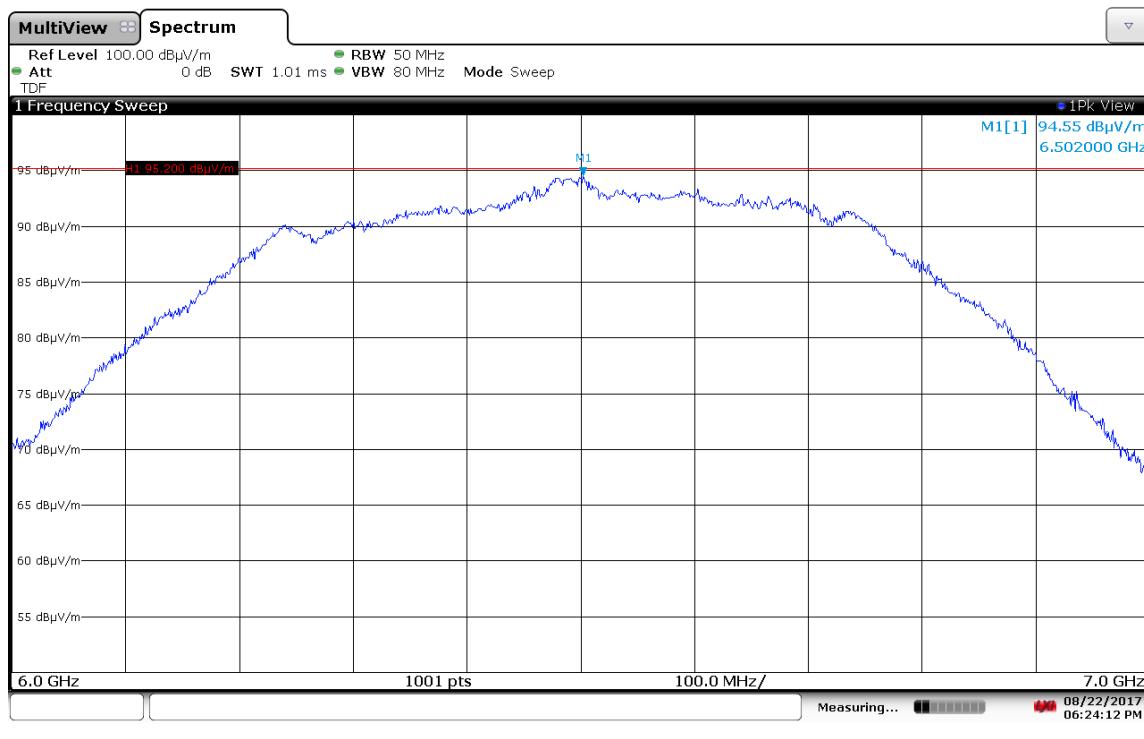

Test Number: 364-17

Issue Date: 12/14/2017

6. Measurement Data (continued)

6.8 Conducted Emissions Test Setup

6.8.1. Regulatory Limit: FCC Part 15.207

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

6.8.2 Measurement Equipment and Software Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due
EMI Receiver	Hewlett Packard	8546A	3330A00115	12/4/2018
RF Filter Section	Hewlett Packard	85460A	3325A00121	12/4/2018
LISN	EMCO	3825/2	9109-1860	11/17/2017
Manufacturer	Software Description		Title/Model #	Rev.
Compliance Worldwide	Test Report Generation Software		Test Report Generator	1.0

6.8.3. Measurement & Equipment Setup

Test Date:	12/13/2017
Test Engineer:	Brian Breault
Site Temperature (°C):	21.3
Relative Humidity (%RH):	38
Frequency Range:	0.15 MHz to 30 MHz
EMI Receiver IF Bandwidth:	9 kHz
EMI Receiver Avg Bandwidth:	30 kHz
Detector Functions:	Peak, Quasi-Peak. & Average

6.8.4. Test Procedure

Test measurements were made in accordance with ANSI C63.4-2014, Standard Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronics Equipment in the Range of 9 kHz to 40 GHz.

Test Number: 364-17
Issue Date: 12/14/2017


6. Measurement Data (continued)

6.9 Conducted Emissions Test Results

6.9.1 120 Volts, 60 Hz Phase

Test No.: 338-17, 120 Volts, 60 Hz Phase

FCC Part 15.207

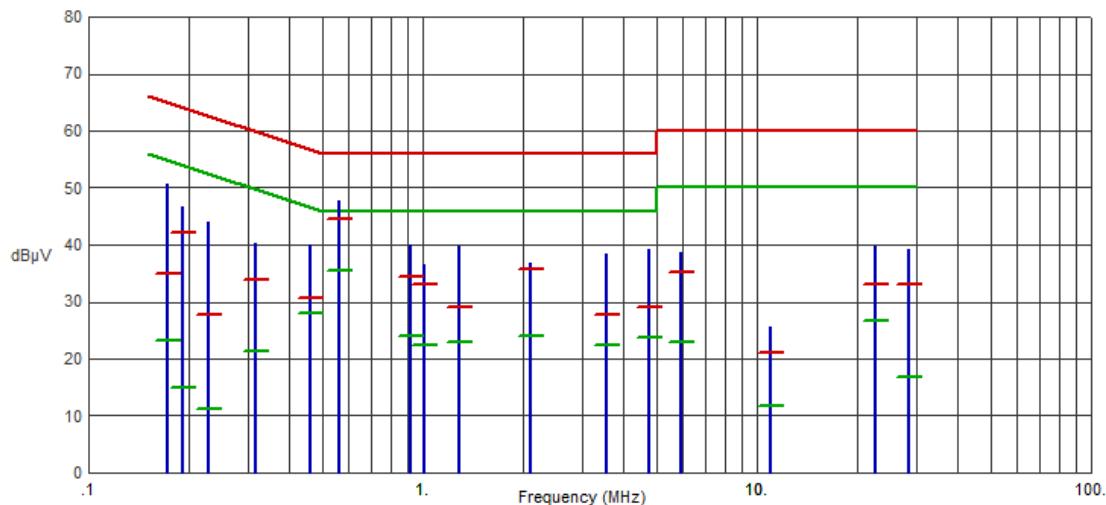

Frequency (MHz)	Pk Amp (dBµV)	QP Amp (dBµV)	QP Limit (dBµV)	QP Margin (dB)	Avg Amp (dBµV)	Avg Limit (dBµV)	Avg Margin (dB)	Comments
.1727	50.60	34.81	64.83	-30.02	23.11	54.83	-31.72	
.1911	46.74	42.03	63.99	-21.96	14.90	53.99	-39.09	
.2278	43.99	27.77	62.53	-34.76	11.31	52.53	-41.22	
.3149	40.23	33.76	59.84	-26.08	21.44	49.84	-28.40	
.4607	39.92	30.66	56.68	-26.02	28.03	46.68	-18.65	
.5648	47.68	44.63	56.00	-11.37	35.37	46.00	-10.63	
.9162	39.98	34.36	56.00	-21.64	23.91	46.00	-22.09	
1.0087	36.47	33.13	56.00	-22.87	22.35	46.00	-23.65	
1.2913	39.78	29.11	56.00	-26.89	23.05	46.00	-22.95	
2.0993	36.82	35.82	56.00	-20.18	24.11	46.00	-21.89	
3.5381	38.41	27.86	56.00	-28.14	22.30	46.00	-23.70	
4.7355	39.28	28.94	56.00	-27.06	23.70	46.00	-22.30	
5.9209	38.55	35.21	60.00	-24.79	22.90	50.00	-27.10	
10.9735	25.58	21.10	60.00	-38.90	11.86	50.00	-38.14	
22.5996	39.63	33.06	60.00	-26.94	26.79	50.00	-23.21	
28.5283	39.25	33.04	60.00	-26.96	16.75	50.00	-33.25	

Test Number: 364-17
Issue Date: 12/14/2017


6. Measurement Data (continued)

6.9. Conducted Emissions Test Results (continued)

6.9.2. 120 Volts, 60 Hz Neutral

Test No.: 338-17, 120 Volts, 60 Hz Neutral

FCC Part 15.207

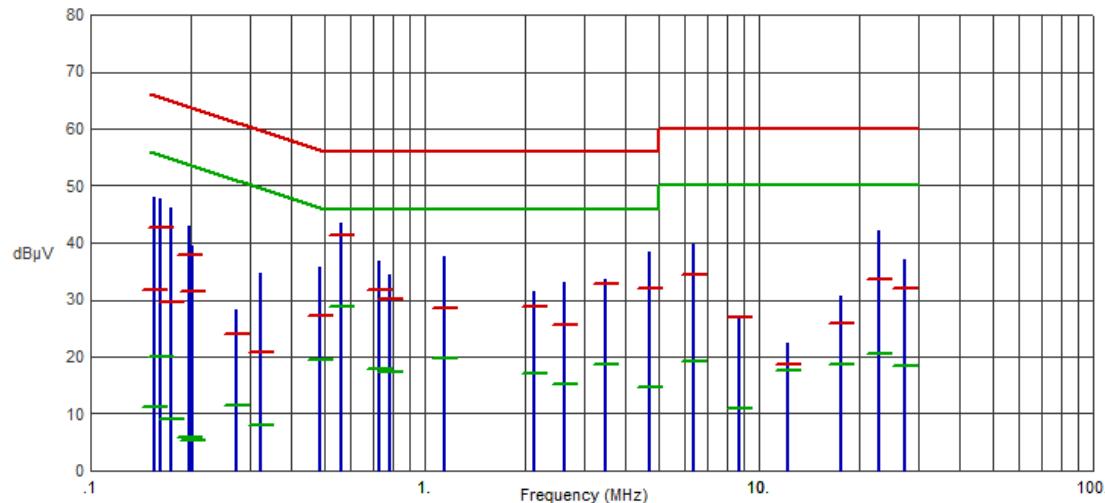

Frequency (MHz)	Pk Amp (dB μ V)	QP Amp (dB μ V)	QP Limit (dB μ V)	QP Margin (dB)	Avg Amp (dB μ V)	Avg Limit (dB μ V)	Avg Margin (dB)	Comments
.1556	48.11	31.71	65.70	-33.99	11.15	55.70	-44.55	
.1623	47.70	42.61	65.35	-22.74	20.12	55.35	-35.23	
.1733	46.03	29.68	64.80	-35.12	9.13	54.80	-45.67	
.1975	42.99	37.75	63.72	-25.97	5.84	53.72	-47.88	
.2026	39.40	31.35	63.50	-32.15	5.27	53.50	-48.23	
.2736	28.33	23.96	61.01	-37.05	11.35	51.01	-39.66	
.3242	34.66	20.77	59.60	-38.83	7.97	49.60	-41.63	
.4852	35.69	27.14	56.25	-29.11	19.45	46.25	-26.80	
.5645	43.45	41.27	56.00	-14.73	28.72	46.00	-17.28	
.7302	36.68	31.67	56.00	-24.33	17.78	46.00	-28.22	
.7821	34.41	30.14	56.00	-25.86	17.28	46.00	-28.72	
1.1472	37.69	28.53	56.00	-27.47	19.75	46.00	-26.25	
2.1151	31.47	28.91	56.00	-27.09	17.05	46.00	-28.95	
2.6117	33.05	25.62	56.00	-30.38	15.18	46.00	-30.82	
3.4696	33.67	32.67	56.00	-23.33	18.76	46.00	-27.24	
4.6824	38.34	31.96	56.00	-24.04	14.67	46.00	-31.33	
6.3448	39.78	34.52	60.00	-25.48	19.24	50.00	-30.76	
8.7488	27.08	26.94	60.00	-33.06	10.92	50.00	-39.08	
12.2204	22.44	18.80	60.00	-41.20	17.47	50.00	-32.53	
17.6661	30.74	25.95	60.00	-34.05	18.63	50.00	-31.37	
22.7435	42.17	33.50	60.00	-26.50	20.50	50.00	-29.50	
27.3340	37.03	31.97	60.00	-28.03	18.41	50.00	-31.59	

Test Number: 364-17

Issue Date: 12/14/2017

6. Measurement Data (continued)

6.10. Public Exposure to Radio Frequency Energy Levels (1.1307 (b)(1))

6.10.1 RF Exposure for devices that operate above 6 GHz

Center Frequency (GHz)	MPE Distance (cm)	DUT Output Power (dBm)	DUT Antenna Gain (dBi)	Power Density		FCC Limit (mW/cm ²)
				(mW/cm ²)	(W/m ²)	
(1)	(2)	(3)		(4)		(5)
6.508	5	-2.98	0.0	0.0016027	0.0160269	1
6.479	5	-0.50	0.0	0.0028369	0.0283694	1
6.504	5	-7.83	0.0	0.0005246	0.0052463	1
6.502	5	-0.65	0.0	0.0027406	0.0274063	1

$$PD = \frac{OP + AG}{(4 \times \pi \times d^2)}$$

1. Reference CFR 2.1093(b): For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 5 centimeters of the body of the user.
2. Section 6.7 of this test report.
3. Data supplied by the client.
4. Power density is calculated from field strength measurement and antenna gain.
5. Reference CFR 1.1310, Table 1: Limits for Maximum Permissible Exposure (MPE), Section (B): Limits for General Population/Uncontrolled Exposure.
6. Reference IC RSS-102 Section 4 Table 4 RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)

7. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with the Federal Communications Commission (FCC) and Industry Canada standards. Through our American Association for Laboratory Accreditation (A2LA) ISO Guide 17025:2005 Accreditation our test sites are designated with the FCC (designation number **US1091**), Industry Canada (file number **IC 3023A-1**) and VCCI (Member number 3168) under registration number A-0274.

Compliance Worldwide is also designated as a Phase 1 CAB under APEC-MRA (US0132) for Australia/New Zealand AS/NZS CISPR 22, Chinese-Taipei (Taiwan) BSMI CNS 13438 and Korea (RRA) KN 11, KN 13, KN 14-1, KN 22, KN 32, KN 61000-6-3, KN 61000-6-4.

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane required by EN 55022. A second conducted emissions site is also located in the basement of the OATS site with a 2.3 x 2.5 meter ground plane and a 2.4 x 2.4 meter vertical wall.

Both sites are designed to test products or systems 1.5 meters W x 1.5 meters L x 2.0 meters H, floor standing or table top.

8. Test Images

8.1. Spurious and Harmonic Emissions – 10 kHz to 1 GHz Front



Test Number: 364-17

Issue Date: 12/14/2017

8. Test Images

8.2. Spurious and Harmonic Emissions – 10 kHz to 30 MHz Rear



Test Number: 364-17

Issue Date: 12/14/2017

8. Test Images

8.3. Spurious and Harmonic Emissions – 30 MHz to 1 GHz Rear



Test Number: 364-17

Issue Date: 12/14/2017

8. Test Images

8.4. Spurious and Harmonic Emissions – 1 to 18 GHz Front



Test Number: 364-17

Issue Date: 12/14/2017

8. Test Images

8.5. Spurious and Harmonic Emissions – 1 to 18 GHz Rear



Test Number: 364-17

Issue Date: 12/14/2017

8. Test Images

8.5. Spurious and Harmonic Emissions – 18 to 40 GHz Side



Test Number: 364-17

Issue Date: 12/14/2017

8. Test Images

8.7. Conducted Emissions (Front)



Test Number: 364-17

Issue Date: 12/14/2017

8. Test Images

8.8. Conducted Emissions (Rear)



Test Number: 364-17

Issue Date: 12/14/2017

8. Test Images

8.9. Frequency Stability (Setup)

