




GPRS 850-HCH-EDGE

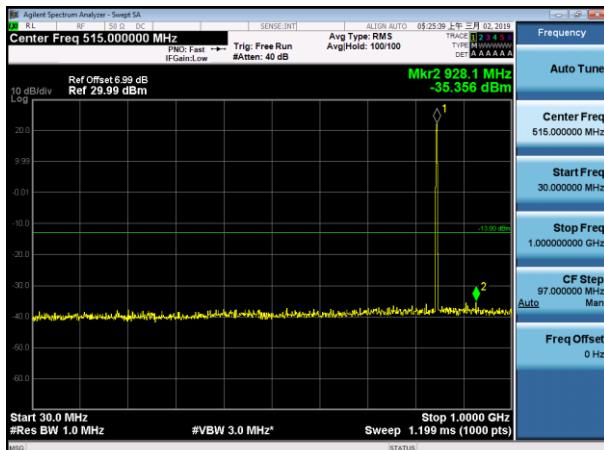


GPRS 850-HCH-EDGE

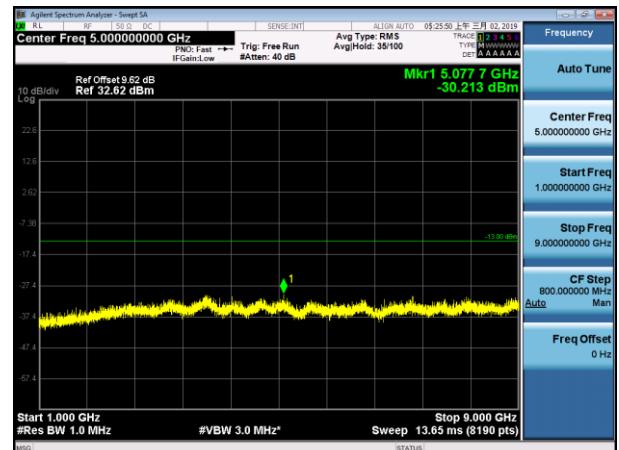


GPRS 1900-LCH-GSM

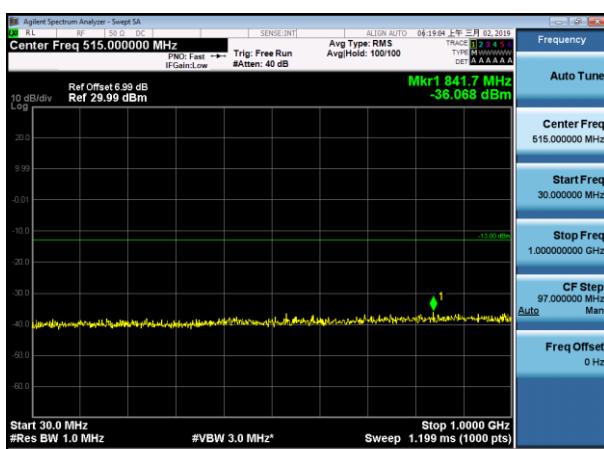


GPRS 1900-LCH-GSM


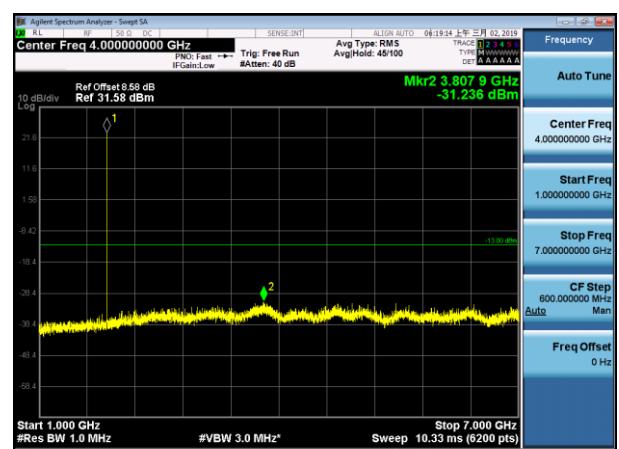




GPRS 1900-LCH-GSM

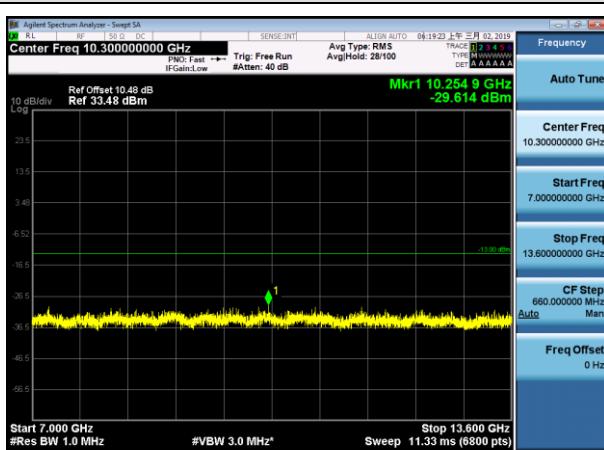


GPRS 1900-LCH-GSM

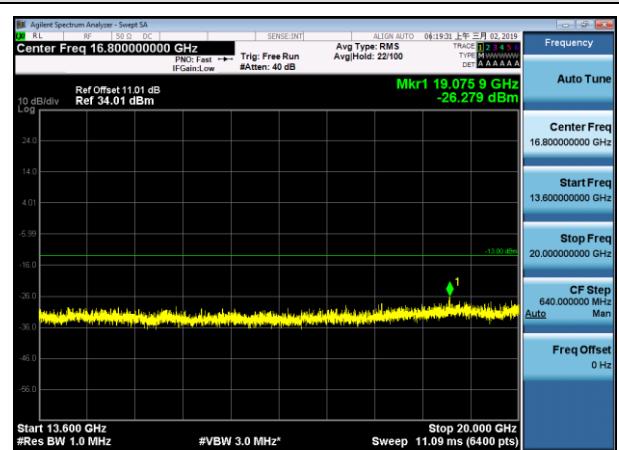

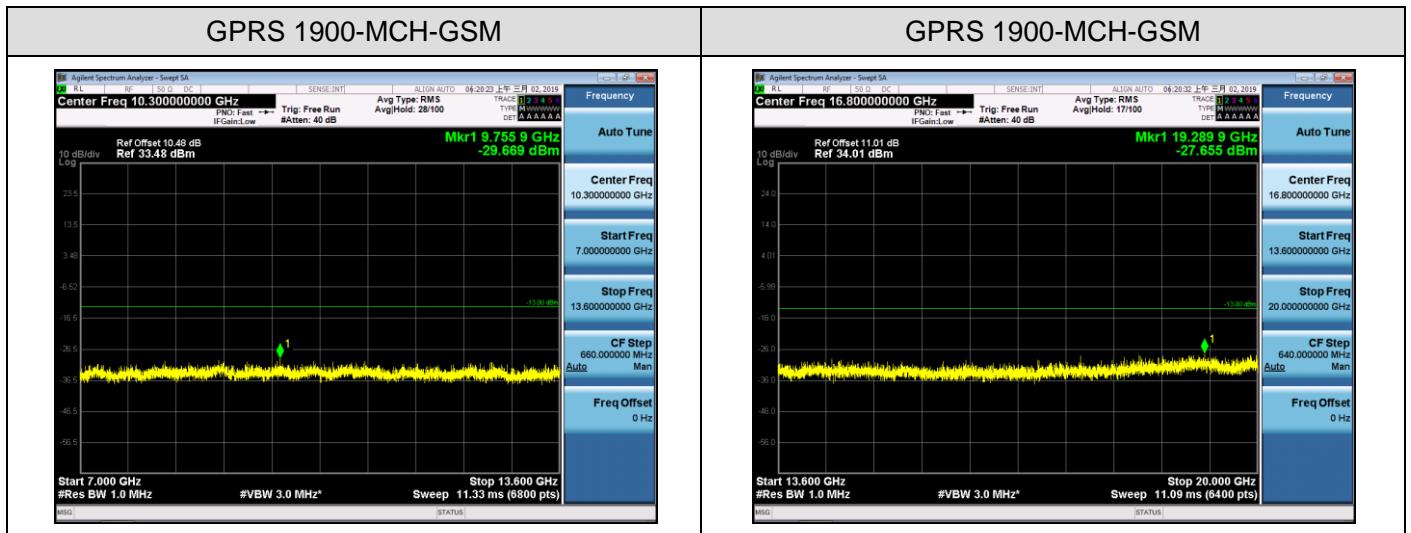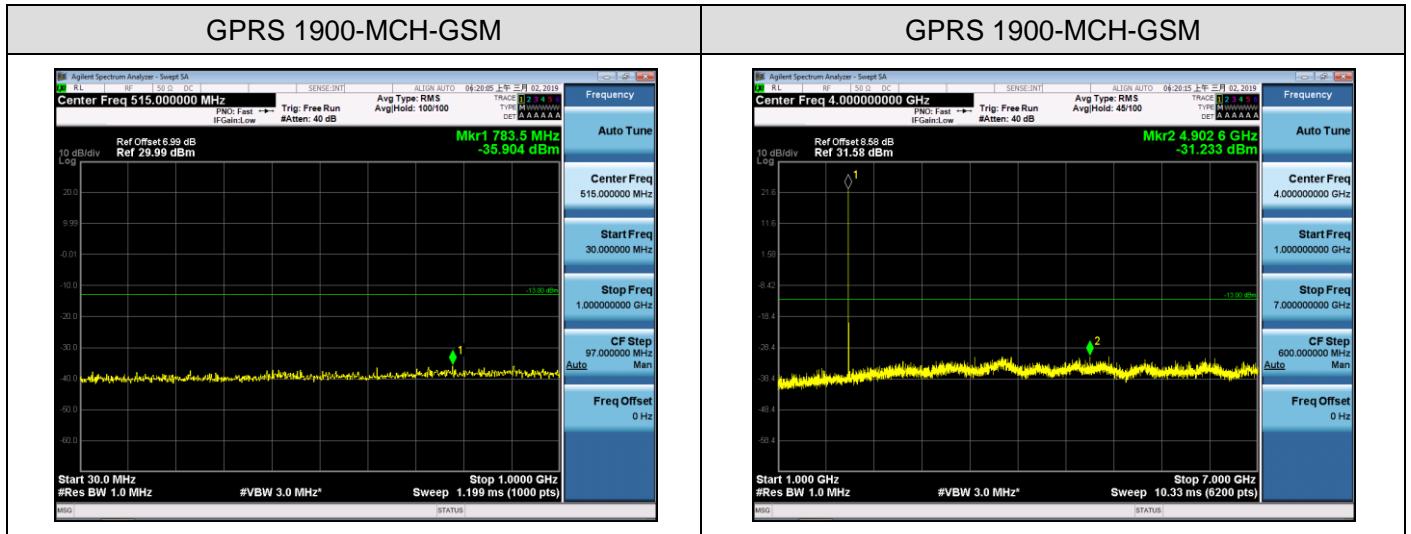


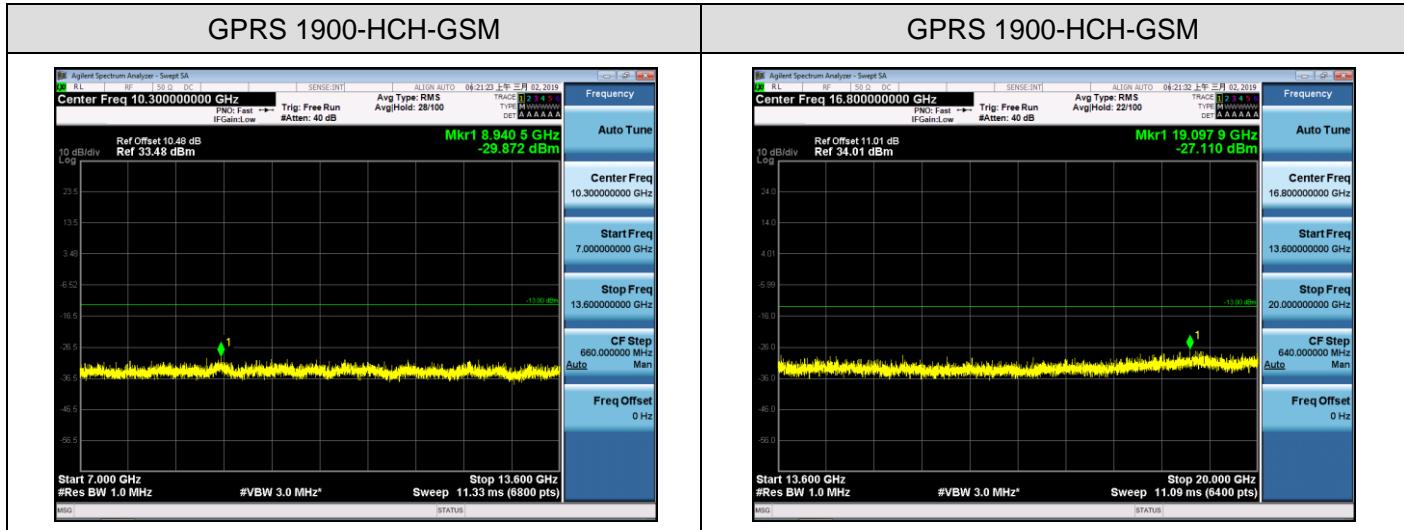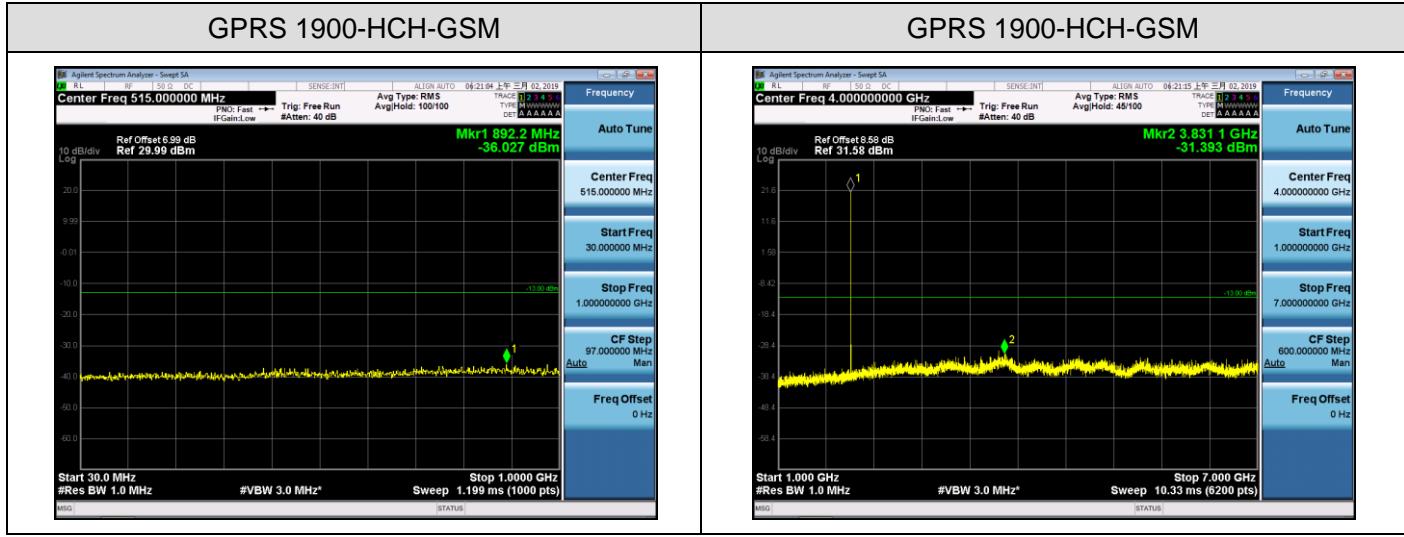


GPRS 1900-LCH-EDGE

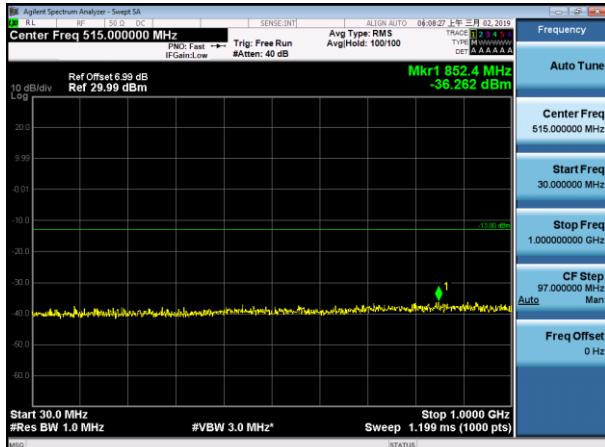


GPRS 1900- LCH-EDGE

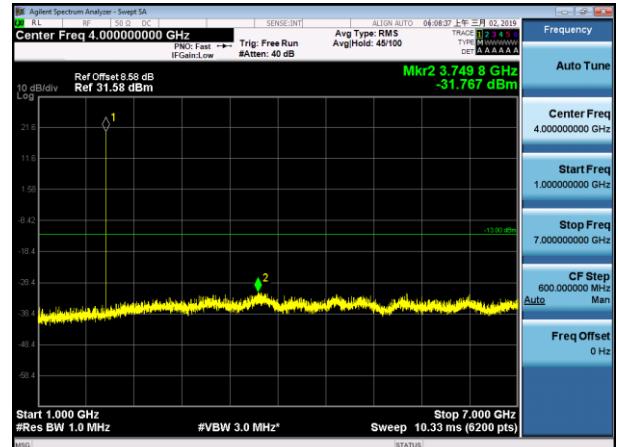


GPRS 1900-LCH-EDGE

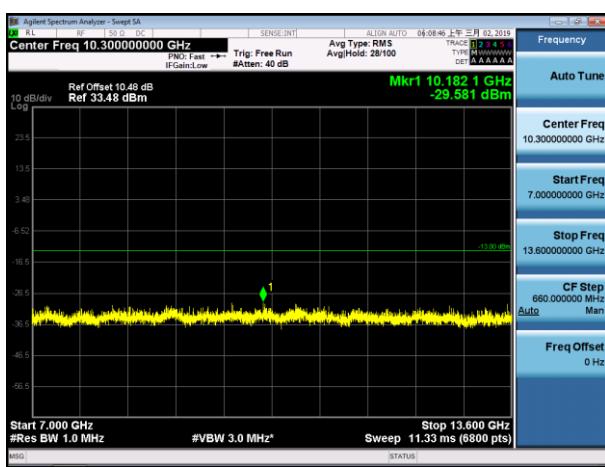


GPRS 1900- LCH-EDGE

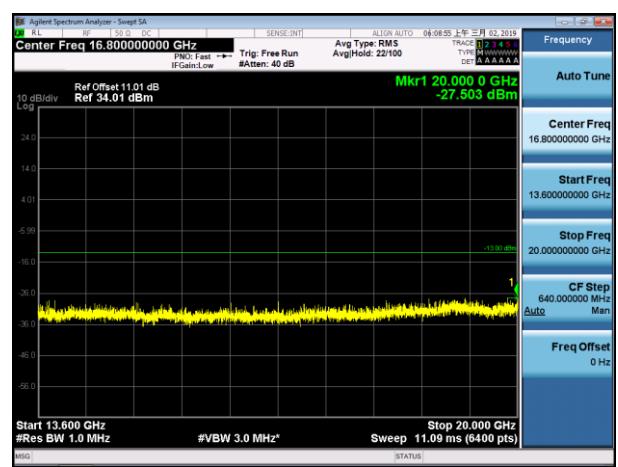


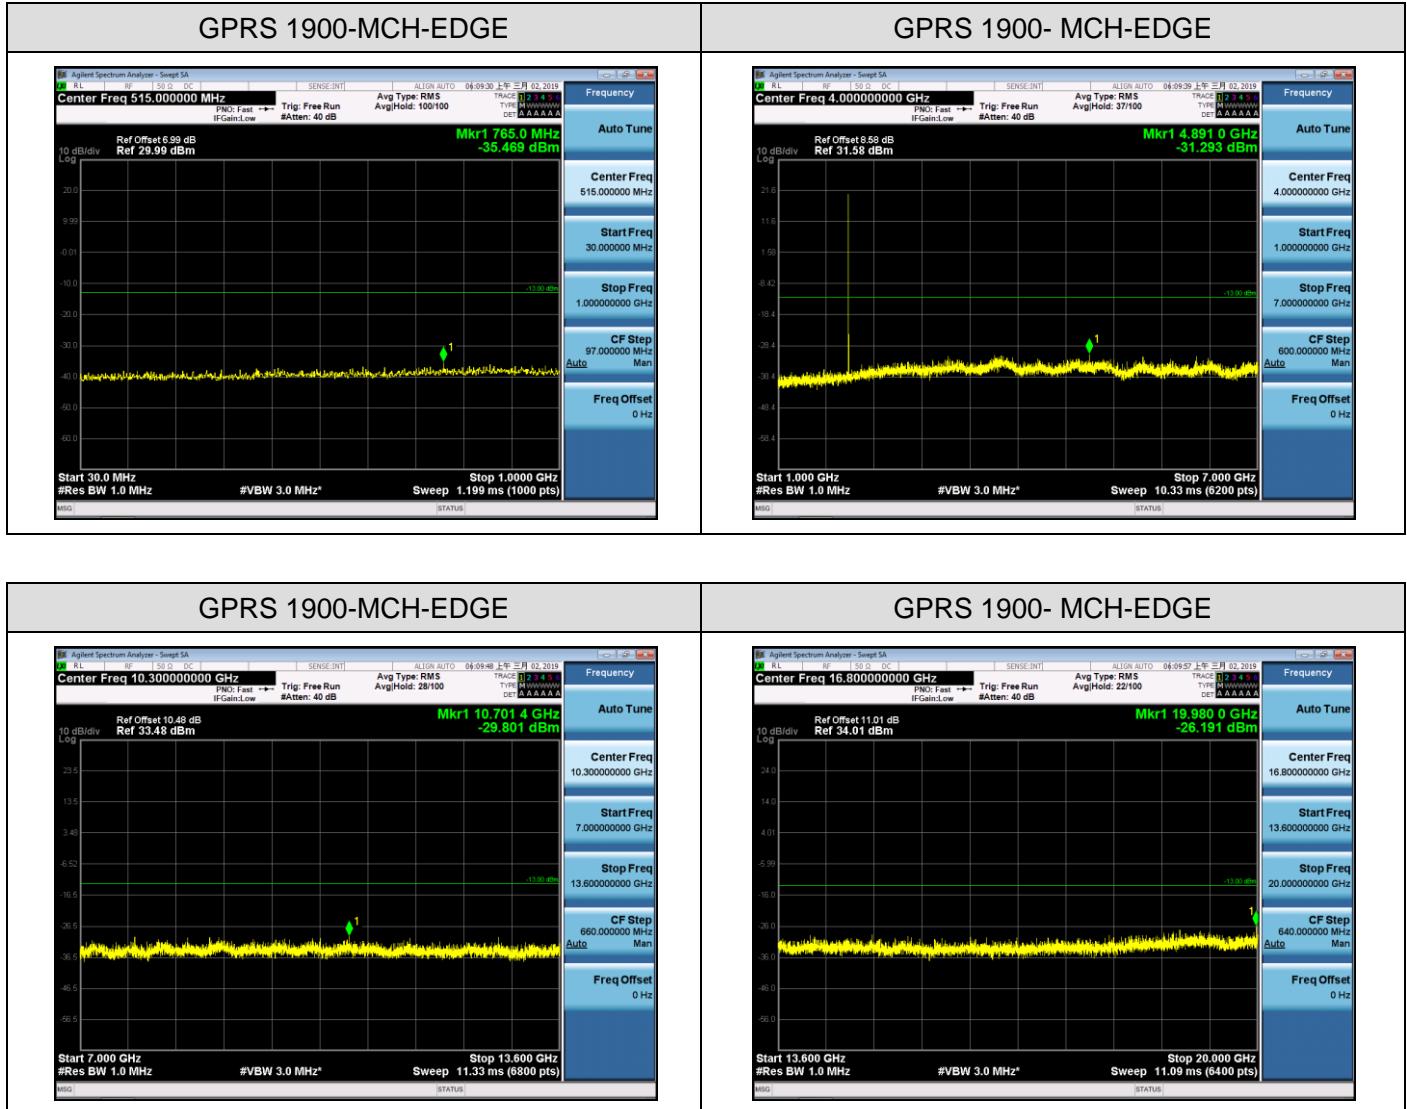


GPRS 1900-HCH-EDGE

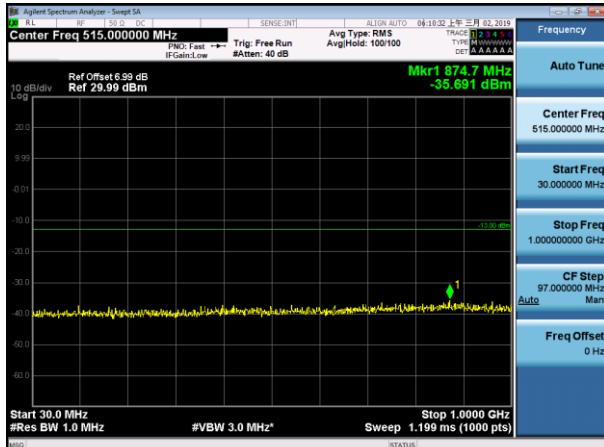


GPRS 1900- HCH-EDGE

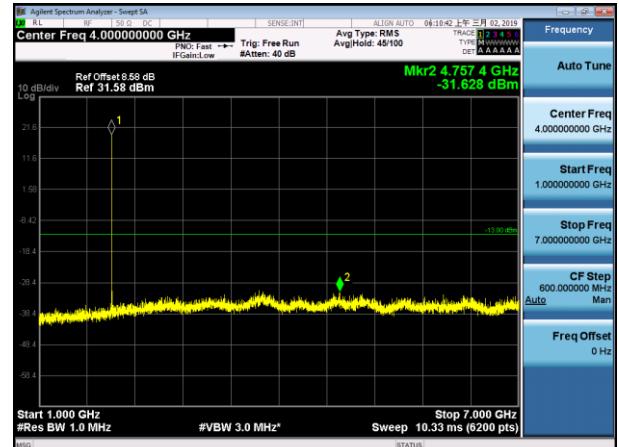

GPRS 1900- HCH-EDGE



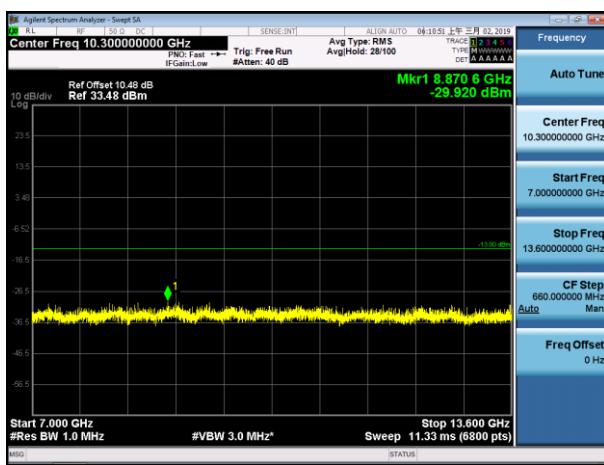


GPRS 1900- HCH-EDGE

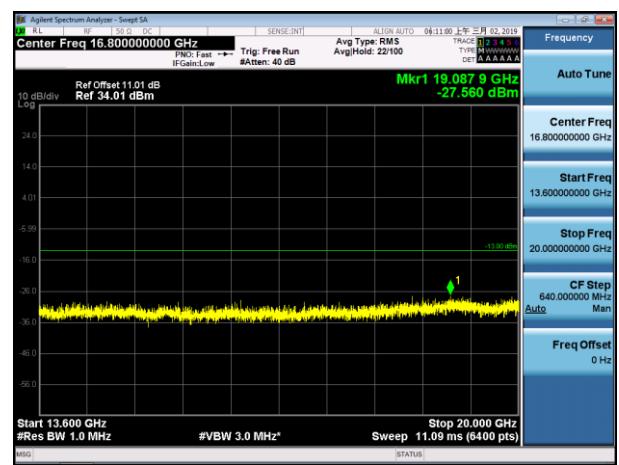


Test Band=WCDMA850/WCDMA1900


Test Mode=UMTS

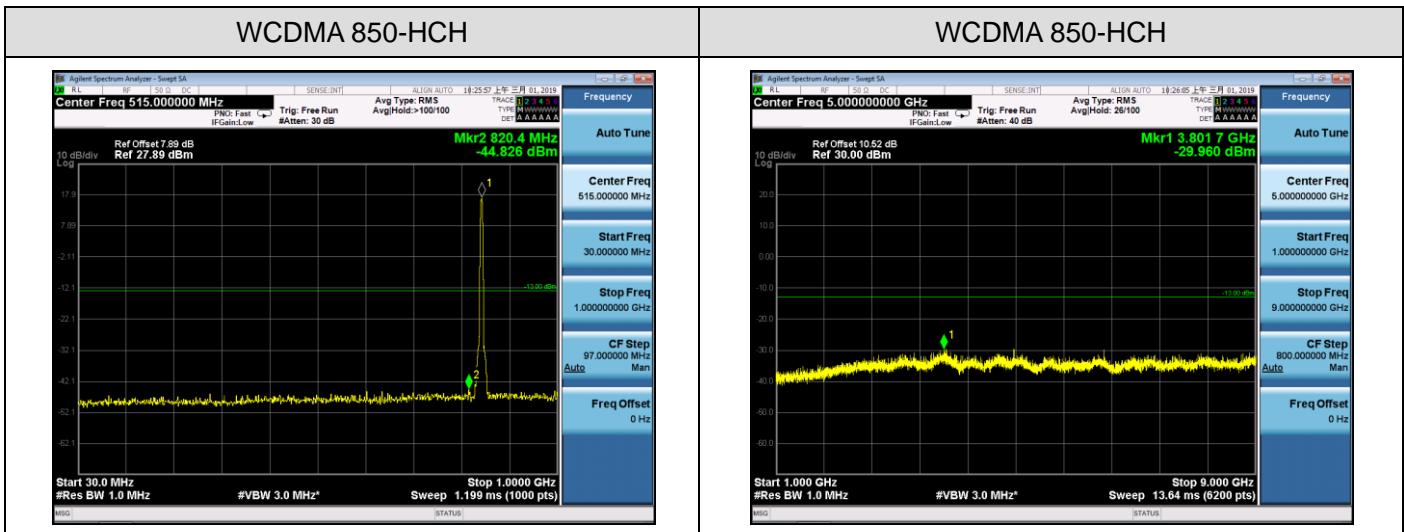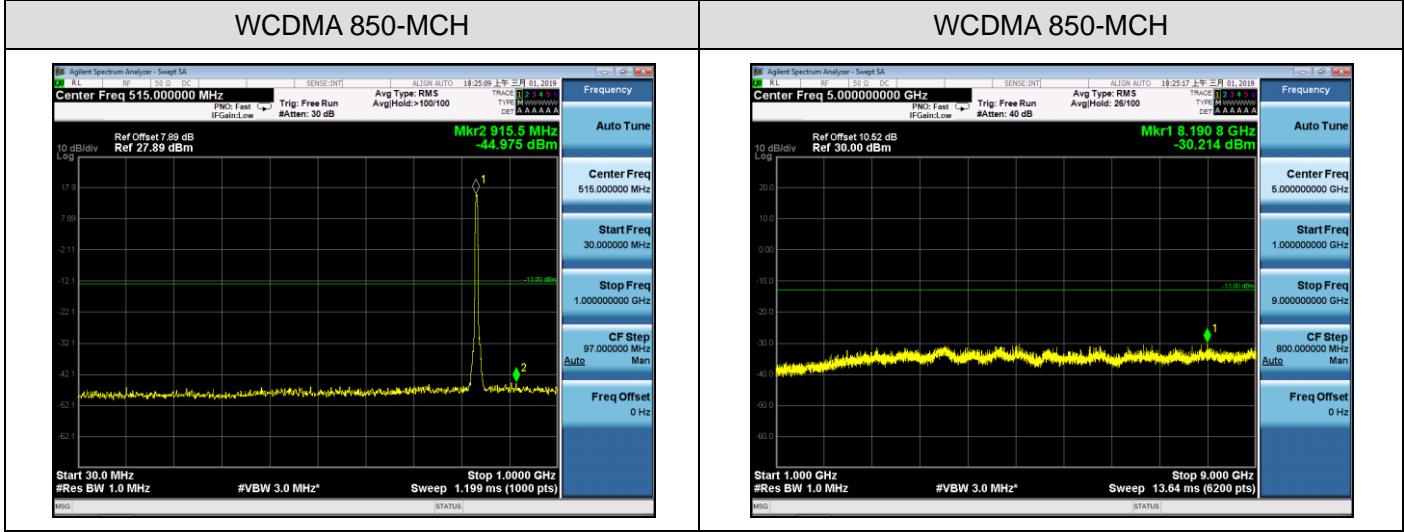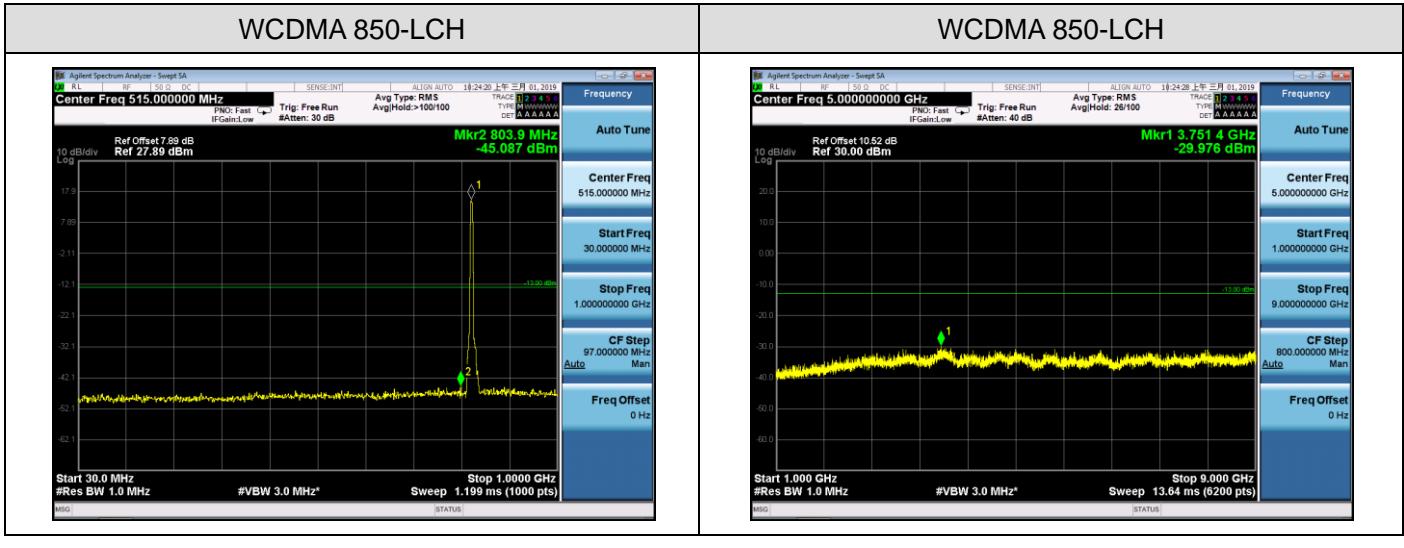


WCDMA 1900-LCH

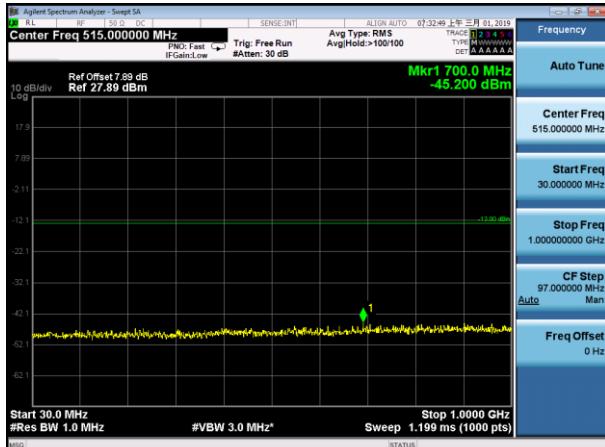


WCDMA 1900-LCH

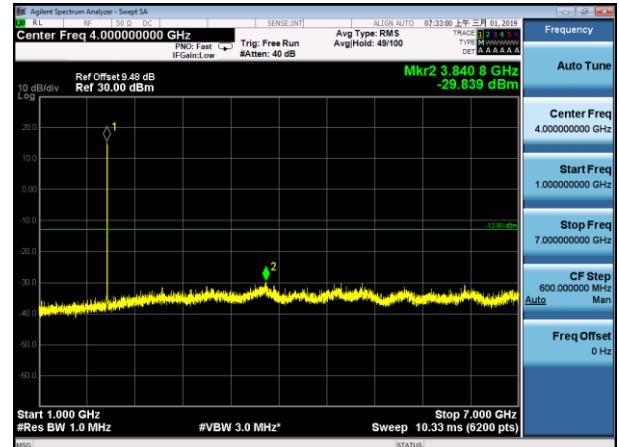



WCDMA 1900-LCH

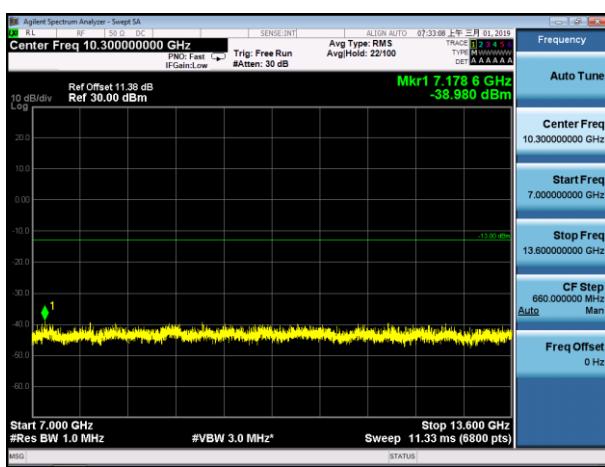

WCDMA 1900-LCH

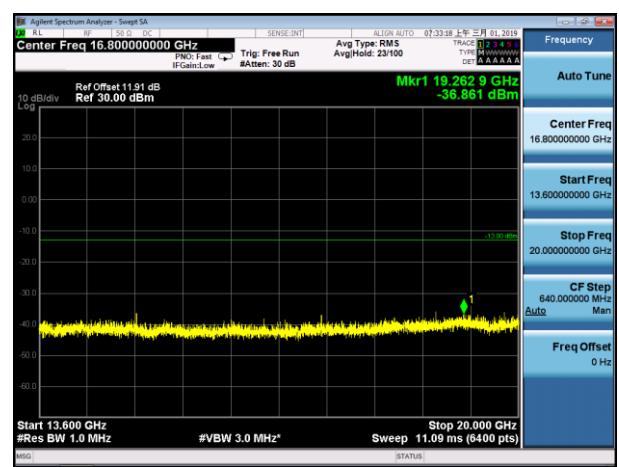

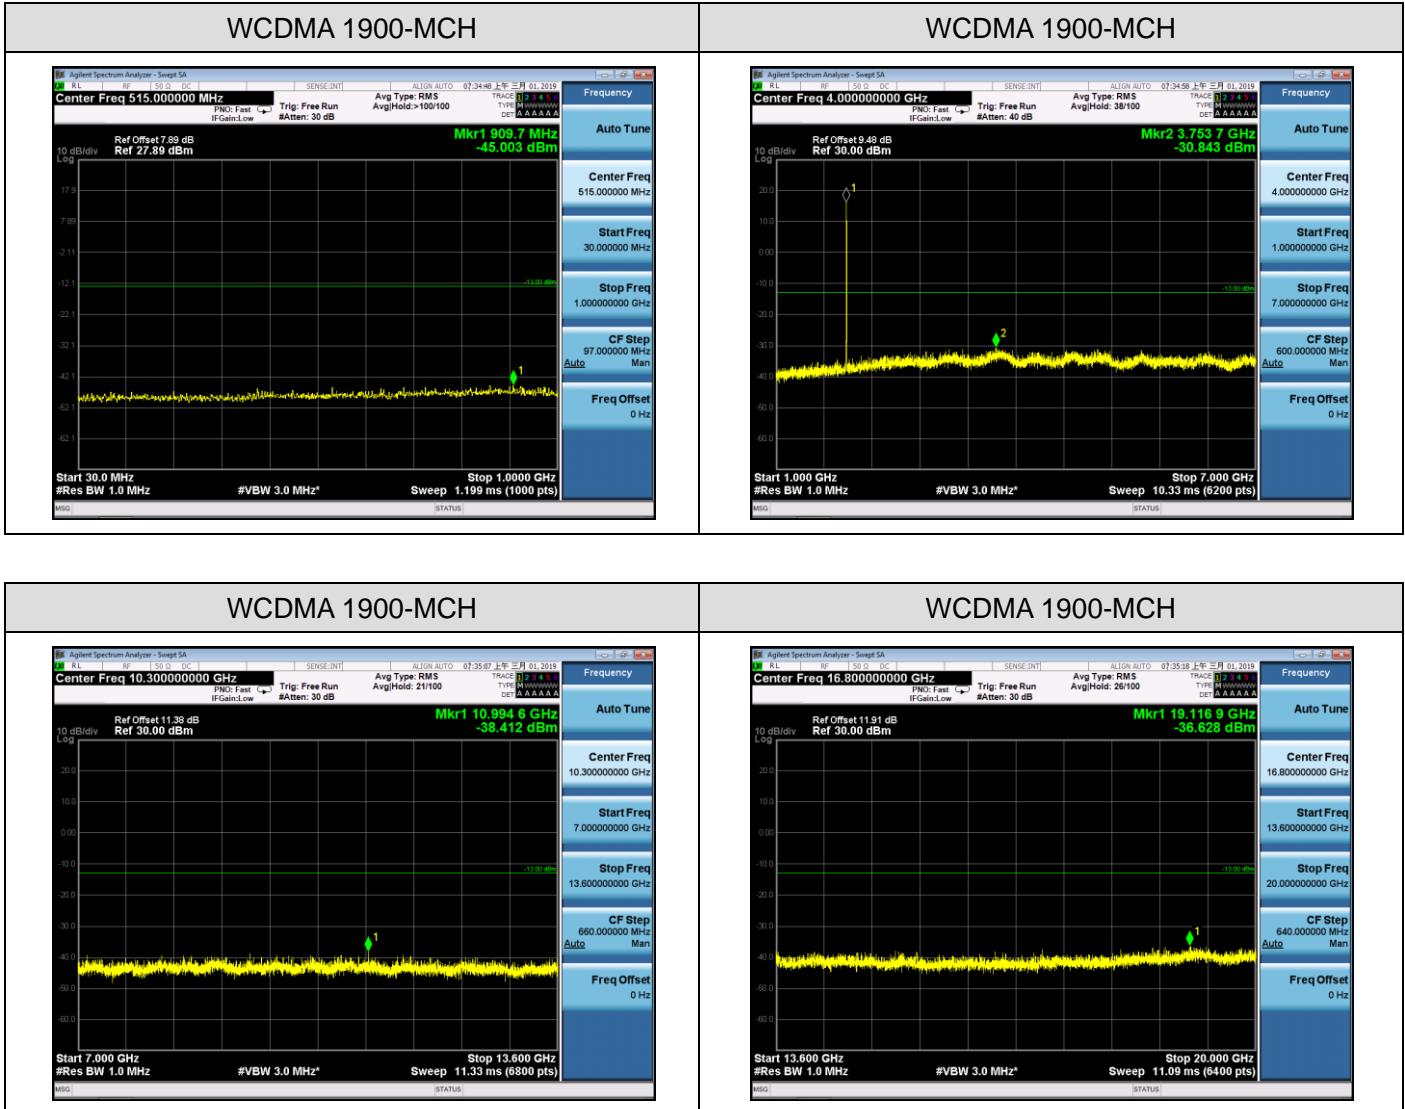

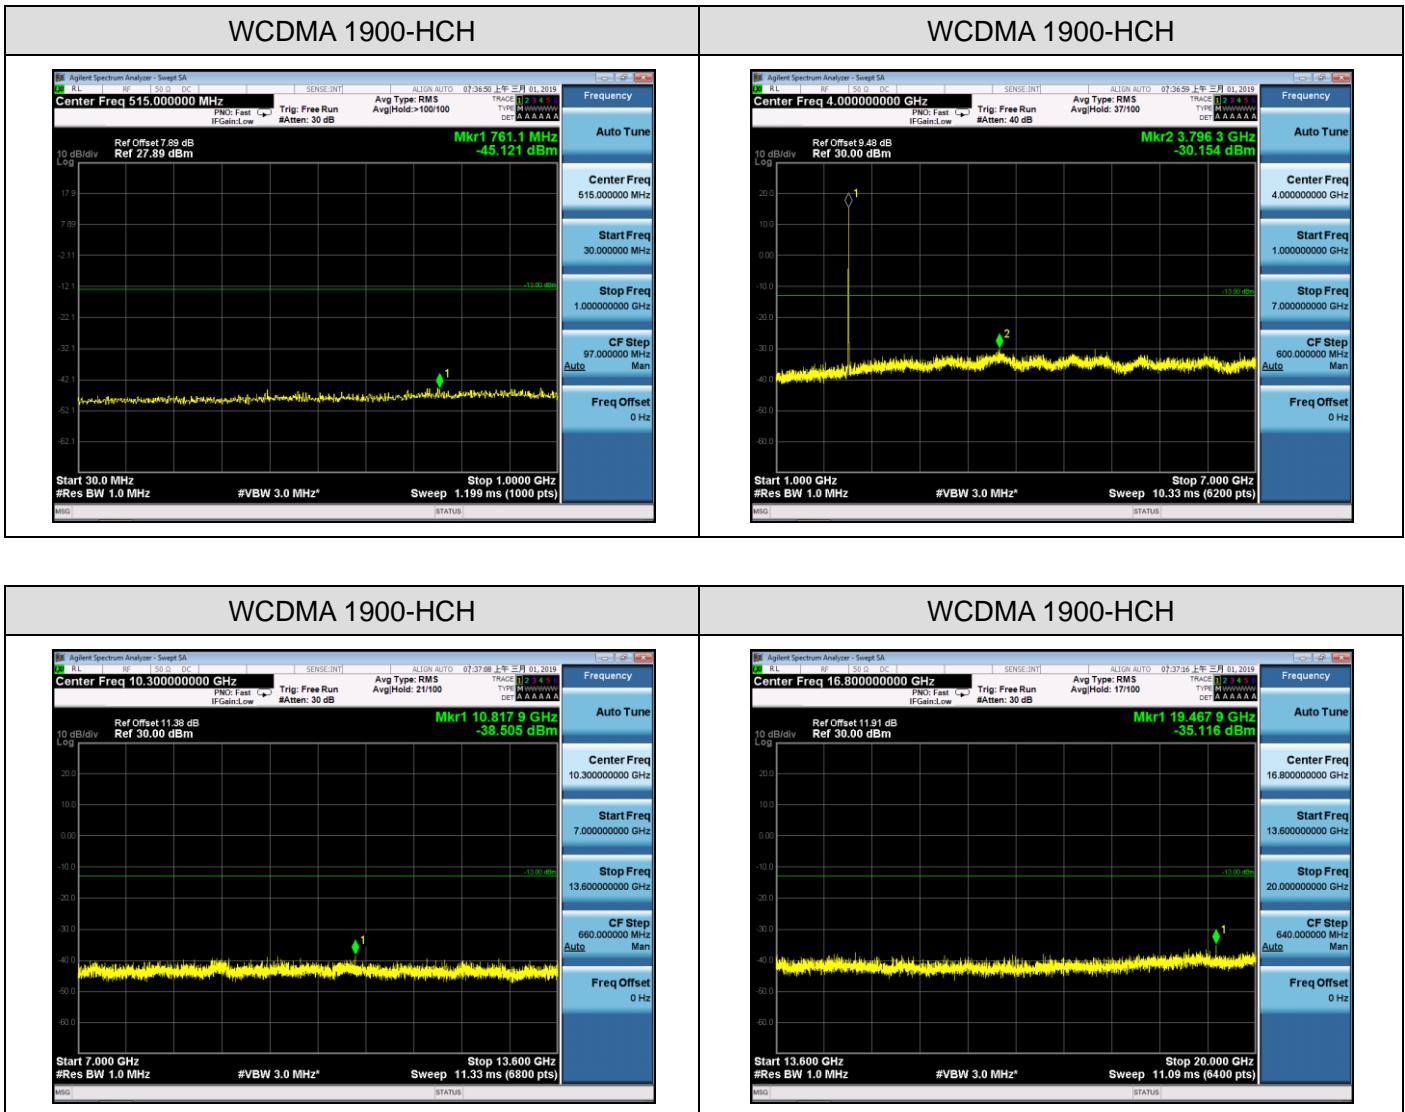

**Note:1.** Below 30MHz no Spurious found and Above is the worst mode data.

2. As no emission found in standby or receive mode, no recording in this report.


## 9.2 RADIATED SPURIOUS EMISSION

### 9.2.1 MEASUREMENT METHOD


1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.

### 9.2.2 TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

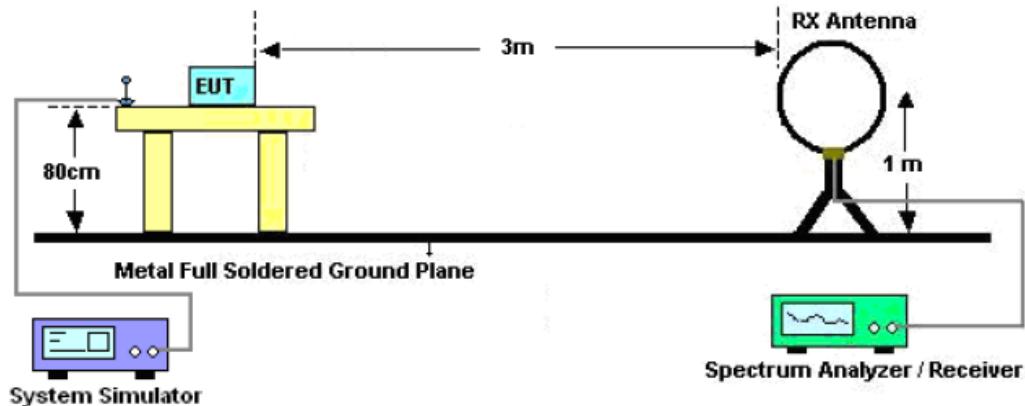

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

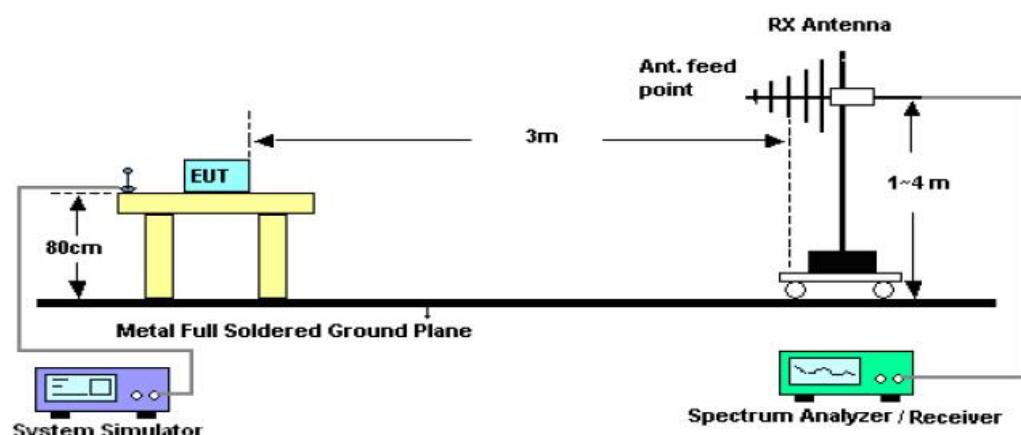

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

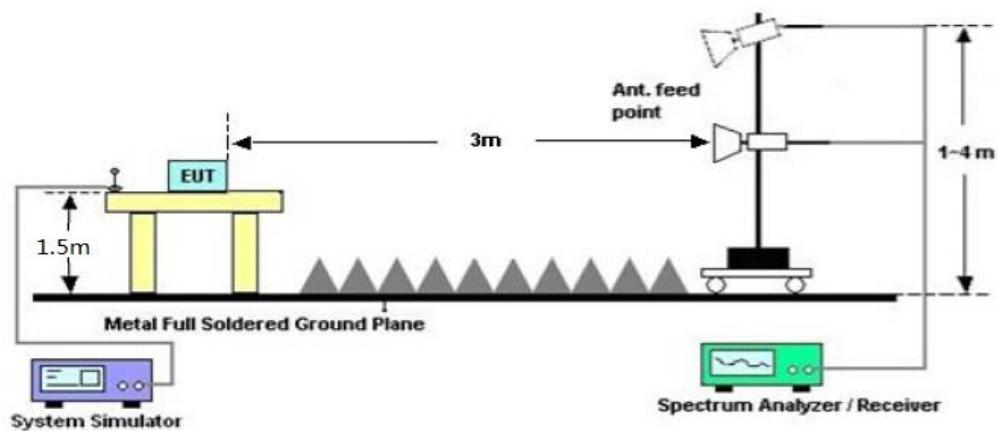

### 9.2.3 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

**Note:** only result the worst condition of each test mode:

#### 9.2.4 MEASUREMENT RESULT

##### GPRS 850:

The Worst Test Results for Channel 251/848.8 MHz				
Frequency (MHz)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Comment
1967.60	-48.98	-13	-35.98	Horizontal
3056.17	-46.69	-13	-33.69	Horizontal
6739.25	-45.25	-13	-32.25	Horizontal
1967.60	-47.18	-13	-34.18	Vertical
3426.04	-46.66	-13	-33.66	Vertical
6534.14	-45.13	-13	-32.13	Vertical

##### GPRS 850(EDGE 8):

The Worst Test Results for Channel 251/848.8 MHz				
Frequency (MHz)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Comment
1967.60	-48.16	-13	-35.16	Horizontal
3246.33	-47.55	-13	-34.55	Horizontal
6718.12	-46.16	-13	-33.16	Horizontal
1967.60	-47.99	-13	-34.99	Vertical
3569.44	-46.59	-13	-33.59	Vertical
6153.09	-45.44	-13	-32.44	Vertical

**PCS 1900:**

<b>The Worst Test Results for Channel 810/1909.8MHz</b>				
Frequency (MHz)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Comment
1456.52	-48.88	-13	-35.88	Horizontal
3819.60	-47.64	-13	-34.64	Horizontal
7456.18	-45.11	-13	-32.11	Horizontal
1462.12	-48.33	-13	-35.33	Vertical
3819.60	-47.42	-13	-34.42	Vertical
6946.19	-45.18	-13	-32.18	Vertical

**PCS 1900(EDGE):**

<b>The Worst Test Results for Channel 810/1909.8MHz</b>				
Frequency (MHz)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Comment
1694.52	-49.44	-13	-36.44	Horizontal
3819.60	-48.36	-13	-35.36	Horizontal
7041.59	-47.49	-13	-34.49	Horizontal
1746.11	-49.35	-13	-36.35	Vertical
3819.60	-48.55	-13	-35.55	Vertical
7028.52	-47.43	-13	-34.43	Vertical

**HSPA band II:**

The Worst Test Results for Channel 9538/1907.6MHz				
Frequency (MHz)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Comment
1619.05	-45.44	-13	-32.44	Horizontal
3815.20	-44.27	-13	-31.27	Horizontal
7563.28	-43.14	-13	-30.14	Horizontal
1596.28	-45.62	-13	-32.62	Vertical
3815.20	-44.49	-13	-31.49	Vertical
7436.55	-43.02	-13	-30.02	Vertical

**HSPA band V:**

The Worst Test Results for Channel 4233/846.6MHz				
Frequency (MHz)	Emission Level (dBm)	Limits (dBm)	Margin (dB)	Comment
1693.20	-46.33	-13	-33.33	Horizontal
2856.58	-45.85	-13	-32.85	Horizontal
5943.17	-44.48	-13	-31.48	Horizontal
1693.20	-46.29	-13	-33.29	Vertical
2139.77	-45.12	-13	-32.12	Vertical
5894.32	-44.37	-13	-31.37	Vertical

**RESULT: PASS**

**Note:**

1. Margin = Emission Level -Limit
2. Below 30MHZ no Spurious found and Above is the worst mode data

## 10. FREQUENCY STABILITY

### 10.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 Measure the carrier frequency at room temperature.
- 2 Subject the EUT to overnight soak at -10°C.
- 3 With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 band , channel 190 for GPRS 850 band, channel 9400 for UMTS band II and channel 4175 for UMTS band V measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 Repeat the above measurements at 10°C increments from -10°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 Subject the EUT to overnight soak at +50°C.
- 7 With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 Repeat the above measurements at 10°C increments from +50°C to -10°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

## **10.2 PROVISIONS APPLICABLE**

### **10.2.1 FOR HAND CARRIED BATTERY POWERED EQUIPMENT**

According to the ANSI/TIA-603-E-2016, the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.23VDC and 4.35VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

### **10.2.2 FOR EQUIPMENT POWERED BY PRIMARY SUPPLY VOLTAGE**

According to the ANSI/TIA-603-E-2016, the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment, the normal environment temperature is 20°C.

### 10.3 MEASUREMENT RESULT

#### Test Results

##### Frequency Error vs. Voltage:

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.(V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	GSM	LCH	TN	VL	-8.52	-0.010337	±2.5	PASS
			TN	VN	5.55	0.006734	±2.5	PASS
			TN	VH	6.97	0.008457	±2.5	PASS
		MCH	TN	VL	-6.46	-0.007722	±2.5	PASS
			TN	VN	-5.55	-0.006634	±2.5	PASS
			TN	VH	-8.27	-0.009885	±2.5	PASS
		HCH	TN	VL	-0.06	-0.000071	±2.5	PASS
			TN	VN	0.90	0.001060	±2.5	PASS
			TN	VH	2.52	0.002969	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.(V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	EDGE	LCH	TN	VL	-28.83	-0.034979	±2.5	PASS
			TN	VN	35.55	0.043133	±2.5	PASS
			TN	VH	33.96	0.041204	±2.5	PASS
		MCH	TN	VL	29.77	0.035585	±2.5	PASS
			TN	VN	29.67	0.035465	±2.5	PASS
			TN	VH	33.29	0.039792	±2.5	PASS
		HCH	TN	VL	25.51	0.030054	±2.5	PASS
			TN	VN	24.73	0.029135	±2.5	PASS
			TN	VH	22.99	0.027085	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt. (V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Verdict
PCS 1900	GSM	LCH	TN	VL	4.52	0.002443	PASS
			TN	VN	32.22	0.017414	PASS
			TN	VH	39.32	0.021252	PASS
		MCH	TN	VL	29.70	0.015798	PASS
			TN	VN	10.65	0.005665	PASS
			TN	VH	16.79	0.008931	PASS
		HCH	TN	VL	20.99	0.010991	PASS
			TN	VN	20.92	0.010954	PASS
			TN	VH	17.05	0.008928	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt. (V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Verdict
PCS 1900	EDGE	LCH	TN	VL	-12.53	-0.006772	PASS
			TN	VN	52.34	0.028289	PASS
			TN	VH	45.88	0.024797	PASS
		MCH	TN	VL	44.46	0.023649	PASS
			TN	VN	47.30	0.025160	PASS
			TN	VH	44.78	0.023819	PASS
		HCH	TN	VL	22.96	0.012022	PASS
			TN	VN	36.71	0.019222	PASS
			TN	VH	27.18	0.014232	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

**Frequency Error vs. Temperature:**

Test Band	Test Mode	Test Channel	Test Volt.	Test Tem. (°C)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	GSM	LCH	VN	-10	7.94	0.009634	±2.5	PASS
			VN	0	-1.23	-0.001492	±2.5	PASS
			VN	10	-3.23	-0.003919	±2.5	PASS
			VN	20	-7.43	-0.009015	±2.5	PASS
			VN	30	-8.78	-0.010653	±2.5	PASS
			VN	40	-4.71	-0.005715	±2.5	PASS
			VN	50	-4.39	-0.005326	±2.5	PASS
GSM850	GSM	MCH	VN	-10	-6.72	-0.008033	±2.5	PASS
			VN	0	-2.39	-0.002857	±2.5	PASS
			VN	10	-8.52	-0.010184	±2.5	PASS
			VN	20	-4.65	-0.005558	±2.5	PASS
			VN	30	-3.16	-0.003777	±2.5	PASS
			VN	40	-5.10	-0.006096	±2.5	PASS
			VN	50	-2.97	-0.003550	±2.5	PASS
GSM850	GSM	HCH	VN	-10	0.58	0.000683	±2.5	PASS
			VN	0	1.29	0.001520	±2.5	PASS
			VN	10	-3.36	-0.003959	±2.5	PASS
			VN	20	-4.13	-0.004866	±2.5	PASS
			VN	30	-0.90	-0.001060	±2.5	PASS
			VN	40	-7.75	-0.009131	±2.5	PASS
			VN	50	2.00	0.002356	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Tem. (°C)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
GSM850	EDGE	LCH	VN	-10	27.02	0.032783	$\pm 2.5$	PASS
			VN	0	32.48	0.039408	$\pm 2.5$	PASS
			VN	10	26.15	0.031728	$\pm 2.5$	PASS
			VN	20	26.09	0.031655	$\pm 2.5$	PASS
			VN	30	31.58	0.038316	$\pm 2.5$	PASS
			VN	40	28.73	0.034858	$\pm 2.5$	PASS
			VN	50	31.64	0.038389	$\pm 2.5$	PASS
GSM850	EDGE	MCH	VN	-10	30.19	0.036087	$\pm 2.5$	PASS
			VN	0	25.73	0.030755	$\pm 2.5$	PASS
			VN	10	27.44	0.032799	$\pm 2.5$	PASS
			VN	20	29.28	0.034999	$\pm 2.5$	PASS
			VN	30	26.51	0.031688	$\pm 2.5$	PASS
			VN	40	25.80	0.030839	$\pm 2.5$	PASS
			VN	50	23.79	0.028437	$\pm 2.5$	PASS
GSM850	EDGE	HCH	VN	-10	17.34	0.020429	$\pm 2.5$	PASS
			VN	0	22.28	0.026249	$\pm 2.5$	PASS
			VN	10	20.79	0.024493	$\pm 2.5$	PASS
			VN	20	18.44	0.021725	$\pm 2.5$	PASS
			VN	30	17.34	0.020429	$\pm 2.5$	PASS
			VN	40	17.63	0.020770	$\pm 2.5$	PASS
			VN	50	15.63	0.018414	$\pm 2.5$	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Tem. (°C)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Verdict
PCS 1900	GSM	LCH	VN	-10	40.81	0.022057	PASS
			VN	0	25.05	0.013539	PASS
			VN	10	28.67	0.015496	PASS
			VN	20	30.35	0.016404	PASS
			VN	30	34.93	0.018879	PASS
			VN	40	21.83	0.011799	PASS
			VN	50	29.19	0.015777	PASS
PCS 1900	GSM	MCH	VN	-10	8.91	0.004739	PASS
			VN	0	12.20	0.006489	PASS
			VN	10	23.18	0.012330	PASS
			VN	20	25.38	0.013500	PASS
			VN	30	9.30	0.004947	PASS
			VN	40	15.11	0.008037	PASS
			VN	50	13.62	0.007245	PASS
PCS 1900	GSM	HCH	VN	-10	16.27	0.008519	PASS
			VN	0	7.68	0.004021	PASS
			VN	10	15.88	0.008315	PASS
			VN	20	17.24	0.009027	PASS
			VN	30	13.62	0.007132	PASS
			VN	40	21.24	0.011122	PASS
			VN	50	8.52	0.004461	PASS

Test Band	Test Mode	Test Channel	Test Volt.	Test Tem. (°C)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Verdict
GSM1900	EDGE	LCH	VN	-30	45.65	0.024673	PASS
			VN	-20	45.30	0.024484	PASS
			VN	-10	45.94	0.024830	PASS
			VN	0	49.17	0.026576	PASS
			VN	10	48.07	0.025981	PASS
			VN	20	47.43	0.025635	PASS
			VN	30	44.04	0.023803	PASS
			VN	40	45.65	0.024673	PASS
			VN	50	45.30	0.024484	PASS
GSM1900	EDGE	MCH	VN	-30	36.90	0.019628	PASS
			VN	-20	35.64	0.018957	PASS
			VN	-10	36.87	0.019612	PASS
			VN	0	38.13	0.020282	PASS
			VN	10	33.96	0.018064	PASS
			VN	20	33.32	0.017723	PASS
			VN	30	25.09	0.013346	PASS
			VN	40	36.90	0.019628	PASS
			VN	50	35.64	0.018957	PASS
GSM1900	EDGE	HCH	VN	-30	7.26	0.003801	PASS
			VN	-20	8.04	0.004210	PASS
			VN	-10	2.71	0.001419	PASS
			VN	0	-2.39	-0.001251	PASS
			VN	10	-0.87	-0.000456	PASS
			VN	20	-10.40	-0.005446	PASS
			VN	30	-1.81	-0.000948	PASS
			VN	40	7.26	0.003801	PASS
			VN	50	8.04	0.004210	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.

**Frequency Error vs. Voltage:**

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.(V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA850	UMTS	LCH	TN	VL	0.75	0.000908	±2.5	PASS
			TN	VN	1.39	0.001682	±2.5	PASS
			TN	VH	-0.12	-0.000145	±2.5	PASS
		MCH	TN	VL	0.05	0.000060	±2.5	PASS
			TN	VN	-1.85	-0.002212	±2.5	PASS
			TN	VH	5.08	0.006074	±2.5	PASS
		HCH	TN	VL	-3.88	-0.004583	±2.5	PASS
			TN	VN	-8.51	-0.010052	±2.5	PASS
			TN	VH	-2.79	-0.003296	±2.5	PASS

Test Band	Test Mode	Test Channel	Test Temp.	Test Volt.(V)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Verdict
WCDMA1900	UMTS	LCH	TN	VL	5.43	0.002931	PASS
			TN	VN	-2.17	-0.001171	PASS
			TN	VH	-4.44	-0.002397	PASS
		MCH	TN	VL	-6.00	-0.003191	PASS
			TN	VN	-3.65	-0.001941	PASS
			TN	VH	-3.86	-0.002053	PASS
		HCH	TN	VL	-2.29	-0.001200	PASS
			TN	VN	-7.71	-0.004042	PASS
			TN	VH	4.82	0.002527	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very small. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperature and voltage range as tested.


**Frequency Error vs. Temperature:**

Test Band	Test Mode	Test Channel	Test Volt.	Test Tem. (°C)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Limit (ppm)	Verdict
WCDMA850	UMTS	LCH	VN	-10	3.66	0.00	±2.5	PASS
			VN	0	0.06	0.00	±2.5	PASS
			VN	10	5.05	0.01	±2.5	PASS
			VN	20	2.04	0.00	±2.5	PASS
			VN	30	1.27	0.00	±2.5	PASS
			VN	40	-3.11	0.00	±2.5	PASS
			VN	50	1.13	0.00	±2.5	PASS
WCDMA850	UMTS	MCH	VN	-10	-1.69	0.00	±2.5	PASS
			VN	0	-3.34	0.00	±2.5	PASS
			VN	10	-1.57	0.00	±2.5	PASS
			VN	20	-4.58	-0.01	±2.5	PASS
			VN	30	0.00	0.00	±2.5	PASS
			VN	40	0.96	0.00	±2.5	PASS
			VN	50	-3.27	0.00	±2.5	PASS
WCDMA850	UMTS	HCH	VN	-10	-8.62	-0.01	±2.5	PASS
			VN	0	-3.43	0.00	±2.5	PASS
			VN	10	-1.19	0.00	±2.5	PASS
			VN	20	-4.56	-0.01	±2.5	PASS
			VN	30	-1.72	0.00	±2.5	PASS
			VN	40	-1.37	0.00	±2.5	PASS
			VN	50	-0.64	0.00	±2.5	PASS


Test Band	Test Mode	Test Channel	Test Volt.	Test Tem. (°C)	Freq.Error (Hz)	Freq.vs.rated (ppm)	Verdict
WCDMA1900	UMTS	LCH	VN	-10	-2.18	0.00	PASS
			VN	0	1.42	0.00	PASS
			VN	10	-7.14	0.00	PASS
			VN	20	-3.10	0.00	PASS
			VN	30	1.92	0.00	PASS
			VN	40	-3.34	0.00	PASS
			VN	50	-6.32	0.00	PASS
WCDMA1900	UMTS	MCH	VN	-10	-12.89	-0.01	PASS
			VN	0	-9.48	-0.01	PASS
			VN	10	-2.53	0.00	PASS
			VN	20	-6.42	0.00	PASS
			VN	30	-10.35	-0.01	PASS
			VN	40	-12.92	-0.01	PASS
			VN	50	-4.26	0.00	PASS
WCDMA1900	UMTS	HCH	VN	-10	-15.67	-0.01	PASS
			VN	0	-7.80	0.00	PASS
			VN	10	-0.41	0.00	PASS
			VN	20	1.83	0.00	PASS
			VN	30	-15.12	-0.01	PASS
			VN	40	-16.20	-0.01	PASS
			VN	50	-6.16	0.00	PASS

Note: Based on the results of the frequency stability test at the center channel the frequency deviation results measured are very samll. As such it is determined that channels at the band edge would remain in-band when the maximum measured frequency deviation noted during the frequency stability tests is applied. Therefore the device is determined to remain operating in band over the temperture and voltage range as tested.

**APPENDIX A: PHOTOGRAPHS OF TEST SETUP**  
**RADIATED SPURIOUS EMISSION**

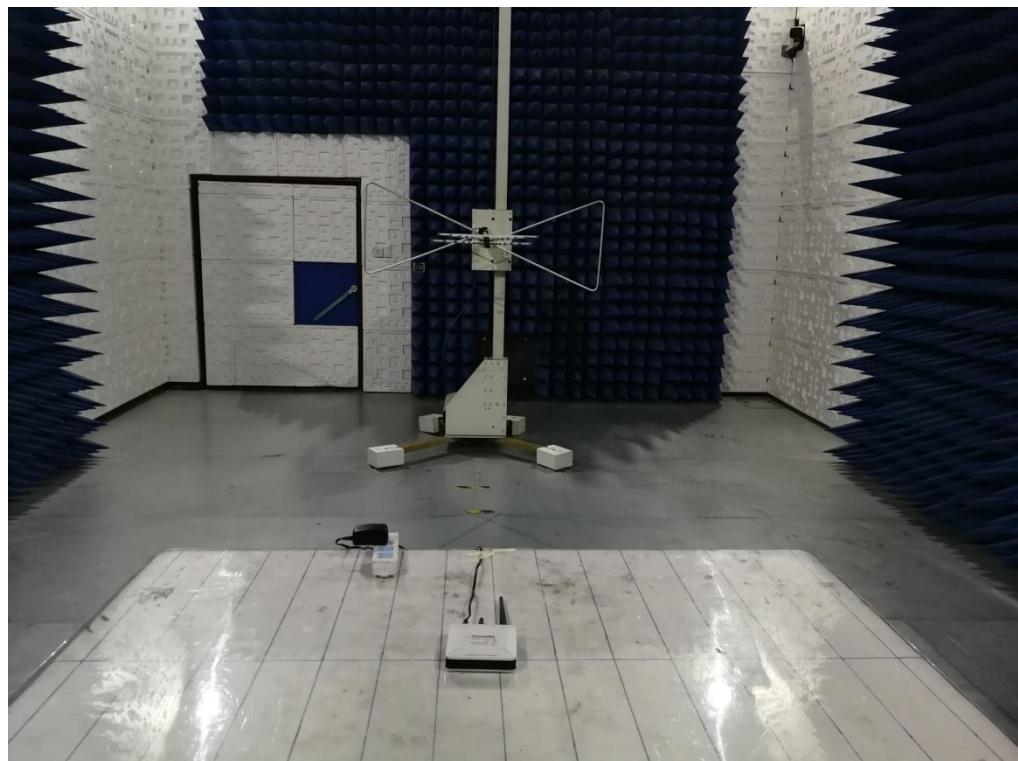

RADIATED SPURIOUS ABOVE 1G EMISSION

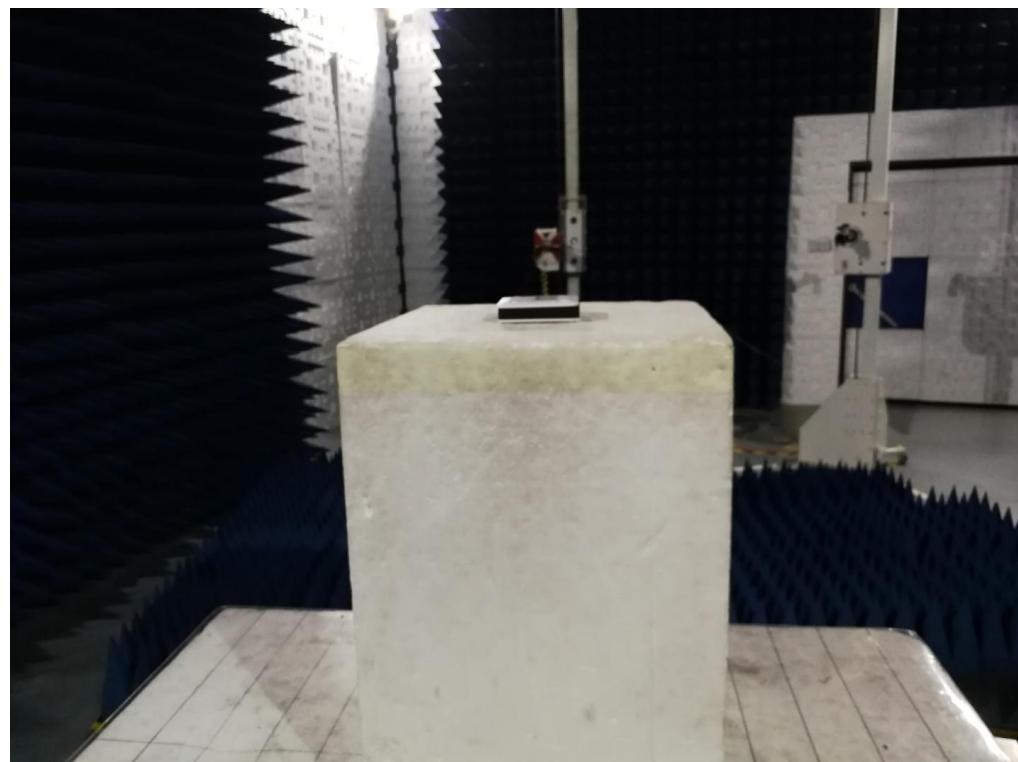

**----END OF REPORT----**