

FCC TEST REPORT

Report No: STS1703256F01

Issued for

ZHONGSHAN KINGRONG ELECTRONICS CO.,LTD

32, CuiHuJu, YangGuangMeiJia, No.138 MinAn Rd South, XiaoLan, ZhongShan City, GuangDong, 528415 China

Product Name:	Quick wireless charger
Brand Name:	KRECO
Model Name:	KRE-Q01
Series Model:	KRE-Q02,KRE-Q03,KRE-Q04, KRE-Q05,KRE-Q06,KRE-Q07, KRE-Q08,KRE-Q09,KRE-Q10, KRE-Q11,KRE-Q12
FCC ID:	2ALPOKRE-Q01
Test Standard:	FCC Part 15 Subpart C

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.

Shenzhen STS Test Services Co., Ltd.

1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China
TEL: +86-755 3688 6288 FAX: +86-755 3688 6277 E-mail:sts@stsapp.com



Report No.: STS1703256F01

TEST RESULT CERTIFICATION

Applicant's name: ZHONGSHAN KINGRONG ELECTRONICS CO.,LTD

Address: 32, CuiHuJu, YangGuangMeiJia, No.138 MinAn Rd South,

XiaoLan, ZhongShan City, GuangDong, 528415 China

Manufacture's Name : ZHONGSHAN KINGRONG ELECTRONICS CO.,LTD

Address: 32, CuiHuJu, YangGuangMeiJia, No.138 MinAn Rd South,

XiaoLan, ZhongShan City, GuangDong, 528415 China

Product description

Product name: Quick wireless charger

Brand name : KRECO

Model and/or type reference: KRE-Q01

Standards : FCC Part 15 Subpart C

Test Procedure: ANSI C63.10-2013

This device described above has been tested by BZT, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BZT, this document may be altered or revised by BZT, personal only, and shall be noted in the revision of the document

Date of performance of tests: 01 Apr. 2017 ~15 May. 2017

Date of Issue: 18 May. 2017

Test Result : Pass

Testing Engineer :

(Leo li)

Technical Manager:

Authorized Signatory:

(Tony liu)

(Vita Li)







Table of Contents	Page
1. SUMMARY OF TEST RESULTS	5
1.1 TEST FACTORY	5
1.2 MEASUREMENT UNCERTAINTY	5
2. GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	9
2.4 DESCRIPTION OF SUPPORT UNITS	10
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
3.CONDUCTED EMISSION TEST RESULT(SECTION 15.207)	12
3.1 POWER LINE CONDUCTED EMISSION LIMITS	12
3.2 TEST PROCEDURE	13
3.3 TEST SETUP	13
3.4 EUT OPERATING CONDITIONS	13
3.5TEST RESULTS	14
4. RADIATED& FIELD EMISSION TEST RESULT(SECTIOU 15.209)	16
4.1 LIMIT	16
4.2 TEST PROCEDURE	16
4.3 TEST SETUP	17
4.4 TEST RESULTS	18
5. 20 DB BANDWIDTH TEST	21
5.1 LIMIT	21
5.2 TEST SETUP	21
5.3 TEST RESULTS	21
APPENDIX-PHOTOS OF TEST SETUP	23





Report No.: STS1703256F01

Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	18 May. 2017	STS1703256F01	ALL	Initial Issue





1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

·	FCC Part15 , Subpart C				
Standard Section	Test Item	Judgment	Remark		
15.207	Conducted Emission	PASS			
15.209	Radiated emission, Spurious Emission	PASS			
15.35	20 dB Bandwidth	PASS			

1.1 TEST FACTORY

BZT Testing Technology Co., Ltd.

Add.: Buliding 17, Xinghua Road Xingwei industrial Park Fuyong,

Baoan District, Shenzhen, Guangdong, China

FCC Registration No.: 701733

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$ where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$ providing a level of confidence of approximately 95 % $^{\circ}$

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	±2.88dB
2	Conducted Emission (150KHz-30MHz)	±2.67 dB
3	All emissions,radiated(<1G) 30MHz-200MHz	±2.83dB
4	All emissions,radiated(<1G) 200MHz-1000MHz	±2.94dB
5	Temperature	±0.5°C
6	Humidity	±2%



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Quick wireless charger
Trade Name	KRECO KRECO
Model Name	KRE-Q01
	KRE-Q02,KRE-Q03,KRE-Q04,
Series Model	KRE-Q05,KRE-Q06,KRE-Q07,
Series woder	KRE-Q08,KRE-Q09,KRE-Q10,
	KRE-Q11,KRE-Q12
Model Difference	Only different in model name
Channel List	Please refer to the below
Equipemnt Category	Non-ISM frequency
Operating frequency	111-205KHz
Modulation Type	GFSK
Power Adapter	Input: DC 5V, 2A Output: DC5V, 1A
Hardware version number	N/A
Software version number	N/A
Connecting I/O Port(s)	Please refer to the User's Manual

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

2.

•			T est (Channel		
	Channel	Frequency (KHz)	Channel	Frequency (KHz)	Channel	Frequency (KHz)
	01	111	48	158	95	205

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	NOTE
1	KRECO	KRE-Q01	Coil	NA	

The EUT antenna is Coil Antenna. No antenna other than that furnished by the responsible party shall be used with the device.



4

		Chann	el List		
Channel	Frequency (KHz)	Channel	Frequency (KHz)	Channel	Frequency (KHz)
01	111	33	143	65	175
02	112	34	144	66	176
03	113	35	145	67	177
04	114	36	146	68	178
05	115	37	147	69	179
06	116	38	148	70	180
07	117	39	149	71	181
08	118	40	150	72	182
09	119	41	151	73	183
10	120	42	152	74	184
11	121	43	153	75	185
12	122	44	154	76	186
13	123	45	155	77	187
14	124	46	156	78	188
15	125	47	157	79	189
16	126	48	158	80	190
17	127	49	159	81	191
18	128	50	160	82	192
19	129	51	161	83	193
20	130	52	162	84	194
21	131	53	163	85	195
22	132	54	164	86	196
23	133	55	165	87	197
24	134	56	166	88	198
25	135	57	167	89	199
26	136	58	168	90	200
27	137	59	169	91	201
28	138	60	170	92	202
29	139	61	171	93	203
30	140	62	172	94	204
31	141	63	173	95	205
32	142	64	174		



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	FULL LOAD+Low channel
Mode 2	FULL LOAD +Mid channel
Mode 3	FULL LOAD +High channel
Mode 4	NO LOAD+Low channel
Mode 5	NO LOAD +Mid channel
Mode 6	NO LOAD +High channel

For Conducted Emission			
Final Test Mode	Description		
Mode 1	FULL LOAD+Low channel		
Mode 2	FULL LOAD +Mid channel		
Mode 3	FULL LOAD +High channel		
Mode 4	NO LOAD+Low channel		
Mode 5	NO LOAD +Mid channel		
Mode 6	NO LOAD +High channel		


For Radiated Emission				
Final Test Mode	Description			
Mode 1	FULL LOAD+Low channel			
Mode 2	FULL LOAD +Mid channel			
Mode 3	FULL LOAD +High channel			
Mode 4	NO LOAD+Low channel			
Mode 5	NO LOAD +Mid channel			
Mode 6	NO LOAD +High channel			




2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Conducted Emission Test

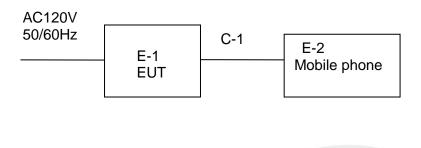

Radiated EmissionTest

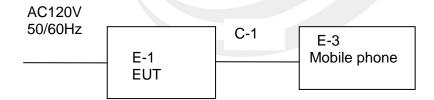



2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-1	Quick wireless charger	KRECO	KRE-Q01	N/A	EUT
E-2	Mobile phone	SAMSUNG	GALAXY S6	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable (FTP)	NO	50cm	/

Note:

- (1) FCC DOC approved.
- (2) FTP is Foiled Twisted Pair.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Radiation root oddipmont					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2016.10.23	2017.10.22
Test Receiver	R&S	ESCI	101427	2016.10.23	2017.10.22
Bilog Antenna	TESEQ	CBL6111D	34678	2014.11.24	2017.11.23
50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2014.11.24	2017.11.23
PreAmplifier	Agilent	8449B	60538	2016.10.23	2017.10.22
Loop Antenna	EMCO	6502	9003-2485	2016.03.06	2019.03.05
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2016.10.23	2017.10.22

Conduction Test equipment

Conduction rest equipment						
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	
EMI Test Receiver	R&S	ESPI	102086	2016.10.23	2017.10.22	
LISN	R&S	ENV216	101242	2016.10.23	2017.10.22	
LISN	EMCO	3810/2NM	000-23625	2016.10.23	2017.10.22	



3.CONDUCTED EMISSION TEST RESULT(SECTION 15.207)

3.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.207 limit in the table below has to be followed.

EDECHENCY (MU-)	Class B (dBuV)		
FREQUENCY (MHz)	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	
0.50 -5.0	56.00	46.00	
5.0 -30.0	60.00	50.00	

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver


Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz



3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

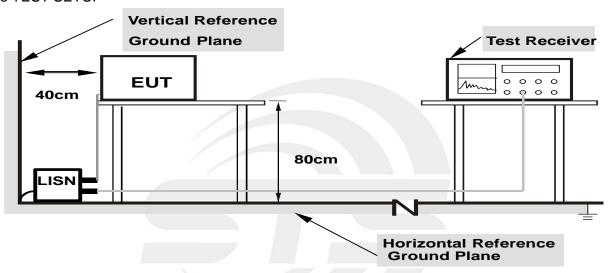

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.5TEST RESULTS

Temperature:	23.1 ℃	Relative Humidity:	61%
Pressure:	1010hPa	Phase:	L
Test Voltage:	AC 120V/60Hz	i test iviode.	Mode 1/2/3/4/5/6(Mode1-worst case)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1740	45.03	9.23	54.26	64.77	-10.51	QP
2	0.1740	29.76	9.23	38.99	54.77	-15.78	AVG
3	0.2316	43.58	9.20	52.78	62.39	-9.61	QP
4	0.2316	28.06	9.20	37.26	52.39	-15.13	AVG
5	0.4060	36.83	9.23	46.06	57.73	-11.67	QP
6	0.4060	23.56	9.23	32.79	47.73	-14.94	AVG
7	0.9740	33.21	9.25	42.46	56.00	-13.54	QP
8	0.9740	23.50	9.25	32.75	46.00	-13.25	AVG
9	2.2740	35.31	9.26	44.57	56.00	-11.43	QP
10	2.2740	24.26	9.26	33.52	46.00	-12.48	AVG
11	27.4940	35.50	10.01	45.51	60.00	-14.49	QP
12	27.4940	23.24	10.01	33.25	50.00	-16.75	AVG

Remark:

- 1. All readings are Quasi-Peak and Average values.
- 2. Margin = Result (Result = Reading + Factor)-Limit 100.0 dBuV

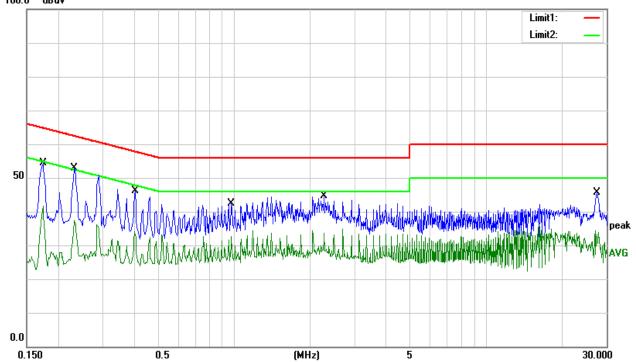




Temperature:	23.1 ℃	Relative Humidity:	61%
Pressure:	1010hPa	Phase:	N
Test Voltage:	AC 120V/60Hz	Test Mode:	Mode 1/2/3/4/5/6(Mode1-worst case)

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.1740	47.95	9.23	57.18	64.77	-7.59	QP
2	0.1740	29.81	9.23	39.04	54.77	-15.73	AVG
3	0.4661	40.74	9.17	49.91	56.58	-6.67	QP
4	0.4661	27.07	9.17	36.24	46.58	-10.34	AVG
5	1.1900	35.35	9.25	44.60	56.00	-11.40	QP
6	1.1900	23.95	9.25	33.20	46.00	-12.80	AVG
7	2.2700	30.06	9.26	39.32	56.00	-16.68	QP
8	2.2740	19.54	9.26	28.80	46.00	-17.20	AVG
9	12.8820	29.72	9.42	39.14	60.00	-20.86	QP
10	12.8820	19.32	9.42	28.74	50.00	-21.26	AVG
11	27.2780	36.71	10.00	46.71	60.00	-13.29	QP
12	27.2780	27.37	10.00	37.37	50.00	-12.63	AVG

Remark:

- All readings are Quasi-Peak and Average values.
 Margin = Result (Result = Reading + Factor)-Limit 100.0 dBuV

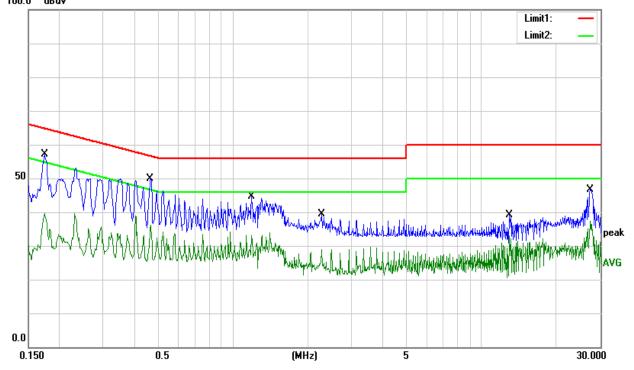



4. RADIATED& FIELD EMISSION TEST RESULT(SECTIOU 15.209)

4.1 Limit

Frequency [MHz]	Field Strength [uV/m]	Measurement Distance [Meters]
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

^{§ 15.209(}d)The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

4.2 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- d. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos. Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.




4.3 TEST SETUP

(A) Radiated Emission Test-Up Frequency Below 30MHz

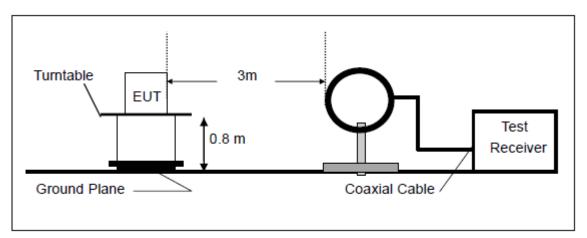

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

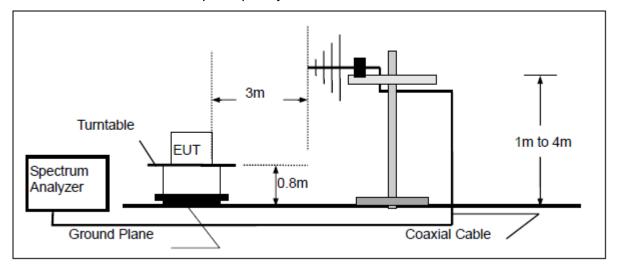

Report No.: STS1703256F01

4.4 TEST RESULTS

Temperature :	23.1 ℃	Relative Humidity:	61%
Pressure :	1012 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 1/2/3/4/5/6(Mode1-worst case)		

4.4.1 Spurious Radiated Emission Below 30 MHz

Frequency	Reading	Detector	Ant. Factor	Cable	Emission	Limits	Margin
(KHz)	(dBµV)	(PK/QP/AV)	(dB/m)	Loss	Level (dBµV/m)	(dBµV/m)	(dB)
9	70.25	PK	28.16	0.1	98.51	148.52	-50.01
9	62.35	AV	28.16	0.1	90.61	128.52	-37.91
23	71.36	PK	28.21	0.1	99.67	140.37	-40.70
23	60.14	AV	28.21	0.1	88.45	120.37	-31.92
36	64.85	PK	22.03	0.1	86.98	136.48	-49.50
36	55.36	AV	22.03	0.1	77.49	116.48	-38.99
45	65.36	PK	21.25	0.1	86.71	134.54	-47.83
45	54.98	AV	21.25	0.1	76.33	114.54	-38.21
111	90.28	PK	10.04	0.1	100.42	126.78	-26.36
111	80.39	AV	10.04	0.1	90.53	106.78	-16.25
175	91.41	PK	9.57	0.1	101.08	122.74	-21.66
175	81.69	AV	9.57	0.1	91.36	102.74	-11.38
205	92.58	PK	9.43	0.1	102.11	121.37	-19.26
205	82.47	AV	9.43	0.1	92.00	101.37	-9.37
554	53.24	QP	-16.36	0.1	36.98	72.73	-35.75
23214	52.32	QP	-17.9	0.9	35.32	53.98	-18.66

^{1. &}quot;*" Means Fundamental frequency

^{2.} Emission Level [dB μ V/m] = Reading [dB μ V] + Ant. Factor [dB/m] + Cable Loss [dB]

^{3.}Margin [dB] = Emission Level [dB μ V/m] – Limit [dB μ V/m]

^{4.}Limit calculation: Limit at specified distance + 40log (300/3) = Limit + 80 dB for up to 0.49 MHz Limit at specified distance + 40log (30/3) = Limit + 40 dB for above 0.49 MHz, Below 30 MHz



4.4.2 Spurious Radiated Emission below 1 GHz

Temperature :	26℃	Relative Humidity:	60%
Pressure :	1012 hPa	Test Voltage :	DC 5V
Test Mode :	Mode 1/2/3/4/5/6(Mode1-worst case)		

The following table shows the highest levels of radiated emissions on polarizations of vertical

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
39.1616	51.77	-15.89	35.88	40.00	-4.12	QP
44.7433	54.05	-18.78	35.27	40.00	-4.73	QP
64.8865	59.99	-24.22	35.77	40.00	-4.23	QP
145.8611	50.30	-17.77	32.53	43.50	-10.97	QP
171.3926	53.55	-19.34	34.21	43.50	-9.29	QP
470.5232	42.19	-9.75	32.44	46.00	-13.56	QP

Remark:

1. Margin = Result (Result = Reading + Factor)—Limit






Temperature :	26 ℃	Relative Humidity:	60%	
Pressure :	1012 hPa	Test Voltage :	DC 5V	
Test Mode :	Mode 1/2/3/4/5/6(Mode1-worst case)			

The following table shows the highest levels of radiated emissions on polarizations of horizontal

Frequency	Reading	Correct	Result	Limit	Margin	Remark
(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
30.9620	35.95	-11.68	24.27	40.00	-15.73	QP
45.0583	42.93	-18.93	24.00	40.00	-16.00	QP
176.8878	56.12	-19.41	36.71	43.50	-6.79	QP
226.8936	55.06	-18.68	36.38	46.00	-9.62	QP
564.6390	30.77	-6.59	24.18	46.00	-21.82	QP
989.5355	30.36	-0.11	30.25	54.00	-23.75	QP

Remark:

1. Margin = Result (Result = Reading + Factor)-Limit

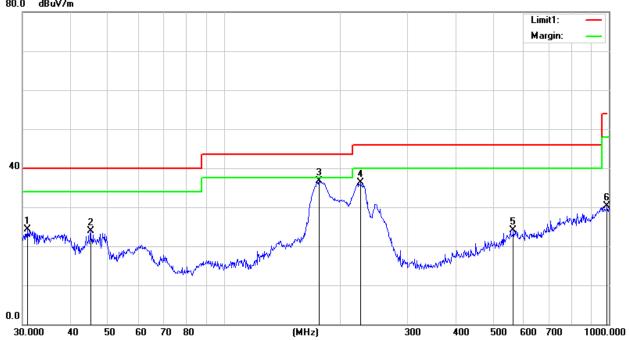



5. 20 DB BANDWIDTH TEST

5.1 Limit

FCC Part 2.1049, Only applicable to report.


5.2 TEST SETUP

The test program and configuration, Refer to 4.2 and 4.3

5.3 TEST RESULTS


OperatingFrequency (kHz)	20 dB Bandwhidth(Hz)		
111	262		
158	218		
205	259		

CH₀₀

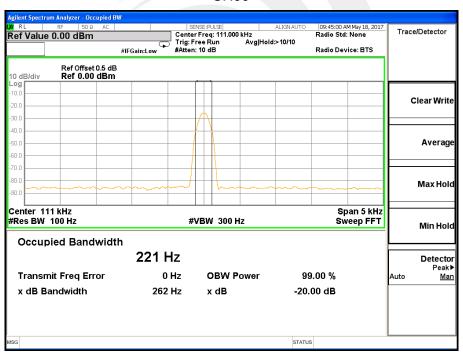




CH48

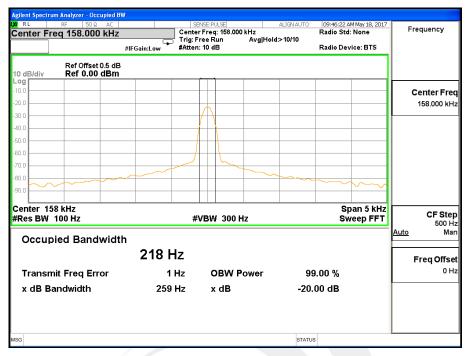

CH95

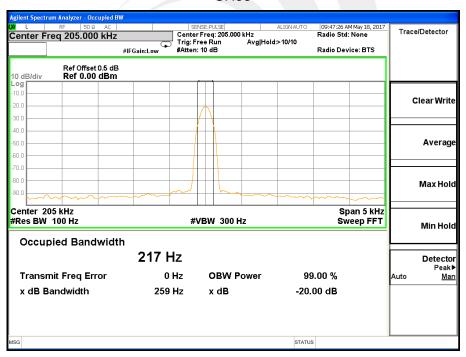



APPENDIX-PHOTOS OF TEST SETUP

Radiated emission Measurement Photos(9KHz-30MHz)



Radiated emission Measurement Photos(30MHz-1000MHz)





ConductionMeasurement Photos



* * * * * END OF THE REPORT * * * *