

# Global United Technology Services Co., Ltd.

Report No.: GTS201705000034F01

# FCC Report (Bluetooth)

**Applicant:** Spaceek Ltd

**Address of Applicant:** Halapid 8, Petach Tikva, Israel

Manufacturer/ Factory: Spaceek Ltd

Halapid 8, Petach Tikva, Israel Address of

**Manufacturer/ Factory:** 

**Equipment Under Test (EUT)** 

**Product Name: Smart Parking Sensor** 

Model No.: SM-200

FCC ID: 2ALR2-SPS01

FCC CFR Title 47 Part 15.247:2016 **Applicable standards:** 

Date of sample receipt: May 04, 2017

**Date of Test:** May 04-10, 2017

Date of report issued: May 10, 2017

PASS \* Test Result:

Authorized Signature:

**Robinson Lo Laboratory Manager** 

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.



# 2 Version

Version No.	Date	Description
00	May 10, 2017	Original

Prepared By:	Bolward. Pan	Date:	May 10, 2017	
	Project Engineer	_		
Check By:	Andy www. Reviewer	Date:	May 10, 2017	



# 3 Contents

			Page
1	COV	ER PAGE	1
2	VER	SION	2
3	CON	ITENTS	3
4	TES	T SUMMARY	4
5	GEN	IERAL INFORMATION	5
	5.1	GENERAL DESCRIPTION OF EUT	
	5.2 5.3	TEST MODE  DESCRIPTION OF SUPPORT UNITS	
	5.4	TEST FACILITY	
	5.5	TEST LOCATION	7
6	TES	T INSTRUMENTS LIST	8
7	TES	T RESULTS AND MEASUREMENT DATA	9
	7.1	ANTENNA REQUIREMENT	
	7.2	CONDUCTED OUTPUT POWER	
	7.3	CHANNEL BANDWIDTH	
	7.4 7.5	POWER SPECTRAL DENSITY	
	7.5.1		
	7.5.2		
	7.6	SPURIOUS EMISSION	
	7.6.1		
	7.6.2		
8	TES	T SETUP PHOTO	27
9	EUT	CONSTRUCTIONAL DETAILS	28



# 4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	N/A
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

# **Measurement Uncertainty**

Test Item	Frequency Range	Measurement Uncertainty	Notes		
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)		
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)		
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)		
AC Power Line Conducted Emission 0.15MHz ~ 30MHz ± 3.45dB (1)					



# **5** General Information

# 5.1 General Description of EUT

<del>-</del>	
Product Name:	Smart Parking Sensor
Model No.:	SM-200
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	PCB antenna
Antenna Gain:	0dBi
Power Supply:	DC 3.6V, 8.1Ah Lithium Battery



Operation I	Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency	
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz	
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz	
. :	. !	. ;	. !	· !	. !	. ;	· !	
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz	
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz	

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2440MHz
The Highest channel	2480MHz



# 5.2 Test mode

Transmitting mode Keep the EUT in continuously transmitting mode

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

### 5.3 Description of Support Units

None.

# 5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### • FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.

# • Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

# 5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480 Fax: 0755-27798960

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



# 6 Test Instruments list

Rad	Radiated Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020		
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A		
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 29 2016	June 28 2017		
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 29 2016	June 28 2017		
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 29 2016	June 28 2017		
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2016	June 28 2017		
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 29 2016	June 28 2017		
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		
9	Coaxial Cable	GTS	N/A	GTS213	June 29 2016	June 28 2017		
10	Coaxial Cable	GTS	N/A	GTS211	June 29 2016	June 28 2017		
11	Coaxial cable	GTS	N/A	GTS210	June 29 2016	June 28 2017		
12	Coaxial Cable	GTS	N/A	GTS212	June 29 2016	June 28 2017		
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 29 2016	June 28 2017		
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 29 2016	June 28 2017		
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 29 2016	June 28 2017		
16	Band filter	Amindeon	82346	GTS219	June 29 2016	June 28 2017		

Conduc	Conducted Emission:							
Item Test Equipment		Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019		
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 29 2016	June. 28 2017		
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 29 2016	June. 28 2017		
4	4 Artificial Mains SCHWARZBECH Network MESS		NSLK8127	GTS226	June. 29 2016	June. 28 2017		
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A		
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		
7	Thermo meter	KTJ	TA328	GTS233	June. 29 2016	June. 28 2017		

Gen	General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Barometer	ChangChun	DYM3	GTS257	June 29 2016	June 28 2017	



# 7 Test results and Measurement Data

# 7.1 Antenna requirement

**Standard requirement:** FCC Part15 C Section 15.203 /247(c)

#### 15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### **E.U.T Antenna:**


The antenna is PCB antenna, the best case gain of the antenna is 0dBi

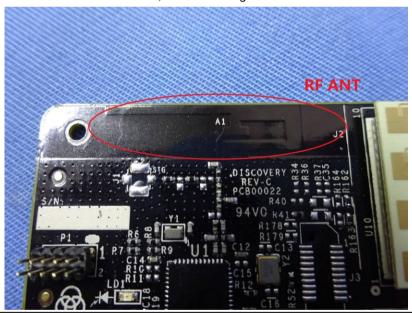

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



# 7.2 Conducted Output Power

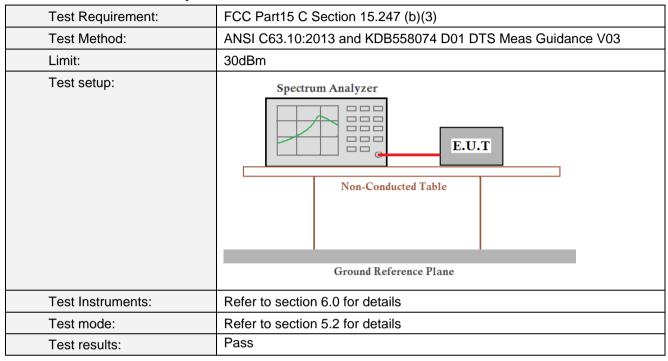


### **Measurement Data**


Test channel	est channel Peak Output Power (dBm) Limit(dBm)		Result	
Lowest 3.94				
Middle	3.60	30.00	Pass	
Highest	3.31			




# Test plot as follows:

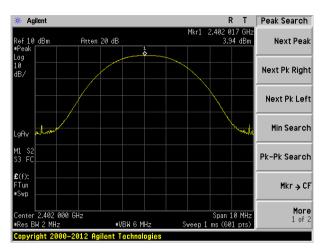

### Lowest channel

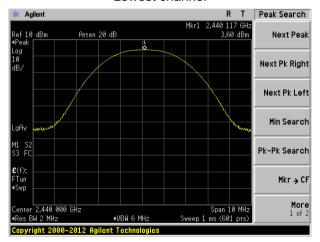

#### Middle channel

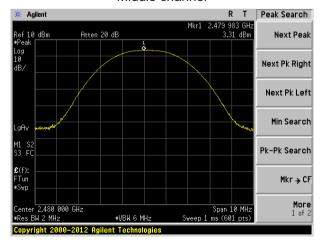

Highest channel



# 7.3 Channel Bandwidth


Test Requirement:	FCC Part15 C Section 15.247 (a)(2)		
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03		
Limit:	>500KHz		
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	Pass		

# **Measurement Data**

Test channel	Channel Bandwidth (MHz)	Limit(KHz)	Result
Lowest	0.706		
Middle	0.704	>500	Pass
Highest	0.738		




### Test plot as follows:

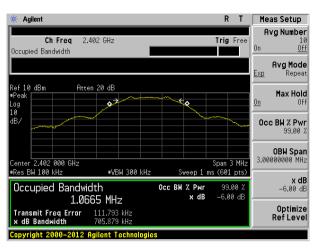

### Lowest channel




### Middle channel

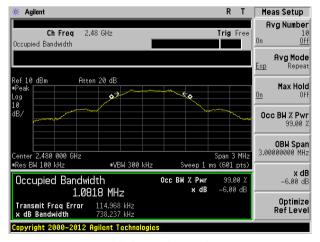

Highest channel



# 7.4 Power Spectral Density

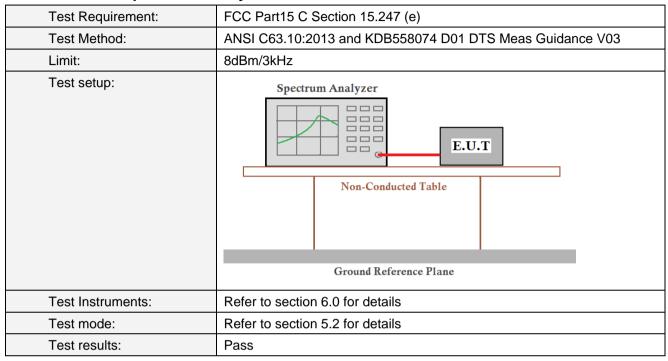


### **Measurement Data**


Test channel	Power Spectral Density (dBm)	Limit(dBm/3kHz)	Result
Lowest	-9.10		
Middle	-8.32	8.00	Pass
Highest	-7.07		




# Test plot as follows:

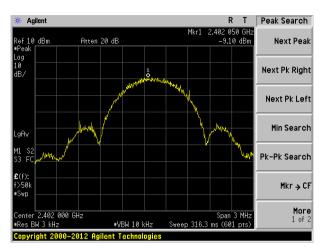

### Lowest channel

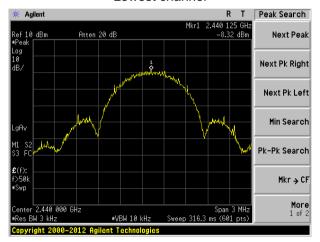

#### Middle channel

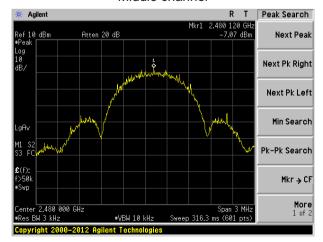

Highest channel




# 7.5 Band edges


# 7.5.1 Conducted Emission Method

Test Requirement:	FCC Part15 C Section 15.247 (d)			
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			
Test results:	Pass			

# Test plot as follows:

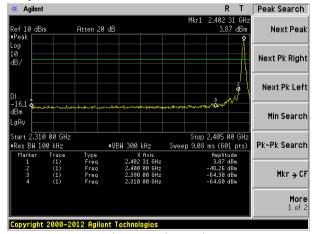



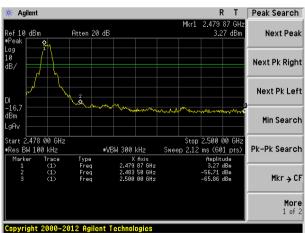

Highest channel

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



# 7.5.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205				
Test Method:	ANSI C63.10:20	)13			
Test Frequency Range:	All of the restrict 2500MHz) data		tested, only	the worst ba	and's (2310MHz to
Test site:	Measurement D	istance: 3m			
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	Above 1GHz	Peak	1MHz	3MHz	Peak
	Above 1G112	RMS	1MHz	3MHz	Average
Limit:	Freque	ncy	Limit (dBuV/	m @3m)	Value
	Above 1	CH2	54.0	0	Average
	Above	OFIZ	74.0	0	Peak
Test setup:	Antenna Tower  Horn Antenna  Spectrum  Analyzer  Amplifier				
Test Procedure:	the ground a determine the 2. The EUT was antenna, whi tower.  3. The antenna ground to de horizontal an measurement.  4. For each sus and then the and the rotathe maximum.  5. The test-recesspecified Ba.  6. If the emission the limit specified ba.  6. If the emission the limit specified ba.  7. The radiation.	<ol> <li>The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data</li> </ol>			
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section	5.2 for details			
Test results:	Pass				

Page 17 of 33



### Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Fest channel:	Lowest
---------------	--------

### Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	40.84	27.59	5.38	30.18	43.63	74.00	-30.37	Horizontal
2400.00	57.34	27.58	5.39	30.18	60.13	74.00	-13.87	Horizontal
2390.00	41.20	27.59	5.38	30.18	43.99	74.00	-30.01	Vertical
2400.00	59.16	27.58	5.39	30.18	61.95	74.00	-12.05	Vertical

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	31.85	27.59	5.38	30.18	34.64	54.00	-19.36	Horizontal
2400.00	42.97	27.58	5.39	30.18	45.76	54.00	-8.24	Horizontal
2390.00	31.65	27.59	5.38	30.18	34.44	54.00	-19.56	Vertical
2400.00	44.42	27.58	5.39	30.18	47.21	54.00	-6.79	Vertical

Toot channel:	Highoot
l est channel:	Highest
1 001 0110111011	1 ng.100t

# Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	42.70	27.53	5.47	29.93	45.77	74.00	-28.23	Horizontal
2500.00	42.26	27.55	5.49	29.93	45.37	74.00	-28.63	Horizontal
2483.50	43.20	27.53	5.47	29.93	46.27	74.00	-27.73	Vertical
2500.00	43.07	27.55	5.49	29.93	46.18	74.00	-27.82	Vertical

### Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	34.65	27.53	5.47	29.93	37.72	54.00	-16.28	Horizontal
2500.00	32.95	27.55	5.49	29.93	36.06	54.00	-17.94	Horizontal
2483.50	35.70	27.53	5.47	29.93	38.77	54.00	-15.23	Vertical
2500.00	32.70	27.55	5.49	29.93	35.81	54.00	-18.19	Vertical

#### Remark:

- 1. Final Level =Receiver Read level + Antenna Factor + Cable Loss Preamplifier Factor
- 2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



# 7.6 Spurious Emission

# 7.6.1 Conducted Emission Method


Test Requirement:	FCC Part15 C Section 15.247 (d)			
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03			
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.			
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			
Test results:	Pass			

# Test plot as follows:



# Test channel:


### Lowest channel

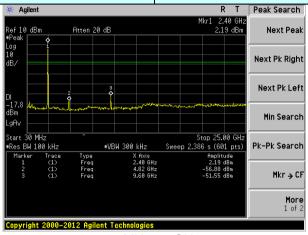

30MHz~25GHz

### Test channel:


### Middle channel

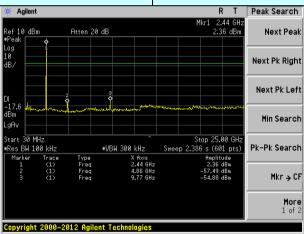

30MHz~25GHz

### Test channel:

### Highest channel

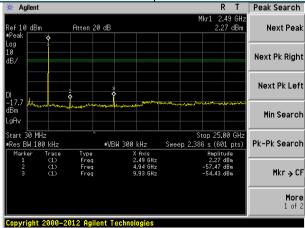

30MHz~25GHz



# 7.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Se	ection 15.209								
Test Method:	ANSI C63.10:2013									
Test Frequency Range:	30MHz to 25GHz	30MHz to 25GHz								
Test site:	Measurement Dis	Measurement Distance: 3m								
Receiver setup:	Frequency	Frequency Detector RBW VBW Value								
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak					
	Ab 2112 401  -	Peak	1MHz	3MHz	Peak					
	Above 1GHz	Average	1MHz	3MHz	Average					
Limit:	Frequer	ісу	Limit (dBuV/	/m @3m)	Value					
	30MHz-88	MHz	40.0	0	Quasi-peak					
	88MHz-216	6MHz	43.5	0	Quasi-peak					
	216MHz-96	0MHz	46.0	0	Quasi-peak					
	960MHz-1	GHz	54.0	0	Quasi-peak					
	Above 10	Above 1GHz 54.00 74.00								
	Above ic									
Test setup:	Below 1GHz	EUT+		Antenna 4m >	iier <sub>t'</sub>					
	Above 1GHz									

Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



	Tum Table - Company Receiver Preamplifier Preamplifier
Test Procedure:	The EUT was placed on the top of a rotating table (0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
	The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.
	7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

### Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



# **Measurement Data**

# ■ Below 1GHz

- BCIOW I	<u> </u>							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
40.56	33.80	12.27	0.67	32.05	14.69	40.00	-25.31	Vertical
62.65	38.08	10.07	0.88	31.92	17.11	40.00	-22.89	Vertical
120.28	40.87	9.40	1.36	31.86	19.77	43.50	-23.73	Vertical
199.99	53.30	10.20	1.84	32.14	33.20	43.50	-10.30	Vertical
213.02	52.18	10.69	1.92	32.15	32.64	43.50	-10.86	Vertical
501.18	46.24	17.55	3.31	31.56	35.54	46.00	-10.46	Vertical
61.35	45.91	10.07	0.87	31.93	24.92	40.00	-15.08	Horizontal
125.01	49.11	8.75	1.40	31.88	27.38	43.50	-16.12	Horizontal
181.92	52.33	8.80	1.75	32.09	30.79	43.50	-12.71	Horizontal
213.02	53.83	10.69	1.92	32.15	34.29	43.50	-9.21	Horizontal
300.37	52.61	13.50	2.36	32.17	36.30	46.00	-9.70	Horizontal
370.70	48.10	14.91	2.72	31.97	33.76	46.00	-12.24	Horizontal



# ■ Above 1GHz

Test channel	Test channel: Lowest							
Peak value:				•				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	36.37	31.78	8.60	32.09	44.66	74.00	-29.34	Vertical
7206.00	36.65	36.15	11.65	32.00	52.45	74.00	-21.55	Vertical
9608.00	34.98	37.95	14.14	31.62	55.45	74.00	-18.55	Vertical
12010.00	*					74.00		Vertical
14412.00	*					74.00		Vertical
4804.00	40.47	31.78	8.60	32.09	48.76	74.00	-25.24	Horizontal
7206.00	35.71	36.15	11.65	32.00	51.51	74.00	-22.49	Horizontal
9608.00	30.25	37.95	14.14	31.62	50.72	74.00	-23.28	Horizontal
12010.00	*					74.00		Horizontal
14412.00	*					74.00		Horizontal
14412.00						74.00		Horizontal

#### Average value:

Average var	uc.							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	25.36	31.78	8.60	32.09	33.65	54.00	-20.35	Vertical
7206.00	20.00	36.15	11.65	32.00	35.80	54.00	-18.20	Vertical
9608.00	19.14	37.95	14.14	31.62	39.61	54.00	-14.39	Vertical
12010.00	*					54.00		Vertical
14412.00	*					54.00		Vertical
4804.00	29.49	31.78	8.60	32.09	37.78	54.00	-16.22	Horizontal
7206.00	22.11	36.15	11.65	32.00	37.91	54.00	-16.09	Horizontal
9608.00	18.79	37.95	14.14	31.62	39.26	54.00	-14.74	Horizontal
12010.00	*					54.00		Horizontal
14412.00	*					54.00		Horizontal

### Remark:

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960 Page 24 of 33

<sup>1.</sup> Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

<sup>2. &</sup>quot;\*", means this data is the too weak instrument of signal is unable to test.



Test channel	I: Middle							
Peak value:		1	1	<u>.</u>	1		1	
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4884.00	45.71	31.85	8.67	32.12	54.11	74.00	-19.89	Vertical
7326.00	37.40	36.37	11.72	31.89	53.60	74.00	-20.40	Vertical
9768.00	36.43	38.35	14.25	31.62	57.41	74.00	-16.59	Vertical
12210.00	*					74.00		Vertical
14652.00	*					74.00		Vertical
4884.00	51.71	31.85	8.67	32.12	60.11	74.00	-13.89	Horizontal
7326.00	39.90	36.37	11.72	31.89	56.10	74.00	-17.90	Horizontal
9768.00	36.65	38.35	14.25	31.62	57.63	74.00	-16.37	Horizontal
12210.00	*					54.00		Horizontal
14652.00	*					54.00		Horizontal
Average val	ue:							
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4884.00	32.98	31.85	8.67	32.12	41.38	54.00	-12.62	Vertical
7326.00	25.17	36.37	11.72	31.89	41.37	54.00	-12.63	Vertical
9768.00	23.72	38.35	14.25	31.62	44.70	54.00	-9.30	Vertical
12210.00	*					54.00		Vertical
14652.00	*					54.00		Vertical
4884.00	38.15	31.85	8.67	32.12	46.55	54.00	-7.45	Horizontal
7326.00	27.91	36.37	11.72	31.89	44.11	54.00	-9.89	Horizontal
9768.00	24.15	38.35	14.25	31.62	45.13	54.00	-8.87	Horizontal
12210.00	*					54.00		Horizontal
14652.00	*					54.00		Horizontal

#### Remark:

<sup>1.</sup> Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor

<sup>2. &</sup>quot;\*", means this data is the too weak instrument of signal is unable to test.



Test channel	l:			ŀ	Highest			
Peak value:								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Pream Factor (dB)	. 1 16/161	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	35.41	31.93	8.73	32.16	43.91	74.00	-30.09	Vertical
7440.00	37.14	36.59	11.79	31.78	53.74	74.00	-20.26	Vertical
9920.00	30.35	38.81	14.38	31.88	51.66	74.00	-22.34	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	39.31	31.93	8.73	32.16	47.81	74.00	-26.19	Horizontal
7440.00	32.16	36.59	11.79	31.78	48.76	74.00	-25.24	Horizontal
9920.00	29.59	38.81	14.38	31.88	50.90	74.00	-23.10	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal
Average val	ue:				·			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Pream Factor (dB)	.     6/6	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	24.61	31.93	8.73	32.16	33.11	54.00	-20.89	Vertical
7440.00	26.84	36.59	11.79	31.78	43.44	54.00	-10.56	Vertical
9920.00	18.69	38.81	14.38	31.88	40.00	54.00	-14.00	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	28.63	31.93	8.73	32.16	37.13	54.00	-16.87	Horizontal
7440.00	21.54	36.59	11.79	31.78	38.14	54.00	-15.86	Horizontal
9920.00	18.26	38.81	14.38	31.88	39.57	54.00	-14.43	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

#### Remark:


<sup>1.</sup> Final Level =Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor


<sup>2. &</sup>quot;\*", means this data is the too weak instrument of signal is unable to test.



# 8 Test Setup Photo

Radiated Emission

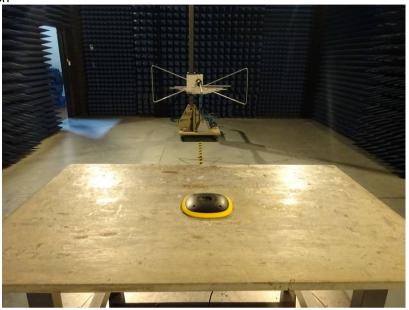


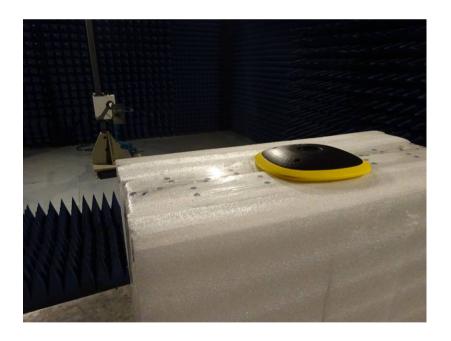





# 9 EUT Constructional Details



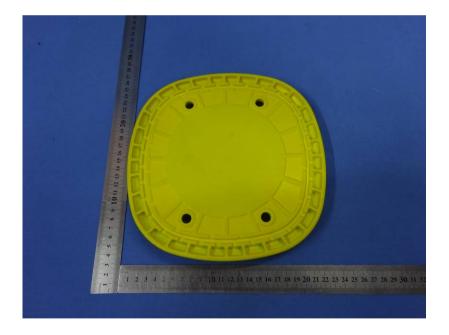





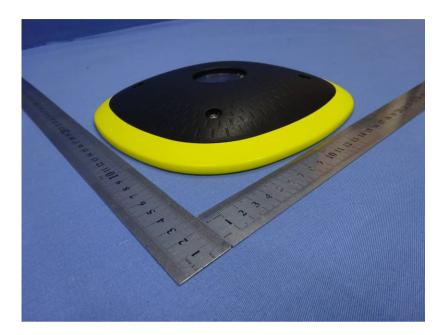

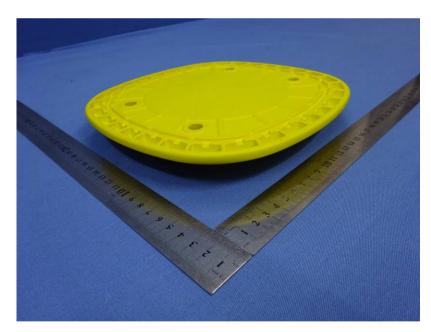





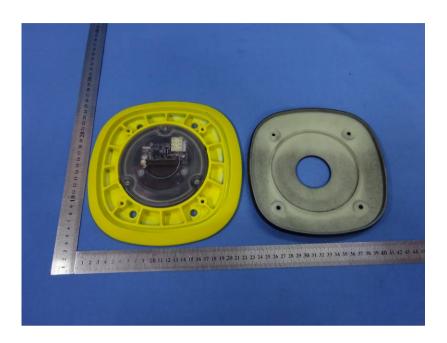

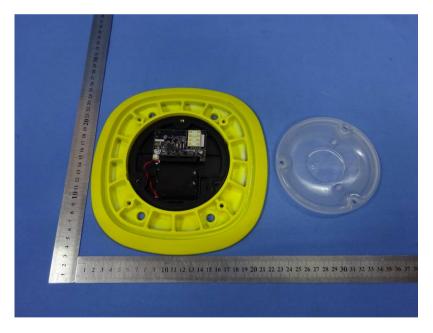





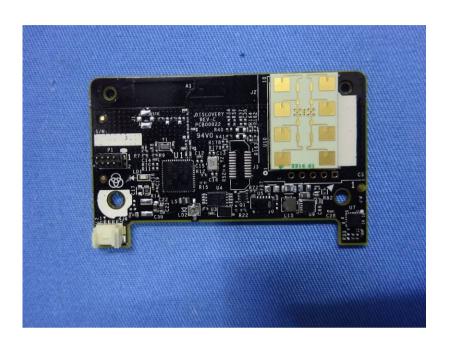

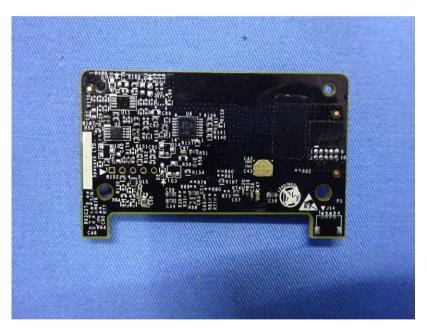



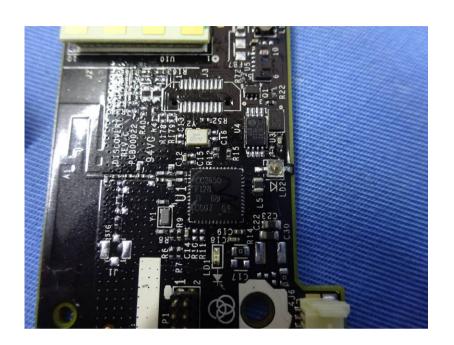

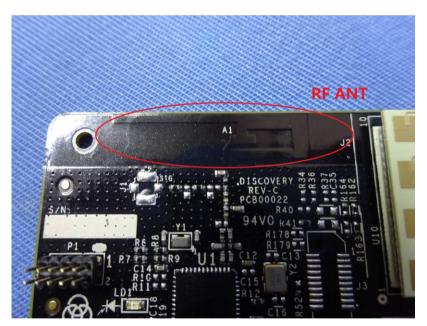





-----End-----