

MEASUREMENT REPORT

FCC PART 15.247 / RSS-247 BLE

FCC ID: 2ALS8-OP0001
IC: 22636-OP0001
Applicant: Ninebot (Changzhou) Tech Co., Ltd.


Application Type: Certification
Product Name: Ninebot Gokart central display
Model No.: N2CZ02
Brand Name: Ninebot
FCC Classification: Digital Transmission System (DTS)
FCC Rule Part(s): Part 15 Subpart C (Section 15.247)
ISED Rule(s): RSS-247 Issue 2, RSS-GEN Issue 5
Test Procedure(s): ANSI C63.10-2013
Test Date: December 16 ~ 28, 2020

Reviewed By:



Vincent Yu

Approved By:



Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
2012RSU047-U1	Rev. 01	Initial Report	01-08-2021	Valid

CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Testing Facility	5
2. PRODUCT INFORMATION	6
2.1. Feature of Equipment under Test.....	6
2.2. Product Specification Subjective to this Report.....	6
2.3. Working Frequencies for this Report.....	7
2.4. Test Mode	7
2.5. Test Environment Condition	7
2.6. Test Software	7
2.7. Configuration of Tested System	8
2.8. Test System Details.....	8
2.9. Duty Cycle	9
3. ANTENNA REQUIREMENTS	10
4. TEST EQUIPMENT CALIBRATION DATE	11
5. MEASUREMENT UNCERTAINTY	15
6. TEST RESULT	16
6.1. Summary	16
6.2. Occupied Bandwidth Measurement	17
6.2.1. Test Limit	17
6.2.2. Test Procedure used	17
6.2.3. Test Setting.....	17
6.2.4. Test Setup	18
6.2.5. Test Result.....	19
6.3. Output Power Measurement	21
6.3.1. Test Limit	21
6.3.2. Test Procedure Used.....	21
6.3.3. Test Setting.....	21
6.3.4. Test Setup	22
6.3.5. Test Result of Output Power.....	23
6.4. Power Spectral Density Measurement.....	24
6.4.1. Test Limit	24
6.4.2. Test Procedure Used.....	24

6.4.3.	Test Setting.....	24
6.4.4.	Test Setup	24
6.4.5.	Test Result.....	25
6.5.	Conducted Band Edge and Out-of-Band Emissions	26
6.5.1.	Test Limit	26
6.5.2.	Test Procedure Used	26
6.5.3.	Test Setting.....	26
6.5.4.	Test Setup	27
6.5.5.	Test Result.....	28
6.6.	Radiated Spurious Emission Measurement	30
6.6.1.	Test Limit	30
6.6.2.	Test Procedure Used	31
6.6.3.	Test Setting.....	31
6.6.4.	Test Setup	32
6.6.5.	Test Result.....	34
6.7.	Radiated Restricted Band Edge Measurement.....	39
6.7.1.	Test Limit	39
6.7.2.	Test Procedure Used	42
6.7.3.	Test Setting.....	42
6.7.4.	Test Setup	43
6.7.5.	Test Result.....	44
6.8.	AC Conducted Emissions Measurement.....	52
6.8.1.	Test Limit	52
6.8.2.	Test Setup	52
6.8.3.	Test Result.....	52
7.	CONCLUSION.....	53
	Appendix A - Test Setup Photograph.....	54
	Appendix B - EUT Photograph	55

1.1. Applicant

16F-17F, Block A, Building 3, Changwu Mid Road 18#, Wujin Dist., Changzhou, Jiangsu, China

16F-17F, Block A, Building 3, Changwu Mid Road 18#, Wujin Dist., Changzhou, Jiangsu, China

☒	Test Site – MRT Suzhou Laboratory
	Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
	Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China
	Laboratory Accreditations
	A2LA: 3628.01 FCC: CN1166 VCCI: R-20025, G-20034, C-20020, T-20020
	CNAS: L10551 ISED: CN0001
☐	Test Site – MRT Shenzhen Laboratory
	Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China
	Laboratory Accreditations
	A2LA: 3628.02 FCC: CN1284
☐	Test Site – MRT Taiwan Laboratory
	Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)
	Laboratory Accreditations
	TAF: L3261-190725 FCC: 291082, TW3261
☐	

2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name	Ninebot Gokart central display
Model No.	N2CZ02
Brand Name	Ninebot
PMN	N2CZ02
HVIN	N2CZ02
Bluetooth Specification	Bluetooth 4.1 (BLE Only)
Test Sample Identification Code	For Conducted Measurement: 20201214#21 For Radiated Measurement: 20201214#22
Power Supply	2 * AAA Batteries (3VDC)

2.2. Product Specification Subjective to this Report

Frequency Range	2402 ~ 2480MHz
Channel Number	40
Modulation	GFSK
Data Rate	1Mbps
Antenna Type	PCB Antenna
Antenna Gain	-1.26dBi

Note: Above antenna information is provided by manufacturer.

2.3. Working Frequencies for this Report

Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz
03	2408 MHz	04	2410 MHz	05	2412 MHz
06	2414 MHz	07	2416 MHz	08	2418 MHz
09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz
15	2432 MHz	16	2434 MHz	17	2436 MHz
18	2438 MHz	19	2440 MHz	20	2442 MHz
21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz
27	2456 MHz	28	2458 MHz	29	2460 MHz
30	2462 MHz	31	2464 MHz	32	2466 MHz
33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz
39	2480 MHz	--	--	--	--

2.4. Test Mode

Test Mode	Transmit by BLE
-----------	-----------------

2.5. Test Environment Condition


Ambient Temperature	15°C ~ 35°C
Relative Humidity	20%RH ~75%RH

2.6. Test Software

The test utility software used during testing was “nRFgo Studio”, and the version was “1.12.1.1992”.

2.7. Configuration of Tested System

The ANSI C63.10: 2013 was used to reference the appropriate EUT setup for testing.

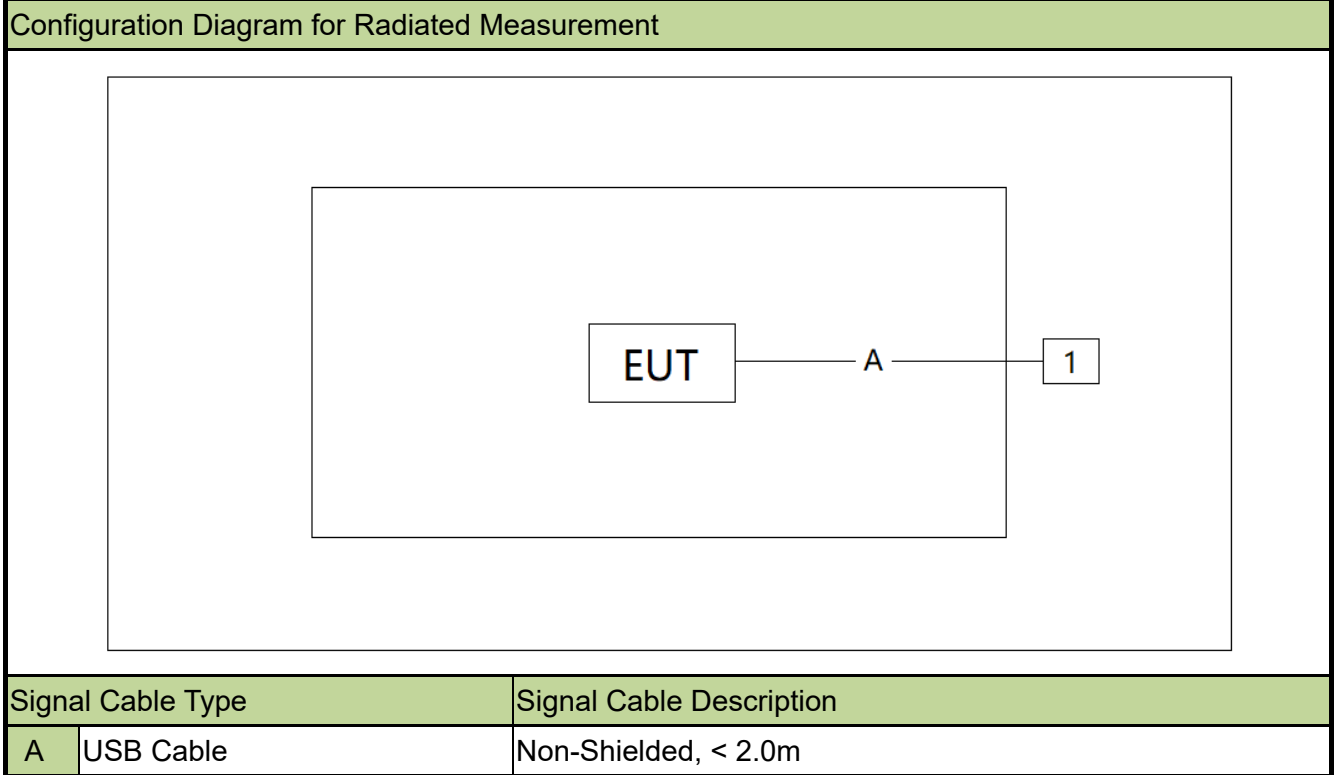

2.8. Test System Details


The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1	PC	DELL	Inspiron 15-7572	N/A
				Non-Shielded, < 2.0m

2.9. Duty Cycle

The maximum achievable duty cycle was determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz. The RBW and VBW were both greater than $50/T$, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Test Mode	Duty Cycle
BLE	21.99%

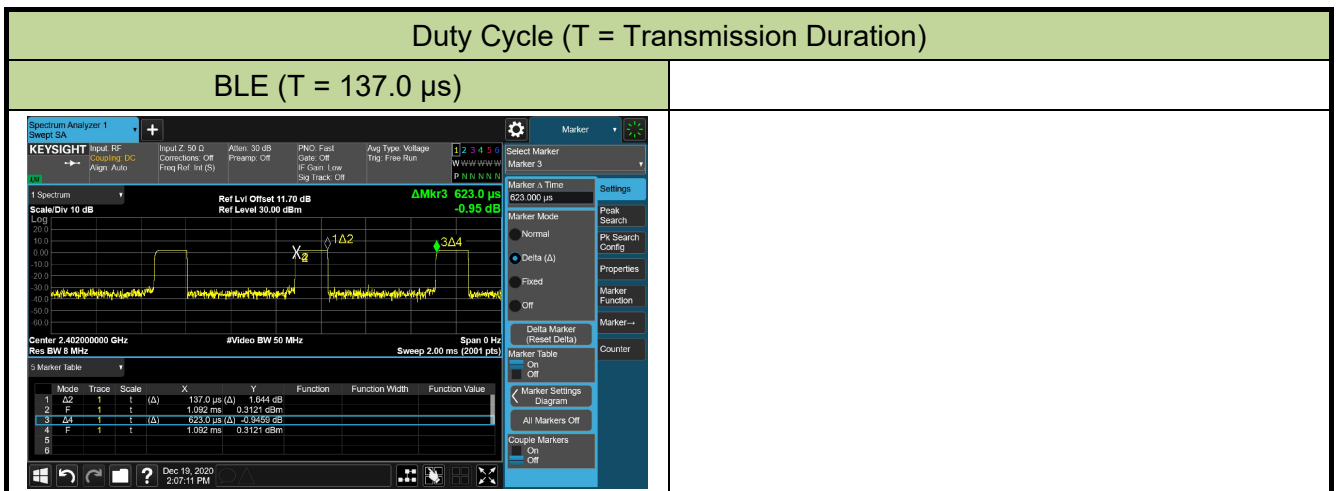

3. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the device is permanently attached.
- There are no provisions for connection to an external antenna.

Conclusion:

The unit complies with the requirement of §15.203.

4. TEST EQUIPMENT CALIBRATION DATE

Conducted Emission - WZ-SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2021/01/18
Two-Line V-Network	R&S	ENV216	MRTSUE06002	1 year	2021/09/09
Thermal Hygrometer	testo	608-H1	MRTSUE06404	1 year	2021/07/26
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Conducted Emission - SIP-SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2021/07/02
Two-Line V-Network	R&S	ENV216	MRTSUE06003	1 year	2021/09/09
Thermal Hygrometer	testo	608-H1	MRTSUE06621	1 year	2021/12/03

Radiated Emission - WZ-AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2021/01/18
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2021/08/08
Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2021/09/27
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermal Hygrometer	testo	608-H1	MRTSUE06403	1 year	2021/07/26
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2021/04/30

Radiated Emission - WZ-AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
MXE EMI Receiver	Keysight	N9038A	MRTSUE06125	1 year	2021/07/02
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2021/05/26
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06171	1 year	2021/10/25
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06597	1 year	2021/12/14
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2021/11/14
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2021/06/11
Thermal Hygrometer	Minggao	ETH529	MRTSUE06170	1 year	2021/12/08
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2021/04/30

Radiated Emission - SIP-AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2021/07/02
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2021/07/23
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06645	1 year	2021/08/30
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06610	1 year	2021/08/30
Preamplifier	EMCI	EMC051845SE	MRTSUE06600	1 year	2021/11/12
Thermal Hygrometer	testo	608-H1	MRTSUE06620	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC1	MRTSUE06554	1 year	2021/12/24

Radiated Emission - SIP-AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06613	1 year	2021/07/02
MXA Signal Analyzer	Keysight	N9020B	MRTSUE06604	1 year	2021/09/26
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06646	1 year	2021/08/30
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06648	1 year	2021/11/26
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06599	1 year	2021/11/26
Preamplifier	EMCI	EMC051845SE	MRTSUE06644	1 year	2021/11/12
Preamplifier	EMCI	EMC184045SE	MRTSUE06602	1 year	2021/10/13
Thermal Hygrometer	testo	608-H1	MRTSUE06624	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC2	MRTSUE06781	1 year	2021/12/24

Radiated Emission - SIP-AC3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06612	1 year	2021/07/02
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06559	1 year	2021/07/23
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2021/11/08
Bilog Period Antenna	Schwarzbeck	VULB9168	MRTSUE06647	1 year	2021/08/08
Double Ridged Horn Antenna	R&S	HF907	MRTSUE06611	1 year	2021/09/13
Horn Antenna	Schwarzbeck	BBHA9170	MRTSUE06598	1 year	2021/11/26
Preamplifier	EMCI	EMC012645SE	MRTSUE06642	1 year	2021/01/16
Preamplifier	EMCI	EMC184045SE	MRTSUE06641	1 year	2021/01/16
Thermal Hygrometer	testo	608-H1	MRTSUE06622	1 year	2021/12/03
Anechoic Chamber	RIKEN	SIP-AC3	MRTSUE06782	1 year	2021/12/24

Conducted Test Equipment - WZ-TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2021/04/14
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06607	1 year	2021/01/08
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/14
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2021/10/22
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2021/08/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2021/08/08
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2021/06/11
Modulation Analyzer	HP	HP8901A	MRTSUE06098	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Attenuator	SHX	TS2-6dB	MRTSUE06538	N/A	N/A
Attenuator	MVE	10dB	MRTSUE06540	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2021/10/22
Temperature Humidity Meter	testo	608-H1	MRTSUE06401	1 year	2021/07/26

Conducted Test Equipment - SIP-SR5

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2021/04/14
PXA Signal Analyzer	Keysight	N9030B	MRTSUE06395	1 year	2021/08/30
USB wideband power sensor	Agilent	U2021XA	MRTSUE06595	1 year	2021/09/26
USB wideband power sensor	Agilent	U2021XA	MRTSUE06596	1 year	2021/09/26
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2021/10/20
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2021/06/11
Temperature Chamber	BAOYT	BYG-408CS	MRTSUE06847	1 year	2021/03/31
Thermal Hygrometer	testo	622	MRTSUE06629	1 year	2021/11/25

Software	Version	Function
EMI Software	V3	EMI Test Software

5. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

AC Conducted Emission Measurement
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 9kHz~150kHz: 3.74dB 150kHz~30MHz: 3.44dB
Radiated Disturbance
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): Horizontal: 30MHz~300MHz: 5.04dB 300MHz~1GHz: 4.95dB 1GHz~40GHz: 6.40dB Vertical: 30MHz~300MHz: 5.24dB 300MHz~1GHz: 6.03dB 1GHz~40GHz: 6.40dB
Spurious Emissions, Conducted
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.78dB
Output Power
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.13dB
Power Spectrum Density
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 1.15dB
Occupied Bandwidth
Measurement Uncertainty for a Level of Confidence of 95% ($U=2Uc(y)$): 0.28%

6. TEST RESULT

6.1. Summary

FCC Part Section(s)	RSS Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.247(a)(2)	RSS-247 [5.2]	6dB Bandwidth	$\geq 500\text{kHz}$	Conducted	Pass	Section 6.2
N/A	RSS-Gen [6.7]	99% Bandwidth	N/A		Pass	
15.247(b)(3)	RSS-247 [5.4(d)]	Output Power	$\leq 1\text{Watt}$ & $\text{EIRP} \leq 4\text{Watt}$		Pass	Section 6.3
15.247(e)	RSS-247 [5.2]	Power Spectral Density	$\leq 8\text{dBm} / 3\text{kHz}$		Pass	Section 6.4
15.247(d)	RSS-247 [5.5]	Band Edge / Out-of-Band Emissions	$\leq 20\text{dBc}$ (Peak)		Pass	Section 6.5
15.205 15.209	RSS-247 [5.5]	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Radiated	Pass	Section 6.6 & 6.7
15.207	RSS-Gen [8.8]	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 6.8

Notes:

- 1) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst-case emissions.
- 2) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.

6.2. Occupied Bandwidth Measurement

6.2.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.

6.2.2. Test Procedure used

ANSI C63.10-2013 - Section 11.8 (6dB Bandwidth)

ANSI C63.10-2013 - Section 6.9.3 (99% Bandwidth)

6.2.3. Test Setting


For 6dB bandwidth

1. The Spectrum's automatic bandwidth measurement capability was used to perform the 6dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 6$. The bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission.
2. Set RBW = 100 kHz
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize

For 99% bandwidth

1. Span = 1.5 times to 5 times the OBW
2. Set RBW = 1% to 5% the OBW
3. $VBW \geq 3 \times RBW$
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep = Auto couple
7. Allow the trace to stabilize


6.2.4. Test Setup

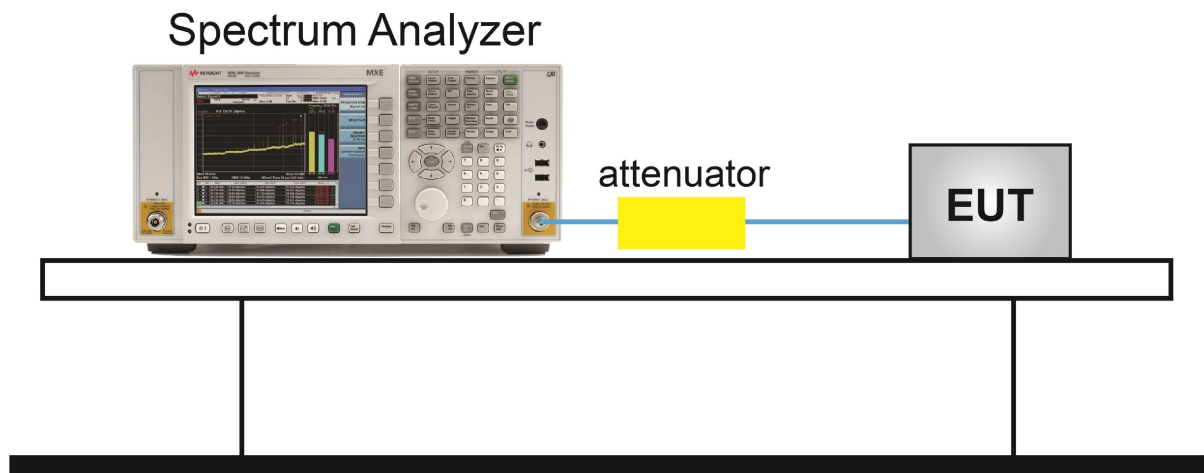

6.2.5. Test Result


Product	Ninebot Gokart central display	Test Engineer	Bruce Wang
Test Site	WZ-TR3	Test Date	2020/12/19

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
BLE	1	00	2402	0.721	≥ 0.5	Pass
BLE	1	19	2440	0.715	≥ 0.5	Pass
BLE	1	39	2480	0.705	≥ 0.5	Pass

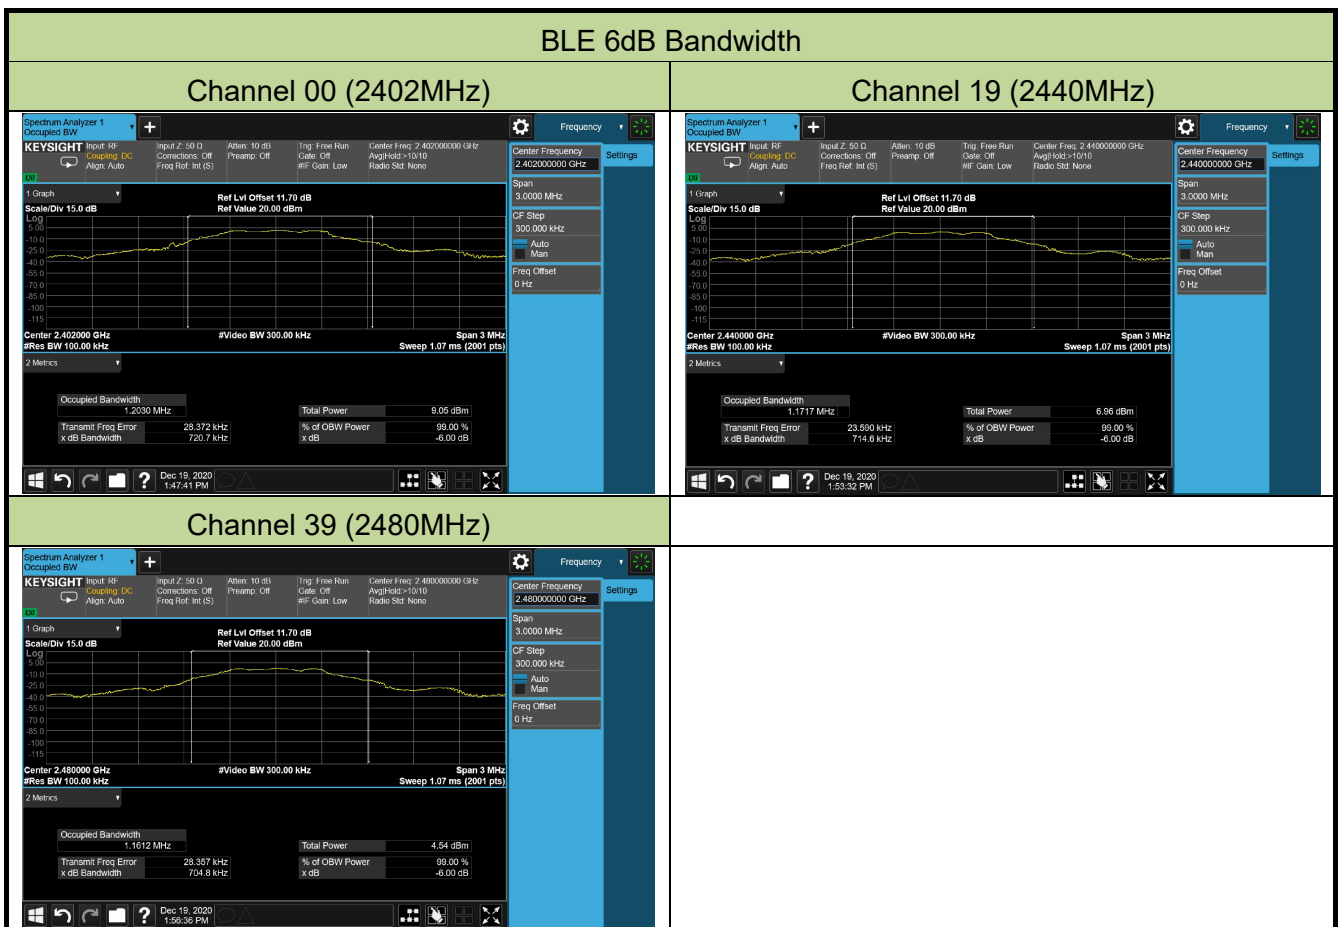

Product	Ninebot Gokart central display	Test Engineer	Bruce Wang
Test Site	WZ-TR3	Test Date	2020/12/28

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	99% Bandwidth (MHz)
BLE	1	00	2402	1.113
BLE	1	19	2440	1.083
BLE	1	39	2480	1.058

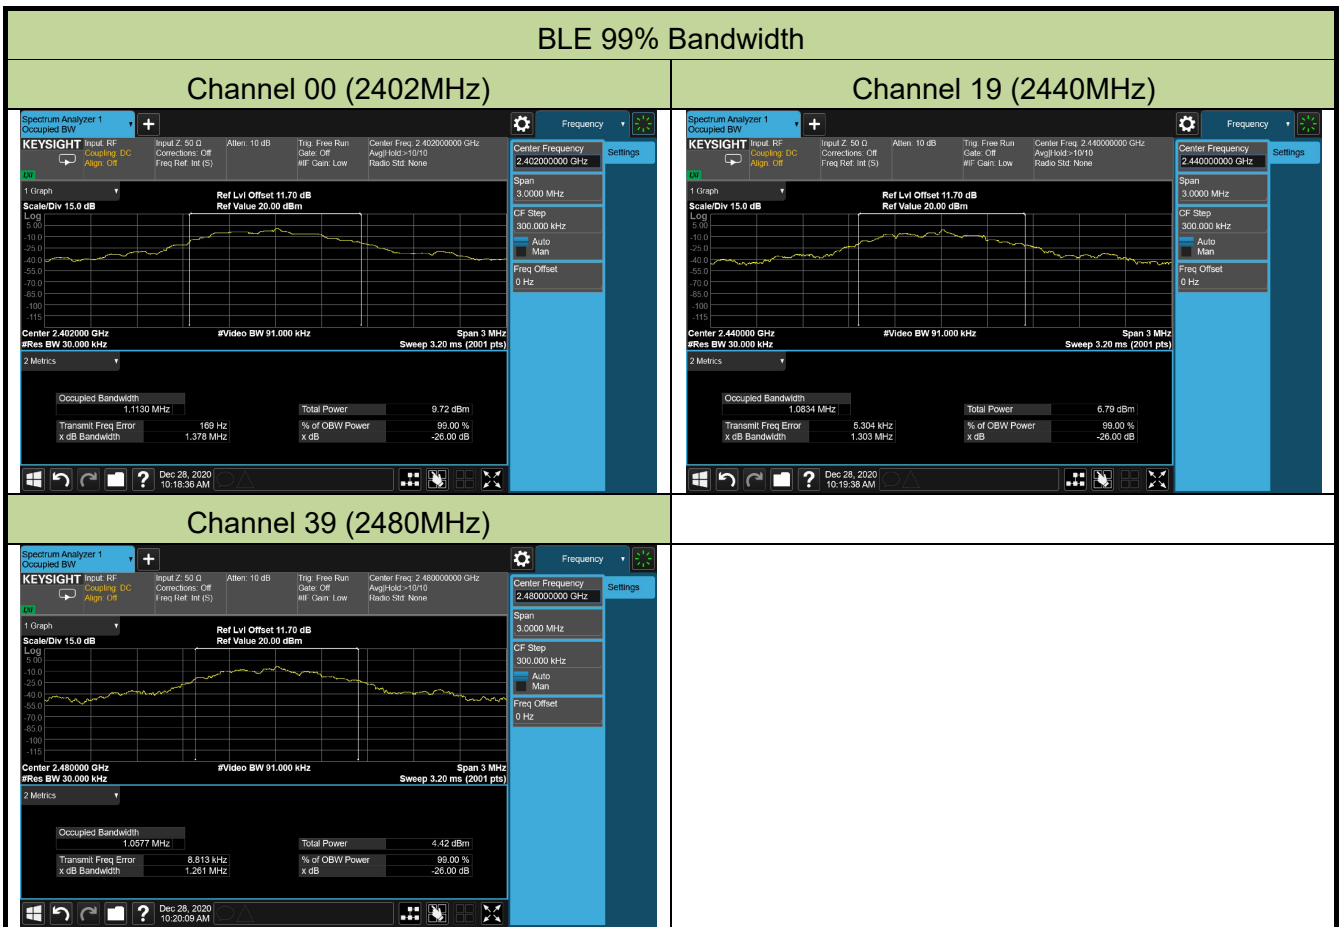

6.3. Output Power Measurement

6.3.1. Test Limit

The maximum out power shall be less 1 Watt (30dBm) and the E.I.R.P shall not exceed 4 Watt (36dBm).

6.3.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.9.1.3

ANSI C63.10-2013 - Section 11.9.2.3.2

6.3.3. Test Setting


Method PKPM1 (Peak Power Measurement)

Peak power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The pulse sensor employs a VBW = 50MHz so this method was only used for signals whose DTS bandwidth was less than or equal to 50MHz.

Method AVGPM-G (Measurement using a gated RF average-reading power meter)

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since this measurement is made only during the ON time of the transmitter, no duty cycle correction is required.

6.3.4. Test Setup

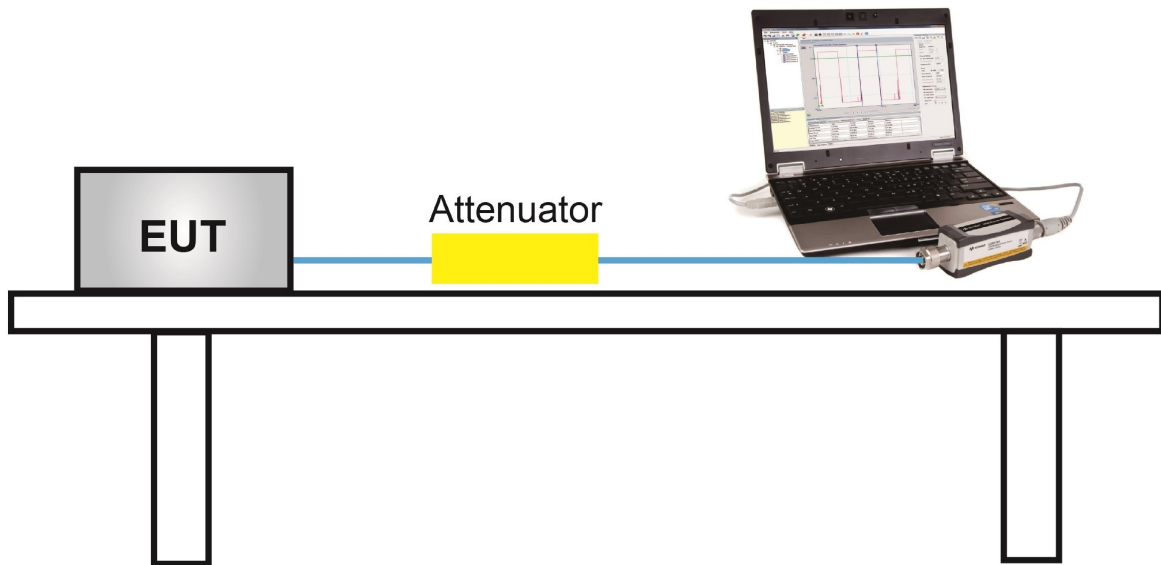

6.3.5. Test Result of Output Power

Product	Ninebot Gokart central display	Test Engineer	Bruce Wang
Test Site	WZ-TR3	Test Date	2020/12/19

Test Result of Peak Output Power

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)	Result
BLE	1	00	2402	2.10	≤ 30.00	0.84	≤ 36.02	Pass
BLE	1	19	2440	0.26	≤ 30.00	-1.00	≤ 36.02	Pass
BLE	1	39	2480	-1.85	≤ 30.00	-3.11	≤ 36.02	Pass

Note: E.I.R.P. (dBm) = Peak Power (dBi) + Antenna Gain (dBi), Antenna Gain = -1.26dBi.

Test Result of Average Output Power (Reporting Only)

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Average Power (dBm)	Limit (dBm)	E.I.R.P (dBm)	E.I.R.P Limit (dBm)	Result
BLE	1	00	2402	1.75	≤ 30.00	0.49	≤ 36.02	Pass
BLE	1	19	2440	-0.23	≤ 30.00	-1.49	≤ 36.02	Pass
BLE	1	39	2480	-2.43	≤ 30.00	-3.69	≤ 36.02	Pass

Note: E.I.R.P. (dBm) = Average Power (dBm) + Antenna Gain (dBi), Antenna Gain = -1.26dBi.

6.4. Power Spectral Density Measurement

6.4.1. Test Limit

The maximum permissible power spectral density is 8dBm in any 3 kHz band.


6.4.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.10.2

6.4.3. Test Setting

1. Analyzer was set to the center frequency of the DTS channel under investigation
2. Span = 1.5 times the DTS channel bandwidth
3. RBW = 3kHz
4. VBW $\geq 3 \times$ RBW
5. Detector = Peak
6. Sweep time = Auto couple
7. Trace mode = Max hold
8. Allow trace to stabilize


6.4.4. Test Setup

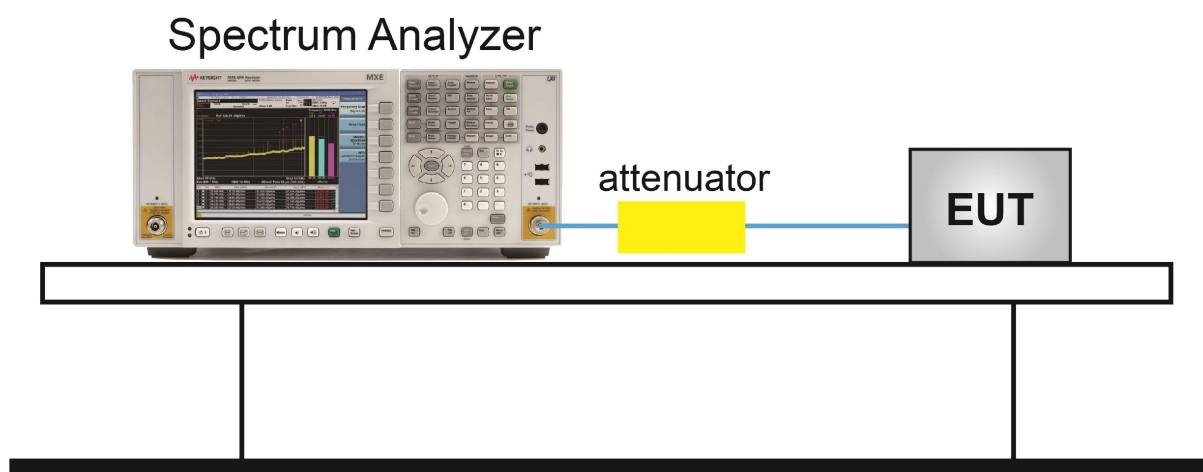

6.4.5. Test Result

Product	Ninebot Gokart central display	Test Engineer	Bruce Wang
Test Site	WZ-TR3	Test Date	2020/12/19

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Peak PSD (dBm / 3kHz)	Limit (dBm / 3kHz)	Result
BLE	1	00	2402	-11.54	≤ 8.00	Pass
BLE	1	19	2440	-13.57	≤ 8.00	Pass
BLE	1	39	2480	-15.83	≤ 8.00	Pass

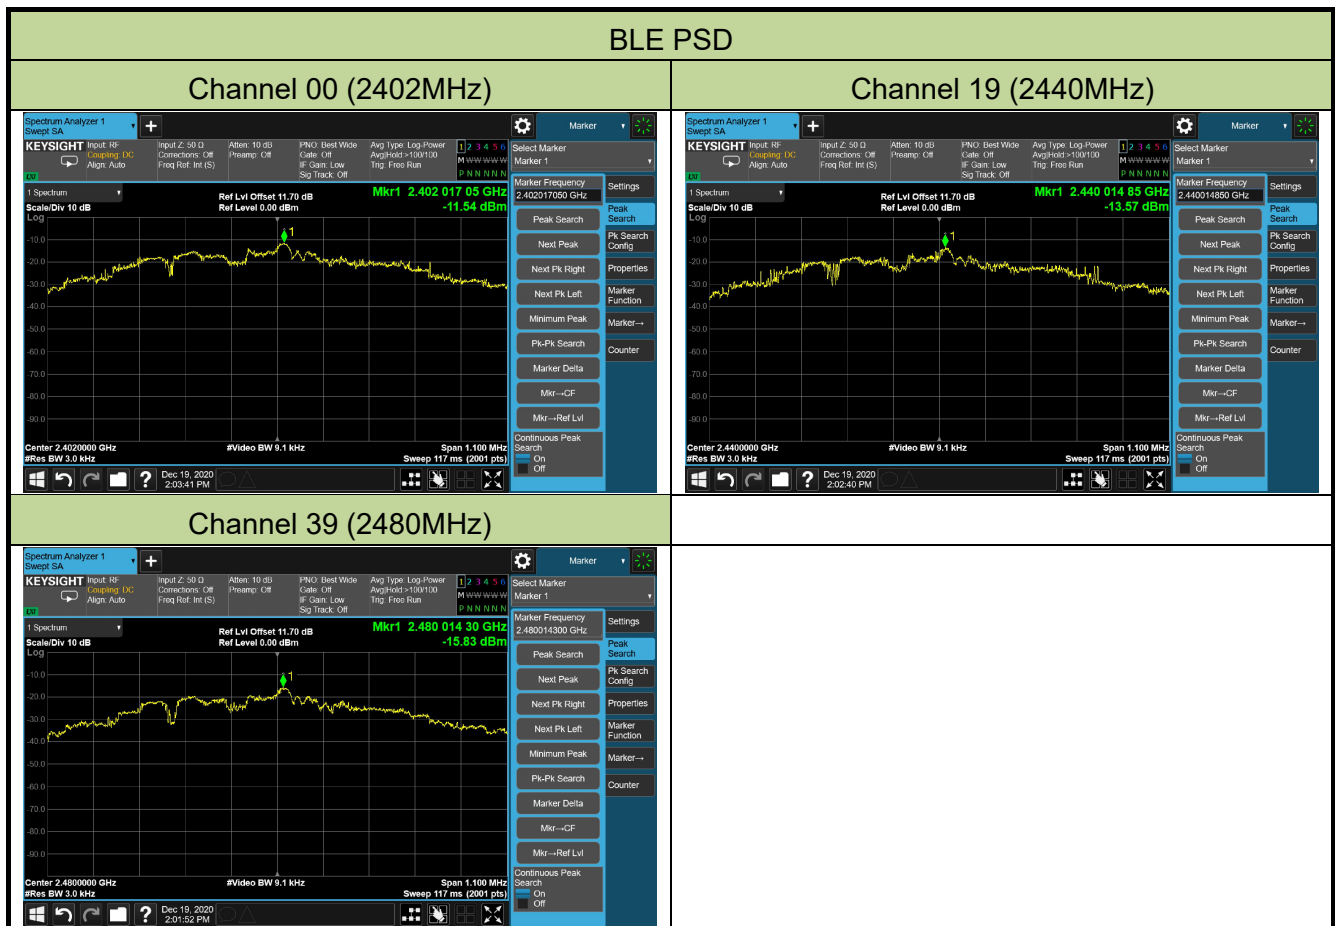

6.5. Conducted Band Edge and Out-of-Band Emissions

6.5.1. Test Limit

The limit for out-of-band spurious emissions at the band edge is 20 dB below the fundamental emission level, as determined from the in-band power measurement of the DTS channel performed in a 100 kHz bandwidth per the PSD procedure.

6.5.2. Test Procedure Used

ANSI C63.10-2013 - Section 11.11

6.5.3. Test Setting


Reference level measurement

1. Set instrument center frequency to DTS channel center frequency
2. Set the span to ≥ 1.5 times the DTS bandwidth
3. Set the RBW = 100 kHz
4. Set the VBW $\geq 3 \times$ RBW
5. Detector = Peak
6. Sweep time = Auto couple
7. Trace mode = Max hold
8. Allow trace to stabilize

Emission level measurement

1. Set the center frequency and span to encompass frequency range to be measured
2. RBW = 100kHz
3. VBW = 300kHz
4. Detector = Peak
5. Trace mode = Max hold
6. Sweep time = Auto couple
7. Allow trace to stabilize

6.5.4. Test Setup

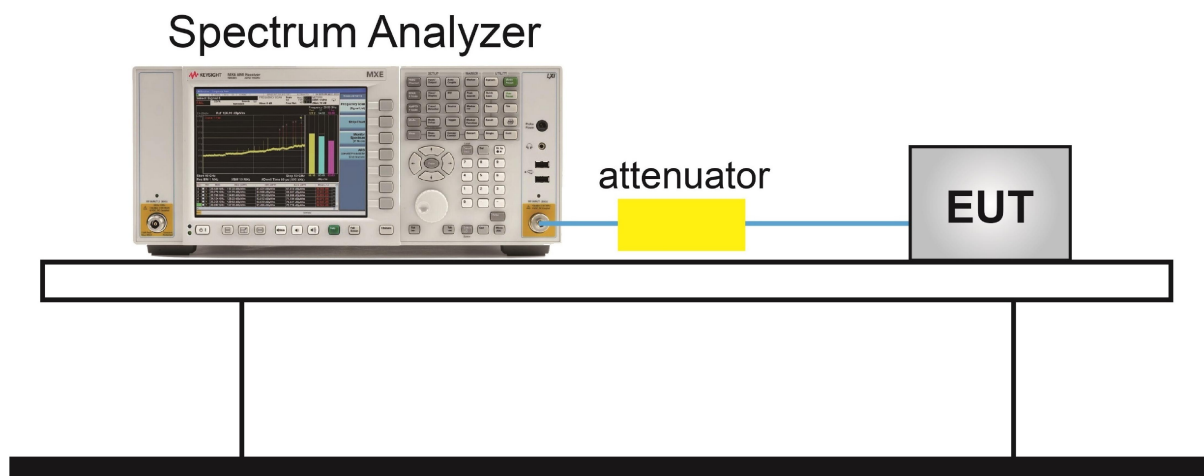


6.5.5. Test Result

Product	Ninebot Gokart central display	Test Engineer	Bruce Wang
Test Site	WZ-TR3	Test Date	2020/12/19

Test Mode	Data Rate (Mbps)	Channel No.	Frequency (MHz)	Limit (dBm)	Result
BLE	1	00	2402	-18.09	Pass
BLE	1	19	2440	-20.00	Pass
BLE	1	39	2480	-22.40	Pass

Note: The limit is 20dB below the fundamental emission level.

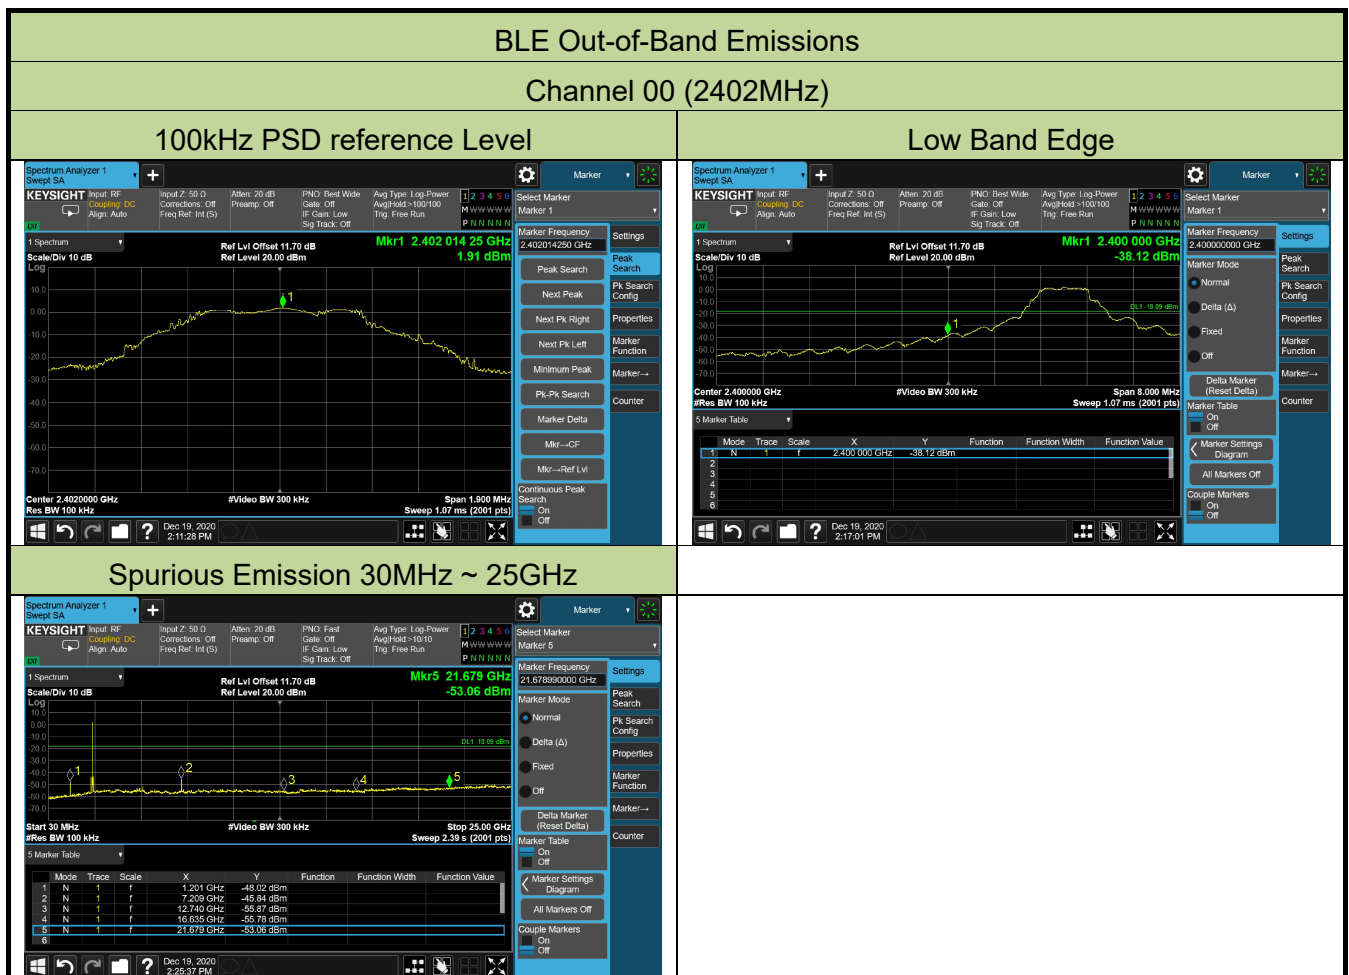


Channel 19 (2440MHz)

100kHz PSD reference Level



Spurious Emission 30MHz ~ 25GHz

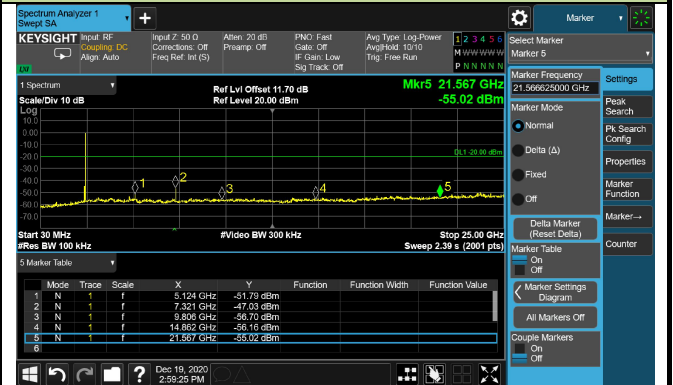


Channel 39 (2480MHz)



100kHz PSD reference Level



High Band Edge

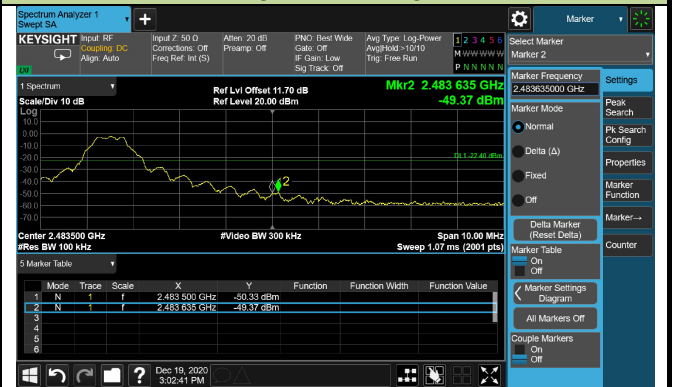

Spurious Emission 30MHz ~ 25GHz

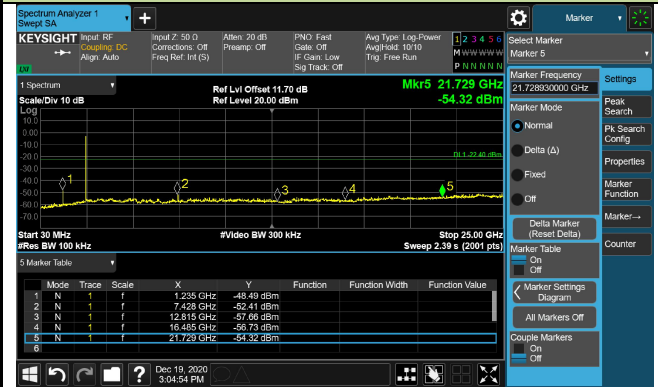

6.6. Radiated Spurious Emission Measurement

6.6.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15.209 Limit		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9 Limit			
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Magnetic Field Strength (H-Field) ($\mu\text{A/m}$)	Measured Distance (m)
0.009 - 0.490	--	6.37/F (F in kHz)	300
0.490 - 1.705	--	6.37/F (F in kHz)	30
1.705 - 30	--	0.08	30
30 - 88	100	--	3
88 - 216	150	--	3
216 - 960	200	--	3
Above 960	500	--	3

6.6.2. Test Procedure Used

ANSI C63.10-2013 - Section 6.3 (General Requirements)

ANSI C63.10-2013 - Section 6.4 (Standard test method below 30MHz)

ANSI C63.10-2013 - Section 6.5 (Standard test method above 30MHz to 1GHz)

ANSI C63.10-2013 - Section 6.6 (Standard test method above 1GHz)

6.6.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
> 1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Allow trace to stabilize

Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Allow trace to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. 3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.


4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Allow trace to stabilize

6.6.4.Test Setup

Below 1GHz Test Setup:

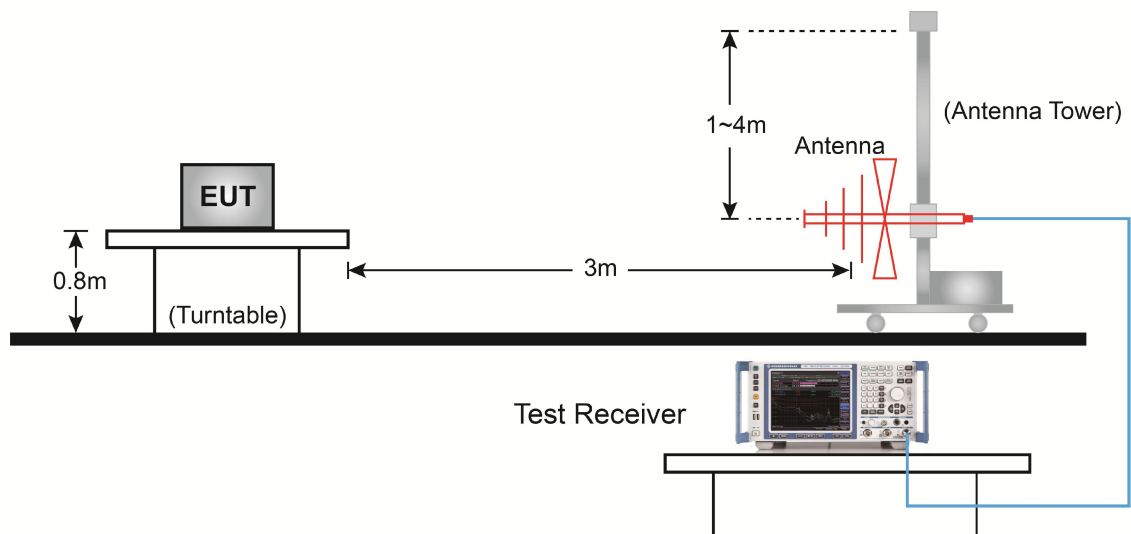

Above 1GHz Test Setup:

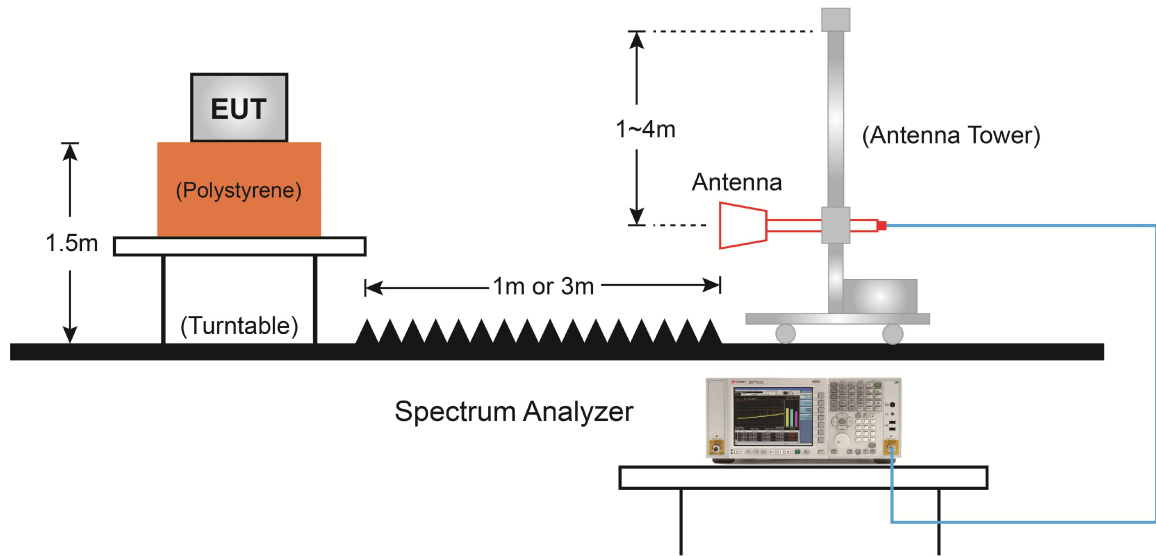

6.6.5. Test Result

Product	Ninebot Gokart central display	Test Engineer	Antony Yang
Test Site	WZ-AC1	Test Date	2020/12/16
Test Mode	BLE	Test Channel	00
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4136.5	37.5	3.2	40.7	74.0	-33.3	Peak	Horizontal
4808.0	47.0	5.7	52.7	74.0	-21.3	Peak	Horizontal
7205.0	44.7	10.1	54.8	74.0	-19.2	Peak	Horizontal
7205.9	42.8	10.1	52.9	54.0	-1.1	Average	Horizontal
8735.0	34.7	11.9	46.6	74.0	-27.4	Peak	Horizontal
4230.0	38.5	3.7	42.2	74.0	-31.8	Peak	Vertical
4808.0	45.2	5.7	50.9	74.0	-23.1	Peak	Vertical
7205.0	45.1	10.1	55.2	74.0	-18.8	Peak	Vertical
7205.9	42.1	10.1	52.2	54.0	-1.8	Average	Vertical
7927.5	36.0	10.7	46.7	74.0	-27.3	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Ninebot Gokart central display	Test Engineer	Antony Yang
Test Site	WZ-AC1	Test Date	2020/12/16
Test Mode	BLE	Test Channel	19
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4884.5	42.5	5.3	47.8	74.0	-26.2	Peak	Horizontal
7324.0	44.6	10.1	54.7	74.0	-19.3	Peak	Horizontal
7320.2	40.4	10.1	50.5	54.0	-3.5	Average	Horizontal
7876.5	36.1	10.7	46.8	74.0	-27.2	Peak	Horizontal
8769.0	35.9	11.9	47.8	74.0	-26.2	Peak	Horizontal
4876.0	45.8	5.2	51.0	74.0	-23.0	Peak	Vertical
7324.0	42.5	10.1	52.6	74.0	-21.4	Peak	Vertical
7817.0	36.6	10.5	47.1	74.0	-26.9	Peak	Vertical
8641.5	35.0	11.6	46.6	74.0	-27.4	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	Ninebot Gokart central display	Test Engineer	Antony Yang
Test Site	WZ-AC1	Test Date	2020/12/16
Test Mode	BLE	Test Channel:	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Frequency (MHz)	Reading Level (dBμV)	Factor (dB)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
4961.0	40.2	5.5	45.7	74.0	-28.3	Peak	Horizontal
7443.0	41.6	10.1	51.7	74.0	-22.3	Peak	Horizontal
7978.5	37.8	10.9	48.7	74.0	-25.3	Peak	Horizontal
8811.5	35.6	12.3	47.9	74.0	-26.1	Peak	Horizontal
4961.0	43.2	5.5	48.7	74.0	-25.3	Peak	Vertical
7443.0	40.5	10.1	50.6	74.0	-23.4	Peak	Vertical
8701.0	36.1	12.0	48.1	74.0	-25.9	Peak	Vertical
10052.5	34.4	14.0	48.4	74.0	-25.6	Peak	Vertical

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Worst Case of Radiated Emission below 1GHz:

Site: WZ-AC1	Time: 2020/12/16 - 19:15
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Horizontal
EUT: Ninebot Gokart central display	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

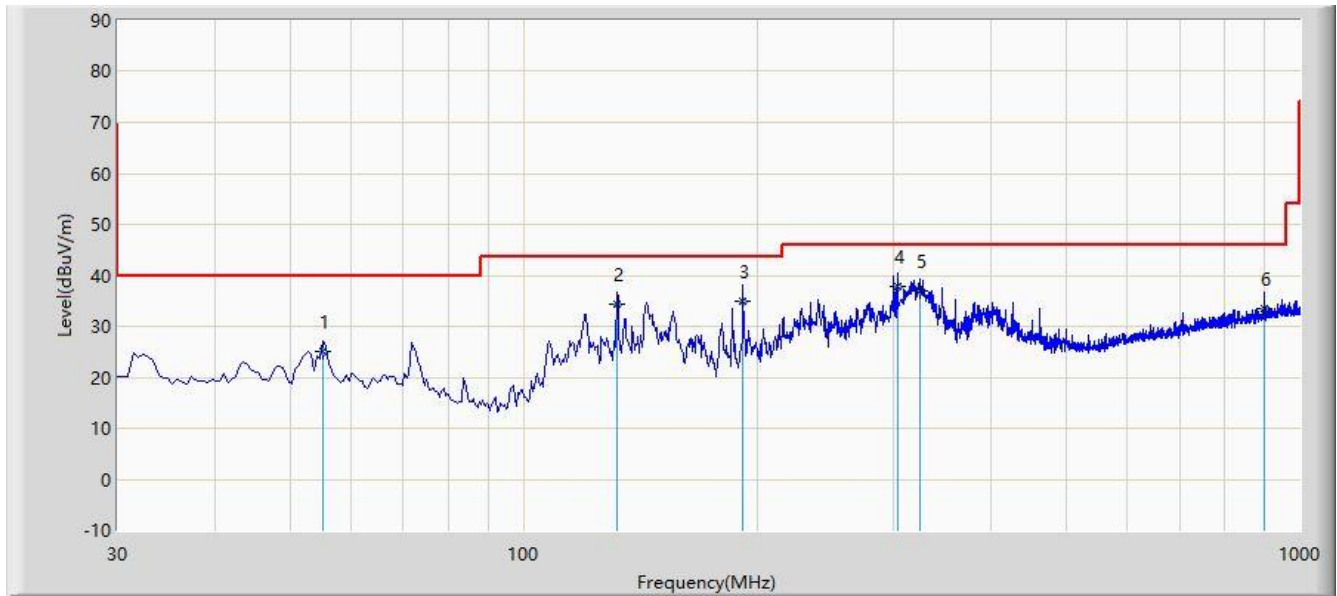

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			55.220	25.205	7.200	-14.795	40.000	18.005	QP
2			131.850	34.345	17.500	-9.155	43.500	16.845	QP
3			191.320	34.962	19.450	-8.538	43.500	15.512	QP
4		*	303.055	37.854	19.100	-8.146	46.000	18.754	QP
5			324.395	36.963	17.500	-9.037	46.000	19.463	QP
6			900.000	33.454	3.510	-12.546	46.000	29.944	QP


Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

Site: WZ-AC1	Time: 2020/12/16 - 19:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_VULB 9168 _30-1000MHz	Polarity: Vertical
EUT: Ninebot Gokart central display	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

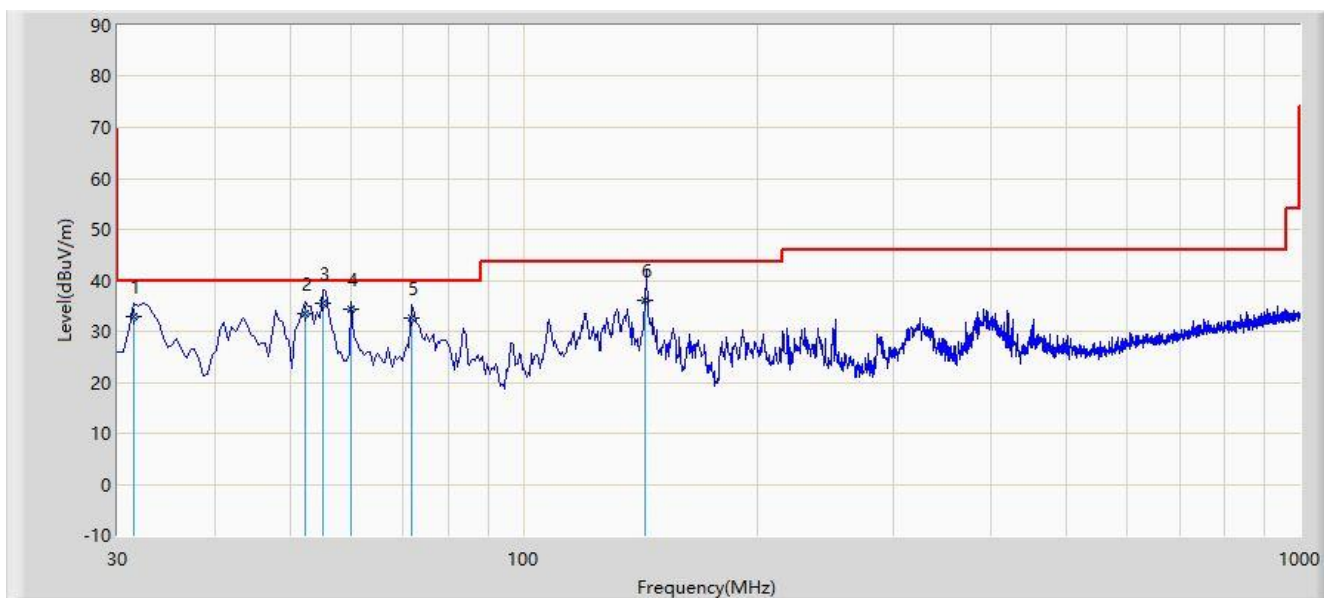

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1			31.455	33.033	16.400	-6.967	40.000	16.633	QP
2			52.320	33.501	15.400	-6.499	40.000	18.101	QP
3		*	55.100	35.566	17.560	-4.434	40.000	18.006	QP
4			60.000	34.310	16.800	-5.690	40.000	17.510	QP
5			71.710	32.527	16.900	-7.473	40.000	15.627	QP
6			143.400	36.203	18.320	-7.297	43.500	17.882	QP

Note 1: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Note 2: The amplitude of radiated emissions (frequency range from 9kHz to 30MHz and 18GHz to 25GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value.

Therefore, the data is not presented in the report.

6.7. Radiated Restricted Band Edge Measurement

6.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41	--	--	--

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47 CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15.209 Limit		
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measured Distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

For RSS-Gen Section 8.10 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 8.10 of RSS-Gen, must also comply with the radiated emission limits specified in Section 8.9.

Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	--
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138	--	

All out of band emissions appearing in a restricted band as specified in Section 8.10 of the RSS-Gen must not exceed the limits shown in Table per Section 8.9.

RSS-Gen Section 8.9 Limit			
Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Magnetic Field Strength (H-Field) ($\mu\text{A/m}$)	Measured Distance (m)
0.009 - 0.490 1	--	6.37/F (F in kHz)	300
0.490 - 1.705	--	6.37/F (F in kHz)	30
1.705 - 30	--	0.08	30
30 - 88	100	--	3
88 - 216	150	--	3
216 - 960	200	--	3
Above 960	500	--	3

6.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 (General Requirements)

ANSI C63.10-2013 Section 6.6 (Standard test method above 1GHz)

ANSI C63.10-2013 Section 6.10.5 (Restricted-band band-edge measurements)


6.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = Peak
5. Sweep time = Auto couple
6. Trace mode = Max hold
7. Allow trace to stabilize


Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. Set VBW $\geq 1/T$. T is the minimum transmission duration
4. Detector = Peak
5. Sweep time = Auto
6. Trace mode = Max hold
7. Allow trace to stabilize

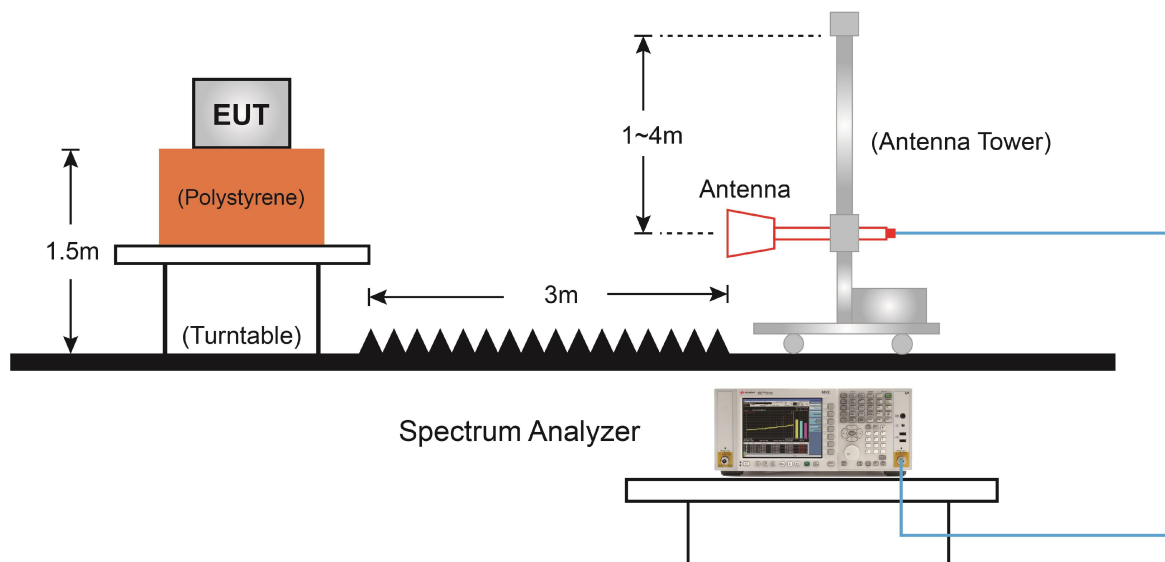6.7.4. Test Setup

6.7.5.Test Result

Site: WZ-AC1	Time: 2020/12/16 - 22:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Ninebot Gokart central display	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

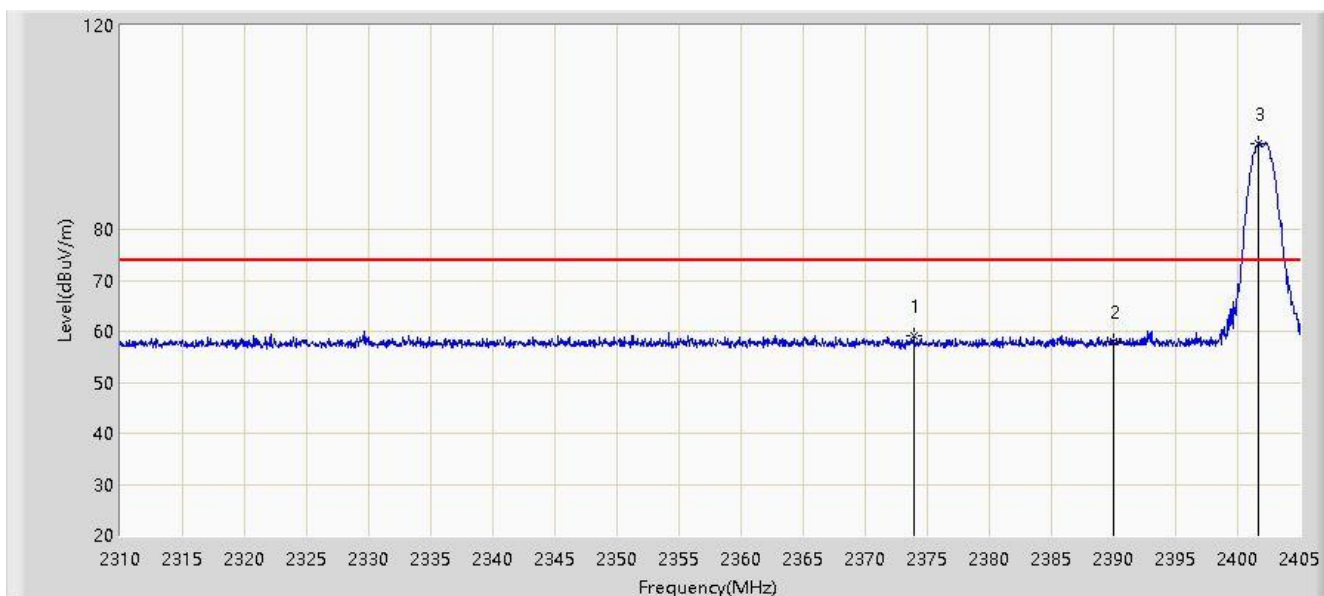


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2373.887	59.023	26.499	-14.977	74.000	32.524	PK
2			2390.000	58.086	25.553	-15.914	74.000	32.533	PK
3		*	2401.627	96.893	64.351	NA	NA	32.542	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/12/16 - 22:52
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Ninebot Gokart central display	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

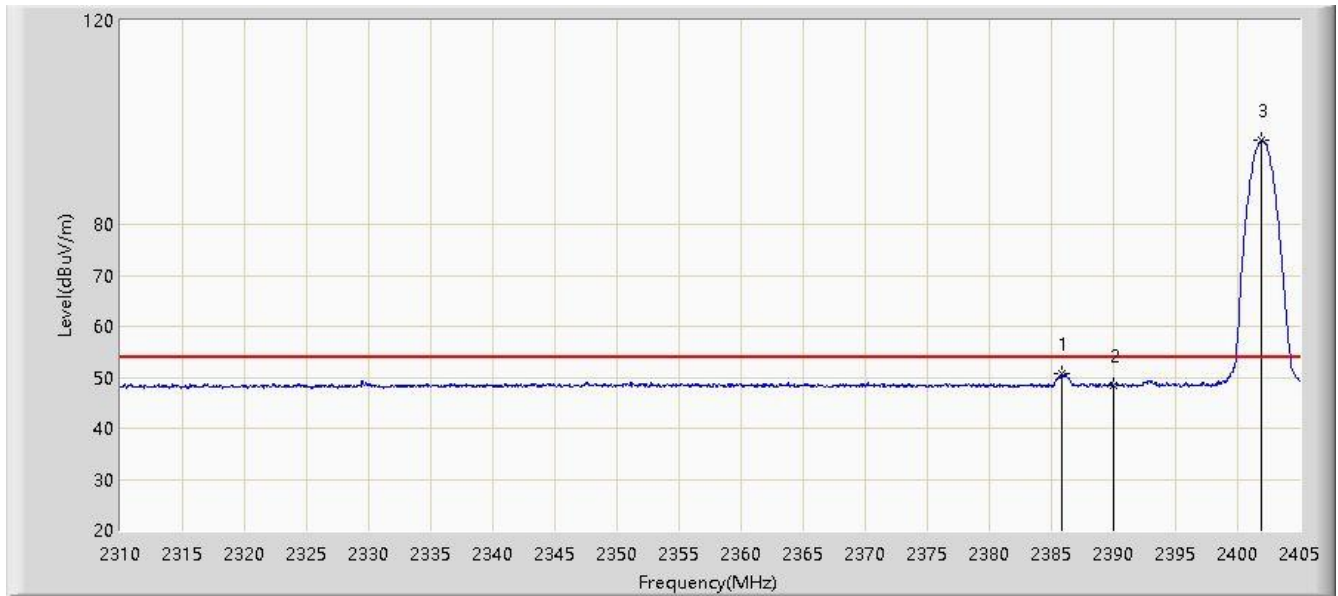


No	Flag	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB)	Type
1			2385.857	50.623	18.108	-3.377	54.000	32.515	AV
2			2390.000	48.471	15.938	-5.529	54.000	32.533	AV
3		*	2401.960	96.552	64.012	NA	NA	32.540	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/12/16 - 22:47
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Ninebot Gokart central display	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

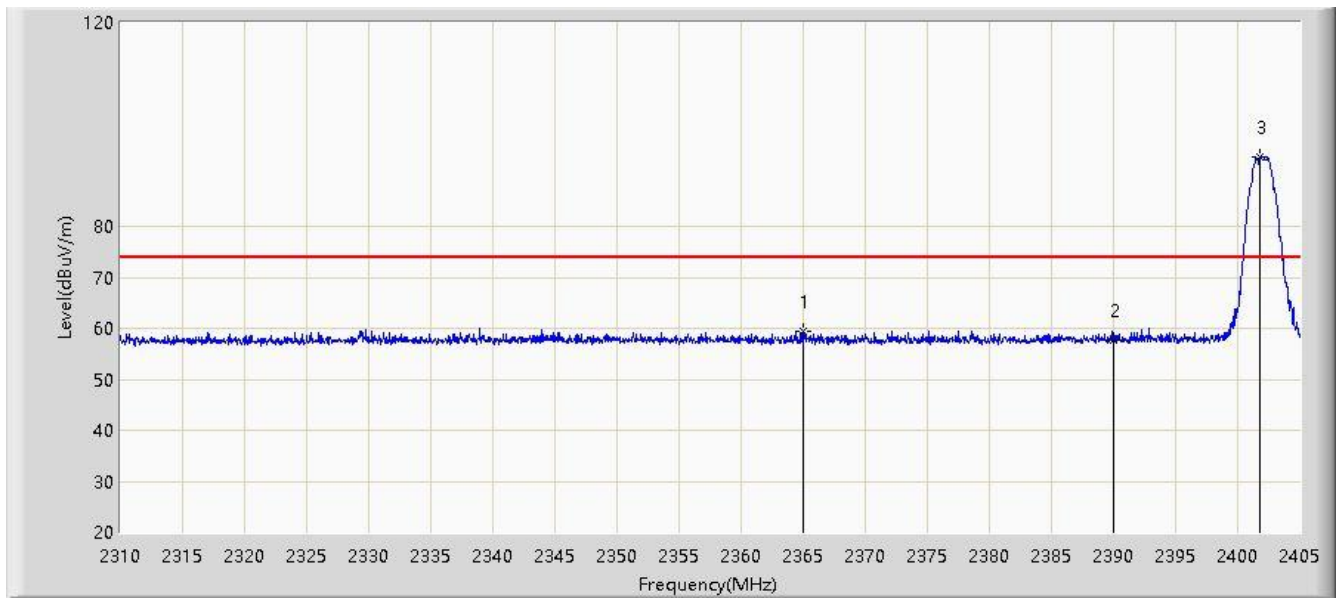


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1			2364.958	59.414	26.835	-14.586	74.000	32.579	PK
2			2390.000	57.582	25.049	-16.418	74.000	32.533	PK
3		*	2401.770	93.722	61.181	NA	NA	32.541	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/12/16 - 22:49
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Ninebot Gokart central display	Power: By Battery
Test Mode: Transmit by BLE at Channel 2402MHz	

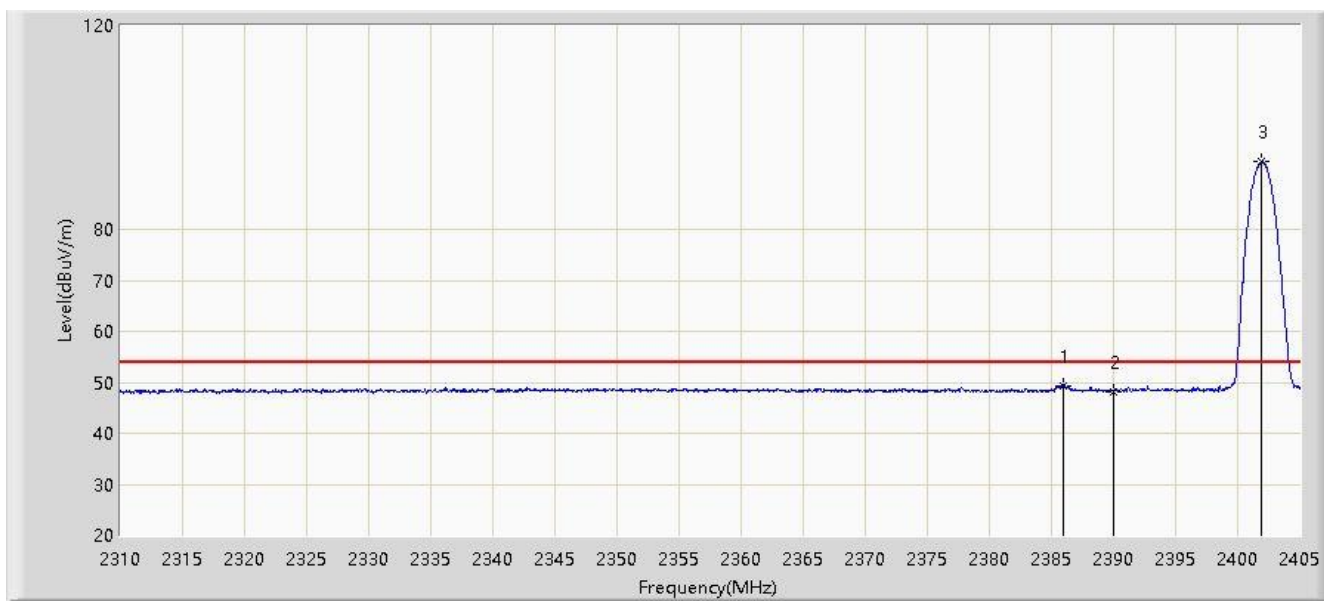


No	Flag	Mark	Frequency (MHz)	Measure Level (dBµV/m)	Reading Level (dBµV)	Margin (dB)	Limit (dBµV/m)	Factor (dB)	Type
1			2385.952	49.376	16.860	-4.624	54.000	32.516	AV
2			2390.000	48.161	15.628	-5.839	54.000	32.533	AV
3		*	2401.913	93.217	60.676	NA	NA	32.541	AV

Note: Measure Level (dBµV/m) = Reading Level (dBµV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/12/16 - 22:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Ninebot Gokart central display	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

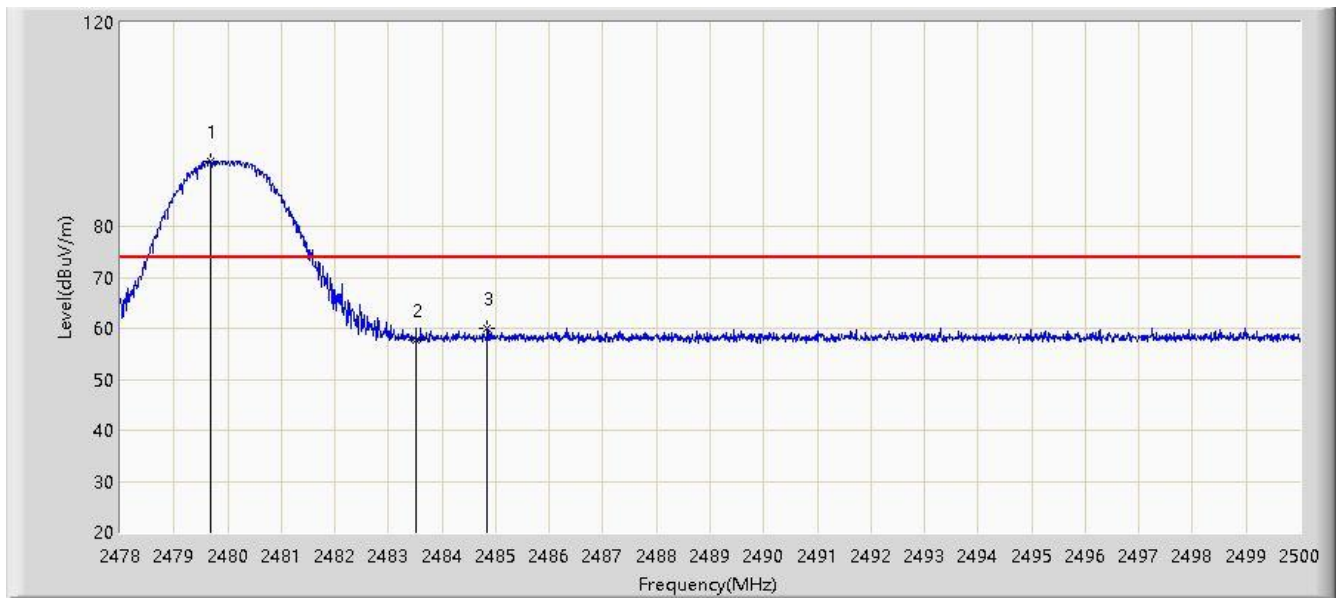


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.672	92.828	60.377	NA	NA	32.452	PK
2			2483.500	57.766	25.337	-16.234	74.000	32.429	PK
3			2484.842	60.137	27.717	-13.863	74.000	32.421	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/12/16 - 22:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Ninebot Gokart central display	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

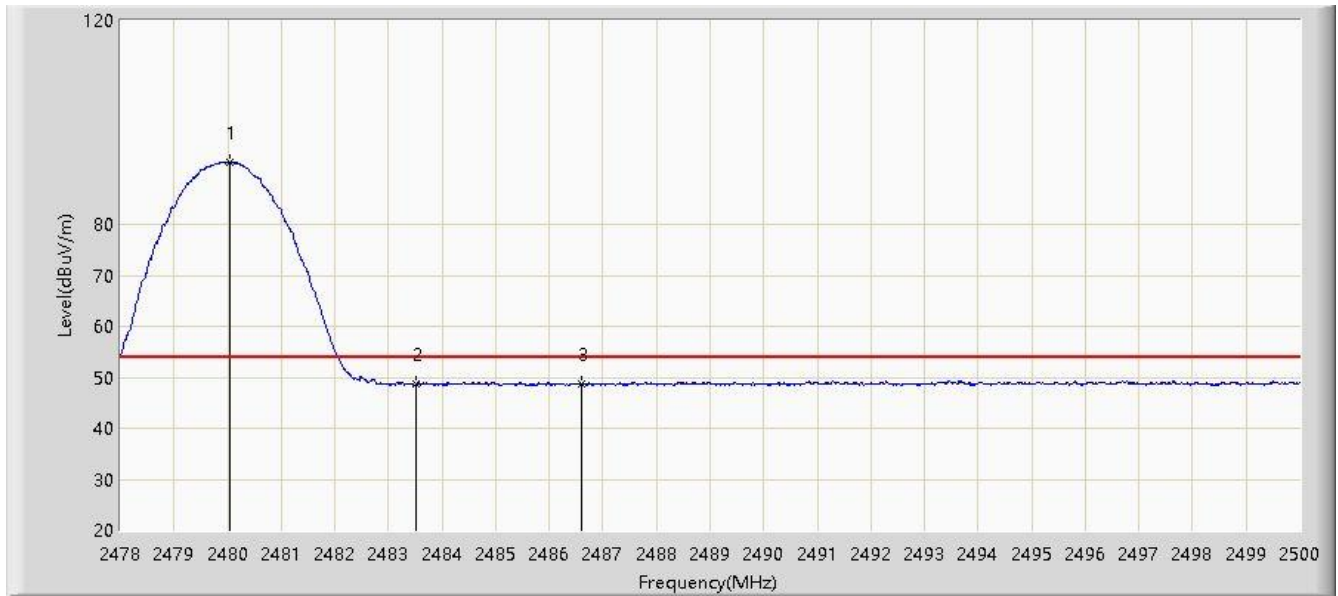


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2480.035	92.247	59.798	NA	NA	32.449	AV
2			2483.500	48.573	16.144	-5.427	54.000	32.429	AV
3			2486.602	48.728	16.318	-5.272	54.000	32.410	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/12/16 - 22:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Ninebot Gokart central display	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

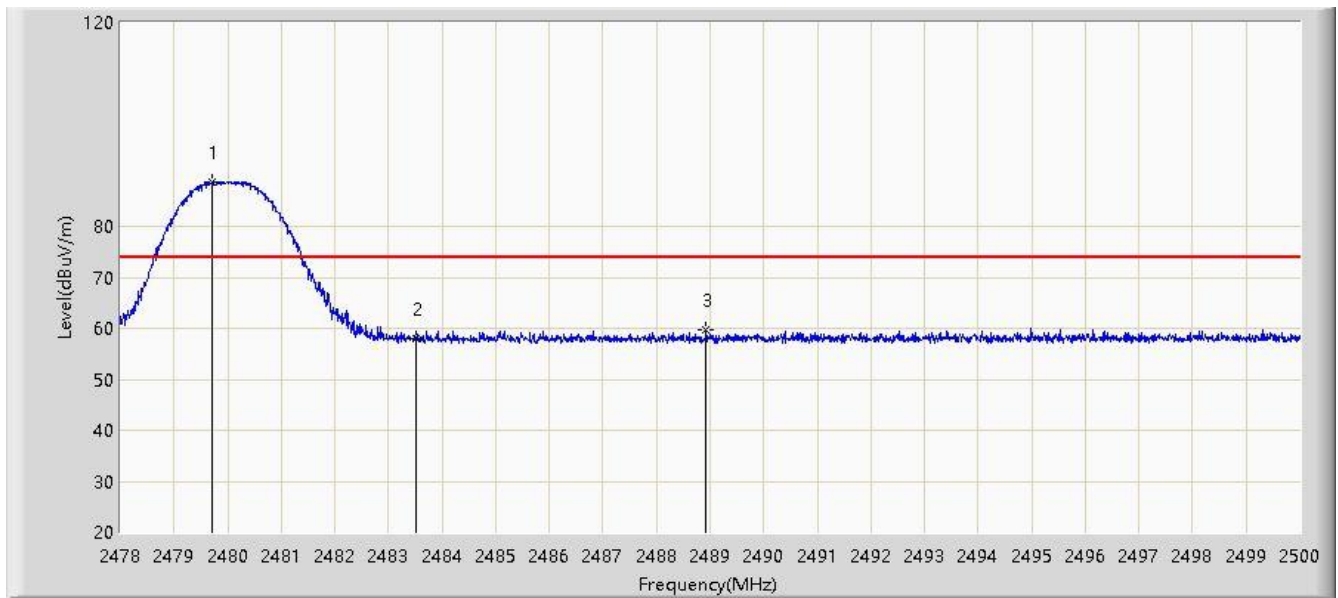


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.716	88.798	56.347	NA	NA	32.451	PK
2			2483.500	58.091	25.662	-15.909	74.000	32.429	PK
3			2488.923	59.684	27.276	-14.316	74.000	32.408	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

Site: WZ-AC1	Time: 2020/12/16 - 22:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Antony Yang
Probe: WZ-AC1_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Ninebot Gokart central display	Power: By Battery
Test Mode: Transmit by BLE at Channel 2480MHz	

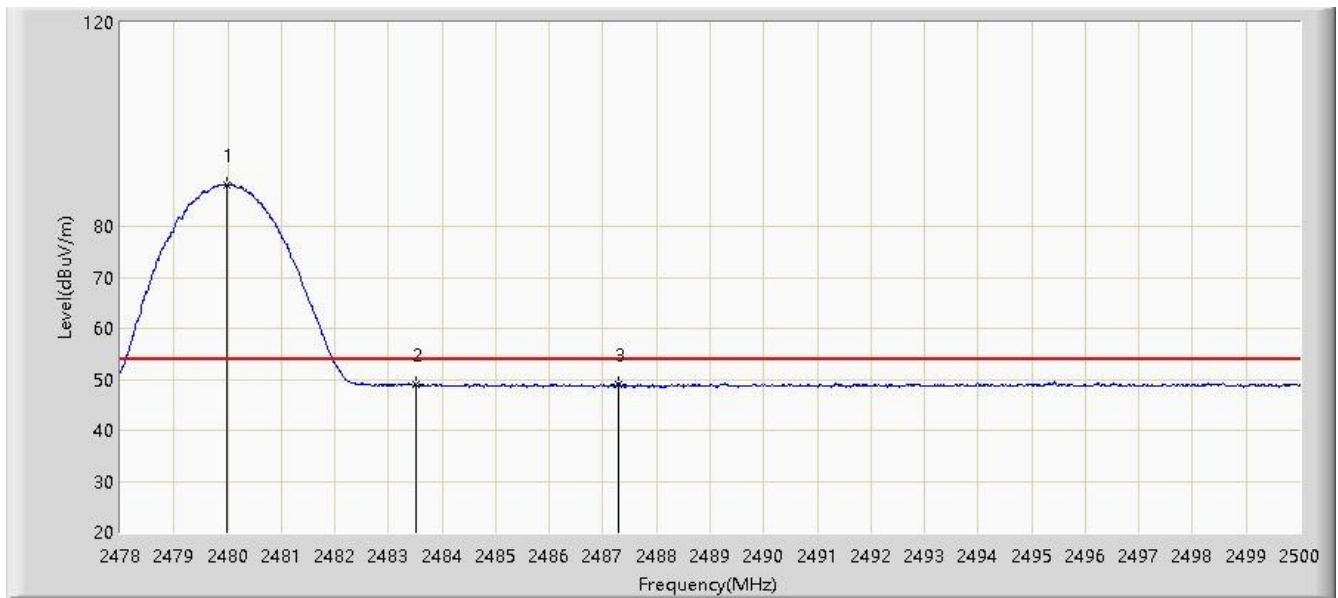

No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB)	Type
1		*	2479.980	88.187	55.737	NA	NA	32.449	AV
2			2483.500	48.888	16.459	-5.112	54.000	32.429	AV
3			2487.295	49.058	16.652	-4.942	54.000	32.406	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m)

6.8. AC Conducted Emissions Measurement


6.8.1. Test Limit

FCC Part 15.207 / RSS-Gen - Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

6.8.2. Test Setup

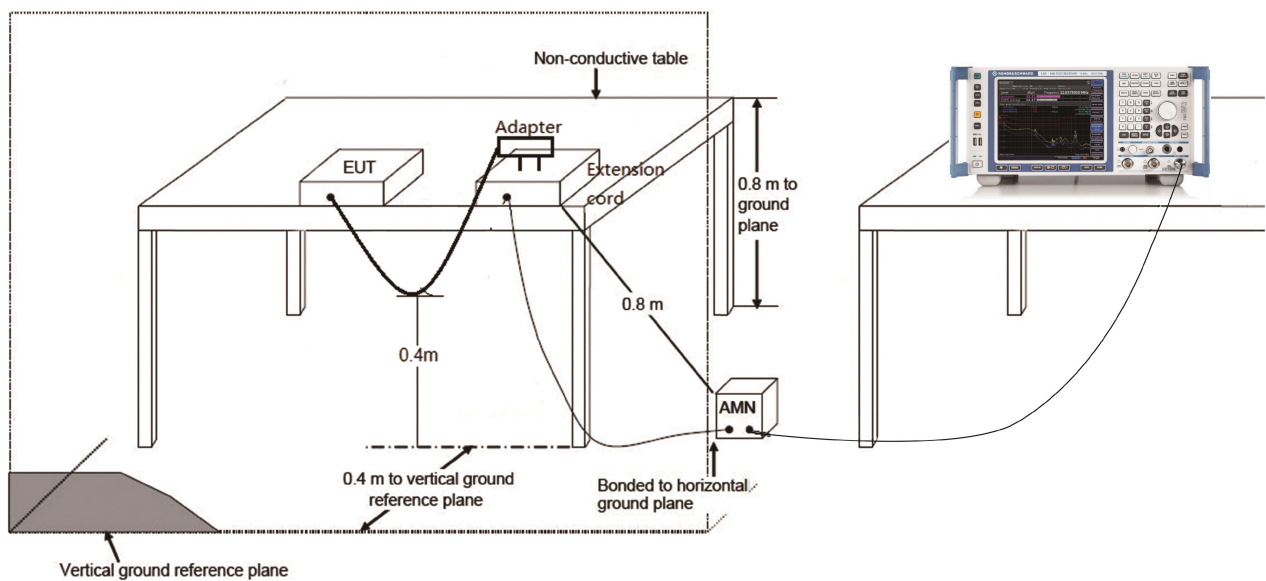

6.8.3. Test Result

This device is powered by AAA batteries, so this requirement is not applicable.

7. CONCLUSION

The data collected relate only the item(s) tested and show that this device is in compliance with Part 15C of the FCC rules and RSS-247 of the ISED Rules.

Appendix A - Test Setup Photograph

Refer to “2012RSU047-UT” file.

Appendix B - EUT Photograph

Refer to "2012RSU047-UE" file.