




FCC PART 22H, PART 24E
FCC PART 27
MEASUREMENT AND TEST REPORT

For

GO WORLDWIDE International - F.Z.E

SM - Office - B1-316C, Ajman, UAE.

FCC ID: 2ALSGWEMISTICOONE

Report Type: Original Report	Product Name: MISTICO ONE 4G LTE Smartphone
Test Engineer: <u>Lorin Bian</u>	
Report Number: <u>RDG170411804D</u>	
Report Date: <u>2017-05-24</u>	
Reviewed By: <u>Henry Ding</u> EMC Leader	
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Chengdu) No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China Tel: 028-65523123, Fax: 028-65525125 www.baclcorp.com

Note: This test report was prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Chengdu). Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. This report was valid only with a valid digital signature.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S)	4
TEST METHODOLOGY	4
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	8
FCC §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) & § 27.50 - RF OUTPUT POWER	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS	16
TEST DATA	16
FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH	35
APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS	35
TEST DATA	35
FCC §2.1051, §22.917(A) & §24.238(A) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS	65
APPLICABLE STANDARD	65
TEST PROCEDURE	65
TEST EQUIPMENT LIST AND DETAILS	65
TEST DATA	65
FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS	94
APPLICABLE STANDARD	94
TEST PROCEDURE	94
TEST EQUIPMENT LIST AND DETAILS	95
TEST DATA	95
FCC §22.917(A) & §24.238(A) & §27.53- BAND EDGES	100
APPLICABLE STANDARD	100
TEST PROCEDURE	100
TEST EQUIPMENT LIST AND DETAILS	101
TEST DATA	101

FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY.....	156
APPLICABLE STANDARD.....	156
TEST PROCEDURE	156
TEST EQUIPMENT LIST AND DETAILS	157
TEST DATA	157

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The **GO WORLDWIDE International - F.Z.E**'s product, model number: **MISTICO ONE 4G LTE (FCC ID: 2ALSGWEMISTICOONE)** (the "EUT") in this report was a **MISTICO ONE 4G LTE Smartphone**, which was measured approximately: 15.4 cm (L) × 7.7 cm (W) × 0.94 cm (H), rated input voltage: DC3.8V battery or DC5.0V Charging from adapter.

Adapter Information:

Model: Magnum One 4G LTE

Input: AC100-240V~ 50/60Hz 0.2A

Output: DC5.0V 1000mA

**All measurement and test data in this report was gathered from final production sample, serial number: 170411804 (assigned by the BACL, Chengdu). It may have deviation from any other sample. The EUT supplied by the applicant was received on 2017-04-11, and EUT conformed to test requirement.*

Objective

This report is prepared on behalf of **GO WORLDWIDE International - F.Z.E** in accordance with: Part 2-Subpart J, Part 22-Subpart H, Part 24-Subpart E and part 27 of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: 2ALSGWEMISTICOONE.

FCC Part 15C DTS submissions with FCC ID: 2ALSGWEMISTICOONE.

FCC Part 15C DSS submissions with FCC ID: 2ALSGWEMISTICOONE.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J, Part 22 Subpart H, Part 24 Subpart E and Part 27.

Applicable Standards: TIA/EIA 603-D-2010.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Chengdu).

Test Facility

The test site used by BACL to collect test data is located in the No.5040, Huilongwan Plaza, No.1, Shawan Road, Jinniu District, Chengdu, Sichuan, China.

Test site at BACL has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on April 24, 2015. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 560332. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D-2010.

The test items were performed with the EUT operating at testing mode.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	11-9435686-111
R&S	Wideband Radio Communication Tester	CMW500	106891
N/A	ANTENNA	N/A	N/A

Configuration of Test Setup

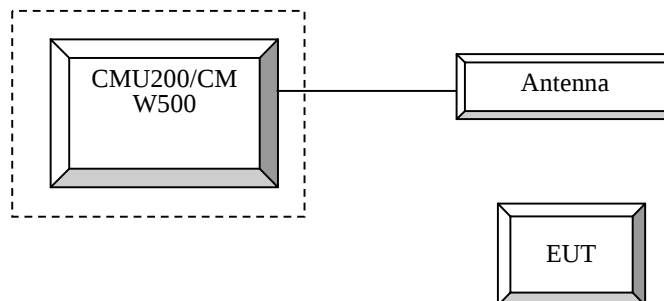

Block Diagram of Test Setup

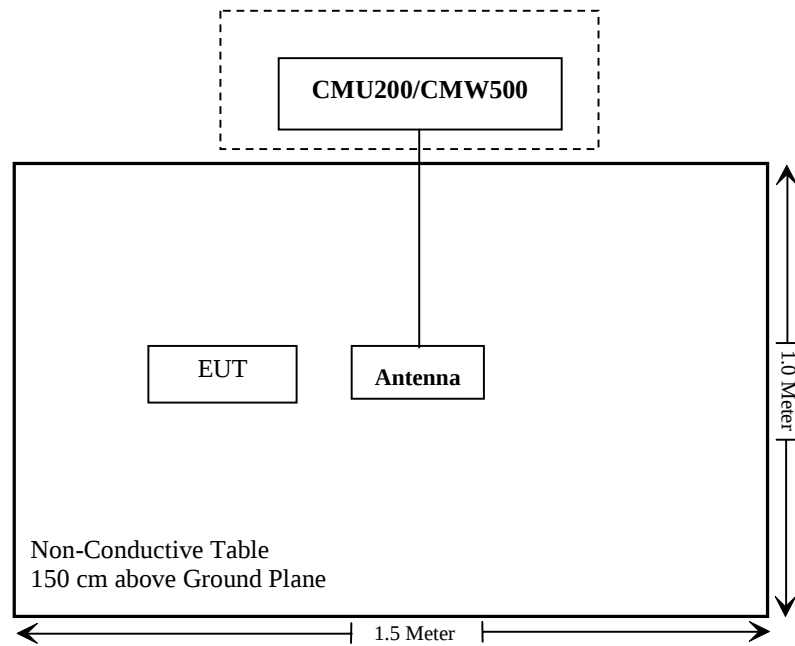

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c); §27.50	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238; §27.53	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a); §27.53	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a); §27.53	Spurious Radiation Emissions	Compliance
§ 22.917 (a); § 24.238 (a); §27.53	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235; §27.54	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: RDG170411804-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E, Part 27 there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) & § 27.50 - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications..

According to FCC §2.1046 and §27.50 (d), (4) Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test Procedure

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB
 Slot Config > Unchanged (if already set under MS signal)
 TCH > choose desired test channel
 Hopping > Off
 Main Timeslot > 3
 Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream
 AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input
 Connection Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

LTE (FDD):

The following tests were conducted according to the test requirements in 3GPP TS36.101

The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS36.101 specification.

UE Power Class: 3 (23 +/- 2dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS36.101.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3

Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

The allowed A-MPR values specified below in Table 6.2.4.-1 of 3GPP TS36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (sub-clause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	NA
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
			10, 15, 20	See Table 6.2.4-4	
NS_05	6.6.3.3.1	1	10,15,20	≥ 50	≤ 1
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	Table 5.6-1	n/a
NS_07	6.6.2.2.3	13	10	Table 6.2.4-2	Table 6.2.4-2
	6.6.3.3.2				
NS_08	6.6.3.3.3	19	10, 15	> 44	≤ 3
NS_09	6.6.3.3.4	21	10, 15	> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	Table 6.2.4-3
NS_11	6.6.2.2.1	23 ¹	1.4, 3, 5, 10	Table 6.2.4-5	Table 6.2.4-5
..					
NS_32	-	-	-	-	-

Note 1: Applies to the lower block of Band 23, i.e. a carrier placed in the 2000-2010 MHz region.

Radiated method:

ANSI/TIA 603-D section 2.2.17

Test Equipment List and Details

Manufacturer	Description	Model Number	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Sunol Sciences	Broadband Antenna	JB3	A121808	2016-04-10	2019-04-09
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
ETS	Horn Antenna	3115	003-6076	2016-12-02	2017-12-01
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-0113024	2014-06-16	2017-06-15
EMCO	Adjustable Dipole Antenna	3121C	9109-258	N/A	N/A
HP	Signal Generator	8648C	3623A04150	2016-05-23	2017-05-22
WILTRON	SWEPT FREQUENCY SYNTHESIZER	6737	213001	2016-05-23	2017-05-22
EMCT	Semi-Anechoic Chamber	966	966-1	2015-04-24	2018-04-23
Unknown	RF Cable (below 1GHz)	Unknown	NO.1	2016-11-10	2017-11-09
Unknown	RF Cable (below 1GHz)	Unknown	NO.4	2016-11-10	2017-11-09
Unknown	RF Cable (above 1GHz)	Unknown	NO.2	2016-11-10	2017-11-09
R&S	Universal Radio Communication Tester	CMU200	11-9435686-111	2016-07-28	2017-07-27
R&S	Wideband Radio Communication Tester	CMW500	106891	2016-11-23	2017-11-23

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Data

Environmental Conditions

Temperature:	20.8~21.9 °C
Relative Humidity:	57~59 %
ATM Pressure:	95.8~97.1 kPa

The testing was performed by Lorin Bian from 2017-05-04 to 2017-05-14.

Conducted Power

Cellular Band (Part 22H) & PCS Band (Part 24E)

Band	Channel No.	Peak Output Power (dBm)								
		GSM	GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EDGE 1 TX Slot	EDGE 2 TX Slot	EDGE 3 TX Slot	EDGE 4 TX Slot
Cellular	128	32.80	32.85	31.54	30.48	29.47	26.18	25.26	23.55	22.41
	190	32.80	32.88	31.52	30.51	29.42	26.13	25.28	23.56	22.42
	251	32.80	32.83	31.51	30.49	29.43	26.14	25.31	23.58	22.47
PCS	512	29.80	29.76	28.85	26.84	25.81	25.34	24.42	22.66	21.44
	661	29.70	29.70	28.83	26.87	25.82	25.39	24.47	22.63	21.40
	810	29.70	29.72	28.81	26.83	25.84	25.41	24.46	22.58	21.42

WCDMA Band II

Mode	3GPP Sub Test	Average Output Power (dBm)					
		Low Channel (Ave. Power)	Low Channel (PAR)	Middle Channel (Ave. Power)	Middle Channel (PAR)	High Channel (Ave. Power)	High Channel (PAR)
Rel 99 (QPSK)	1	22.51	2.28	22.46	2.00	22.42	2.04
HSDPA (QPSK)	1	21.55	2.27	21.44	2.44	21.44	2.45
	2	21.51	2.64	21.39	2.69	21.41	2.47
	3	21.48	2.98	21.33	2.47	21.37	2.89
	4	21.43	3.05	21.28	2.96	21.33	2.66
HSUPA (QPSK)	1	21.52	3.64	21.39	3.36	21.41	2.77
	2	21.47	3.47	21.34	3.47	21.38	2.59
	3	21.42	3.21	21.31	3.01	21.35	2.95
	4	21.36	2.97	21.28	2.84	21.32	2.71
	5	21.31	3.68	21.22	2.65	21.27	2.69
DC-HSDPA (QPSK)	1	21.48	3.57	21.41	2.74	21.4	2.85
	2	21.44	3.44	21.35	2.88	21.36	2.74
	3	21.39	3.52	21.31	2.95	21.32	3.69
	4	21.33	3.79	21.25	2.74	21.27	3.54
HSPA+ (16QAM)	1	21.49	3.96	21.43	2.89	21.43	3.87

WCDMA Band V

Mode	3GPP Sub Test	Average Output Power (dBm)					
		Low Channel (Ave. Power)	Low Channel (PAR)	Middle Channel (Ave. Power)	Middle Channel (PAR)	High Channel (Ave. Power)	High Channel (PAR)
Rel 99 (QPSK)	1	22.82	2.76	22.83	2.48	22.95	2.88
HSDPA (QPSK)	1	21.77	2.88	21.79	3.47	21.98	2.47
	2	21.72	2.69	21.73	3.66	21.93	2.96
	3	21.66	2.71	21.68	3.7	21.89	2.51
	4	21.61	3.17	21.62	3.59	21.84	2.74
HSUPA (QPSK)	1	21.75	2.96	21.81	3.58	21.92	2.44
	2	21.71	3.69	21.75	3.74	21.88	2.59
	3	21.65	3.74	21.69	3.99	21.83	2.59
	4	21.61	3.44	21.63	2.92	21.79	2.44
	5	21.57	3.9	21.58	2.64	21.75	2.95
DC-HSDPA (QPSK)	1	21.78	2.96	21.77	2.93	21.94	2.54
	2	21.72	2.75	21.72	3.17	21.89	2.96
	3	21.66	2.63	21.69	3.39	21.84	2.96
	4	21.62	2.75	21.64	3.08	21.78	3.08
HSPA+ (16QAM)	1	21.74	2.89	21.75	2.47	21.95	2.97

LTE Band II

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	1#0	22.23	22.34	22.23
		1#3	22.29	22.35	22.32
		1#5	22.18	22.30	22.21
		3#0	21.96	22.17	22.19
		3#1	21.96	22.15	22.21
		3#3	21.97	22.16	21.98
		6#0	21.19	21.35	21.19
	16QAM	1#0	21.27	21.37	21.27
		1#3	21.38	21.37	21.41
		1#5	21.20	21.39	21.31
		3#0	21.04	21.23	21.28
		3#1	21.06	21.24	21.28
		3#3	21.05	21.25	21.00
		6#0	20.12	20.16	20.06
3 MHz	QPSK	1#0	22.32	22.33	22.20
		1#7	22.30	22.25	22.17
		1#14	22.22	22.20	22.14
		8#0	21.14	21.22	21.21
		8#4	21.13	21.16	21.15
		8#7	21.13	21.15	21.13
		15#0	21.18	21.23	21.07
	16QAM	1#0	21.22	21.24	21.16
		1#7	21.16	21.20	21.04
		1#14	21.07	21.15	21.03
		8#0	20.04	20.07	20.19
		8#4	20.12	20.08	20.11
		8#7	20.10	20.04	20.00
		15#0	20.02	20.17	20.06
5 MHz	QPSK	1#0	22.39	22.43	22.25
		1#12	22.31	22.41	22.18
		1#24	22.23	22.33	22.09
		12#0	21.22	21.24	21.23
		12#7	21.15	21.19	21.22
		12#13	21.13	21.09	21.13
		25#0	21.17	21.20	21.02
	16QAM	1#0	21.34	21.37	21.12
		1#12	21.20	21.40	21.09
		1#24	21.21	21.18	20.94
		12#0	20.11	20.21	20.17
		12#7	20.00	20.14	20.07
		12#13	19.97	20.09	20.07
		25#0	20.19	20.20	20.19

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10 MHz	QPSK	1#0	22.26	22.43	22.24
		1#24	22.23	22.34	22.18
		1#49	22.19	22.28	22.15
		25#0	21.03	21.20	21.07
		25#13	21.03	21.16	21.03
		25#25	20.93	21.07	21.00
		50#0	21.07	21.20	21.19
	16QAM	1#0	21.13	21.40	21.11
		1#24	21.10	21.22	21.16
		1#49	21.14	21.18	20.99
		25#0	19.94	20.10	20.01
		25#13	19.96	20.16	19.99
		25#25	19.98	20.00	20.00
		50#0	20.07	20.18	20.11
15 MHz	QPSK	1#0	22.44	22.46	22.32
		1#37	22.36	22.42	22.24
		1#74	22.32	22.33	22.18
		36#0	21.37	21.49	21.29
		36#19	21.36	21.48	21.26
		36#39	21.34	21.40	21.25
		75#0	21.42	21.45	21.27
	16QAM	1#0	21.44	21.34	21.24
		1#37	21.21	21.39	21.22
		1#74	21.24	21.24	21.12
		36#0	20.33	20.48	20.16
		36#19	20.32	20.33	20.23
		36#39	20.31	20.31	20.11
		75#0	20.23	20.31	20.18
20 MHz	QPSK	1#0	22.22	22.36	22.23
		1#49	22.14	22.35	22.20
		1#99	22.06	22.30	22.11
		50#0	21.14	21.18	21.14
		50#25	21.04	21.12	21.11
		50#50	20.94	21.08	21.10
		100#0	21.05	21.21	21.07
	16QAM	1#0	21.14	21.29	21.13
		1#49	21.12	21.20	21.12
		1#99	20.96	21.23	20.95
		50#0	19.99	20.17	19.99
		50#25	19.98	20.00	20.04
		50#50	19.94	19.97	20.05
		100#0	19.98	20.16	20.06

LTE Band IV

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	1#0	22.61	22.61	22.61
		1#3	22.58	22.64	22.61
		1#5	22.58	22.62	22.58
		3#0	22.58	22.58	22.59
		3#1	22.58	22.62	22.57
		3#3	22.58	22.65	22.60
		6#0	21.60	21.60	21.60
	16QAM	1#0	21.61	21.61	21.61
		1#3	21.61	21.64	21.57
		1#5	21.58	21.58	21.60
		3#0	21.63	21.57	21.62
		3#1	21.62	21.62	21.57
		3#3	21.58	21.61	21.60
		6#0	20.47	20.52	20.49
3 MHz	QPSK	1#0	22.60	22.60	22.58
		1#7	22.64	22.60	22.58
		1#14	22.67	22.57	22.57
		8#0	21.60	21.59	21.59
		8#4	21.60	21.58	21.59
		8#7	21.60	21.58	21.55
		15#0	21.63	21.58	21.61
	16QAM	1#0	21.63	21.64	21.57
		1#7	21.64	21.58	21.55
		1#14	21.67	21.57	21.61
		8#0	20.65	20.57	20.59
		8#4	20.60	20.61	20.59
		8#7	20.64	20.60	20.55
		15#0	20.63	20.58	20.58
5 MHz	QPSK	1#0	22.51	22.54	22.54
		1#12	22.49	22.55	22.53
		1#24	22.54	22.58	22.50
		12#0	22.51	22.53	22.60
		12#7	22.51	22.57	22.61
		12#13	22.51	22.57	22.61
		25#0	21.51	21.56	21.59
	16QAM	1#0	21.49	21.49	21.60
		1#12	21.49	21.55	21.51
		1#24	21.57	21.54	21.48
		12#0	21.47	21.52	21.59
		12#7	21.47	21.60	21.61
		12#13	21.46	21.61	21.61
		25#0	20.51	20.54	20.60

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10 MHz	QPSK	1#0	22.53	22.58	22.58
		1#24	22.57	22.62	22.59
		1#49	22.58	22.66	22.60
		25#0	22.58	22.58	22.57
		25#13	22.56	22.58	22.57
		25#25	22.53	22.61	22.55
		50#0	21.58	21.58	21.58
	16QAM	1#0	21.56	21.58	21.61
		1#24	21.59	21.59	21.59
		1#49	21.62	21.66	21.65
		25#0	21.58	21.62	21.62
		25#13	21.56	21.58	21.59
		25#25	21.54	21.61	21.57
		50#0	20.56	20.58	20.58
15 MHz	QPSK	1#0	22.79	22.82	22.85
		1#37	22.81	22.78	22.87
		1#74	22.81	22.78	22.86
		36#0	22.80	22.82	22.88
		36#19	22.80	22.86	22.86
		36#39	22.83	22.84	22.91
		75#0	21.79	21.81	21.85
	16QAM	1#0	21.74	21.82	21.85
		1#37	21.83	21.78	21.83
		1#74	21.81	21.78	21.89
		36#0	21.83	21.85	21.89
		36#19	21.80	21.86	21.89
		36#39	21.80	21.84	21.96
		75#0	20.71	20.71	20.66
20 MHz	QPSK	1#0	22.59	22.62	22.55
		1#49	22.59	22.63	22.56
		1#99	22.62	22.67	22.56
		50#0	22.57	22.59	22.59
		50#25	22.57	22.59	22.59
		50#50	22.57	22.58	22.57
		100#0	21.56	21.60	21.59
	16QAM	1#0	21.56	21.64	21.51
		1#49	21.57	21.64	21.56
		1#99	21.62	21.66	21.56
		50#0	21.60	21.59	21.59
		50#25	21.57	21.59	21.64
		50#50	21.57	21.58	21.53
		100#0	20.59	20.59	20.62

LTE Band V

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4MHz	QPSK	1#0	23.30	23.19	23.26
		1#3	23.12	23.20	23.16
		1#5	23.16	23.23	23.23
		3#0	23.11	23.12	23.11
		3#1	23.08	23.14	23.09
		3#3	23.10	23.13	23.08
		6#0	22.02	22.11	22.05
	16QAM	1#0	23.30	23.16	23.34
		1#3	23.05	23.20	23.17
		1#5	23.16	23.32	23.24
		3#0	23.11	23.05	23.11
		3#1	23.08	23.14	23.03
		3#3	23.10	23.15	23.04
		6#0	21.01	21.05	20.96
3 MHz	QPSK	1#0	23.06	23.12	23.02
		1#7	23.13	23.29	23.22
		1#14	23.16	23.31	23.23
		8#0	22.05	22.11	22.02
		8#4	23.17	23.16	22.99
		8#7	23.10	23.07	23.04
		15#0	22.06	22.11	22.07
	16QAM	1#0	23.04	23.21	23.04
		1#7	23.20	23.29	23.13
		1#14	23.26	23.31	23.21
		8#0	22.11	22.11	22.06
		8#4	23.11	23.18	23.00
		8#7	23.10	23.07	23.04
		15#0	21.10	21.16	21.09
5 MHz	QPSK	1#0	23.21	23.25	23.19
		1#12	23.14	23.29	23.14
		1#24	23.26	23.31	23.13
		12#0	22.11	22.14	22.13
		12#7	23.20	23.11	23.00
		12#13	23.10	23.07	23.02
		25#0	22.05	22.07	21.99
	16QAM	1#0	23.29	23.28	23.19
		1#12	23.23	23.21	23.19
		1#24	23.23	23.31	23.13
		12#0	22.11	22.14	22.04
		12#7	23.25	23.11	23.00
		12#13	23.10	23.14	23.02
		25#0	21.09	21.18	21.11

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
10 MHz	QPSK	1#0	23.11	23.18	23.15
		1#24	23.23	23.14	23.21
		1#49	23.31	23.35	23.13
		25#0	22.12	22.13	22.12
		25#13	23.26	23.11	23.00
		25#25	23.13	23.04	23.02
		50#0	22.09	22.14	22.06
	16QAM	1#0	23.16	23.13	23.15
		1#24	23.23	23.16	23.21
		1#49	23.24	23.45	23.13
		25#0	22.16	22.13	22.13
		25#13	23.26	23.11	23.00
		25#25	23.11	23.05	22.95
		50#0	21.07	21.16	21.10

LTE Band VII

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5 MHz	QPSK	1#0	22.49	22.48	22.53
		1#12	22.47	22.47	22.57
		1#24	22.52	22.52	22.53
		12#0	22.49	22.48	22.46
		12#7	22.51	22.48	22.50
		12#13	22.52	22.52	22.51
		25#0	21.49	21.48	21.48
	16QAM	1#0	21.49	21.50	21.53
		1#12	21.47	21.47	21.57
		1#24	21.53	21.52	21.58
		12#0	21.49	21.53	21.46
		12#7	21.51	21.51	21.48
		12#13	21.52	21.51	21.54
		25#0	20.47	20.47	20.47
10 MHz	QPSK	1#0	22.45	22.46	22.47
		1#24	22.44	22.45	22.45
		1#49	22.40	22.48	22.45
		25#0	22.52	22.49	22.47
		25#13	22.52	22.49	22.45
		25#25	22.52	22.49	22.43
		50#0	21.49	21.49	21.47
	16QAM	1#0	21.47	21.42	21.47
		1#24	21.45	21.47	21.48
		1#49	21.40	21.45	21.44
		25#0	21.52	21.51	21.46
		25#13	21.50	21.53	21.46
		25#25	21.57	21.45	21.48
		50#0	20.47	20.43	20.45
15 MHz	QPSK	1#0	22.70	22.71	22.74
		1#37	22.70	22.75	22.79
		1#74	22.70	22.75	22.83
		36#0	22.68	22.74	22.76
		36#19	22.65	22.74	22.76
		36#39	22.62	22.69	22.78
		75#0	21.70	21.74	21.74
	16QAM	1#0	21.67	21.69	21.74
		1#37	21.73	21.73	21.77
		1#74	21.73	21.70	21.80
		36#0	21.68	21.77	21.77
		36#19	21.61	21.74	21.80
		36#39	21.60	21.67	21.74
		75#0	20.63	20.63	20.64

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
20 MHz	QPSK	1#0	22.44	22.50	22.46
		1#49	22.47	22.46	22.44
		1#99	22.51	22.49	22.43
		50#0	22.52	22.45	22.42
		50#25	22.49	22.45	22.42
		50#50	22.49	22.50	22.45
		100#0	21.47	21.47	21.46
	16QAM	1#0	21.49	21.46	21.47
		1#49	21.47	21.46	21.44
		1#99	21.51	21.49	21.39
		50#0	21.54	21.49	21.42
		50#25	21.53	21.49	21.38
		50#50	21.51	21.49	21.45
		100#0	20.45	20.49	20.50

LTE Band 17

Channel Bandwidth	Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5MHz	QPSK	1#0	23.28	23.22	23.19
		1#12	23.26	23.23	23.19
		1#24	23.23	23.23	23.15
		12#0	23.25	23.23	23.17
		12#7	23.21	23.21	23.17
		12#13	23.21	23.25	23.20
		25#0	22.24	22.24	22.19
	16QAM	1#0	22.23	22.22	22.18
		1#12	22.23	22.23	22.19
		1#24	22.22	22.23	22.15
		12#0	22.30	22.23	22.16
		12#7	22.26	22.23	22.16
		12#13	22.19	22.28	22.21
		25#0	21.31	21.31	21.34
10 MHz	QPSK	1#0	23.29	23.27	23.25
		1#24	23.29	23.27	23.26
		1#49	23.28	23.30	23.25
		25#0	23.23	23.30	23.25
		25#13	23.23	23.30	23.29
		25#25	23.20	23.28	23.28
		50#0	22.25	22.25	22.25
	16QAM	1#0	22.29	22.27	22.25
		1#24	22.24	22.24	22.26
		1#49	22.28	22.30	22.27
		25#0	22.26	22.30	22.22
		25#13	22.19	22.26	22.29
		25#25	22.18	22.28	22.28
		50#0	21.29	21.26	21.25

PAR, Band II

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	2.28	1.88	2.04	13
	100 RB		6.44	6.44	6.24	13
16QAM	1 RB	20 MHz	3.32	3.12	3.16	13
	100 RB		6.96	7.00	6.92	13

PAR, Band IV

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	3.00	2.60	2.92	13
	100 RB		6.36	6.24	6.36	13
16QAM	1 RB	20 MHz	4.08	3.64	3.68	13
	100 RB		6.40	7.04	7.12	13

PAR, Band V

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	10 MHz	3.60	2.72	3.28	13
	50 RB		5.28	4.88	5.16	13
16QAM	1 RB	10 MHz	4.72	3.84	4.28	13
	50 RB		6.08	5.76	6.08	13

PAR, Band VII

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	20 MHz	1.92	1.84	2.08	13
	100 RB		6.36	6.44	6.44	13
16QAM	1 RB	20 MHz	2.88	2.44	3.20	13
	100 RB		6.92	7.00	7.16	13

PAR, Band 17

Test Modulation		Channel Bandwidth	Low Channel PAR (dB)	Middle Channel PAR (dB)	High Channel PAR (dB)	Limit (dB)
QPSK	1 RB	10 MHz	2.28	2.40	2.52	13
	50 RB		4.84	4.80	5.00	13
16QAM	1 RB	10 MHz	3.32	3.48	3.44	13
	50 RB		5.84	5.84	5.88	13

Note: peak-to-average ratio (PAR) <13 dB.

ERP & EIRP

Part 22H

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM 850_Middle Channel								
836.600	H	91.03	16.1	0.0	1	15.1	38.5	23.4
836.600	V	102.40	30.6	0.0	1	29.6	38.5	8.9
EDGE 850_Middle Channel								
836.600	H	88.75	13.8	0.0	1	12.8	38.5	25.7
836.600	V	98.24	26.4	0.0	1	25.4	38.5	13.1
WCDMA Band V Middle Channel								
836.600	H	86.36	11.4	0.0	1	10.4	38.5	28.1
836.600	V	93.53	21.7	0.0	1	20.7	38.5	17.8

Part 24E

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
PCS 1900_Middle Channel								
1880.000	H	94.53	21.9	11.7	2.7	30.9	33.0	2.1
1880.000	V	91.86	19.4	11.7	2.7	28.4	33.0	4.6
EDGE 1900_Middle Channel								
1880.000	H	88.98	16.4	11.7	2.7	25.4	33.0	7.6
1880.000	V	84.52	12.1	11.7	2.7	21.1	33.0	11.9
WCDMA Band II Middle Channel								
1880.000	H	83.63	11	11.7	2.7	20.0	33.0	13.0
1880.000	V	80.24	7.8	11.7	2.7	16.8	33.0	16.2

LTE Band II

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 1.4M BW Middle Channel 1880.000 MHz								
1880.000	H	84.85	12.2	11.7	2.7	21.2	33.00	11.8
1880.000	V	81.14	8.7	11.7	2.7	17.7	33.00	15.3
16-QAM 1.4M BW Middle Channel 1880.000 MHz								
1880.000	H	84.51	11.9	11.7	2.7	20.9	33.00	12.1
1880.000	V	80.36	7.9	11.7	2.7	16.9	33.00	16.1
QPSK 3M BW Middle Channel 1880.000 MHz								
1880.000	H	83.79	11.2	11.7	2.7	20.2	33.00	12.8
1880.000	V	81.75	9.3	11.7	2.7	18.3	33.00	14.7
16-QAM 3M BW Middle Channel 1880.000 MHz								
1880.000	H	84.79	12.2	11.7	2.7	21.2	33.00	11.8
1880.000	V	80.62	8.2	11.7	2.7	17.2	33.00	15.8
QPSK 5M BW Middle Channel 1880.000 MHz								
1880.000	H	83.71	11.1	11.7	2.7	20.1	33.00	12.9
1880.000	V	81.46	9	11.7	2.7	18.0	33.00	15.0
16-QAM 5M BW Middle Channel 1880.000 MHz								
1880.000	H	84.41	11.8	11.7	2.7	20.8	33.00	12.2
1880.000	V	81.25	8.8	11.7	2.7	17.8	33.00	15.2
QPSK 10M BW Middle Channel 1880.000 MHz								
1880.000	H	84.45	11.8	11.7	2.7	20.8	33.00	12.2
1880.000	V	82.34	9.9	11.7	2.7	18.9	33.00	14.1
16-QAM 10M BW Middle Channel 1880.000 MHz								
1880.000	H	84.06	11.5	11.7	2.7	20.5	33.00	12.5
1880.000	V	81.85	9.4	11.7	2.7	18.4	33.00	14.6
QPSK 15M BW Middle Channel 1880.000 MHz								
1880.000	H	82.87	10.3	11.7	2.7	19.3	33.00	13.7
1880.000	V	82.32	9.9	11.7	2.7	18.9	33.00	14.1
16-QAM 15M BW Middle Channel 1880.000 MHz								
1880.000	H	82.55	9.9	11.7	2.7	18.9	33.00	14.1
1880.000	V	82.49	10	11.7	2.7	19.0	33.00	14.0
QPSK 20M BW Middle Channel 1880.000 MHz								
1880.000	H	83.04	10.4	11.7	2.7	19.4	33.00	13.6
1880.000	V	81.76	9.3	11.7	2.7	18.3	33.00	14.7
16-QAM 20M BW Middle Channel 1880.000 MHz								
1880.000	H	83.14	10.5	11.7	2.7	19.5	33.00	13.5
1880.000	V	81.85	9.4	11.7	2.7	18.4	33.00	14.6

LTE Band IV

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 1.4M BW Middle Channel 1732.500 MHz								
1732.500	H	86.04	12	10.9	2.5	20.4	30.00	9.6
1732.500	V	82.89	8.5	10.9	2.5	16.9	30.00	13.1
16-QAM 1.4M BW Middle Channel 1732.500 MHz								
1732.500	H	86.16	12.1	10.9	2.5	20.5	30.00	9.5
1732.500	V	82.72	8.4	10.9	2.5	16.8	30.00	13.2
QPSK 3M BW Middle Channel 1732.500 MHz								
1732.500	H	85.89	11.8	10.9	2.5	20.2	30.00	9.8
1732.500	V	82.45	8.1	10.9	2.5	16.5	30.00	13.5
16-QAM 3M BW Middle Channel 1732.500 MHz								
1732.500	H	86.05	12	10.9	2.5	20.4	30.00	9.6
1732.500	V	82.63	8.3	10.9	2.5	16.7	30.00	13.3
QPSK 5M BW Middle Channel 1732.500 MHz								
1732.500	H	85.85	11.8	10.9	2.5	20.2	30.00	9.8
1732.500	V	82.13	7.8	10.9	2.5	16.2	30.00	13.8
16-QAM 5M BW Middle Channel 1732.500 MHz								
1732.500	H	85.97	11.9	10.9	2.5	20.3	30.00	9.7
1732.500	V	81.68	7.3	10.9	2.5	15.7	30.00	14.3
QPSK 10M BW Middle Channel 1732.500 MHz								
1732.500	H	85.76	11.7	10.9	2.5	20.1	30.00	9.9
1732.500	V	82.31	7.9	10.9	2.5	16.3	30.00	13.7
16-QAM 10M BW Middle Channel 1732.500 MHz								
1732.500	H	85.82	11.8	10.9	2.5	20.2	30.00	9.8
1732.500	V	81.85	7.5	10.9	2.5	15.9	30.00	14.1
QPSK 15M BW Middle Channel 1732.500 MHz								
1732.500	H	85.75	11.7	10.9	2.5	20.1	30.00	9.9
1732.500	V	81.64	7.3	10.9	2.5	15.7	30.00	14.3
16-QAM 15M BW Middle Channel 1732.500 MHz								
1732.500	H	85.25	11.2	10.9	2.5	19.6	30.00	10.4
1732.500	V	81.68	7.3	10.9	2.5	15.7	30.00	14.3
QPSK 20M BW Middle Channel 1732.500 MHz								
1732.500	H	84.74	10.7	10.9	2.5	19.1	30.00	10.9
1732.500	V	80.89	6.5	10.9	2.5	14.9	30.00	15.1
16-QAM 20M BW Middle Channel 1732.500 MHz								
1732.500	H	84.95	10.9	10.9	2.5	19.3	30.00	10.7
1732.500	V	81.03	6.7	10.9	2.5	15.1	30.00	14.9

LTE Band V

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 1.4 MHz Middle Channel 836.500 MHz								
836.500	H	84.45	9.5	0.0	1	8.5	38.5	30.0
836.500	V	93.24	21.4	0.0	1	20.4	38.5	18.1
16-QAM 1.4 MHz Middle Channel 836.500 MHz								
836.500	H	83.98	9.1	0.0	1	8.1	38.5	30.4
836.500	V	93.08	21.3	0.0	1	20.3	38.5	18.2
QPSK 3 MHz Middle Channel 836.500 MHz								
836.500	H	84.16	9.2	0.0	1	8.2	38.5	30.3
836.500	V	93.39	21.6	0.0	1	20.6	38.5	17.9
16-QAM 3 MHz Middle Channel 836.500 MHz								
836.500	H	84.05	9.1	0.0	1	8.1	38.5	30.4
836.500	V	93.24	21.4	0.0	1	20.4	38.5	18.1
QPSK 5 MHz Middle Channel 836.500 MHz								
836.500	H	84.14	9.2	0.0	1	8.2	38.5	30.3
836.500	V	93.38	21.6	0.0	1	20.6	38.5	17.9
16-QAM 5 MHz Middle Channel 836.500 MHz								
836.500	H	83.57	8.6	0.0	1	7.6	38.5	30.9
836.500	V	93.14	21.3	0.0	1	20.3	38.5	18.2
QPSK 10 MHz Middle Channel 836.500 MHz								
836.500	H	84.09	9.2	0.0	1	8.2	38.5	30.3
836.500	V	93.67	21.9	0.0	1	20.9	38.5	17.6
16-QAM 10 MHz Middle Channel 836.500 MHz								
836.500	H	83.87	8.9	0.0	1	7.9	38.5	30.6
836.500	V	93.23	21.4	0.0	1	20.4	38.5	18.1

LTE Band VII

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 5 MHz Middle Channel 2535.000 MHz								
2535.000	H	80.16	7.6	13.1	3.1	17.6	33.00	15.4
2535.000	V	77.55	6.4	13.1	3.1	16.4	33.00	16.6
16-QAM 5 MHz Middle Channel 2535.000 MHz								
2535.000	H	79.83	7.2	13.1	3.1	17.2	33.00	15.8
2535.000	V	77.49	6.3	13.1	3.1	16.3	33.00	16.7
QPSK 10 MHz Middle Channel 2535.000 MHz								
2535.000	H	80.96	8.4	13.1	3.1	18.4	33.00	14.6
2535.000	V	78.21	7.1	13.1	3.1	17.1	33.00	15.9
16-QAM 10 MHz Middle Channel 2535.000 MHz								
2535.000	H	80.64	8	13.1	3.1	18.0	33.00	15.0
2535.000	V	78.31	7.2	13.1	3.1	17.2	33.00	15.8
QPSK 15 MHz Middle Channel 2535.000 MHz								
2535.000	H	81.54	8.9	13.1	3.1	18.9	33.00	14.1
2535.000	V	78.76	7.6	13.1	3.1	17.6	33.00	15.4
16-QAM 15 MHz Middle Channel 2535.000 MHz								
2535.000	H	81.65	9	13.1	3.1	19.0	33.00	14.0
2535.000	V	78.74	7.6	13.1	3.1	17.6	33.00	15.4
QPSK 20 MHz Middle Channel 2535.000 MHz								
2535.000	H	79.89	7.3	13.1	3.1	17.3	33.00	15.7
2535.000	V	78.12	7	13.1	3.1	17.0	33.00	16.0
16-QAM 20 MHz Middle Channel 2535.000 MHz								
2535.000	H	81.84	9.2	13.1	3.1	19.2	33.00	13.8
2535.000	V	78.33	7.2	13.1	3.1	17.2	33.00	15.8

LTE Band 17

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK 5 MHz Middle Channel 710.000 MHz								
710.000	H	94.00	17.2	0.0	0.9	16.3	34.77	18.5
710.000	V	95.86	21.5	0.0	0.9	20.6	34.77	14.2
16-QAM 5 MHz Middle Channel 710.000 MHz								
710.000	H	93.98	17.2	0.0	0.9	16.3	34.77	18.5
710.000	V	95.64	21.3	0.0	0.9	20.4	34.77	14.4
QPSK 10 MHz Middle Channel 710.000 MHz								
710.000	H	94.31	17.5	0.0	0.9	16.6	34.77	18.2
710.000	V	97.14	22.8	0.0	0.9	21.9	34.77	12.9
16-QAM 10 MHz Middle Channel 710.000 MHz								
710.000	H	94.15	17.3	0.0	0.9	16.4	34.77	18.4
710.000	V	95.78	21.4	0.0	0.9	20.5	34.77	14.3

FCC §2.1049, §22.917, §22.905 & §24.238 & §27.53- OCCUPIED BANDWIDTH


Applicable Standard

FCC §2.1049, §22.917, §22.905, §24.238 and §27.53.

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

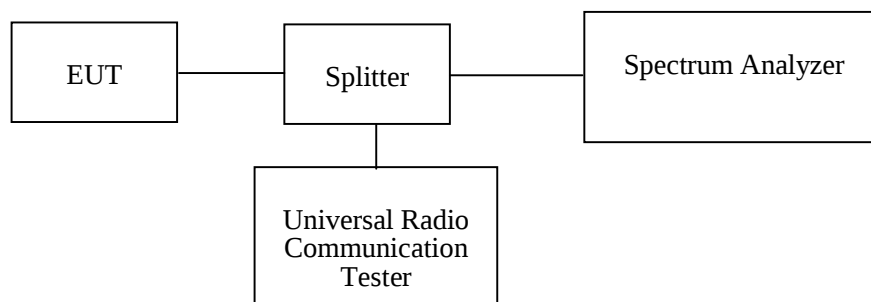

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
Unknown	RF Cable	Unknown	NO.3	Each Time	/
Unknown	Two-way Splitter	Unknown	OE0120121	Each Time	/

*** Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Data

Environmental Conditions

Temperature:	21.6~23 °C
Relative Humidity:	59~60 %
ATM Pressure:	97.5~97.8 kPa

The testing was performed by Lorin Bian from 2017-05-17 to 2017-05-20.

Test Mode: Transmitting

Test Result: Compliant. Please refer to the following table and plots.

Band	Test Channel	Mode	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
Cellular	M	GSM	0.246	0.316
		EDGE	0.259	0.336
PCS		GSM	0.244	0.322
		EDGE	0.257	0.330
WCDMA Band II		Rel 99	4.329	5.16
		HSDPA	4.269	5.04
		HSUPA	4.269	5.142
WCDMA Band V		Rel 99	4.228	4.898
		HSDPA	4.228	4.9
		HSUPA	4.188	4.9

Band	Test Modulation	Test Bandwidth (MHz)	Test Channel	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
LTE Band II	QPSK	1.4	M	1.130	1.464
		3		2.766	3.179
		5		4.589	5.441
		10		9.098	10.465
		15		13.647	15.483
		20		18.357	20.553
	16QAM	1.4	M	1.112	1.374
		3		2.778	3.299
		5		4.569	5.140
		10		9.098	10.798
		15		13.707	15.643
		20		18.517	20.874


Band	Test Modulation	Test Bandwidth (MHz)	Test Channel	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
LTE Band IV	QPSK	1.4	M	1.112	1.314
		3		2.766	3.120
		5		4.549	5.080
		10		9.098	10.196
		15		13.647	15.180
		20		18.196	20.232
	16QAM	1.4	M	1.106	1.302
		3		2.754	3.143
		5		4.549	5.100
		10		9.098	10.236
		15		13.647	15.174
		20		18.196	20.160

Band	Test Modulation	Test Bandwidth (MHz)	Test Channel	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
LTE Band V	QPSK	1.4	M	1.112	1.315
		3		2.754	3.108
		5		4.549	5.060
		10		9.058	10.080
	16QAM	1.4	M	1.106	1.302
		3		2.754	3.083
		5		4.549	5.100
		10		9.018	10.036


Band	Test Modulation	Test Bandwidth (MHz)	Test Channel	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
LTE Band VII	QPSK	5	M	4.569	5.479
		10		9.098	10.453
		15		13.647	15.032
		20		18.196	20.375
	16QAM	5	M	4.569	5.142
		10		9.098	10.293
		15		13.707	15.098
		20		18.357	20.455

Band	Test Modulation	Test Bandwidth (MHz)	Test Channel	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
LTE Band 17	QPSK	5	M	4.529	5.080
		10		9.018	10.080
	16QAM	5	M	4.549	5.118
		10		9.018	10.076


GMSK 850 Cellular Band

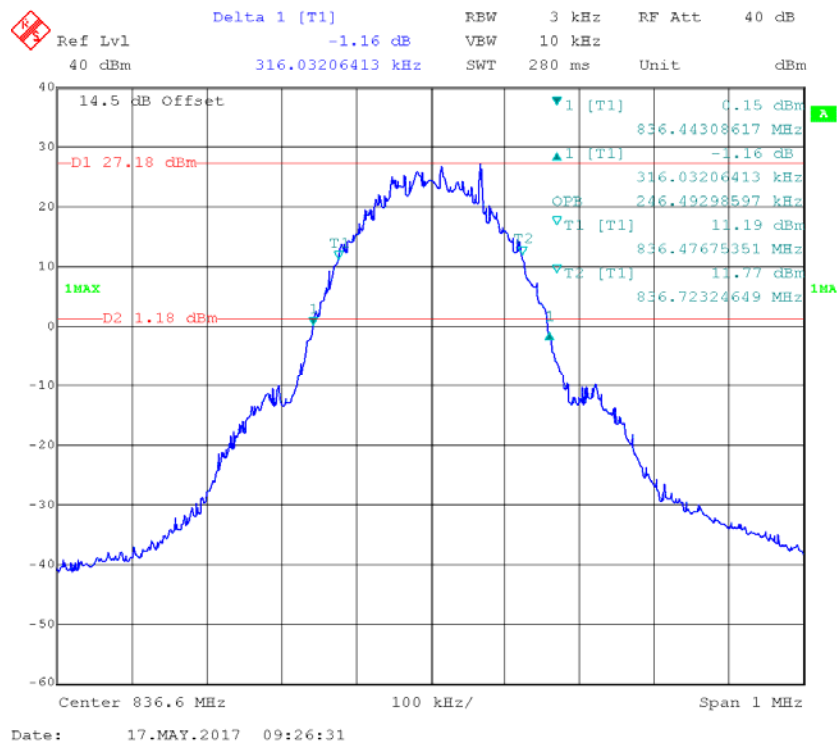


GMSK PCS Band

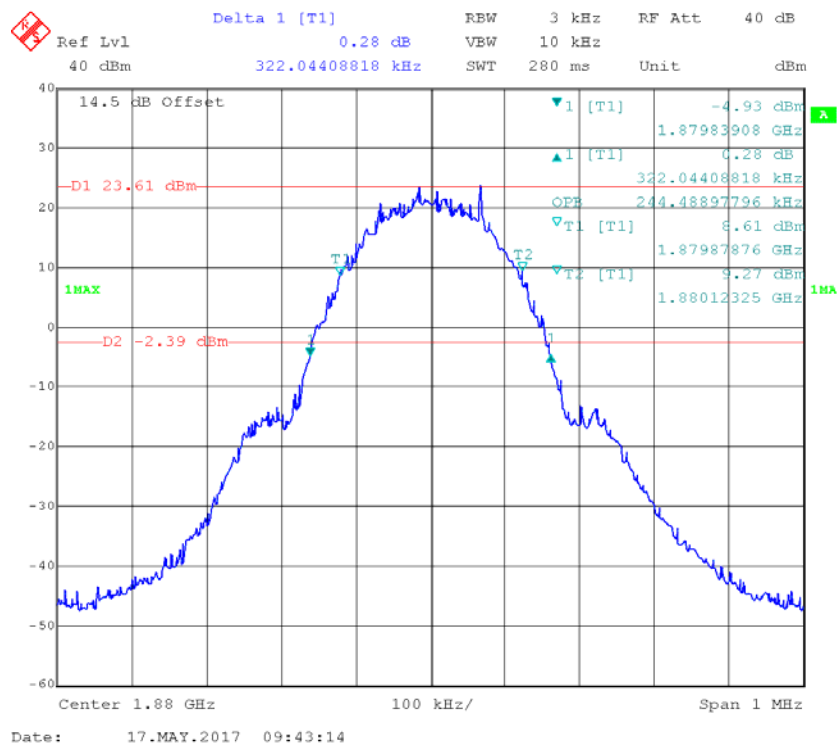


EDGE 850 Cellular Band

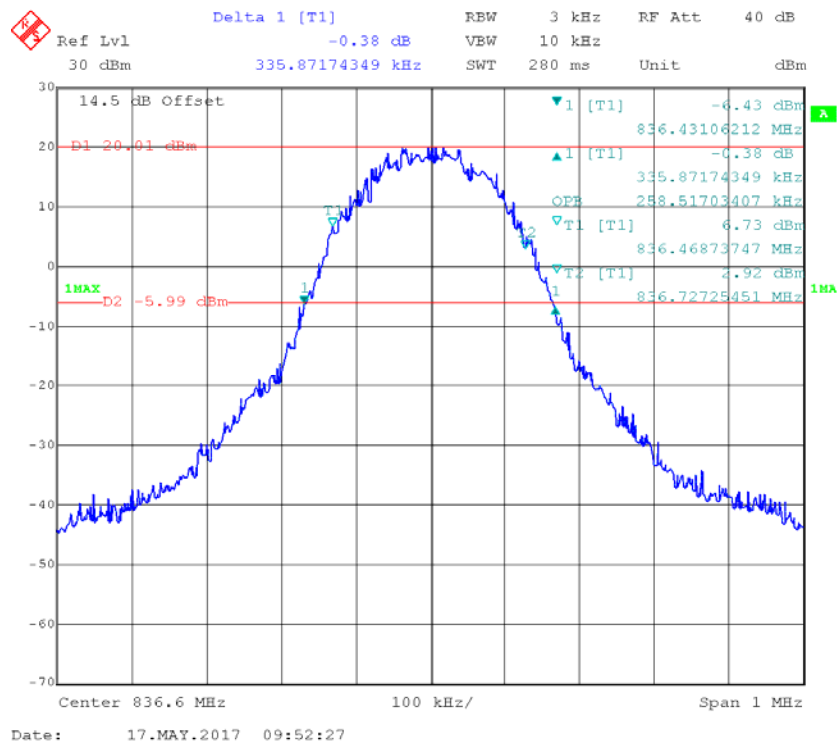


EDGE PCS Band

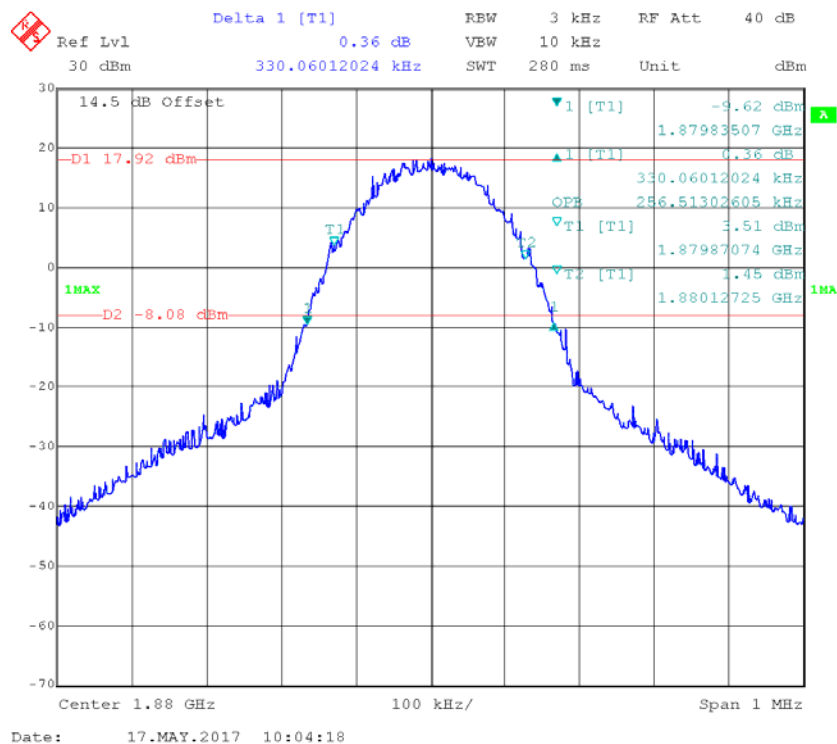


REL99 Band II

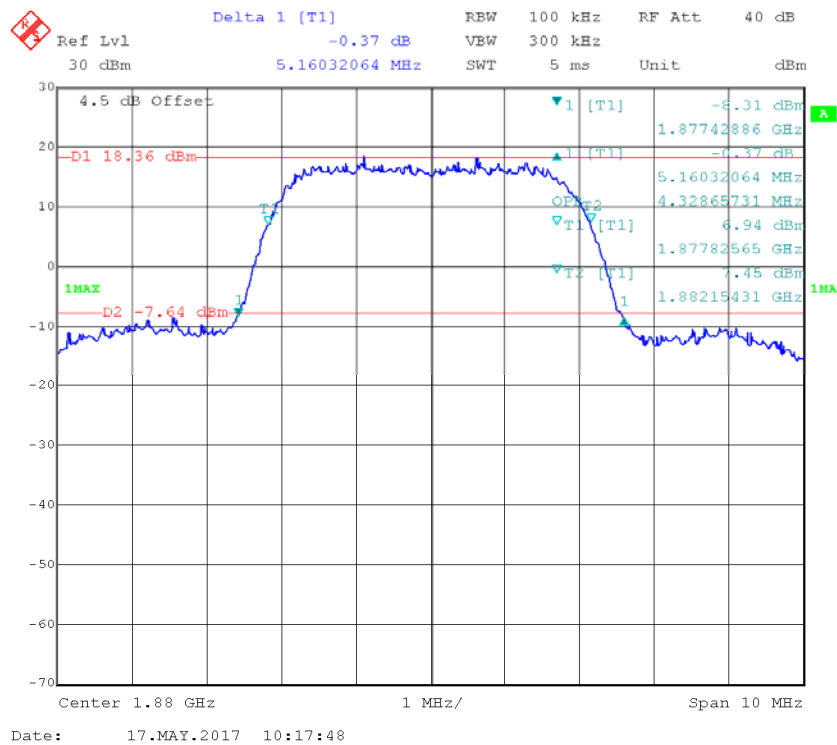


HSDPA Band II

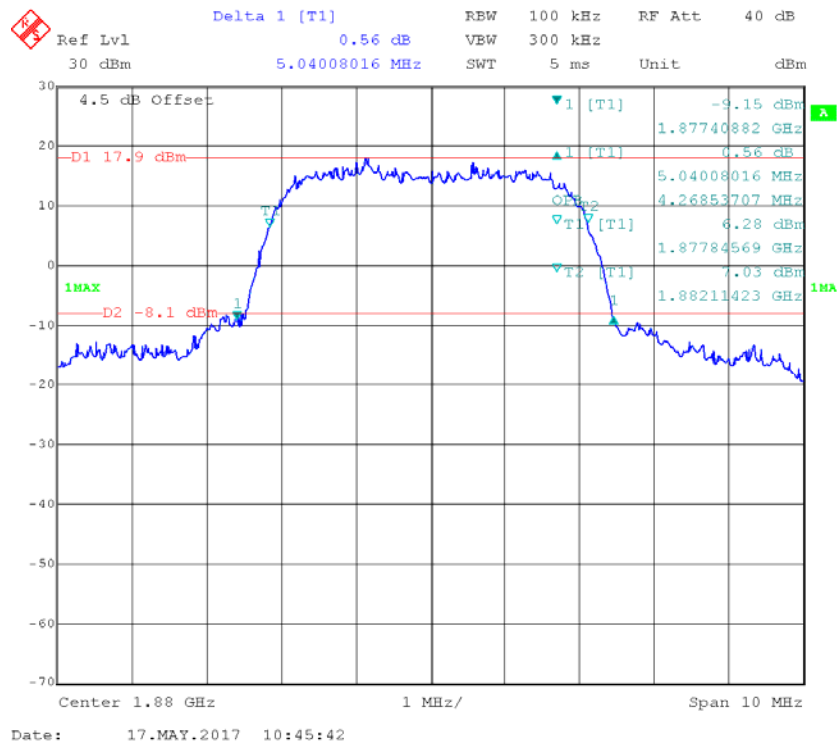


HSUPA Band II

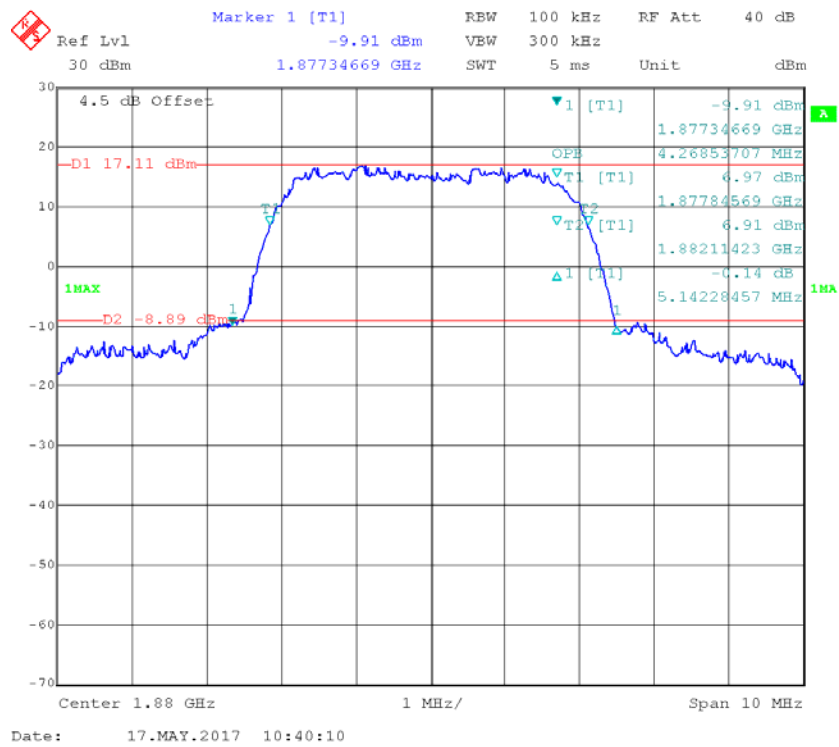


REL99 Band V

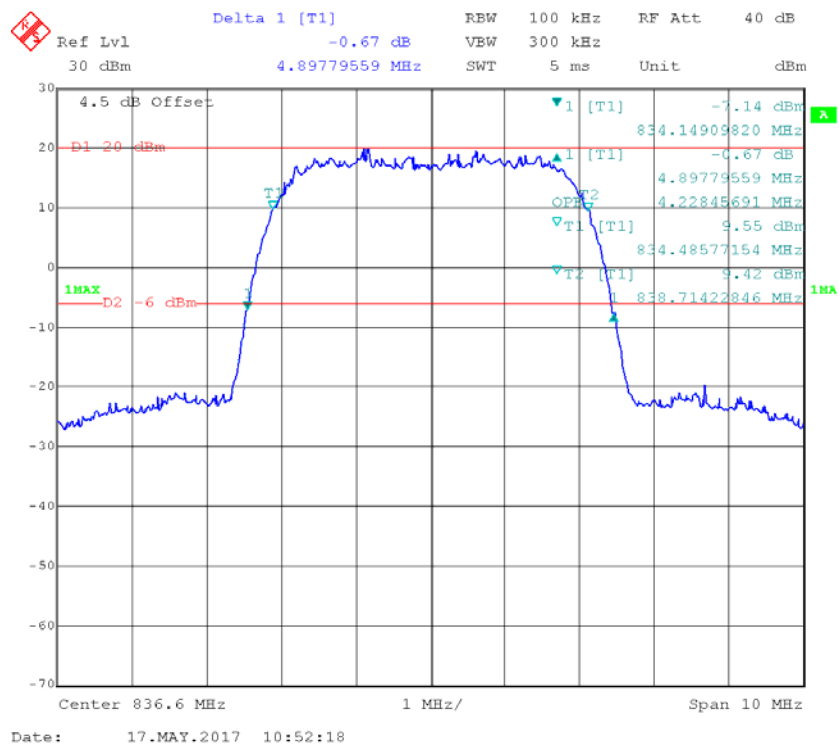

HSDPA Band V

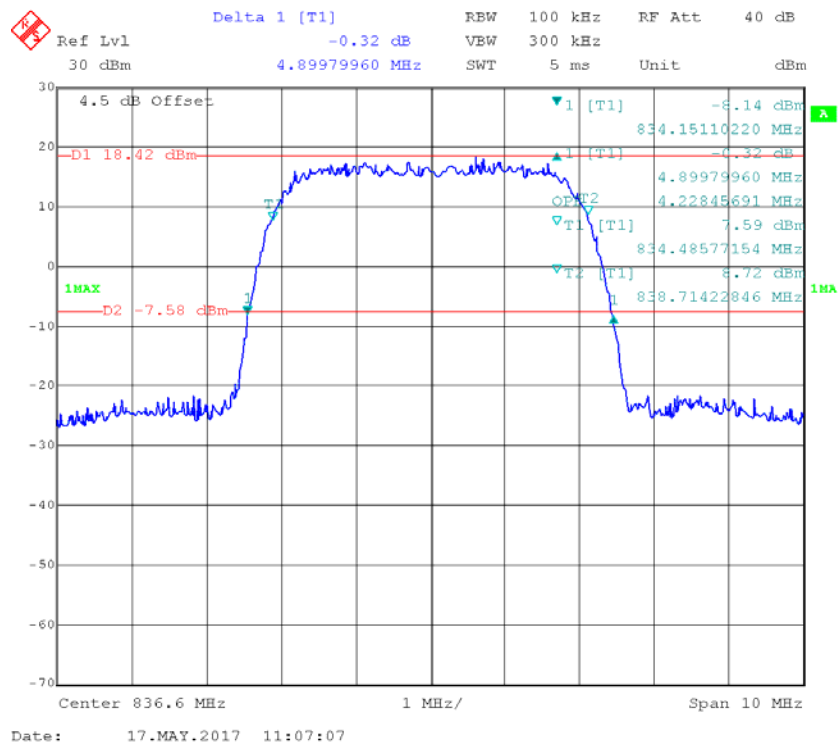


HSUPA Band V

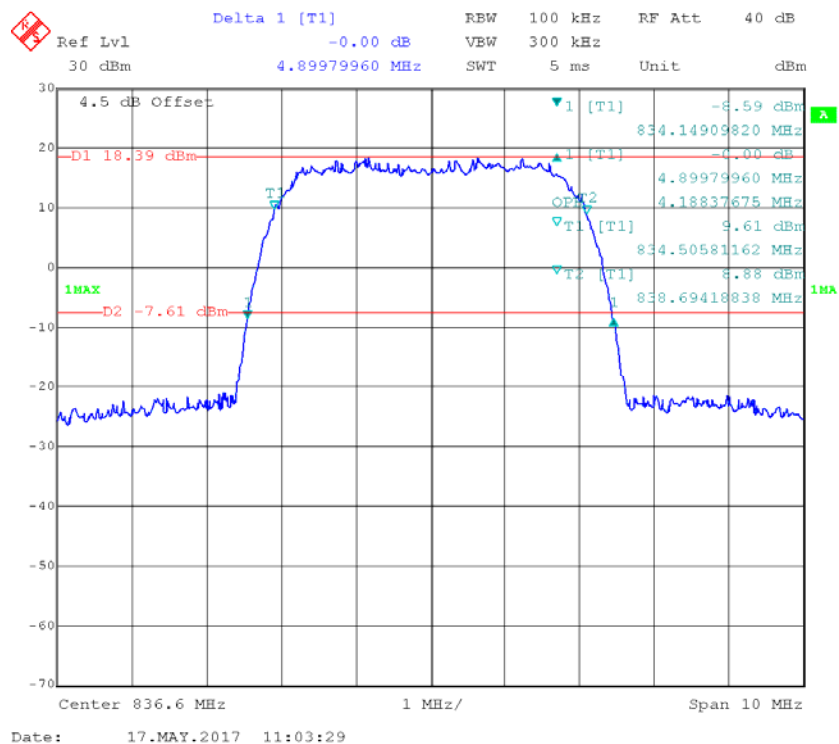


LTE Band II:


QPSK_1.4 MHz

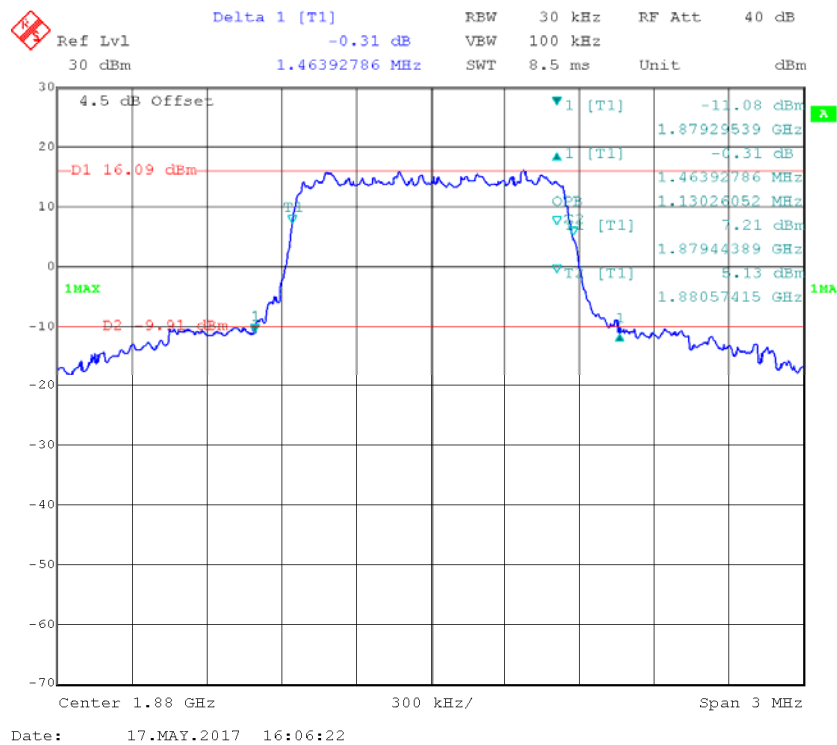


QPSK_3 MHz

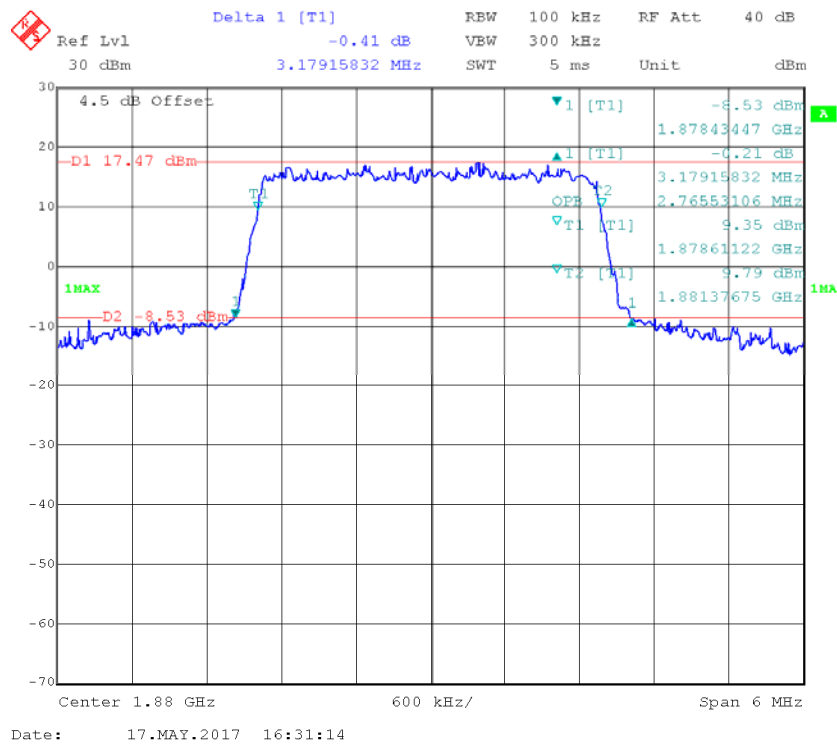


QPSK_5 MHz

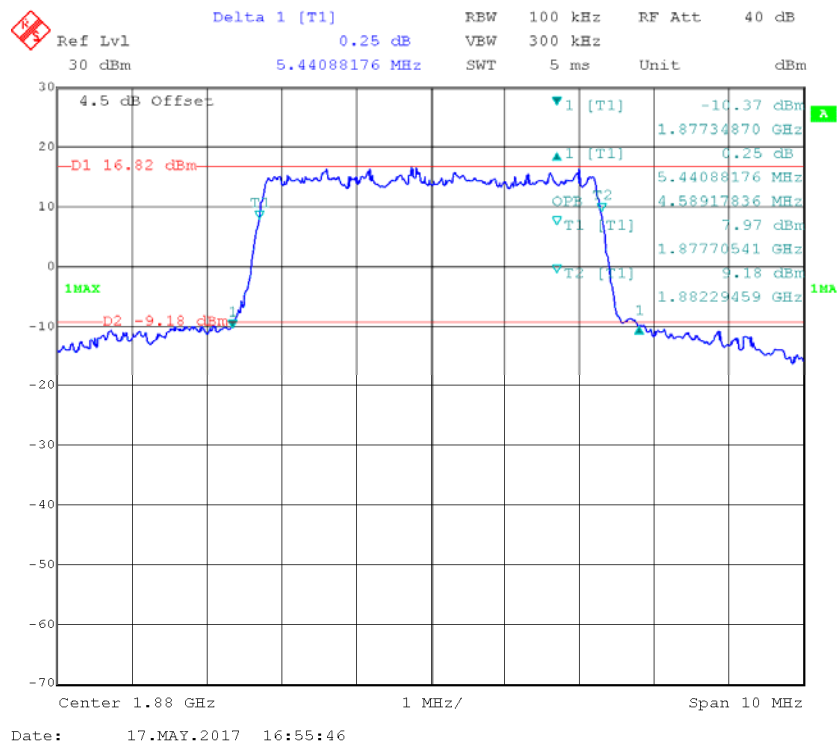


QPSK_10 MHz

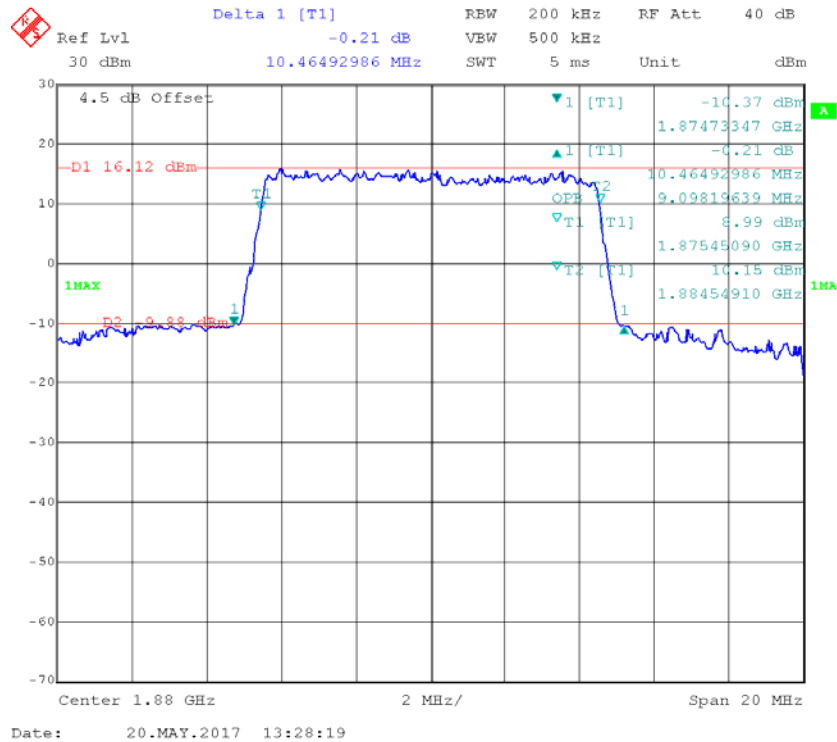


QPSK_15 MHz

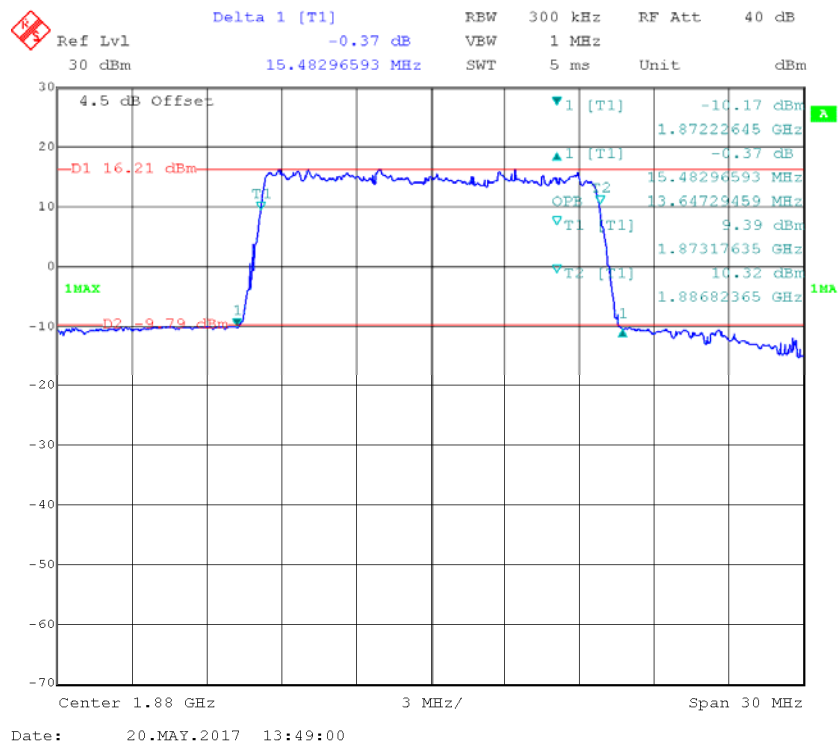


QPSK_20 MHz

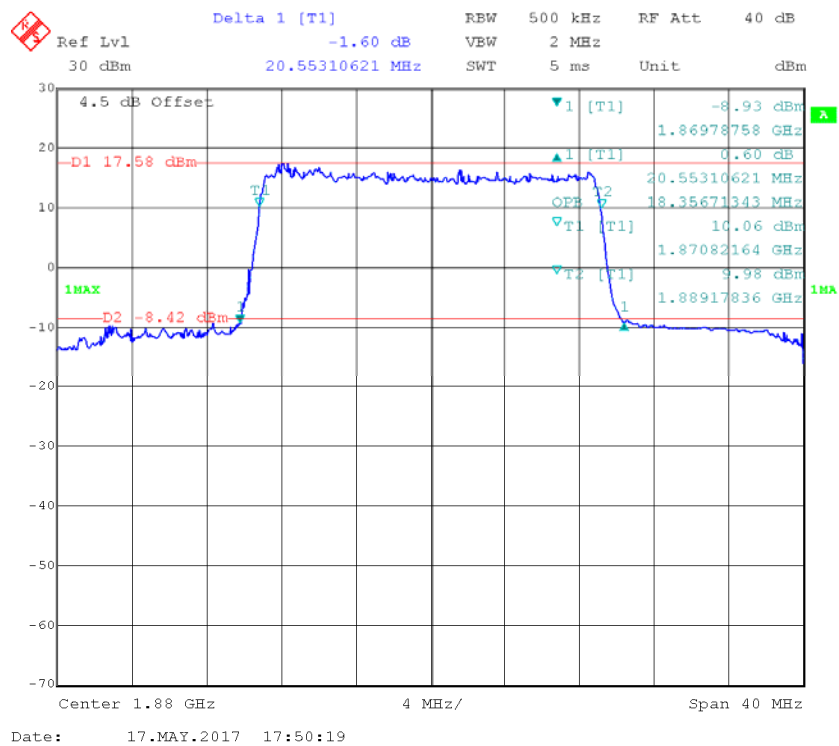


16-QAM_1.4 MHz

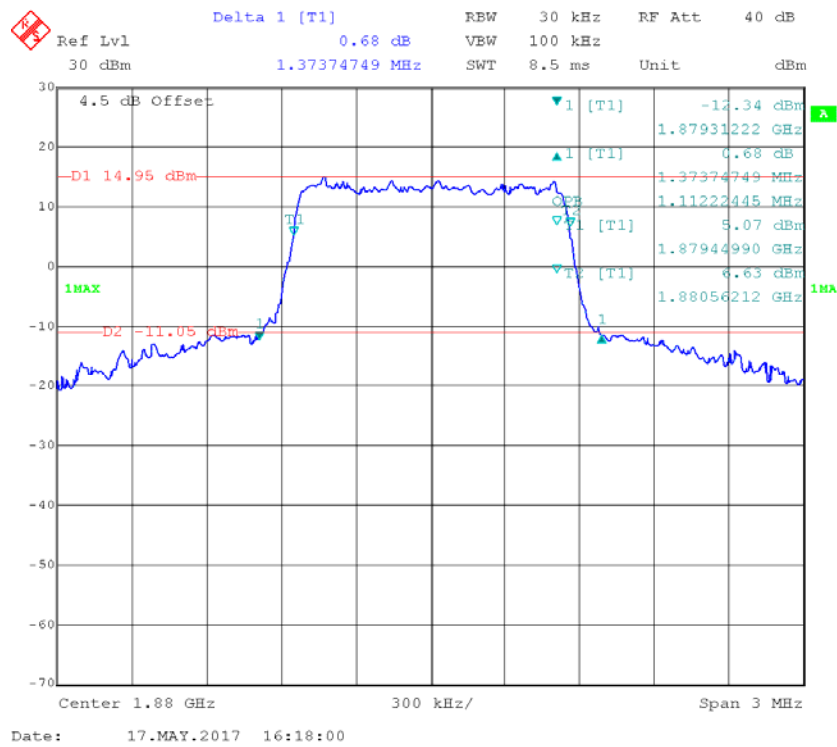


16-QAM_3 MHz

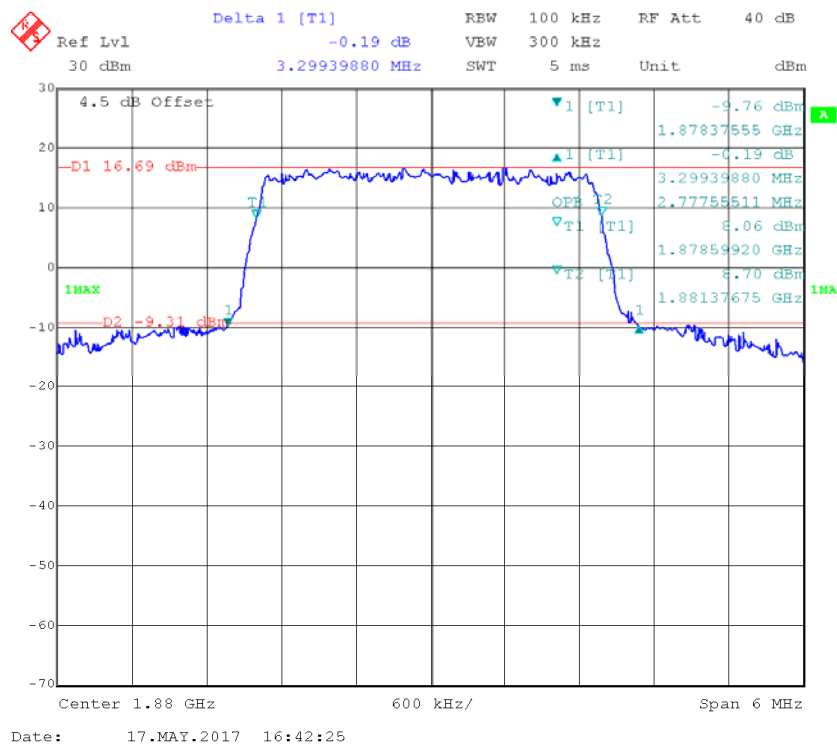


16-QAM_5 MHz

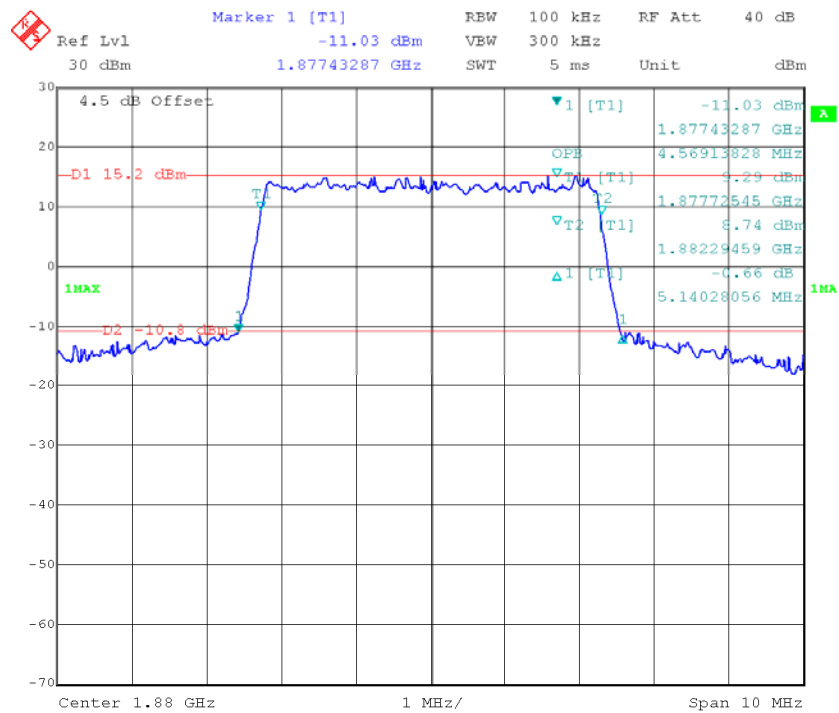


16-QAM_10 MHz

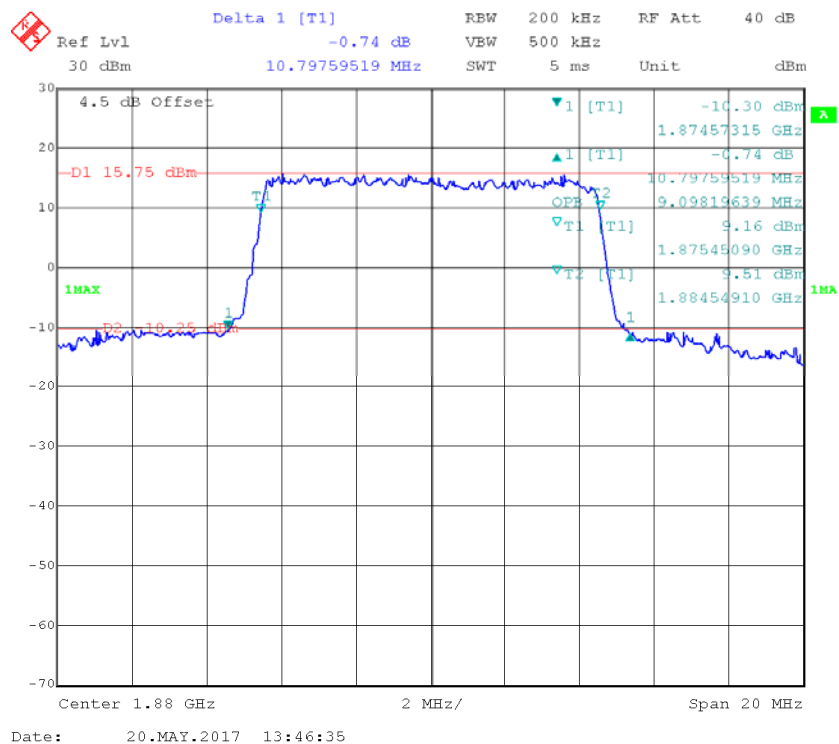

16-QAM_15 MHz

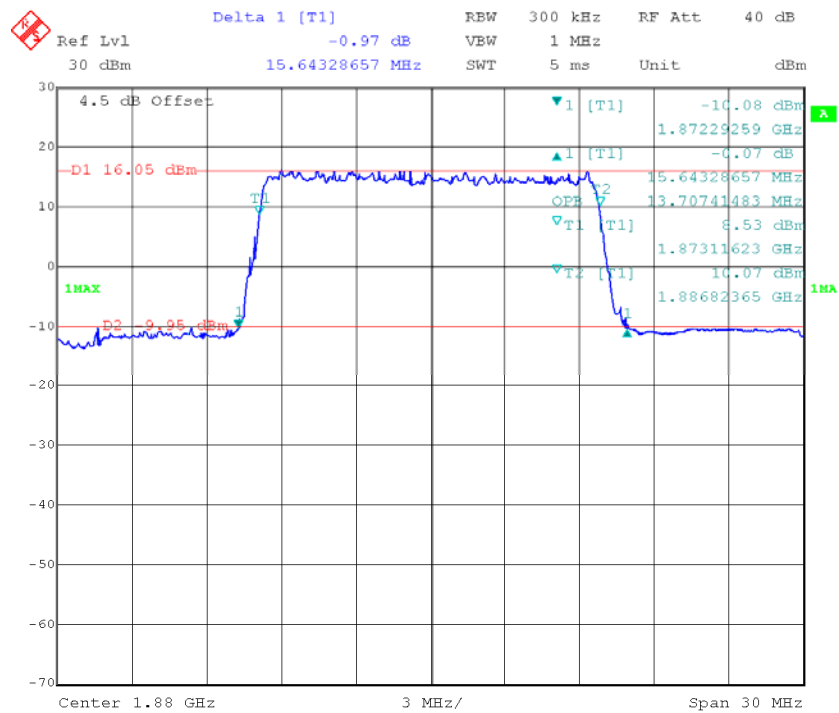


16-QAM_20 MHz

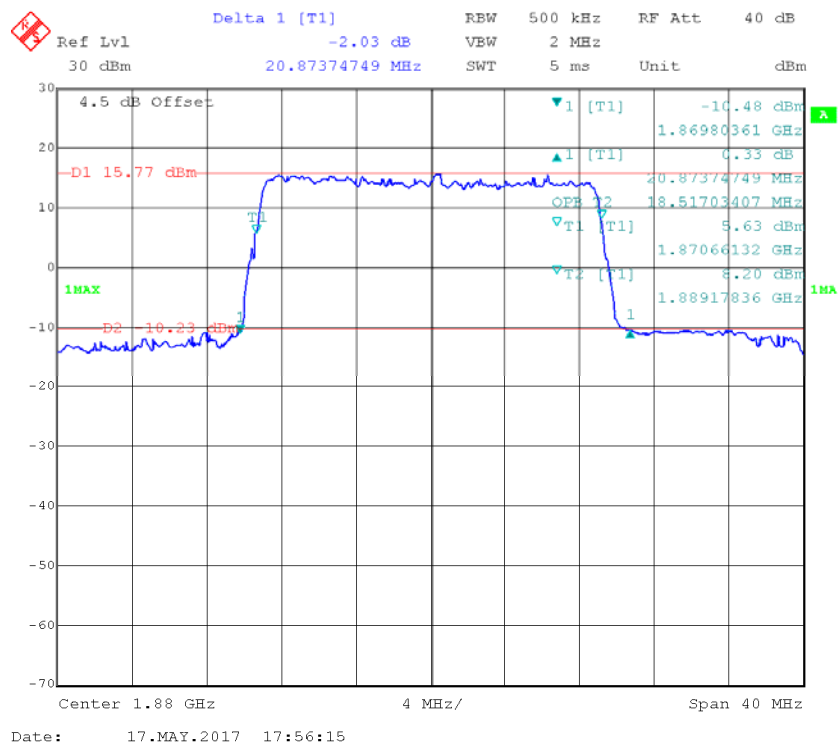


LTE Band IV:


QPSK_1.4 MHz

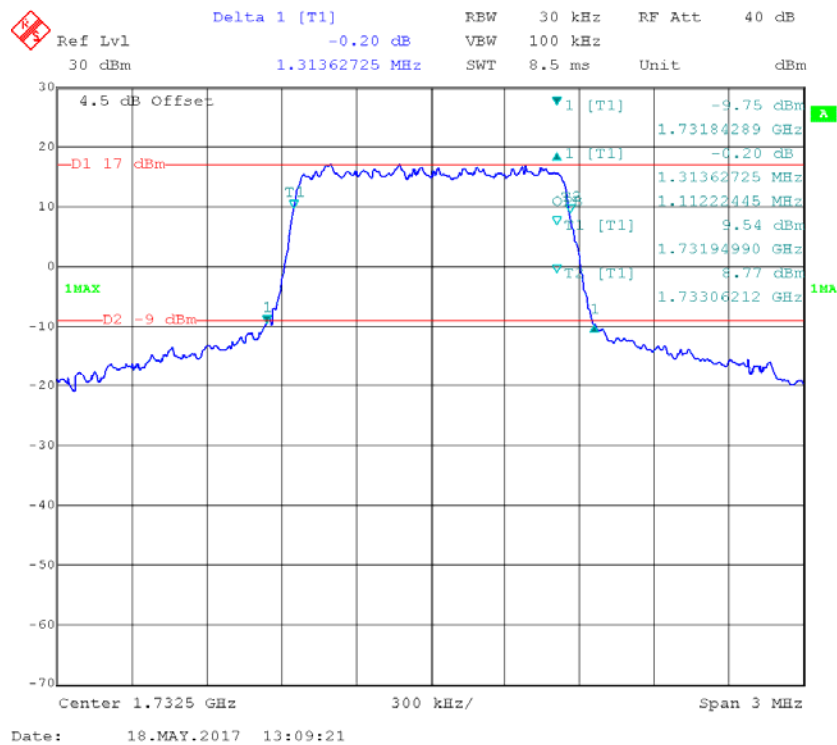


QPSK_3 MHz

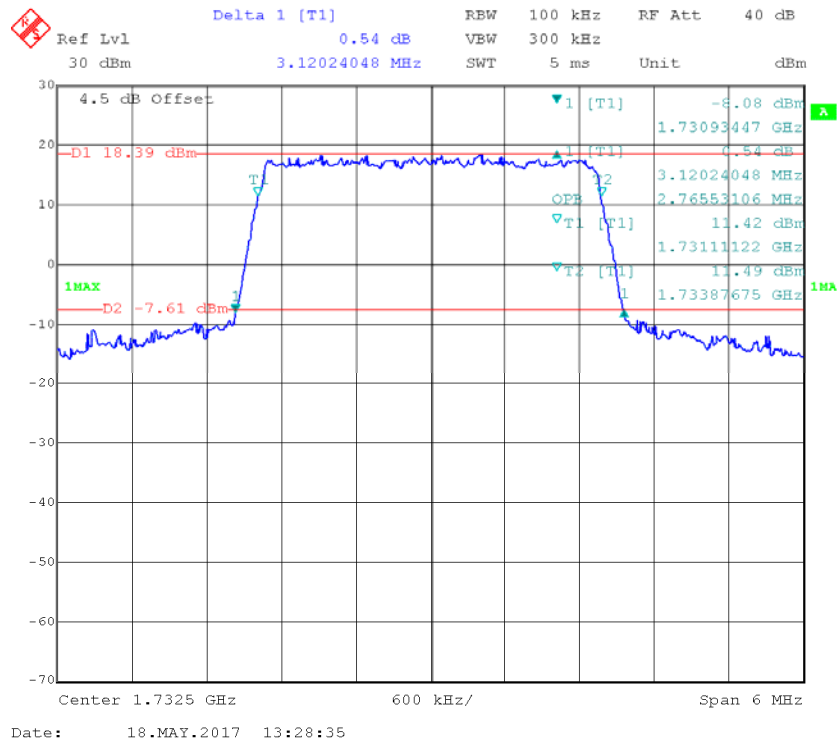


QPSK_5 MHz

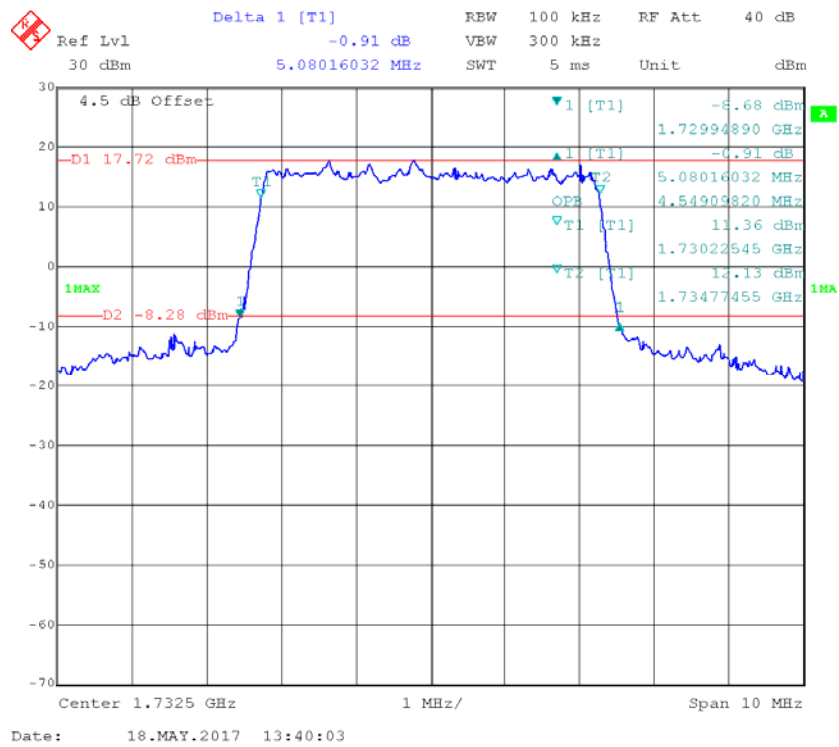


QPSK_10 MHz

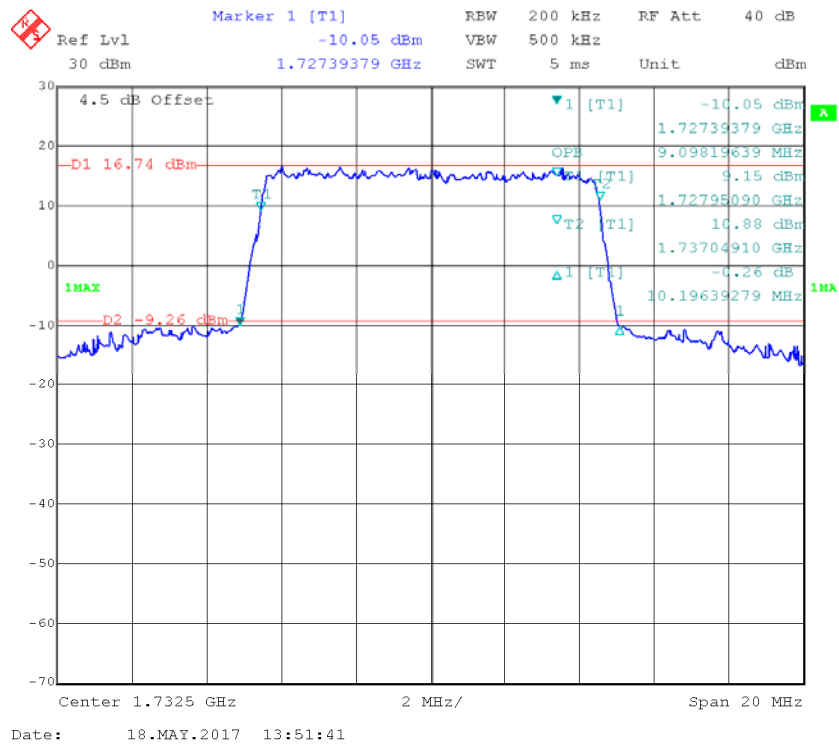


QPSK_15 MHz

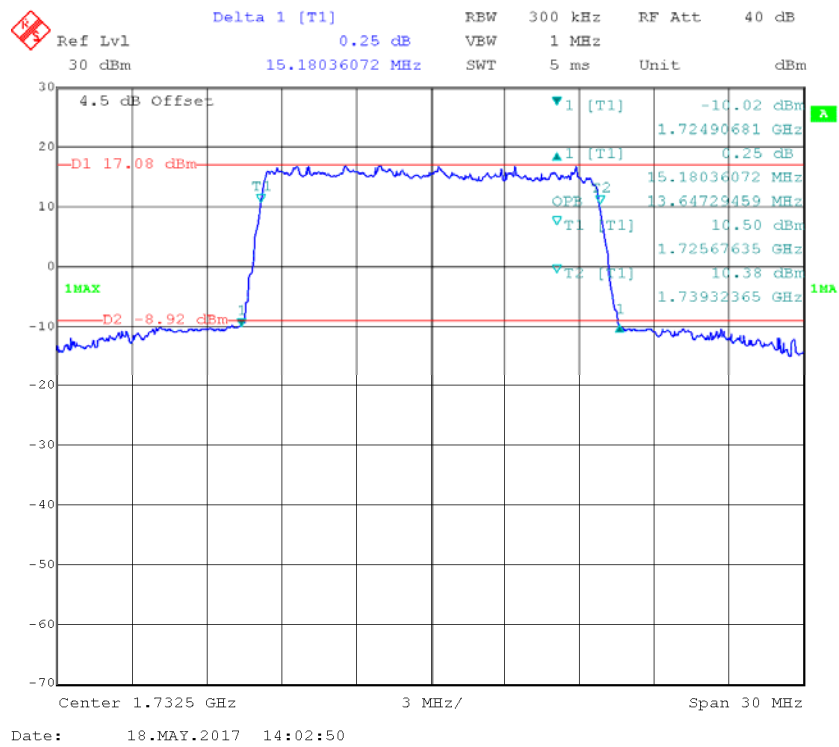


QPSK_20 MHz

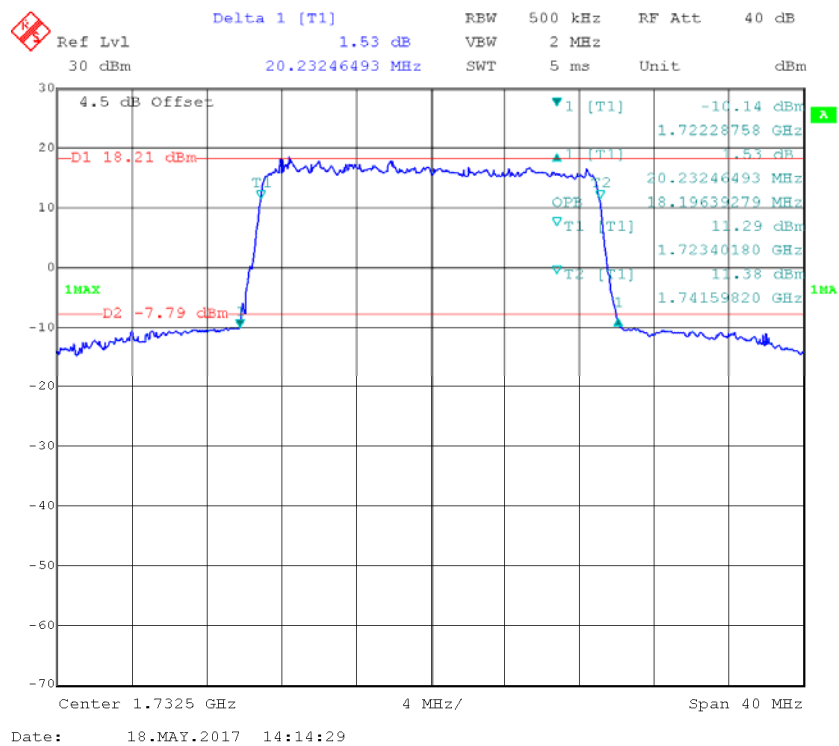


16-QAM_1.4 MHz

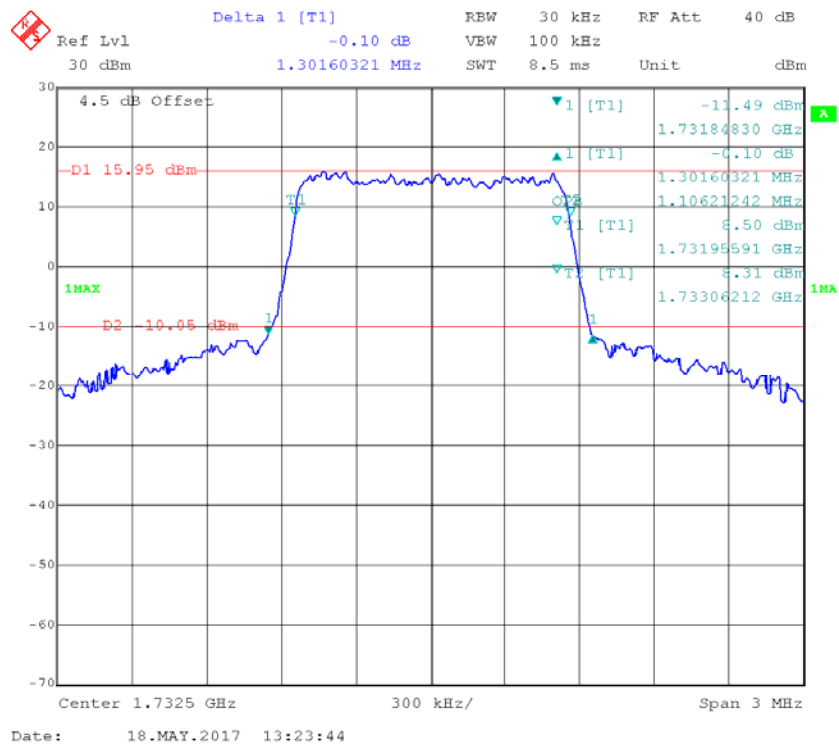


16-QAM_3 MHz

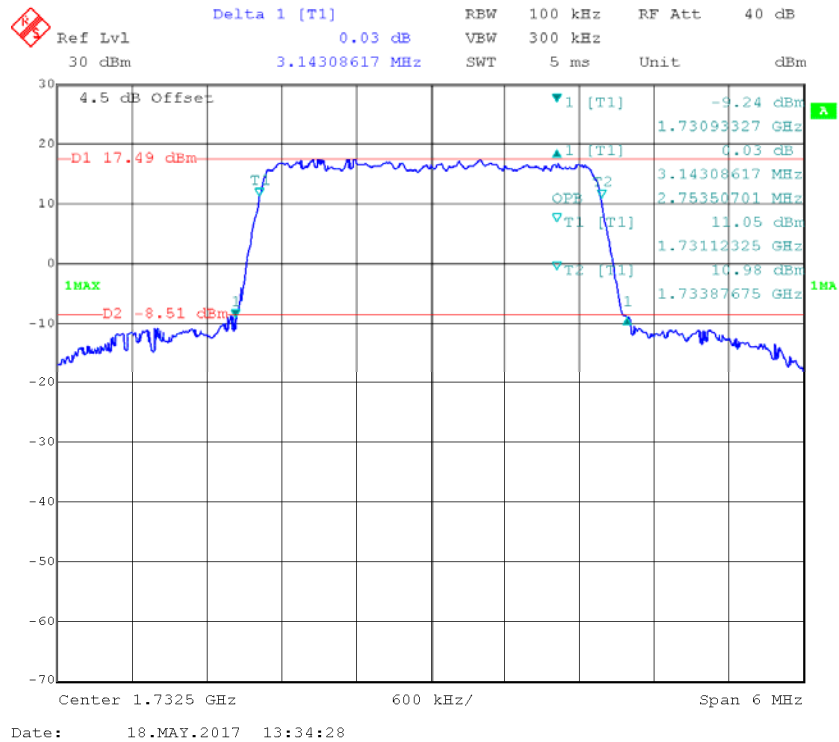


16-QAM_5 MHz

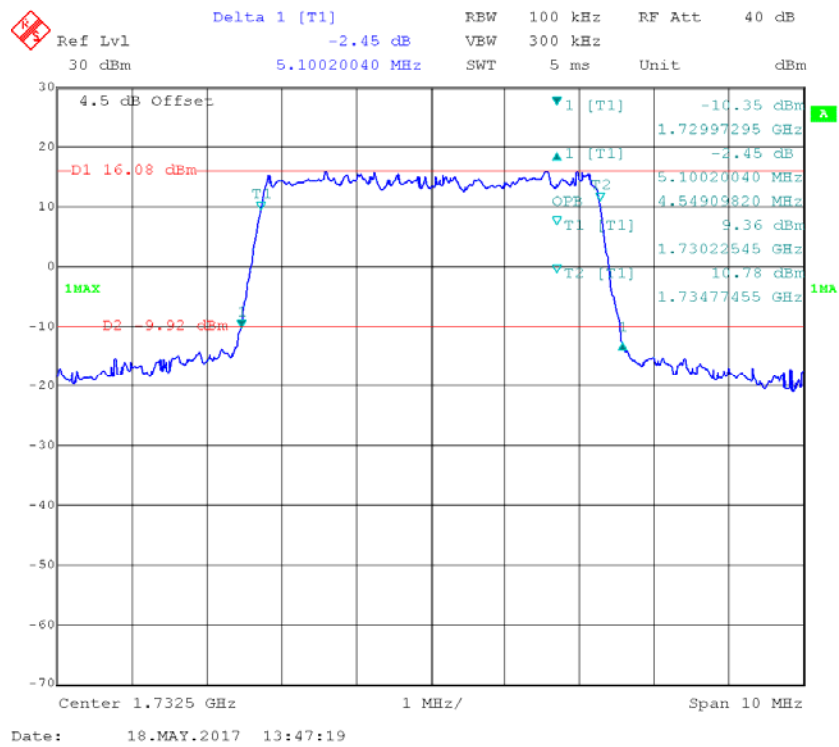


16-QAM_10 MHz

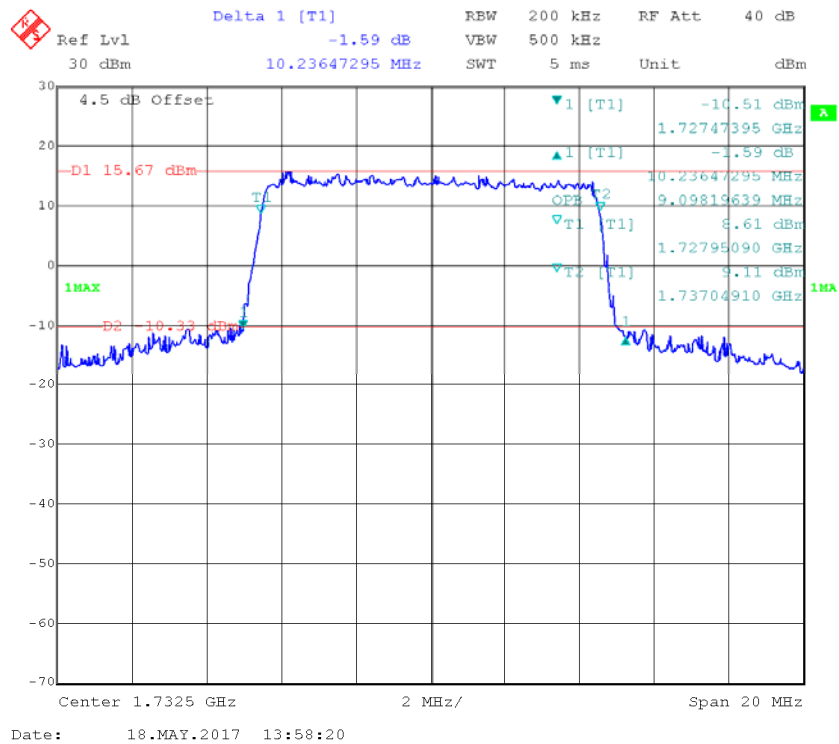

16-QAM_15 MHz

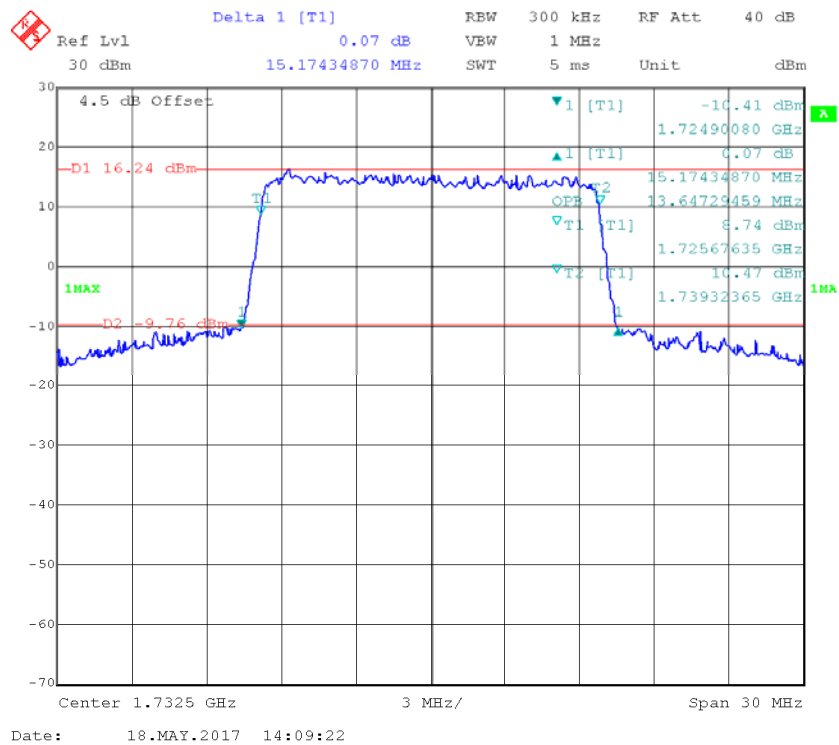


16-QAM_20 MHz

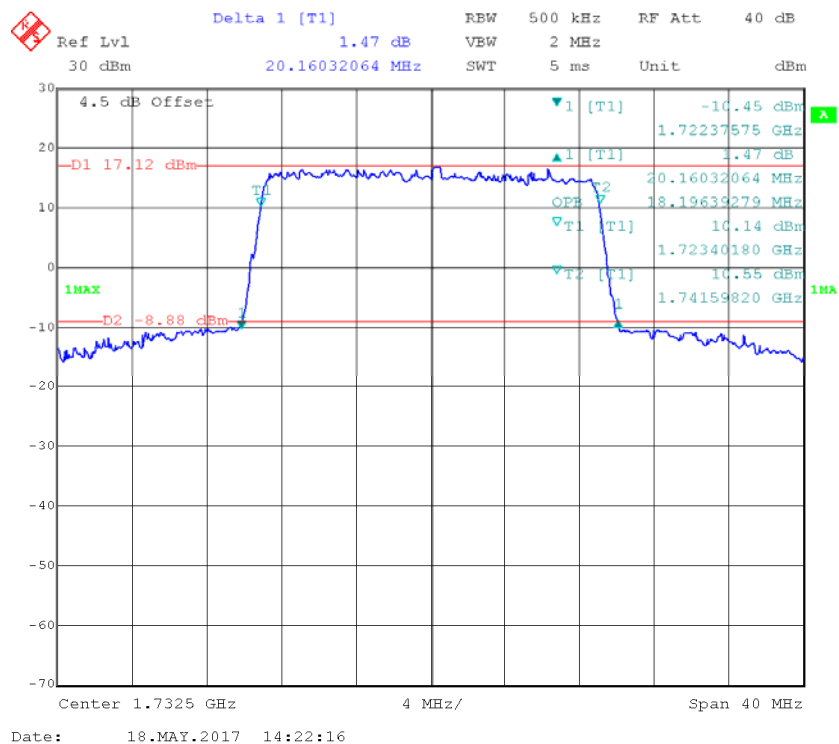


LTE Band V:


QPSK_1.4 MHz

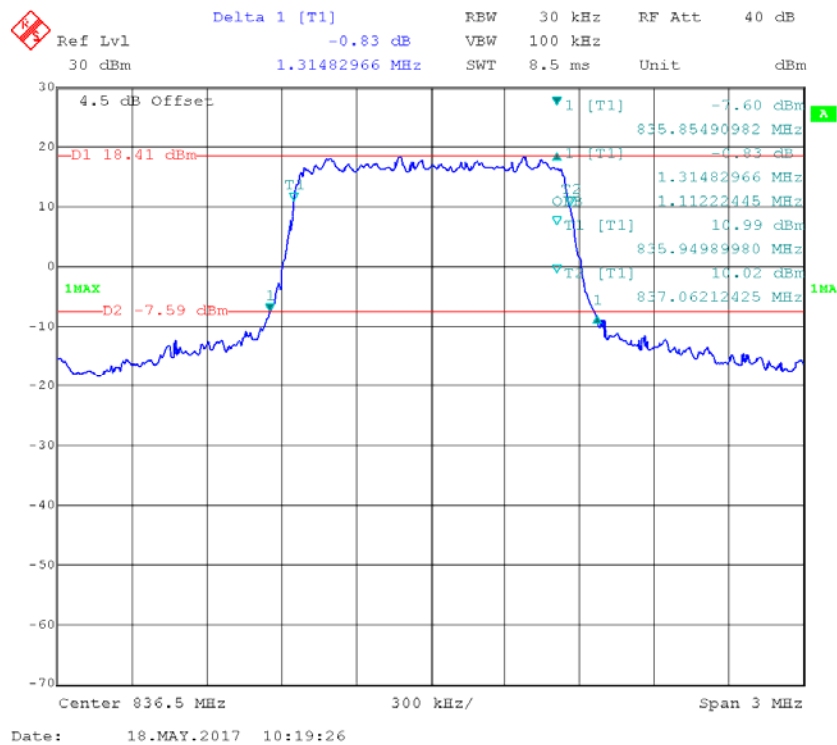


QPSK_3 MHz

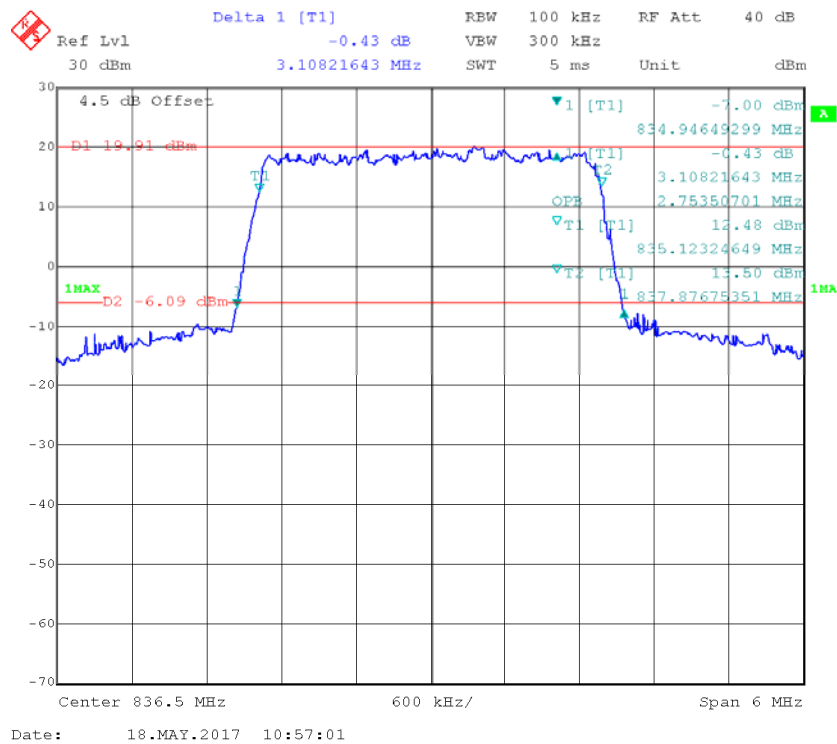


QPSK_5 MHz

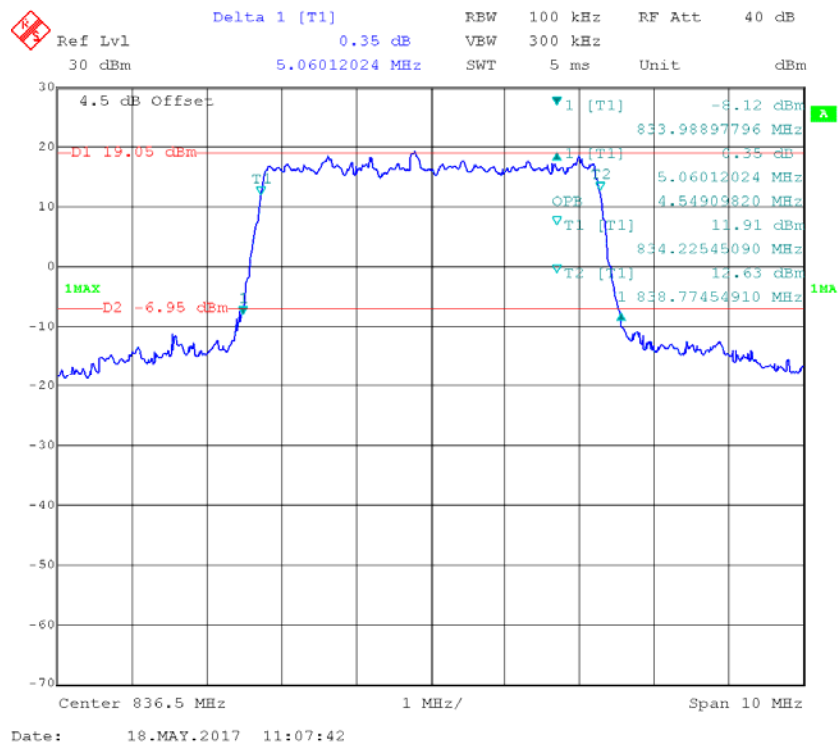


QPSK_10 MHz

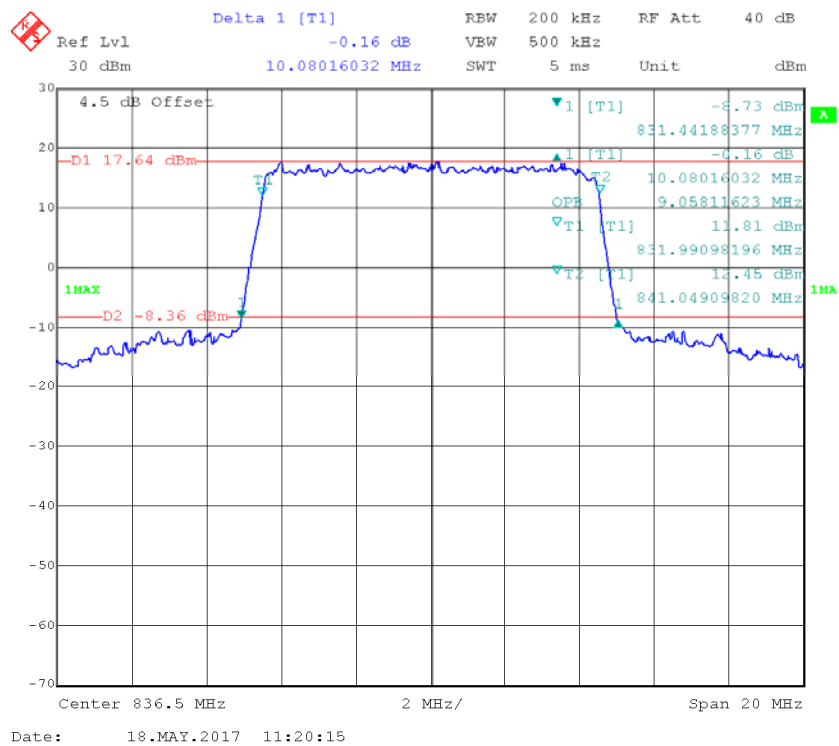


16-QAM_1.4 MHz

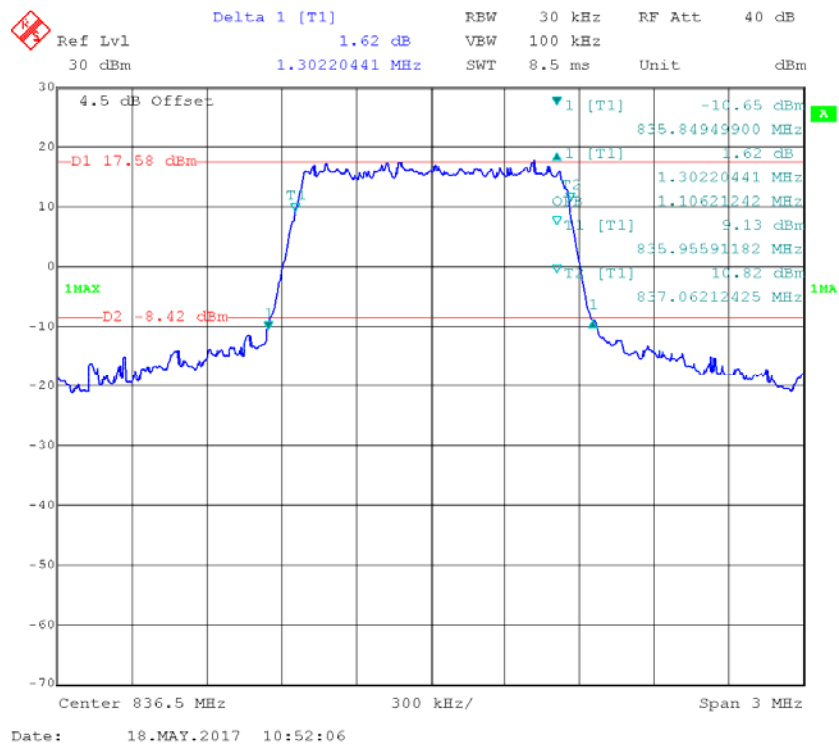


16-QAM_3 MHz

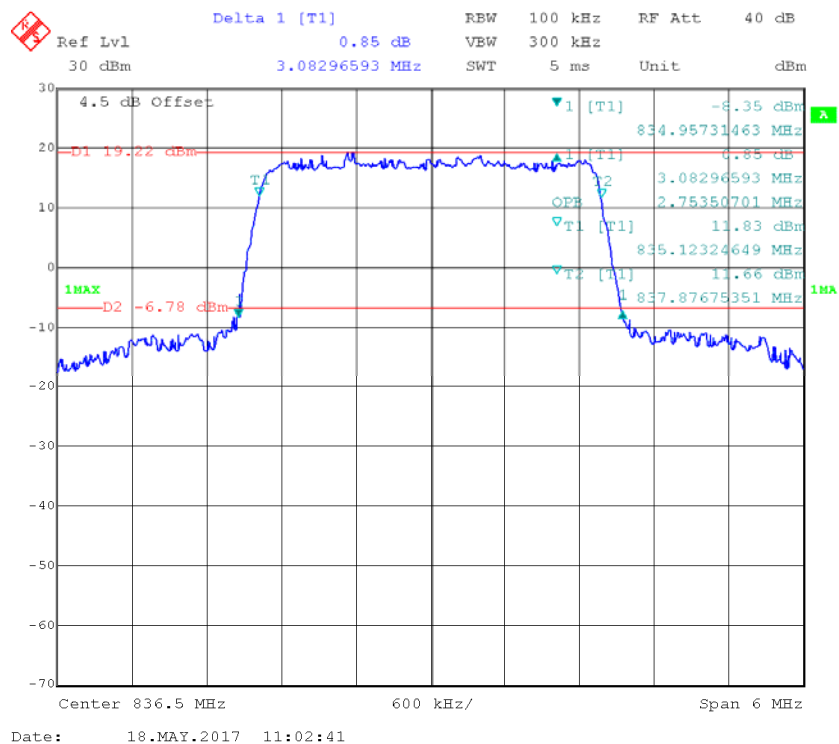

16-QAM_5 MHz

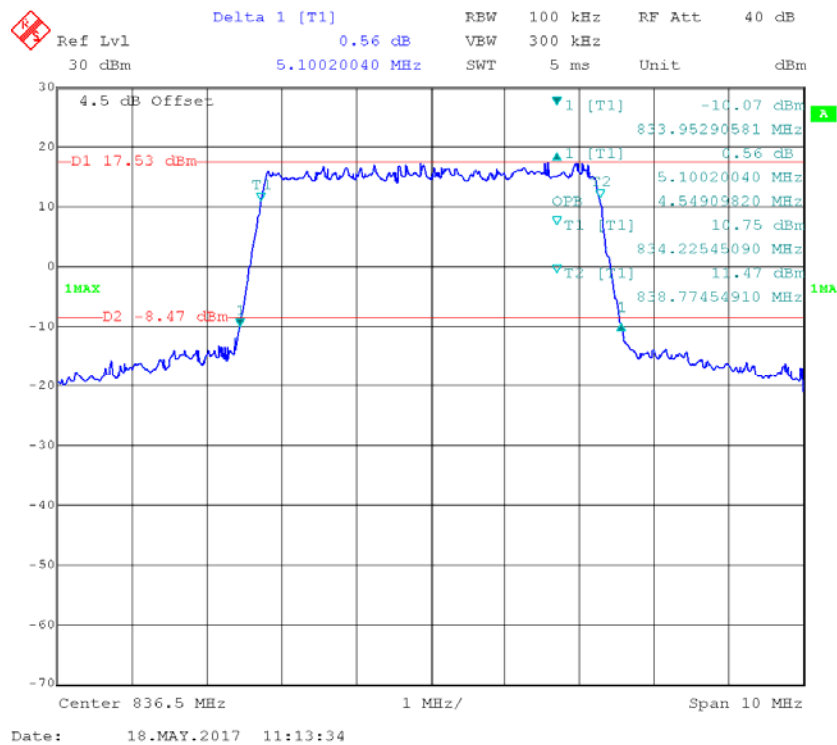


16-QAM_10 MHz

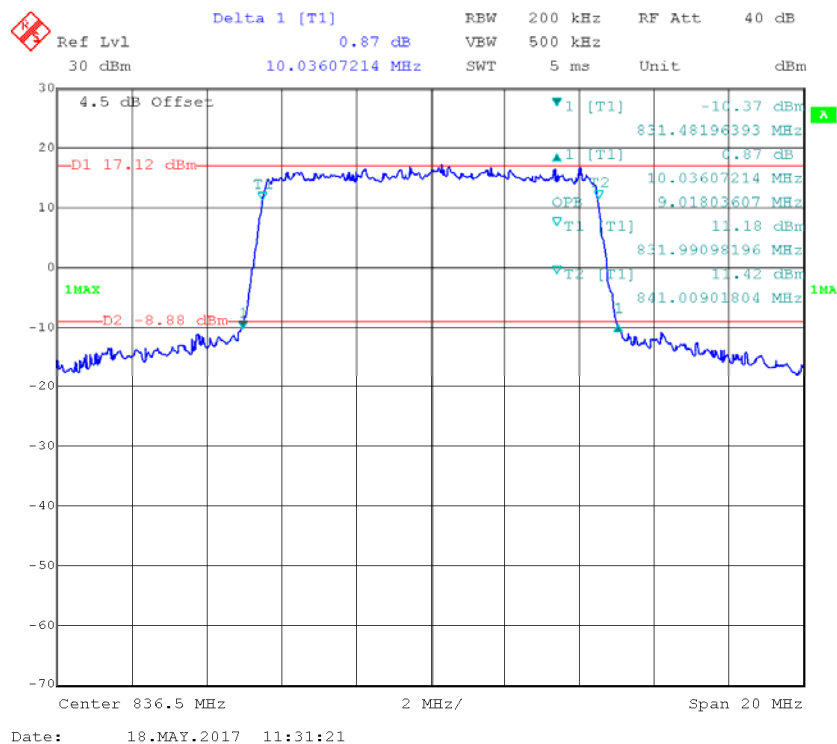


LTE Band VII:


QPSK_5 MHz

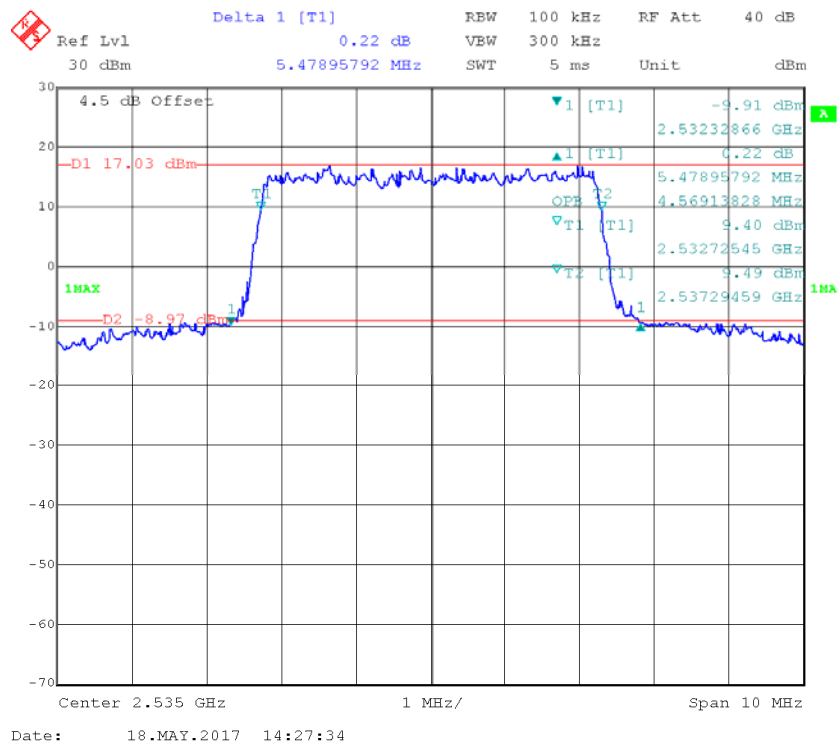


QPSK_10 MHz

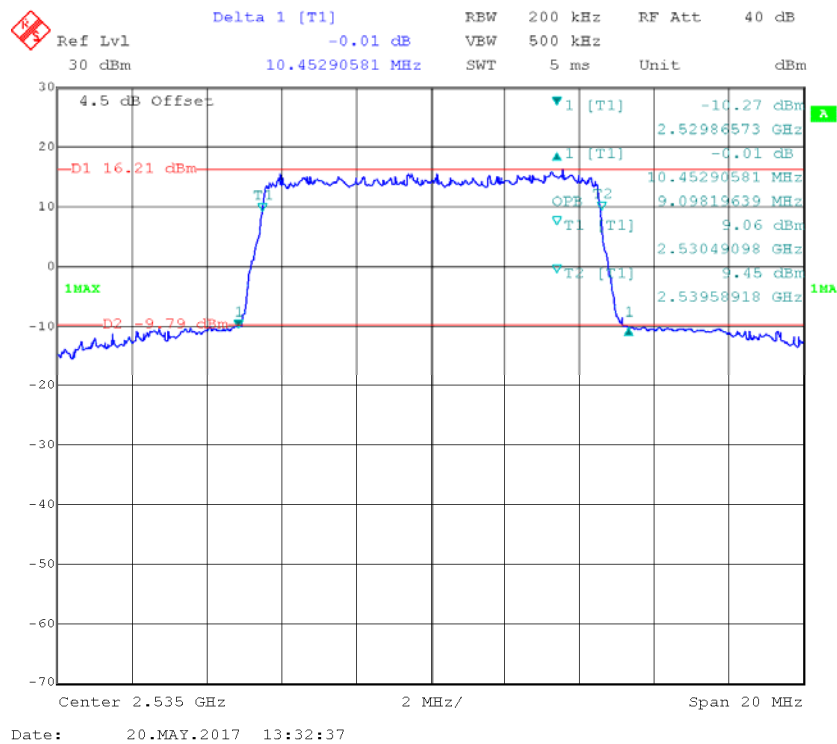


QPSK_15 MHz

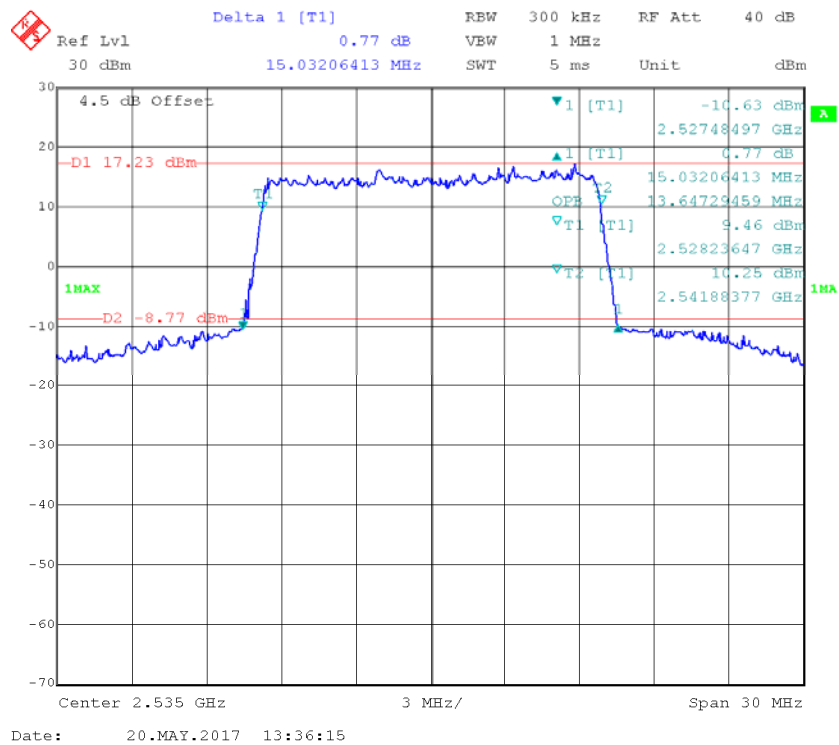


QPSK_20 MHz

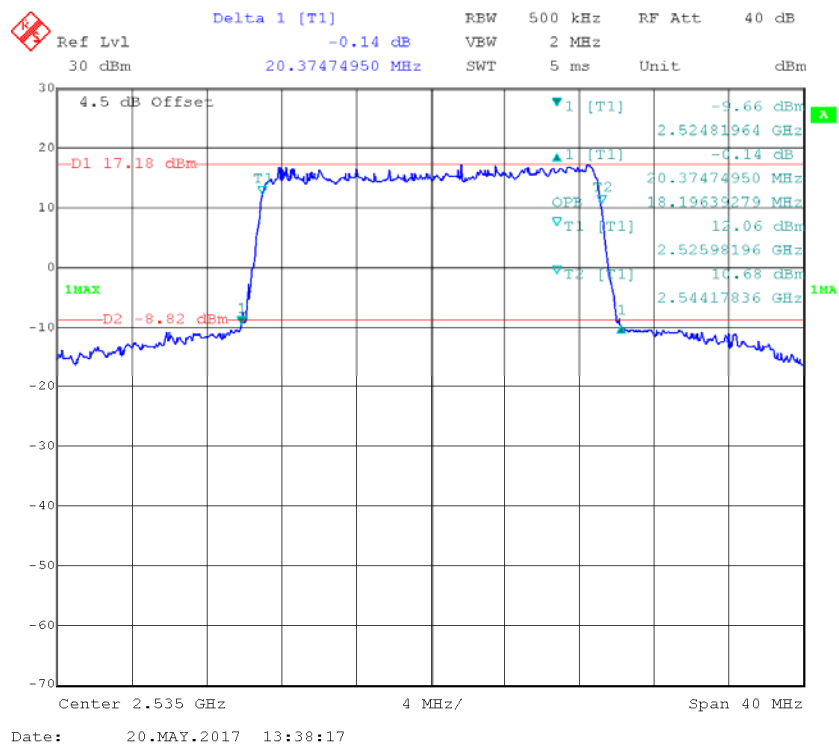


16-QAM_5 MHz

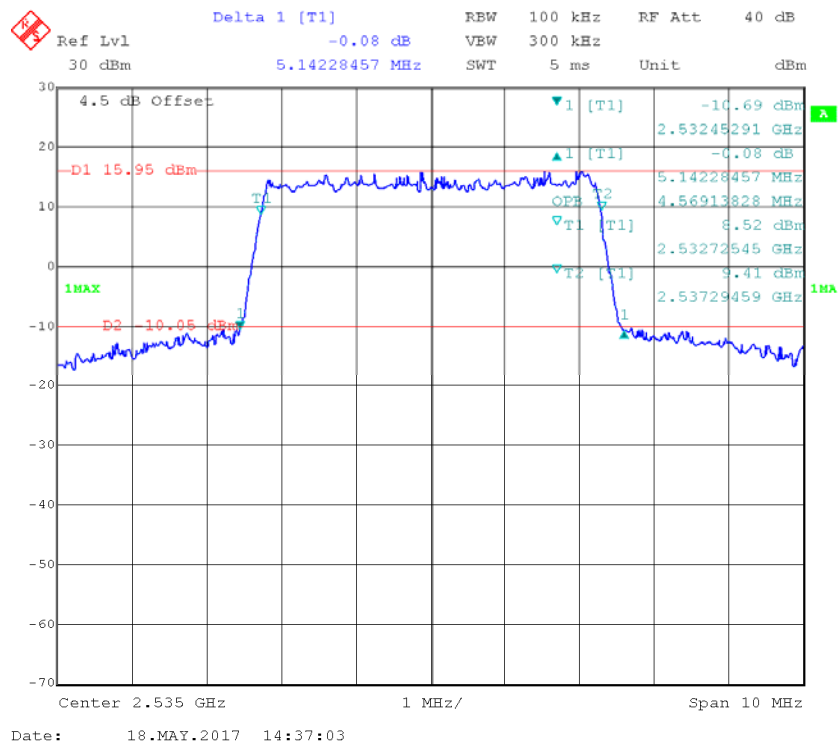


16-QAM_10 MHz

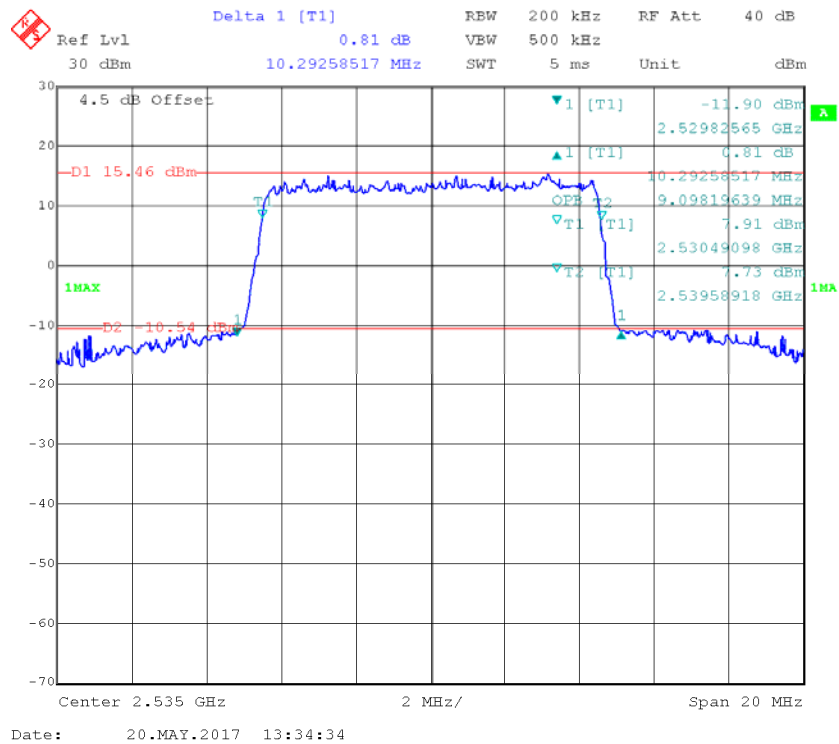

16-QAM_15 MHz

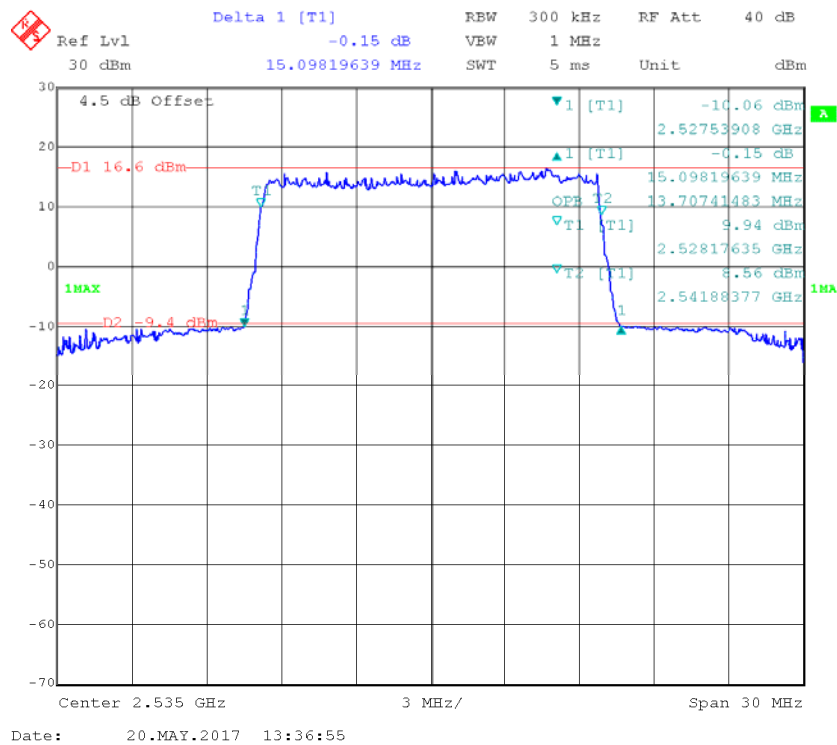


16-QAM_20 MHz

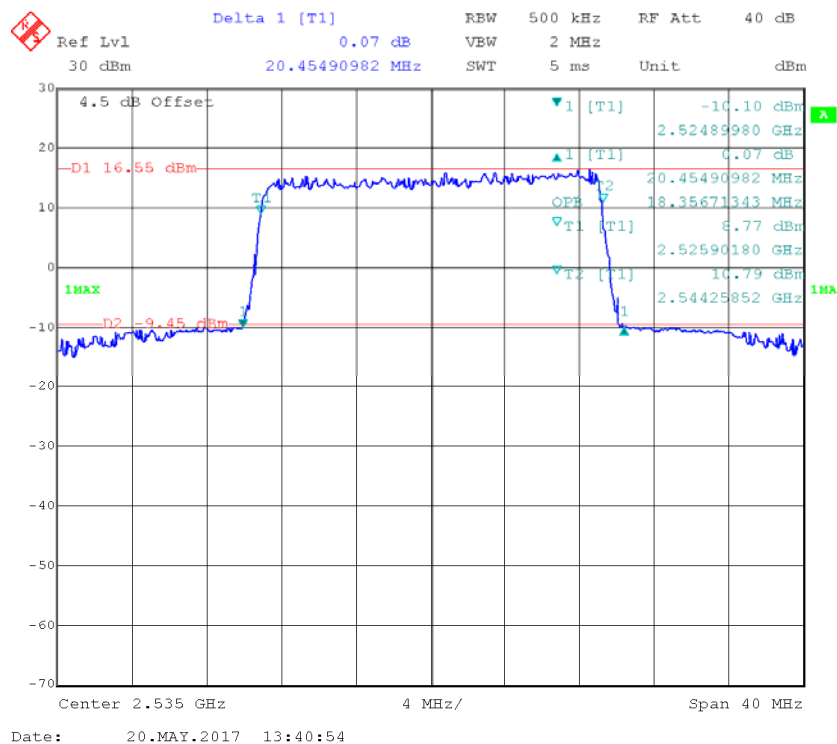


LTE Band 17:


QPSK_5 MHz

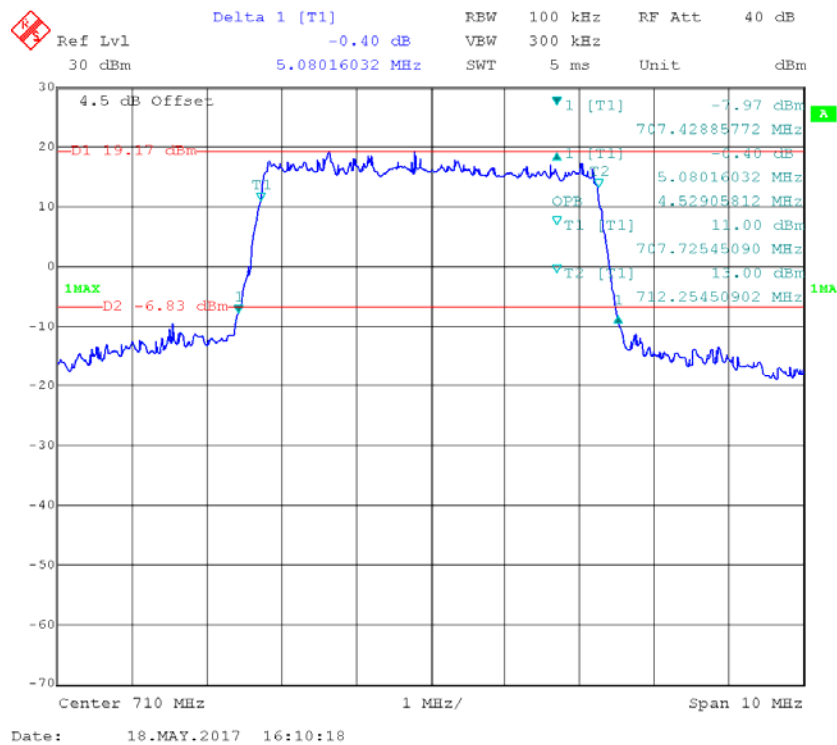


QPSK_10 MHz

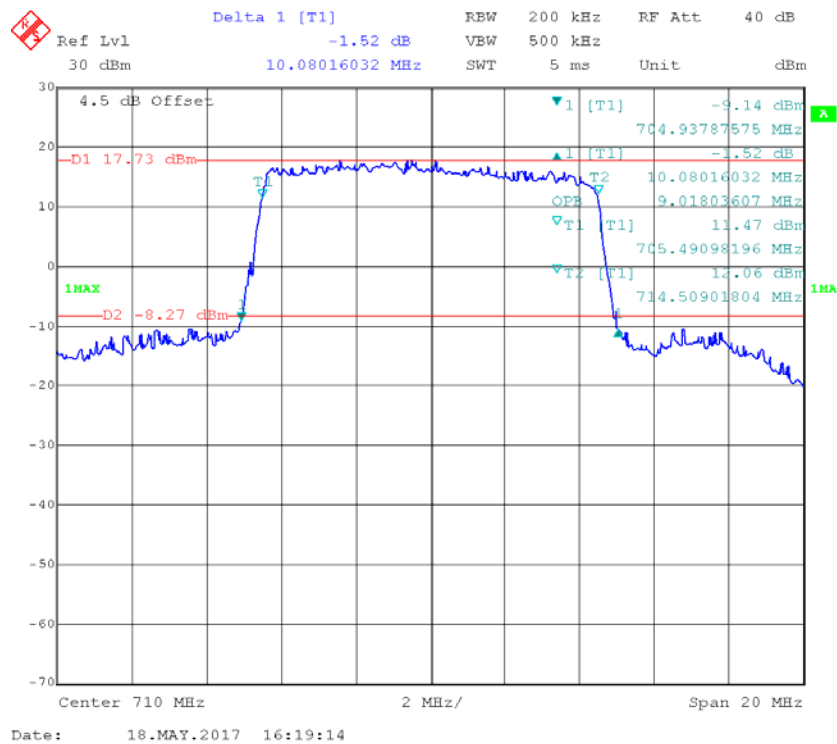

16-QAM_5 MHz

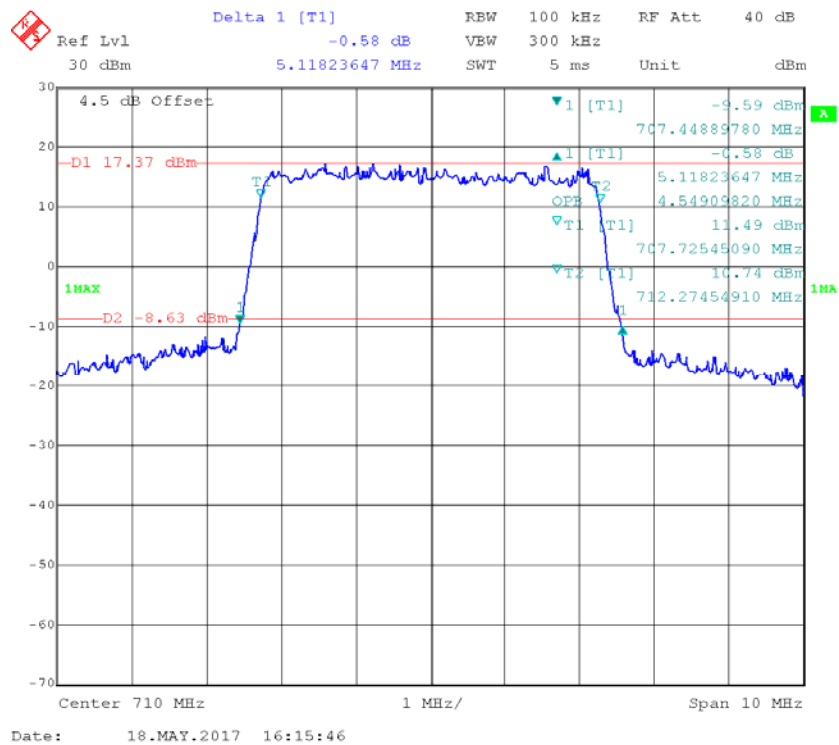

16-QAM_10 MHz

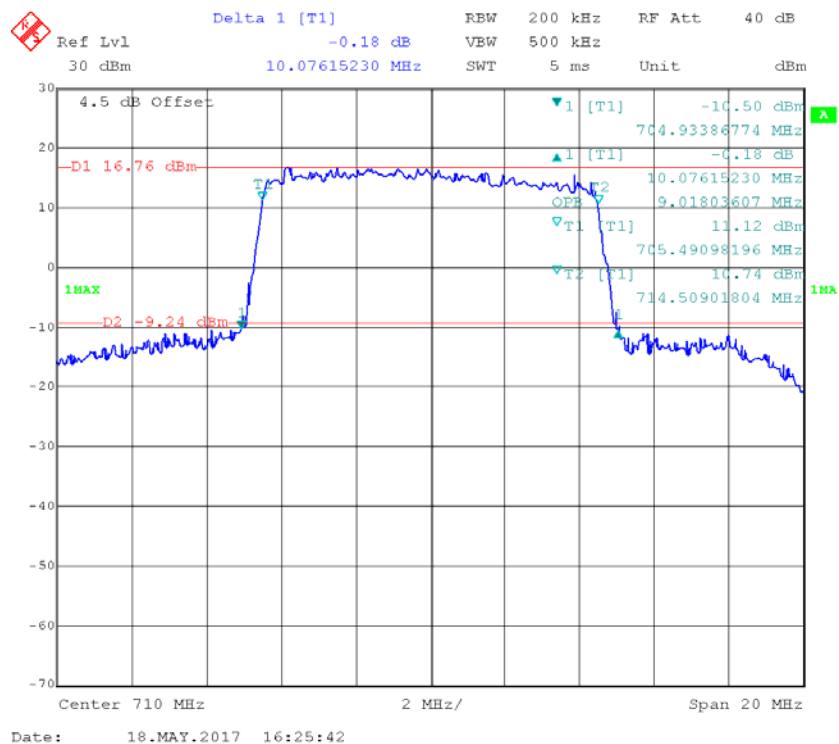

FCC §2.1051, §22.917(a) & §24.238(a) & §27.53- SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a) and §27.53.

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

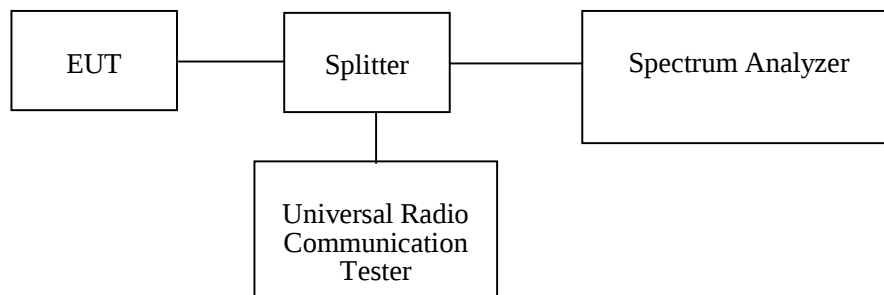

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
Unknown	RF Cable	Unknown	NO.3	Each Time	/
Unknown	Two-way Splitter	Unknown	OE0120121	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Data



Environmental Conditions

Temperature:	21.6~23 °C
Relative Humidity:	59~60 %
ATM Pressure:	97.5~97.8 kPa


The testing was performed by Lorin Bian from 2017-05-17 to 2017-05-20.

Please refer to the following plots.


GSM850_Middle Channel

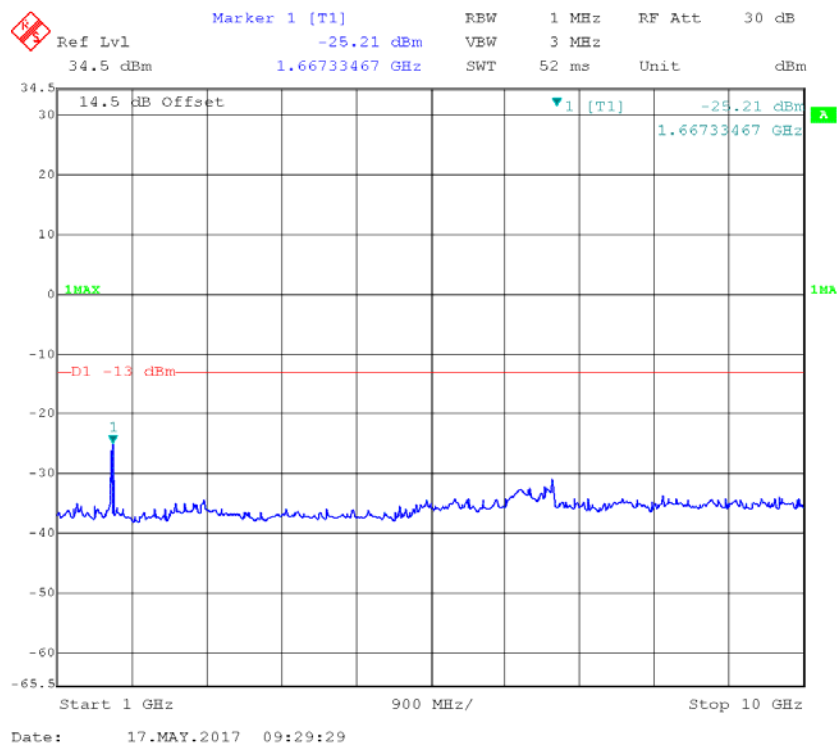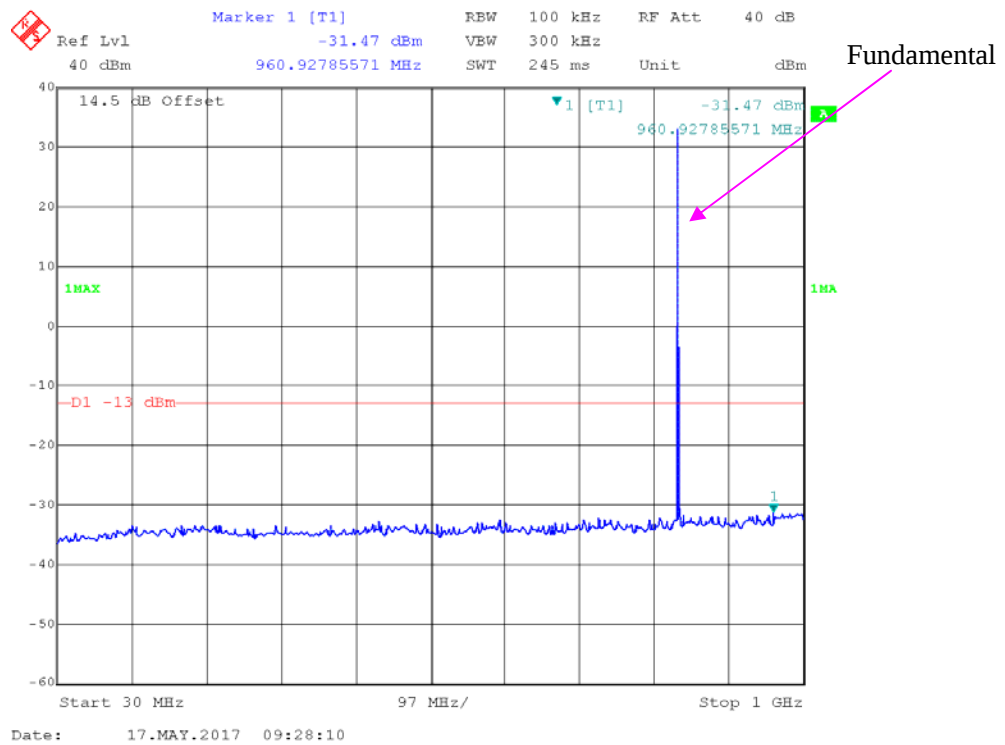



PCS 1900_ Middle Channel

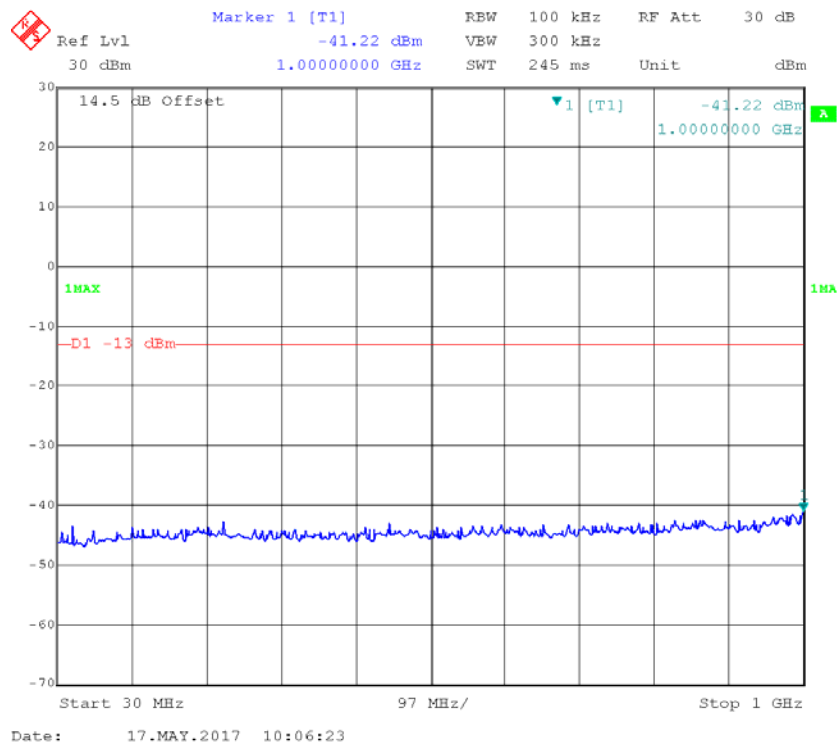


Fundamental

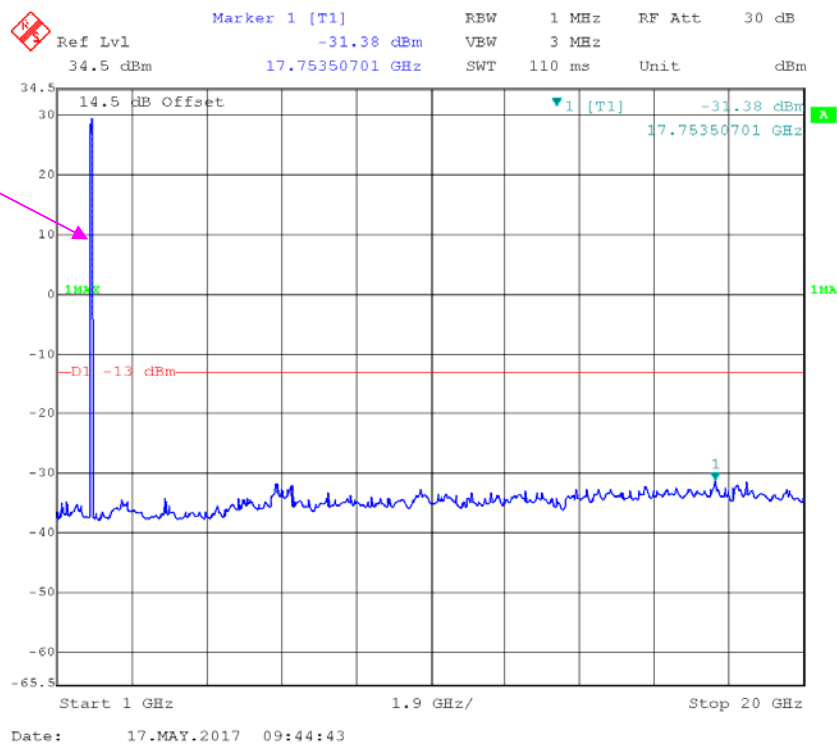


EDGE850_Middle Channel

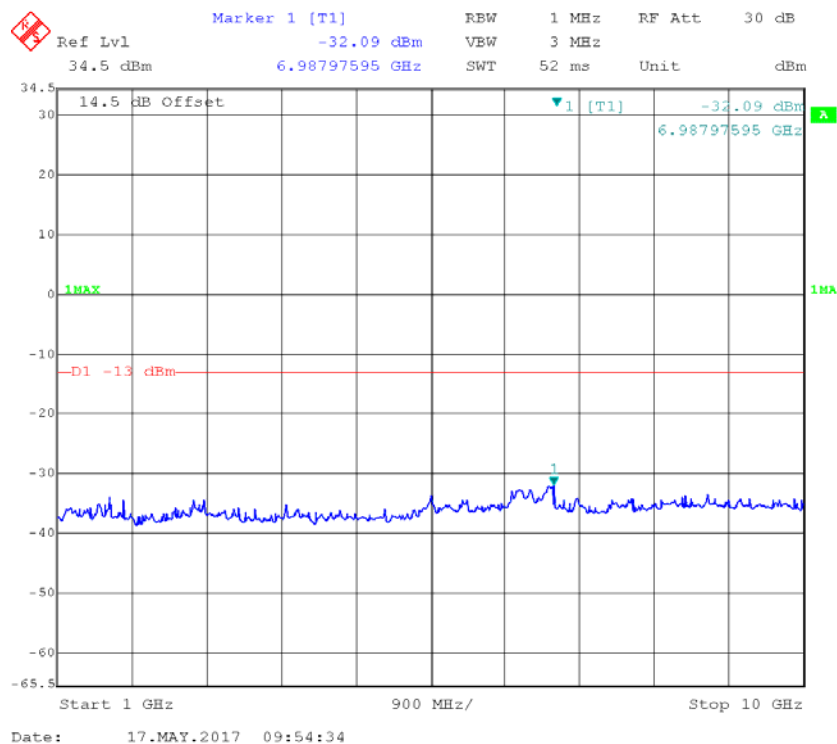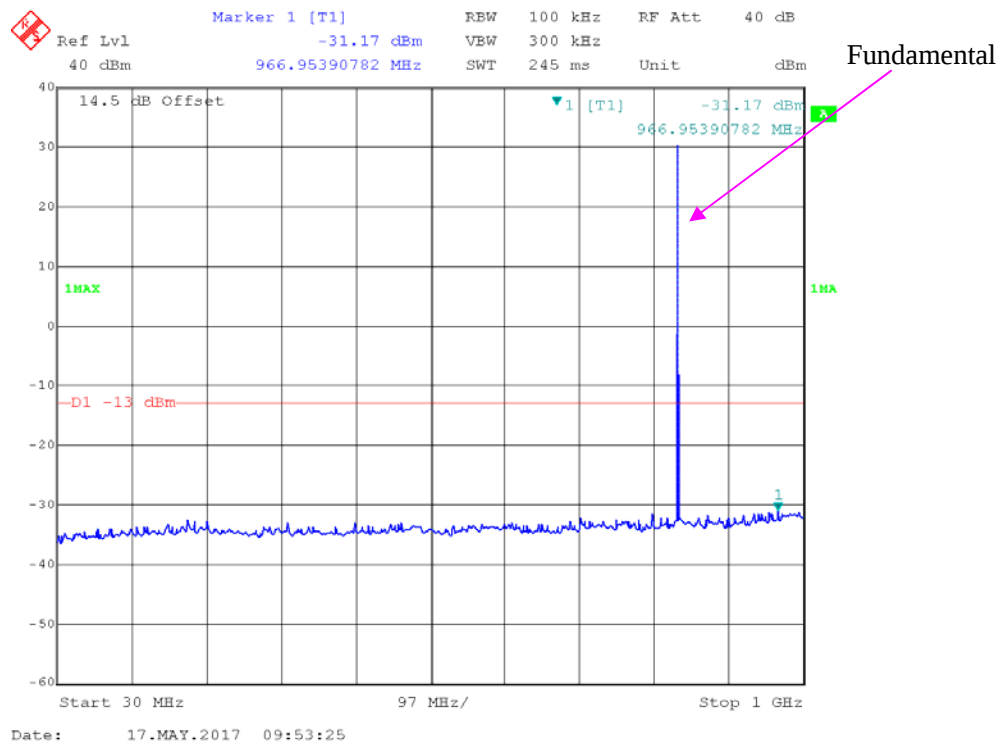


EDGE 1900_ Middle Channel

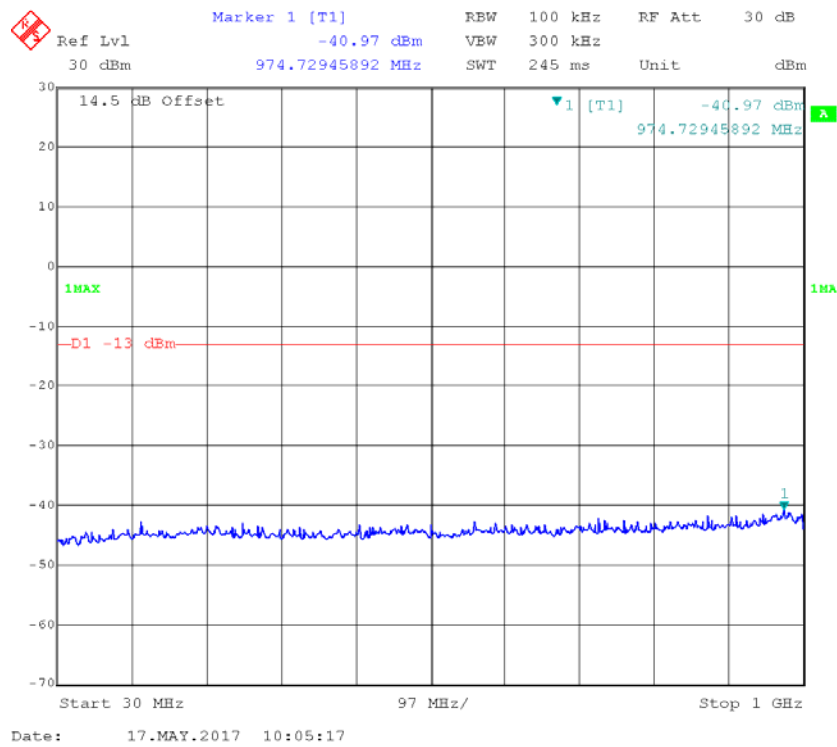


Fundamental

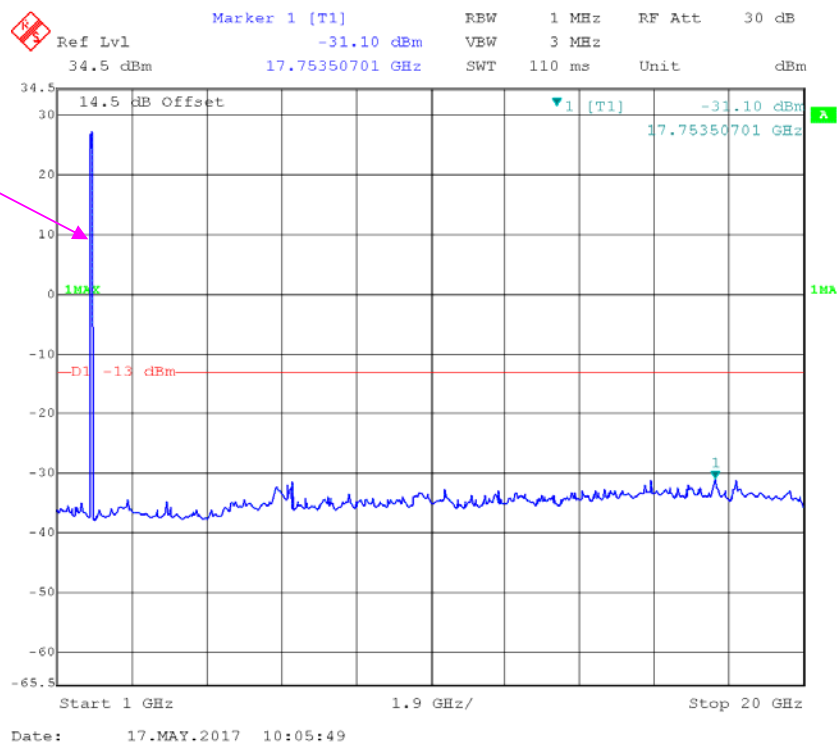



REL99 Band II_ Middle Channel

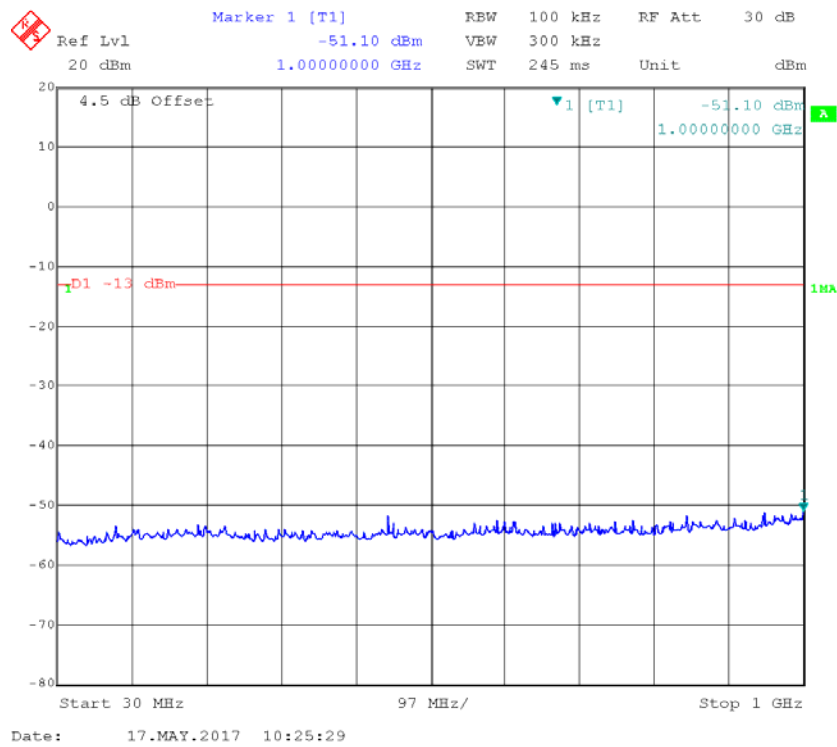

Fundamental

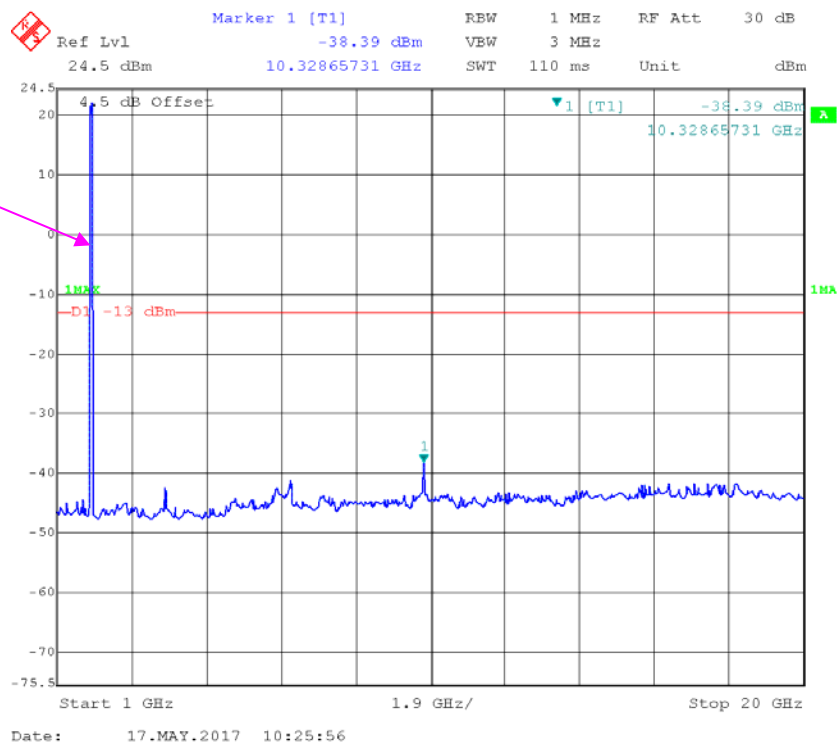


REL99 Band V_ Middle Channel

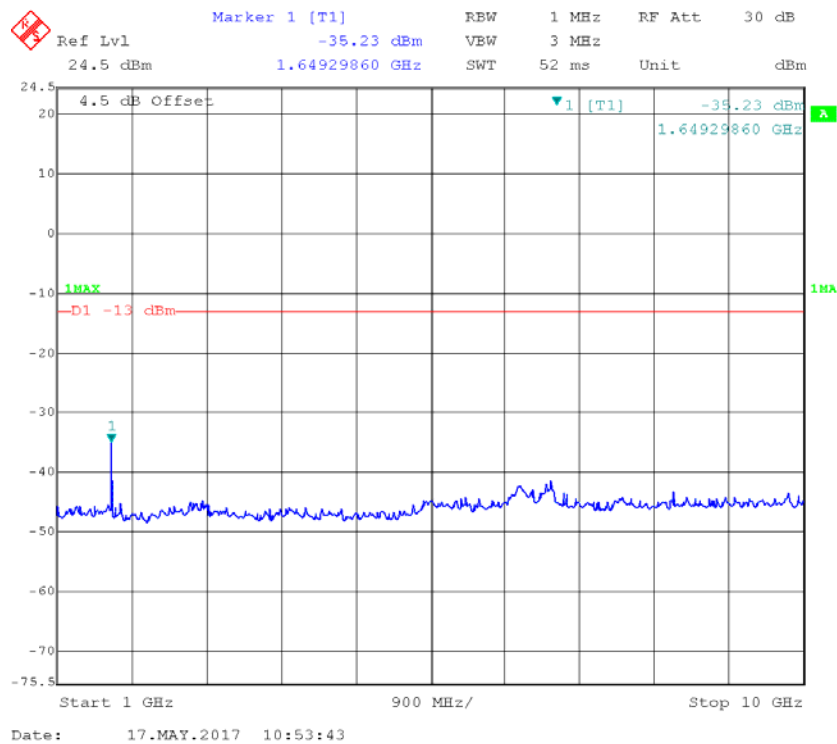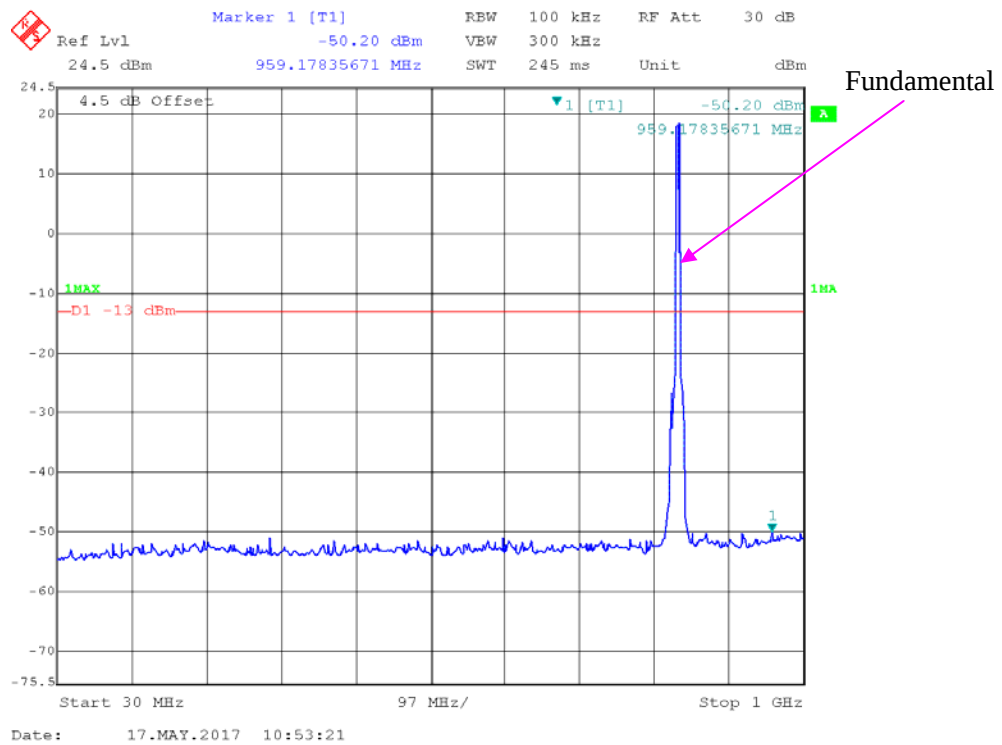




LTE Band II (Middle Channel)

QPSK_1.4 MHz

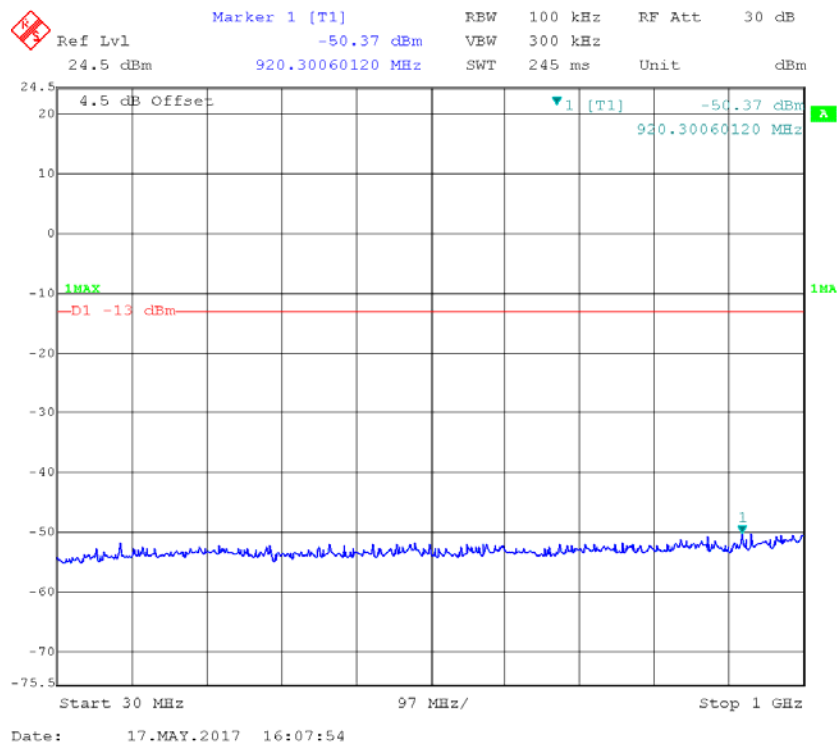


Fundamental

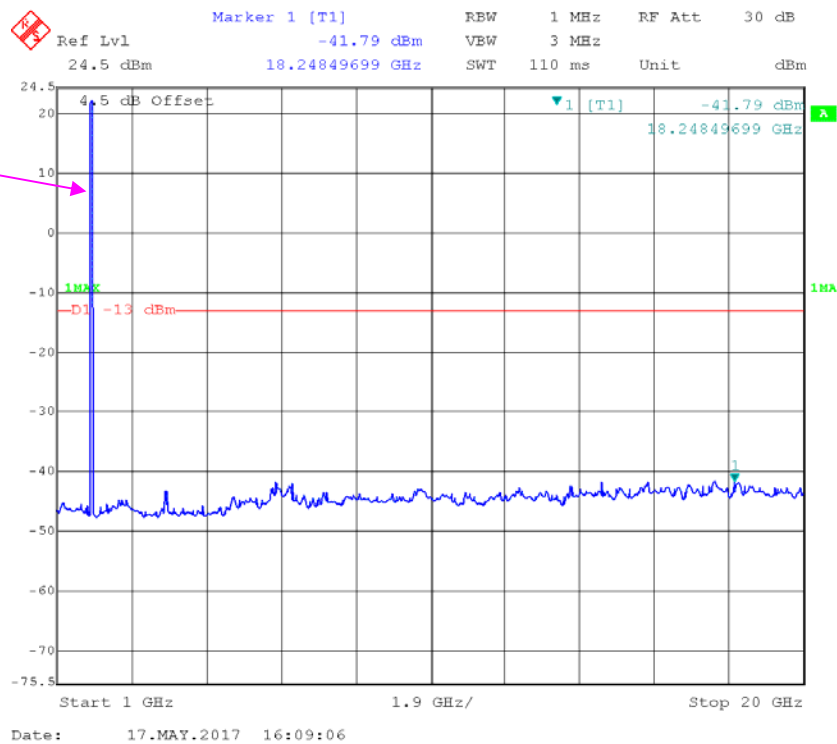


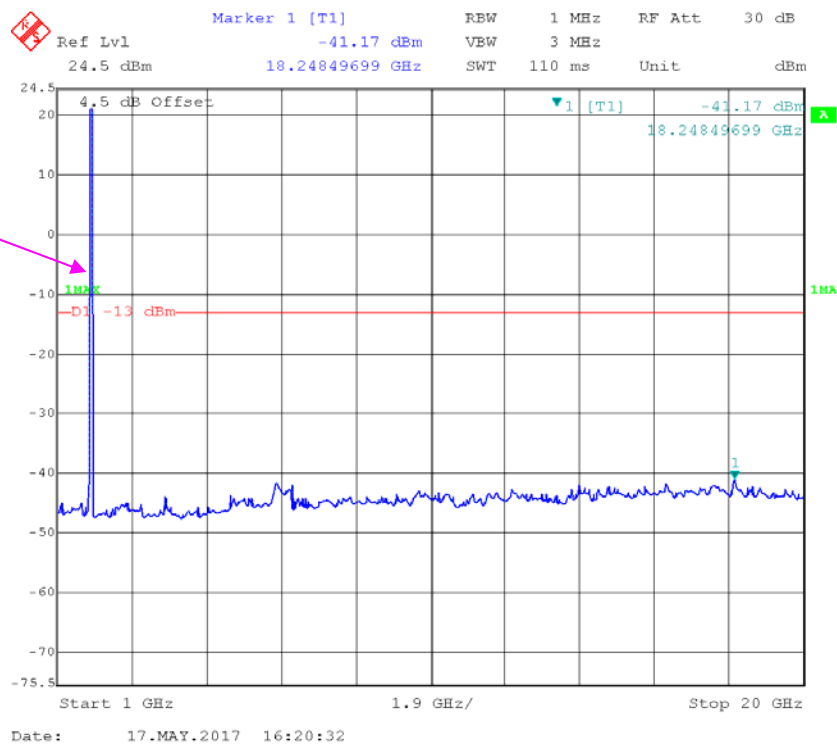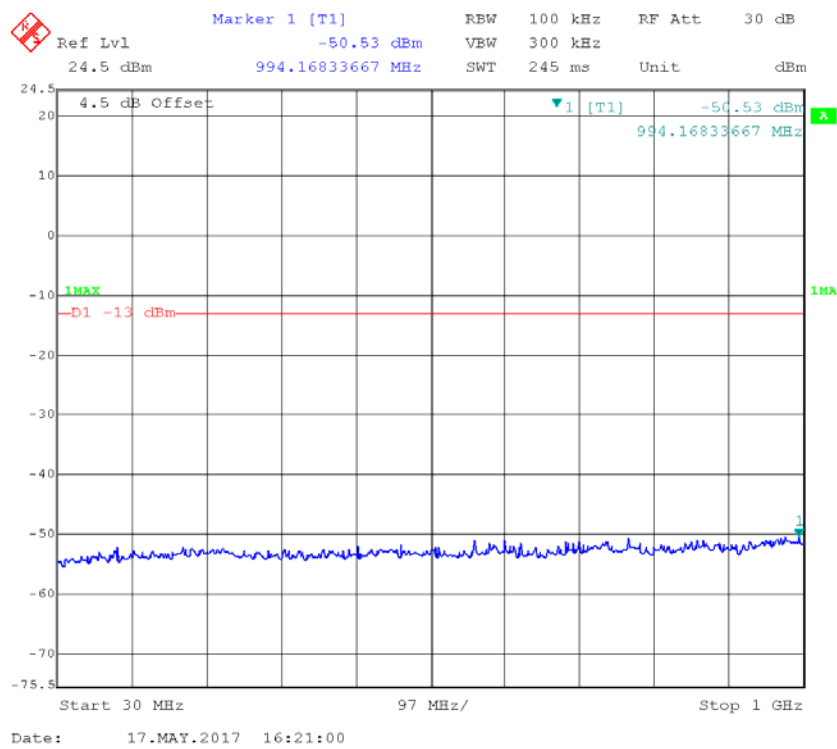


QPSK_5 MHz

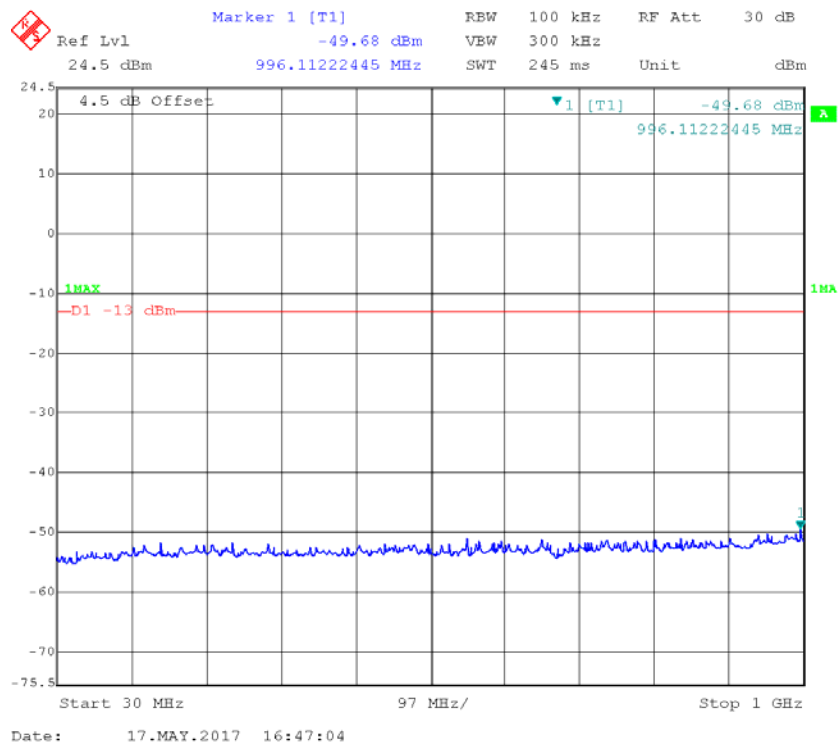


Fundamental

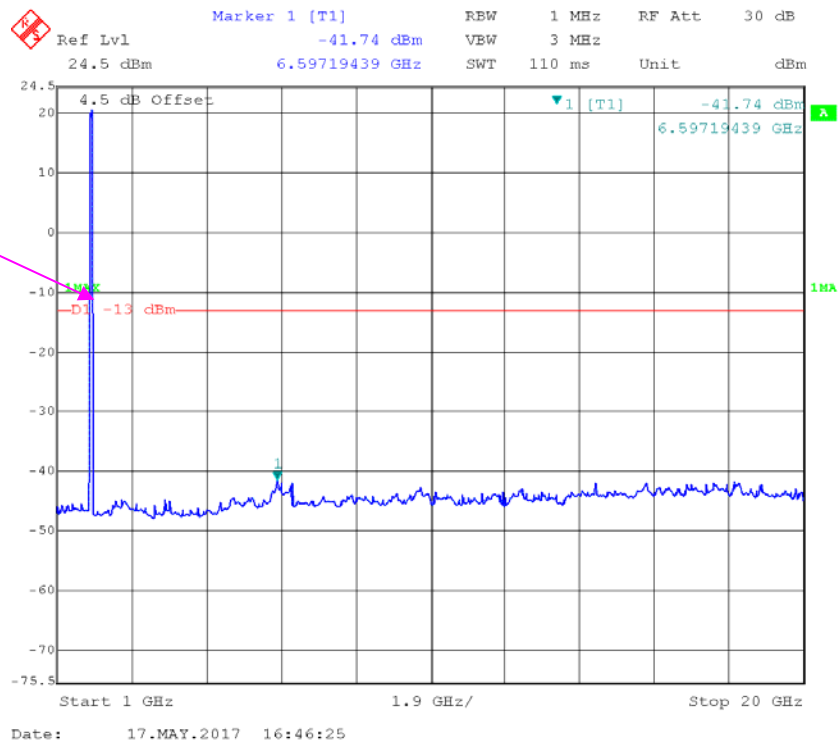


QPSK_10 MHz

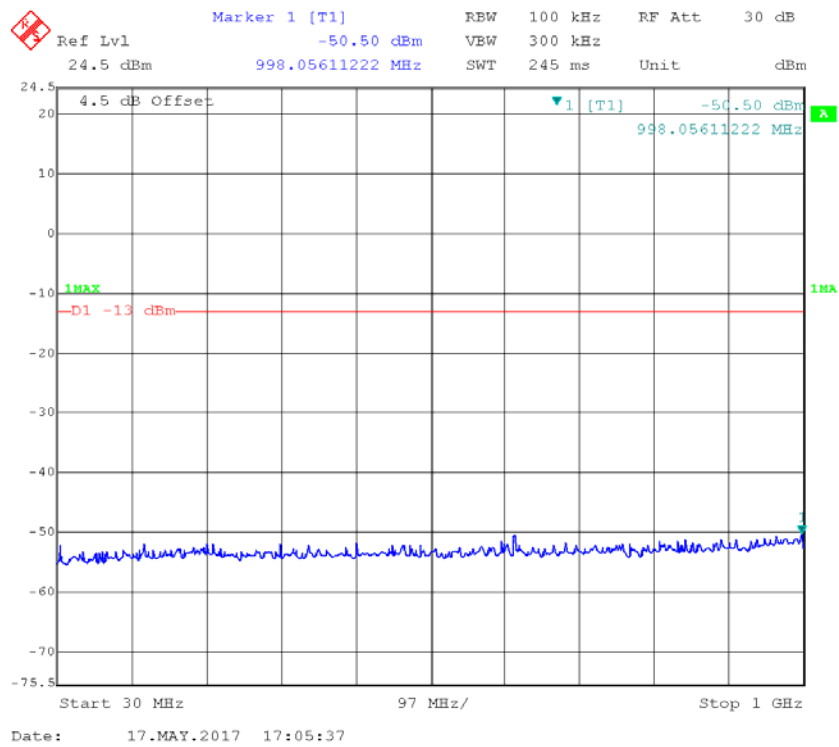


Fundamental

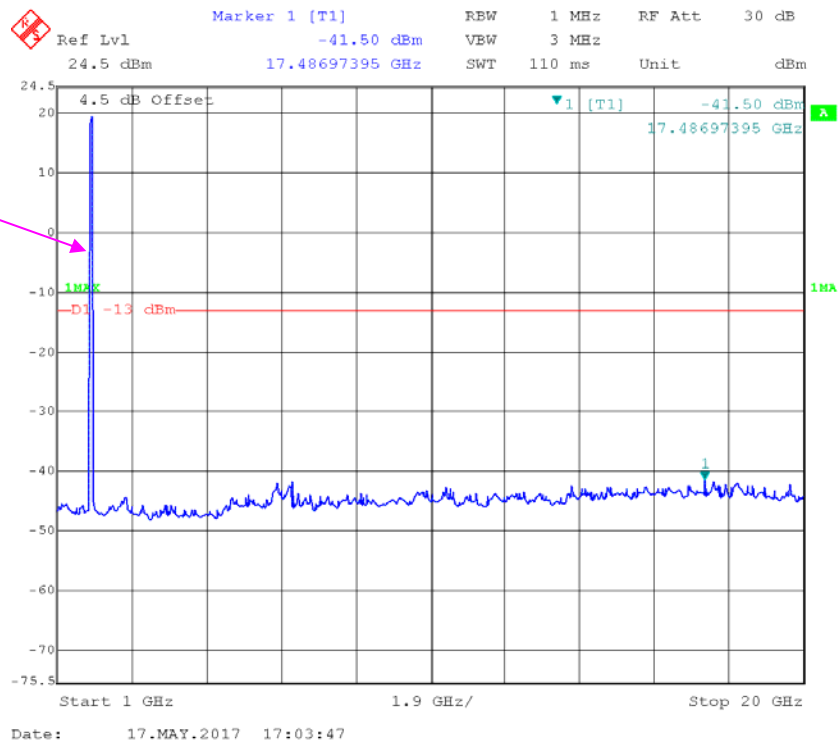


QPSK_15 MHz

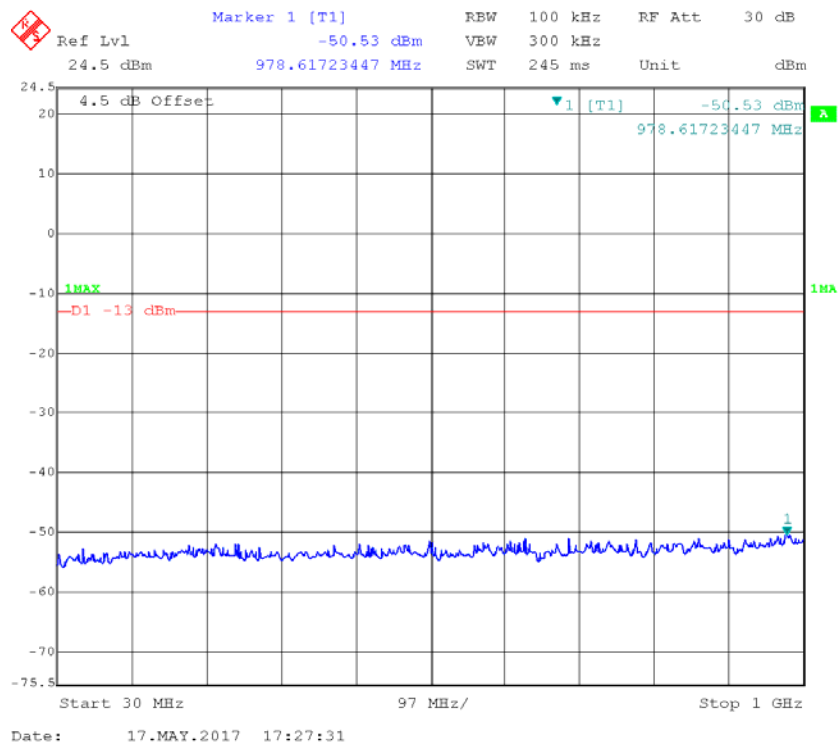


Fundamental

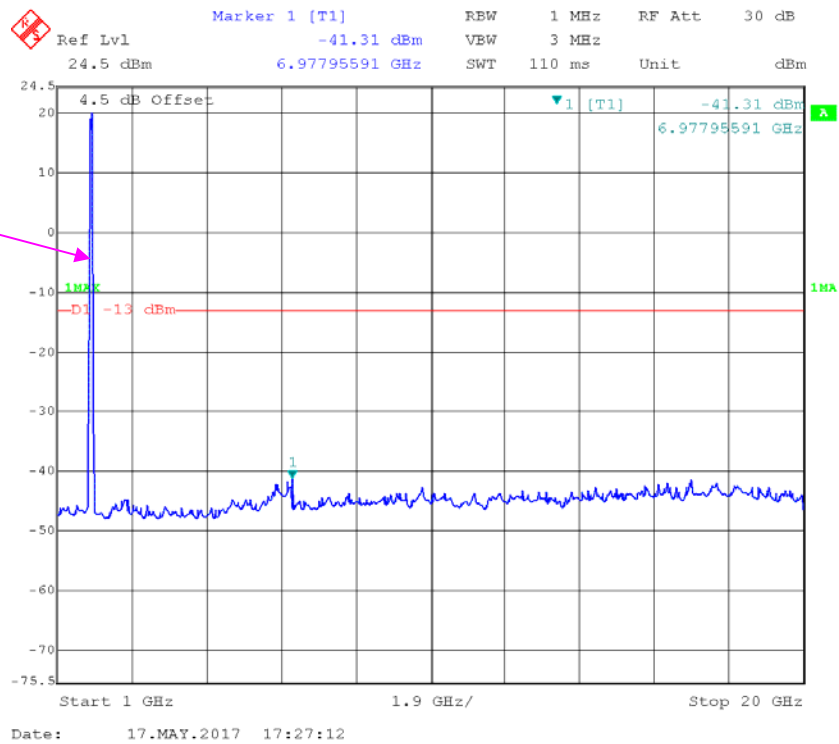

QPSK_20 MHz

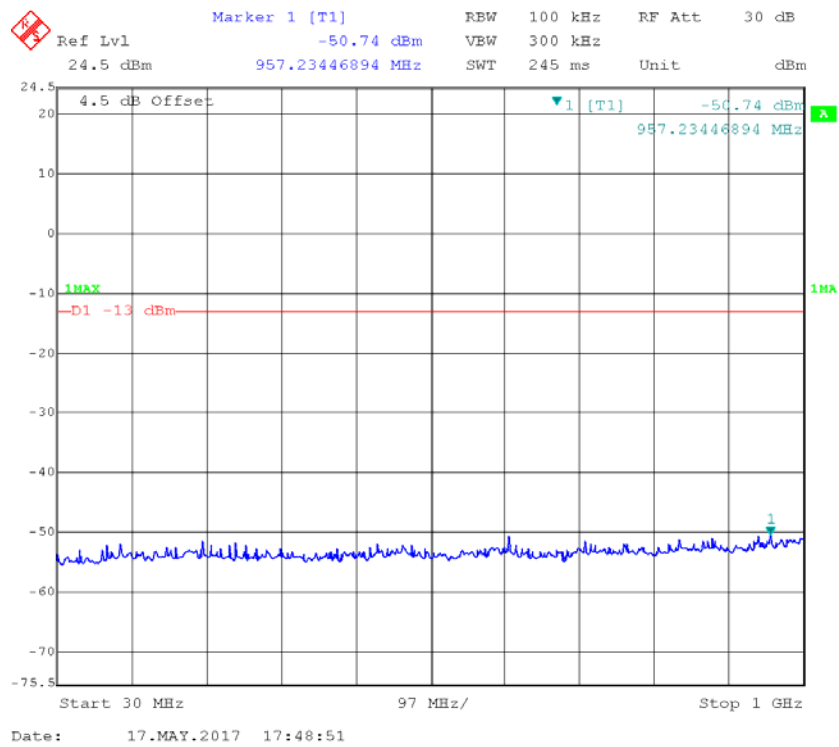


Fundamental

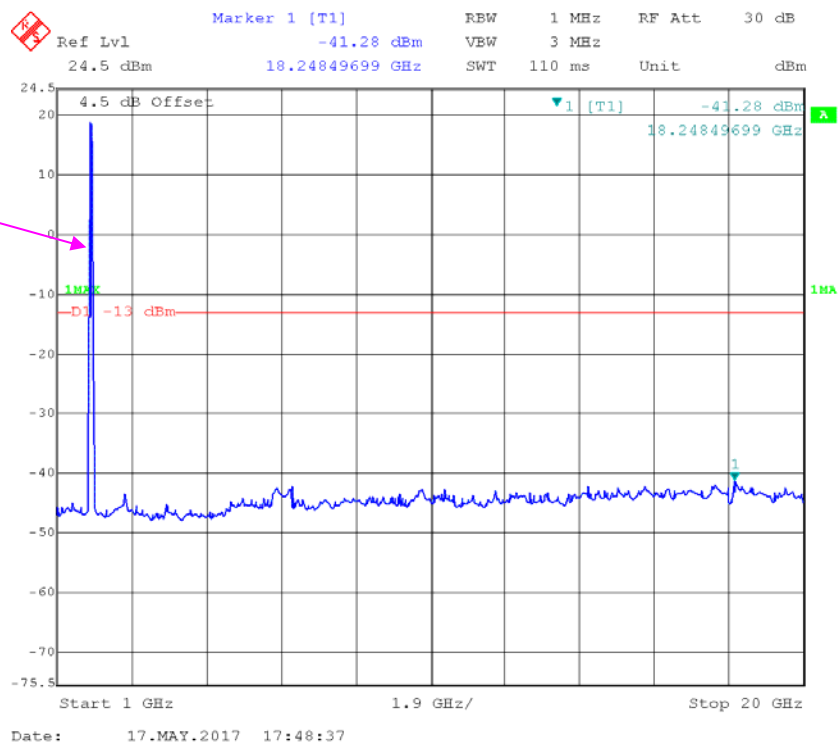


LTE Band IV (Middle Channel)


QPSK_1.4 MHz

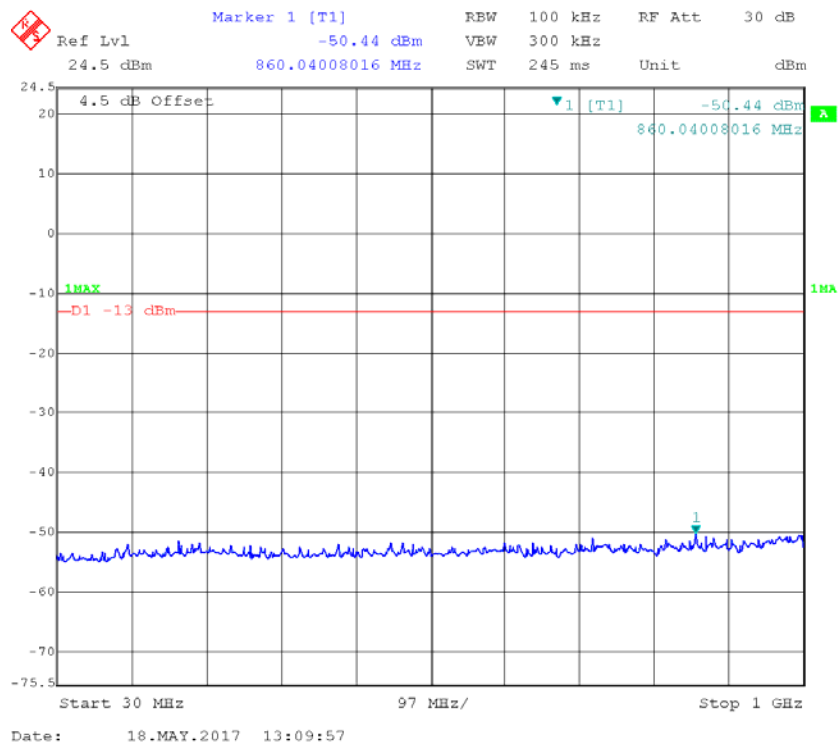


Fundamental

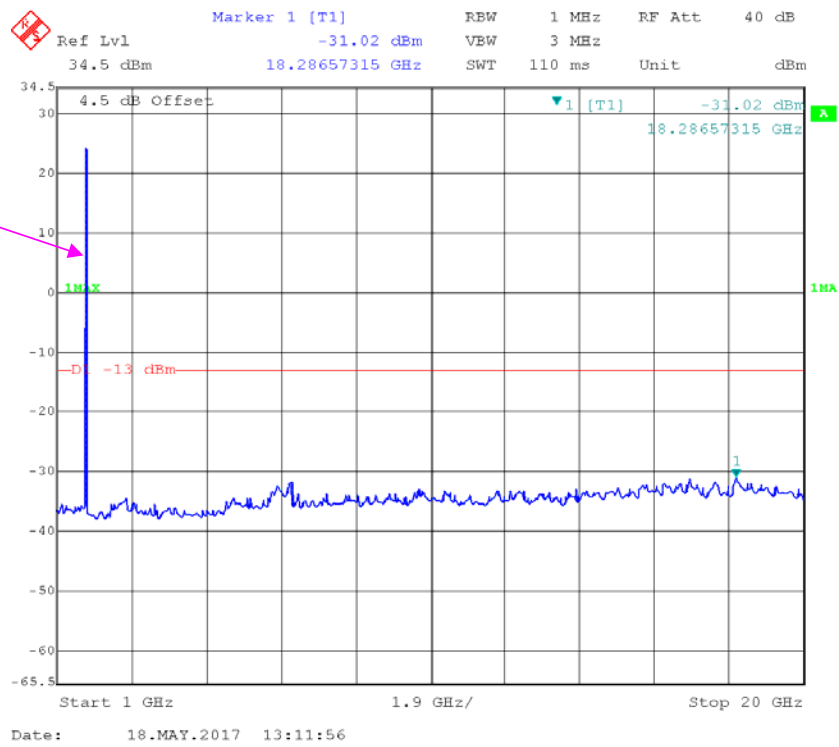


QPSK_3 MHz

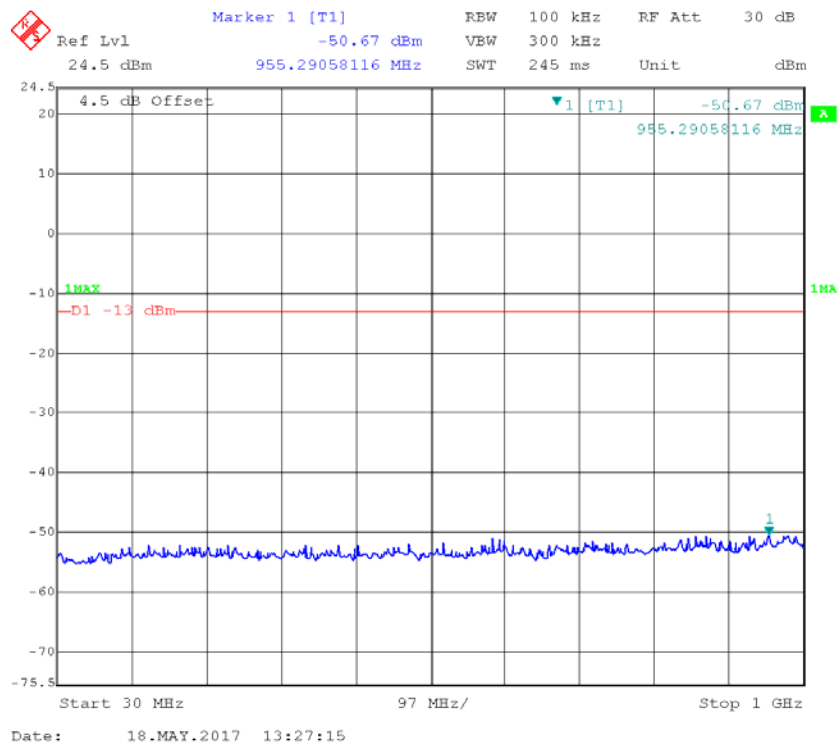


Fundamental

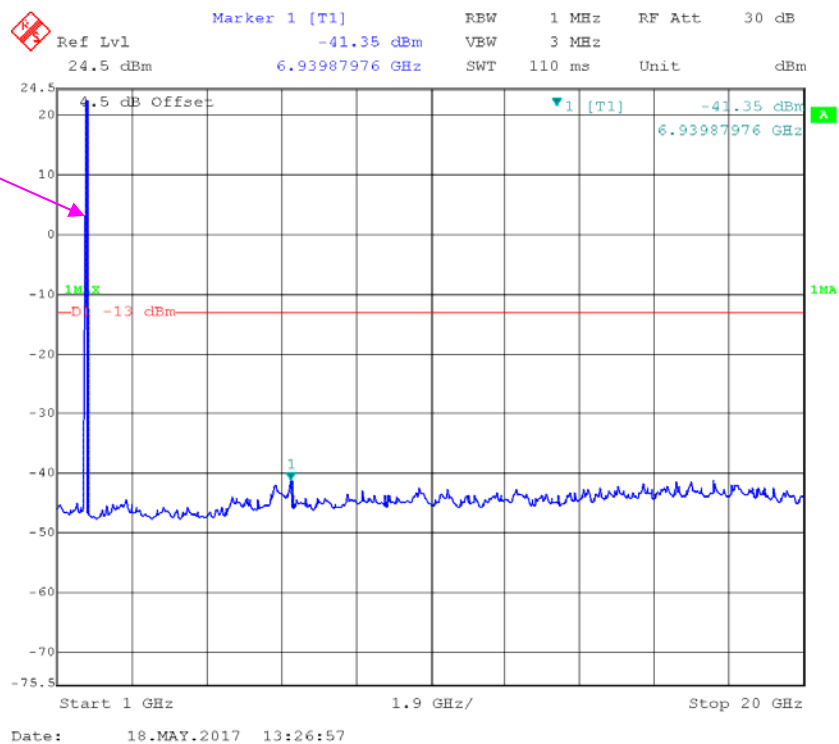


QPSK_5 MHz

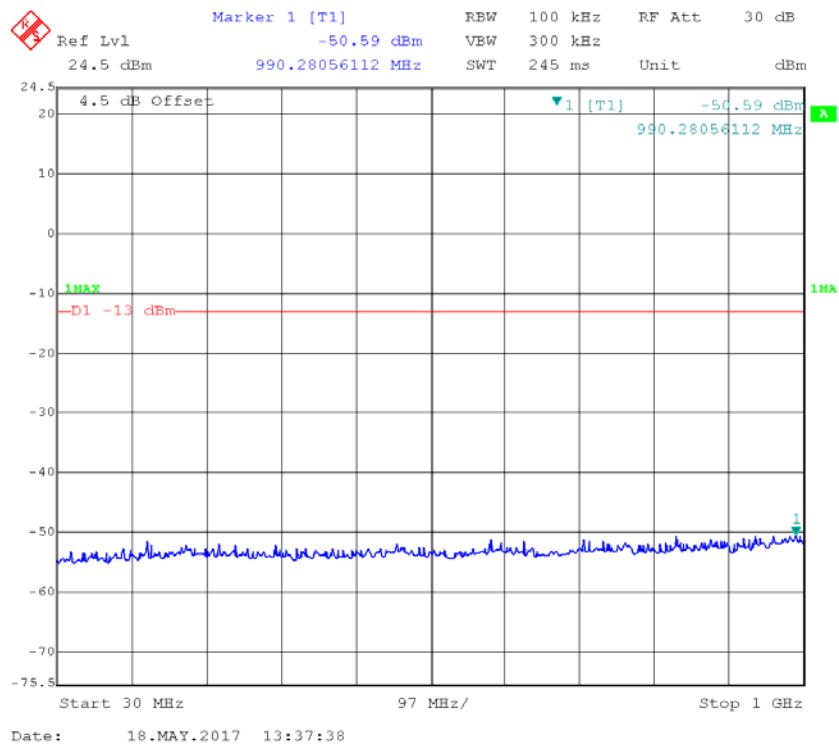


Fundamental

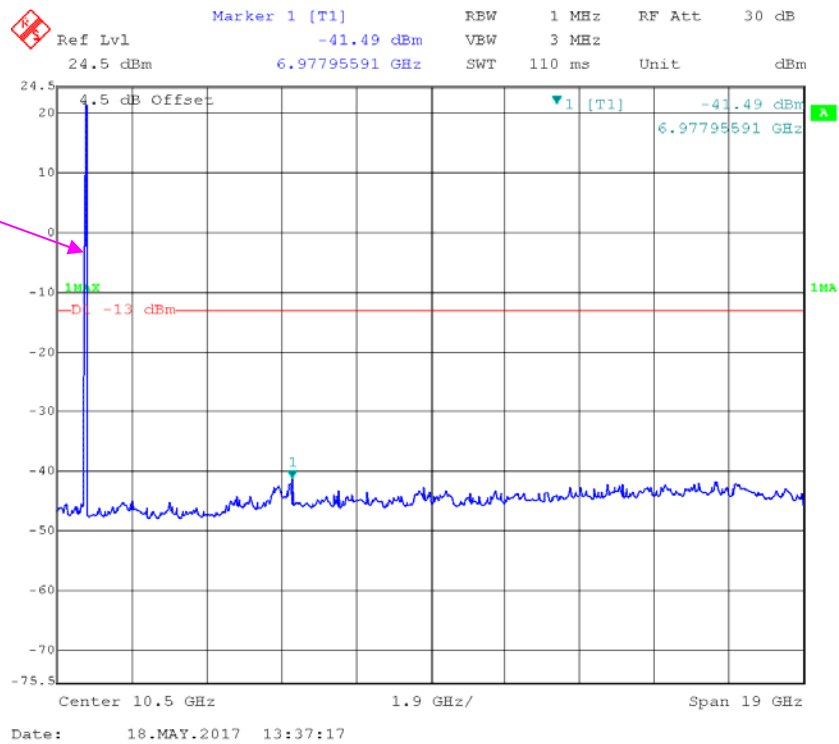


QPSK_10 MHz

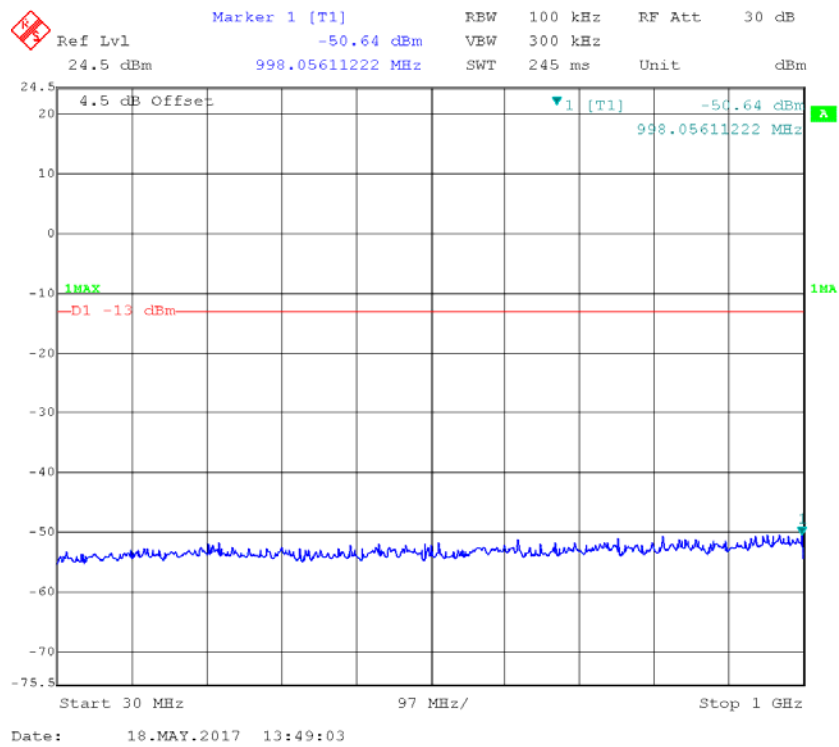


Fundamental

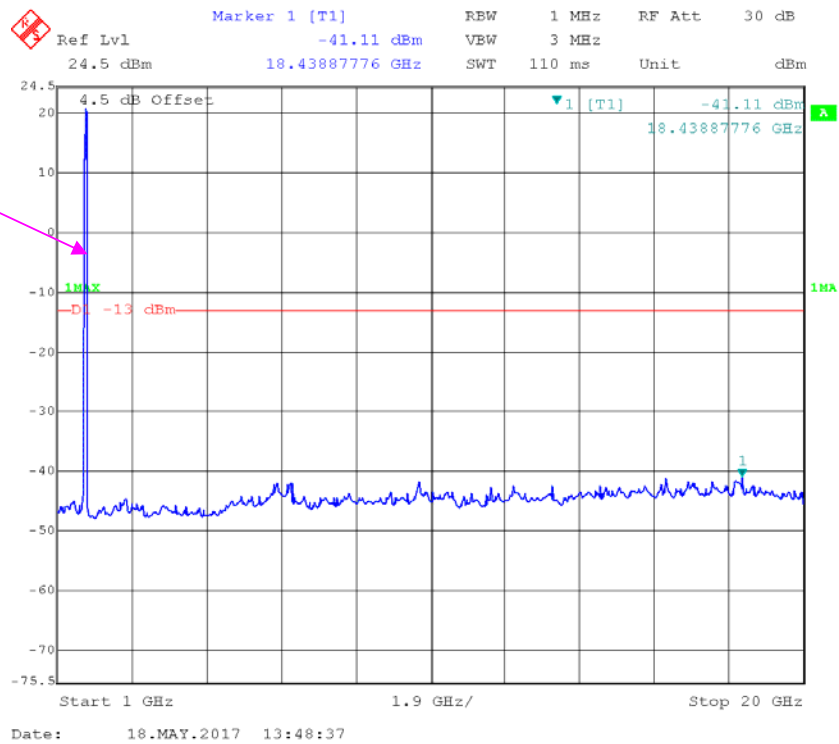


QPSK_15 MHz

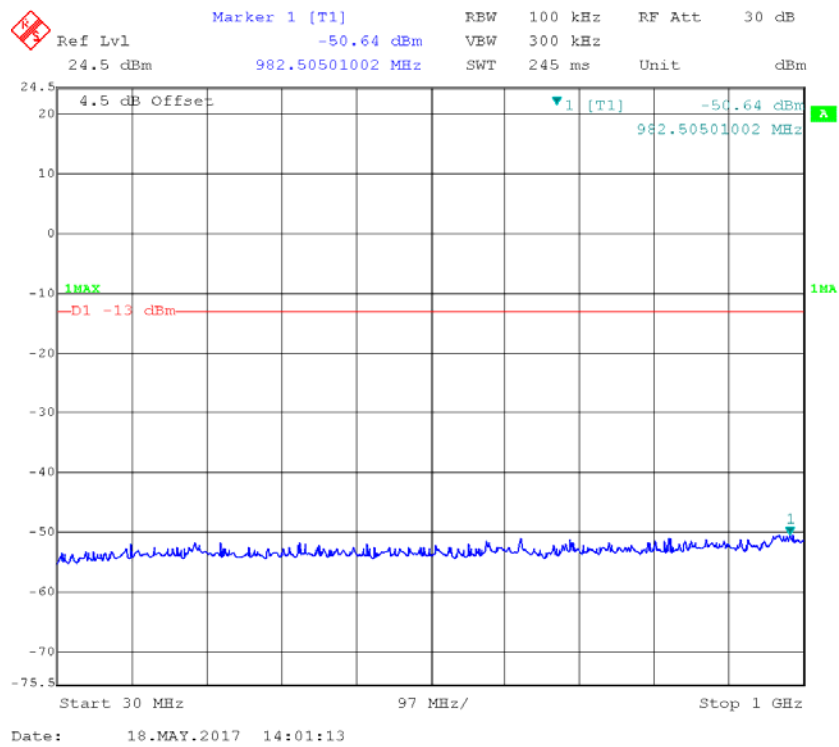


Fundamental

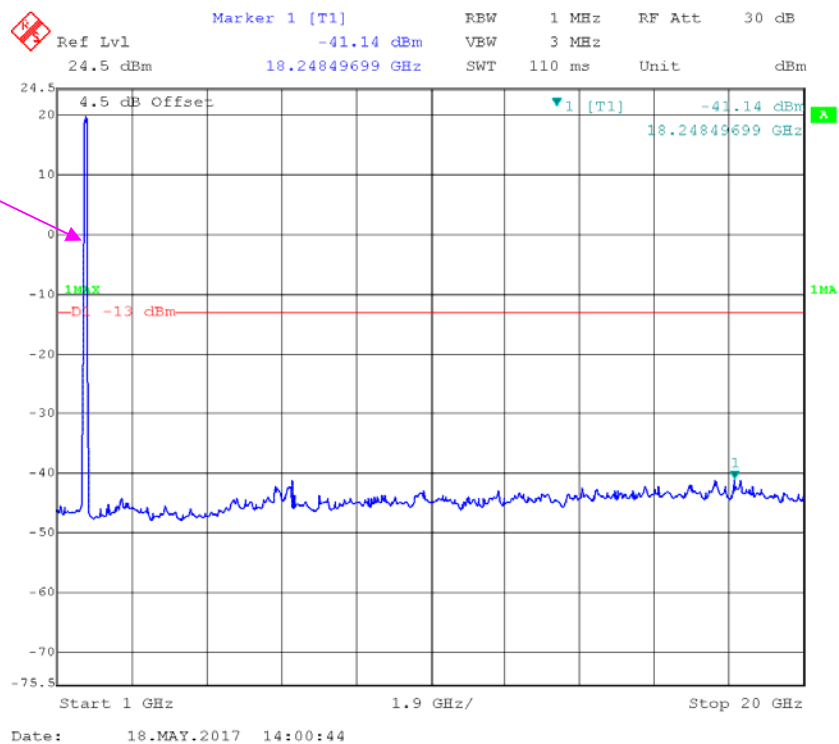

QPSK_20 MHz


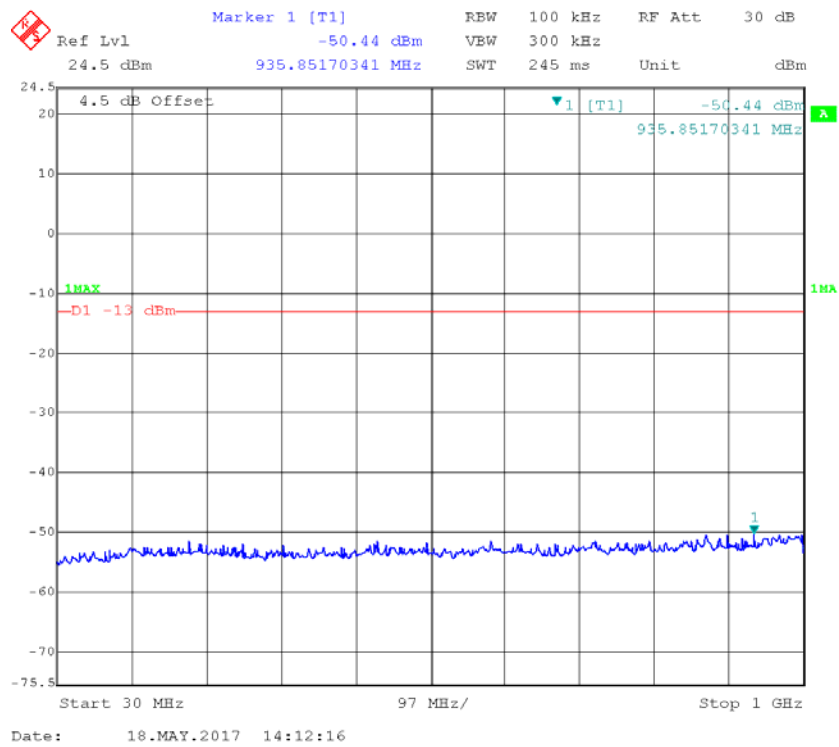


Fundamental


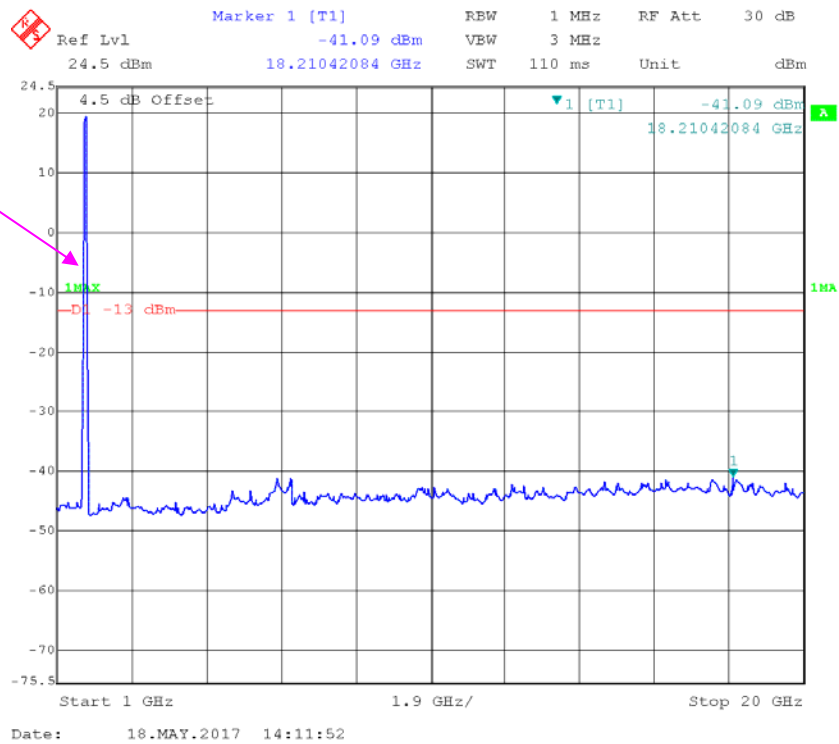


LTE Band V (Middle Channel)



QPSK_1.4 MHz

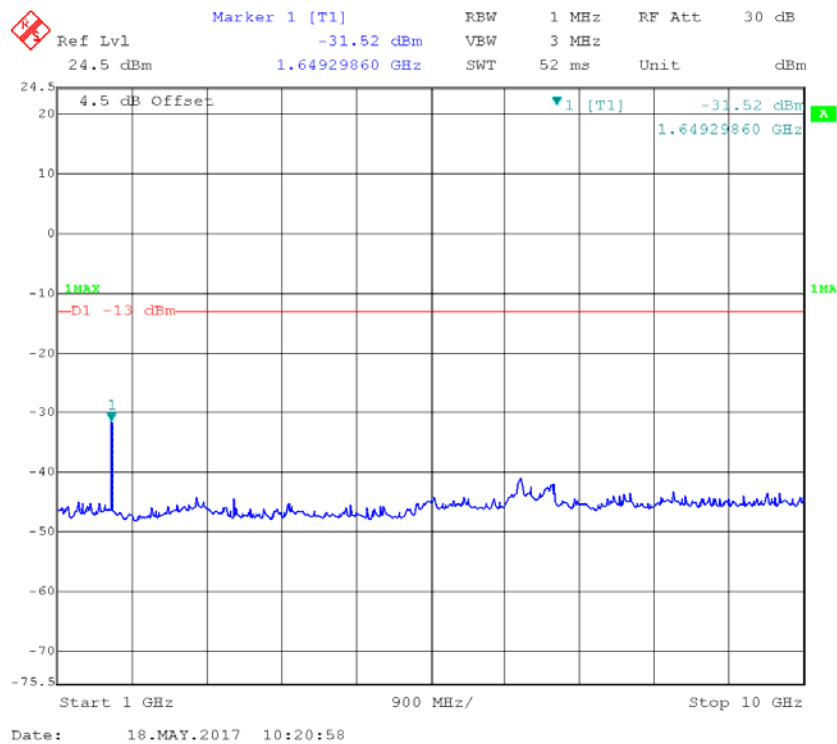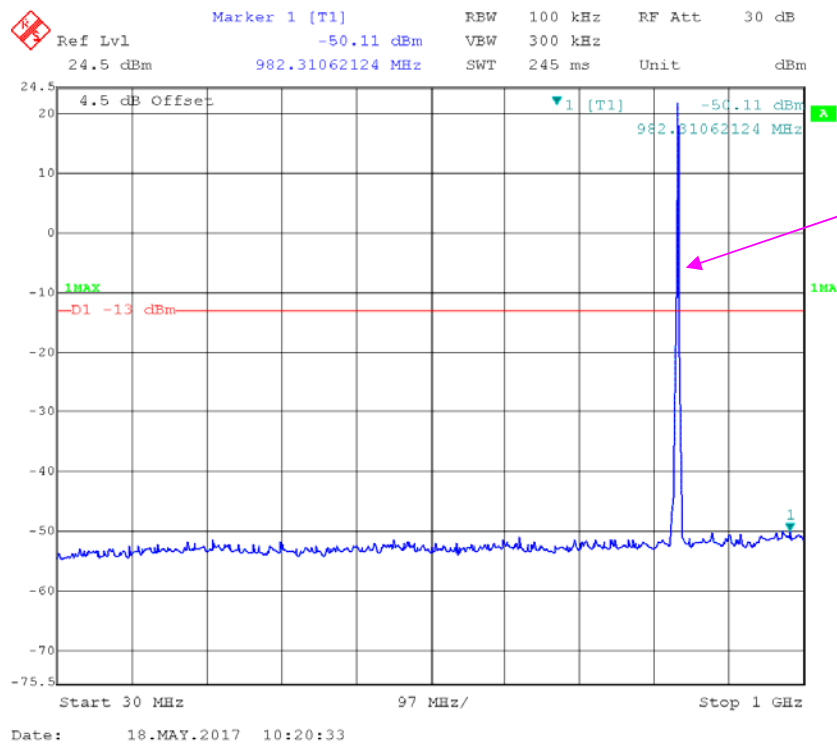


QPSK_3 MHz

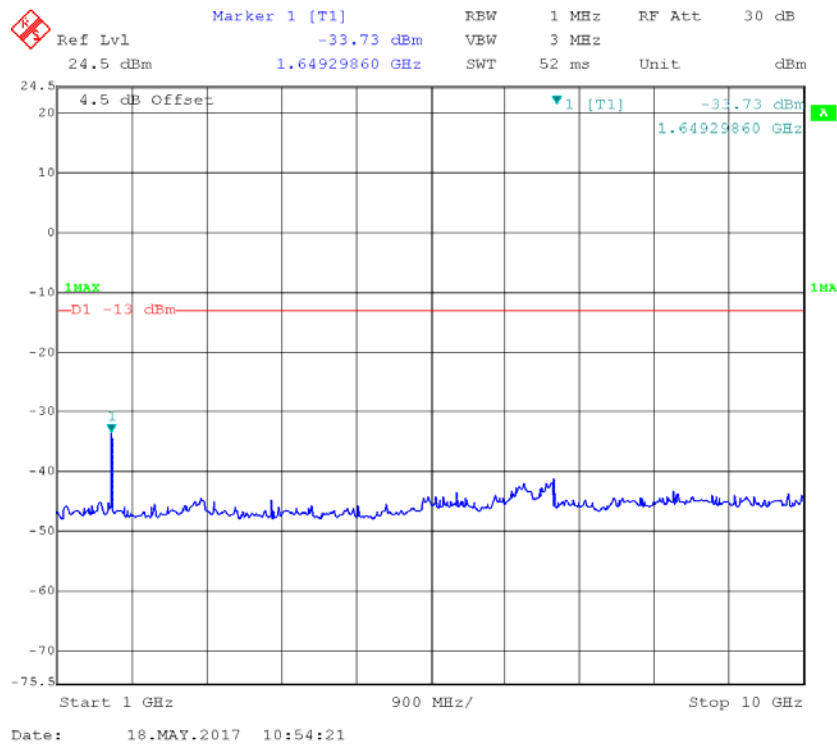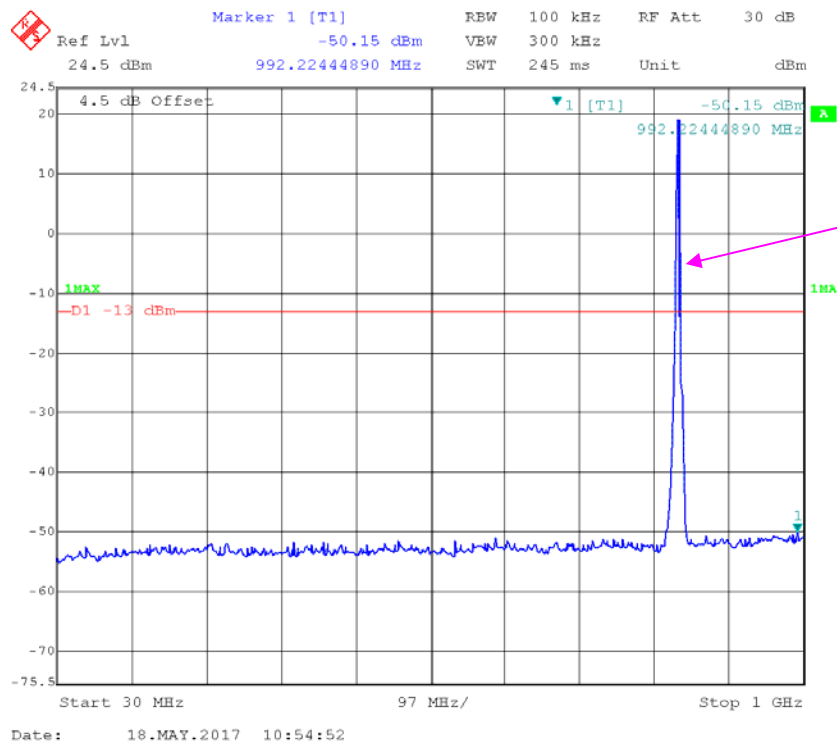


QPSK_5 MHz

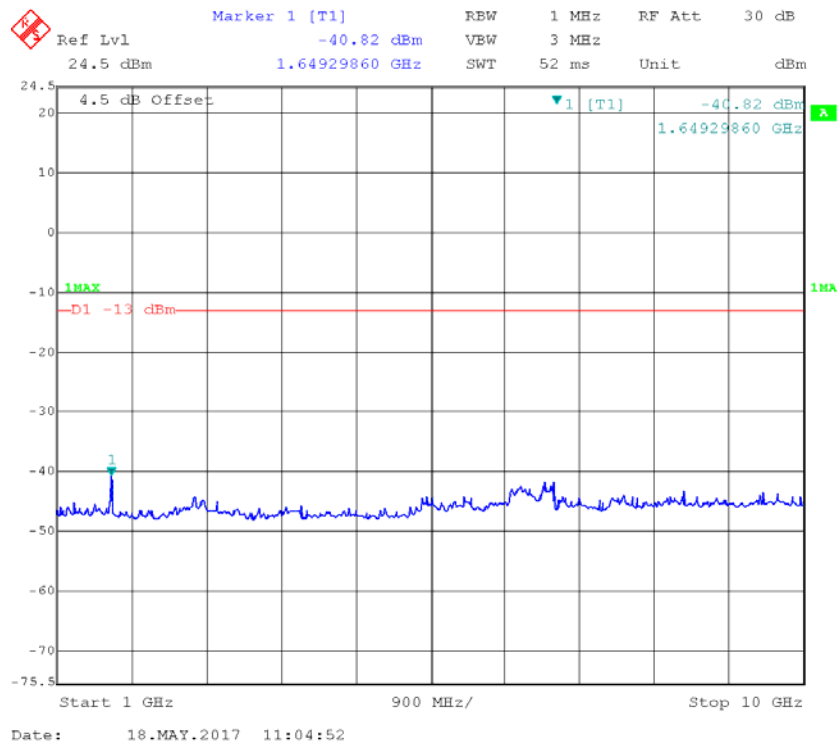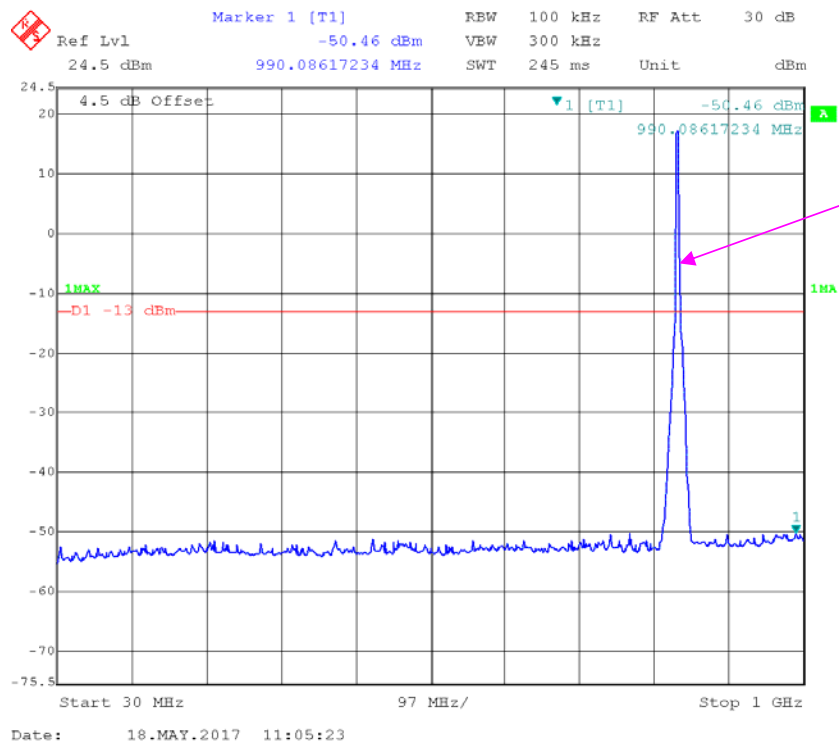

QPSK_10 MHz

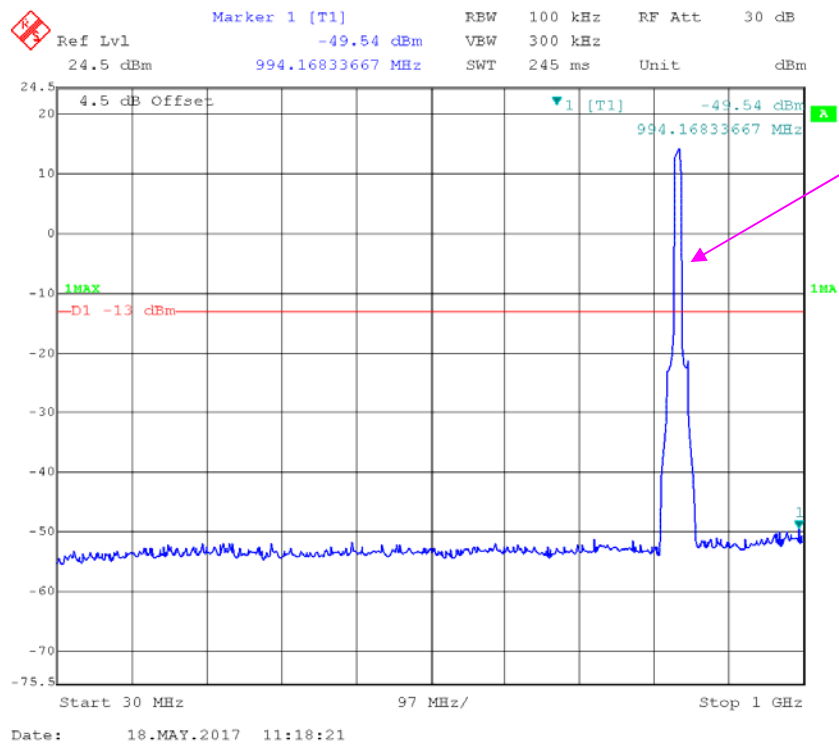


Fundamental

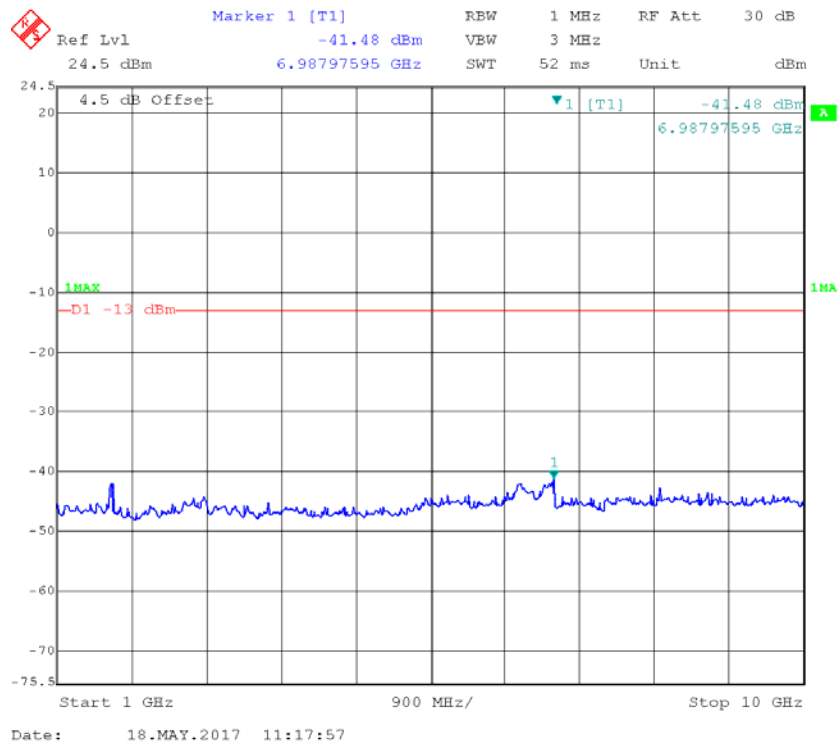


LTE Band VII (Middle Channel, the emissions under limit -25dBm)


QPSK_5 MHz

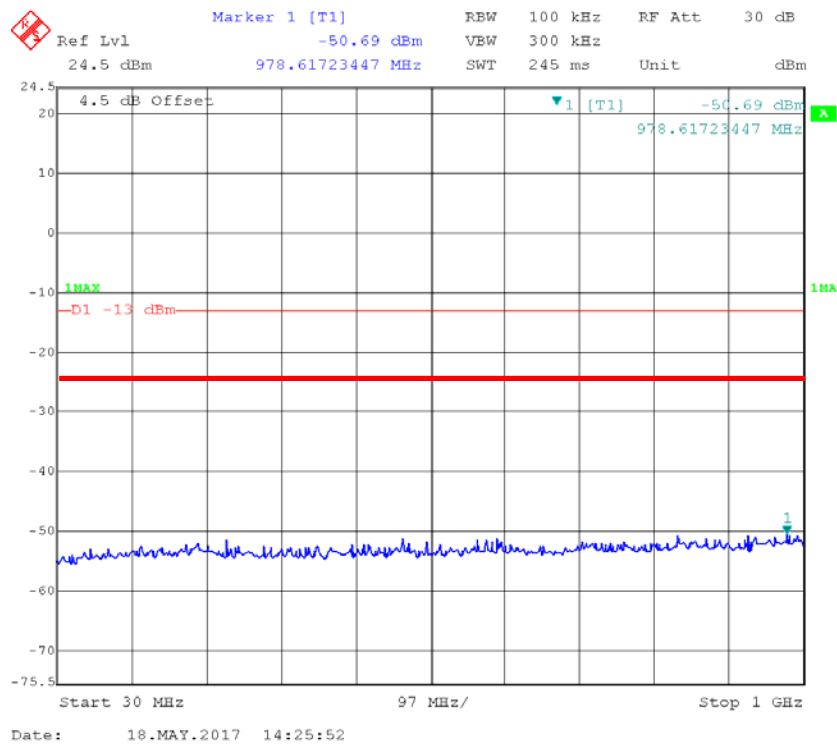


Fundamental

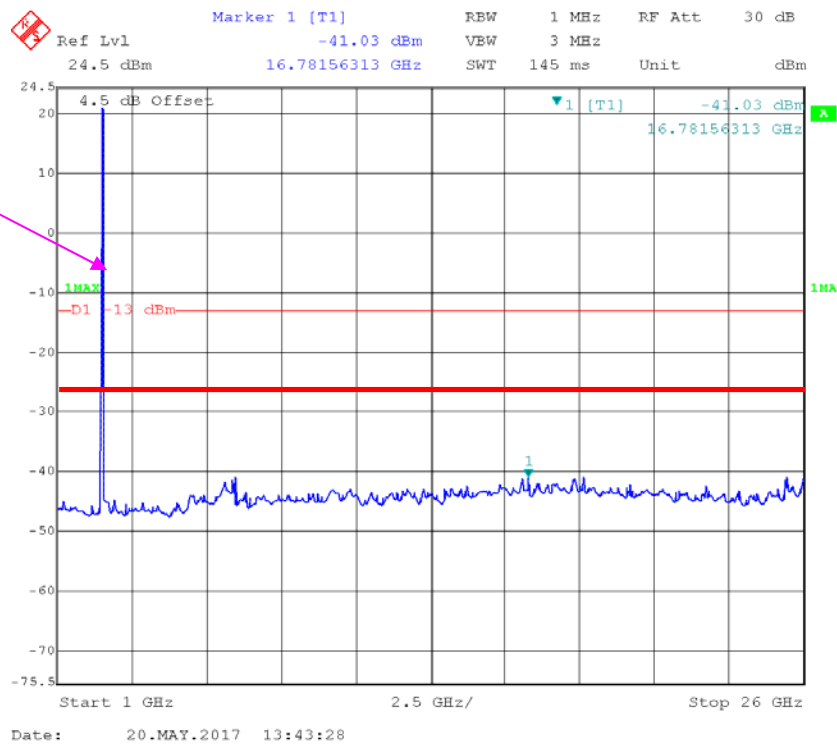


QPSK_10 MHz

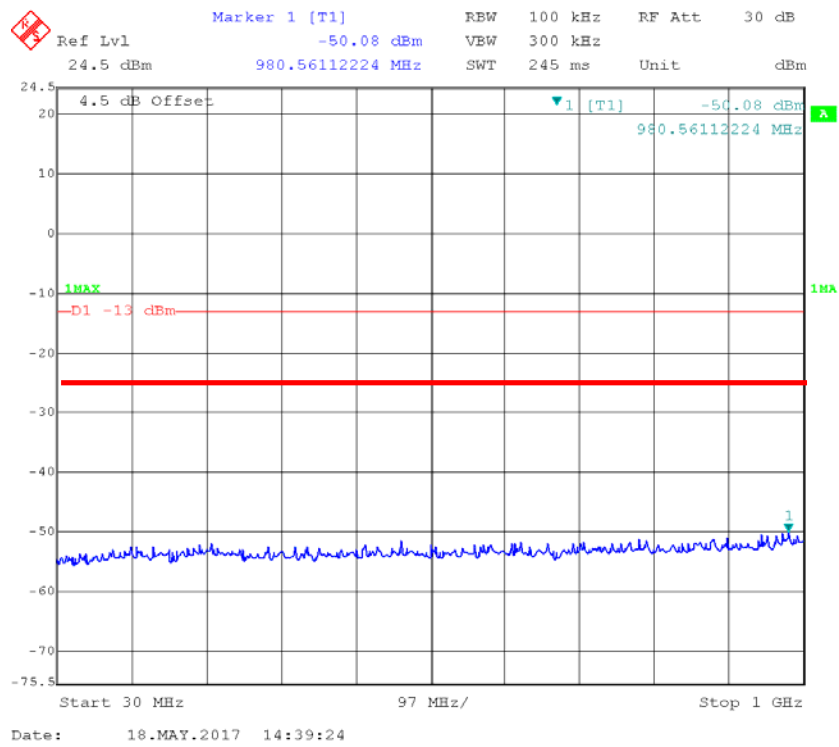


Fundamental

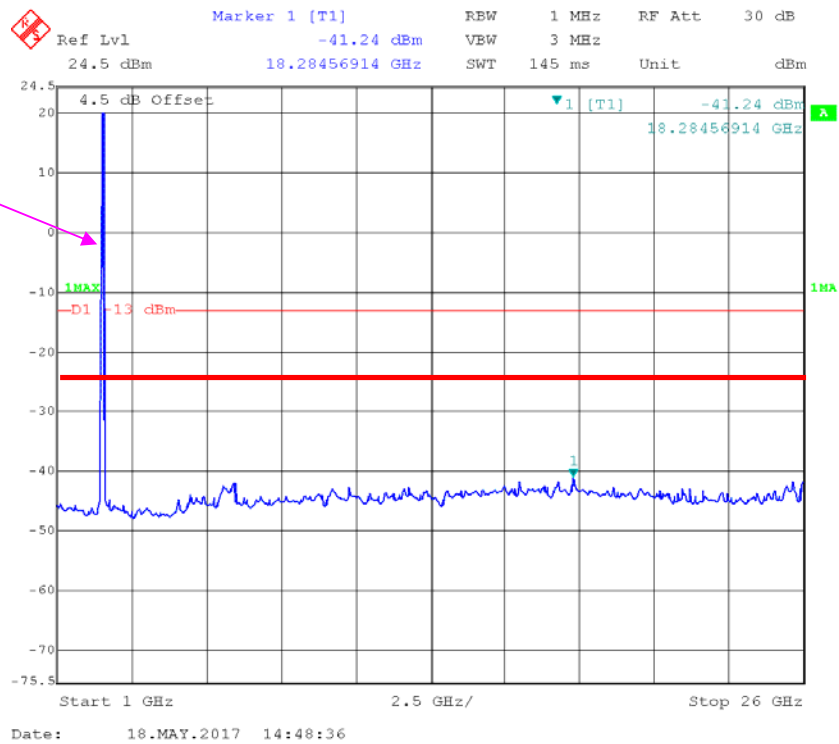


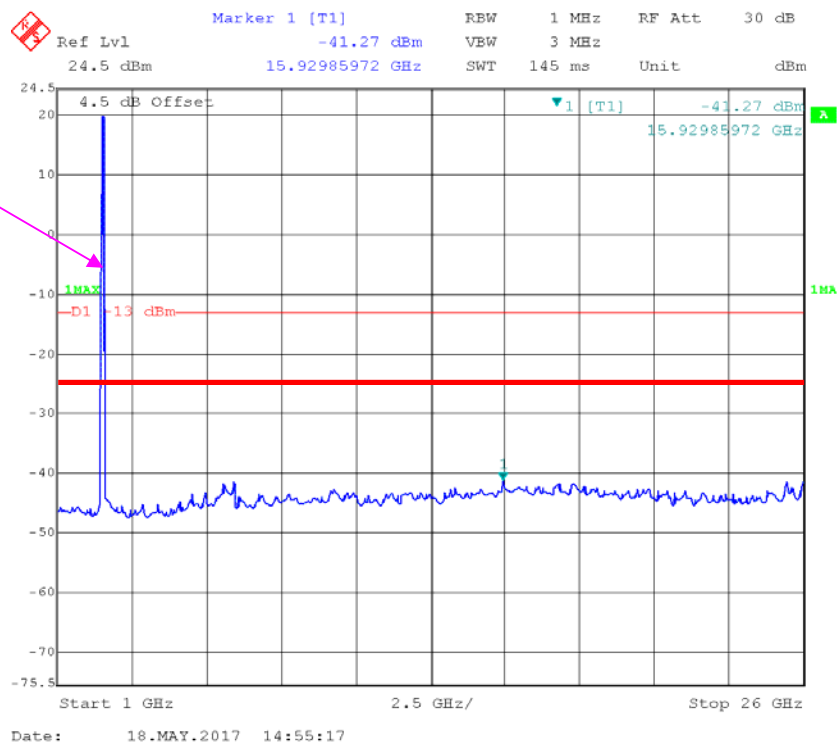

QPSK_20 MHz


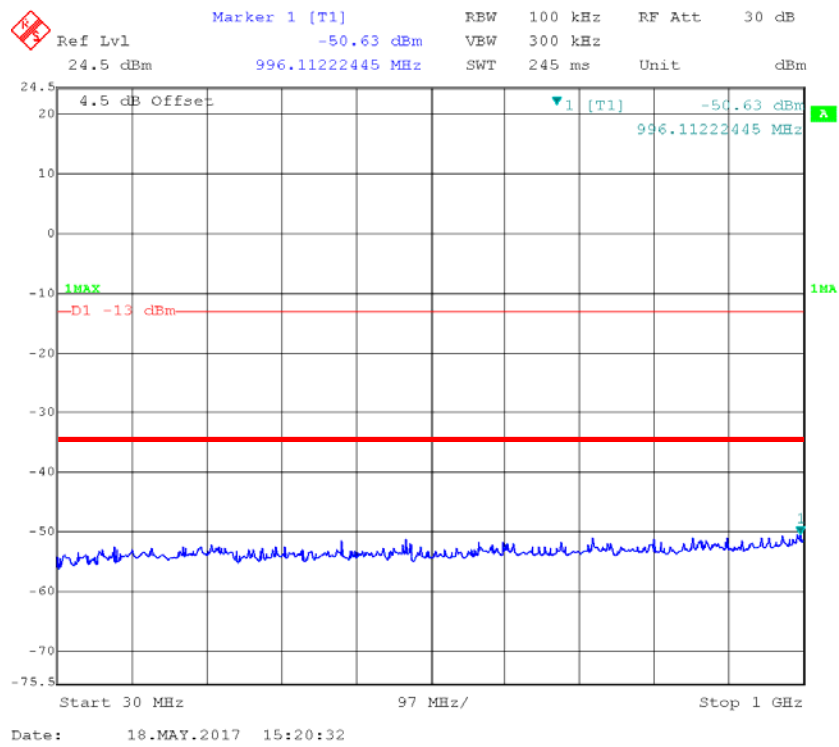


Fundamental


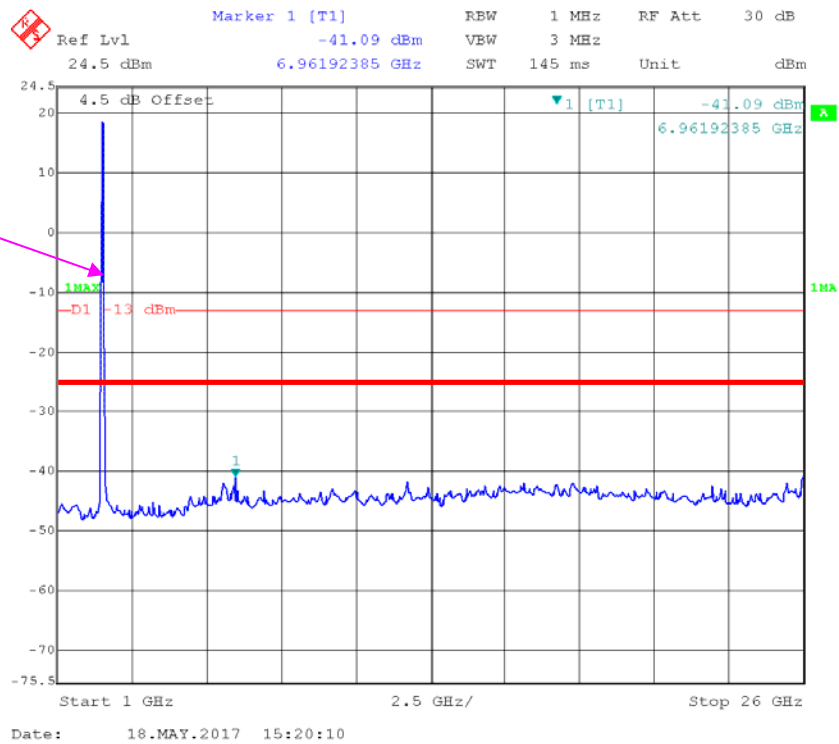


LTE Band 17 (Middle Channel)

QPSK_5 MHz

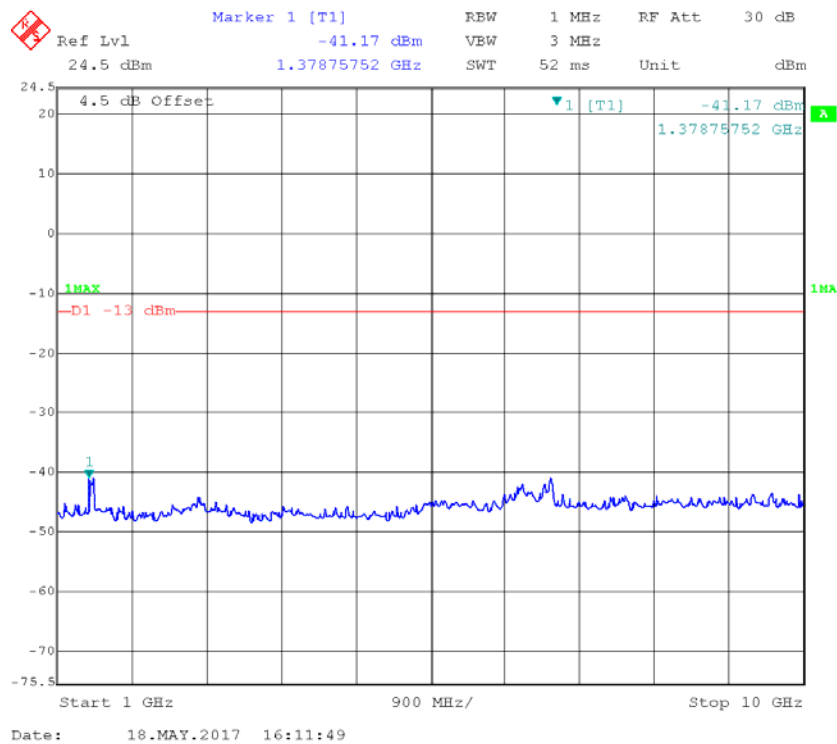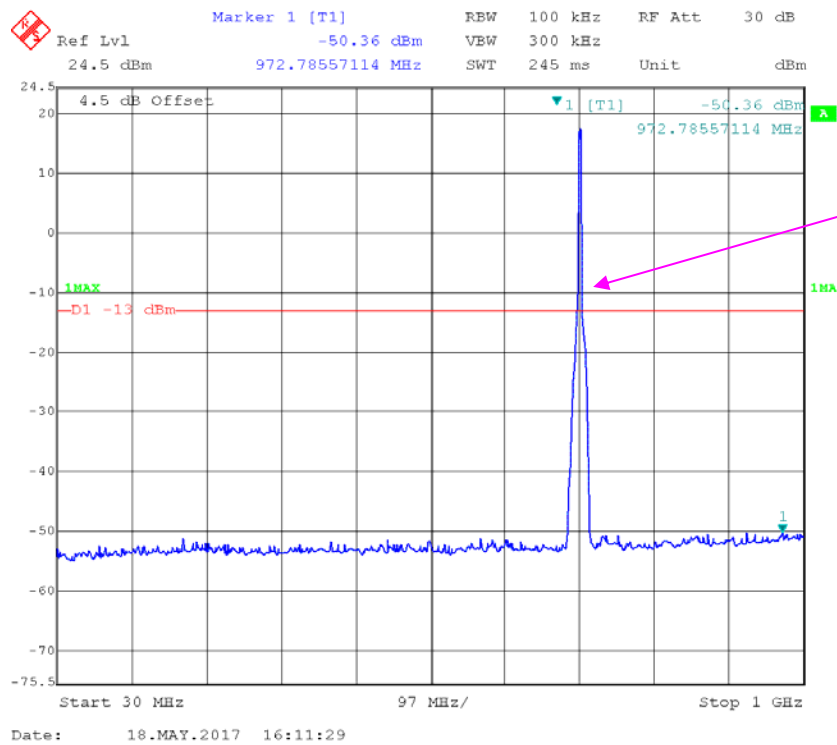

QPSK_10 MHz

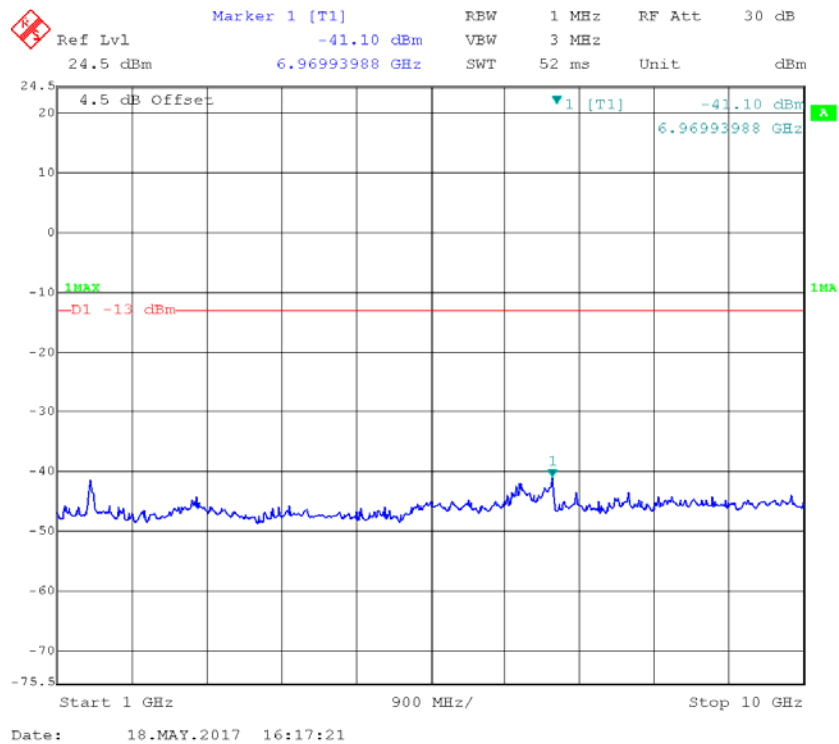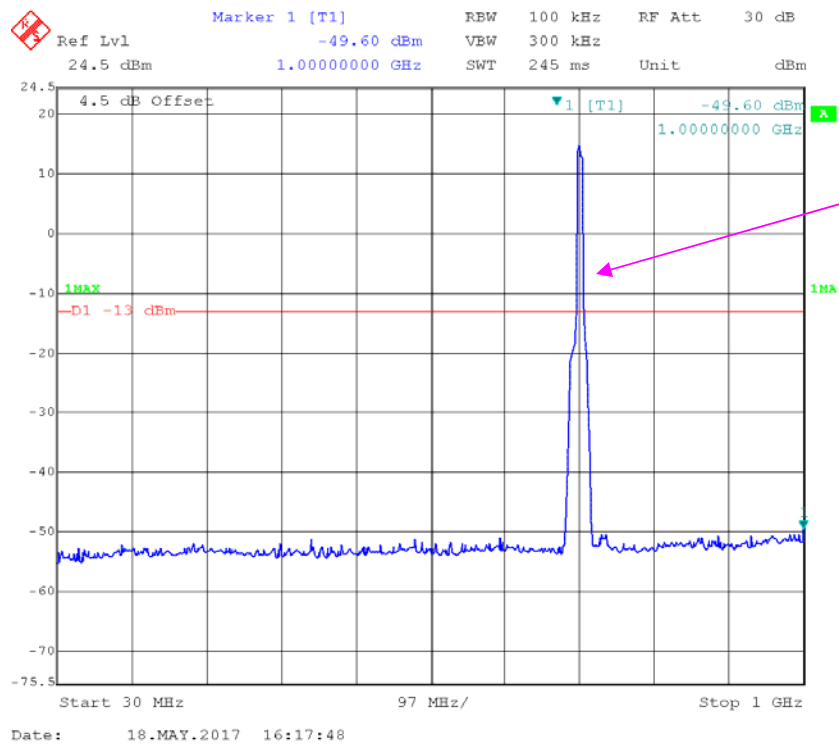

FCC §2.1053, §22.917 & §24.238 & §27.53- SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238 and § 27.53.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model Number	Serial Number	Calibration Date	Calibration Due Date
Agilent	Amplifier	8447D	2944A10442	2016-12-02	2017-12-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100028	2016-12-02	2017-12-01
Sunol Sciences	Broadband Antenna	JB3	A121808	2016-04-10	2019-04-09
Rohde & Schwarz	Spectrum Analyzer	FSEM30	100018	2016-12-02	2017-12-01
ETS	Horn Antenna	3115	003-6076	2016-12-02	2017-12-01
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-0113024	2014-06-16	2017-06-15
EMCO	Adjustable Dipole Antenna	3121C	9109-258	N/A	N/A
HP	Signal Generator	8648C	3623A04150	2016-05-23	2017-05-22
WILTRON	SWEPT FREQUENCY SYNTHESIZER	6737	213001	2016-05-23	2017-05-22
Mini-circuits	Amplifier	ZVA-183-S+	771001215	2016-05-20	2017-05-19
HP	Amplifier	8449B	3008A00277	2016-12-02	2017-12-01
EMCT	Semi-Anechoic Chamber	966	966-1	2015-04-24	2018-04-23
Unknown	RF Cable (below 1GHz)	Unknown	NO.1	2016-11-10	2017-11-09
Unknown	RF Cable (below 1GHz)	Unknown	NO.4	2016-11-10	2017-11-09
Unknown	RF Cable (above 1GHz)	Unknown	NO.2	2016-11-10	2017-11-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-011315	2016-08-18	2017-08-18
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-011312	2016-08-18	2017-08-18

*** Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Data

Environmental Conditions

Temperature:	21.6 °C
Relative Humidity:	52.6 %
ATM Pressure:	97.5 kPa

The testing was performed by Lorin Bian on 2017-05-08.

EUT Operation Mode: Transmitting

Cellular Band

30MHz-10 GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM850, Frequency:836.600 MHz								
1673.200	H	42.84	-59.2	10.6	2.5	-51.1	-13.0	38.1
1673.200	V	40.26	-62.1	10.6	2.5	-54.0	-13.0	41.0
2509.800	H	41.38	-58	13.1	3.1	-48.0	-13.0	35.0
2509.800	V	39.63	-58.8	13.1	3.1	-48.8	-13.0	35.8
3346.400	H	36.57	-62.3	13.8	3.6	-52.1	-13.0	39.1
3346.400	V	34.29	-64.3	13.8	3.6	-54.1	-13.0	41.1
328.000	H	45.27	-58	0.0	0.5	-58.5	-13.0	45.5
642.000	V	46.15	-53.6	0.0	0.8	-54.4	-13.0	41.4
WCDMA Band V R99,Frequency:836.600 MHz								
1673.200	H	42.87	-59.2	10.6	2.5	-51.1	-13.0	38.1
1673.200	V	40.12	-62.2	10.6	2.5	-54.1	-13.0	41.1
2509.800	H	38.69	-60.7	13.1	3.1	-50.7	-13.0	37.7
2509.800	V	36.54	-61.9	13.1	3.1	-51.9	-13.0	38.9
3346.400	H	35.21	-63.7	13.8	3.6	-53.5	-13.0	40.5
3346.400	V	33.82	-64.8	13.8	3.6	-54.6	-13.0	41.6
315.000	H	42.15	-61.7	0.0	0.5	-62.2	-13.0	49.2
527.000	V	46.82	-55.1	0.0	0.7	-55.8	-13.0	42.8

PCS Band

30MHz-20GHz:

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GSM1900, Frequency:1880.000 MHz								
3760.000	H	40.58	-55.3	13.8	3.8	-45.3	-13.0	32.3
3760.000	V	37.43	-57.2	13.8	3.8	-47.2	-13.0	34.2
443.000	H	46.28	-53.6	0.0	0.7	-54.3	-13.0	41.3
358.000	V	48.24	-56.3	0.0	0.6	-56.9	-13.0	43.9
WCDMA Band II, R99, Frequency:1880.000 MHz								
3760.000	H	41.74	-54.1	13.8	3.8	-44.1	-13.0	31.1
3760.000	V	39.65	-55	13.8	3.8	-45.0	-13.0	32.0
5640.000	H	36.34	-58	14.0	4.6	-48.6	-13.0	35.6
5640.000	V	34.86	-59.5	14.0	4.6	-50.1	-13.0	37.1
238.000	H	43.48	-61.1	0.0	0.5	-61.6	-13.0	48.6
342.000	V	46.73	-58.2	0.0	0.6	-58.8	-13.0	45.8

LTE Band II (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:1880.000 MHz								
3760.000	H	37.84	-58	13.8	3.8	-48.0	-13.0	35.0
3760.000	V	38.47	-56.2	13.8	3.8	-46.2	-13.0	33.2
5640.000	H	38.52	-55.8	14.0	4.6	-46.4	-13.0	33.4
5640.000	V	40.36	-54	14.0	4.6	-44.6	-13.0	31.6
7520.000	H	37.28	-53.5	13.2	5.6	-45.9	-13.0	32.9
7520.000	V	37.15	-53.5	13.2	5.6	-45.9	-13.0	32.9
375.000	H	43.28	-58	0.0	0.6	-58.6	-13.0	45.6
452.000	V	48.27	-54.7	0.0	0.7	-55.4	-13.0	42.4
16-QAM,Frequency: 1880.000 MHz								
3760.000	H	36.14	-59.7	13.8	3.8	-49.7	-13.0	36.7
3760.000	V	37.53	-57.1	13.8	3.8	-47.1	-13.0	34.1
5640.000	H	37.68	-56.7	14.0	4.6	-47.3	-13.0	34.3
5640.000	V	40.79	-53.5	14.0	4.6	-44.1	-13.0	31.1
7520.000	H	37.44	-53.3	13.2	5.6	-45.7	-13.0	32.7
7520.000	V	36.75	-53.9	13.2	5.6	-46.3	-13.0	33.3
482.000	H	42.64	-56.9	0.0	0.7	-57.6	-13.0	44.6
465.000	V	45.55	-57.3	0.0	0.7	-58.0	-13.0	45.0

LTE Band IV (30MHz-20GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:1732.500 MHz								
3465.000	H	36.72	-61.8	13.9	3.6	-51.5	-13.0	38.5
3465.000	V	39.54	-58.2	13.9	3.6	-47.9	-13.0	34.9
5197.500	H	36.77	-56.7	14.0	4.8	-47.5	-13.0	34.5
5197.500	V	35.91	-59.1	14.0	4.8	-49.9	-13.0	36.9
6930.000	H	36.87	-56.4	13.6	5.3	-48.1	-13.0	35.1
6930.000	V	38.98	-53.8	13.6	5.3	-45.5	-13.0	32.5
382.000	H	43.25	-54.3	0.0	0.6	-54.9	-13.0	41.9
737.000	V	47.66	-40.3	0.0	0.9	-41.2	-13.0	28.2
16-QAM,Frequency: 1732.500 MHz								
3465.000	H	36.54	-61.9	13.9	3.6	-51.6	-13.0	38.6
3465.000	V	39.43	-58.3	13.9	3.6	-48.0	-13.0	35.0
5197.500	H	36.59	-56.9	14.0	4.8	-47.7	-13.0	34.7
5197.500	V	35.82	-59.2	14.0	4.8	-50.0	-13.0	37.0
6930.000	H	36.47	-56.8	13.6	5.3	-48.5	-13.0	35.5
6930.000	V	38.93	-53.9	13.6	5.3	-45.6	-13.0	32.6
453.000	H	42.64	-49	0.0	0.7	-49.7	-13.0	36.7
466.000	V	46.77	-42.2	0.0	0.7	-42.9	-13.0	29.9

LTE Band V (30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:836.500 MHz								
1673.000	H	34.62	-67.4	10.6	2.5	-59.3	-13.0	46.3
1673.000	V	34.17	-68.2	10.6	2.5	-60.1	-13.0	47.1
2509.500	H	33.49	-65.9	13.1	3.1	-55.9	-13.0	42.9
2509.500	V	35.08	-63.4	13.1	3.1	-53.4	-13.0	40.4
428.000	H	42.67	-57.3	0.0	0.6	-57.9	-13.0	44.9
536.000	V	47.55	-54.2	0.0	0.7	-54.9	-13.0	41.9
16-QAM,Frequency: 836.500 MHz								
1673.000	H	33.89	-68.2	10.6	2.5	-60.1	-13.0	47.1
1673.000	V	34.33	-68	10.6	2.5	-59.9	-13.0	46.9
2509.500	H	34.51	-64.9	13.1	3.1	-54.9	-13.0	41.9
2509.500	V	35.98	-62.5	13.1	3.1	-52.5	-13.0	39.5
348.000	H	42.18	-60.3	0.0	0.6	-60.9	-13.0	47.9
527.000	V	45.62	-56.3	0.0	0.7	-57.0	-13.0	44.0

LTE Band VII (30MHz-26GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:2535.000 MHz								
5070.000	H	33.58	-59.7	13.9	4.5	-50.3	-25.0	25.3
5070.000	V	34.26	-59.9	13.9	4.5	-50.5	-25.0	25.5
7605.000	H	34.37	-56.5	13.2	5.7	-49.0	-25.0	24.0
7605.000	V	33.78	-57.1	13.2	5.7	-49.6	-25.0	24.6
428.000	H	42.88	-50.5	0.0	0.6	-51.1	-25.0	26.1
643.000	V	48.23	-39.8	0.0	0.8	-40.6	-25.0	15.6
16-QAM,Frequency: 2535.000 MHz								
5070.000	H	34.81	-58.5	13.9	4.5	-49.1	-25.0	24.1
5070.000	V	34.93	-59.2	13.9	4.5	-49.8	-25.0	24.8
7605.000	H	33.05	-57.8	13.2	5.7	-50.3	-25.0	25.3
7605.000	V	33.72	-57.2	13.2	5.7	-49.7	-25.0	24.7
284.000	H	42.83	-64.8	0.0	0.5	-65.3	-25.0	40.3
453.000	V	47.15	-42.5	0.0	0.7	-43.2	-25.0	18.2

LTE Band 17 (30MHz-10GHz):

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
QPSK,Frequency:710.000 MHz								
1420.000	H	34.59	-67.1	9.1	2.3	-60.3	-13.0	47.3
1420.000	V	33.67	-67.8	9.1	2.3	-61.0	-13.0	48.0
2130.000	H	34.05	-63.1	11.2	2.8	-54.7	-13.0	41.7
2130.000	V	34.12	-61.9	11.2	2.8	-53.5	-13.0	40.5
253.000	H	42.22	-65.9	0.0	0.5	-66.4	-13.0	53.4
435.000	V	46.08	-44.6	0.0	0.6	-45.2	-13.0	32.2
16-QAM,Frequency: 710.000 MHz								
1420.000	H	34.96	-66.8	9.1	2.3	-60.0	-13.0	47.0
1420.000	V	33.82	-67.7	9.1	2.3	-60.9	-13.0	47.9
2130.000	H	33.67	-63.5	11.2	2.8	-55.1	-13.0	42.1
2130.000	V	33.98	-62	11.2	2.8	-53.6	-13.0	40.6
431.000	H	42.64	-50.5	0.0	0.6	-51.1	-13.0	38.1
258.000	V	45.25	-60.4	0.0	0.5	-60.9	-13.0	47.9

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = SG Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level

FCC §22.917(a) & §24.238(a) & §27.53- BAND EDGES

Applicable Standard

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


According to §27.53 (h), AWS emission limits—(1) General protection levels. Except as otherwise specified below, for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10}(P)$ dB.

According to §27.53 (m), (4) For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

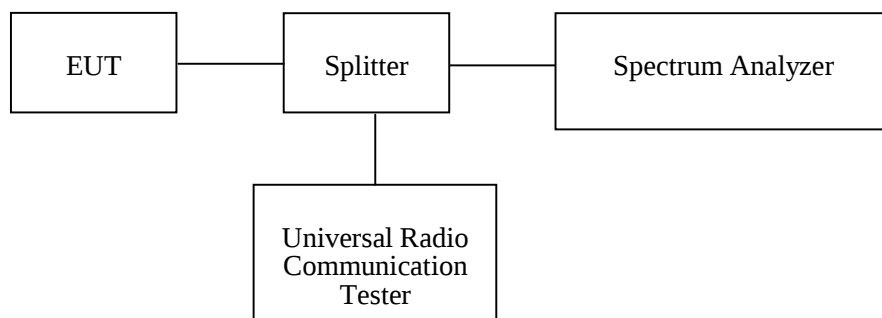

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2016-09-21	2017-09-20
Unknown	RF Cable	Unknown	NO.3	Each Time	/
Unknown	Two-way Splitter	Unknown	OE0120121	Each Time	/

* **Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Data

Environmental Conditions


Temperature:	21.6~23 °C
Relative Humidity:	59~60 %
ATM Pressure:	97.5~98 kPa

The testing was performed by Lorin Bian from 2017-05-17 to 2017-05-18.


Test Mode: Transmitting

Test Result: Compliant. Please refer to the following plots.


GSM 850, Left Band Edge

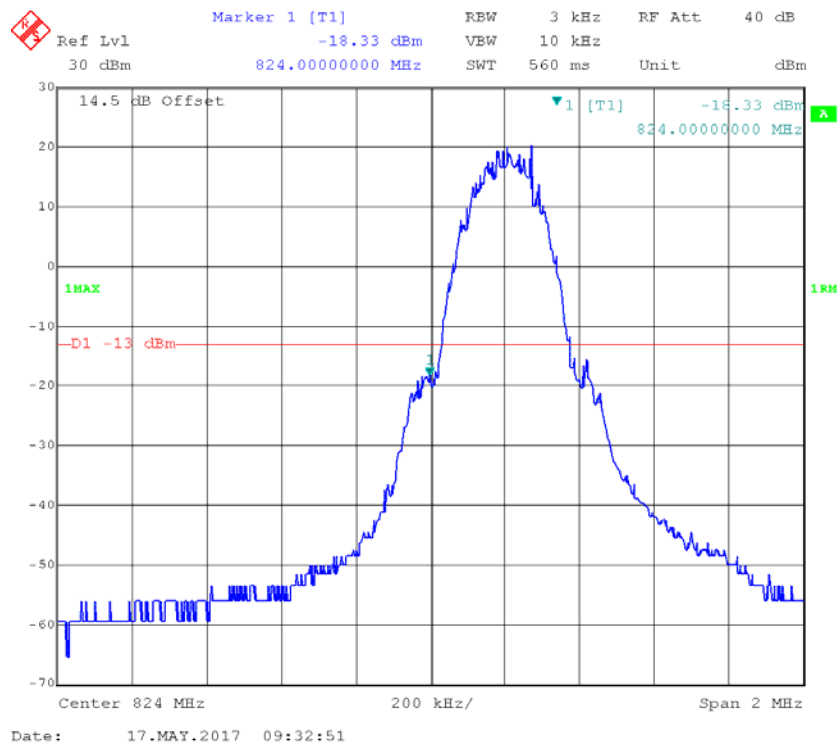


GSM 850, Right Band Edge

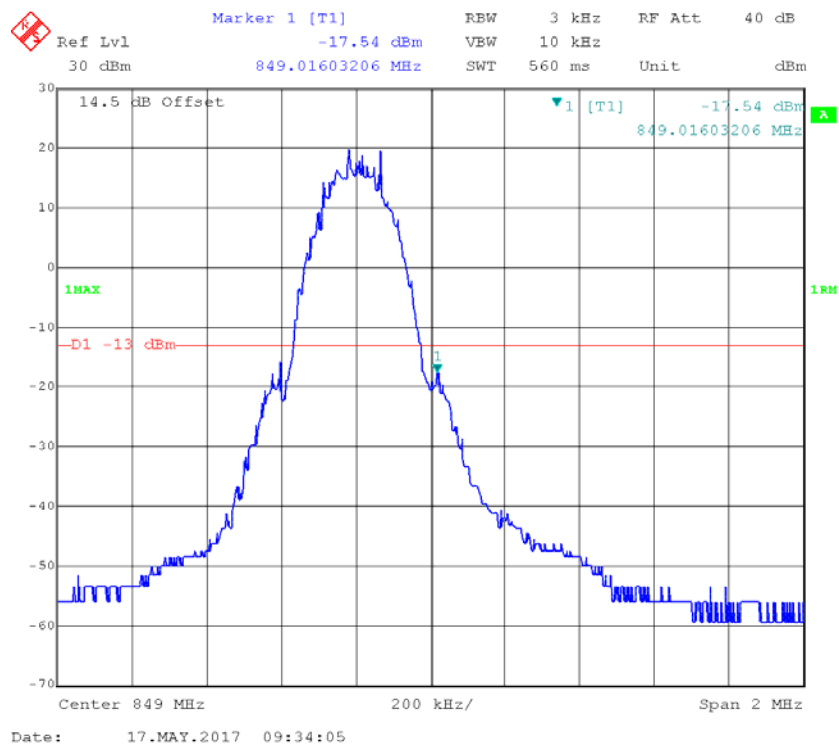


GSM 1900, Left Band Edge

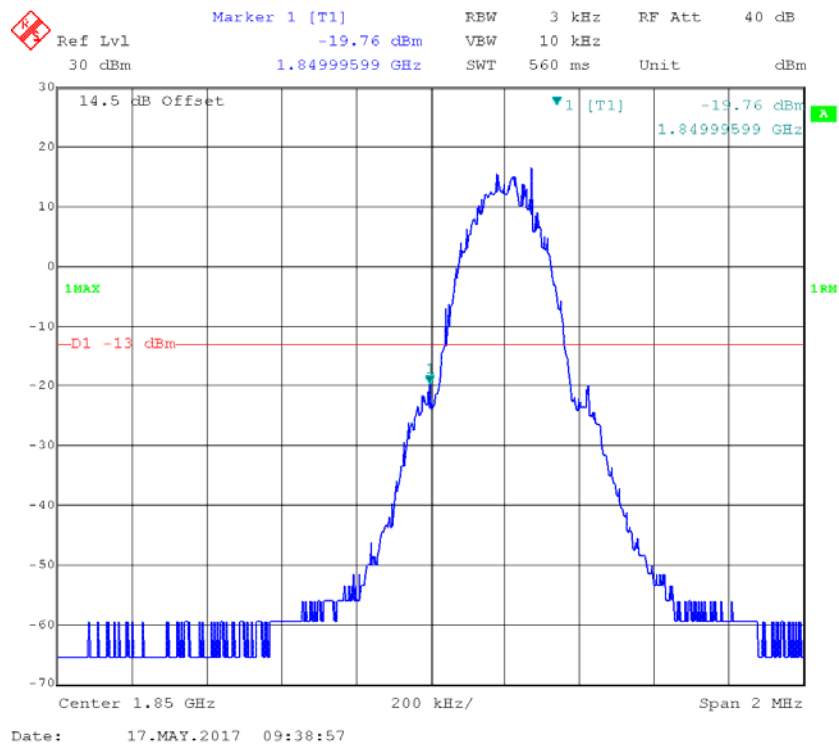


GSM 1900, Right Band Edge

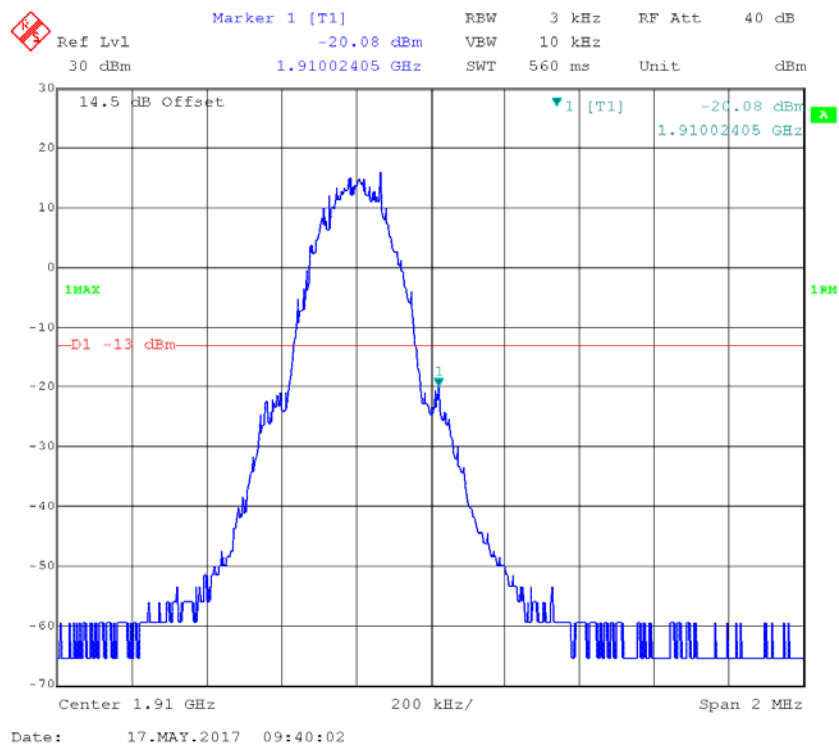


EDGE 850, Left Band Edge

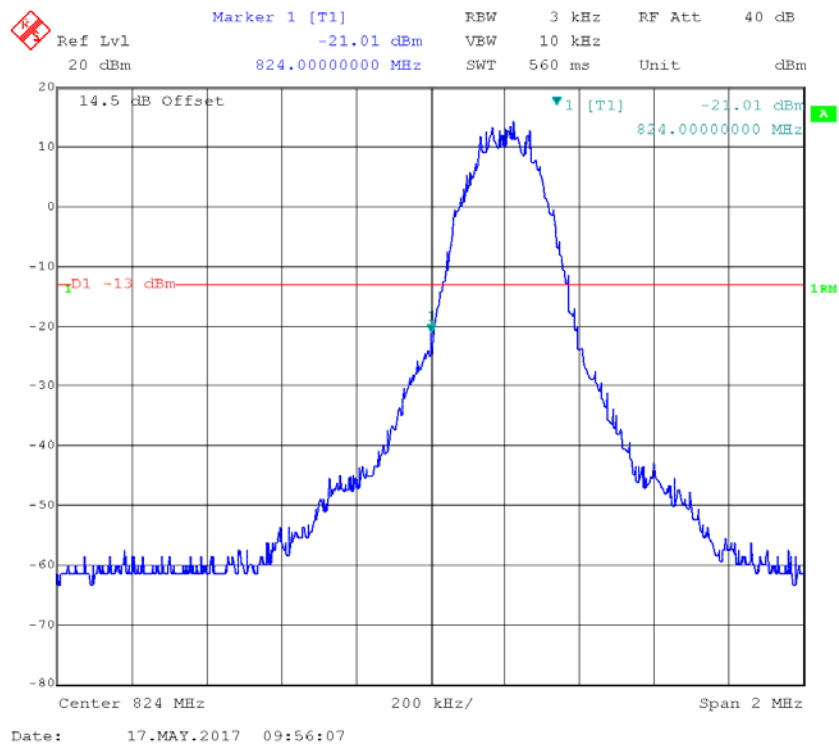


EDGE 850, Right Band Edge

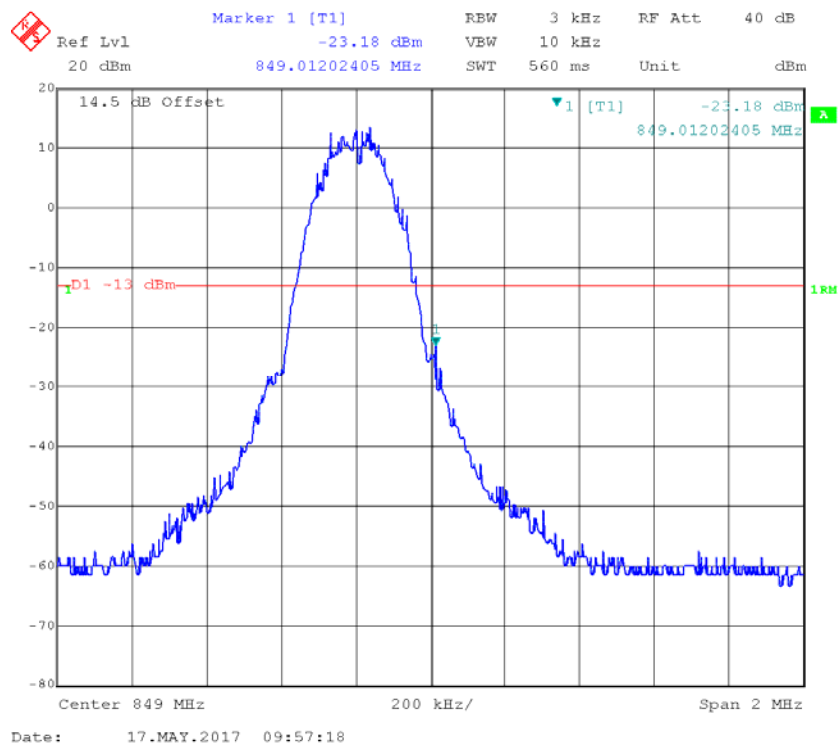


EDGE 1900, Left Band Edge

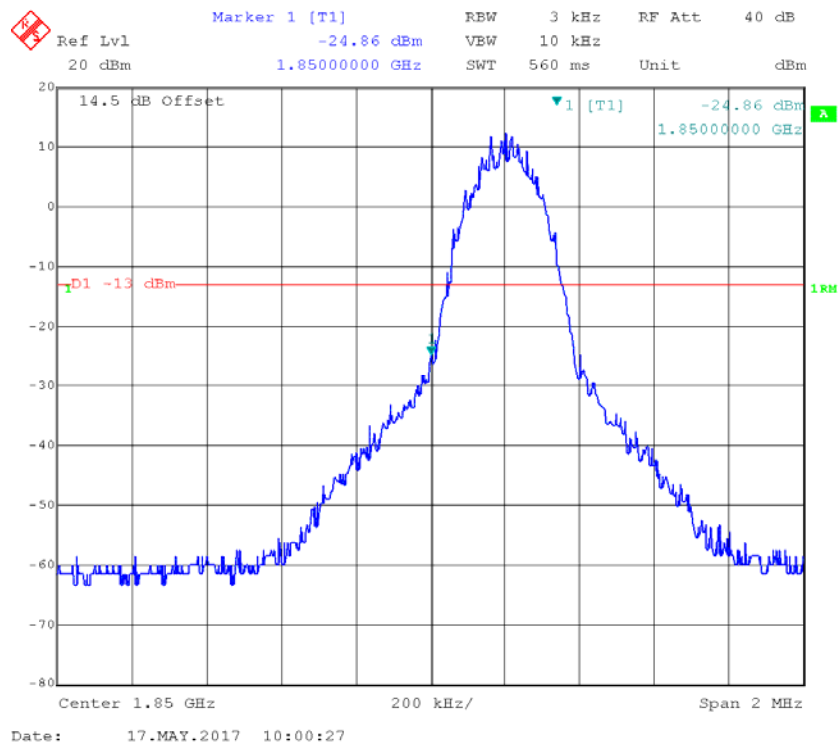


EDGE 1900, Right Band Edge

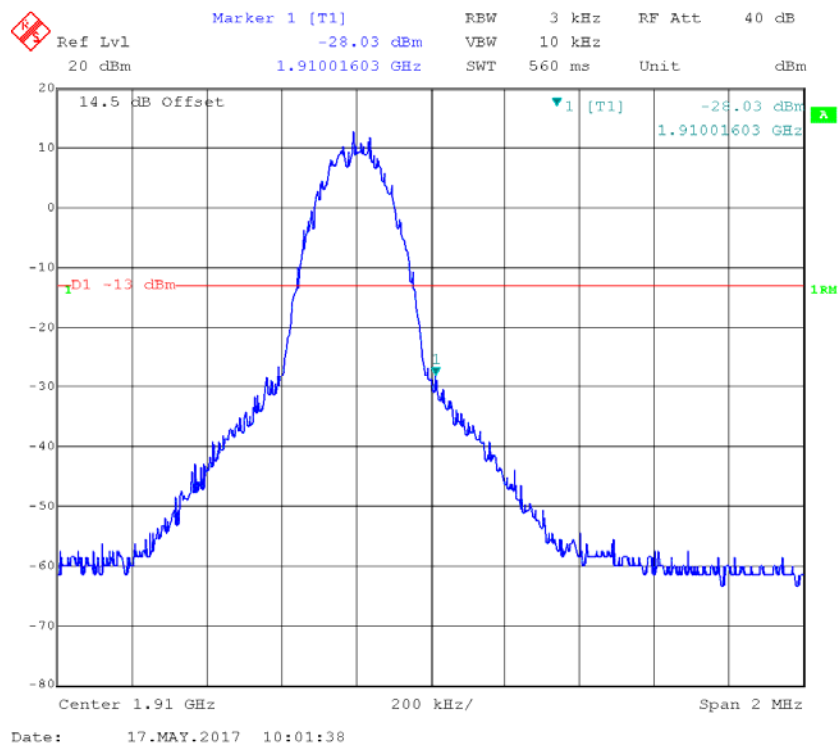


REL99 Band II, Left Band Edge

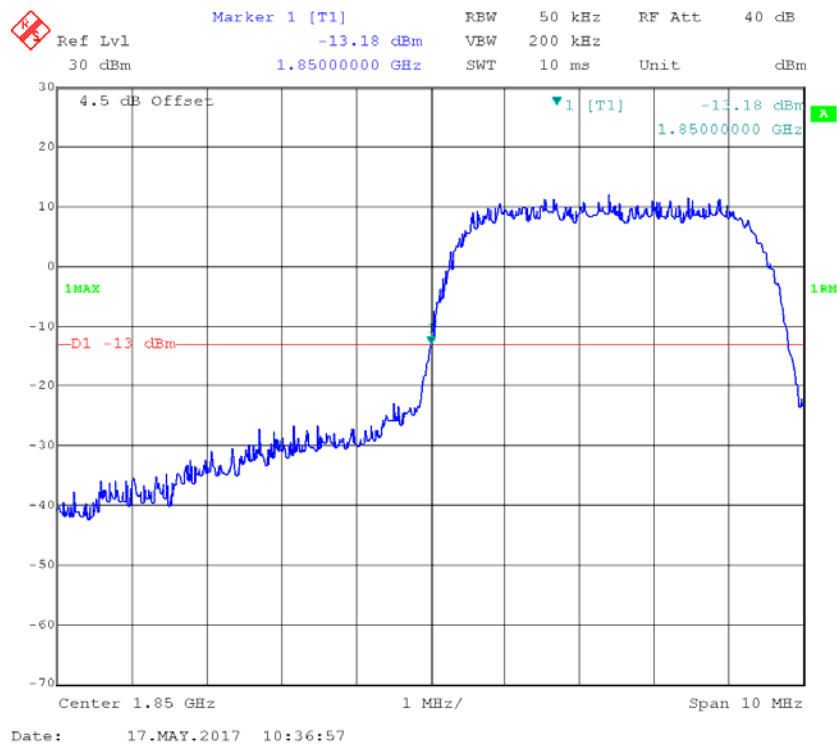


REL99 Band II, Right Band Edge

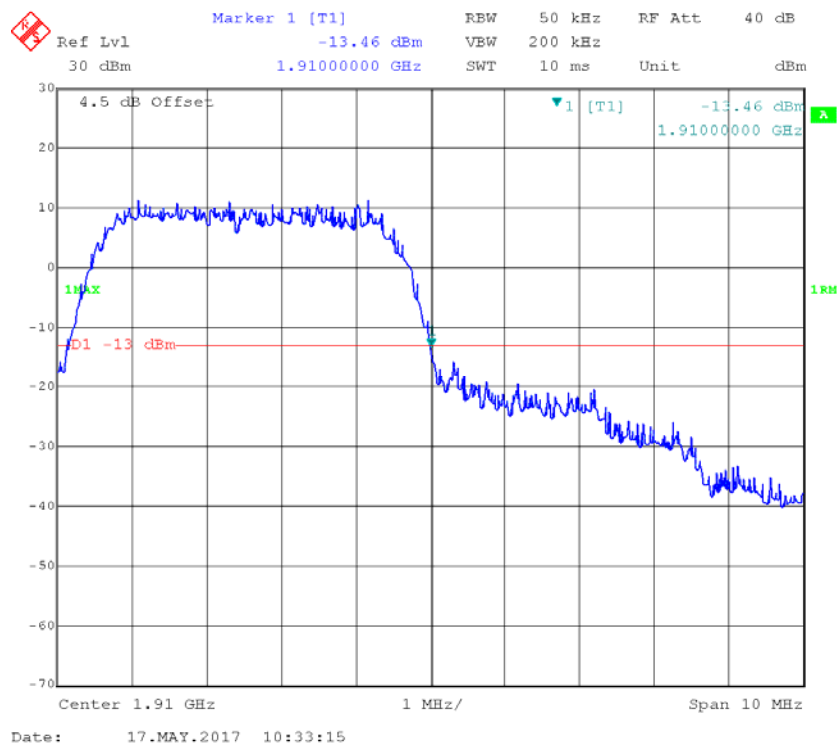


HSDPA Band II, Left Band Edge

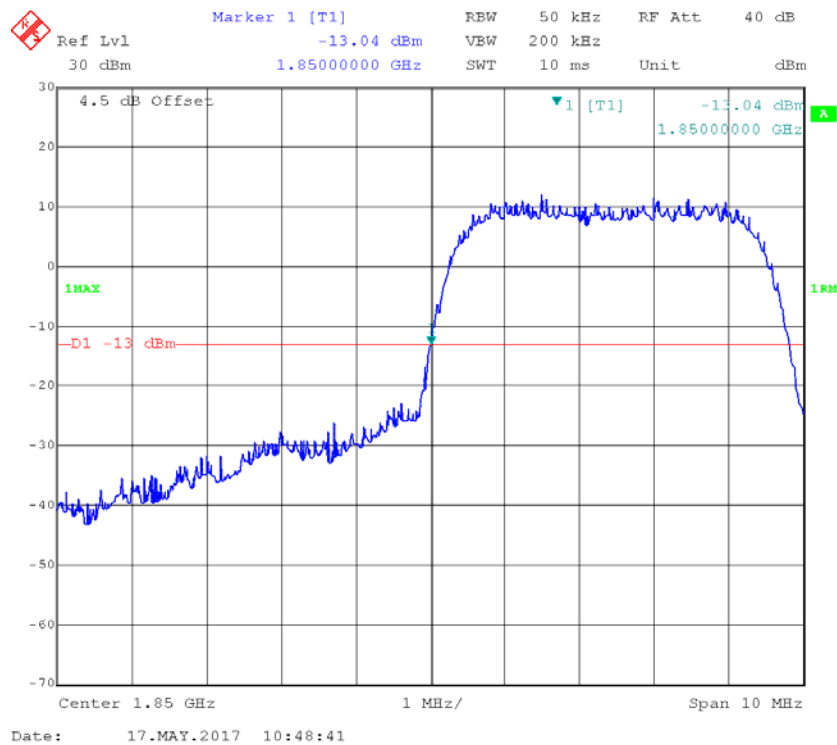


HSDPA Band II, Right Band Edge

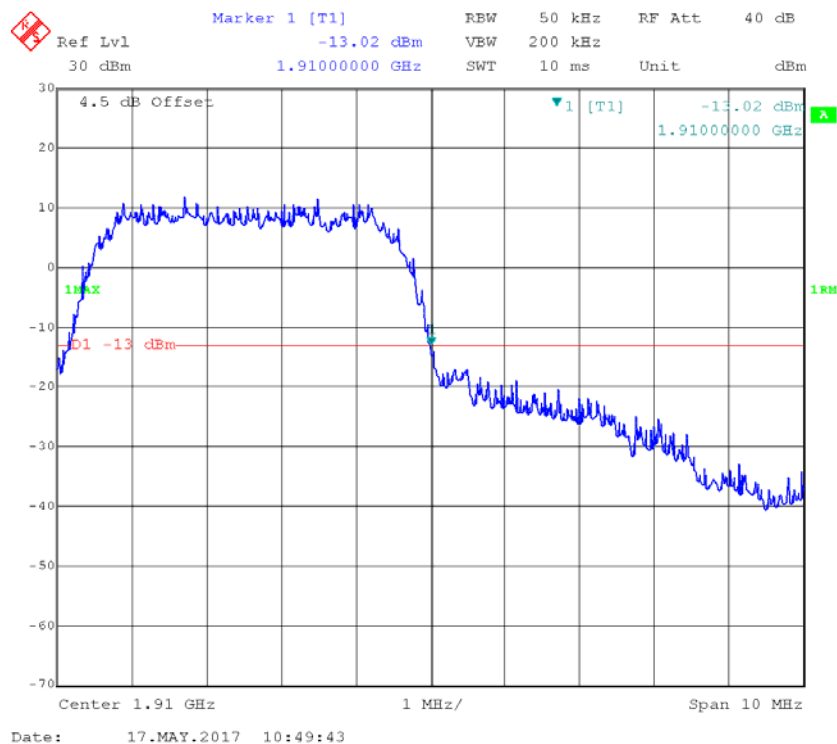

HSUPA Band II, Left Band Edge

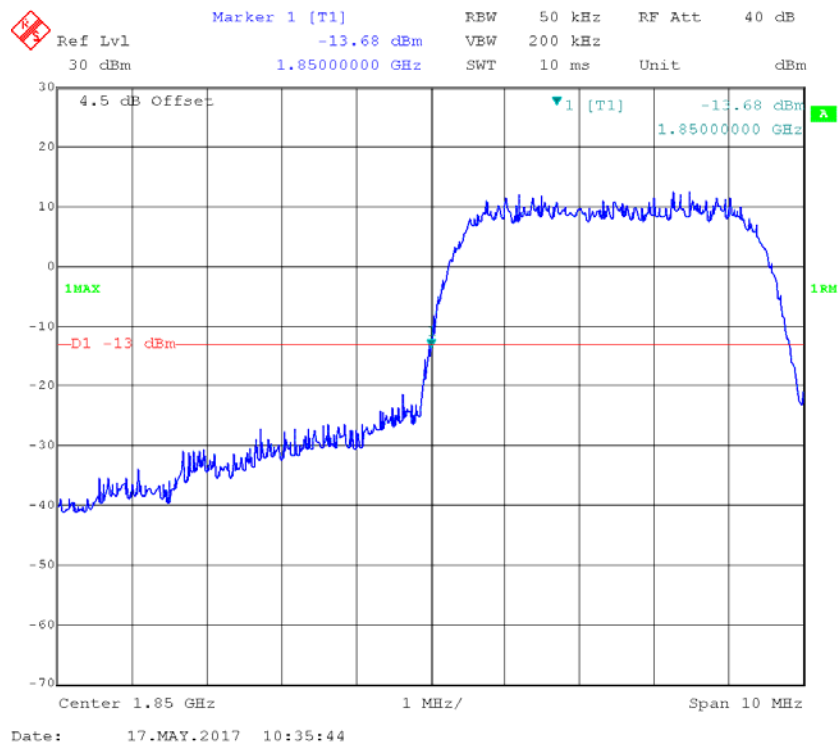


HSUPA Band II, Right Band Edge

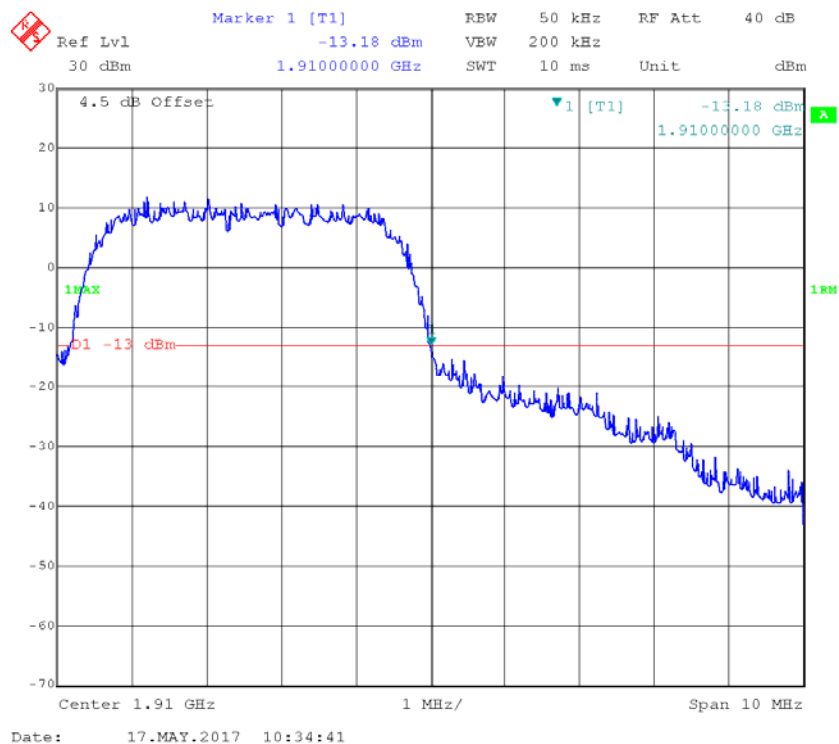


WCDMA Band V


REL99 Band V, Left Band Edge

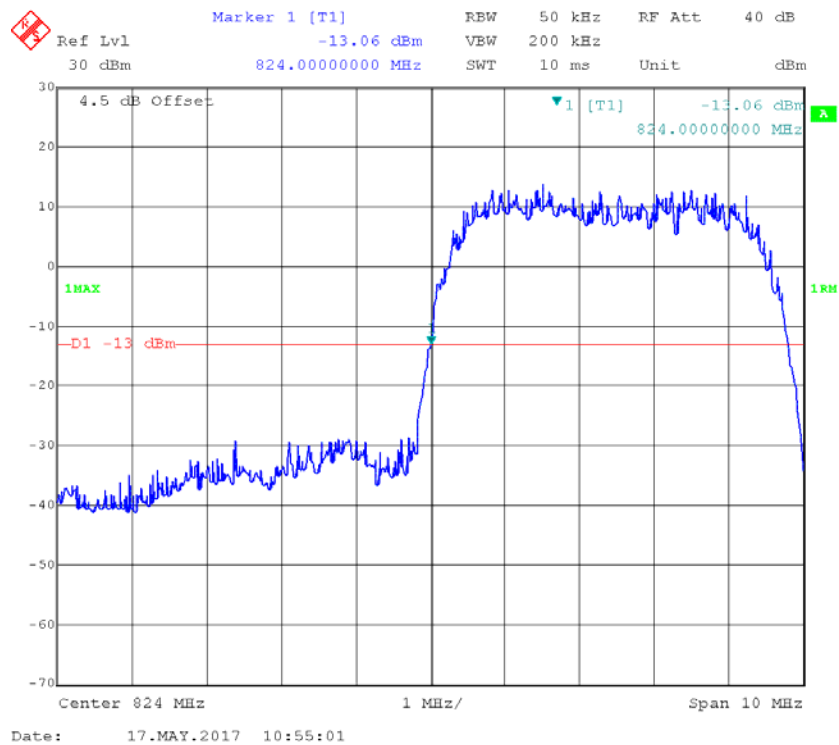


REL99 Band V Right Band Edge

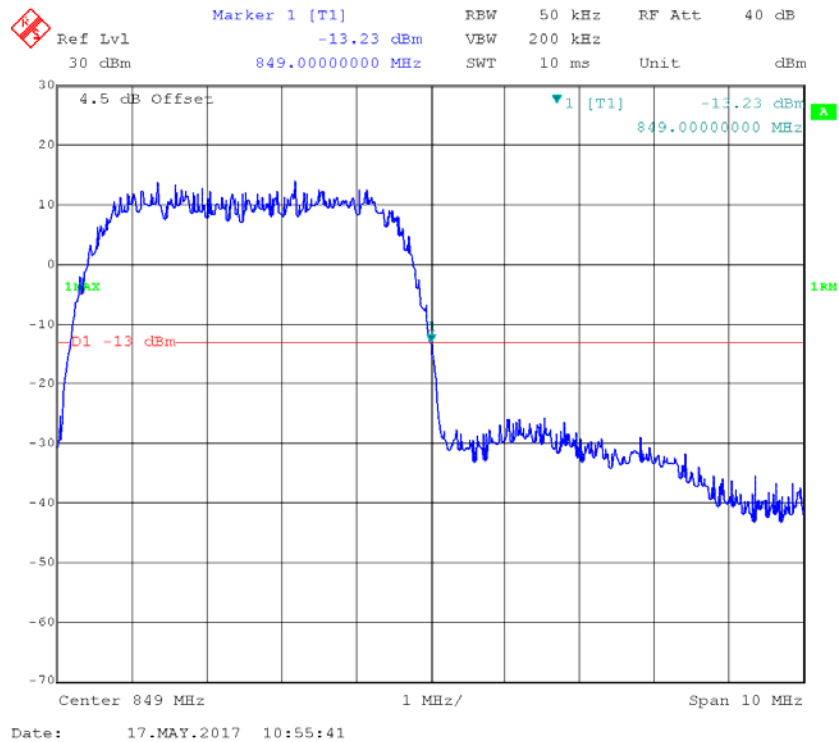


HSDPA Band V, Left Band Edge

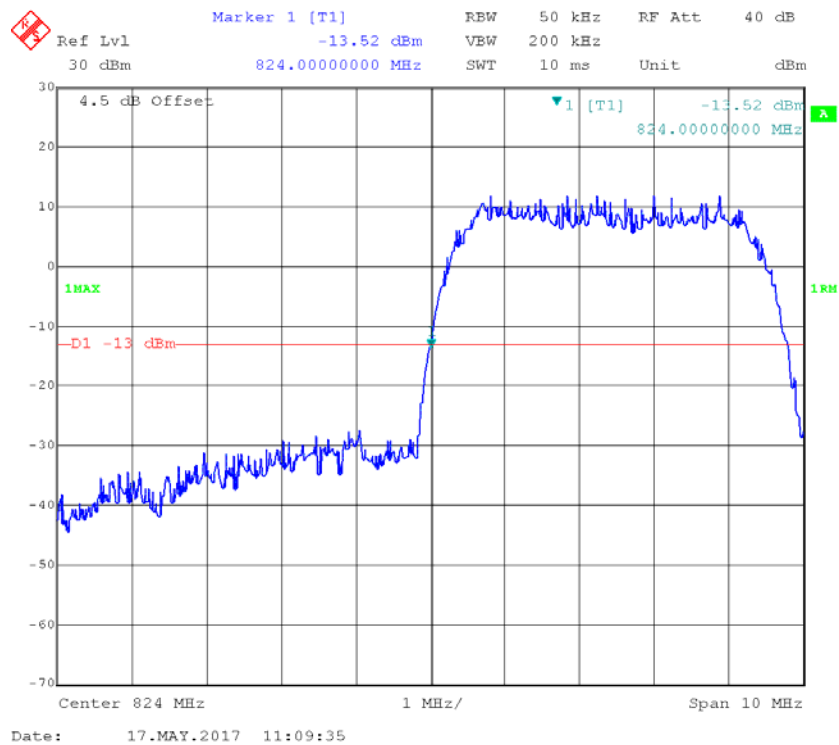


HSDPA Band V, Right Band Edge

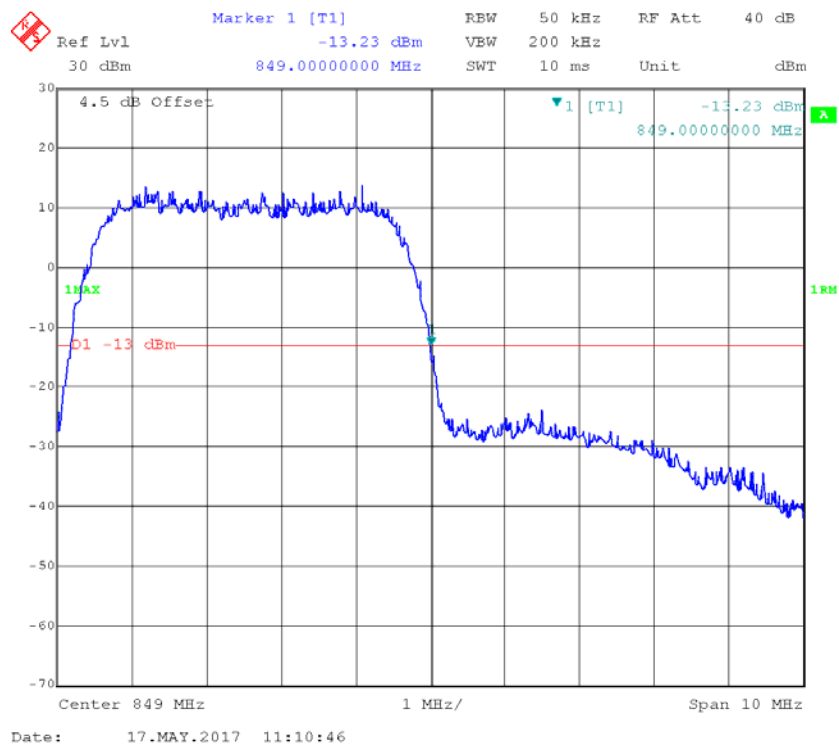

HSUPA Band V, Left Band Edge

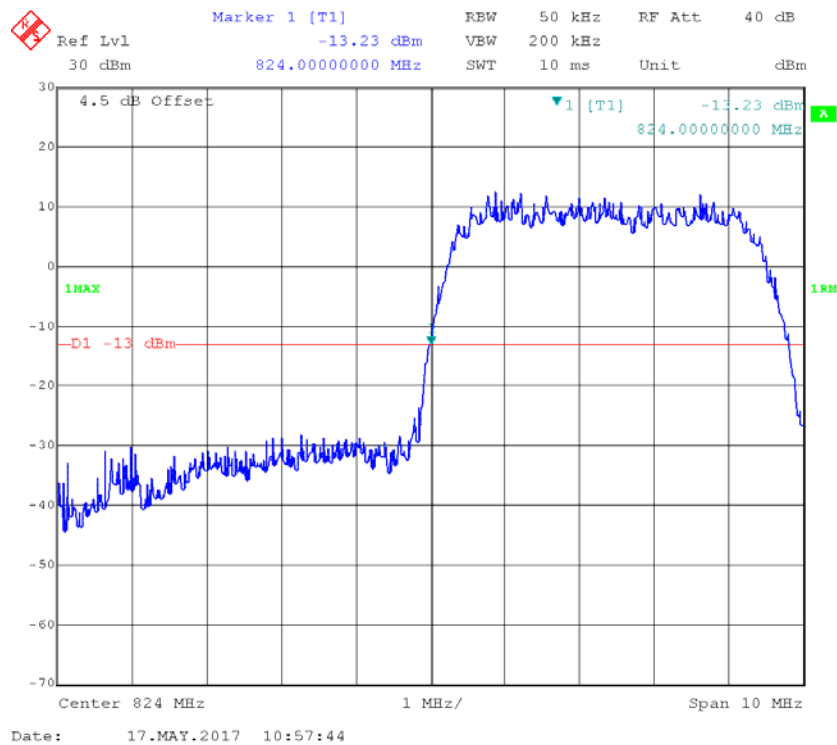


HSUPA Band V, Right Band Edge

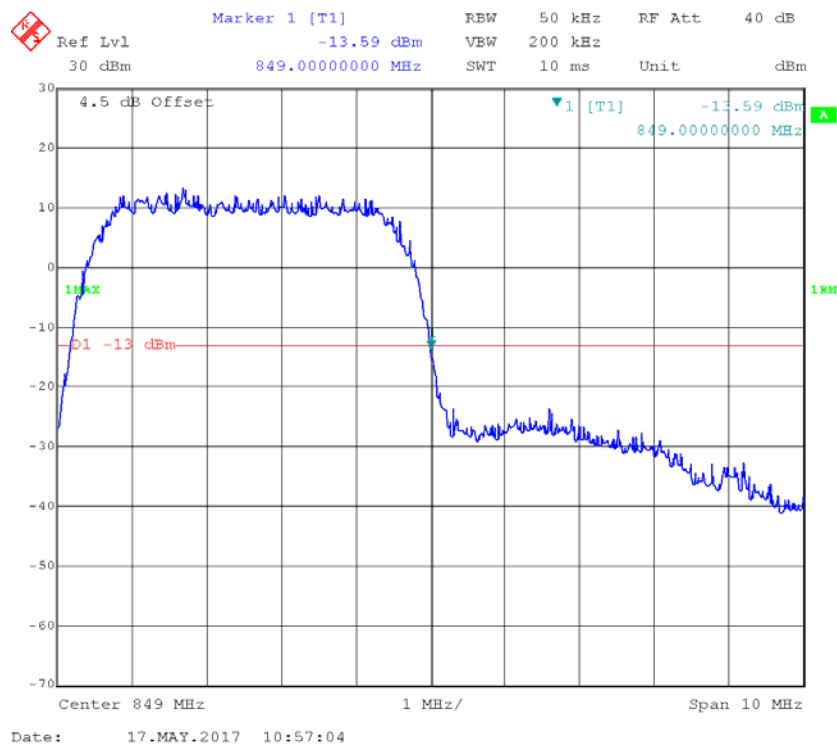


LTE Band II


QPSK_1.4MHz_Left

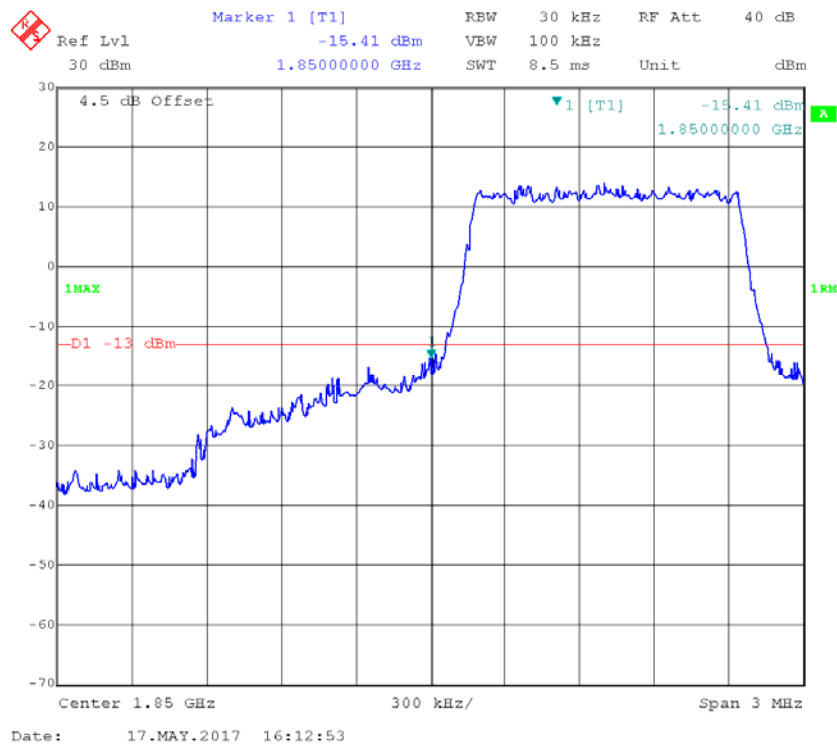


QPSK_1.4MHz_Right

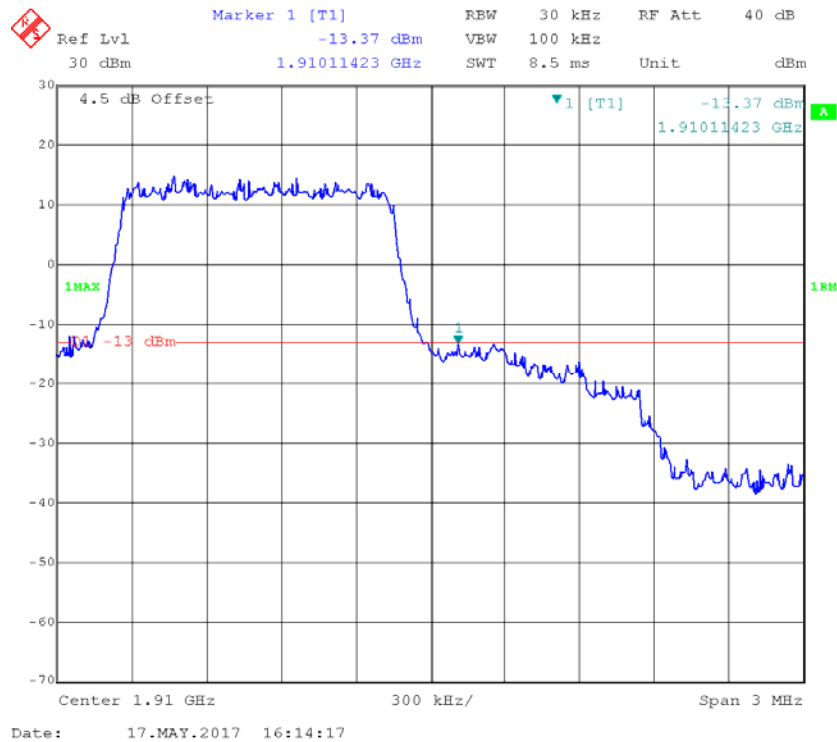


QPSK_3MHz_Left

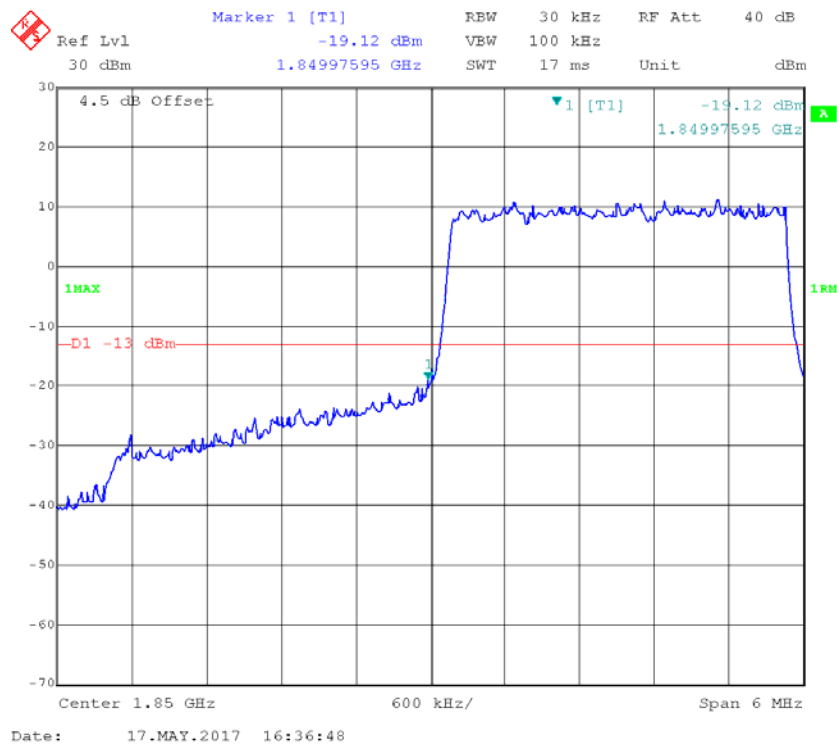


QPSK_3MHz_Right

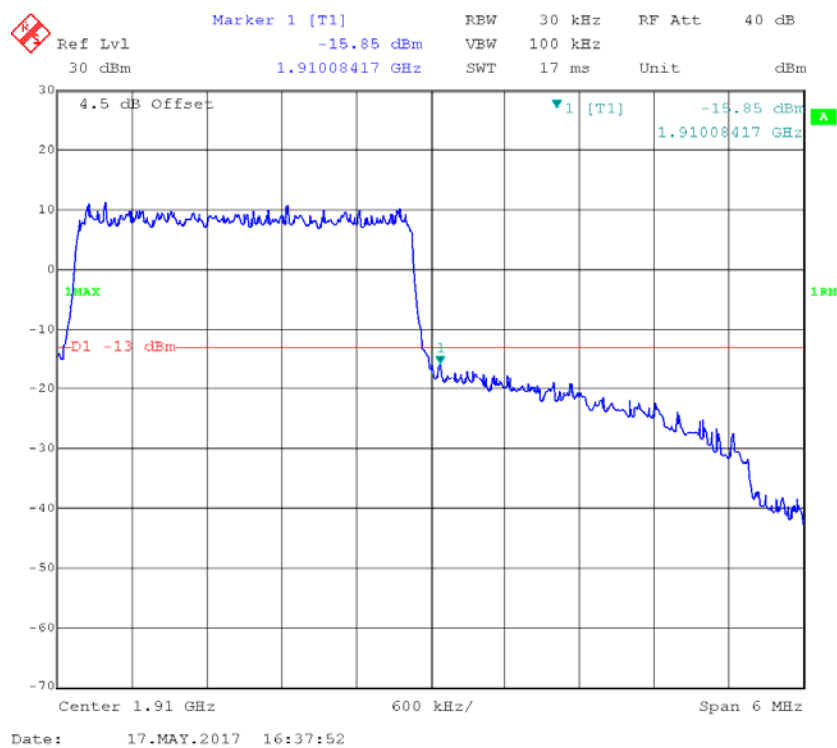


QPSK_5MHz_Left

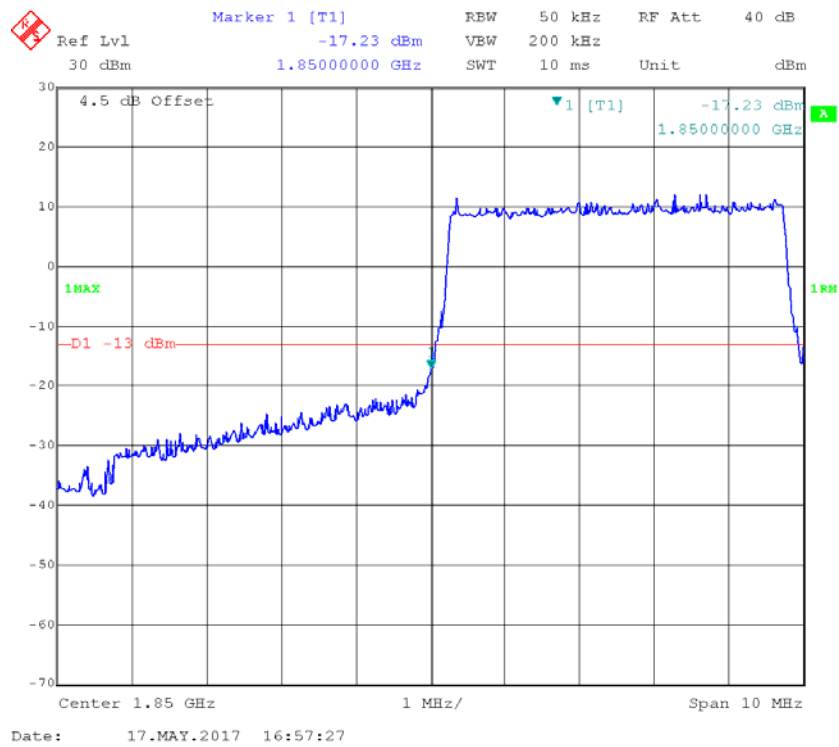


QPSK_5MHz_Right

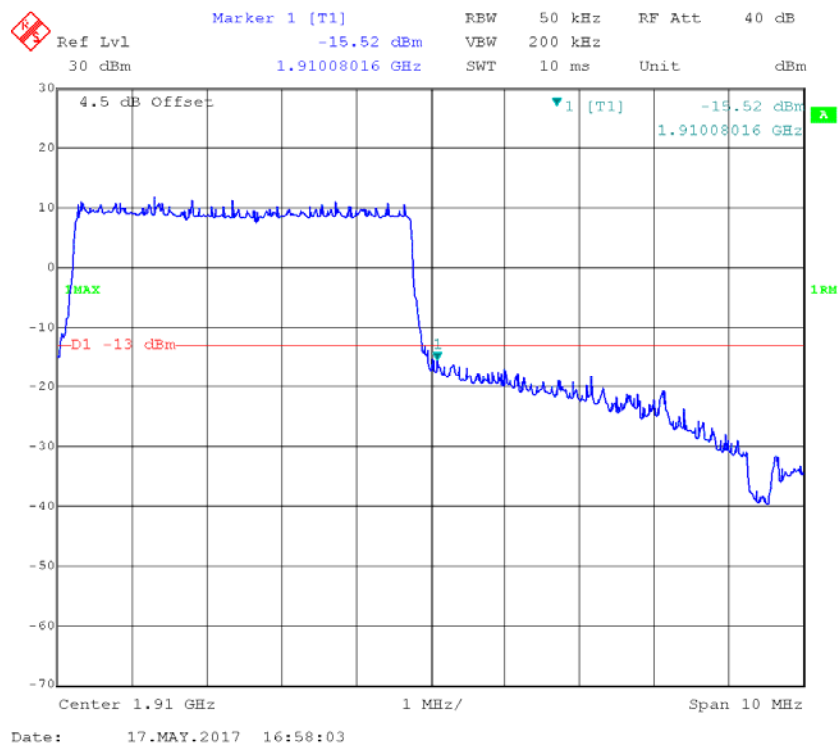


QPSK_10MHz_Left

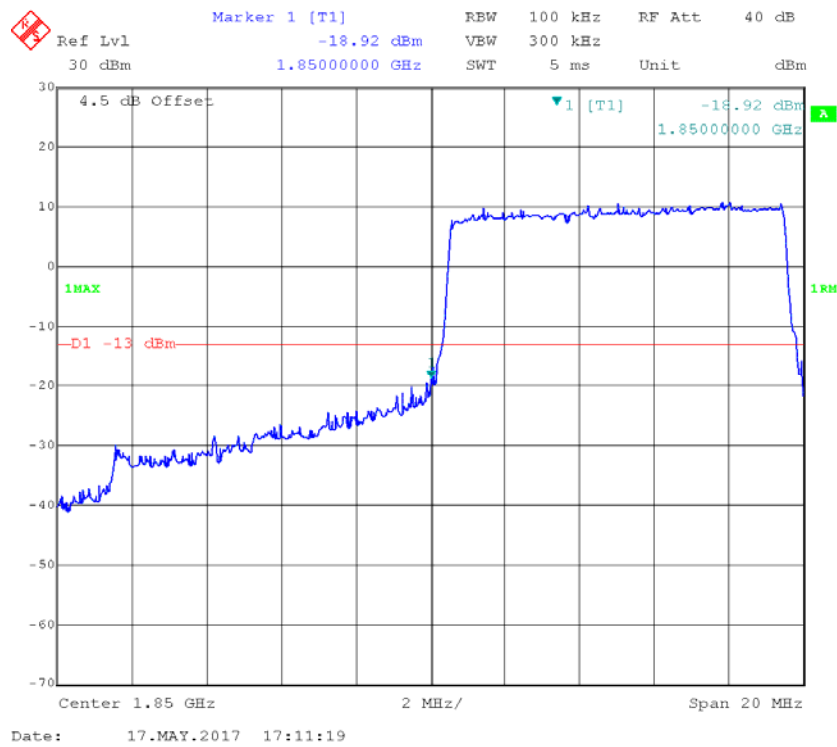

QPSK_10MHz_Right

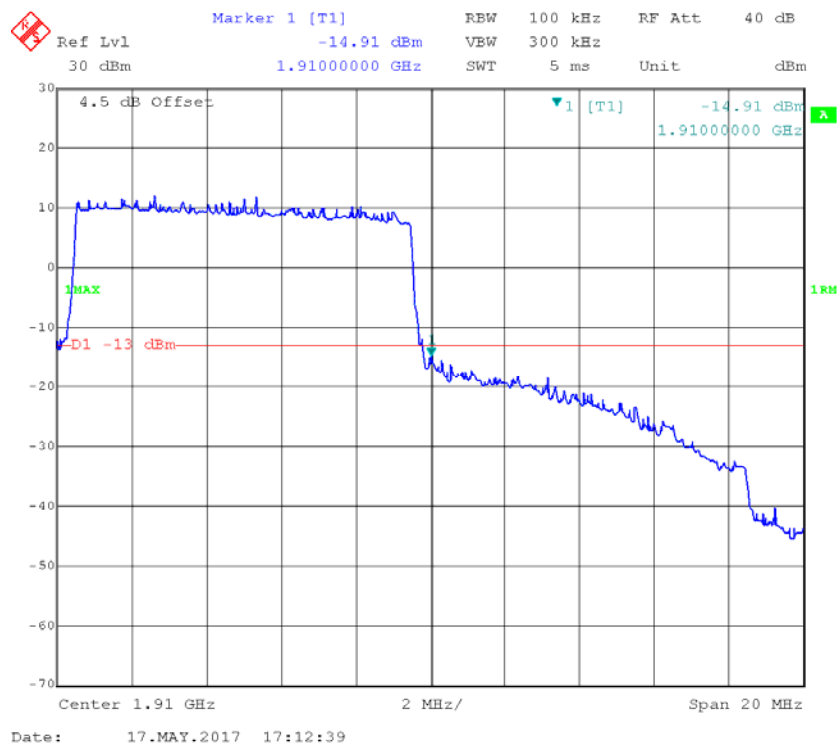


QPSK_15MHz_Left

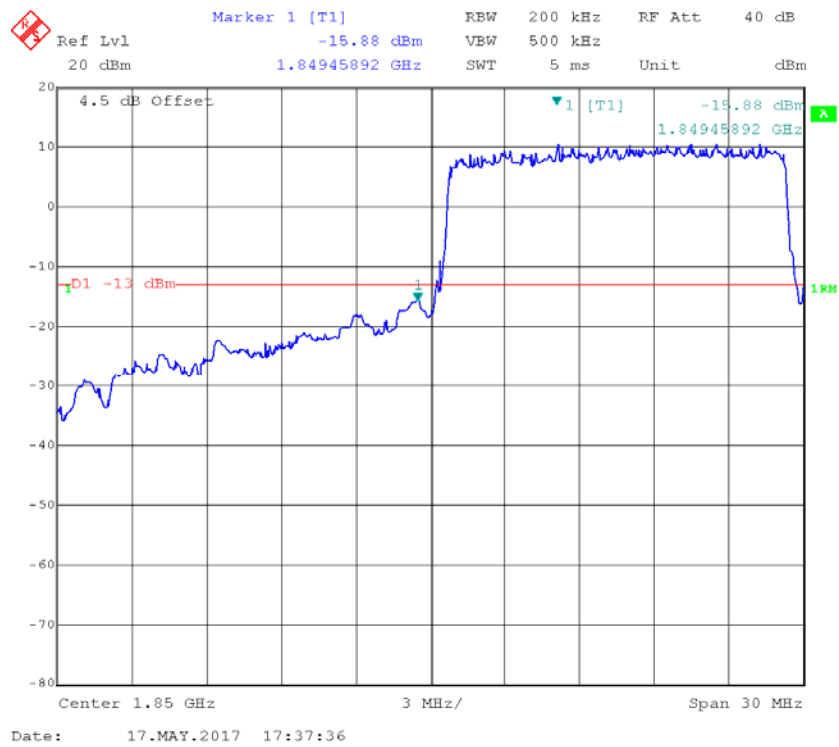


QPSK_15MHz_Right




QPSK_20MHz_Left

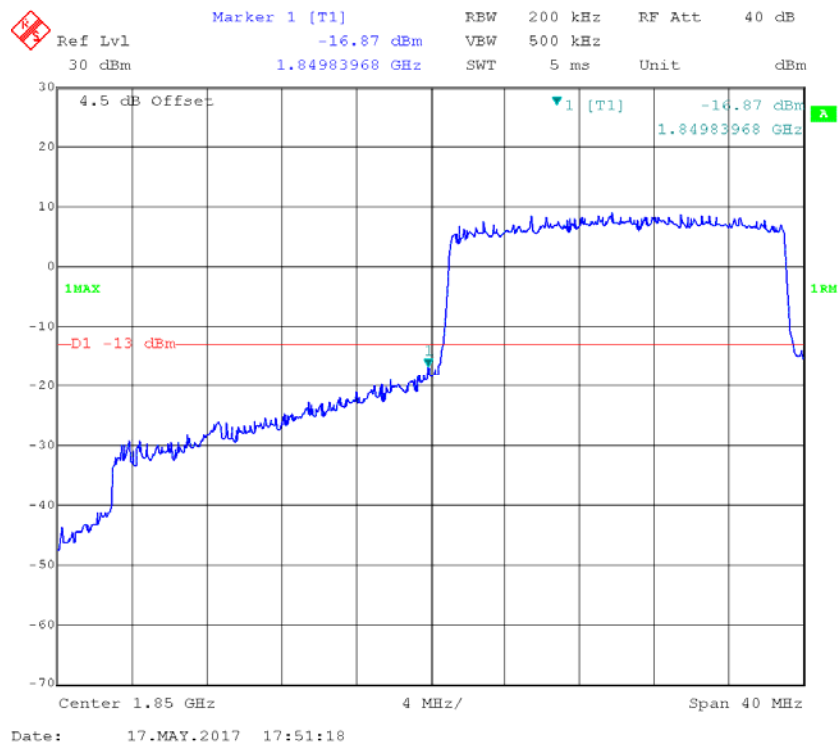


QPSK_20MHz_Right

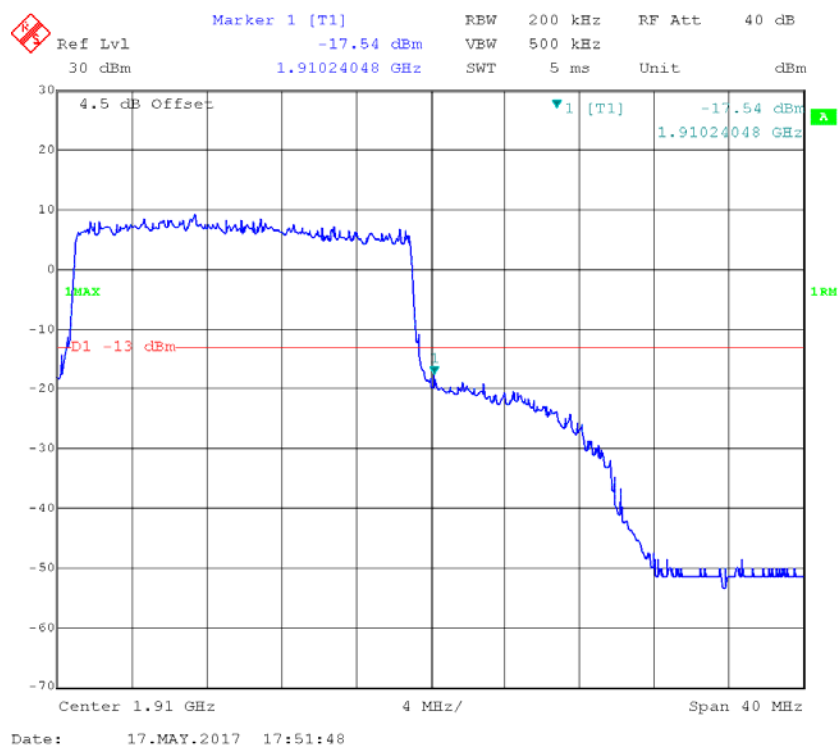


16-QAM_1.4MHz_Left

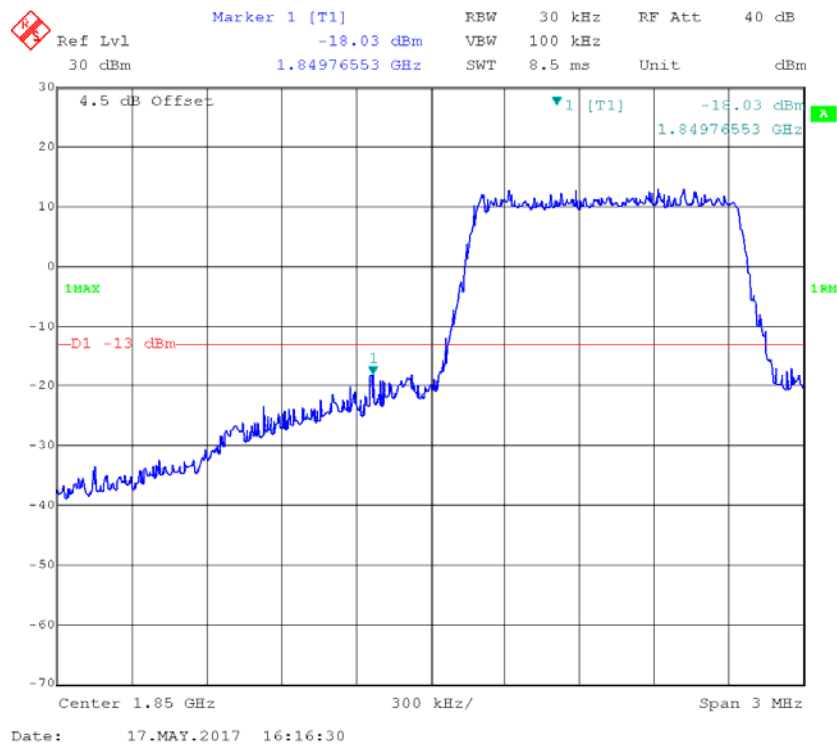


16-QAM_1.4MHz_Right

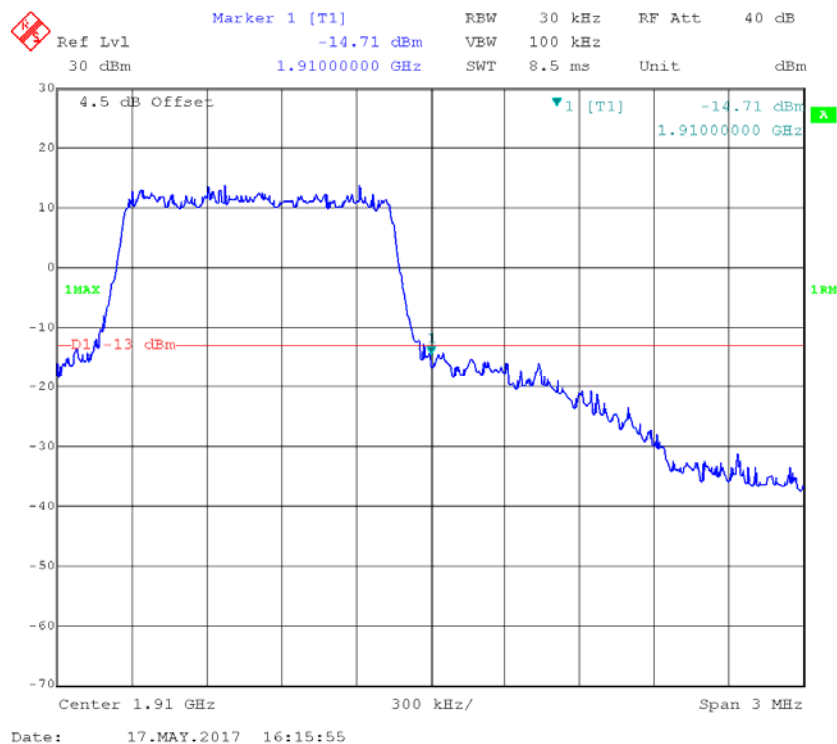


16-QAM_3MHz_Left

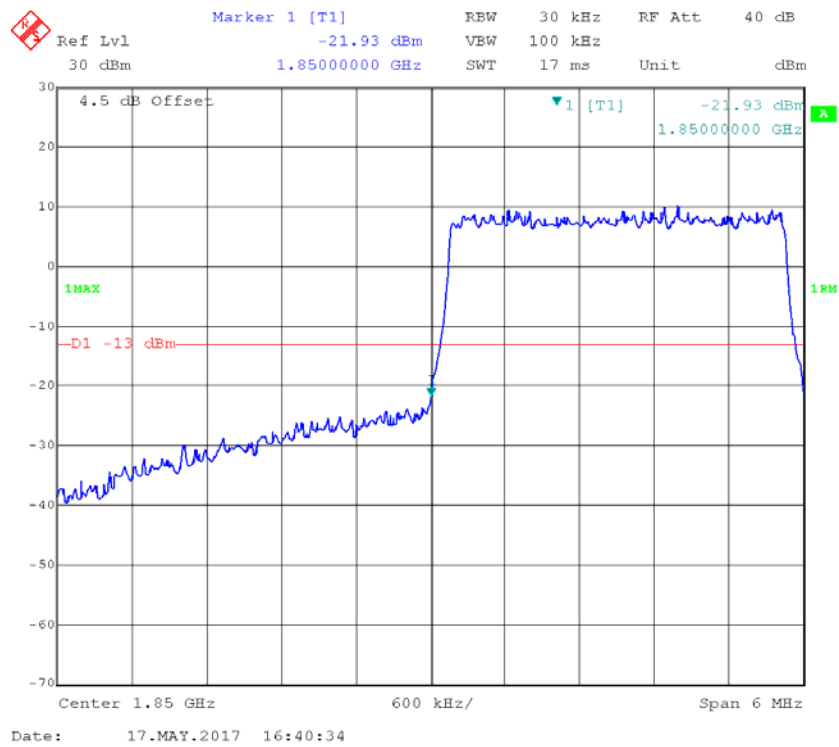


16-QAM_3MHz_Right

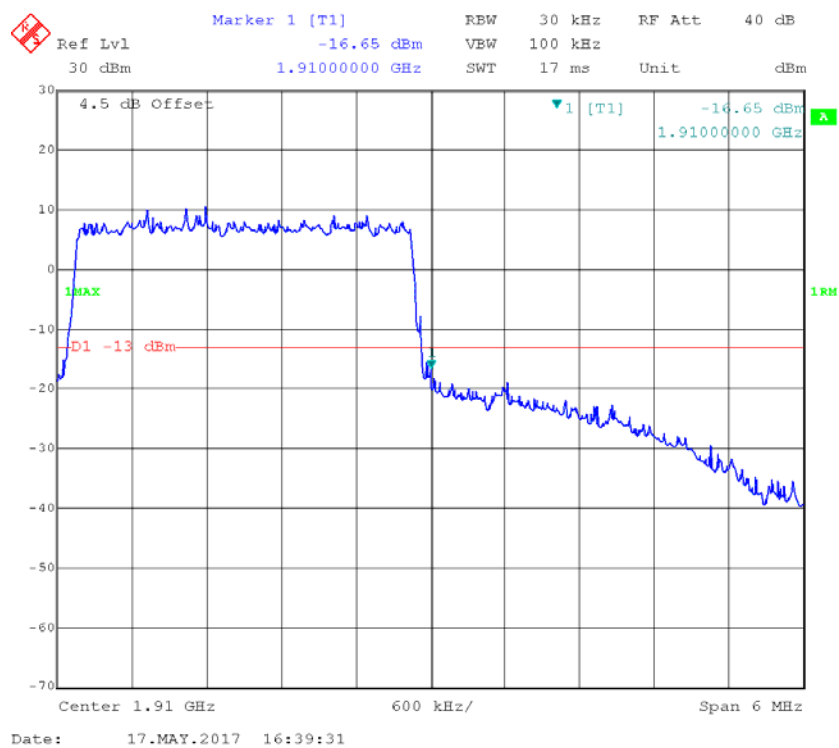


16-QAM_5MHz_Left

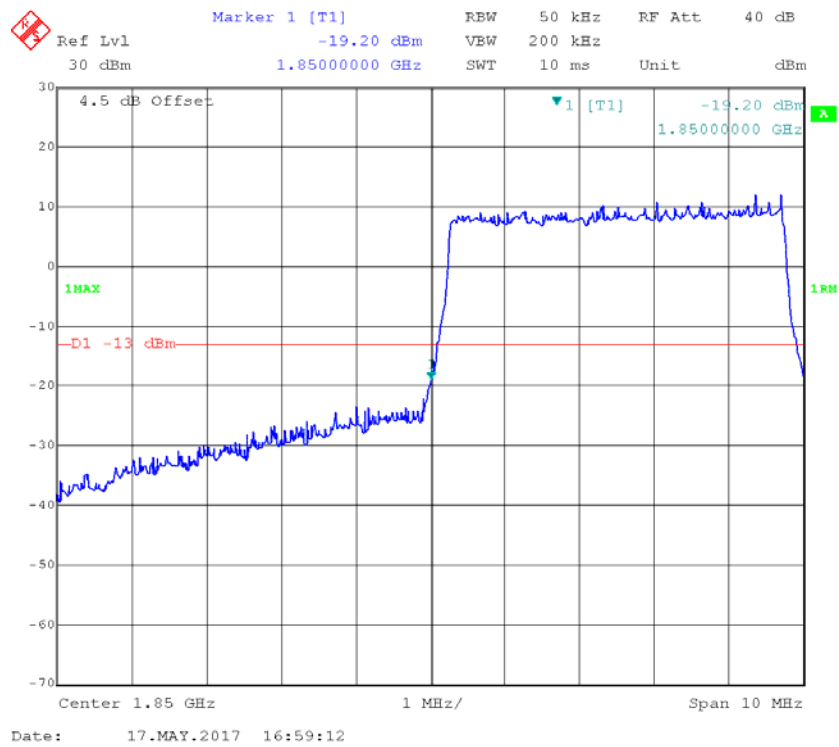


16-QAM_5MHz_Right

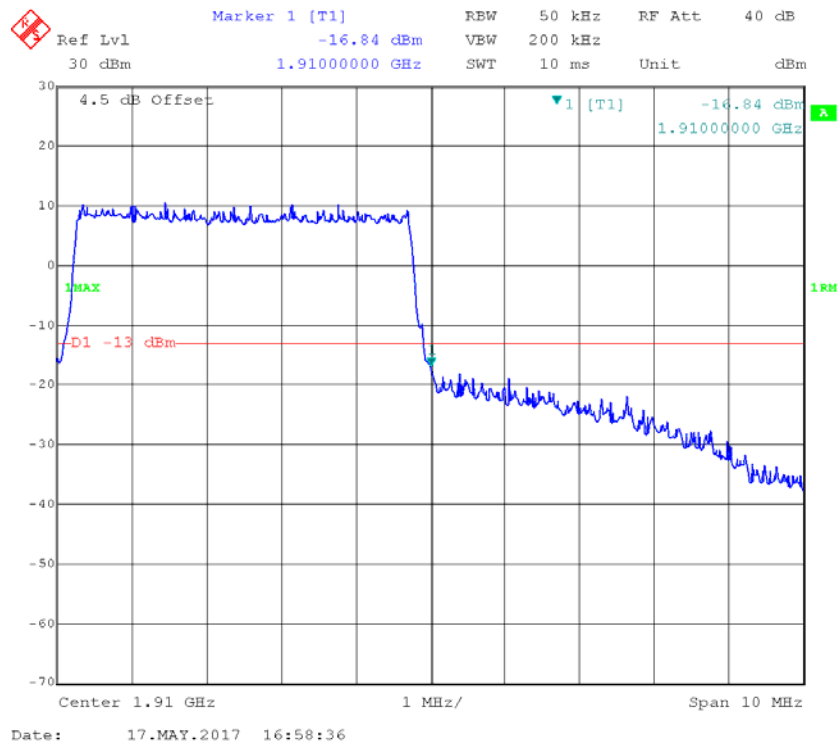


16-QAM_10MHz_Left

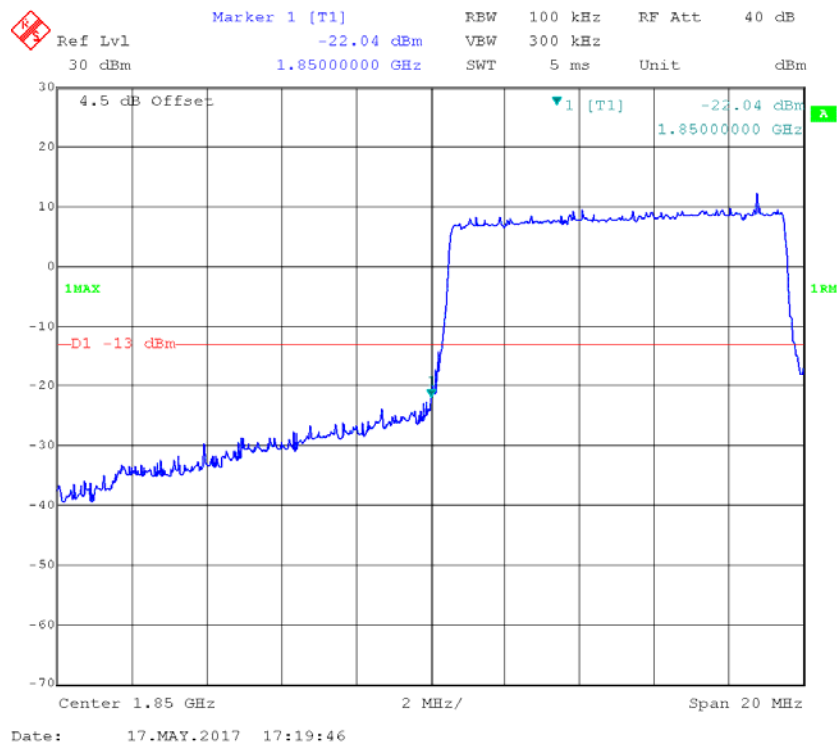


16-QAM_10MHz_Right

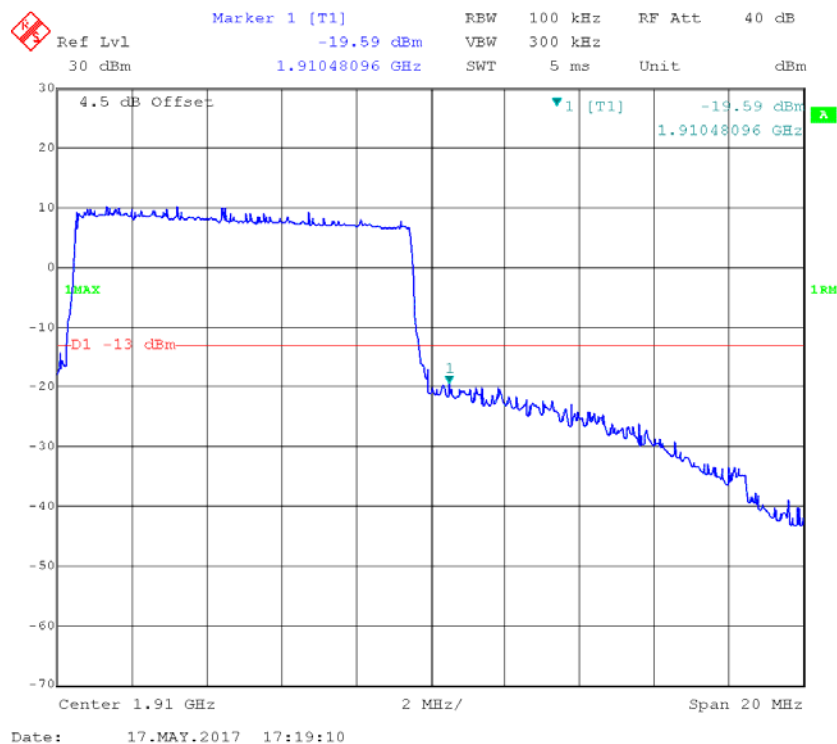


16-QAM_15MHz_Left

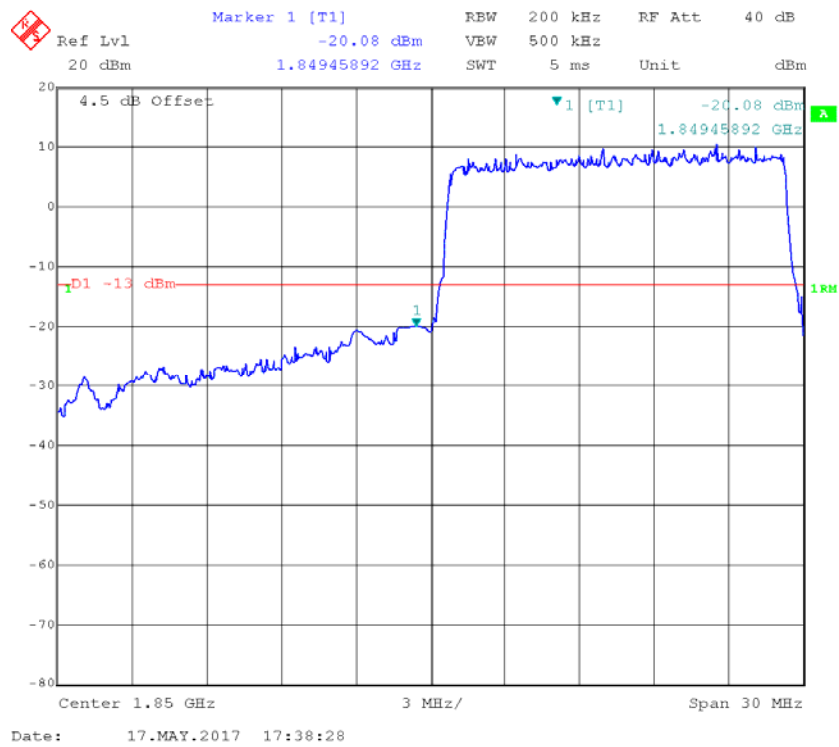


16-QAM_15MHz_Right

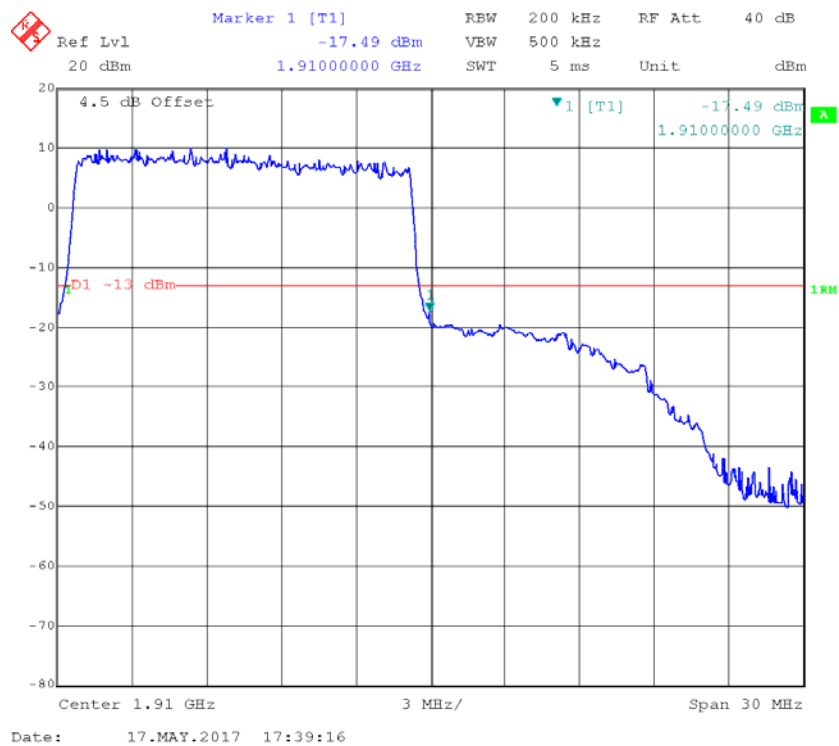

16-QAM_20MHz_Left

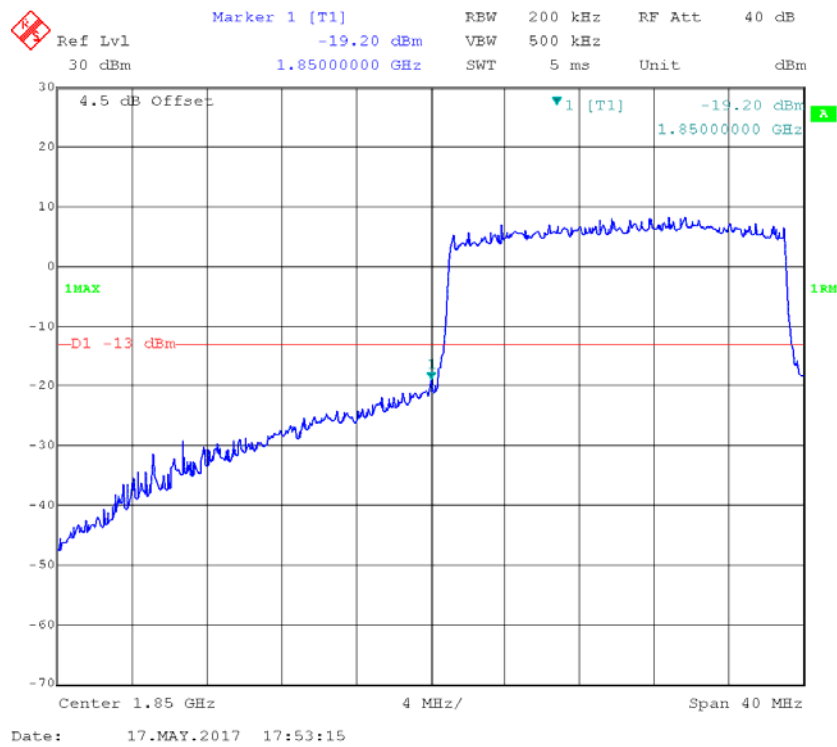


16-QAM_20MHz_Right

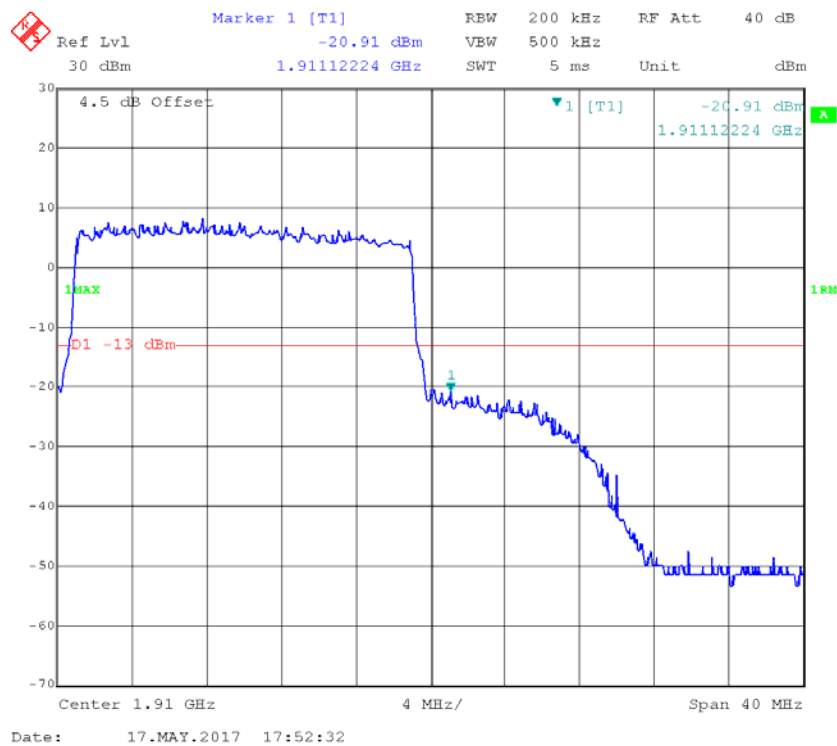


LTE Band IV


QPSK_1.4MHz_Left

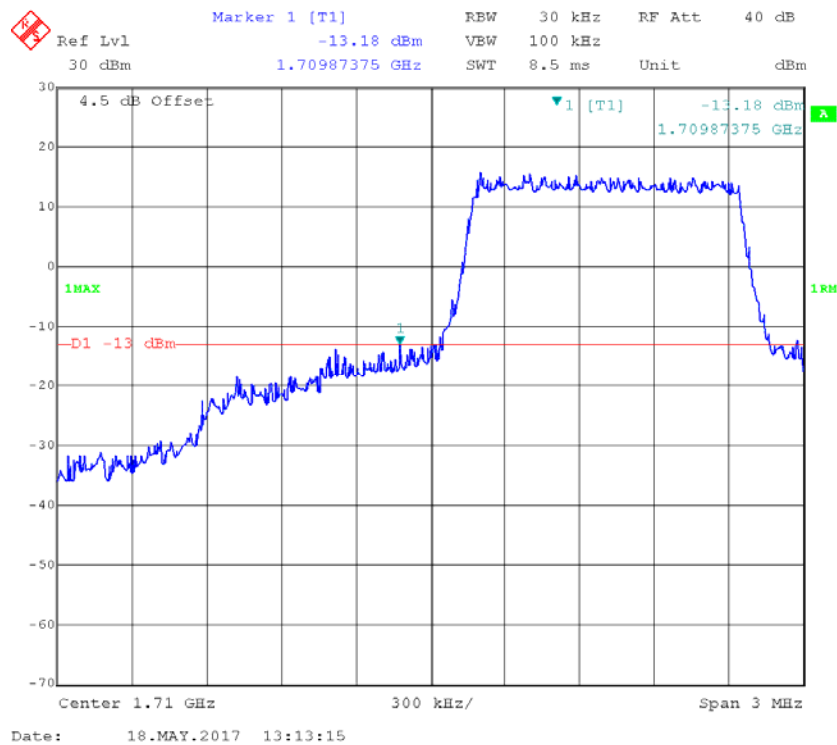


QPSK_1.4MHz_Right

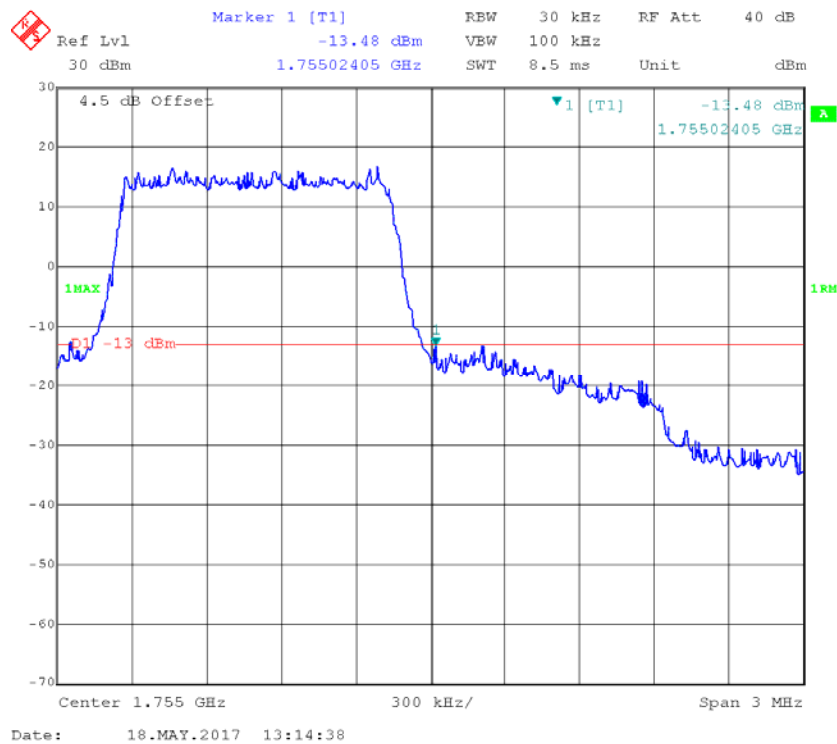


QPSK_3MHz_Left

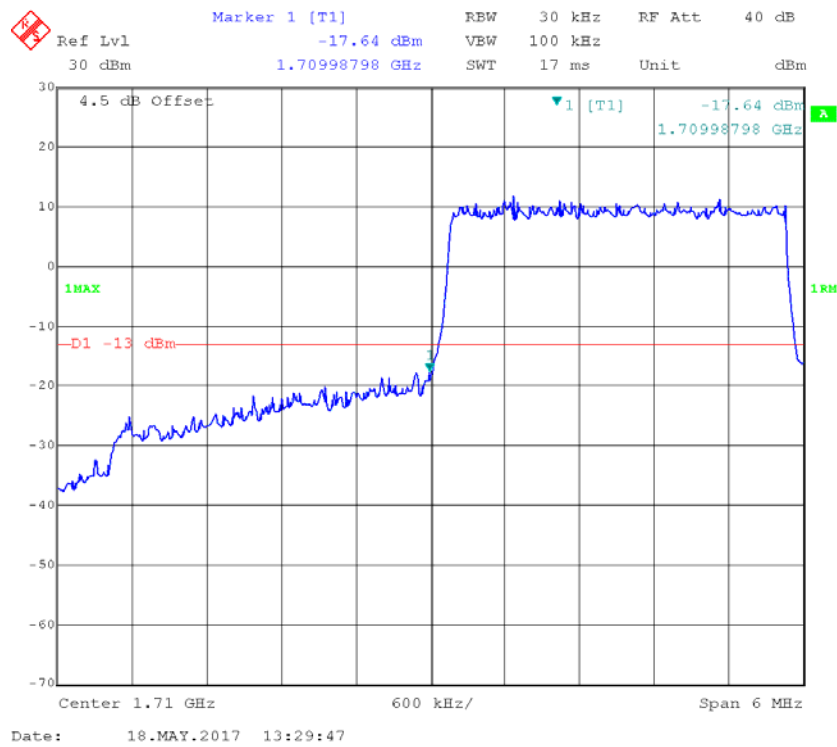


QPSK_3MHz_Right

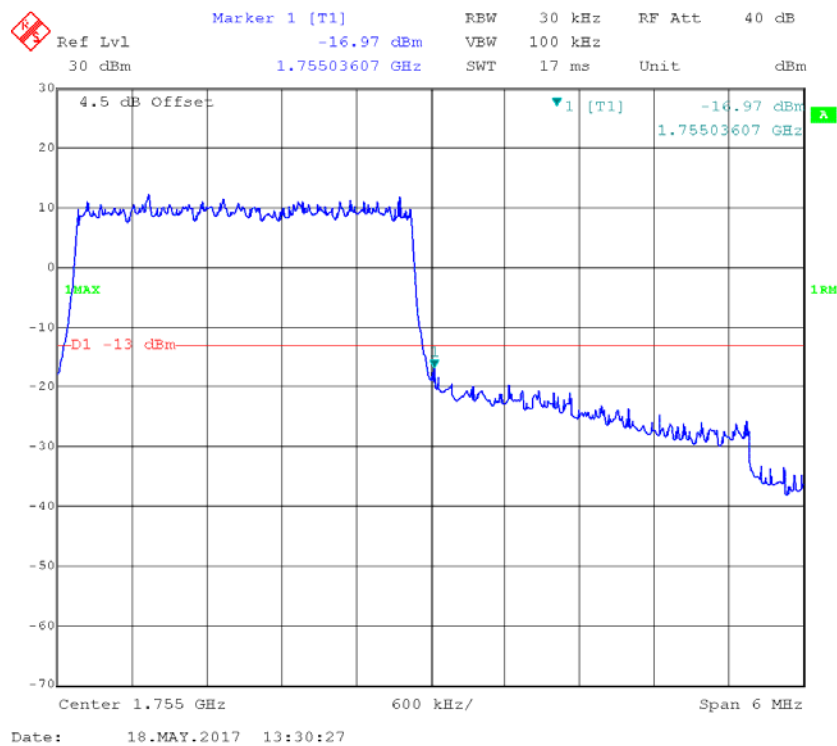


QPSK_5MHz_Left

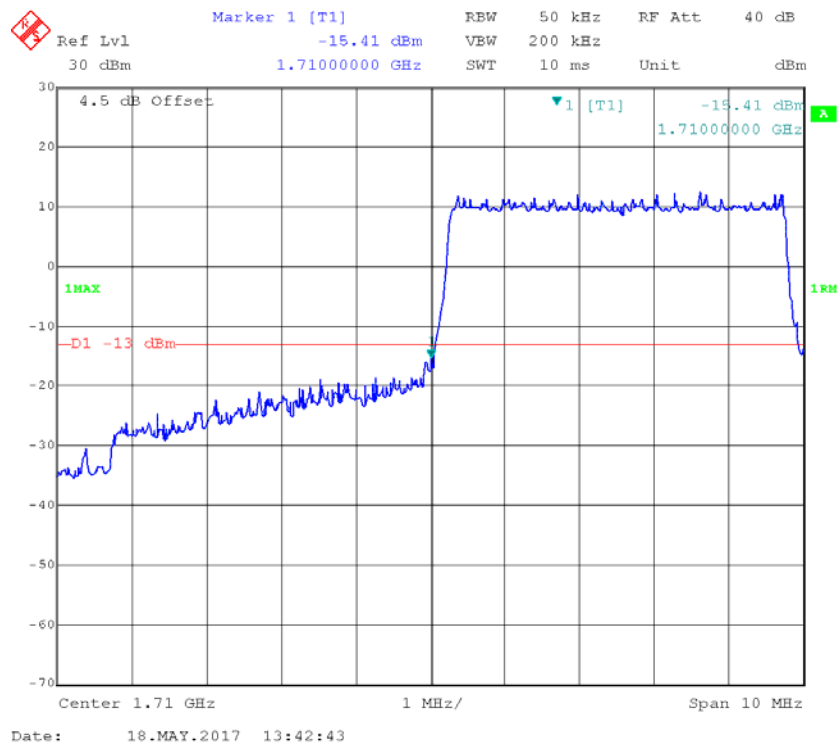


QPSK_5MHz_Right

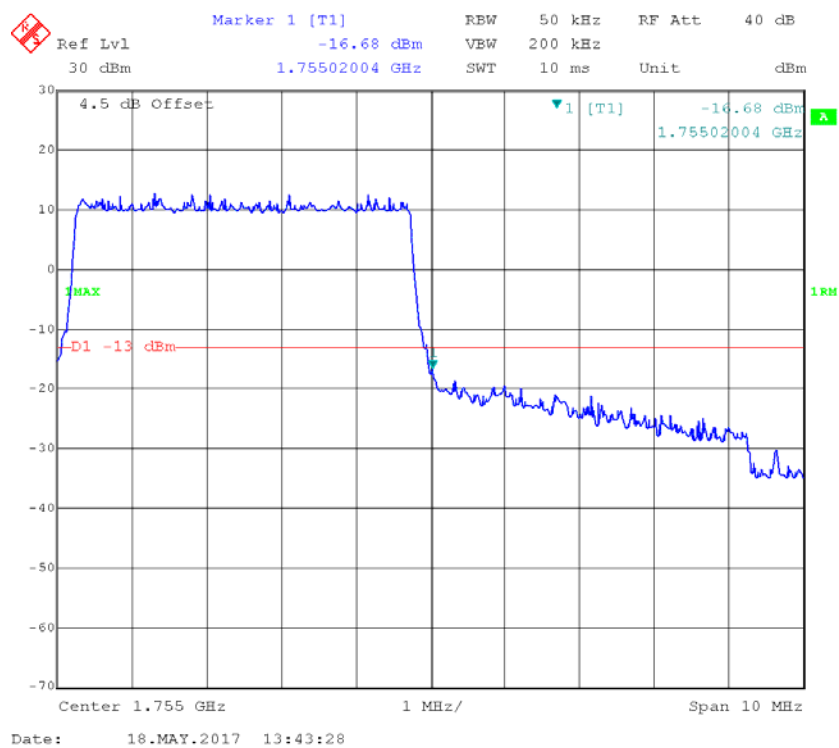


QPSK_10MHz_Left

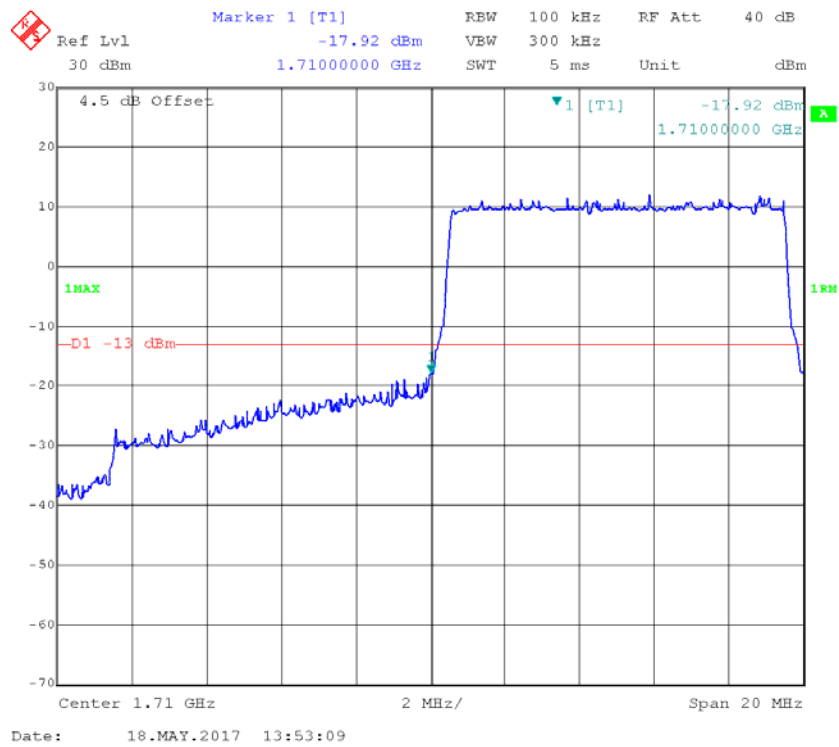


QPSK_10MHz_Right

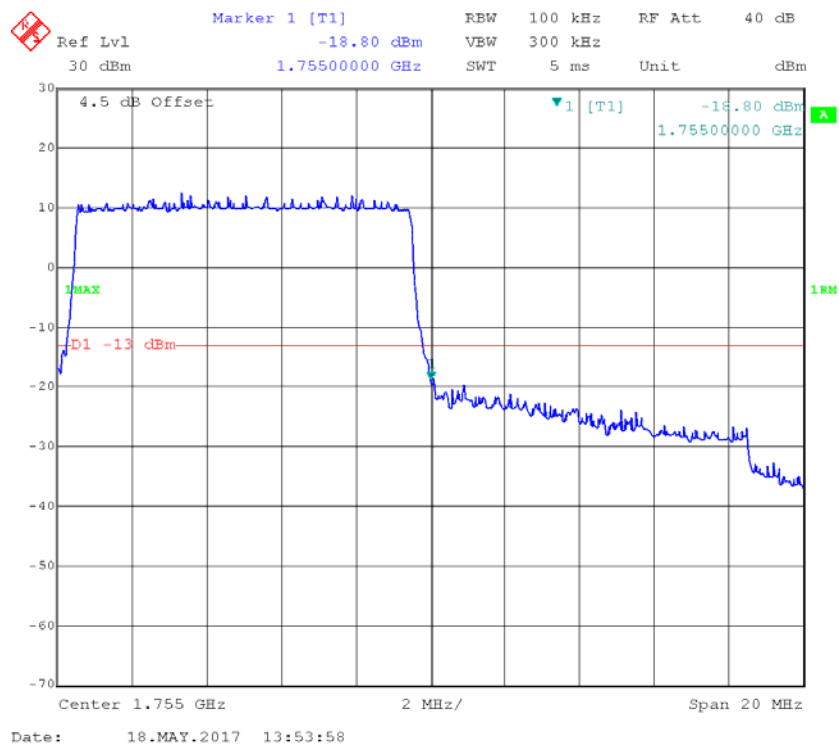


QPSK_15MHz_Left

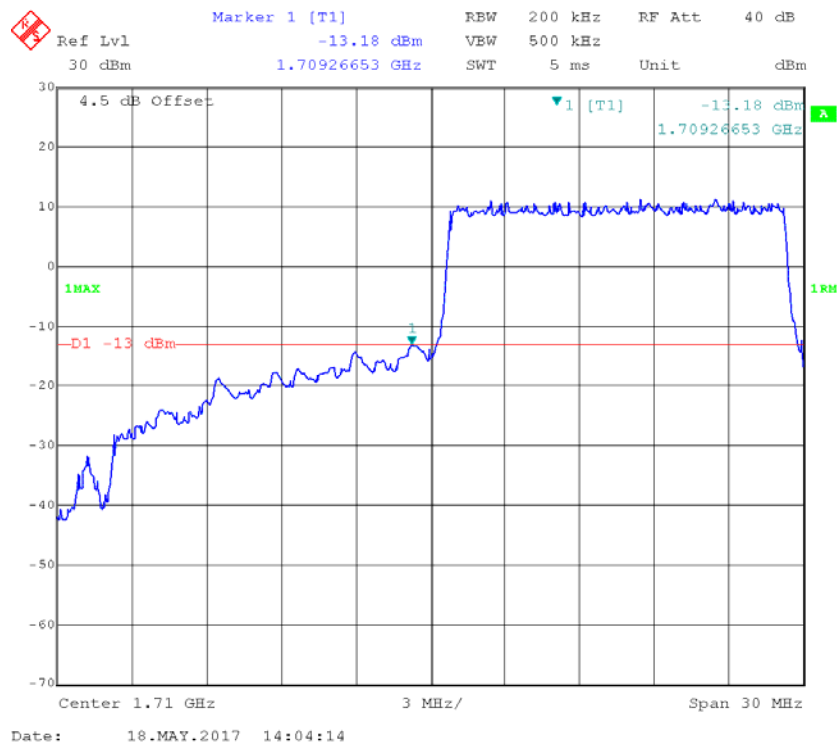


QPSK_15MHz_Right

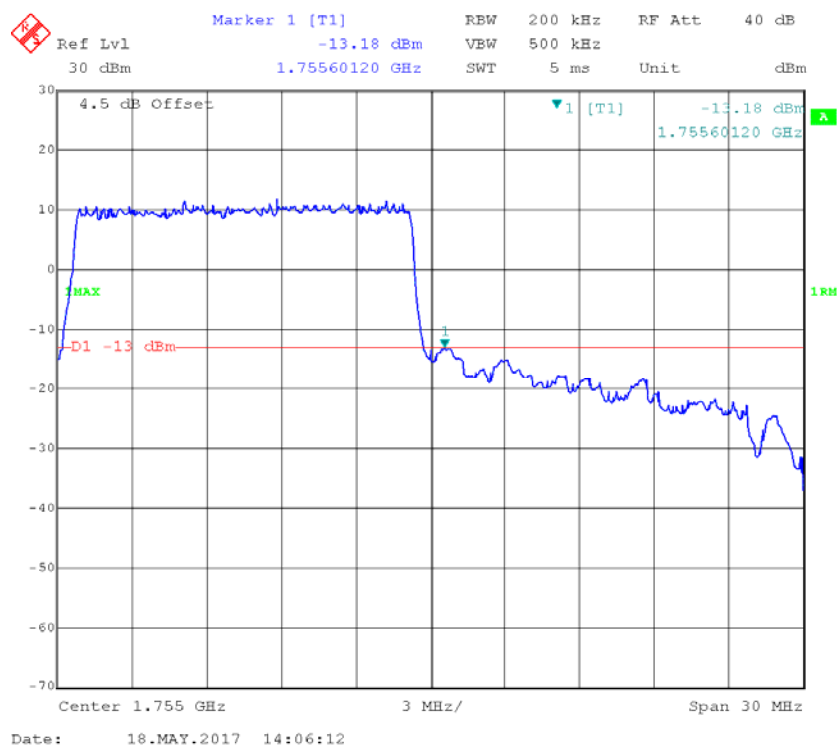


QPSK_20MHz_Left

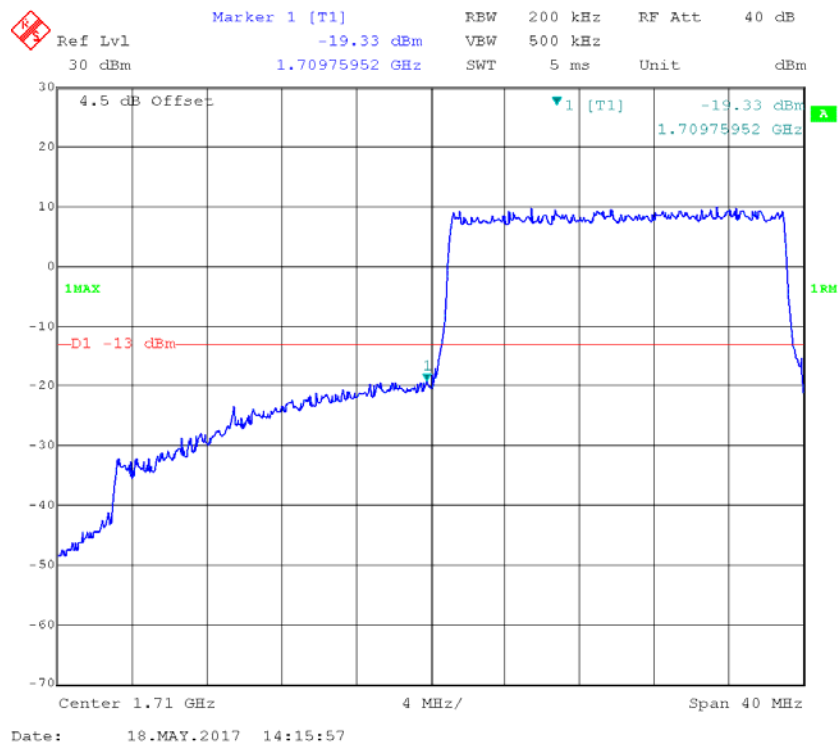


QPSK_20MHz_Right

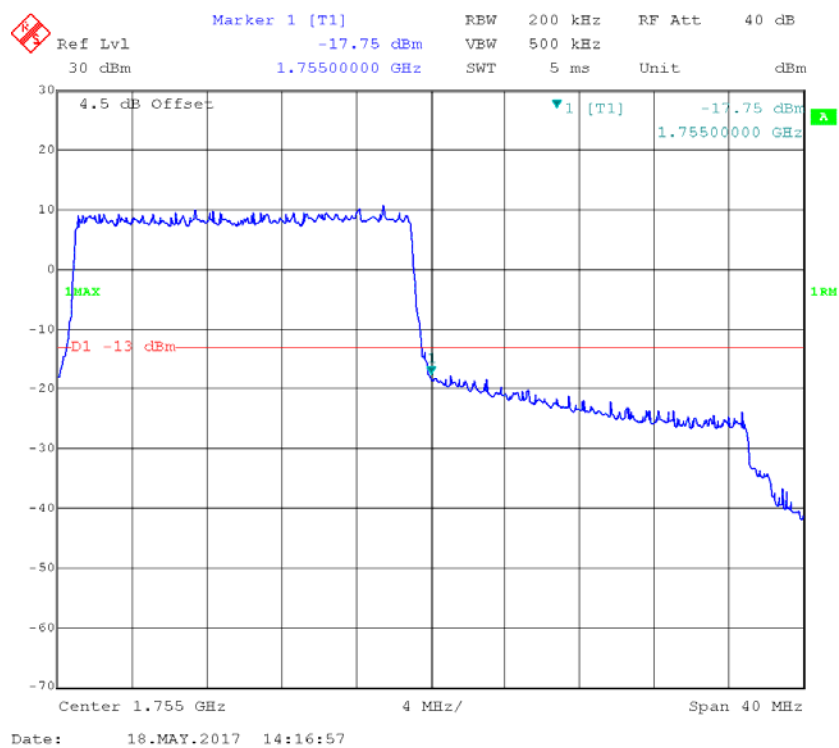


16-QAM_1.4MHz_Left

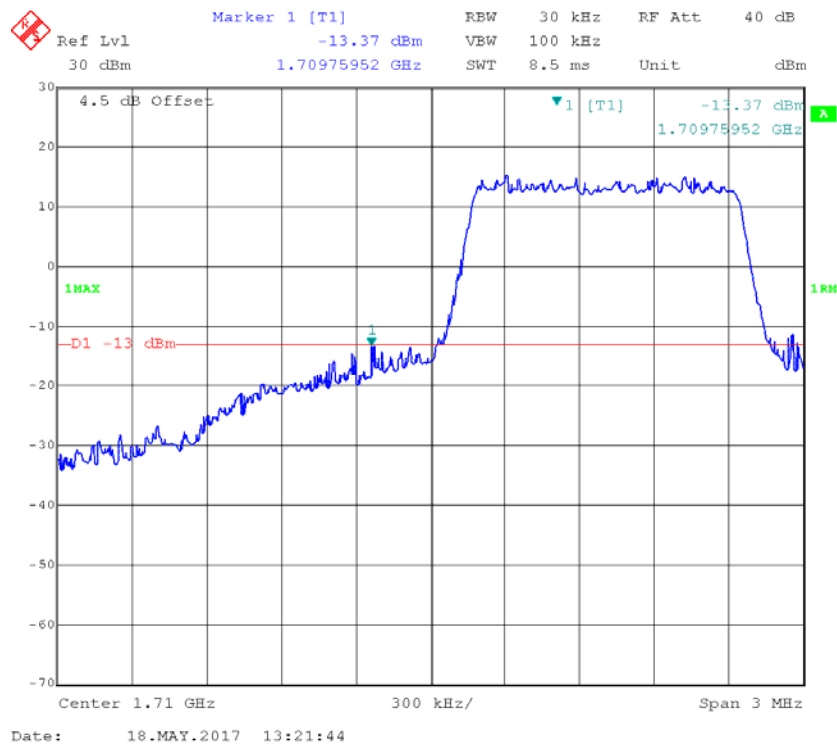


16-QAM_1.4MHz_Right

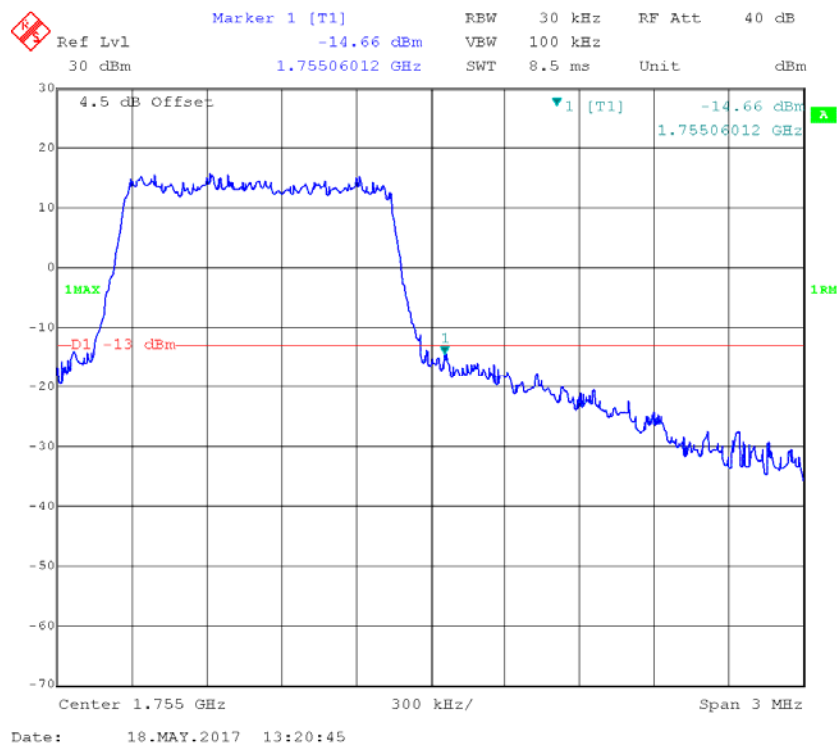


16-QAM_3MHz_Left

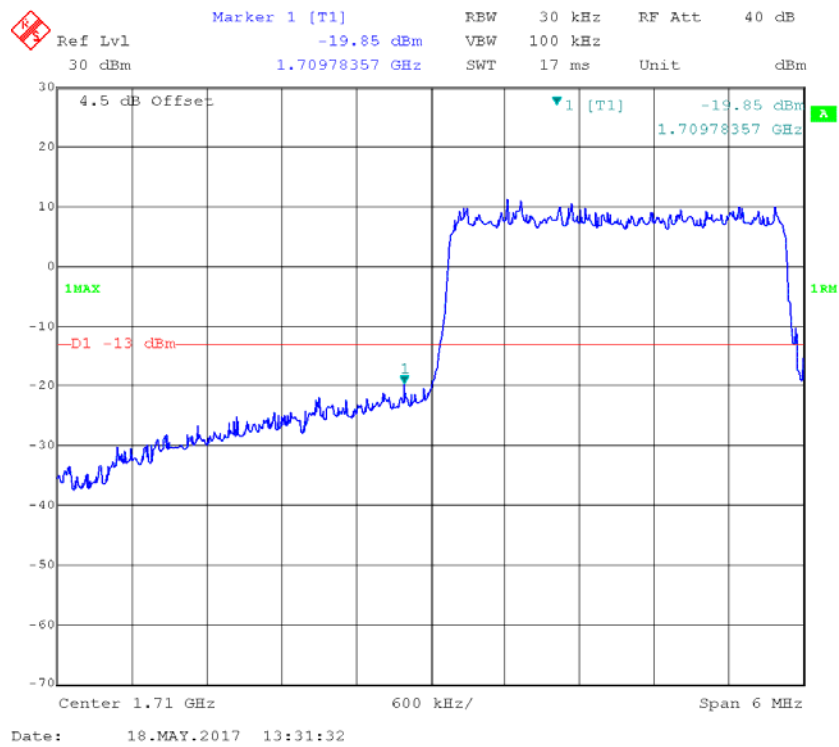


16-QAM_3MHz_Right

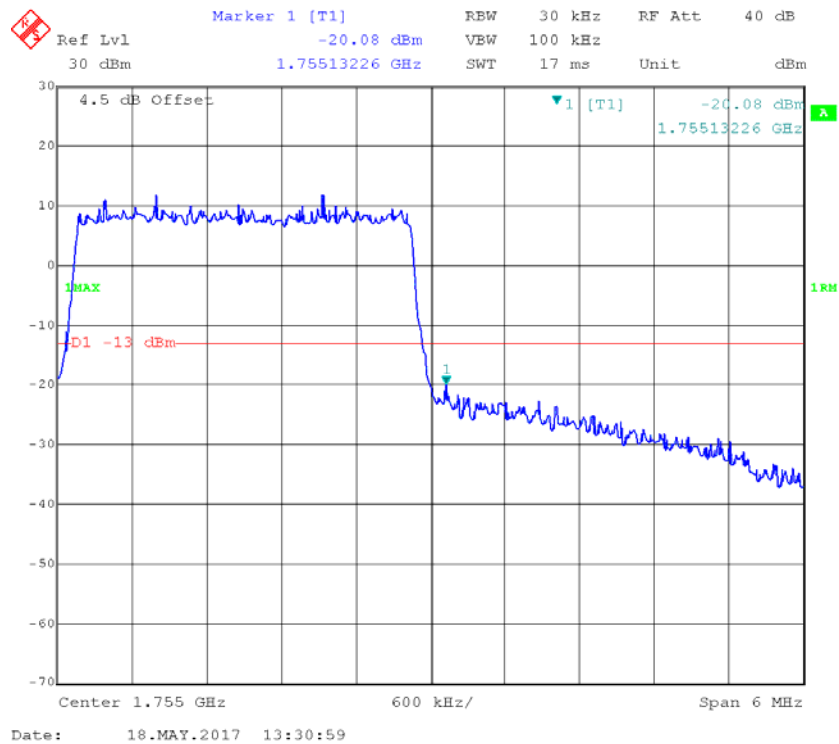


16-QAM_5MHz_Left

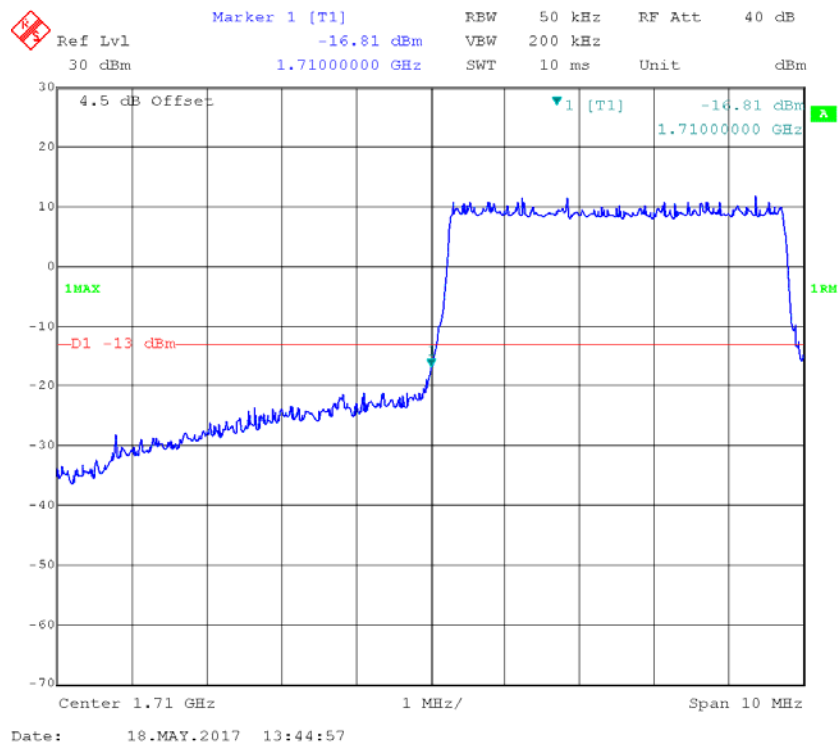


16-QAM_5MHz_Right

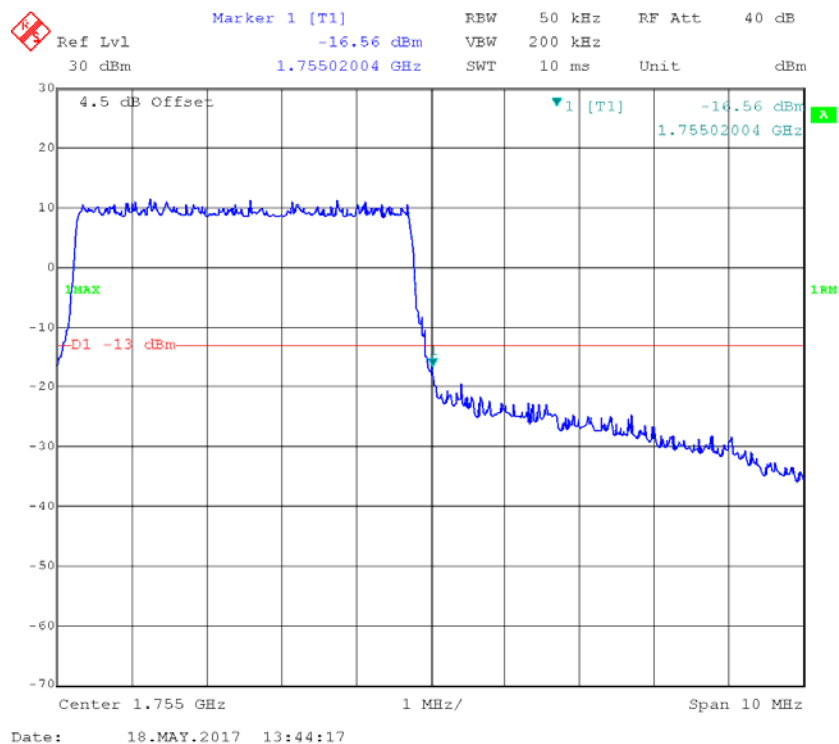


16-QAM_10MHz_Left

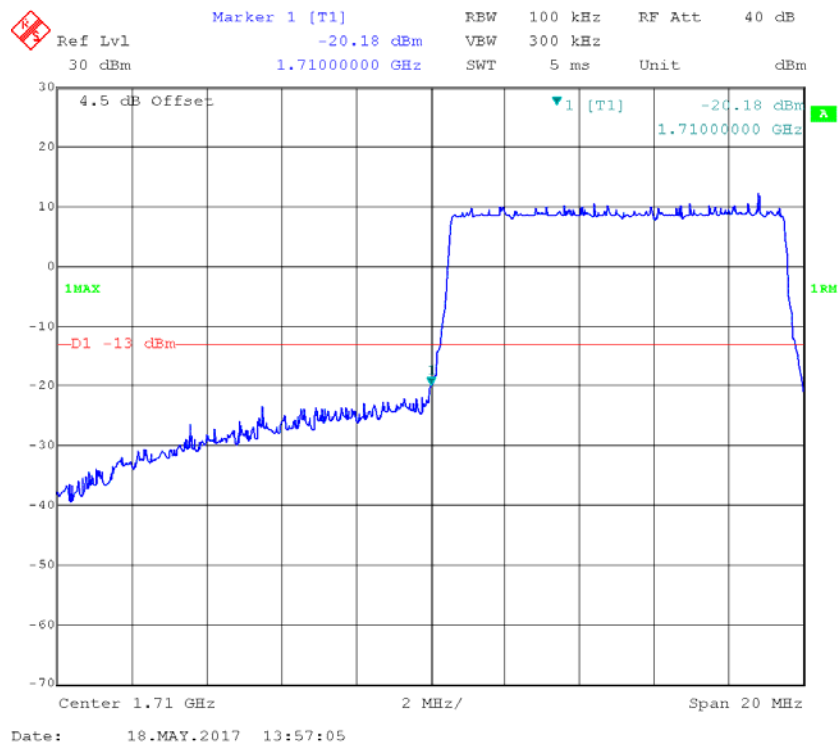


16-QAM_10MHz_Right

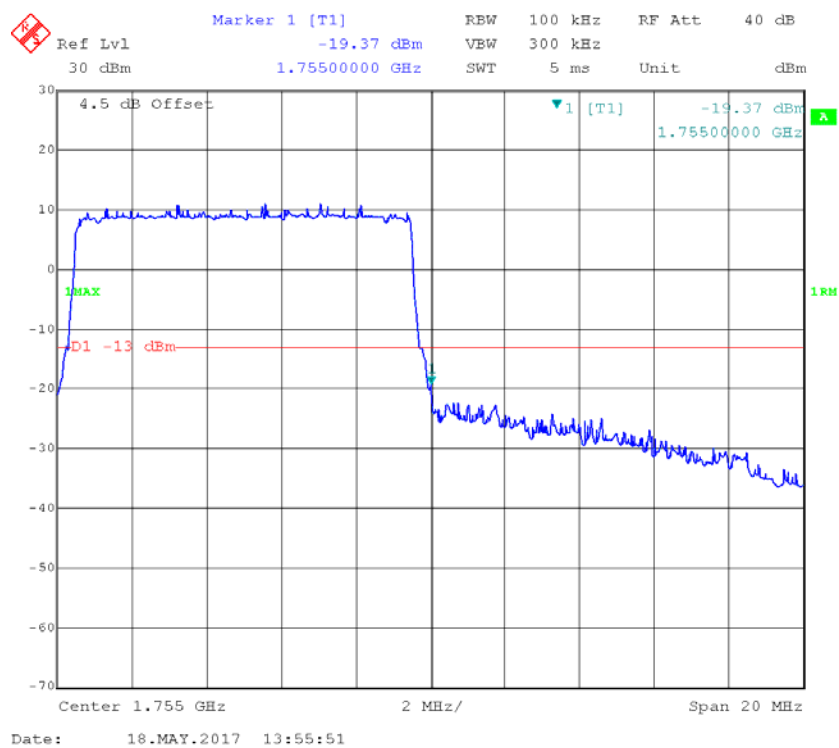


16-QAM_15MHz_Left

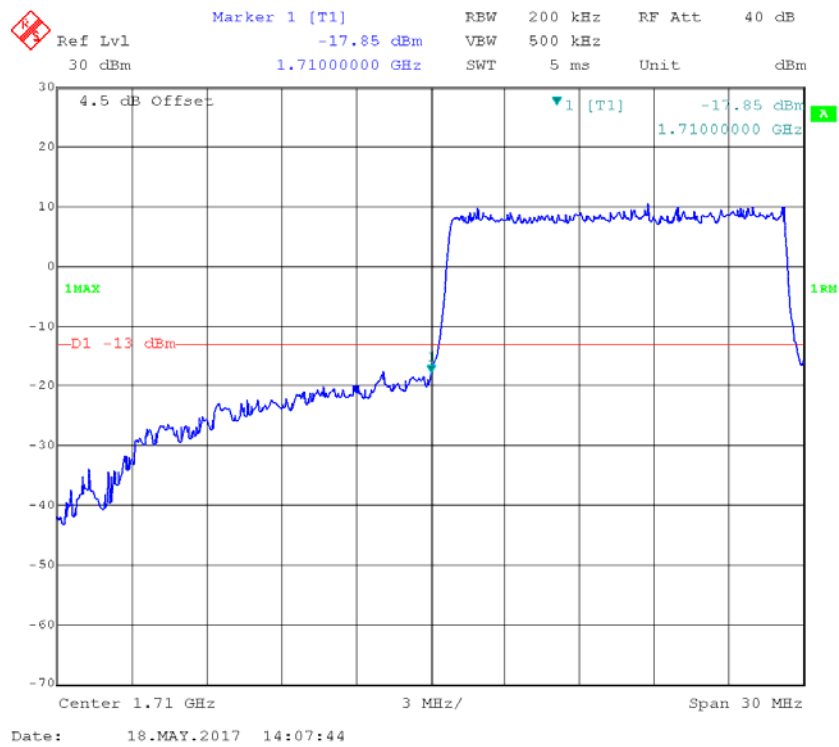


16-QAM_15MHz_Right

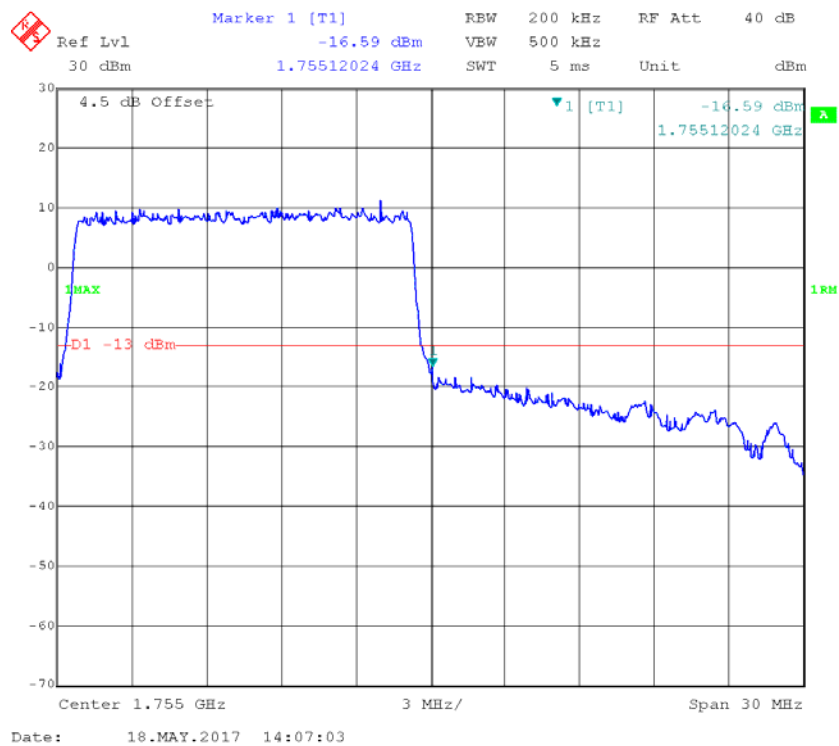

16-QAM_20MHz_Left

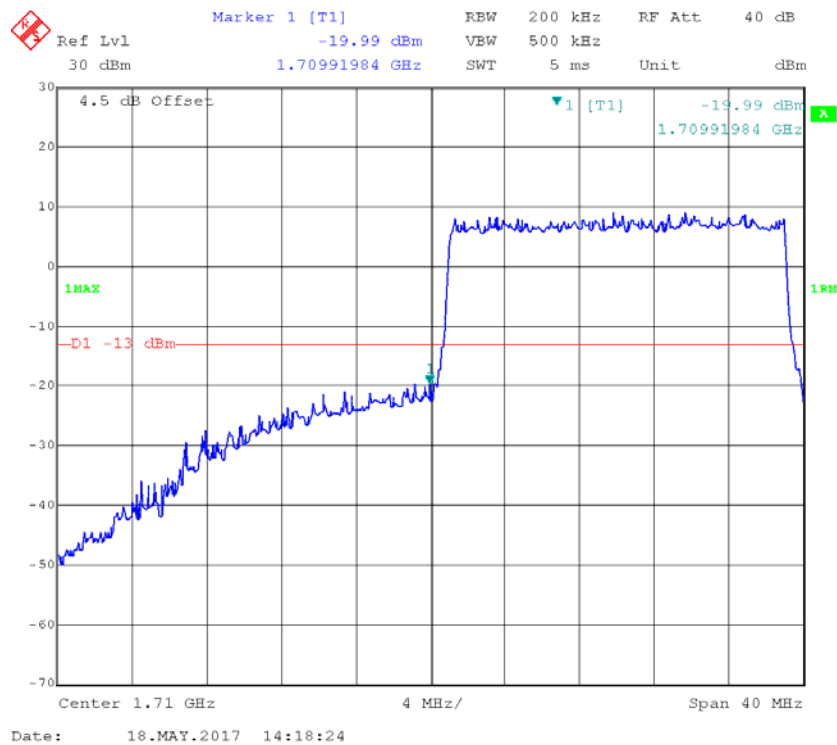


16-QAM_20MHz_Right

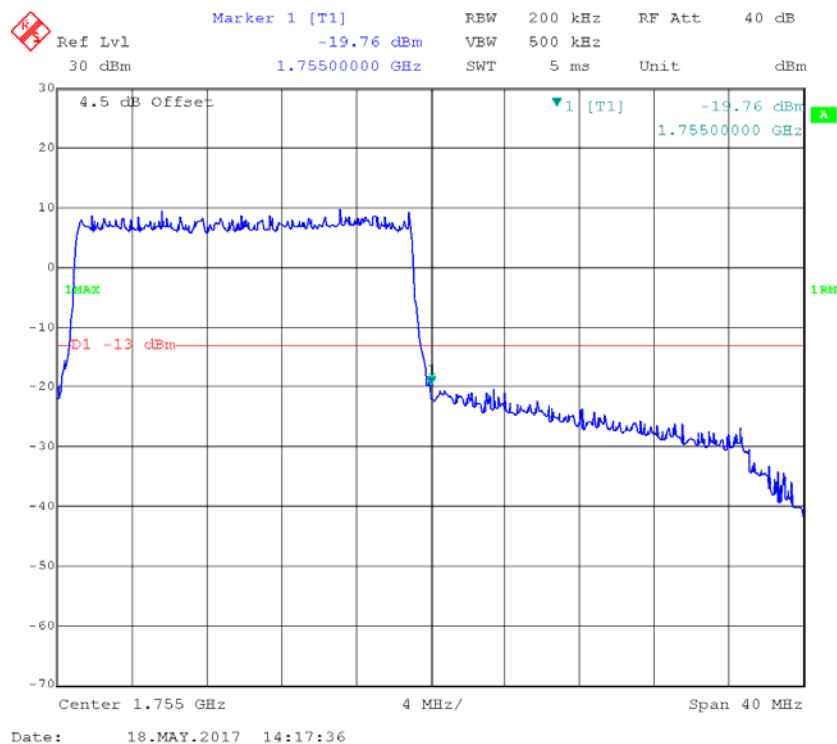


LTE Band V


QPSK_1.4MHz_Left

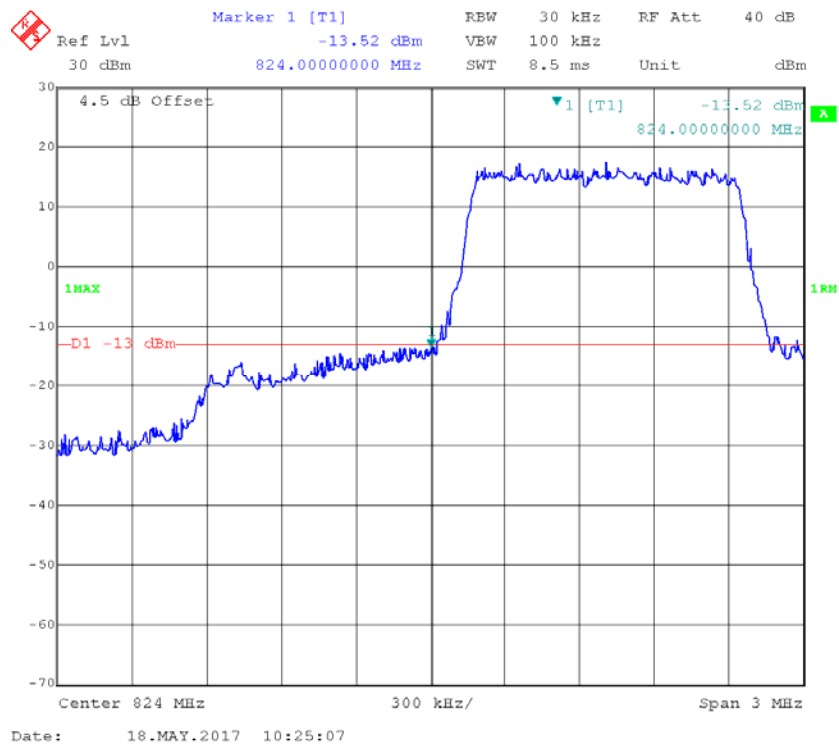


QPSK_1.4MHz_Right

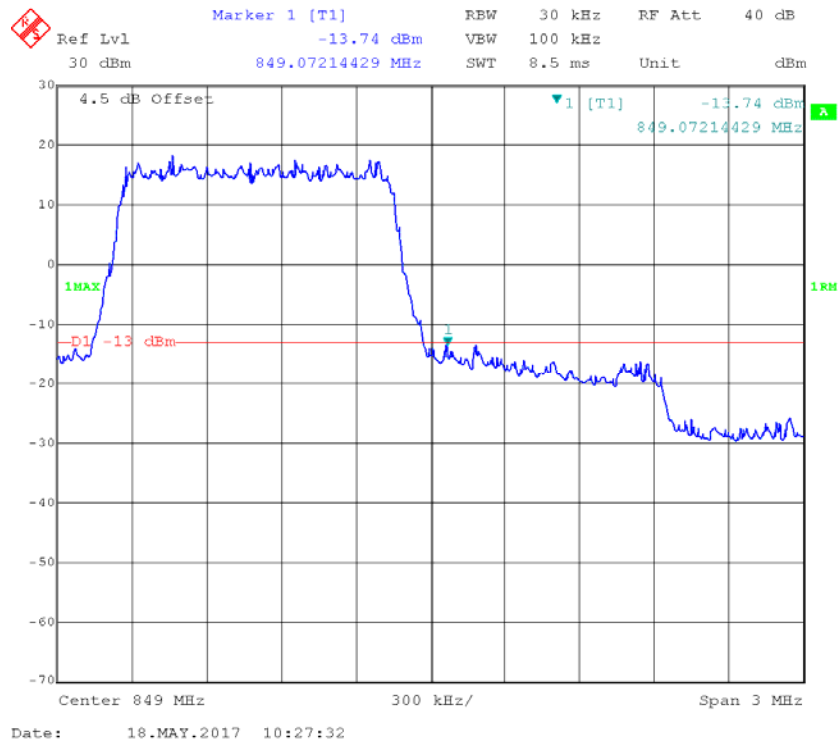


QPSK_3MHz_Left

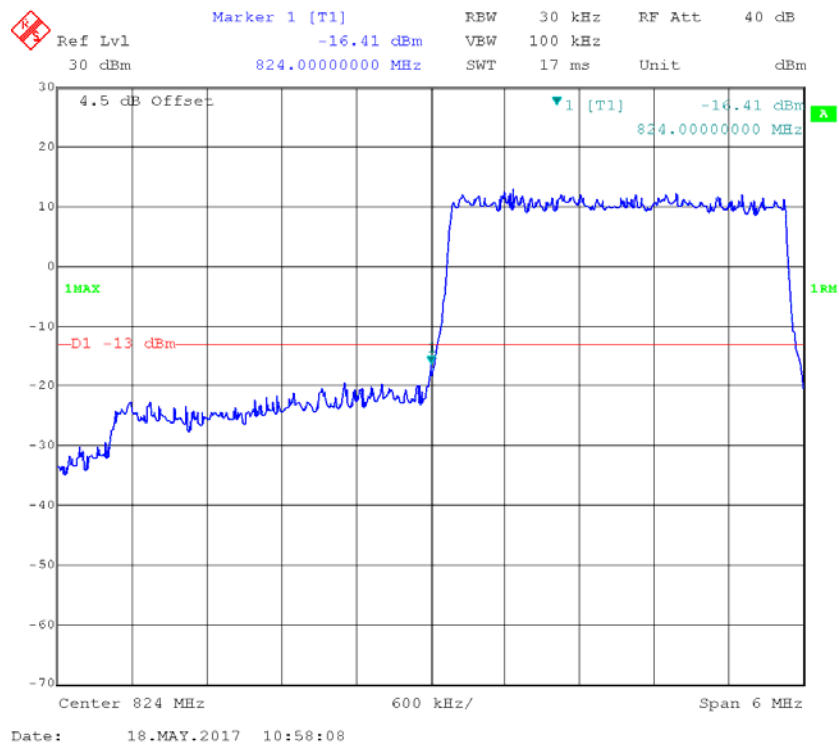


QPSK_3MHz_Right

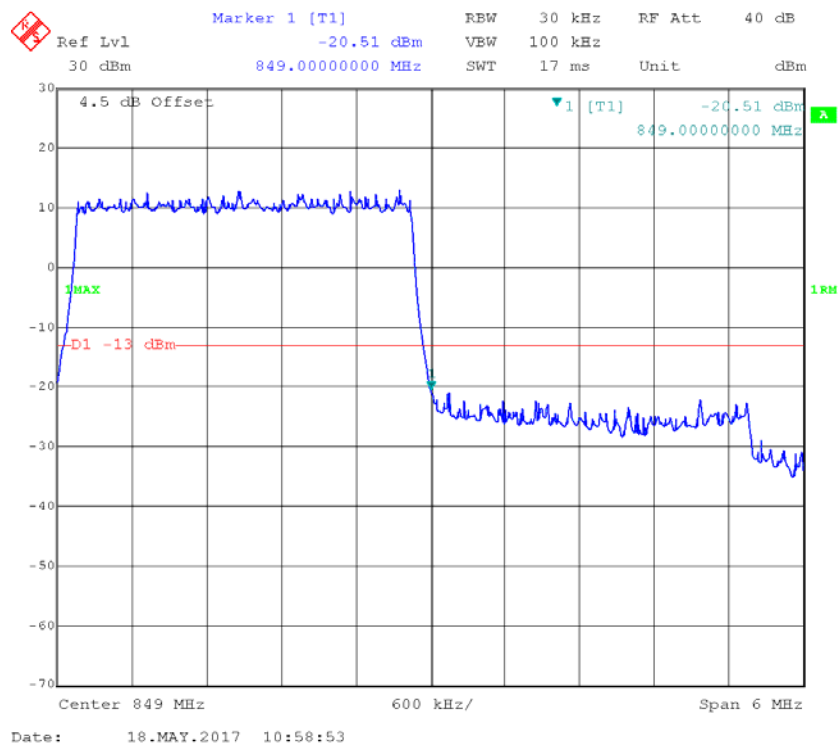


QPSK_5MHz_Left

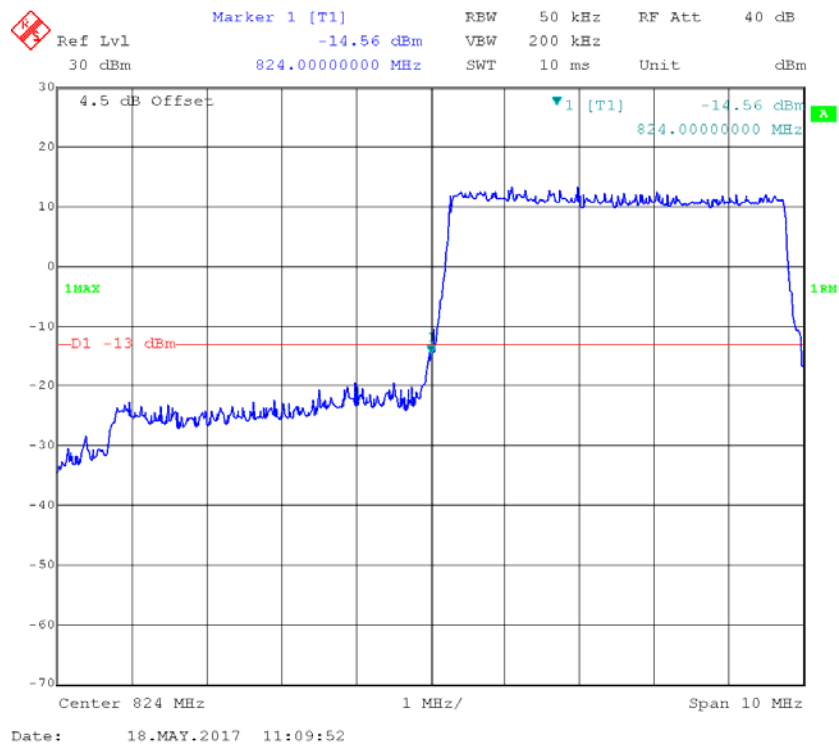


QPSK_5MHz_Right

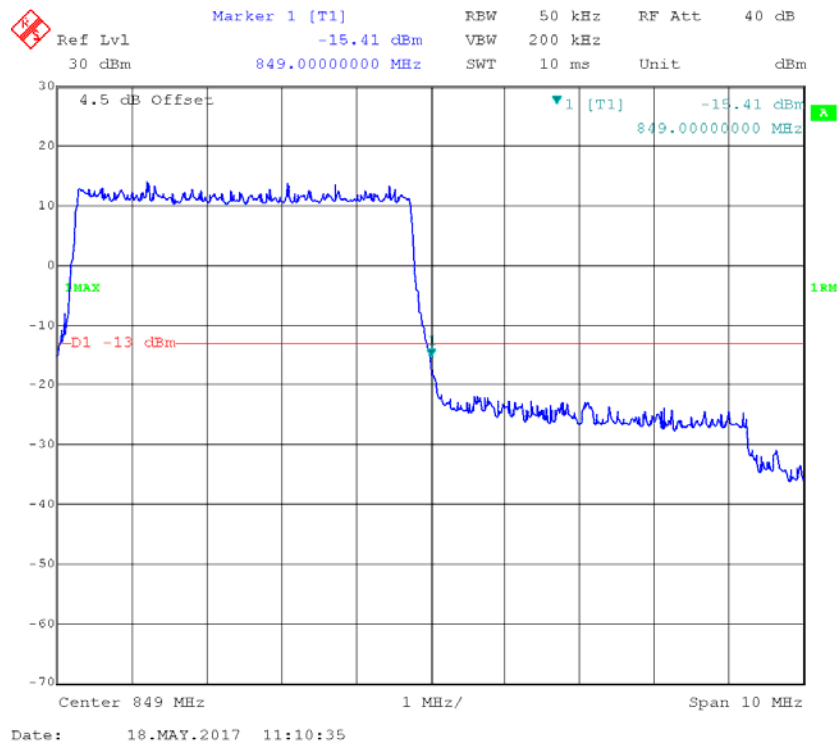


QPSK_10MHz_Left

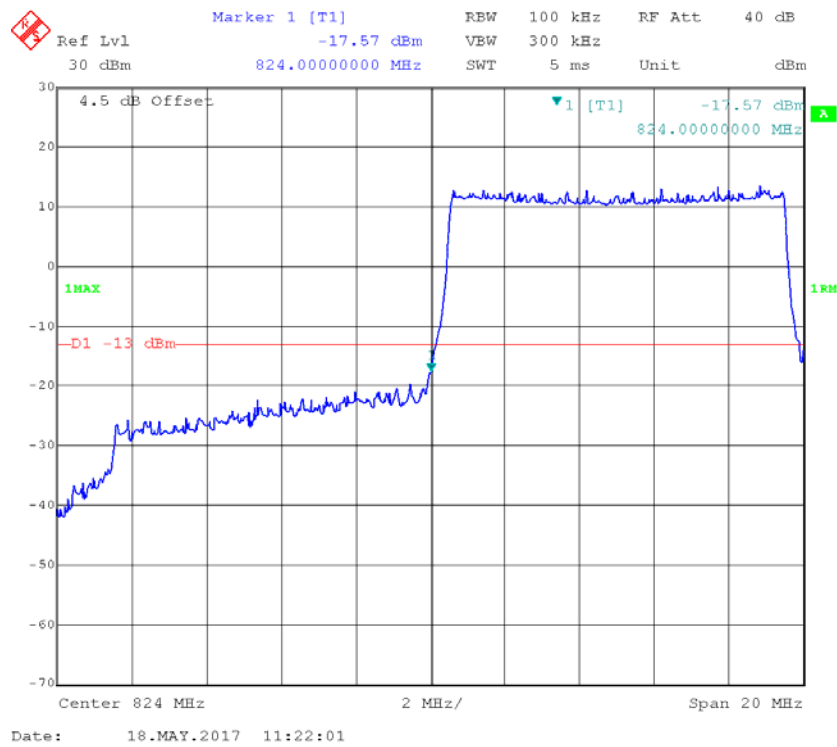


QPSK_10MHz_Right

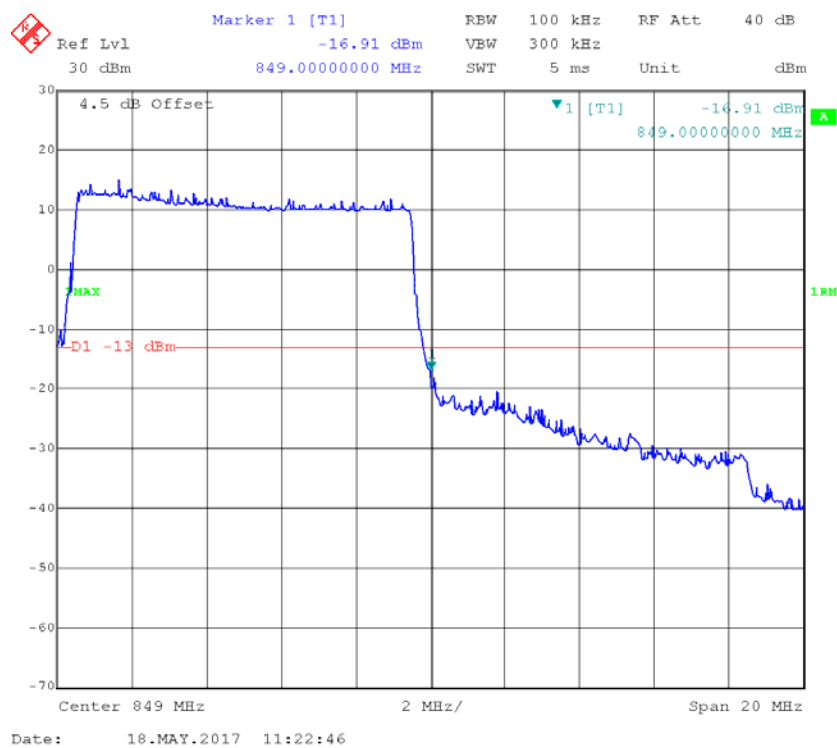


16-QAM_1.4MHz_Left

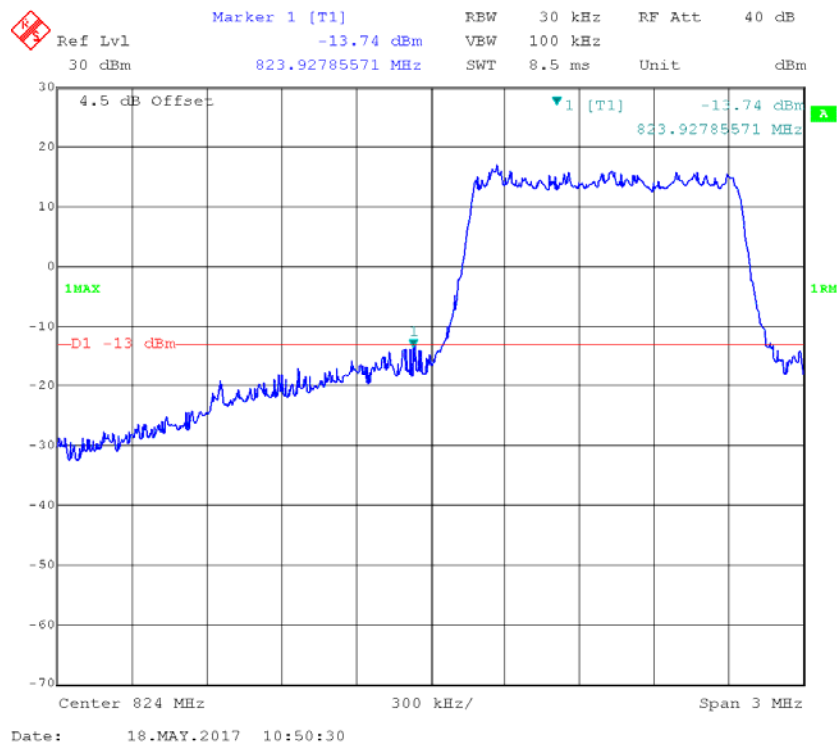


16-QAM_1.4MHz_Right

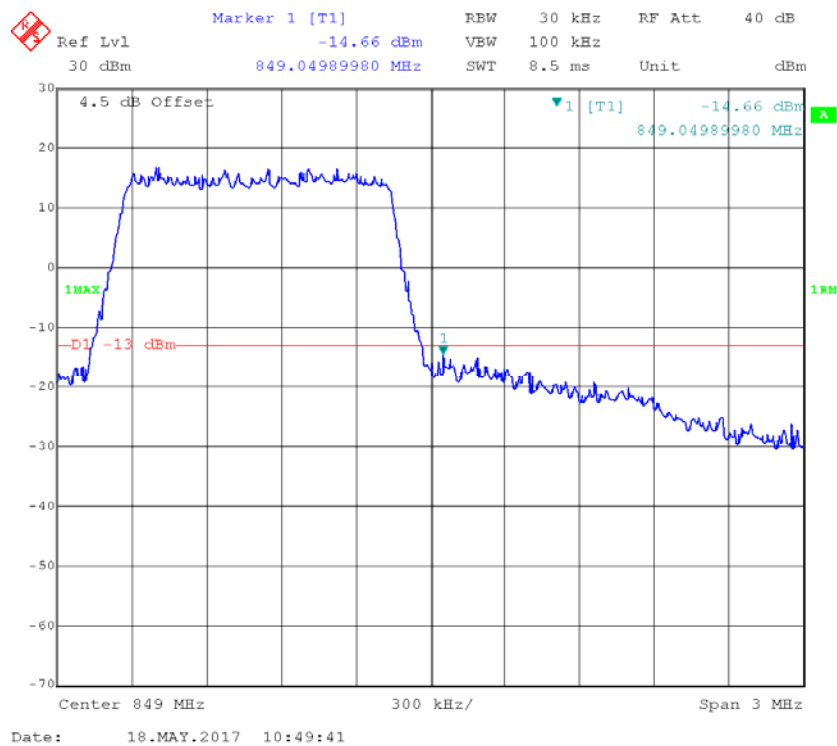


16-QAM_3MHz_Left

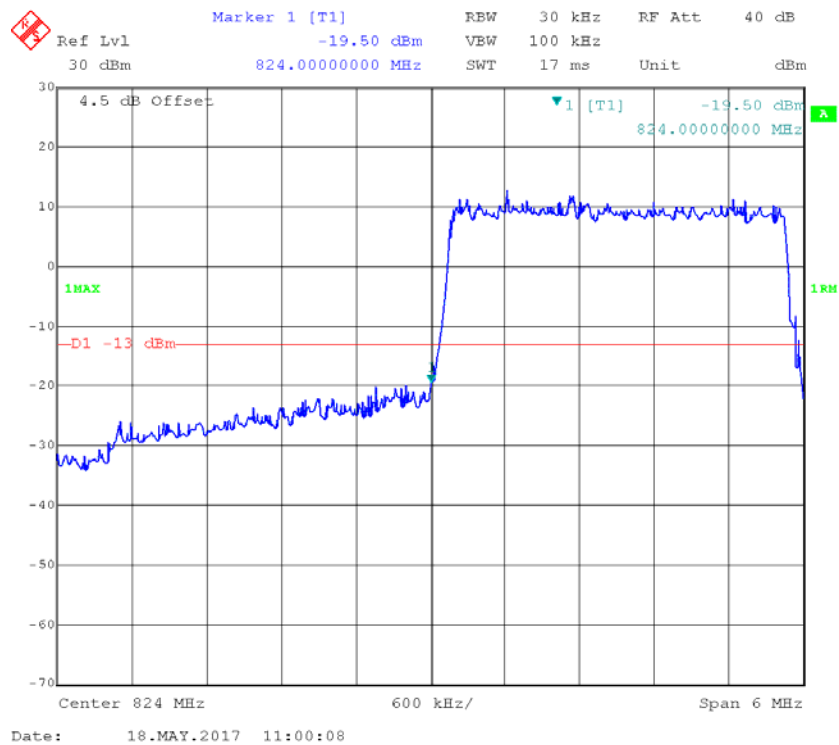


16-QAM_3MHz_Right

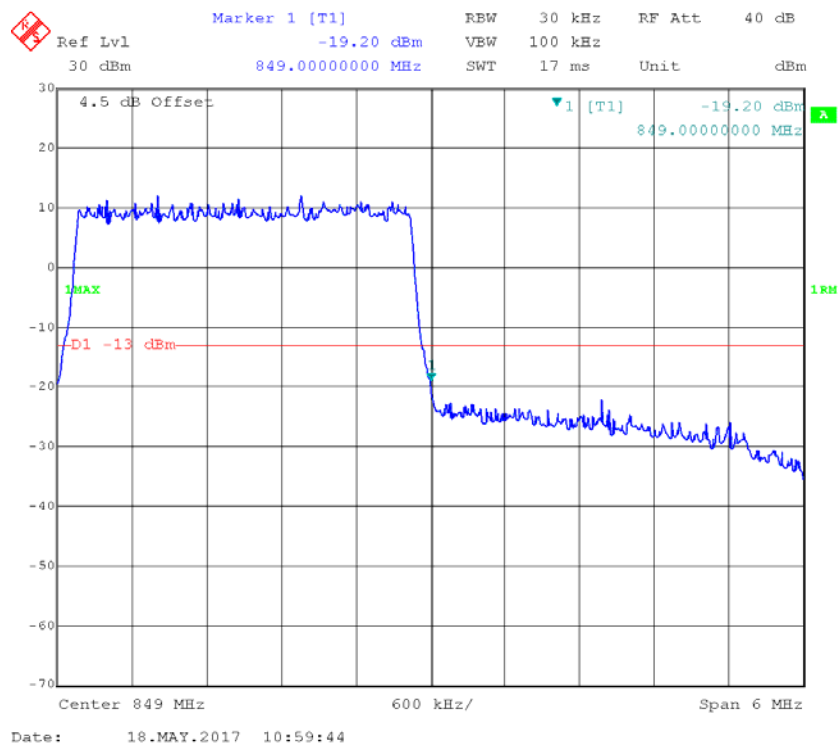


16-QAM_5MHz_Left

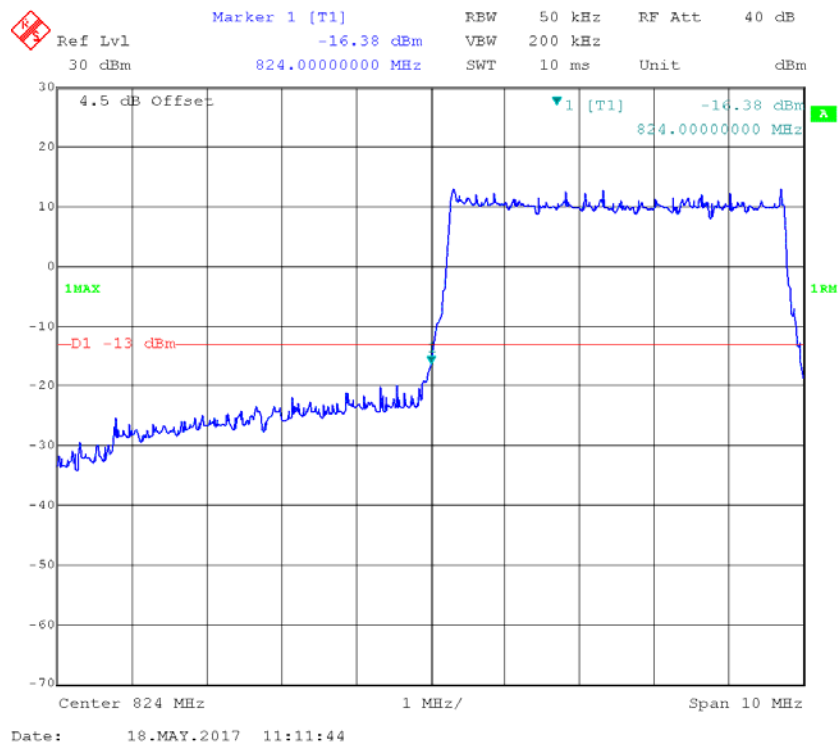


16-QAM_5MHz_Right

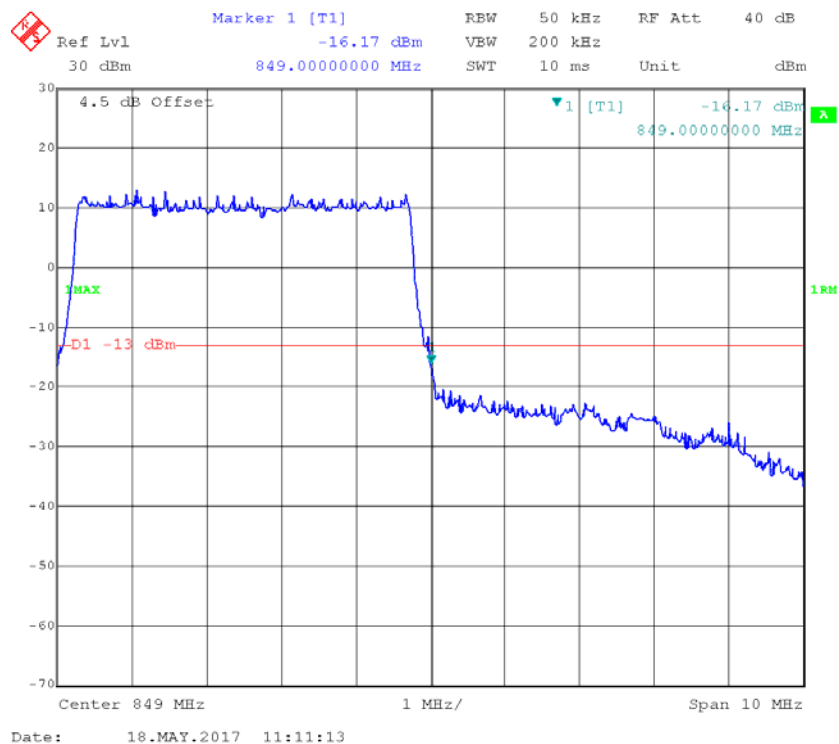

16-QAM_10MHz_Left

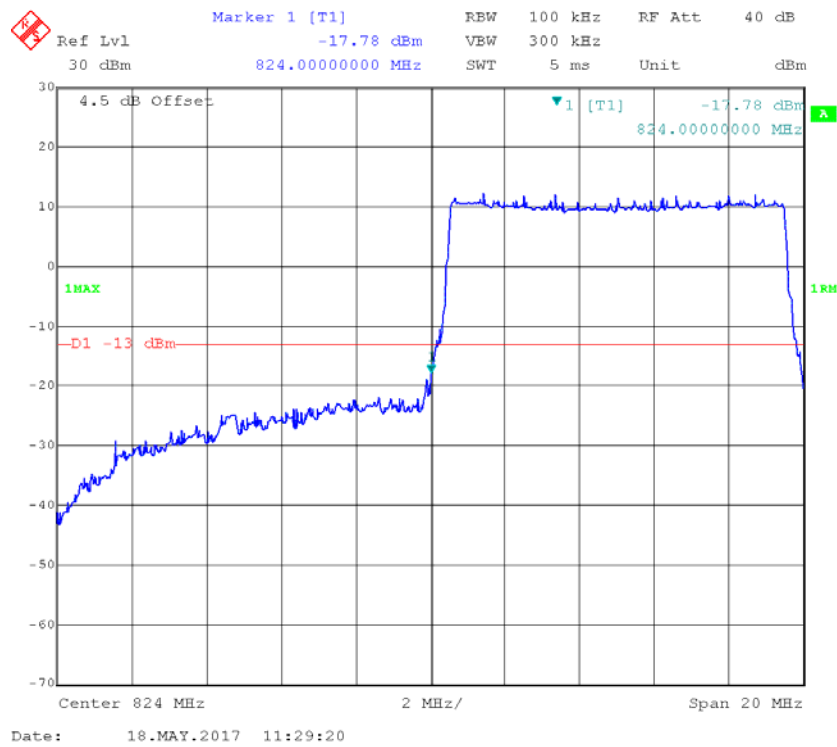


16-QAM_10MHz_Right

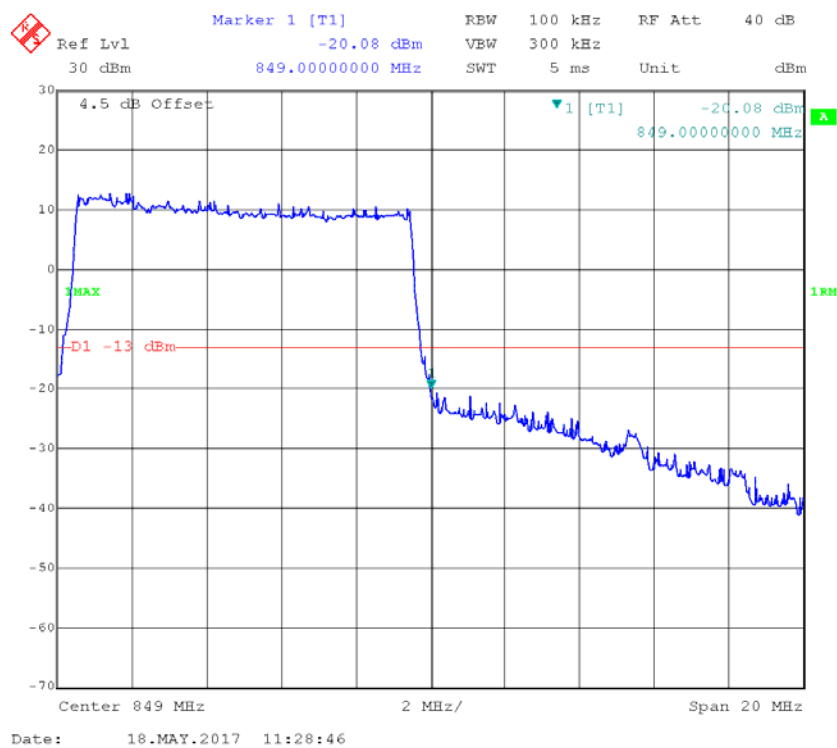


LTE Band VII


QPSK_5MHz_Left

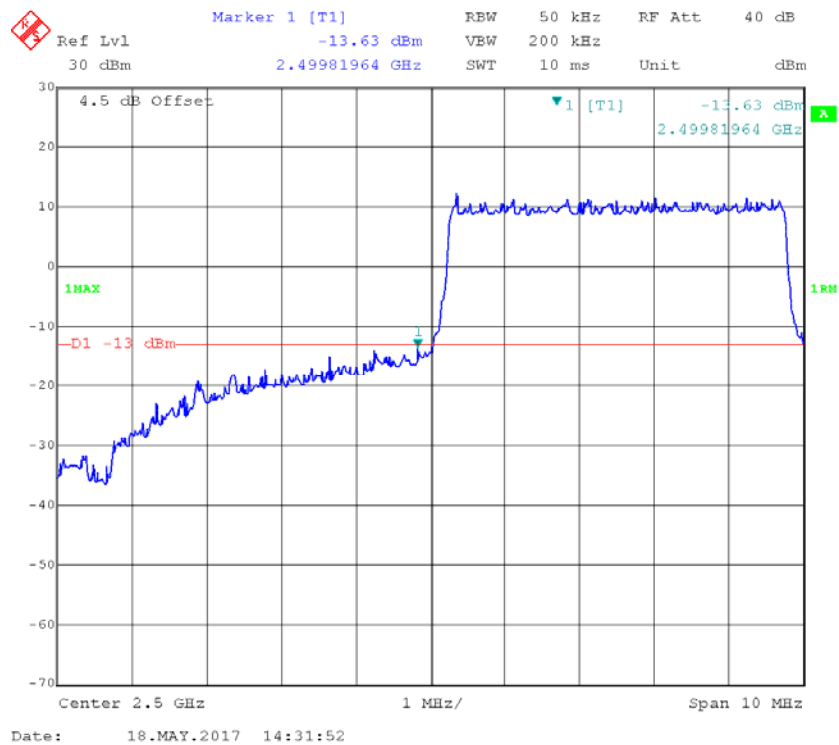


QPSK_5MHz_Right

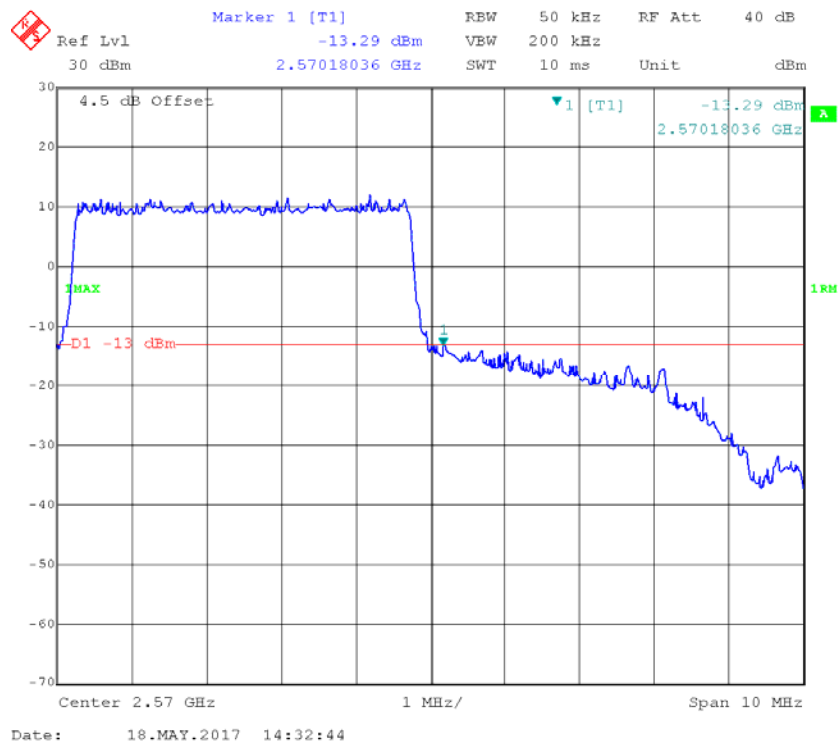


QPSK_10MHz_Left

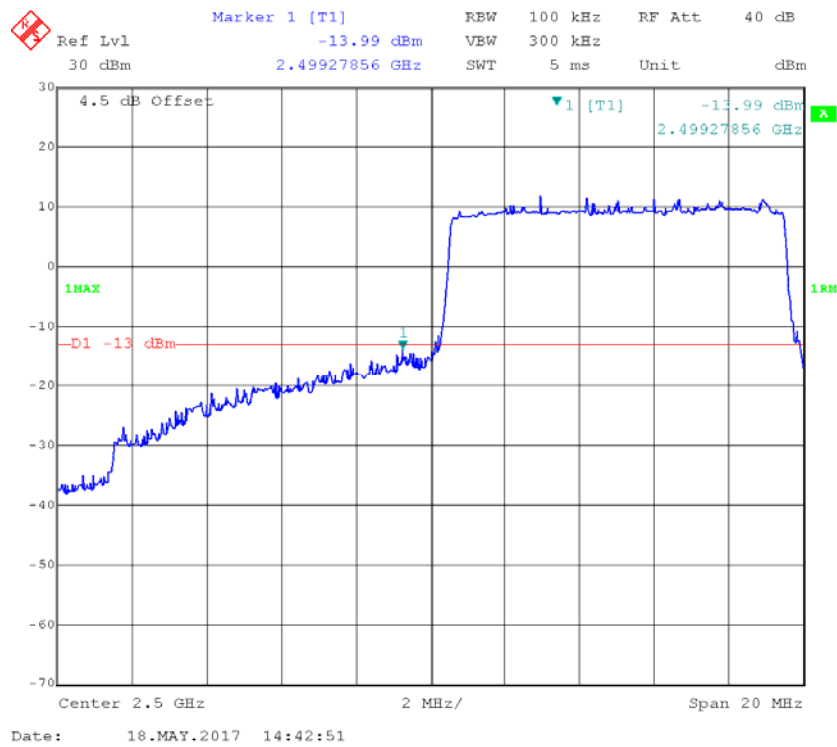


QPSK_10MHz_Right

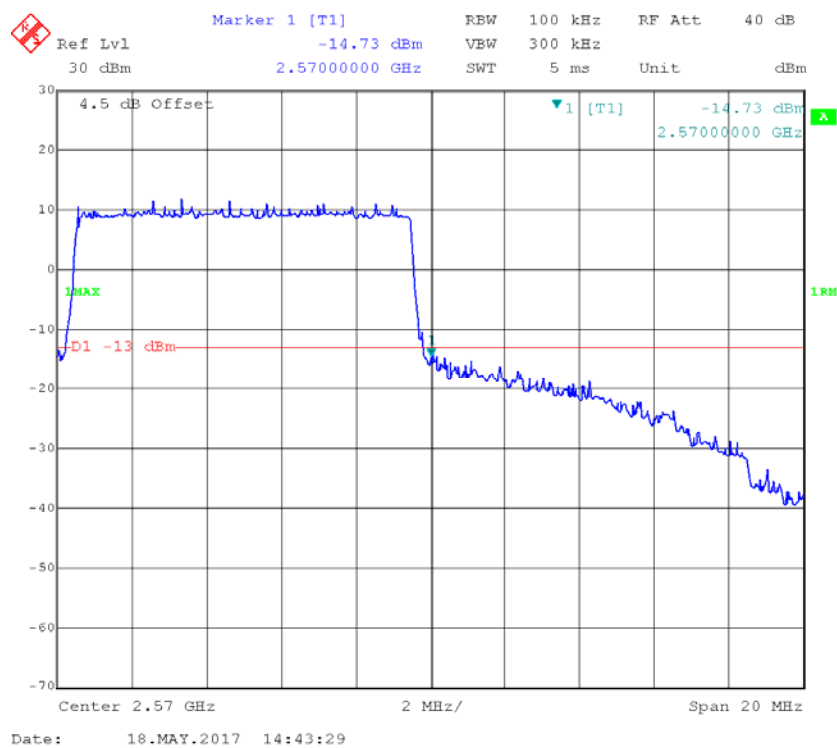


QPSK_15MHz_Left

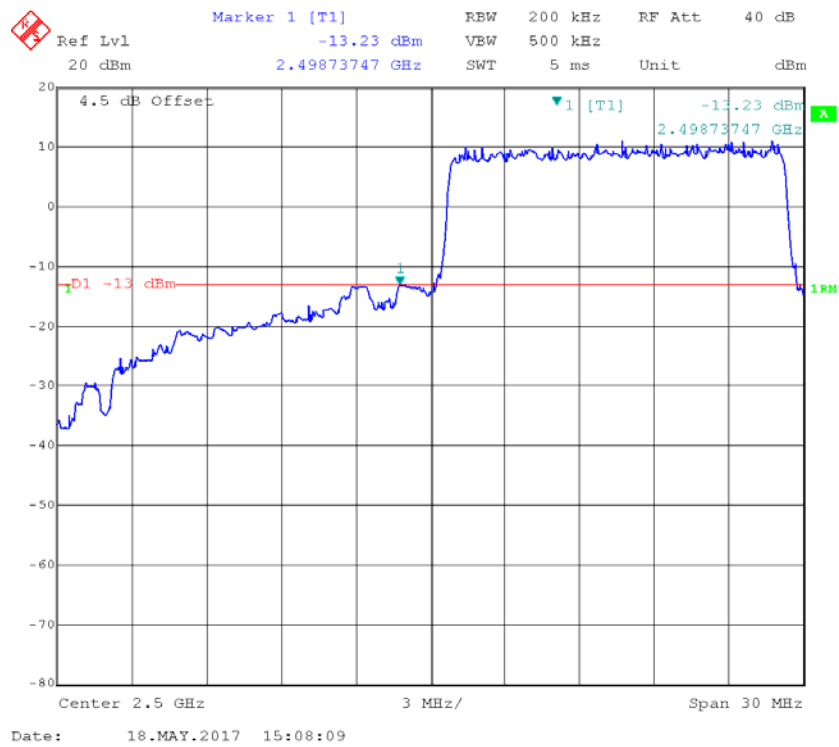


QPSK_15MHz_Right

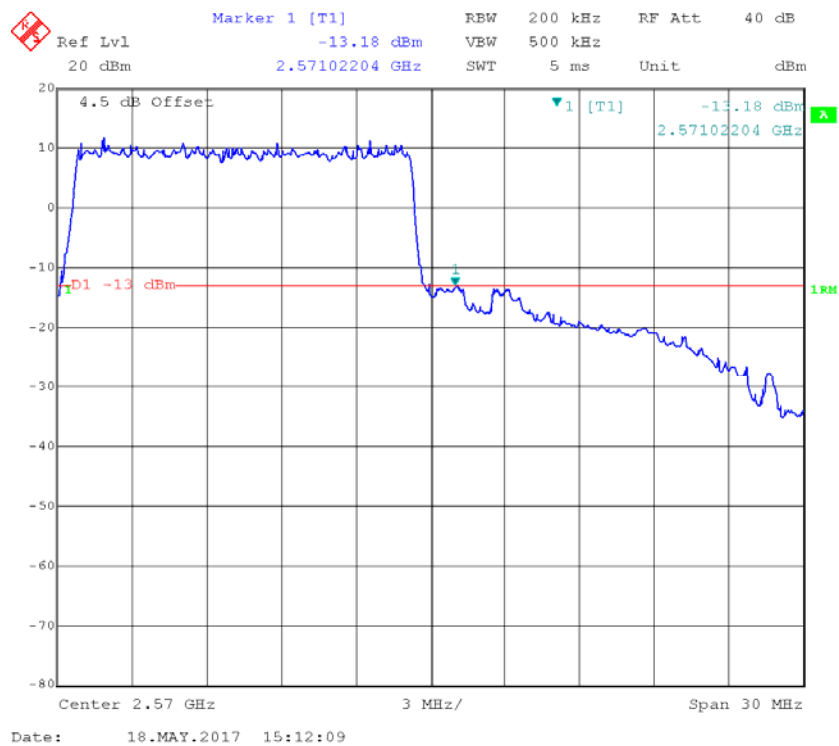


QPSK_20MHz_Left

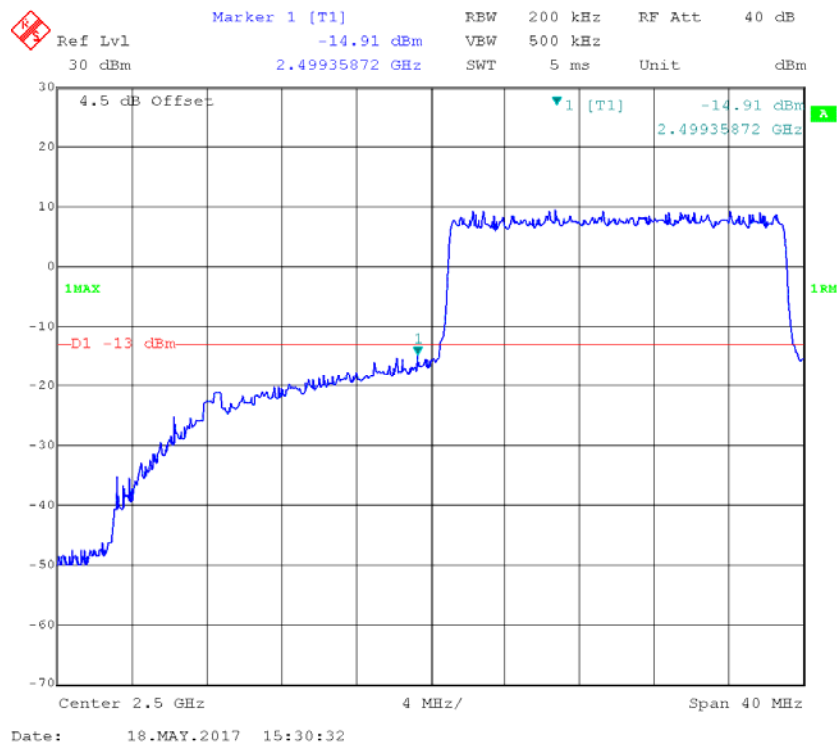


QPSK_20MHz_Right

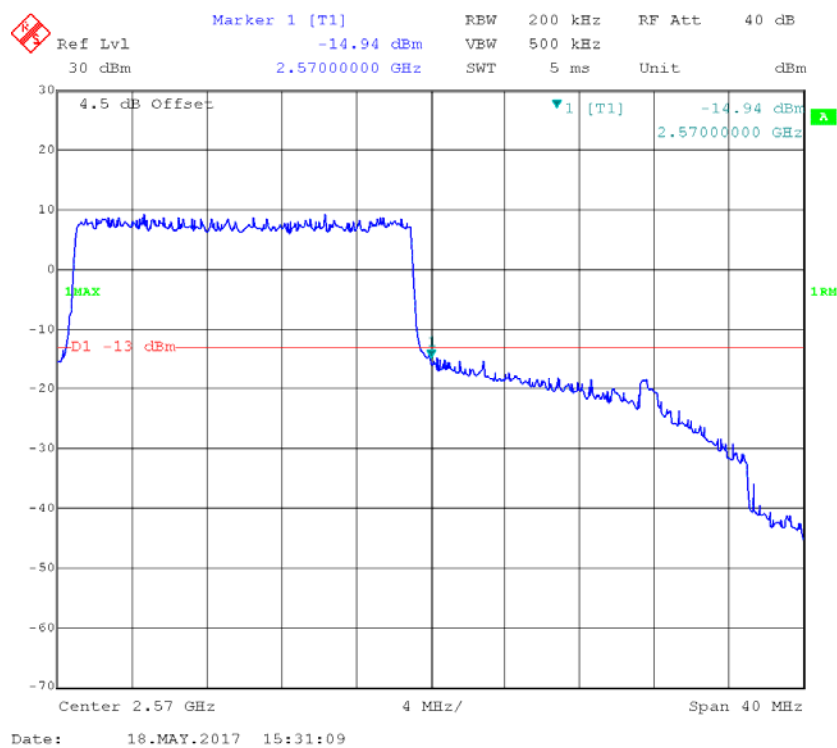


16-QAM_5MHz_Left

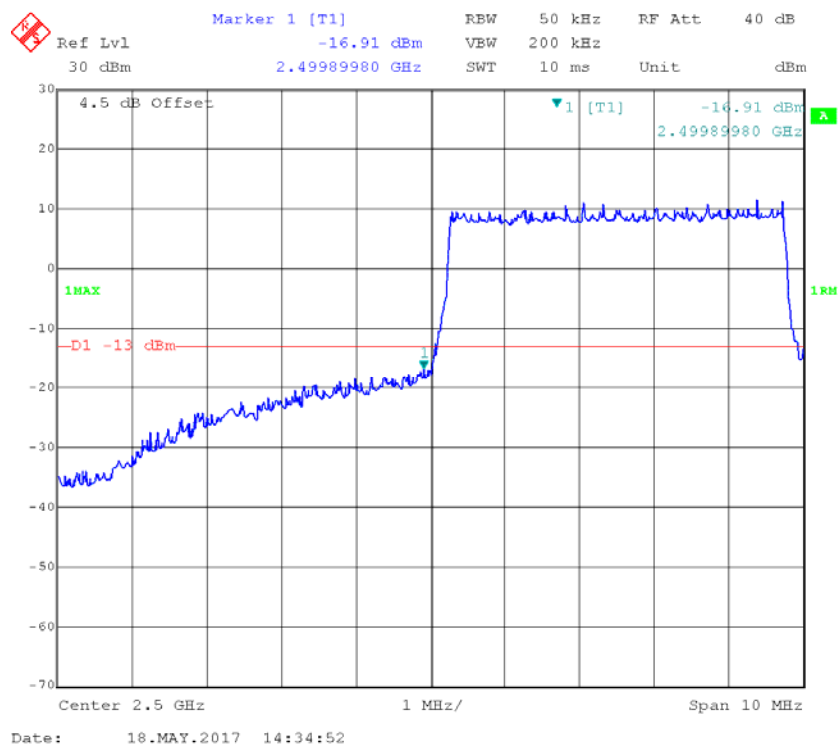


16-QAM_5MHz_Right

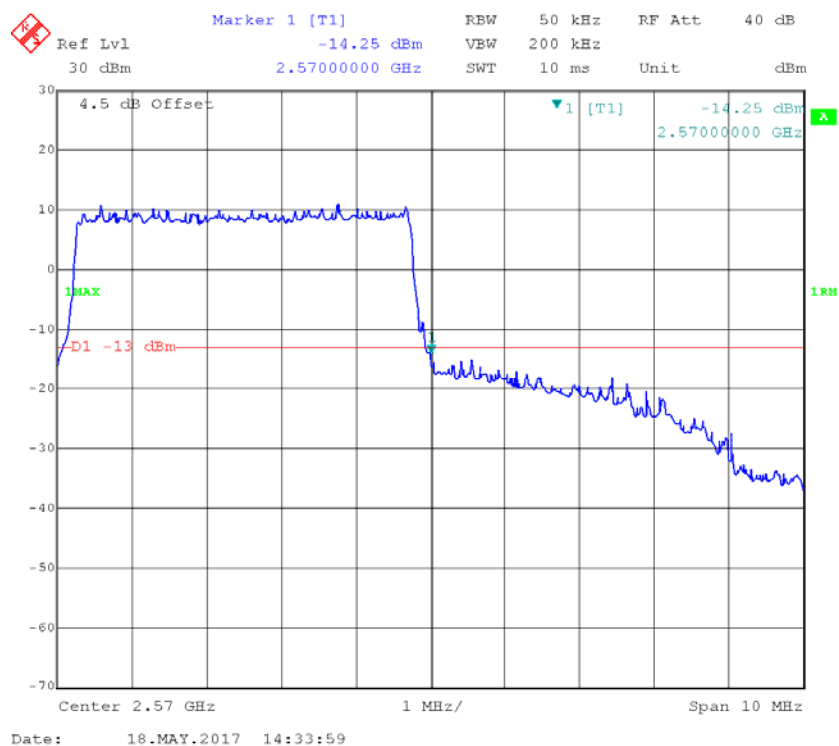


16-QAM_10MHz_Left

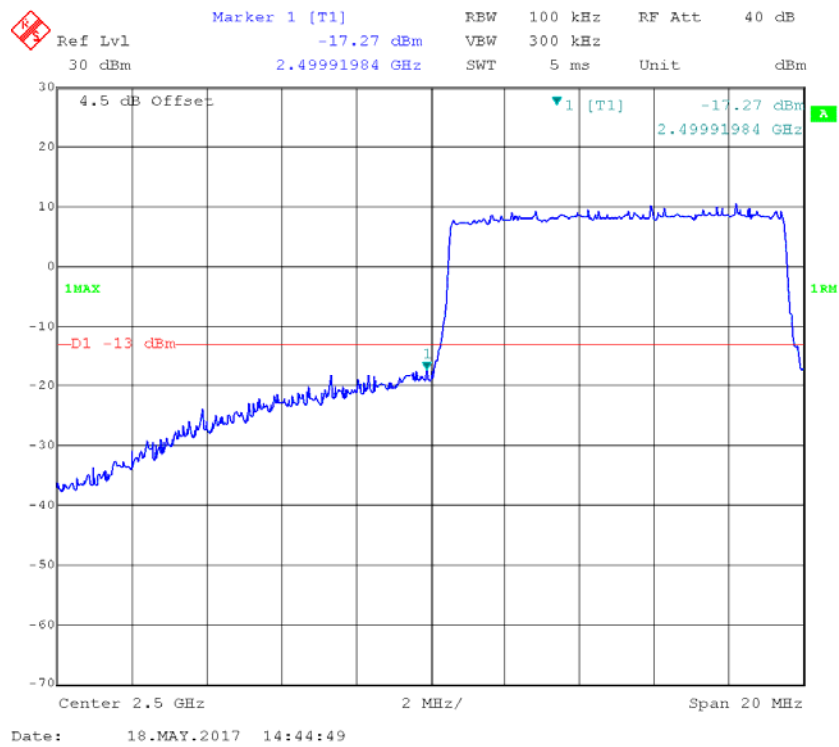


16-QAM_10MHz_Right

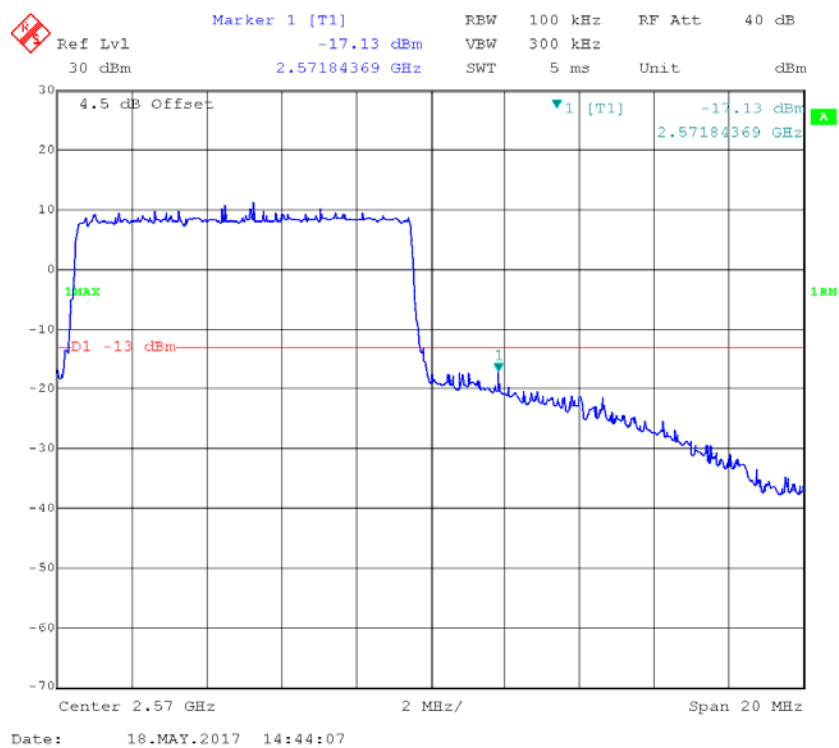


16-QAM_15MHz_Left

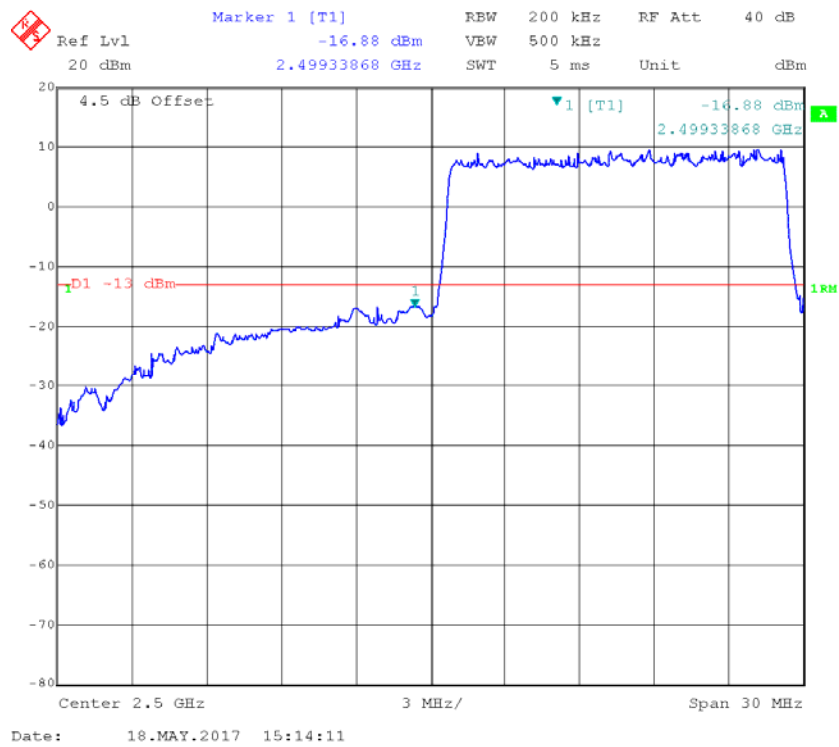


16-QAM_15MHz_Right

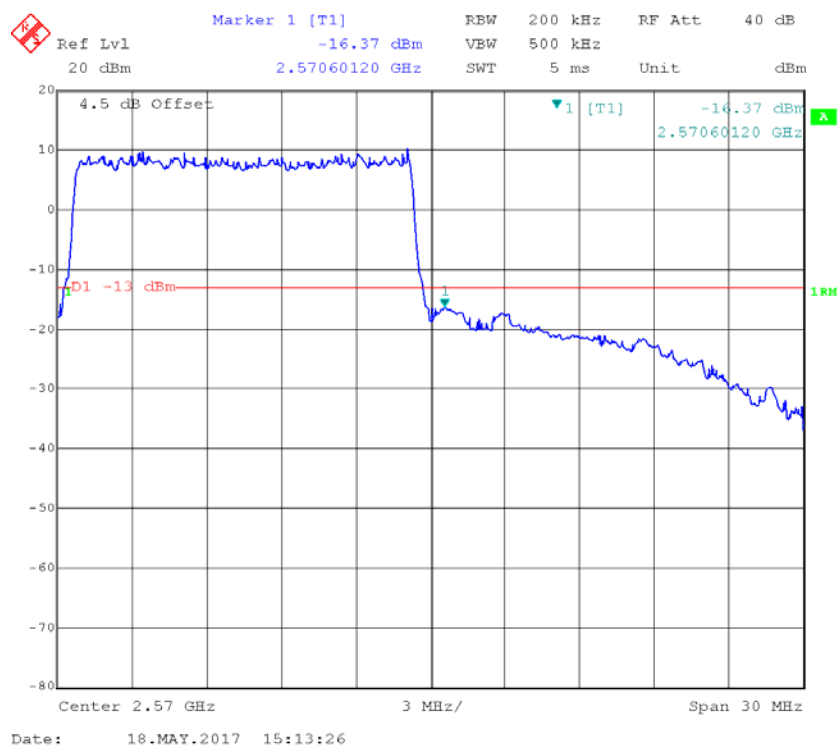

16-QAM_20MHz_Left

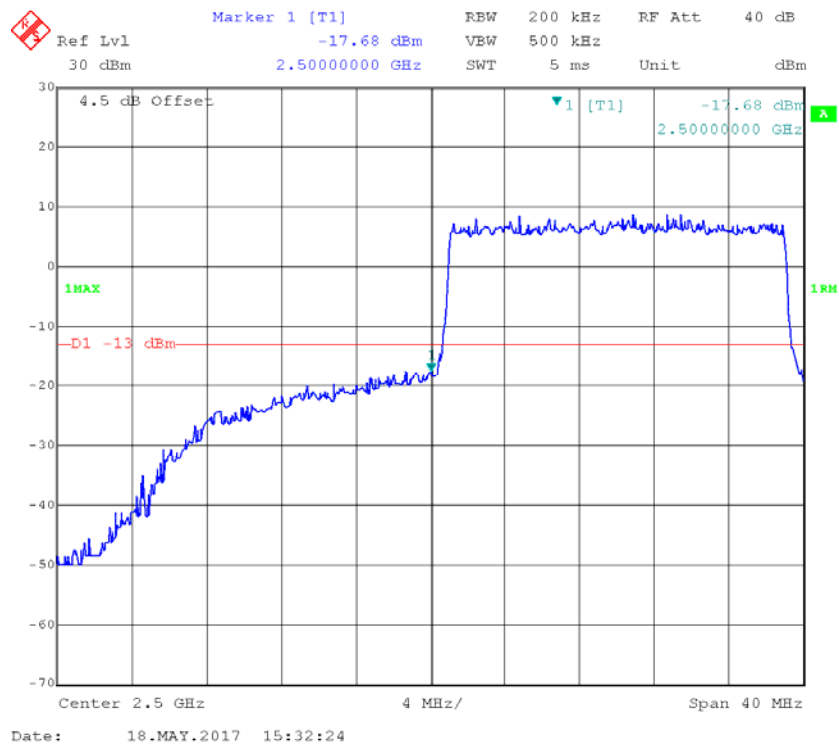


16-QAM_20MHz_Right

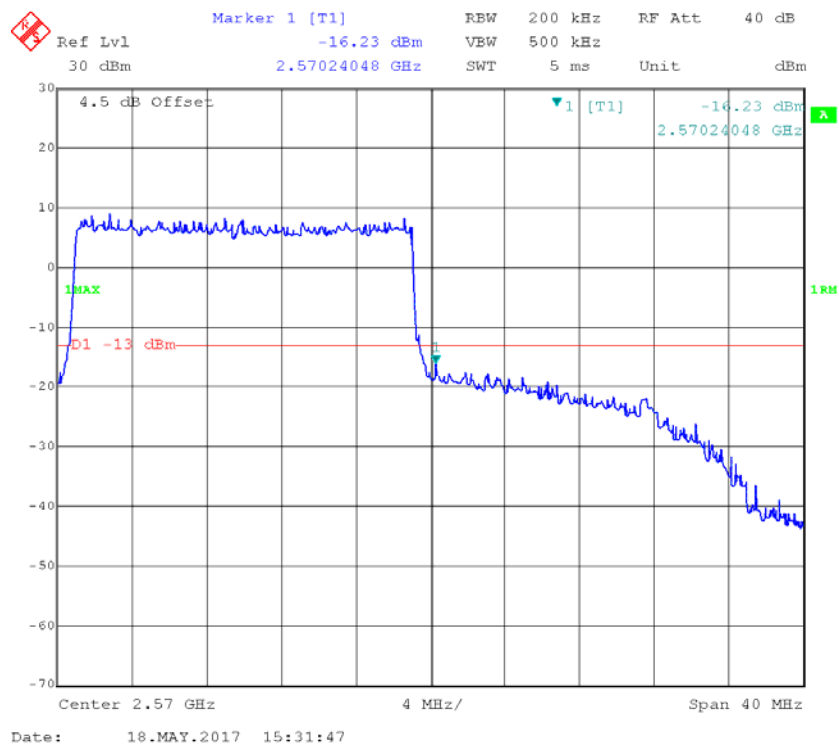


LTE Band 17


QPSK_5MHz_Left

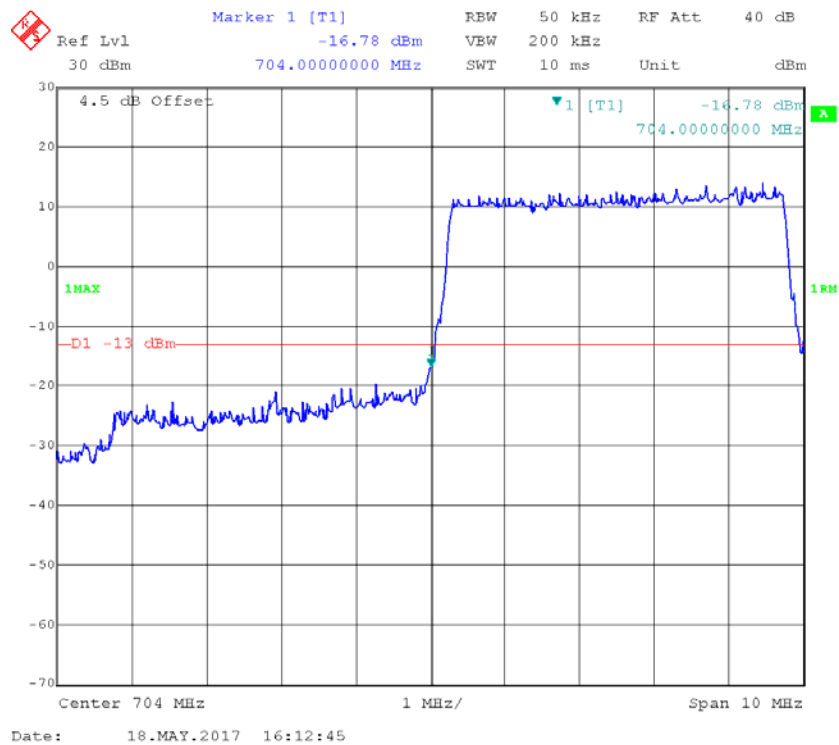


QPSK_5MHz_Right

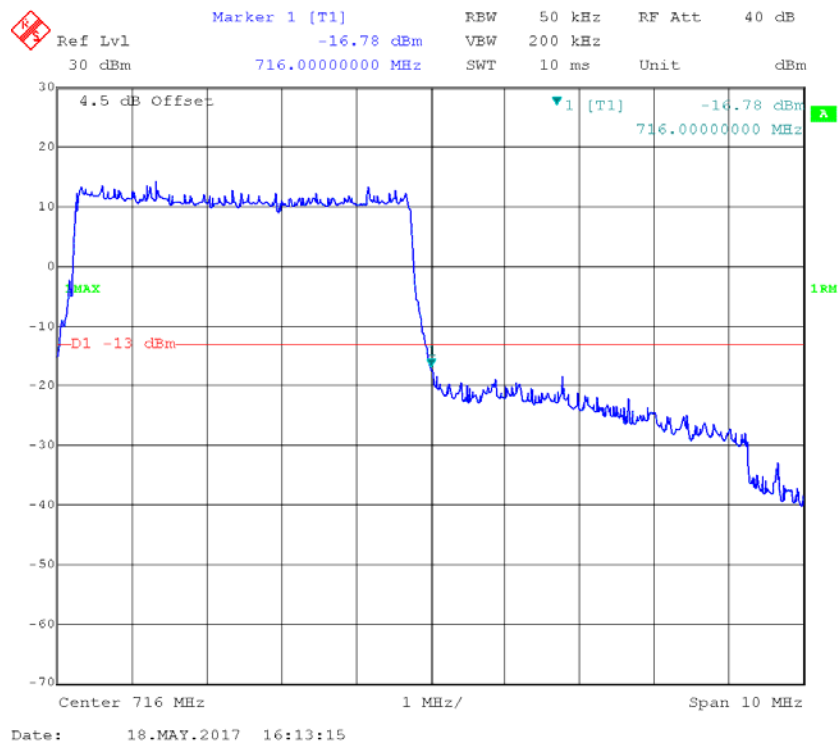


QPSK_10MHz_Left

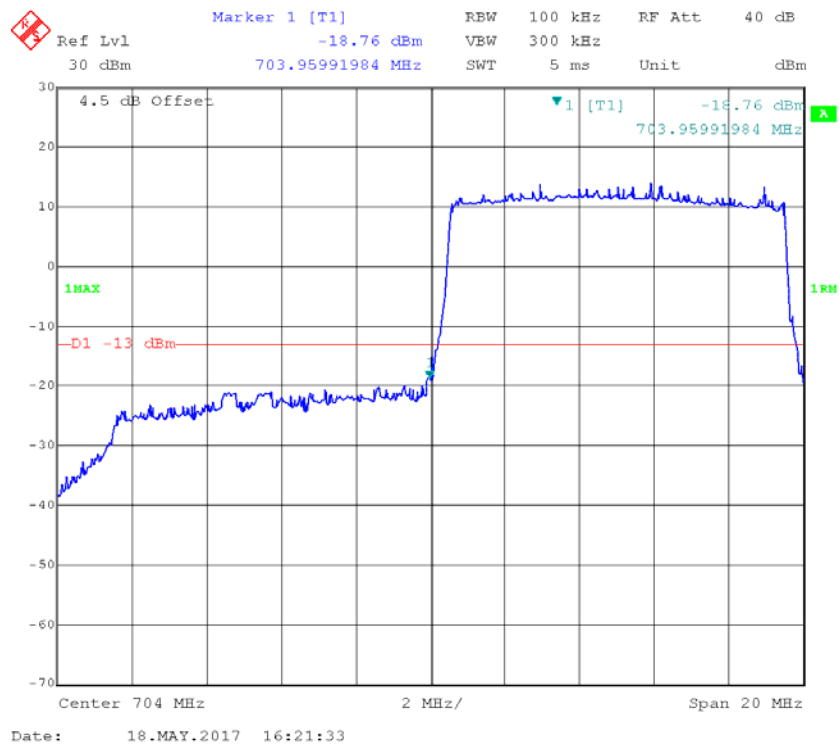


QPSK_10MHz_Right

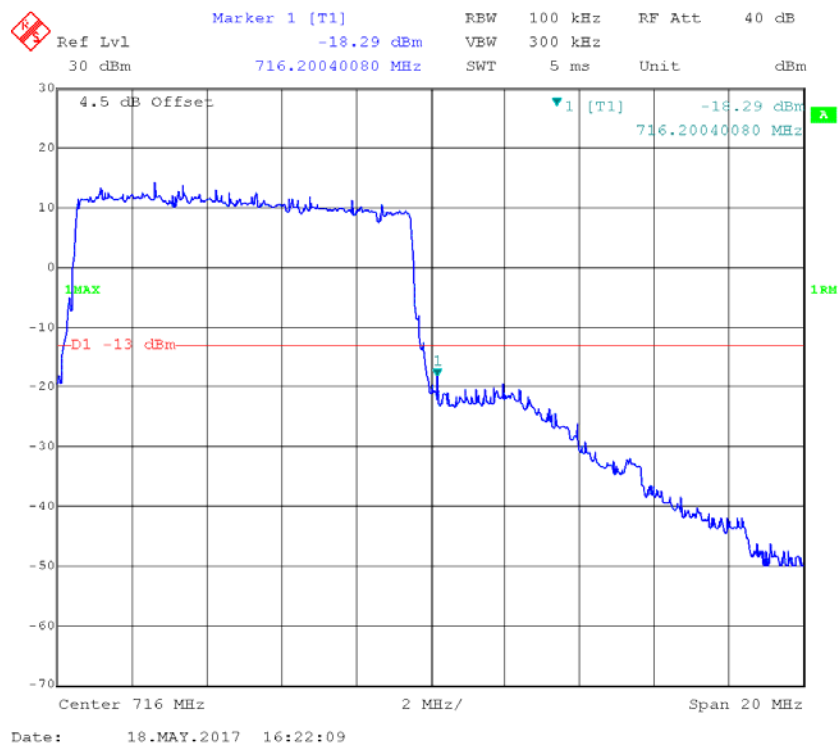


16-QAM_5MHz_Left

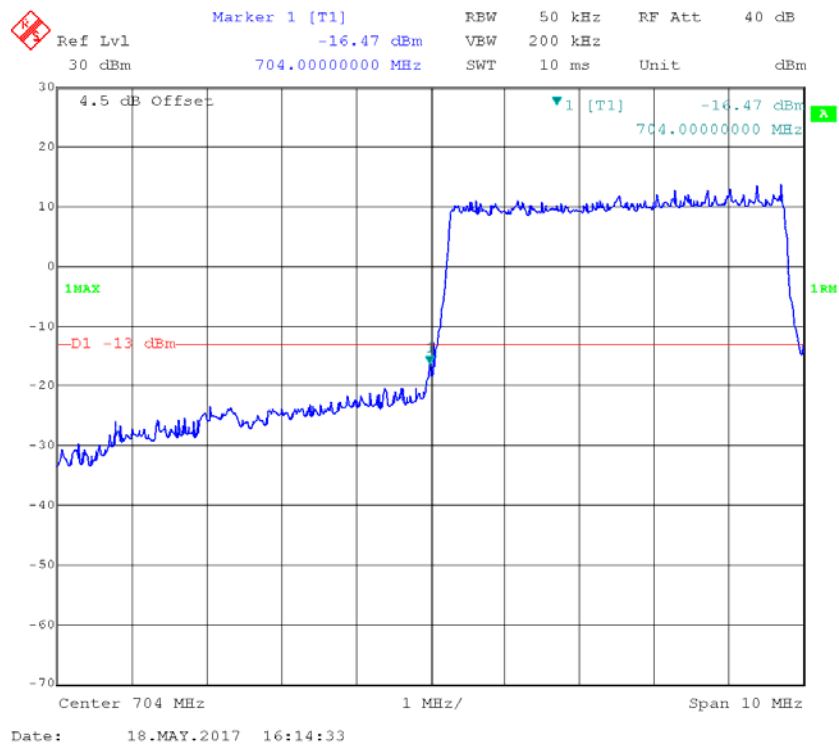

16-QAM_5MHz_Right

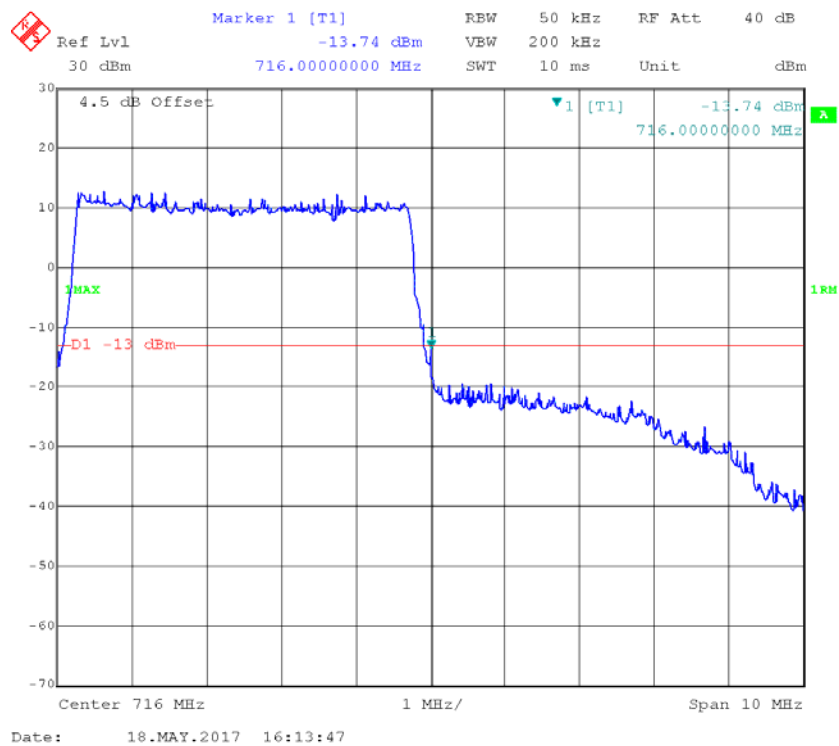

16-QAM_10MHz_Left

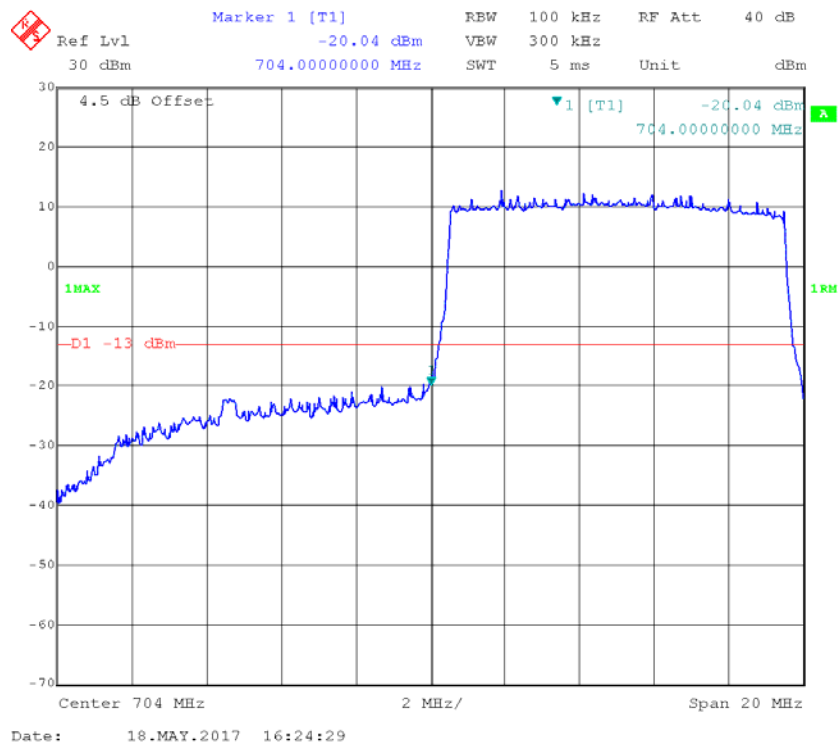

16-QAM_10MHz_Right



FCC §2.1055, §22.355 & §24.235 & §27.54 - FREQUENCY STABILITY

Applicable Standard

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235, §27.54

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.


According to §27.54, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

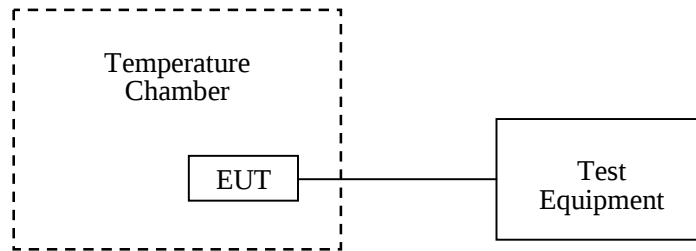

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
BACL	High Temperature Test Chamber	BTH-150	30024	2016-12-02	2017-12-01
FLUKE	Multimeter	1587	27870099	2016-12-30	2017-12-29
R&S	Universal Radio Communication Tester	CMU200	11-9435686-111	2016-07-28	2017-07-27
R&S	Wideband Radio Communication Tester	CMW500	106891	2016-11-23	2017-11-23
Unknown	RF Cable	Unknown	NO.3	Each Time	/

*** Statement of Traceability:** BACL(Chengdu) attests that all of the calibrations on the equipment items listed above were traceable to NIM or to another internationally recognized National Metrology Institute (NMI), and were compliant with the NIST HB 150-2016 Normative Annex B "Implementation of traceability policy in accredited laboratories".

Test Data

Environmental Conditions

Temperature:	20.4 °C
Relative Humidity:	53 %
ATM Pressure:	97 kPa

The testing was performed by Lorin Bian on 2017-05-22.

Cellular Band (Part 22H)

GMSK, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	-19	-0.023	2.5
-20	3.8	-21	-0.025	2.5
-10	3.8	-15	-0.018	2.5
0	3.8	-16	-0.019	2.5
10	3.8	-18	-0.022	2.5
20	3.8	-17	-0.020	2.5
30	3.8	-21	-0.025	2.5
40	3.8	-24	-0.029	2.5
50	3.8	-21	-0.025	2.5
25	4.3	-23	-0.027	2.5
25	3.6	-19	-0.023	2.5

Cellular Band (Part 22H)

EDGE, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	26	0.031	2.5
-20	3.8	28	0.033	2.5
-10	3.8	25	0.030	2.5
0	3.8	23	0.027	2.5
10	3.8	19	0.023	2.5
20	3.8	22	0.026	2.5
30	3.8	22	0.026	2.5
40	3.8	24	0.029	2.5
50	3.8	23	0.027	2.5
25	4.3	21	0.025	2.5
25	3.6	18	0.022	2.5

PCS Band (Part 24E)

GMSK, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-28	-0.015	Pass
-20	3.8	-23	-0.012	Pass
-10	3.8	-28	-0.015	Pass
0	3.8	-26	-0.014	Pass
10	3.8	-25	-0.013	Pass
20	3.8	-21	-0.011	Pass
30	3.8	-23	-0.012	Pass
40	3.8	-28	-0.015	Pass
50	3.8	-21	-0.011	Pass
25	4.3	-19	-0.010	Pass
25	3.6	-22	-0.012	Pass

PCS Band (Part 24E)

EDGE1900, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-29	-0.015	Pass
-20	3.8	-35	-0.019	Pass
-10	3.8	-31	-0.016	Pass
0	3.8	-25	-0.013	Pass
10	3.8	-22	-0.012	Pass
20	3.8	-28	-0.015	Pass
30	3.8	-23	-0.012	Pass
40	3.8	-24	-0.013	Pass
50	3.8	-26	-0.014	Pass
25	4.3	-21	-0.011	Pass
25	3.6	-19	-0.010	Pass

WCDMA Band V :

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.8	-18	-0.022	2.5
-20	3.8	-26	-0.031	2.5
-10	3.8	-24	-0.029	2.5
0	3.8	-23	-0.027	2.5
10	3.8	-21	-0.025	2.5
20	3.8	-22	-0.026	2.5
30	3.8	-25	-0.030	2.5
40	3.8	-18	-0.022	2.5
50	3.8	-17	-0.020	2.5
25	4.3	-28	-0.033	2.5
25	3.6	-26	-0.031	2.5

WCDMA Band II :

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-42	-0.022	Pass
-20	3.8	-38	-0.020	Pass
-10	3.8	-41	-0.022	Pass
0	3.8	-36	-0.019	Pass
10	3.8	-43	-0.023	Pass
20	3.8	-39	-0.021	Pass
30	3.8	-37	-0.020	Pass
40	3.8	-36	-0.019	Pass
50	3.8	-44	-0.023	Pass
25	4.3	-38	-0.020	Pass
25	3.6	-39	-0.021	Pass

LTE Band II:

QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 1880$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-21.41	-0.0114	Pass
-20	3.8	-25.66	-0.0136	Pass
-10	3.8	-19.78	-0.0105	Pass
0	3.8	-23.75	-0.0126	Pass
10	3.8	-22.45	-0.0119	Pass
20	3.8	-28.08	-0.0149	Pass
30	3.8	-21.82	-0.0116	Pass
40	3.8	-27.48	-0.0146	Pass
50	3.8	-23.13	-0.0123	Pass
25	4.3	-19.21	-0.0102	Pass
25	3.6	-20.76	-0.0110	Pass

16-QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 1880$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-15.74	-0.0084	Pass
-20	3.8	-23.63	-0.0126	Pass
-10	3.8	-18.65	-0.0099	Pass
0	3.8	-14.78	-0.0079	Pass
10	3.8	-20.33	-0.0108	Pass
20	3.8	-21.87	-0.0116	Pass
30	3.8	-19.28	-0.0103	Pass
40	3.8	-20.17	-0.0107	Pass
50	3.8	-25.16	-0.0134	Pass
25	4.3	-19.18	-0.0102	Pass
25	3.6	-23.17	-0.0123	Pass

LTE Band IV:

QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 1732.5$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	21.76	0.0126	Pass
-20	3.8	19.83	0.0114	Pass
-10	3.8	22.95	0.0132	Pass
0	3.8	23.14	0.0134	Pass
10	3.8	25.17	0.0145	Pass
20	3.8	24.78	0.0143	Pass
30	3.8	25.14	0.0145	Pass
40	3.8	26.13	0.0151	Pass
50	3.8	19.84	0.0115	Pass
25	4.3	27.61	0.0159	Pass
25	3.6	22.75	0.0131	Pass

16-QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 1732.5$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-18.46	-0.0107	Pass
-20	3.8	-22.75	-0.0131	Pass
-10	3.8	-23.69	-0.0137	Pass
0	3.8	-14.31	-0.0083	Pass
10	3.8	-12.89	-0.0074	Pass
20	3.8	-17.8	-0.0103	Pass
30	3.8	-19.39	-0.0112	Pass
40	3.8	-22.47	-0.0130	Pass
50	3.8	-25.33	-0.0146	Pass
25	4.3	-27.41	-0.0158	Pass
25	3.6	-21.19	-0.0122	Pass

LTE Band V:

QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 836$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-12.74	-0.0152	Pass
-20	3.8	-14.68	-0.0175	Pass
-10	3.8	-17.79	-0.0213	Pass
0	3.8	-14.38	-0.0172	Pass
10	3.8	-15.46	-0.0185	Pass
20	3.8	-11.79	-0.0141	Pass
30	3.8	-12.85	-0.0154	Pass
40	3.8	-11.72	-0.0140	Pass
50	3.8	-10.69	-0.0128	Pass
25	4.3	-17.84	-0.0213	Pass
25	3.6	-16.79	-0.0201	Pass

16-QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 836$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-14.53	-0.0174	Pass
-20	3.8	-16.68	-0.0199	Pass
-10	3.8	-15.89	-0.0190	Pass
0	3.8	-11.65	-0.0139	Pass
10	3.8	-13.74	-0.0164	Pass
20	3.8	-15.39	-0.0184	Pass
30	3.8	-13.62	-0.0163	Pass
40	3.8	-12.18	-0.0146	Pass
50	3.8	-19.46	-0.0233	Pass
25	4.3	-14.73	-0.0176	Pass
25	3.6	-12.58	-0.0150	Pass

LTE Band VII:

QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 2535$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-37.54	-0.0148	Pass
-20	3.8	-39.62	-0.0156	Pass
-10	3.8	-41.75	-0.0165	Pass
0	3.8	-39.76	-0.0157	Pass
10	3.8	-42.88	-0.0169	Pass
20	3.8	-45.68	-0.0180	Pass
30	3.8	-49.73	-0.0196	Pass
40	3.8	-38.69	-0.0153	Pass
50	3.8	-42.68	-0.0168	Pass
25	4.3	-41.71	-0.0165	Pass
25	3.6	-41.95	-0.0165	Pass

16-QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 2535$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-33.47	-0.0132	Pass
-20	3.8	-35.62	-0.0141	Pass
-10	3.8	-36.14	-0.0143	Pass
0	3.8	-31.52	-0.0124	Pass
10	3.8	-37.92	-0.0150	Pass
20	3.8	-36.93	-0.0146	Pass
30	3.8	-35.48	-0.0140	Pass
40	3.8	-33.76	-0.0133	Pass
50	3.8	-31.73	-0.0125	Pass
25	4.3	-35.87	-0.0141	Pass
25	3.6	-34.93	-0.0138	Pass

LTE Band 17:

QPSK, Channel Bandwidth:10MHz Middle Channel, $f_c = 710$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-15.26	-0.0215	Pass
-20	3.8	-14.37	-0.0202	Pass
-10	3.8	-12.68	-0.0179	Pass
0	3.8	-17.69	-0.0249	Pass
10	3.8	-13.76	-0.0194	Pass
20	3.8	-12.92	-0.0182	Pass
30	3.8	-14.85	-0.0209	Pass
40	3.8	-13.58	-0.0191	Pass
50	3.8	-19.65	-0.0277	Pass
25	4.3	-17.48	-0.0246	Pass
25	3.6	-16.37	-0.0231	Pass

16-QAM, Channel Bandwidth:10MHz Middle Channel, $f_c = 710$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Result
°C	V _{DC}	Hz	ppm	
-30	3.8	-16.71	-0.0235	Pass
-20	3.8	-14.68	-0.0207	Pass
-10	3.8	-15.94	-0.0225	Pass
0	3.8	-13.78	-0.0194	Pass
10	3.8	-14.12	-0.0199	Pass
20	3.8	-18.31	-0.0258	Pass
30	3.8	-17.25	-0.0243	Pass
40	3.8	-16.38	-0.0231	Pass
50	3.8	-15.84	-0.0223	Pass
25	4.3	-18.76	-0.0264	Pass
25	3.6	-19.35	-0.0273	Pass

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small, the extreme voltage was declared by applicant.

******* END OF REPORT *******