



FCC Test Report

APPLICANT : Planet Avvio LLC
EQUIPMENT : Mobile phone
BRAND NAME : Avvio
MODEL NAME : A300
FCC ID : 2ALTA300X
STANDARD : FCC 47 CFR FCC Part 15 Subpart B
CLASSIFICATION : Certification

The product was received on Aug. 21, 2017 and testing was completed on Aug. 29, 2017. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager

Sportun International (Shenzhen) Inc.
1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City
Guangdong Province 518055 China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1. GENERAL DESCRIPTION	5
1.1. Applicant.....	5
1.2. Manufacturer	5
1.3. Product Feature of Equipment Under Test	5
1.4. Product Specification of Equipment Under Test	6
1.5. Modification of EUT	6
1.6. Test Location	7
1.7. Applicable Standards	7
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1. Test Mode	8
2.2. Connection Diagram of Test System	9
2.3. Support Unit used in test configuration and system.....	10
2.4. EUT Operation Test Setup	11
3. TEST RESULT.....	12
3.1. Test of AC Conducted Emission Measurement	12
3.2. Test of Radiated Emission Measurement	16
4. LIST OF MEASURING EQUIPMENT	22
5. UNCERTAINTY OF EVALUATION	23

APPENDIX A. SETUP PHOTOGRAPHS



REVISION HISTORY



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.107	AC Conducted Emission	< 15.107 limits	PASS	Under limit 13.59 dB at 0.15 MHz
3.2	15.109	Radiated Emission	< 15.109 limits	PASS	Under limit 3.46 dB at 30.00 MHz



1. General Description

1.1. Applicant

Planet Avvio LLC

9725 NW 117th Ave., Medley, FL 33178, United States

1.2. Manufacturer

Sintave

Sang Tai Technology Park, LiuXianDong, Xili, Nanshan District, ShenZhen City, GuangDong Province

1.3. Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile phone
Brand Name	Avvio
Model Name	A300
FCC ID	2ALTA300X
EUT supports Radios application	GSM/GPRS/EGPRS(Downlink only)/WCDMA/HSPA/Bluetooth v2.1 + EDR
IMEI Code	Conduction/Radiation: 352273017386340
HW Version	V0.2
SW Version	V0.1
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4. Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Rx Frequency	GSM850: 869.2 MHz ~ 893.8 MHz GSM1900: 1930.2 MHz ~ 1989.8 MHz WCDMA Band V: 871.4 MHz ~ 891.6 MHz WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Antenna Type	WWAN : PIFA Antenna Bluetooth : Fixed External Antenna
Type of Modulation	GSM: GMSK GPRS: GMSK EDGE(MCS 0-4): GMSK/(MCS 5-9), 8PSK(Downlink only) WCDMA: QPSK (Uplink) HSPA: QPSK (Uplink) Bluetooth (1Mbps) : GFSK Bluetooth (2Mbps) : $\pi/4$ -DQPSK Bluetooth (3Mbps) : 8-DPSK

1.5. Modification of EUT

No modifications are made to the EUT during all test items.



1.6. Test Location

Sportun Lab is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0) and the FCC designation No are CN5018 and CN5019.

Test Site	Sportun International (Shenzhen) Inc.	
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan Shenzhen City Guangdong Province 518055 China TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	
Test Site No.	Sportun Site No.	FCC Test Firm Registration No.
	CO01-SZ	251365

Test Site	Sportun International (Shenzhen) Inc.	
Test Site Location	No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan District Shenzhen City Guangdong Province 518055 China TEL: +86-755-3320-2398	
Test Site No.	Sportun Site No.	FCC Test Firm Registration No.
	03CH03-SZ	577730

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC 47 CFR FCC Part 15 Subpart B
- ANSI C63.4-2014

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.



2. Test Configuration of Equipment Under Test

2.1. Test Mode

The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.


Frequency range investigated: conduction (150 kHz to 30 MHz), radiation (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

Test Items	Function Type
AC Conducted Emission	Mode 1: GSM850 Idle + Bluetooth Idle + Adapter + Earphone + Camera(Front) <Fig.1> Mode 2: WCDMA850 Idle + USB Cable (Data Link with Notebook) + Bluetooth Idle + Earphone + MPEG4<Fig.2>
Radiated Emissions	Mode 1: GSM850 Idle + Bluetooth Idle + Adapter + Earphone + Camera(Front) <Fig.1> Mode 2: WCDMA850 Idle + USB Cable (Data Link with Notebook) + Bluetooth Idle + Earphone + MPEG4<Fig.2>


Remark:

1. The worst case of AC is mode 2; only the test data of this mode was reported.
2. The worst case of RE < 1G is mode 1; and the USB Link mode is mode 2, the test data of these modes were reported.
3. Data Link with Notebook means data application transferred mode between EUT and Notebook.

2.2. Connection Diagram of Test System

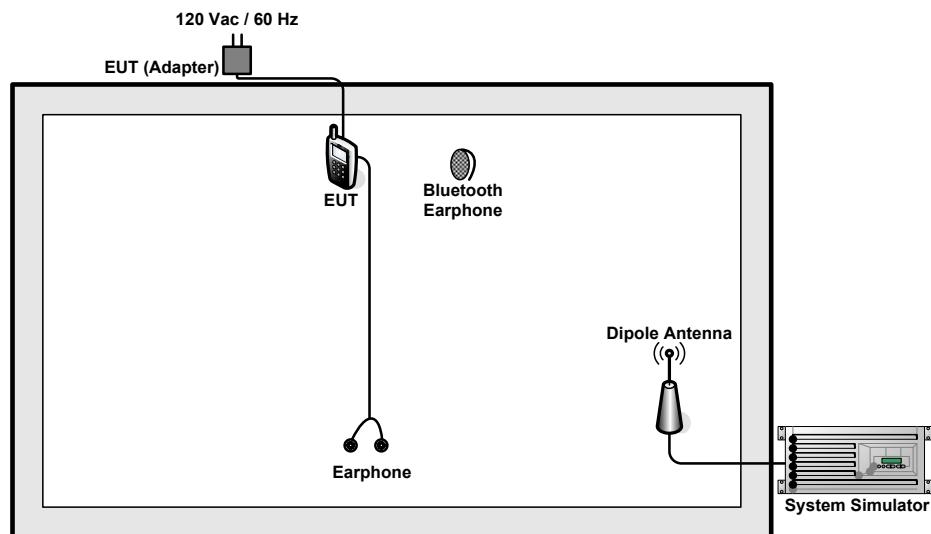

<Fig.1>

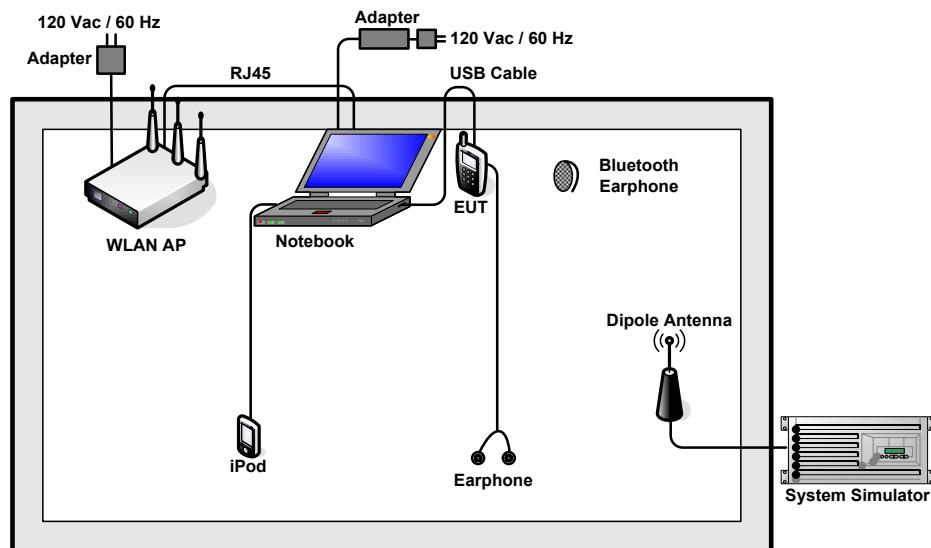

<Fig.2>



2.3. Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	ASUS	RT-AC66U	MSQ-RTAC66U	N/A	Unshielded,1.8m
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	WLAN AP
4.	Bluetooth Earphone	Samsung	HS3000	A3LHS3000	N/A	N/A
5.	Bluetooth Earphone	Samsung	EO-MG900	PYAHs-107W	N/A	N/A
6.	NOTE BOOK	Lenovo	E540	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
7.	USB cable	Motorola	SKN6378A	Fcc DoC	N/A	Unshielded,1m
8.	Earphone	Apple	MC690ZP/A	N/A	Unshielded,1.6m	Earphone
9.	Earphone	lenovo	SH100	FCC DoC	Unshielded,1.2m	N/A
10.	iPod nano 8GB	Apple	MC690ZP/A	N/A	Shielded, 1.2m	iPod nano 8GB
11.	iPod	Apple	MC525 ZP/A	DoC	Shielded, 1.0m	N/A
12.	SD Card	Kingston	MicroSD HC	FCC DoC	N/A	N/A
13.	SD Card	SanDisk	MicroSD HC	FCC DoC	N/A	SD Card



2.4. EUT Operation Test Setup

The EUT was in GSM or WCDMA idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between Notebook and EUT via USB cable.
2. Execute "Video player" to play MPEG4 files.
3. Turn on camera to capture images.



3. Test Result

3.1. Test of AC Conducted Emission Measurement

3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.


3.1.4 Test Setup

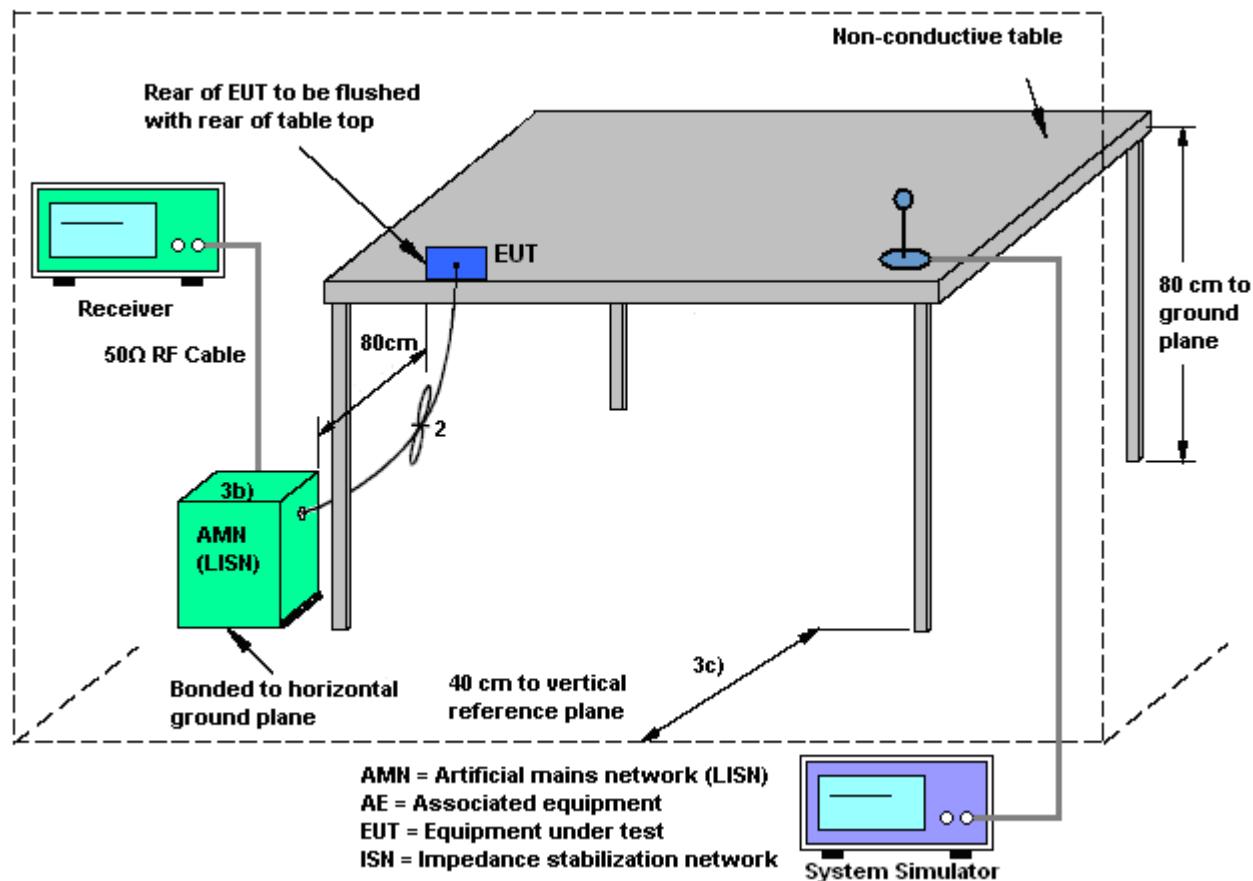



3.1.5 Test Result of AC Conducted Emission

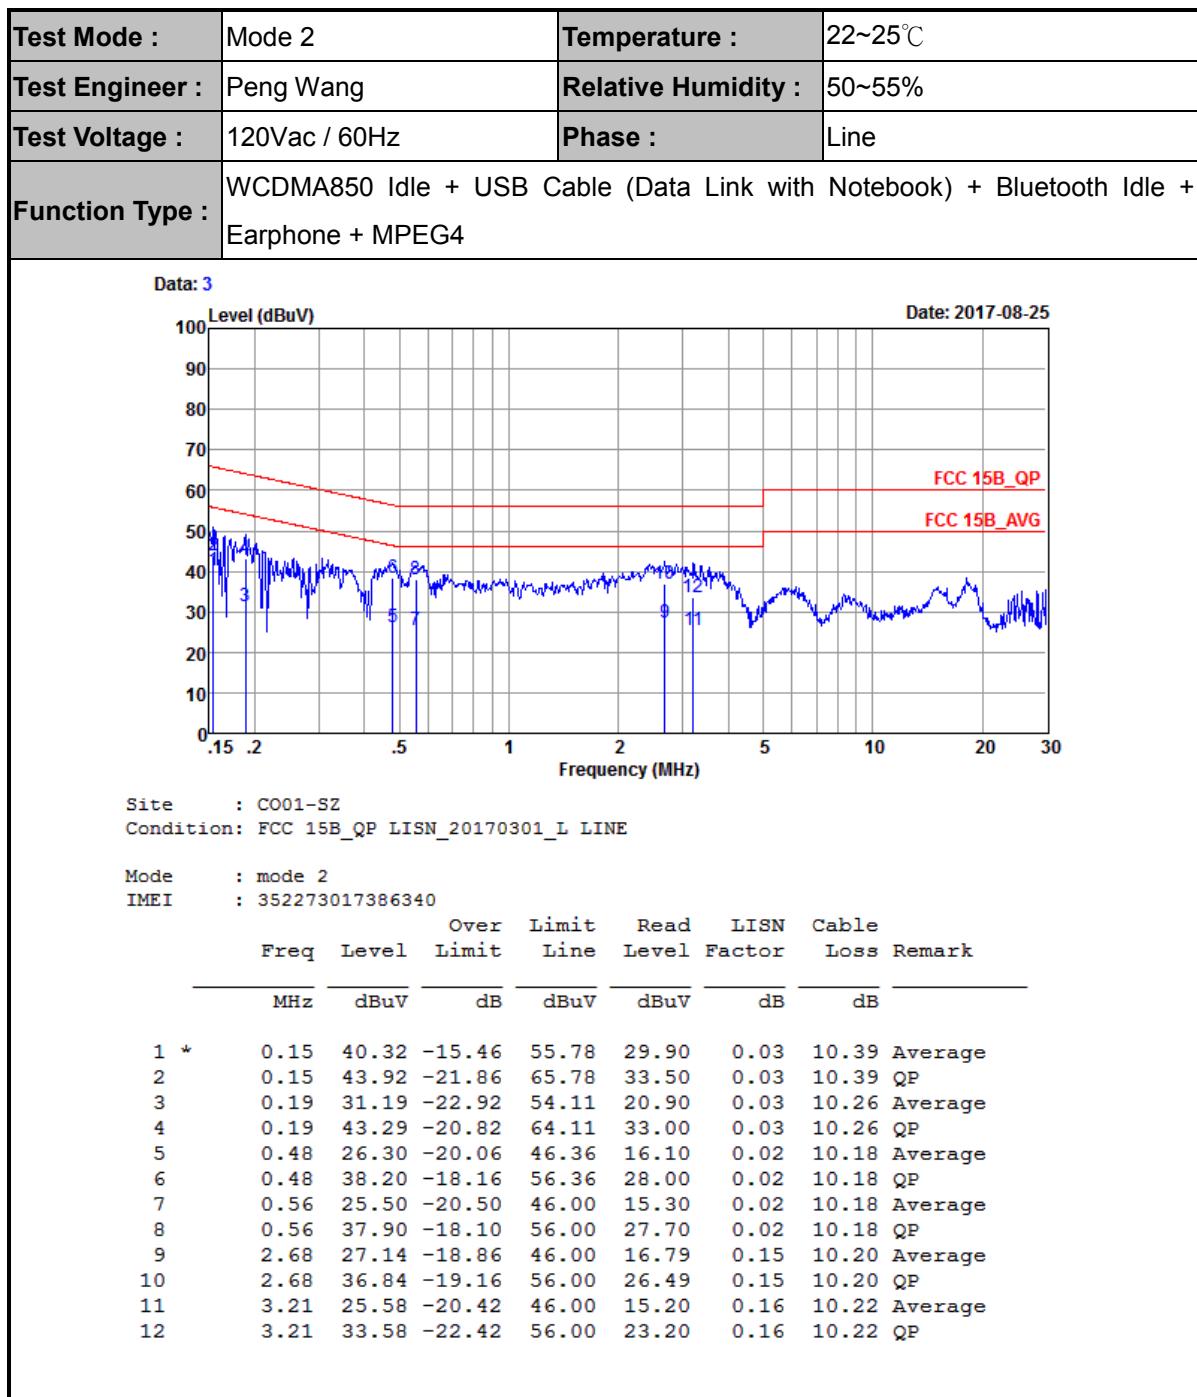

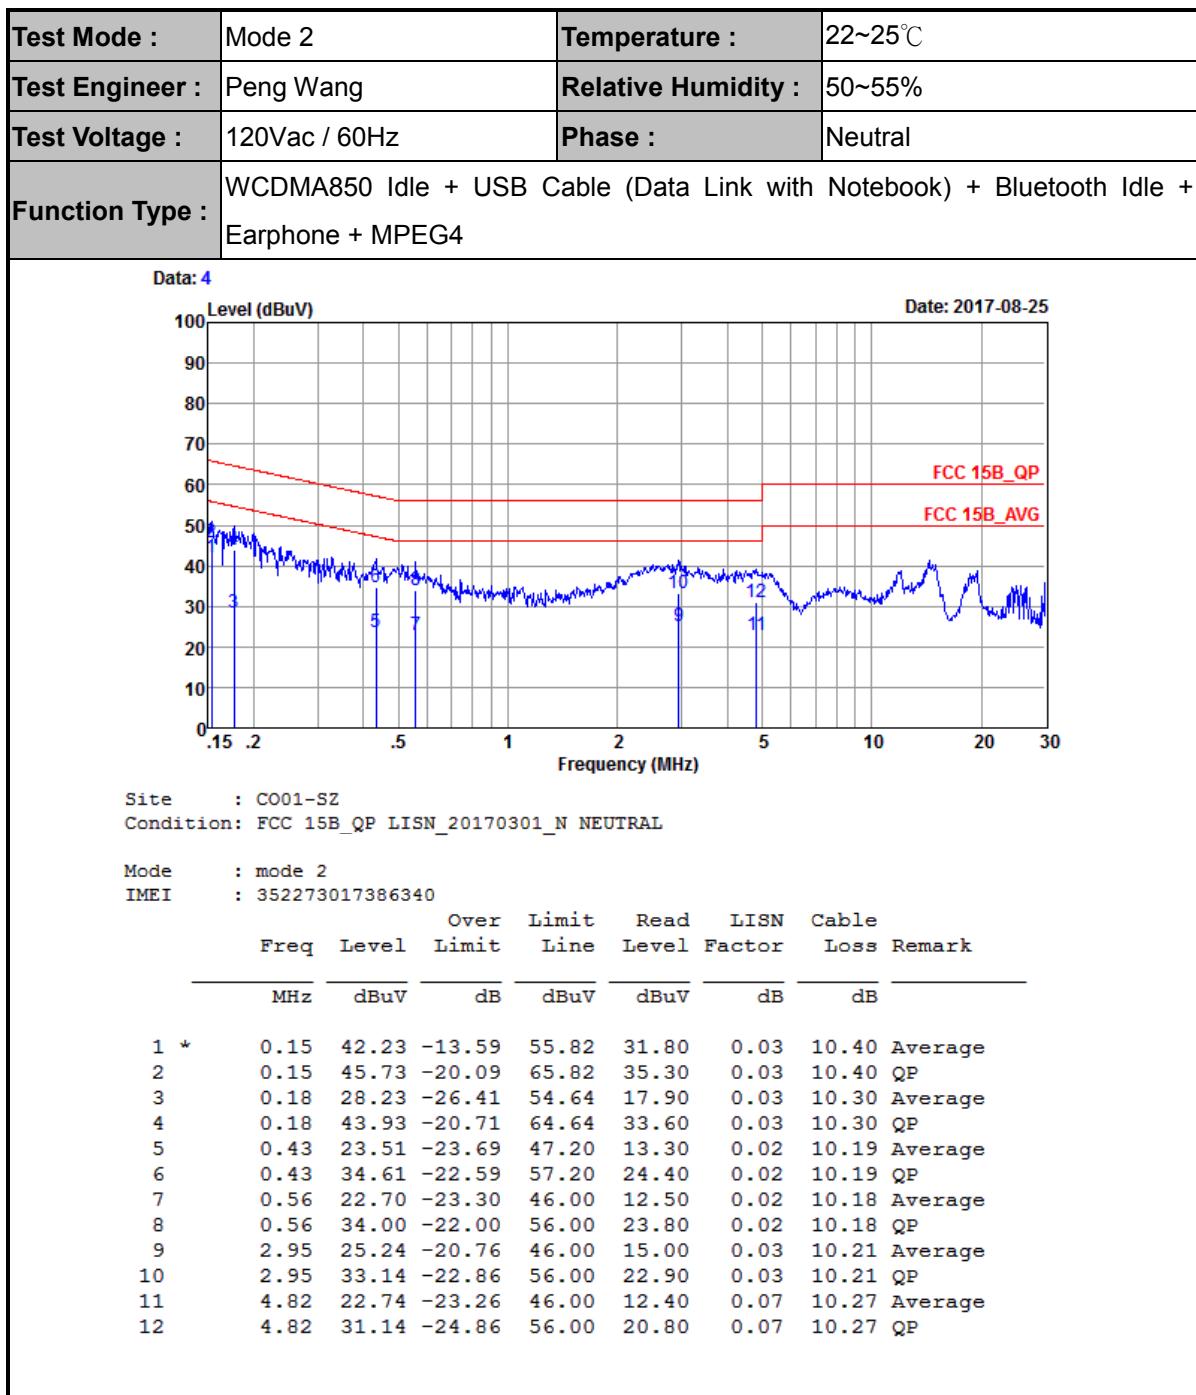



3.2. Test of Radiated Emission Measurement

3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

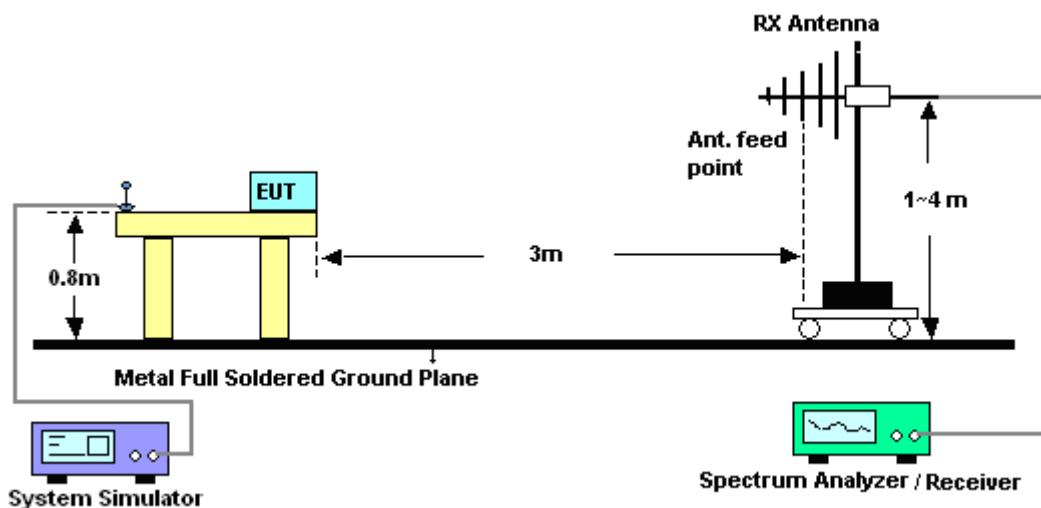


For radiated emissions above 1GHz

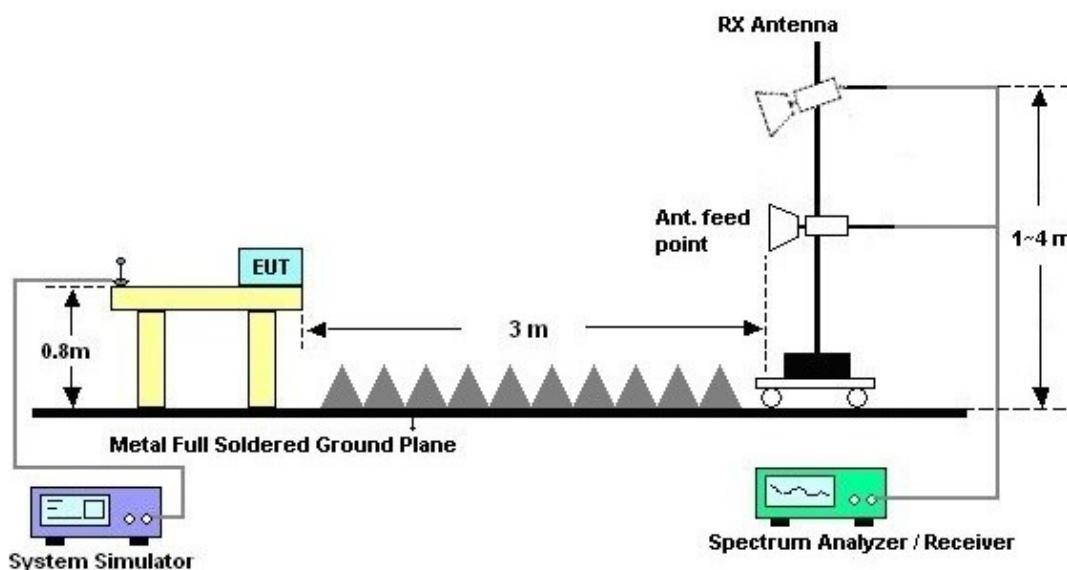



3.2.5. Test Result of Radiated Emission

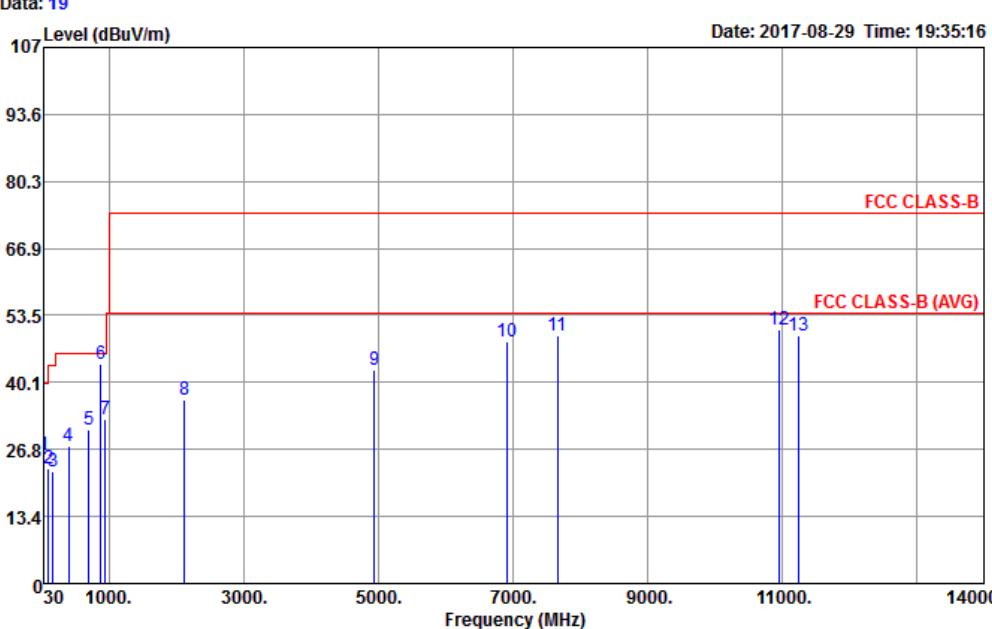Test Mode :	Mode 1	Temperature :	24~25°C																																																																																																																																																												
Test Engineer :	Liangliang Lu	Relative Humidity :	48~49%																																																																																																																																																												
Test Distance :	3m	Polarization :	Horizontal																																																																																																																																																												
Function Type :	GSM850 Idle + Bluetooth Idle + Adapter + Earphone + Camera(Front)																																																																																																																																																														
Remark :	#6 is system simulator signal which can be ignored.																																																																																																																																																														
Data: 19  Date: 2017-08-29 Time: 19:35:16																																																																																																																																																															
Site : 03CH03-SZ Condition : FCC CLASS-B 3m LF35408CBL6112D_6 HORIZONTAL Detector : Peak Mode : Mode 1 IMEI : 352273017386340 Plane : Y																																																																																																																																																															
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> </tbody> </table>				Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	Line	Limit	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
Freq	Level	Over	Limit			Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																			
		Line	Limit	Level	Factor	Loss	Factor	cm	deg																																																																																																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																						
<table border="1"> <tbody> <tr> <td>1</td> <td>30.54</td> <td>25.72</td> <td>-14.28</td> <td>40.00</td> <td>30.87</td> <td>26.28</td> <td>0.57</td> <td>32.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>96.96</td> <td>23.08</td> <td>-20.42</td> <td>43.50</td> <td>35.32</td> <td>18.50</td> <td>1.01</td> <td>31.75</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>164.46</td> <td>22.28</td> <td>-21.22</td> <td>43.50</td> <td>35.26</td> <td>17.15</td> <td>1.33</td> <td>31.46</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>400.10</td> <td>27.44</td> <td>-18.56</td> <td>46.00</td> <td>30.59</td> <td>25.98</td> <td>2.12</td> <td>31.25</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>706.00</td> <td>30.63</td> <td>-15.37</td> <td>46.00</td> <td>31.36</td> <td>27.65</td> <td>2.87</td> <td>31.25</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>881.70</td> <td>43.84</td> <td></td> <td></td> <td>43.42</td> <td>28.35</td> <td>3.28</td> <td>31.21</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>7</td> <td>948.90</td> <td>32.87</td> <td>-13.13</td> <td>46.00</td> <td>31.30</td> <td>29.38</td> <td>3.39</td> <td>31.20</td> <td>120</td> <td>40</td> <td>Peak</td> </tr> <tr> <td>8</td> <td>2122.00</td> <td>36.70</td> <td>-37.30</td> <td>74.00</td> <td>64.04</td> <td>26.46</td> <td>4.75</td> <td>58.55</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>9</td> <td>4946.00</td> <td>42.75</td> <td>-31.25</td> <td>74.00</td> <td>60.56</td> <td>31.88</td> <td>8.64</td> <td>58.33</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>10</td> <td>6926.00</td> <td>48.14</td> <td>-25.86</td> <td>74.00</td> <td>61.67</td> <td>35.62</td> <td>10.06</td> <td>59.21</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>11</td> <td>7666.00</td> <td>49.53</td> <td>-24.47</td> <td>74.00</td> <td>61.82</td> <td>36.80</td> <td>10.53</td> <td>59.62</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>12</td> <td>10968.00</td> <td>50.71</td> <td>-23.29</td> <td>74.00</td> <td>58.76</td> <td>39.83</td> <td>11.86</td> <td>59.74</td> <td>100</td> <td>360</td> <td>Peak</td> </tr> <tr> <td>13</td> <td>11248.00</td> <td>49.49</td> <td>-24.51</td> <td>74.00</td> <td>57.58</td> <td>39.60</td> <td>11.96</td> <td>59.65</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>				1	30.54	25.72	-14.28	40.00	30.87	26.28	0.57	32.00	---	---	Peak	2	96.96	23.08	-20.42	43.50	35.32	18.50	1.01	31.75	---	---	Peak	3	164.46	22.28	-21.22	43.50	35.26	17.15	1.33	31.46	---	---	Peak	4	400.10	27.44	-18.56	46.00	30.59	25.98	2.12	31.25	---	---	Peak	5	706.00	30.63	-15.37	46.00	31.36	27.65	2.87	31.25	---	---	Peak	6	881.70	43.84			43.42	28.35	3.28	31.21	---	---	Peak	7	948.90	32.87	-13.13	46.00	31.30	29.38	3.39	31.20	120	40	Peak	8	2122.00	36.70	-37.30	74.00	64.04	26.46	4.75	58.55	---	---	Peak	9	4946.00	42.75	-31.25	74.00	60.56	31.88	8.64	58.33	---	---	Peak	10	6926.00	48.14	-25.86	74.00	61.67	35.62	10.06	59.21	---	---	Peak	11	7666.00	49.53	-24.47	74.00	61.82	36.80	10.53	59.62	---	---	Peak	12	10968.00	50.71	-23.29	74.00	58.76	39.83	11.86	59.74	100	360	Peak	13	11248.00	49.49	-24.51	74.00	57.58	39.60	11.96	59.65	---	---	Peak
1	30.54	25.72	-14.28	40.00	30.87	26.28	0.57	32.00	---	---	Peak																																																																																																																																																				
2	96.96	23.08	-20.42	43.50	35.32	18.50	1.01	31.75	---	---	Peak																																																																																																																																																				
3	164.46	22.28	-21.22	43.50	35.26	17.15	1.33	31.46	---	---	Peak																																																																																																																																																				
4	400.10	27.44	-18.56	46.00	30.59	25.98	2.12	31.25	---	---	Peak																																																																																																																																																				
5	706.00	30.63	-15.37	46.00	31.36	27.65	2.87	31.25	---	---	Peak																																																																																																																																																				
6	881.70	43.84			43.42	28.35	3.28	31.21	---	---	Peak																																																																																																																																																				
7	948.90	32.87	-13.13	46.00	31.30	29.38	3.39	31.20	120	40	Peak																																																																																																																																																				
8	2122.00	36.70	-37.30	74.00	64.04	26.46	4.75	58.55	---	---	Peak																																																																																																																																																				
9	4946.00	42.75	-31.25	74.00	60.56	31.88	8.64	58.33	---	---	Peak																																																																																																																																																				
10	6926.00	48.14	-25.86	74.00	61.67	35.62	10.06	59.21	---	---	Peak																																																																																																																																																				
11	7666.00	49.53	-24.47	74.00	61.82	36.80	10.53	59.62	---	---	Peak																																																																																																																																																				
12	10968.00	50.71	-23.29	74.00	58.76	39.83	11.86	59.74	100	360	Peak																																																																																																																																																				
13	11248.00	49.49	-24.51	74.00	57.58	39.60	11.96	59.65	---	---	Peak																																																																																																																																																				



Test Mode :	Mode 1	Temperature :	24~25°C																																																																																																																																																												
Test Engineer :	Liangliang Lu	Relative Humidity :	48~49%																																																																																																																																																												
Test Distance :	3m	Polarization :	Horizontal																																																																																																																																																												
Function Type :	GSM850 Idle + Bluetooth Idle + Adapter + Earphone + Camera(Front)																																																																																																																																																														
Remark :	#7 is system simulator signal which can be ignored.																																																																																																																																																														
Data: 20 																																																																																																																																																															
Date: 2017-08-29 Time: 19:35:08																																																																																																																																																															
Site : 03CH03-SZ Condition : FCC CLASS-B 3m LF35408CBL6112D_6 VERTICAL Detector : Peak																																																																																																																																																															
Mode : Mode 1 IMEI : 352273017386340 Plane : Y																																																																																																																																																															
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> </tbody> </table>				Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	Limit	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
Freq	Level	Over	Limit			Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																			
		Limit	Line	Level	Factor	Loss	Factor	cm	deg																																																																																																																																																						
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																						
<table border="1"> <tbody> <tr> <td>1</td> <td>30.00</td> <td>36.54</td> <td>-3.46</td> <td>40.00</td> <td>41.28</td> <td>26.70</td> <td>0.56</td> <td>32.00</td> <td>135</td> <td>65</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>42.42</td> <td>29.39</td> <td>-10.61</td> <td>40.00</td> <td>39.89</td> <td>20.82</td> <td>0.67</td> <td>31.99</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>176.34</td> <td>19.95</td> <td>-23.55</td> <td>43.50</td> <td>33.38</td> <td>16.64</td> <td>1.35</td> <td>31.42</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>4</td> <td>399.40</td> <td>27.68</td> <td>-18.32</td> <td>46.00</td> <td>30.81</td> <td>26.00</td> <td>2.12</td> <td>31.25</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>700.40</td> <td>30.22</td> <td>-15.78</td> <td>46.00</td> <td>30.91</td> <td>27.70</td> <td>2.86</td> <td>31.25</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>6</td> <td>845.30</td> <td>30.92</td> <td>-15.08</td> <td>46.00</td> <td>30.94</td> <td>28.05</td> <td>3.19</td> <td>31.26</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>7</td> <td>881.70</td> <td>42.21</td> <td></td> <td></td> <td>41.79</td> <td>28.35</td> <td>3.28</td> <td>31.21</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>8</td> <td>2902.00</td> <td>38.21</td> <td>-35.79</td> <td>74.00</td> <td>62.26</td> <td>28.46</td> <td>6.13</td> <td>58.64</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>9</td> <td>4828.00</td> <td>43.96</td> <td>-30.04</td> <td>74.00</td> <td>62.12</td> <td>31.59</td> <td>8.59</td> <td>58.34</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>10</td> <td>6534.00</td> <td>47.16</td> <td>-26.84</td> <td>74.00</td> <td>62.35</td> <td>34.04</td> <td>9.86</td> <td>59.09</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>11</td> <td>8444.00</td> <td>49.96</td> <td>-24.04</td> <td>74.00</td> <td>61.56</td> <td>37.31</td> <td>10.77</td> <td>59.68</td> <td>100</td> <td>0</td> <td>Peak</td> </tr> <tr> <td>12</td> <td>10952.00</td> <td>49.76</td> <td>-24.24</td> <td>74.00</td> <td>57.89</td> <td>39.80</td> <td>11.84</td> <td>59.77</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>13</td> <td>11040.00</td> <td>49.69</td> <td>-24.31</td> <td>74.00</td> <td>57.64</td> <td>39.84</td> <td>11.87</td> <td>59.66</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>				1	30.00	36.54	-3.46	40.00	41.28	26.70	0.56	32.00	135	65	Peak	2	42.42	29.39	-10.61	40.00	39.89	20.82	0.67	31.99	---	---	Peak	3	176.34	19.95	-23.55	43.50	33.38	16.64	1.35	31.42	---	---	Peak	4	399.40	27.68	-18.32	46.00	30.81	26.00	2.12	31.25	---	---	Peak	5	700.40	30.22	-15.78	46.00	30.91	27.70	2.86	31.25	---	---	Peak	6	845.30	30.92	-15.08	46.00	30.94	28.05	3.19	31.26	---	---	Peak	7	881.70	42.21			41.79	28.35	3.28	31.21	---	---	Peak	8	2902.00	38.21	-35.79	74.00	62.26	28.46	6.13	58.64	---	---	Peak	9	4828.00	43.96	-30.04	74.00	62.12	31.59	8.59	58.34	---	---	Peak	10	6534.00	47.16	-26.84	74.00	62.35	34.04	9.86	59.09	---	---	Peak	11	8444.00	49.96	-24.04	74.00	61.56	37.31	10.77	59.68	100	0	Peak	12	10952.00	49.76	-24.24	74.00	57.89	39.80	11.84	59.77	---	---	Peak	13	11040.00	49.69	-24.31	74.00	57.64	39.84	11.87	59.66	---	---	Peak
1	30.00	36.54	-3.46	40.00	41.28	26.70	0.56	32.00	135	65	Peak																																																																																																																																																				
2	42.42	29.39	-10.61	40.00	39.89	20.82	0.67	31.99	---	---	Peak																																																																																																																																																				
3	176.34	19.95	-23.55	43.50	33.38	16.64	1.35	31.42	---	---	Peak																																																																																																																																																				
4	399.40	27.68	-18.32	46.00	30.81	26.00	2.12	31.25	---	---	Peak																																																																																																																																																				
5	700.40	30.22	-15.78	46.00	30.91	27.70	2.86	31.25	---	---	Peak																																																																																																																																																				
6	845.30	30.92	-15.08	46.00	30.94	28.05	3.19	31.26	---	---	Peak																																																																																																																																																				
7	881.70	42.21			41.79	28.35	3.28	31.21	---	---	Peak																																																																																																																																																				
8	2902.00	38.21	-35.79	74.00	62.26	28.46	6.13	58.64	---	---	Peak																																																																																																																																																				
9	4828.00	43.96	-30.04	74.00	62.12	31.59	8.59	58.34	---	---	Peak																																																																																																																																																				
10	6534.00	47.16	-26.84	74.00	62.35	34.04	9.86	59.09	---	---	Peak																																																																																																																																																				
11	8444.00	49.96	-24.04	74.00	61.56	37.31	10.77	59.68	100	0	Peak																																																																																																																																																				
12	10952.00	49.76	-24.24	74.00	57.89	39.80	11.84	59.77	---	---	Peak																																																																																																																																																				
13	11040.00	49.69	-24.31	74.00	57.64	39.84	11.87	59.66	---	---	Peak																																																																																																																																																				



Test Mode :	Mode 2	Temperature :	24~25°C																																				
Test Engineer :	Liangliang Lu	Relative Humidity :	48~49%																																				
Test Distance :	3m	Polarization :	Vertical																																				
Function Type :	WCDMA850 Idle + USB Cable (Data Link with Notebook) + Bluetooth Idle + Earphone + MPEG4																																						
Remark :	#7 is system simulator signal which can be ignored.																																						
Date: 2017-08-29 Time: 19:36:47 Site : 03CH03-SZ Condition : FCC CLASS-B 3m LF35408CBL6112D_6 HORIZONTAL Detector : Peak Project : (FC)782106 Mode : Mode 2																																							
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>MHz</td> <td>dBuV/m</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>cm</td> <td>deg</td> <td></td> </tr> </tbody> </table>										Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	Limit	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos			Remark																											
		Limit	Line	Level	Factor	Loss	Factor	cm	deg																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1	99.93	31.41	-12.09	43.50	43.32	18.80	1.03	31.74	---	--- Peak																													
2	143.49	28.21	-15.29	43.50	40.58	17.93	1.25	31.55	---	--- Peak																													
3	199.29	31.85	-11.65	43.50	46.11	15.60	1.47	31.33	---	--- Peak																													
4	300.00	36.56	-9.44	46.00	47.00	19.10	1.82	31.36	110	20 Peak																													
5	384.00	33.13	-12.87	46.00	38.07	24.24	2.08	31.26	---	--- Peak																													
6	768.30	32.50	-13.50	46.00	33.35	27.34	3.02	31.21	---	--- Peak																													
7	881.80	40.25		39.83	28.35	3.28	31.21	---	---	--- Peak																													
8	2904.20	38.71	-35.29	74.00	62.76	28.46	6.13	58.64	---	--- Peak																													
9	4970.30	43.88	-30.12	74.00	61.59	31.96	8.65	58.32	---	--- Peak																													
10	6906.00	47.97	-26.03	74.00	61.63	35.49	10.05	59.20	---	--- Peak																													
11	8717.60	49.82	-24.18	74.00	61.22	37.47	10.86	59.73	---	--- Peak																													
12	10950.00	50.59	-23.41	74.00	58.72	39.80	11.84	59.77	155	50 Peak																													
13	11000.10	50.30	-23.70	74.00	58.20	39.90	11.86	59.66	---	--- Peak																													

 | | | | | | | | | |



Test Mode :	Mode 2	Temperature :	24~25°C																																																																																																																																																																		
Test Engineer :	Liangliang Lu	Relative Humidity :	48~49%																																																																																																																																																																		
Test Distance :	3m	Polarization :	Vertical																																																																																																																																																																		
Function Type :	WCDMA850 Idle + USB Cable (Data Link with Notebook) + Bluetooth Idle + Earphone + MPEG4																																																																																																																																																																				
Remark :	#7 is system simulator signal which can be ignored.																																																																																																																																																																				
<p>Date: 2017-08-29 Time: 13:02:51</p> <p>Site : 03CH03-SZ Condition : FCC CLASS-B 3m LF35408CBL6112D_6 VERTICAL Detector : Peak Project : (FC)782106 Mode : Mode 2</p>																																																																																																																																																																					
<table border="1"> <thead> <tr> <th rowspan="2">Freq</th> <th rowspan="2">Level</th> <th>Over</th> <th>Limit</th> <th>Read</th> <th>Antenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>99.93</td> <td>29.99</td> <td>-13.51</td> <td>43.50</td> <td>41.90</td> <td>18.80</td> <td>1.03</td> <td>31.74</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>199.29</td> <td>28.40</td> <td>-15.10</td> <td>43.50</td> <td>42.66</td> <td>15.60</td> <td>1.47</td> <td>31.33</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>3</td> <td>299.73</td> <td>31.11</td> <td>-14.89</td> <td>46.00</td> <td>41.55</td> <td>19.10</td> <td>1.82</td> <td>31.36</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>4</td> <td>432.30</td> <td>29.99</td> <td>-16.01</td> <td>46.00</td> <td>33.69</td> <td>25.28</td> <td>2.21</td> <td>31.19</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>5</td> <td>720.00</td> <td>34.01</td> <td>-11.99</td> <td>46.00</td> <td>34.80</td> <td>27.54</td> <td>2.91</td> <td>31.24</td> <td>110</td> <td>90 Peak</td> </tr> <tr> <td>6</td> <td>799.80</td> <td>33.34</td> <td>-12.66</td> <td>46.00</td> <td>34.03</td> <td>27.40</td> <td>3.10</td> <td>31.19</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>7</td> <td>881.00</td> <td>38.84</td> <td></td> <td></td> <td>38.43</td> <td>28.35</td> <td>3.27</td> <td>31.21</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>8</td> <td>2490.20</td> <td>38.73</td> <td>-35.27</td> <td>74.00</td> <td>64.18</td> <td>27.90</td> <td>5.19</td> <td>58.54</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>9</td> <td>4974.00</td> <td>43.51</td> <td>-30.49</td> <td>74.00</td> <td>61.22</td> <td>31.96</td> <td>8.65</td> <td>58.32</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>10</td> <td>6892.60</td> <td>47.84</td> <td>-26.16</td> <td>74.00</td> <td>61.50</td> <td>35.49</td> <td>10.05</td> <td>59.20</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>11</td> <td>7786.00</td> <td>48.95</td> <td>-25.05</td> <td>74.00</td> <td>61.00</td> <td>37.01</td> <td>10.64</td> <td>59.70</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>12</td> <td>10402.00</td> <td>49.36</td> <td>-24.64</td> <td>74.00</td> <td>59.73</td> <td>38.82</td> <td>11.64</td> <td>60.83</td> <td>---</td> <td>--- Peak</td> </tr> <tr> <td>13</td> <td>11138.00</td> <td>50.00</td> <td>-24.00</td> <td>74.00</td> <td>57.99</td> <td>39.74</td> <td>11.92</td> <td>59.65</td> <td>120</td> <td>40 Peak</td> </tr> </tbody> </table>				Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark	Limit	Line	Level	Factor	Loss	Factor	cm	deg	1	99.93	29.99	-13.51	43.50	41.90	18.80	1.03	31.74	---	--- Peak	2	199.29	28.40	-15.10	43.50	42.66	15.60	1.47	31.33	---	--- Peak	3	299.73	31.11	-14.89	46.00	41.55	19.10	1.82	31.36	---	--- Peak	4	432.30	29.99	-16.01	46.00	33.69	25.28	2.21	31.19	---	--- Peak	5	720.00	34.01	-11.99	46.00	34.80	27.54	2.91	31.24	110	90 Peak	6	799.80	33.34	-12.66	46.00	34.03	27.40	3.10	31.19	---	--- Peak	7	881.00	38.84			38.43	28.35	3.27	31.21	---	--- Peak	8	2490.20	38.73	-35.27	74.00	64.18	27.90	5.19	58.54	---	--- Peak	9	4974.00	43.51	-30.49	74.00	61.22	31.96	8.65	58.32	---	--- Peak	10	6892.60	47.84	-26.16	74.00	61.50	35.49	10.05	59.20	---	--- Peak	11	7786.00	48.95	-25.05	74.00	61.00	37.01	10.64	59.70	---	--- Peak	12	10402.00	49.36	-24.64	74.00	59.73	38.82	11.64	60.83	---	--- Peak	13	11138.00	50.00	-24.00	74.00	57.99	39.74	11.92	59.65	120	40 Peak
Freq	Level	Over	Limit			Read	Antenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																																																																																									
		Limit	Line	Level	Factor	Loss	Factor	cm	deg																																																																																																																																																												
1	99.93	29.99	-13.51	43.50	41.90	18.80	1.03	31.74	---	--- Peak																																																																																																																																																											
2	199.29	28.40	-15.10	43.50	42.66	15.60	1.47	31.33	---	--- Peak																																																																																																																																																											
3	299.73	31.11	-14.89	46.00	41.55	19.10	1.82	31.36	---	--- Peak																																																																																																																																																											
4	432.30	29.99	-16.01	46.00	33.69	25.28	2.21	31.19	---	--- Peak																																																																																																																																																											
5	720.00	34.01	-11.99	46.00	34.80	27.54	2.91	31.24	110	90 Peak																																																																																																																																																											
6	799.80	33.34	-12.66	46.00	34.03	27.40	3.10	31.19	---	--- Peak																																																																																																																																																											
7	881.00	38.84			38.43	28.35	3.27	31.21	---	--- Peak																																																																																																																																																											
8	2490.20	38.73	-35.27	74.00	64.18	27.90	5.19	58.54	---	--- Peak																																																																																																																																																											
9	4974.00	43.51	-30.49	74.00	61.22	31.96	8.65	58.32	---	--- Peak																																																																																																																																																											
10	6892.60	47.84	-26.16	74.00	61.50	35.49	10.05	59.20	---	--- Peak																																																																																																																																																											
11	7786.00	48.95	-25.05	74.00	61.00	37.01	10.64	59.70	---	--- Peak																																																																																																																																																											
12	10402.00	49.36	-24.64	74.00	59.73	38.82	11.64	60.83	---	--- Peak																																																																																																																																																											
13	11138.00	50.00	-24.00	74.00	57.99	39.74	11.92	59.65	120	40 Peak																																																																																																																																																											



4. List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jan. 06, 2017	Aug. 25, 2017	Jan. 05, 2018	Conduction (CO01-SZ)
AC LISN	EMCO	3816/2SH	00103912	9kHz~30MHz	Jan. 05, 2017	Aug. 25, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	MessTec	3816/2SH	00103892	9kHz~30MHz	Jan. 05, 2017	Aug. 25, 2017	Jan. 04, 2018	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	61602000089 1	100Vac~250Vac	Jul. 19, 2017	Aug. 25, 2017	Jul. 18, 2018	Conduction (CO01-SZ)
Pulse Limiter	COM-POWER	LIT-153 Transient Limiter	53139	150kHz~30MHz	Oct.11, 2016	Aug. 25, 2017	Oct.10, 2017	Conduction (CO01-SZ)
RF Cable	Woken	B0720#0001	CO01SZ0007	150kHz~30MHz	Oct. 08, 2016	Aug. 25, 2017	Oct. 09, 2017	Conduction (CO01-SZ)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 20, 2017	Aug. 29, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 20, 2017	Aug. 29, 2017	Apr. 19, 2018	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	May 14, 2017	Aug. 29, 2017	May 13, 2018	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA 9120D	9120D-1285	1GHz~18GHz	Jan. 12, 2017	Aug. 29, 2017	Jan. 11, 2018	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz ~3000MHz	Oct. 11, 2016	Aug. 29, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-001018 00-30-10P-R	1943528	1GHz~18GHz	Oct. 11, 2016	Aug. 29, 2017	Oct. 10, 2017	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	NCR	Aug. 29, 2017	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Aug. 29, 2017	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Aug. 29, 2017	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required



5. Uncertainty of Evaluation

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB
---	-------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1dB
---	-------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------