FCC RF Test Report

APPLICANT : Planet Avvio LLC EQUIPMENT : Mobile phone

BRAND NAME : Avvio MODEL NAME : 301

FCC ID : 2ALTART301X

STANDARD : FCC 47 CFR Part 2, 22(H), 24(E)

CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Jul. 16, 2018 and completely tested on Jul. 31, 2018. We, Sporton International (Shenzhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Shenzhen) Inc., the test report shall not be reproduced except in full.



Approved by: Eric Shih / Manager

Sporton International (Shenzhen) Inc.

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City, Guangdong Province 518055, China

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 1 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

TABLE OF CONTENTS

RE	visio	N HISTORY	3
SU	MMAF	RY OF TEST RESULT	4
1	GEN	ERAL DESCRIPTION	5
	1.1	Applicant	5
	1.2	Manufacturer	
	1.3	Product Feature of Equipment Under Test	
	1.4	Product Specification of Equipment Under Test	6
	1.5	Modification of EUT	6
	1.6	Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator	7
	1.7	Testing Location	7
	1.8	Applicable Standards	8
2	TES1	CONFIGURATION OF EQUIPMENT UNDER TEST	9
	2.1	Test Mode	9
	2.2	Connection Diagram of Test System	10
	2.3	Support Unit used in test configuration	
	2.4	Measurement Results Explanation Example	
	2.5	Frequency List of Low/Middle/High Channels	11
3	CON	DUCTED TEST RESULT	12
	3.1	Measuring Instruments	12
	3.2	Test Setup	12
	3.3	Test Result of Conducted Test	12
	3.4	Conducted Output Power and ERP/EIRP	13
	3.5	Peak-to-Average Ratio	13
	3.6	99% Occupied Bandwidth and 26dB Bandwidth Measurement	14
	3.7	Conducted Band Edge	15
	3.8	Conducted Spurious Emission	16
	3.9	Frequency Stability	17
4	RAD	ATED TEST ITEMS	18
	4.1	Measuring Instruments	18
	4.2	Test Setup	18
	4.3	Test Result of Radiated Test	18
	4.4	Field Strength of Spurious Radiation Measurement	19
5	LIST	OF MEASURING EQUIPMENT	20
6	UNC	ERTAINTY OF EVALUATION	21
API	PEND	IX A. TEST RESULTS OF CONDUCTED TEST	
API	PEND	IX B. TEST RESULTS OF RADIATED TEST	
API	PEND	IX C. TEST SETUP PHOTOGRAPHS	

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 2 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG871604	Rev. 01	Initial issue of report	Sep. 21, 2018

Sporton International (Shenzhen) Inc.Page NuTEL: +86-755-8637-9589Report I.

FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 3 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
	§2.1046	Conducted Output Power	Reporting Only	PASS	-
3.4	§22.913(a)(5) Effective Radiated Power		< 7 Watts	PASS	-
	§24.232(c)	Equivalent Isotropic Radiated Power	< 2 Watts	PASS	-
3.5	§24.232(d)	Peak-to-Average Ratio	< 13 dB	PASS	-
3.6	3.6 §2.1049 Occupied Bandwidth		Reporting Only	PASS	1
3.7	\$2.1051 \$22.917(a) \$24.238(a) Band Edge Measurement		< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a)	Conducted Emission	< 43+10log10(P[Watts])	PASS	-
	§2.1055 §22.355	Frequency Stability	< 2.5 ppm for Part 22H		
3.9	§2.1055 §24.235	for Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §22.917(a) §24.238(a)	Field Strength of Spurious Radiation	< 43+10log10(P[Watts])	PASS	Under limit 12.53 dB at 3760.000 MHz

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 4 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

1 General Description

1.1 Applicant

Planet Avvio LLC

9725 NW 117th Ave., Medley, FL 33178, United States

1.2 Manufacturer

China Sum Company Limited

7thFloor, Block B, DaTang Times building, Meilong road, Longhua New District, Shenzhen, China

Report No.: FG871604

1.3 Product Feature of Equipment Under Test

Product Feature				
Equipment	Mobile phone			
Brand Name	Avvio			
Model Name	301			
FCC ID	2ALTART301X			
EUT supports Radios application	GSM/GPRS/WCDMA/HSPA/			
Eo i supports Radios application	Bluetooth BR/EDR			
IMEI Code	Conducted: 352273017386340			
INVELOCIO	Radiation: 862433017501255			
HW Version	C719MB_V1.0			
SW Version	T3_CLARO_Colombia_V0.8_09012018			
EUT Stage	Identical Prototype			

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

Sporton International (Shenzhen) Inc.Page Number: 5 of 21TEL: +86-755-8637-9589Report Issued Date: Sep. 21, 2018

FAX: +86-755-8637-9595 Report Version : Rev. 01
FCC ID: 2ALTART301X Report Template No.: BU5-FG22/24 Version 2.0

1.4 Product Specification of Equipment Under Test

Standards	Standards-related Product Specification					
	GSM/GPRS:					
	850:	824.2 MHz ~ 848.8 MHz				
Ty Fraguency	1900:	1850.2 MHz ~ 1909.8MHz				
Tx Frequency	WCDMA:					
	Band V:	826.4 MHz ~ 846.6 MHz				
	Band II:	1852.4 MHz ~ 1907.6 MHz				
	GSM/GPF	RS:				
	850:	869.2 MHz ~ 893.8 MHz				
By Fraguency	1900:	1930.2 MHz ~ 1989.8 MHz				
Rx Frequency	WCDMA:					
	Band V:	871.4 MHz ~ 891.6 MHz				
	Band II:	1932.4 MHz ~ 1987.6 MHz				
	GSM/GPRS:					
	850:	31.42 dBm				
Maximum Output Power to Antenna	1900:	29.83 dBm				
Maximum Output Power to Antenna	WCDMA:					
	Band V:	23.16 dBm				
	Band II:	23.83 dBm				
Antenna Type	PIFA Anten	na				
Antenna Gain	Cellular Ba	nd: 0.5 dBi				
Antenna Gain	PCS Band:	0 dBi				
	GSM: GMS					
	GPRS: GMSK					
Type of Modulation	WCDMA: BPSK (Uplink)					
	HSDPA: QPSK (Uplink)					
	HSUPA : QPSK (Uplink)					

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 6 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

1.6 Maximum ERP/EIRP Power, Frequency Tolerance, and Emission Designator

FCC Rule	System	Type of Modulation	Maximum ERP/EIRP (W)	Frequency Tolerance (ppm)	Emission Designator
Part 22H	GSM850 GSM	GMSK	0.9484	0.0036 ppm	244KGXW
Part 22H	WCDMA Band V RMC 12.2Kbps	BPSK	0.1416	0.0038 ppm	4M11F9W
Part 24E	GSM1900 GSM	GMSK	0.9616	0.0015 ppm	245KGXW
Part 24E	WCDMA Band II RMC 12.2Kbps	BPSK	0.2415	0.0017 ppm	4M10F9W

1.7 Testing Location

Sporton International (Shenzhen) Inc. is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0).

,						
Test Site	Sporton International (Shenzhen) Inc.					
	1/F, 2/F, Bldg 5, Shiling	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City,				
Test Site Location	Guangdong Province 518055, China					
rest Site Location	TEL: +86-755-8637-9589					
	FAX: +86-755-8637-9595					
Toot Site No	Sporton Site No. FCC designation No.		FCC Test Firm Registration No.			
Test Site No.	TH01-SZ	CN5018	337463			

Test Site	Sporton International (Shenzhen) Inc.				
Test Site Location	· ·	Guangdong Province 51805	, Fengzeyuan Warehouse, Nanshan 55, China		
Test Site No.	Sporton Site No.	ite No. FCC designation No. FCC Test Firm Regis			
	03CH03-SZ	CN5019	577730		

Note: The test site complies with ANSI C63.4 2014 requirement.

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 7 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 22(H), 24(E)
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

- 1. All test items were verified and recorded according to the standards and without any deviation during the test.
- 2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 8 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

Report No.: FG871604

Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission.

Radiated emissions were investigated as following frequency range:

- 30 MHz to10th harmonic for GSM850 and WCDMA Band V.
- 2. 30 MHz to10th harmonic for GSM1900 and WCDMA Band II.

All modes and data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

	Test Modes						
Band	Radiated TCs	Conducted TCs					
GSM 850	■ GSM Link	■ GSM Link					
GSM 1900	■ GSM Link	■ GSM Link					
WCDMA Band V	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					
WCDMA Band II	■ RMC 12.2Kbps Link	■ RMC 12.2Kbps Link					


 Sporton International (Shenzhen) Inc.
 Page Number
 : 9 of 21

 TEL: +86-755-8637-9589
 Report Issued Date
 : Sep. 21, 2018

 FAX: +86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID: 2ALTART301X Report Template No.: BU5-FG22/24 Version 2.0

2.2 Connection Diagram of Test System

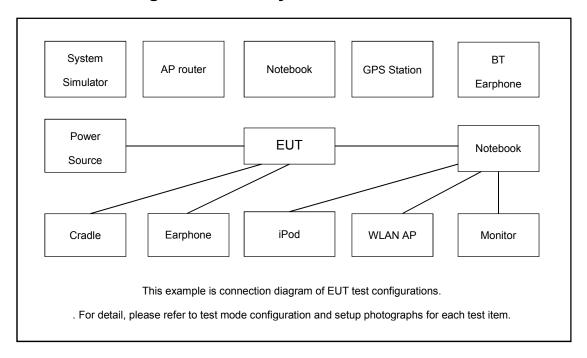

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m
2.	DC Power Supply	GW INSTEK	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
3.	Earphone	Apple	MC690ZP/A	N/A	Shielded,1.0m	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.0 dB and a 10dB attenuator.

Example:

 $Offset(dB) = RF \ cable \ loss(dB) + attenuator \ factor(dB).$ = 4.0 + 10 = 14.0 (dB)

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 10 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

2.5 Frequency List of Low/Middle/High Channels

Frequency List							
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest			
GSM850	Channel	128	189	251			
GSIVIOSO	Frequency	824.2	836.4	848.8			
WCDMA	Channel	4132	4182	4233			
Band V	Frequency	826.4	836.4	846.6			
GSM1900	Channel	512	661	810			
GSW1900	Frequency	1850.2	1880.0	1909.8			
WCDMA	Channel	9262	9400	9538			
Band II	Frequency	1852.4	1880.0	1907.6			

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 11 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604


3 Conducted Test Result

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

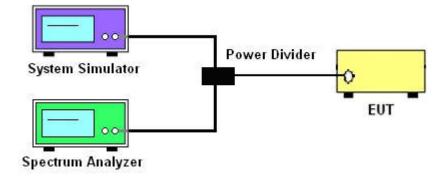

3.2.3 Frequency Stability

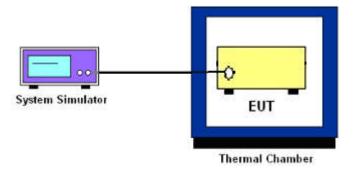

3.3 Test Result of Conducted Test

Please refer to Appendix A.

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 12 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for GSM850 and WCDMA Band V.

The EIRP of mobile transmitters must not exceed 2 Watts for GSM1900 and WCDMA Band II.

According to KDB 412172 D01 Power Approach,

 $EIRP = P_T + G_T - L_C$, ERP = EIRP - 2.15, where

 P_T = transmitter output power in dBm

 G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

- 1. The testing follows ANSI C63.26 Section 5.2
- 2. The transmitter output port was connected to the system simulator.
- 3. Set EUT at maximum power through the system simulator.
- 4. Select lowest, middle, and highest channels for each band and different modulation.
- 5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

- 1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
- 2. The EUT was connected to spectrum and system simulator via a power divider.
- 3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
- 4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
- 5. Record the deviation as Peak to Average Ratio.

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 13 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

3.6 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.6.1 Description of 99% Occupied Bandwidth and 26dB Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

- 1. The testing follows ANSI C63.26 Section 5.4
- 2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency.
 The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
- 4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
- 5. Set the detection mode to peak, and the trace mode to max hold.
- Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
 (this is the reference value)
- 7. Determine the "-26 dB down amplitude" as equal to (Reference Value X).
- 8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the "–X dB down amplitude" determined in step 6. If a marker is below this "-X dB down amplitude" value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- 9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

FCC ID: 2ALTART301X

Report No.: FG871604

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

3.7.2 Test Procedures

- 1. The testing follows ANSI C63.26 section 5.7
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator.The path loss was compensated to the results for each measurement.
- 4. The band edges of low and high channels for the highest RF powers were measured.
- 5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 6. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 15 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least 43 + 10 log (P) dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

- 1. The testing follows ANSI C63.26 section 5.7
- 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider.
- 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 4. The middle channel for the highest RF power within the transmitting frequency was measured.
- 5. The conducted spurious emission for the whole frequency range was taken.
- 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 7. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 16 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within ±0.00025% (±2.5ppm) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

- 1. The testing follows ANSI C63.26 section 5.6.4
- 2. The EUT was set up in the thermal chamber and connected with the system simulator.
- With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
- 4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

- 1. The testing follows ANSI C63.26 section 5.6.5
- 2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
- 3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
- 4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
- 5. The variation in frequency was measured for the worst case.

Sporton International (Shenzhen) Inc. TEL: +86-755-8637-9589

FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 17 of 21
Report Issued Date : Sep. 21, 2018

Report No.: FG871604

Report Version : Rev. 01
Report Template No.: BU5-FG22/24 Version 2.0


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test from 30MHz to 1GHz

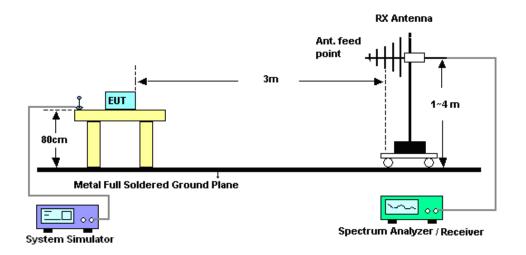

4.2.2 For radiated test above 1GHz

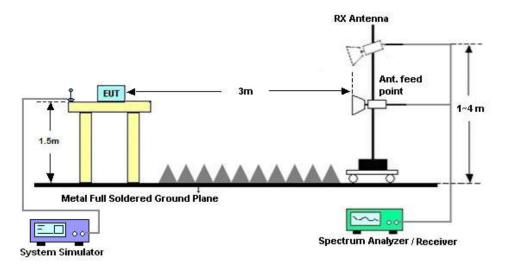

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 18 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

4.4 Field Strength of Spurious Radiation Measurement

Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least 43 + 10 log (P) dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

Report No.: FG871604

: 19 of 21

4.4.2 **Test Procedures**

- 1. The testing follows ANSI C63.26 Section 5.5
- 2. The EUT was placed on a rotatable wooden table 0.8 meters for frequency below 1GHz and 1.5 meter for frequency above 1GHz above the ground.
- 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower
- 4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
- 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
- 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission.
- 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- 9. Taking the record of output power at antenna port.
- 10. Repeat step 7 to step 8 for another polarization.
- 11. EIRP (dBm) = S.G. Power Tx Cable Loss + Tx Antenna Gain
- 12.ERP (dBm) = EIRP 2.15
- 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
- 14. The limit line is derived from 43 + 10log(P) dB below the transmitter power P(Watts)

Sporton International (Shenzhen) Inc. Page Number TEL: +86-755-8637-9589 Report Issued Date: Sep. 21, 2018

FAX: +86-755-8637-9595 Report Version : Rev. 01 FCC ID: 2ALTART301X Report Template No.: BU5-FG22/24 Version 2.0

5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	9kHz~40GHz	Apr. 19, 2018	Jul. 30, 2018~ Jul. 31, 2018	Apr. 18, 2019	Conducted (TH01-SZ)
Base Station	Anritsu	MT8820C	6201563777	2G/3G/4G (CDMA)	Jan. 03, 2018	Jul. 30, 2018~ Jul. 31, 2018	Jan. 02, 2019	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Dec. 26, 2017	Jul. 30, 2018~ Jul. 31, 2018	Dec. 25, 2018	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Apr. 19, 2018	Jul. 20, 2018	Apr. 18, 2019	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Apr. 19, 2018	Jul. 20, 2018	Apr. 18, 2019	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBEC K	BBHA9120D	9120D-1355	1GHz~18GHz	Mar. 29, 2018	Jul. 20, 2018	Mar. 28, 2019	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Mar. 30 2018	Jul. 20, 2018	Mar. 29, 2019	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102210	0.01Hz ~3000MHz	Oct. 19, 2017	Jul. 20, 2018	Oct. 18, 2018	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 27, 2017	Jul. 20, 2018	Dec. 26, 2018	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	61601000198 5	N/A	NCR	Jul. 20, 2018	NCR	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Jul. 20, 2018	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Jul. 20, 2018	NCR	Radiation (03CH03-SZ)

NCR: No Calibration Required

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 20 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

6 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of	3.0dB
Confidence of 95% (U = 2Uc(y))	3.00B

<u>Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)</u>

Measuring Uncertainty for a Level of	3 C4B
Confidence of 95% (U = 2Uc(y))	3.6dB

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.8dB
---	-------

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : 21 of 21
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power)

Conducted Power (*Unit: dBm)						
Band		GSM850			GSM1900	
Channel	128	189	251	512	661	810
Frequency	824.2	836.4	848.8	1850.2	1880.0	1909.8
GSM	<mark>31.42</mark>	31.30	30.99	29.73	29.39	<mark>29.83</mark>
GPRS class 8	31.40	31.28	30.96	29.71	29.37	29.81
GPRS class 10	30.42	30.28	30.05	27.05	27.12	27.27
GPRS class 11	28.31	28.20	27.92	25.36	25.40	25.43
GPRS class 12	26.22	26.10	26.08	23.18	23.20	23.26

Conducted Power (*Unit: dBm)						
Band	W	WCDMA Band V			CDMA Ban	d II
Channel	4132	4182	4233	9262	9400	9538
Frequency	826.4	836.4	846.6	1852.4	1880	1907.6
AMR 12.2K	23.15	23.07	23.09	23.82	23.79	23.79
RMC 12.2K	23.16	23.09	23.10	23.83	23.81	23.80
HSDPA Subtest-1	21.63	21.67	21.62	22.40	22.50	22.35
HSDPA Subtest-2	21.73	21.62	21.72	22.30	22.43	22.28
HSDPA Subtest-3	21.71	21.66	21.76	22.28	22.43	22.30
HSDPA Subtest-4	21.69	21.62	21.73	22.23	22.39	22.22
HSUPA Subtest-1	19.73	19.75	20.15	21.19	21.05	21.04
HSUPA Subtest-2	20.51	20.46	20.23	21.48	21.67	21.43
HSUPA Subtest-3	20.62	20.59	20.61	21.72	21.55	21.45
HSUPA Subtest-4	20.74	20.77	20.49	21.69	21.66	21.69
HSUPA Subtest-5	21.80	21.70	21.80	22.80	22.70	22.60

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A1 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

ERP/EIRP

GSM850 (G _T - L _C = 0.5 dB)					
Oh anna I	128	189	251		
Channel	(Low)	(Mid)	(High)		
Frequency	024.2	026.4	848.8		
(MHz)	824.2	836.4			
Conducted Power (dBm)	31.42	31.30	30.99		
Conducted Power (Watts)	1.3868	1.3490	1.2560		
ERP(dBm)	29.77	29.65	29.34		
ERP(Watts)	0.9484	0.9226	0.8590		

GSM1900 (G _T - L _C = 0 dB)					
Channel	512	661	810		
Channel	(Low)	(Mid)	(High)		
Frequency	4050.2	4000	1909.8		
(MHz)	1850.2	1880			
Conducted Power (dBm)	29.73	29.39	29.83		
Conducted Power (Watts)	0.9397	0.8690	0.9616		
EIRP(dBm)	29.73	29.39	29.83		
EIRP(Watts)	0.9397	0.8690	0.9616		

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A2 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

WCDMA Band V (G _T - L _C = 0.5 dB)					
Channel	4132	4182	4233		
	(Low)	(Mid)	(High)		
Frequency	000.4	000.4	846.6		
(MHz)	826.4	836.4			
Conducted Power (dBm)	23.16	23.09	23.10		
Conducted Power (Watts)	0.2070	0.2037	0.2042		
ERP(dBm)	21.51	21.44	21.45		
ERP(Watts)	0.1416	0.1393	0.1396		

WCDMA Band II (G _T - L _C = 0 dB)				
Channel	9262	9400	9538	
	(Low)	(Mid)	(High)	
Frequency	4050 4	4000	1907.6	
(MHz)	1852.4	1880		
Conducted Power (dBm)	23.83	23.81	23.80	
Conducted Power (Watts)	0.2415	0.2404	0.2399	
EIRP(dBm)	23.83	23.81	23.80	
EIRP(Watts)	0.2415	0.2404	0.2399	

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A3 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

Peak-to-Average Ratio

Mode	GSM850(dB)	Limit: 13dB
Mod.	GSM	Result
Lowest CH	0.12	
Middle CH	0.12	PASS
Highest CH	0.17	

Mode	GSM1900(dB)	Limit: 13dB
Mod.	GSM	Result
Lowest CH	0.12	
Middle CH	0.12	PASS
Highest CH	0.12	

Mode	WCDMA Band V(dB)	WCDMA Band II(dB)	Limit: 13dB
Mod.	RMC 12.2Kbps	RMC 12.2Kbps	Result
Lowest CH	3.07	3.10	
Middle CH	3.07	3.13	PASS
Highest CH	2.78	3.13	

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A4 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604


GSM1900 (GSM) GSM850 (GSM) **Lowest Channel Lowest Channel** ₩ ∀ Offset 14.50 dB AQT 2 ms • RBW 10 MHz 14.00 d8 2 ms • RBW 10 MHz Date: 30.JUL 2018: 11.08.41 Date: 30.JUL 2018 11:48:10 **Middle Channel Middle Channel** ₩ ∀ E ∀ 14.00 d8 2 ms • RBW 10 MHz Date: 30 JUL 2018 11:10:53 Date: 30 JUL 2018 11:48:26 **Highest Channel Highest Channel** (W) (High Offset 14.50 db AQT 2 ms • RBW 10 MH: 0 dBm Offset 14.00 dB 30 dB AQT 2 ms = RBW 10 MHz Ref Level 34.50 dBm Att 30 dB

> 8amples: 130000 0.1% 0.01% 0.17 db 0.20 db

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A5 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

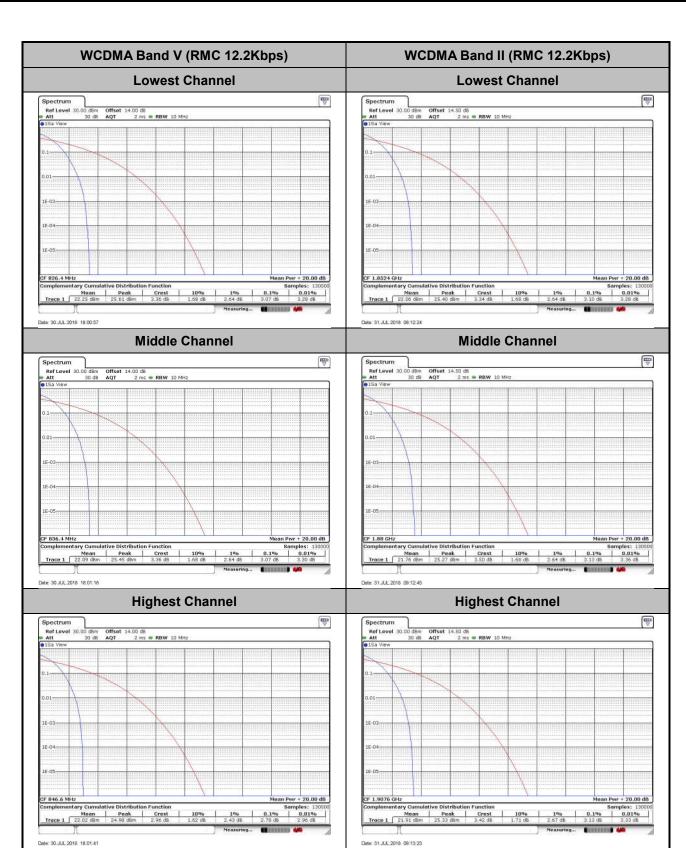

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A6 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

26dB Bandwidth

Mode	GSM850(MHz)				
Mod.	GSM				
Lowest CH	0.318				
Middle CH	0.318				
Highest CH	0.315				

Mode	GSM1900(MHz)				
Mod.	GSM				
Lowest CH	0.318				
Middle CH	0.318				
Highest CH	0.315				

Mode	WCDMA Band V(MHz)	WCDMA Band II(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.66	4.67
Middle CH	4.67	4.67
Highest CH	4.66	4.65

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A7 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

GSM850 (GSM) **GSM1900 (GSM) Lowest Channel Lowest Channel** E V ₩ ∀ CF 824.2 MH CF 1.8502 GHz Type Ref Trc Type | Ref | Trc | Date: 30.JUL 2018: 10:41:52 Date: 30.JUL 2018 11:38:29 **Middle Channel Middle Channel** ₩ ∀ E ∀ 26.00 217.700000000 k 317,70000 Type Ref Trc Type | Ref | Trc | Date: 30.JUL 2018 10:42:21 Date: 30.JUL 2018 11:36:58 **Highest Channel Highest Channel** (W) 26.94 dBn 848.785000 ML 50 dem-90 dBm Y-value Type | Ref | Trc | **Function Result**


Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X

Date: 30 JUL 2018 10:42:49

Page Number : A8 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

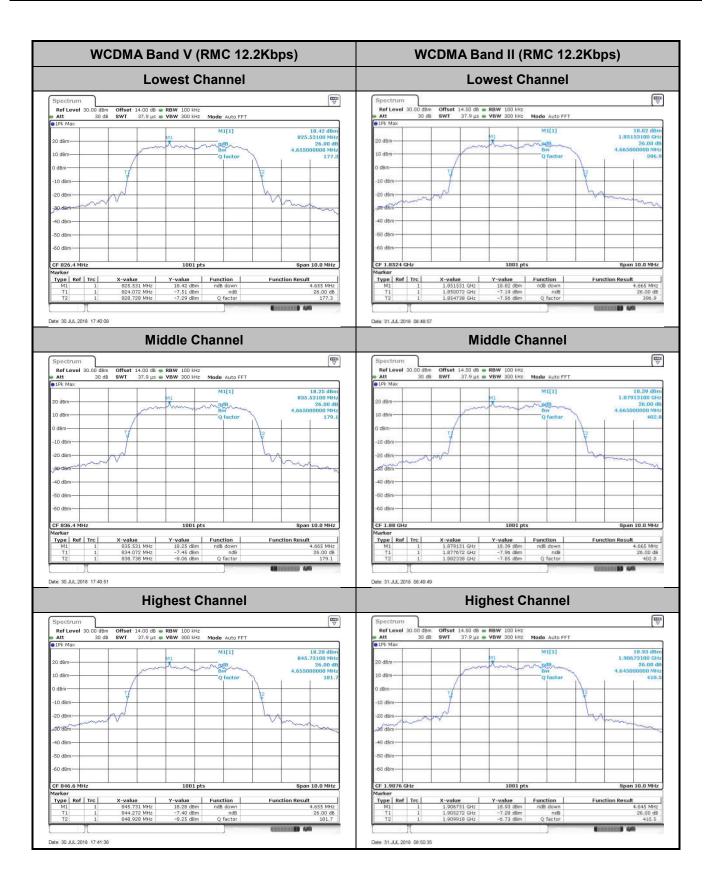

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A9 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

Occupied Bandwidth

Mode	GSM850(MHz)				
Mod.	GSM				
Lowest CH	0.244				
Middle CH	0.244				
Highest CH	0.244				


Mode	GSM1900(MHz)				
Mod.	GSM				
Lowest CH	0.243				
Middle CH	0.243				
Highest CH	0.245				

Mode	WCDMA Band V(MHz)	WCDMA Band II(MHz)
Mod.	RMC 12.2Kbps	RMC 12.2Kbps
Lowest CH	4.08	4.10
Middle CH	4.11	4.09
Highest CH	4.10	4.08

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A10 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

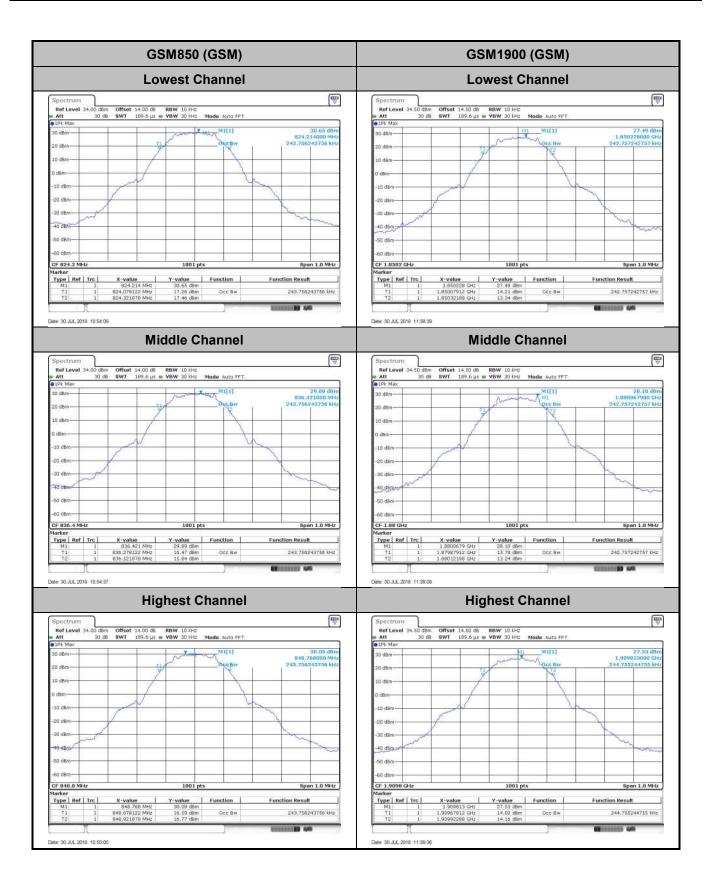

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A11 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604




Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A12 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604


Conducted Band Edge

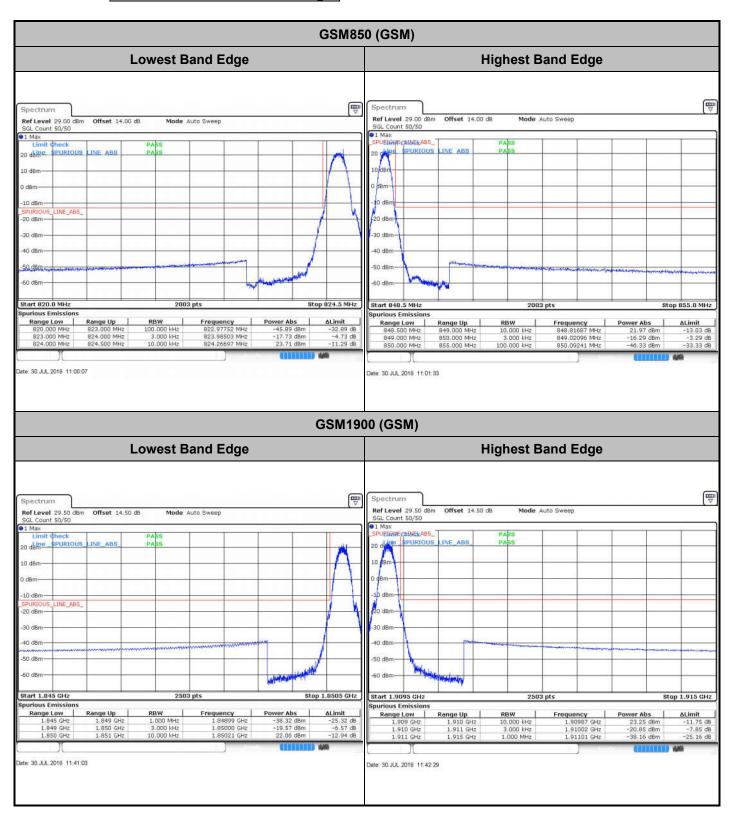

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A13 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

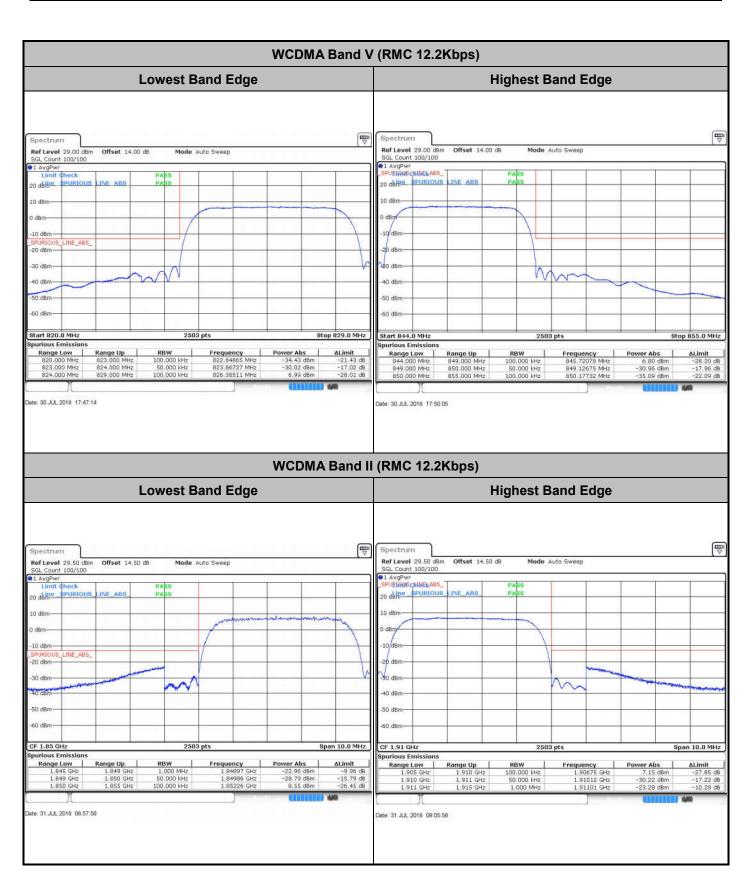


Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A14 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

Conducted Spurious Emission

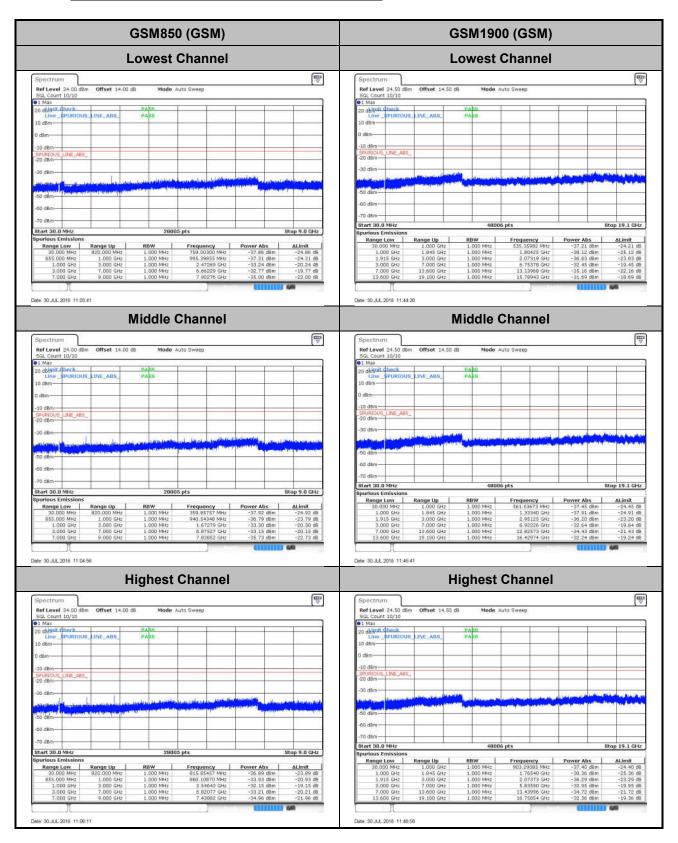

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCCID: 2ALTART301X Page Number : A15 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

WCDMA Band V (RMC 12.2Kbps) WCDMA Band II (RMC 12.2Kbps) **Lowest Channel Lowest Channel #** THE TOTAL PROPERTY. Ref Level 24.50 dBm Offset 14.50 dB SGL Count 10/10 1 Max Offset 14.00 dB Start 30.0 MHz Stop 19.1 GHz Stop 9.0 GHz Date: 30.JUL 2018 17:51:54 Date: 31.JUL 2018 09:06:11 **Middle Channel Middle Channel** ₩ ∀ E ∀ Start 30.0 MHz Date: 31 JUL 2018 09:09:43 Date: 30.JUL 2018 17:53:25 **Highest Channel Highest Channel** (High EEEE SGL Count 10/10 •1 Max Date: 30 JUL 2018 17:55:04

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A16 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No.: FG871604

Frequency Stability

Test Conditions	Middle Channel	GSM850 (GSM)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0018	
40	Normal Voltage	0.0004	
30	Normal Voltage	0.0005	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0010	
0	Normal Voltage	0.0036	
-10	Normal Voltage	0.0019	PASS
-20	Normal Voltage	0.0026	
-30	Normal Voltage	0.0030	
20	Maximum Voltage	0.0022	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0030	

Note: Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.2 V

Test Conditions	Middle Channel	GSM1900 (GSM)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0015	
40	Normal Voltage	0.0002	
30	Normal Voltage	0.0008	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0002	
0	Normal Voltage	0.0012	
-10	Normal Voltage	0.0006	PASS
-20	Normal Voltage	0.0001	
-30	Normal Voltage	0.0002	
20	Maximum Voltage	0.0001	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0012	

Note:

- 1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.5 V.; Maximum Voltage =4.2 V
- **2.** The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A17 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report No. : FG871604

Test Conditions	Middle Channel	WCDMA Band V (RMC 12.2Kbps)	Limit 2.5ppm
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0002	
40	Normal Voltage	0.0038	
30	Normal Voltage	0.0025	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0026	
0	Normal Voltage	0.0017	
-10	Normal Voltage	0.0017	PASS
-20	Normal Voltage	0.0036	
-30	Normal Voltage	0.0016	
20	Maximum Voltage	0.0011	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0024	

Note: Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.5 V. ; Maximum Voltage =4.2 V

Test Conditions	Middle Channel	WCDMA Band II (RMC 12.2Kbps)	Limit Note 2.
Temperature (°C)	Voltage (Volt)	Deviation (ppm)	Result
50	Normal Voltage	0.0009	
40	Normal Voltage	0.0012	
30	Normal Voltage	0.0004	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0001	
0	Normal Voltage	0.0017	
-10	Normal Voltage	0.0001	PASS
-20	Normal Voltage	0.0006	
-30	Normal Voltage	0.0007	
20	Maximum Voltage	0.0006	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0010	

Note:

- 1. Normal Voltage = 3.7V. ; Battery End Point (BEP) = 3.5 V.; Maximum Voltage =4.2 V
- 2. The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : A18 of A18
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

Appendix B. Test Results of Conducted Test

Radiated Spurious Emission

	GSM850 (GSM)								
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	1672.8	-38.03	-13	-25.03	-43.38	-42.40	2.88	9.40	Н
	2509.2	-51.73	-13	-38.73	-58.02	-57.68	2.50	10.60	Н
	3345.6	-58.09	-13	-45.09	-66.09	-63.91	4.63	12.60	Н
	4182	-62.71	-13	-49.71	-74.79	-68.14	5.02	12.60	Н
Middle	5018.4	-58.48	-13	-45.48	-73.16	-62.78	6.25	12.70	Н
Middle	1672.8	-32.58	-13	-19.58	-37.98	-36.95	2.88	9.40	V
	2509.2	-49.87	-13	-36.87	-57.36	-55.82	2.50	10.60	V
	3345.6	-56.70	-13	-43.70	-64.73	-62.52	4.63	12.60	V
	4182	-61.55	-13	-48.55	-73.51	-66.98	5.02	12.60	V
	5018.4	-55.38	-13	-42.38	-69.20	-59.68	6.25	12.70	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

	GSM1900 (GSM)								
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)
	3760.00	-33.23	-13	-20.23	-49.00	-40.83	5.00	12.60	Н
	5640.00	-30.45	-13	-17.45	-48.81	-36.25	7.30	13.10	Н
	7520.00	-43.61	-13	-30.61	-63.59	-47.18	7.73	11.30	Н
Middle	9400.00	-37.80	-13	-24.80	-62.52	-41.58	8.12	11.90	Н
Middle	3760.00	-25.53	-13	-12.53	-42.31	-33.13	5.00	12.60	V
	5640.00	-30.81	-13	-17.81	-49.52	-36.61	7.30	13.10	V
	7520.00	-39.75	-13	-26.75	-59.45	-43.32	7.73	11.30	V
	9400.00	-38.27	-13	-25.27	-62.25	-42.05	8.12	11.90	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : B1 of B2
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0

WCDMA Band V(RMC 12.2Kbps)										
Channel	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)	
Middle	1672.8	-65.85	-13	-52.85	-67.56	-70.22	2.88	9.40	Н	
	2509.2	-71.20	-13	-58.20	-77.26	-77.15	2.50	10.60	Н	
	3345.6	-69.63	-13	-56.63	-77.63	-75.45	4.63	12.60	Н	
	4182	-67.07	-13	-54.07	-79.15	-72.50	5.02	12.60	Н	
	5018.4	-65.29	-13	-52.29	-79.97	-69.59	6.25	12.70	Н	
	1672.8	-60.00	-13	-47.00	-61.84	-64.37	2.88	9.40	V	
	2509.2	-71.16	-13	-58.16	-77.11	-77.11	2.50	10.60	V	
	3345.6	-69.82	-13	-56.82	-77.85	-75.64	4.63	12.60	V	
	4182	-67.15	-13	-54.15	-79.11	-72.58	5.02	12.60	V	
	5018.4	-66.19	-13	-53.19	-80.01	-70.49	6.25	12.70	V	

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

WCDMA Band II(RMC 12.2Kbps)											
Channel	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Over Limit (dB)	SPA Reading (dBm)	S.G. Power (dBm)	TX Cable loss (dB)	TX Antenna Gain (dBi)	Polarization (H/V)		
Middle	3760.00	-41.33	-13	-28.33	-55.30	-48.93	5.00	12.60	Н		
	5640.00	-51.12	-13	-38.12	-67.72	-56.92	7.30	13.10	Н		
	7520.00	-50.80	-13	-37.80	-70.78	-54.37	7.73	11.30	Н		
	9400.00	-53.12	-13	-40.12	-77.84	-56.90	8.12	11.90	Н		
	3760.00	-31.51	-13	-18.51	-48.66	-39.11	5.00	12.60	V		
	5640.00	-48.41	-13	-35.41	-64.94	-54.21	7.30	13.10	V		
	7520.00	-48.33	-13	-35.33	-67.97	-51.90	7.73	11.30	V		
	9400.00	-52.16	-13	-39.16	-76.14	-55.94	8.12	11.90	V		

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Sporton International (Shenzhen) Inc.

TEL: +86-755-8637-9589 FAX: +86-755-8637-9595 FCC ID: 2ALTART301X Page Number : B2 of B2
Report Issued Date : Sep. 21, 2018
Report Version : Rev. 01

Report Template No.: BU5-FG22/24 Version 2.0