

Global United Technology Services Co., Ltd.

Report No.: GTS201704000070F01

FCC REPORT

Applicant: YFJ ELECTRONIC CO., LIMITED

Address of Applicant: Room 1620 of Jinhao building, Xintian community, Fuyong,

Shenzhen, China

Equipment Under Test (EUT)

Product Name: Wireless charger

Model No.: YFJ-099

FCC ID: 2ALTO-YFJ099

FCC CFR Title 47 Part 15 Subpart C:2016 **Applicable standards:**

April 17, 2017 Date of sample receipt:

Date of Test: April 17-20, 2017

Date of report issued: April 20, 2017

PASS * Test Result:

In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo **Laboratory Manager**

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.



2 Version

Version No.	Date	Description
00	April 20, 2017	Original

Prepared By:	Tiger. Cha	Date:	April 20, 2017
	Project Engineer		
Check By:	Andy w	Date:	April 20, 2017
	Reviewer		



3 Contents

			Page
1	COV	ER PAGE	1
2	VER	RSION	2
3	CON	NTENTS	3
4	TES	ST SUMMARY	4
5	GEN	NERAL INFORMATION	5
	5.1	GENERAL DESCRIPTION OF EUT	5
	5.2	TEST MODE	
	5.3	DESCRIPTION OF SUPPORT UNITS	6
	5.4	TEST FACILITY	6
	5.5	TEST LOCATION	6
	5.6	OTHER INFORMATION REQUESTED BY THE CUSTOMER	6
6	TES	ST INSTRUMENTS LIST	7
7	TES	ST RESULTS AND MEASUREMENT DATA	8
	7.1	ANTENNA REQUIREMENT:	8
	7.2	CONDUCTED EMISSIONS	9
	7.3	RADIATED EMISSION METHOD	12
	7.4	20DB OCCUPY BANDWIDTH	17
8	TES	ST SETUP PHOTO	18
9	EUT	Γ CONSTRUCTIONAL DETAILS	20

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Radiated Emission	15.209	Pass
20dB Bandwidth	15.215	Pass

Pass: The EUT complies with the essential requirements in the standard.



5 General Information

5.1 General Description of EUT

Product Name:	Wireless charger		
Model No.:	YFJ-099		
Operation Frequency:	110kHz ~ 205KHz		
Modulation type:	Backscatter modulation		
Antenna Type:	Inductive loop coil antenna		
Antenna gain:	0dBi (declared by manufacturer)		
Power supply:	Charging voltage: DC 5.0V/2A		

Note:

In section 15.31(m), regards to the operating frequency range less than 1 MHz, only the middle frequency of channel was selected to perform the test, and the selected channel see below:

Channel	Frequency		
The lowest channel	N/A		
The middle channel	177KHz		
The Highest channel	N/A		

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



5.2 Test mode

Transmitting mode Keep the EUT in continuously transmitting and charging mode

Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.

5.3 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC Approval
N/A	Load	N/A	N/A	VOC

5.4 Test Facility

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.

• Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480 Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.



6 Test Instruments list

Radi	Radiated Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	July 03 2015	July 02 2020		
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A		
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 29 2016	June 28 2017		
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 29 2016	June 28 2017		
5	5 BiConiLog Antenna SCHWARZBECK MESS-ELEKTRONIK		VULB9163	GTS214	June 29 2016	June 28 2017		
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 29 2016	June 28 2017		
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 29 2016	June 28 2017		
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		
9	Coaxial Cable	GTS	N/A	GTS213	June 29 2016	June 28 2017		
10	Coaxial Cable	GTS	N/A	GTS211	June 29 2016	June 28 2017		
11	Coaxial cable	GTS	N/A	GTS210	June 29 2016	June 28 2017		
12	Coaxial Cable	GTS	N/A	GTS212	June 29 2016	June 28 2017		
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 29 2016	June 28 2017		
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 29 2016	June 28 2017		
15	15 Amplifier (18-26GHz) Rohde & Schwarz		AFS33-18002 650-30-8P-44	GTS218	June 29 2016	June 28 2017		
16	Band filter	Amindeon	82346	GTS219	June 29 2016	June 28 2017		
17	Power Meter	Anritsu	ML2495A	GTS540	June 29 2016	June 28 2017		
18	Power Sensor	Anritsu	MA2411B	GTS541	June 29 2016	June 28 2017		

Conduc	onducted Emission:							
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)		
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019		
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June. 29 2016	June. 28 2017		
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June. 29 2016	June. 28 2017		
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June. 29 2016	June. 28 2017		
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A		
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A		
7	Thermo meter	KTJ	TA328	GTS233	June. 29 2016	June. 28 2017		

Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



7 Test results and Measurement Data

7.1 Antenna requirement:


Standard requirement: FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integral antenna, the best case gain of the antenna is 0dBi

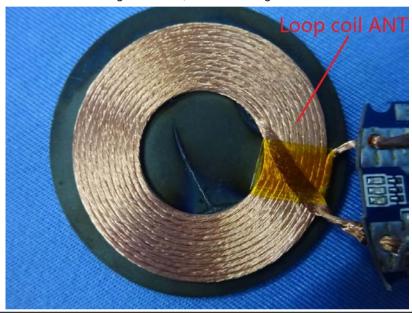




7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207			
Test Method:	ANSI C63.10			
Test Frequency Range:	150KHz to 30MHz			
Class / Severity:	Class B			
Receiver setup:	RBW=9KHz, VBW=30KHz, Sv	weep time=auto		
Limit:	Frequency range (MHz)	Limit (c	dBuV)	
		Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm of the frequency. Reference Plane			
Test setup:				
	AUX Equipment Remark E.U.T EMI Receiver Remark E.U.T: Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m			
Test procedure:	 The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 			
Test Instruments:	Refer to section 6.0 for details			
Test mode:	Refer to section 5.2 for details			
Test results:	Pass			
·		•	·	

Measurement data:




Line:

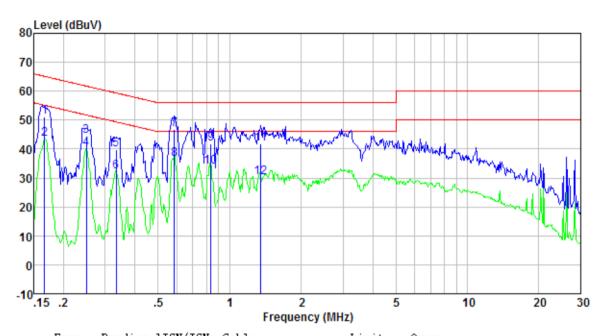

Freq MHz	Reading level dBuV	factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0. 167 0. 167 0. 249 0. 249 0. 334 0. 585 0. 585 0. 835 0. 835	50. 43 43. 01 43. 99 39. 54 39. 14 31. 81 46. 20 35. 97 41. 53 33. 41	0. 42 0. 42 0. 44 0. 44 0. 43 0. 43 0. 32 0. 32 0. 32 0. 26 0. 26	0. 12 0. 12 0. 11 0. 11 0. 10 0. 10 0. 12 0. 12 0. 13 0. 13	50.97 43.55 44.54 40.09 39.67 32.34 46.64 36.41 41.92 33.80	65. 12 55. 12 61. 78 51. 78 51. 78 59. 35 49. 35 56. 00 46. 00 46. 00	-14. 15 -11. 57 -17. 24 -11. 69 -19. 68 -17. 01 -9. 36 -9. 59 -14. 08 -12. 20	QP Average
1.352 1.352	41.60 29.75	0.23 0.23	0.13 0.13	41.96 30.11	56.00 46.00	-14.04 -15.89	QP Average



Neutral:

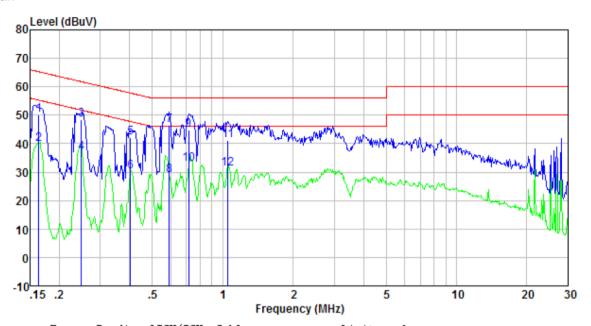

Freq	Reading level dBuV	1ISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0. 163 0. 163 0. 248 0. 248 0. 404 0. 404 0. 592 0. 592	49. 69 39. 26 47. 84 36. 34 41. 60 29. 84 46. 04 28. 53	0. 41 0. 41 0. 42 0. 42 0. 39 0. 39 0. 28 0. 28	0. 12 0. 12 0. 11 0. 11 0. 11 0. 11 0. 12 0. 12	50. 22 39. 79 48. 37 36. 87 42. 10 30. 34 46. 44 28. 93	65.30 55.30 61.82 51.82 57.77 47.77 56.00 46.00	-15. 08 -15. 51 -13. 45 -14. 95 -15. 67 -17. 43 -9. 56 -17. 07	QP Average QP Average QP Average QP Average QP Average
0.716 0.716 1.054	44.32 32.32 40.78	0. 24 0. 24 0. 21	0.13 0.13 0.13	44.69 32.69 41.12	56.00 46.00 56.00	-11.31 -13.31 -14.88	QP Average QP
1.054	30.84	0.21	0.13	31.18	46.00	-14.82	Average

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



7.3 Radiated Emission Method

7.3	Radiated Emission Method							
	Test Requirement:	FCC Part15 C Section 15.209						
	Test Method:	ANSI C63.10						
	Test Frequency Range:	9kHz to 1GHz						
	Test site:	Measurement Distance: 3m						
	Receiver setup:	Frequency	Detector	•	RBW	VBW	Remark	
		9kHz - 30MHz	Quasi-peak		10kHz	30kHz	Quasi-peak Value	
		30MHz-1GHz	Quasi-pea	ak	120kHz	300kHz	Quasi-peak Value	
		Above 1GHz	Above 1GHz Peak AV		1MHz 1MHz	3MHz 10Hz	Peak Value Average Value	
		Remark: For the frequency bands 9-90 kHz, 110-490 kHz and above 10 MHz. Radiated emission test in these three bands are based on						
		measurements employing an average detector.						
	Limit:	Limits for frequency below 30MHz						
	(Spurious Emissions)	Frequency	Limit (uV			urement ance(m)	Remark	
		0.009-0.490	5 24000/F(k			300	Quasi-peak Value	
		0.490-1.705)	30	Quasi-peak Value	
		1.705-30	30		NAI I	30	Quasi-peak Value	
		Limits for frequency Above 30MHz						
		Frequency 30MHz-88MHz 88MHz-216MHz 216MHz-960MHz 960MHz-1GHz		Limit (dBuV/m @3m) 40.00			Remark	
				43.50			Quasi-peak Value Quasi-peak Value	
				46.00			Quasi-peak Value	
				54.00			Quasi-peak Value	
				54.00		0	Average Value	
		Above 1GHz			74.0		Peak Value	
		Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated						
		emission limits in						
		employing an ave			ilas arc ba	Sca on me	asarcinonis	
	Test Procedure:							
		_					360 degrees to	
		determine the	position of	the h	nighest rac	liation.		
		2. The EUT was						
		antenna, which was mounted on the top of a variable-height antenna tower.						
		3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case						
		 4. For each suspected emission, the EOT was alranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the 						



	Report No.: GTS201704000070F01
	limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test setup:	Below 30MHz
	Turntable 5m Test Receiver Ground Plane Coaxial Cable
	30MHz ~ 1000MHz
	Turntable EUT Im to 4m Spectrum Analyzer Ground Plane Coaxial Cable
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80 Limit dBuV/m @3m = Limit dBuV/m @30m + 40

Below 30MHz

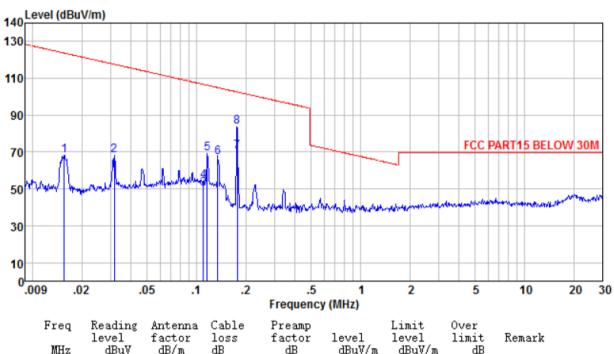


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV/m	Limit level dBuV/m	Over limit dB	Remark
0.016	48.37	20.04	0.04	0.00	68.45	123.73	-55.28	Peak
0.032	47.85	20.11	0.09	0.00	68.05	117.60	-49.55	Peak
0.110	26.00	24.12	0.17	0.00	50.29	106.78	-56.49	Average
0.110	29.71	24.12	0.17	0.00	54.00	106.78	-52.78	Peak
0.117	44.99	23.89	0.18	0.00	69.06	106.25	-37.19	Peak
0.135	43.43	23.32	0.19	0.00	66.94	104.98	-38.04	Peak
0.177	47.66	22.52	0.21	0.00	70.39	102.64	-32.25	Average
0.177	60.93	22.52	0.21	0.00	83.66	102.64	-18.98	Peak



30MHz ~ 1GHz

Horizontal

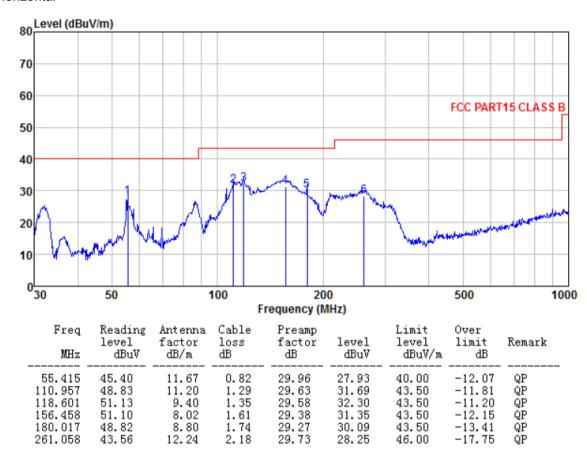



164.908


50.49

8.27

1.66

Report No.: GTS201704000070F01

Vertical

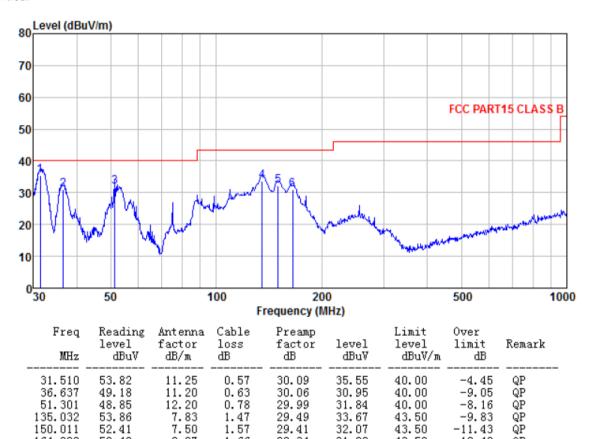

29.34

31.08


43.50

-12.42


QΡ



7.4 20dB Occupy Bandwidth

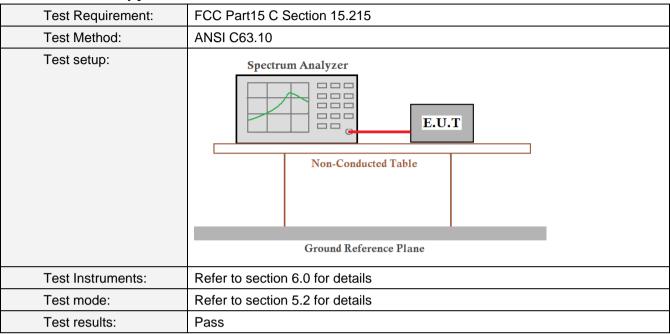


Measurement Data

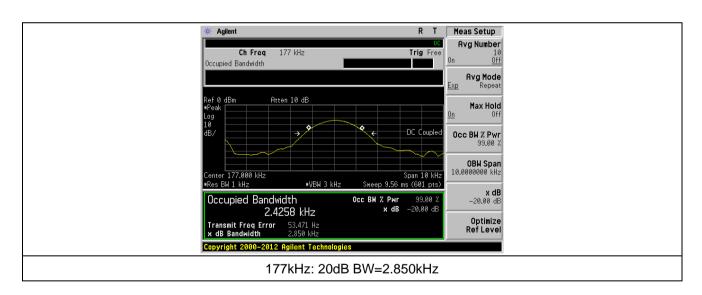



8 Test Setup Photo

Radiated Emission

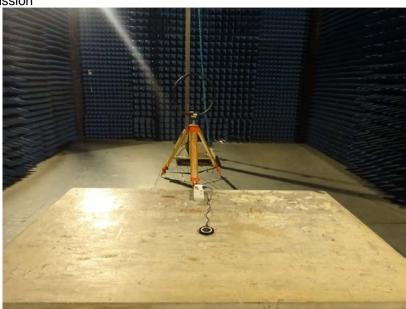





Conducted Emission





9 EUT Constructional Details















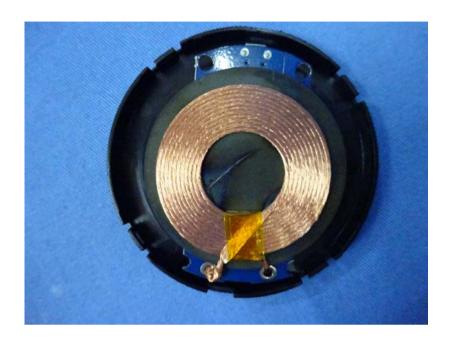





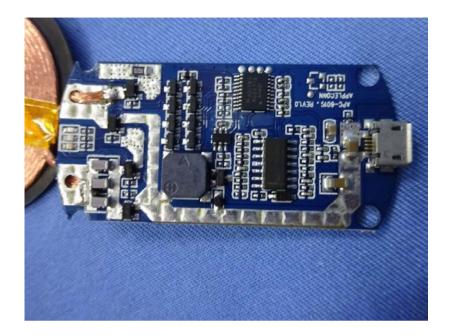

-----End-----