FCC Test Report

Report No.: AGC09834170401FE03

FCC ID : 2ALUM-FBX1520

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: SPEAKER

BRAND NAME : FISHER, FEIYANG, STARQUEEN

MODEL NAME : See page 4

CLIENT : FEIYANG SPEAKER LIMITED

DATE OF ISSUE : May 18, 2017

STANDARD(S)

TEST PROCEDURE(S) : FCC Part 15 Subpart C Section 15.249

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report No.: AGC09834170401FE03 Page 2 of 62

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 18, 2017	Valid	Original Report

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	4
2. GENERAL INFORMATION	5
2.1. PRODUCT DESCRIPTION	5
2.2. TABLE OF CARRIER FREQUENCYS	5
3. MEASUREMENT UNCERTAINTY	6
4. DESCRIPTION OF TEST MODES	6
5. SYSTEM TEST CONFIGURATION	8
5.1. CONFIGURATION OF EUT SYSTEM	8
5.2. EQUIPMENT USED IN EUT SYSTEM	8
5.3. SUMMARY OF TEST RESULTS	8
6. TEST FACILITY	9
7. TEST METHOD	9
8. ALL TEST EQUIPMENT LIST	9
9. RADIATED EMISSION	11
9.1TEST LIMIT	11
9.2. MEASUREMENT PROCEDURE	12
9.3. TEST SETUP	14
9.4. TEST RESULT	16
10. BAND EDGE EMISSION	32
10.1. MEASUREMENT PROCEDURE	32
10.2 TEST SETUP	32
10.3 RADIATED TEST RESULT	33
11. 20DB BANDWIDTH	37
11.1. MEASUREMENT PROCEDURE	37
11.2. TEST SET-UP	37
11.3. LIMITS AND MEASUREMENT RESULTS	37
12. FCC LINE CONDUCTED EMISSION TEST	44
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	44
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	44
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	45
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	45
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	46
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	
APPENDIX B: PHOTOGRAPHS OF EUT	51

Page 4 of 62

1. VERIFICATION OF CONFORMITY

Applicant	FEIYANG SPEAKER LIMITED	
Address	Feiyang Industrial Zone, Taigang Road, Baiyun District, Guangzhou, China	
Manufacturer	Guangzhou Feiyang Speaker Factory	
Address	Feiyang Industrial Zone, Taigang Road, Baiyun District, Guangzhou, China	
Product Designation	SPEAKER	
Brand Name	FISHER, FEIYANG, STARQUEEN	
Test Model FBX1520		
Series Model FBX820, FBX1260, FBX840, FBX440, FBX550, FBX650, SQ-F19, Start SQ-F23, SQ-F22, F19M, F22M, F23M, F8-8		
Difference description All the same except for the dimension of speaker and size of loudspeaker l		
Date of test	Apr.13, 2017 to Apr.20, 2017	
Deviation	None	
Condition of Test Sample	Normal	
Report Template	AGCRT-US-BR/RF	

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.249.

Tested By	Harry Zhang	
	Henry Zhang(Zhang Zhuorui)	Apr.20, 2017
Reviewed By	Forest ce	
	Forrest Lei(Lei Yonggang)	May 18, 2017
Approved By	Solya shong	
	Solger Zhang(Zhang Hongyi) Authorized Officer	May 18, 2017

Page 5 of 62

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

	<u> </u>		
Operation Frequency 2.402 GHz to 2.480GHz			
RF Output Power	-3.09dBm(Max EIRP Power=Max radiation field-95.2)		
Bluetooth Version	V3.0		
Modulation	GFSK, π /4-DQPSK, 8DPSK		
Number of channels	79		
Hardware Version	1.0		
Software Version	1.0		
Antenna Designation PCB Antenna			
Antenna Gain OdBi			
Power Supply DC 7.4V by battery			
Note: The standard USB port only can read data from U-disk and can't be used to transfer data with PC.			

2.2. TABLE OF CARRIER FREQUENCYS

BR/EDR Channel List

Frequency Band	Channel Number	Frequency
	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
2400~2483.5MHz	39	2441 MHz
	40	2442 MHz
	••	:
	77	2479 MHz
	78	2480 MHz

Page 6 of 62

3. MEASUREMENT UNCERTAINTY


The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	±3.18dB
2	All emissions, radiated	±3.91dB
3	Temperature	±0.5°C
4	Humidity	±2%

4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel TX(GFSK)
2	Middle channel TX (GFSK)
3	High channel TX (GFSK)
4	Low channel TX(π/4-DQPSK)
5	Middle channel TX(π/4-DQPSK)
6	High channel TX (π/4-DQPSK)
7	Low channel TX(8DPSK)
8	Middle channel TX (8DPSK)
9	High channel TX (8DPSK)
10	BT Link with charging
11	BT Link

- 1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
- 2. The EUT used fully-charged battery when tested.

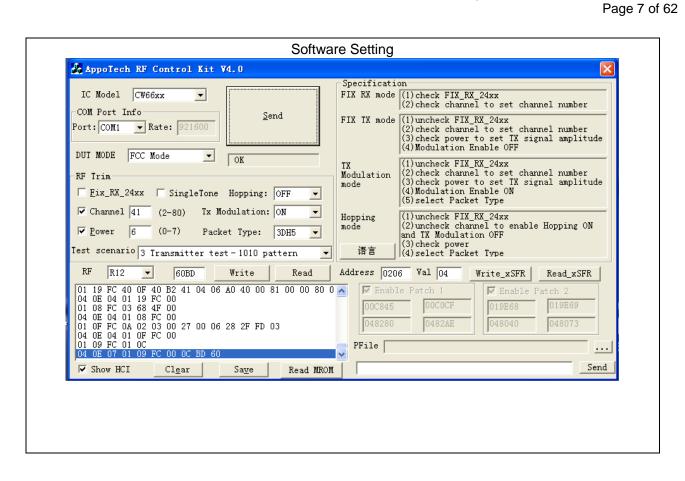


Page 8 of 62

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)



5.2. EQUIPMENT USED IN EUT SYSTEM

ITEM	EQUIPMENT	MFR/BRAND	MODEL/TYPE NO.	REMARK
1	SPEAKER	FISHER	FBX1520	EUT
2	Battery	Siaos	N/A	Accessory
3	PC	Sony	E1412AYCW	A.E
4	PC Adapter	Sony	VGP-AC19V36	A.E
5	Control box	DOFLY	N/A	A.E
6	USB Cable	N/A	1.0m Unshielded	A.E

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.249(a) §15.209	Radiated Emission	Compliant
§15.249(d)	Band Edges	Compliant
§15.207	Conduction Emission	Compliant
§15.215	Bandwidth	Compliant

Report No.: AGC09834170401FE03 Page 9 of 62

6. TEST FACILITY

Site Dongguan Precise Testing Service Co., Ltd.	
Location Building D,Baoding Technology Park,Guangming Road2,Dongcheng District, Dongguan, Guangdong, China,	
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

7. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013

8. ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHz)

Radiated Emission Test Site							
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration		
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017		
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2016	July 3, 2017		
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2016	July 3, 2017		
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2016	July 3, 2017		
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017		
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A		
Active loop antenna (9K-30MHz)	SCHWARZBECK	FMZB1519	1519-038	June 6, 2016	June 5, 2017		
Spectrum analyzer	AGILENT	E4407B	MY46185649	June 6, 2016	June 5, 2017		
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017		
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017		
temporary antenna connector	N/A	S100		July 4, 2016	July 3, 2017		

Report No.: AGC09834170401FE03 Page 10 of 62

FOR RADIATED EMISSION TEST (1GHz ABOVE)

	Radiat	ted Emission Tes	st Site		
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2016	July 10, 2017
Spectrum Analyzer	AGILENT	E4411B	MY4511453	July 4, 2016	July 3, 2017
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2016	July 6, 2017
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2016	July 7, 2017
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2016	June 5, 2017
MULTI-DEVICE Positioning Controller	MAX-FULL	MF-7802	MF780208339	N/A	N/A
Horn Ant (18G-40GHz)	SCHWARZBECK	BBHA 9170	9170-181	June 6, 2016	June 5, 2017
Radiation Cable 1	MXT	RS1	R005	June 6, 2016	June 5, 2017
Radiation Cable 2	MXT	RS1	R006	June 6, 2016	June 5, 2017

Conducted Emission Test Site											
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration						
EMI Test Receiver	ROHDE & SCHWARZBECK	ESCI	101417	July 4, 2016	July 3, 2017						
Artificial Mains Network	NARDA	L2-16B	000WX31025	July 8, 2016	July 7, 2017						
Artificial Mains Network (AUX)	NARDA	L2-16B	000WX31026	July 8, 2016	July 7, 2017						
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2016	July 3, 2017						
Shielded Room	CHENGYU	843	PTS-002	June 6, 2016	June 5, 2017						
Conduction Cable	MXT	SE1	S003	June 6, 2016	June 5, 2017						

Page 11 of 62

9. RADIATED EMISSION

9.1TEST LIMIT

Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental	Field Strength of Harmonics		
	(millivolts/meter)	(microvolts/meter)		
900-928MHz	50	500		
2400-2483.5MHz	50	500		
5725-5875MHz	50	500		
24.0-24.25GHz	250	2500		

Standard FCC 15.209

Frequency	Distance	Field Strei	ngths Limit
(MHz)	Hz) Meters		dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB(µV)/m (Peal	k)
		54.0 dB(μV)/m (Ave	rage)

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

Page 12 of 62

9.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)

- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)

Report No.: AGC09834170401FE03 Page 13 of 62


The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~26.5GHz RBW 2MHz/VBW 6MHz for Peak, RBW 1.5MHz/10Hz for Average
Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP


Report No.: AGC09834170401FE03 Page 14 of 62

9.3. TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 30MHz

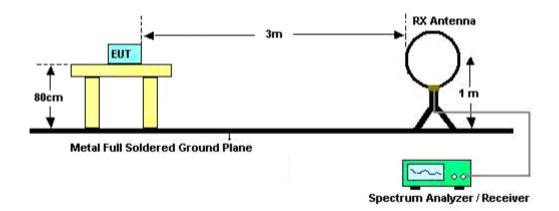


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

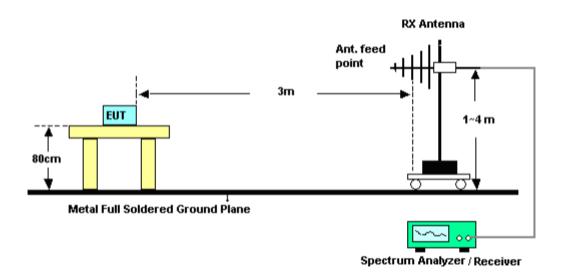

Page 15 of 62

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

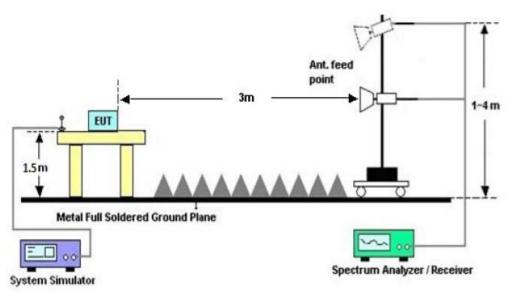

Page 16 of 62

9.4. TEST RESULT

(Worst modulation:GFSK)

FOR BR/EDR

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.


Temperature: 22.7

Humidity: 53.9 %

Page 17 of 62

RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

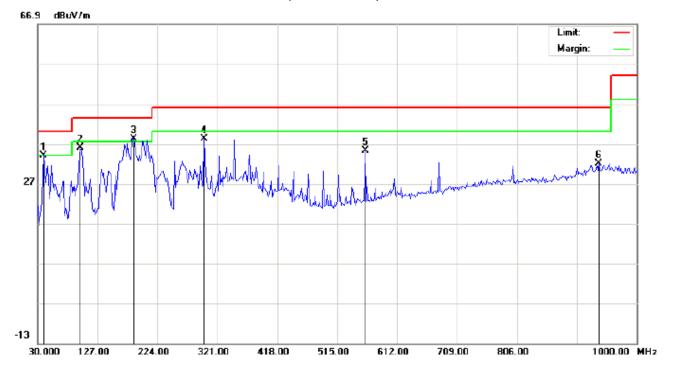

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:SPEAKER M/N:FBX1520

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
NO.	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB	Detector	cm	degree	Comment
1	ļ	39.7000	22.59	11.51	34.10	40.00	-5.90	peak			
2		99.5167	25.98	10.00	35.98	43.50	-7.52	peak			
3	*	185.2000	26.92	11.31	38.23	43.50	-5.27	peak			
4		299.9833	22.85	15.41	38.26	46.00	-7.74	peak			
5		560.2667	12.38	22.74	35.12	46.00	-10.88	peak			
6		938 5667	2 37	29 68	32 05	46 00	-13 95	neak			

Power:


Distance:

Polarization: Horizontal

Temperature: 22.7 Humidity: 53.9 %

Page 18 of 62

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

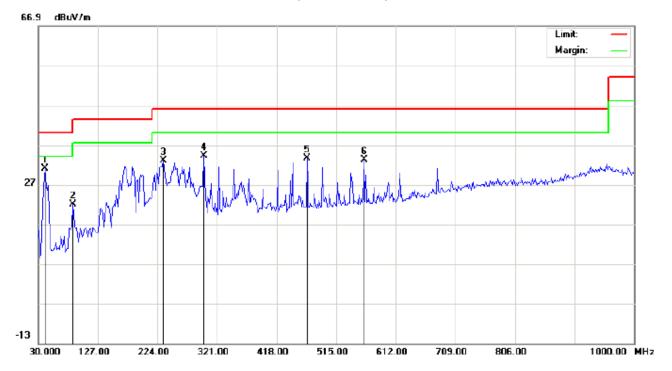

Polarization: Vertical

Site: site #1

Limit: FCC Class B 3M Radiation

EUT:SPEAKER M/N:FBX1520

Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	41.3167	22.22	8.81	31.03	40.00	-8.97	peak			
2		86.5832	17.78	4.16	21.94	40.00	-18.06	peak			
3		233.7000	20.65	12.30	32.95	46.00	-13.05	peak			
4		299.9833	18.80	15.41	34.21	46.00	-11.79	peak			
5		468.1167	12.84	20.79	33.63	46.00	-12.37	peak			
6		560.2667	10.62	22.53	33.15	46.00	-12.85	peak			

Power:

Distance:

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Humidity: 53.9 %

Page 19 of 62

RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

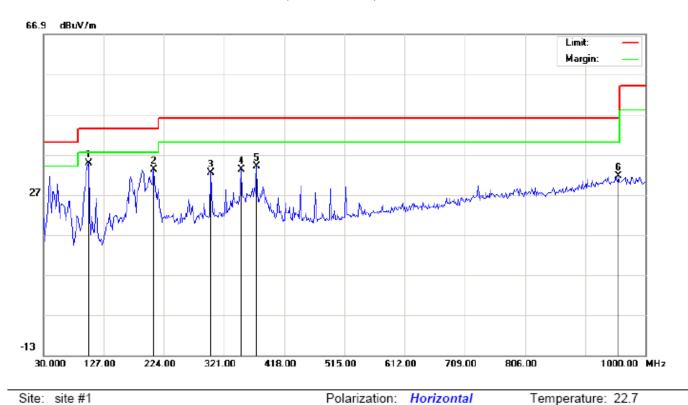

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:SPEAKER

M/N:FBX1520

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	102.7500	24.88	9.84	34.72	43.50	-8.78	peak			
2		207.8333	22.00	11.20	33.20	43.50	-10.30	peak			
3		299.9833	17.03	15.41	32.44	46.00	-13.56	peak			
4		348.4833	14.58	18.64	33.22	46.00	-12.78	peak			
5		372.7333	15.03	18.89	33.92	46.00	-12.08	peak			
6		956.3500	1.61	29.94	31.55	46.00	-14.45	peak	·		


Power:

Distance:

Humidity: 53.9 %

Page 20 of 62

RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

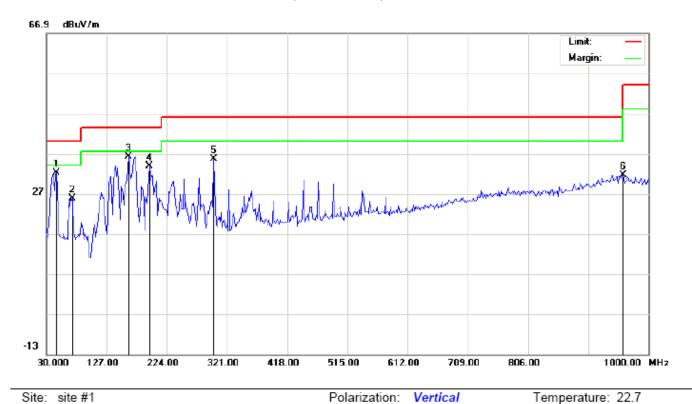

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:SPEAKER M/N:FBX1520

Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		46.1667	23.78	8.49	32.27	40.00	-7.73	peak			
2		72.0333	22.01	3.76	25.77	40.00	-14.23	peak			
3	*	162.5667	21.06	15.17	36.23	43.50	-7.27	peak			
4		196.5166	23.89	9.88	33.77	43.50	-9.73	peak			
5		299.9833	20.23	15.41	35.64	46.00	-10.36	peak			
6		959.5833	1.77	29.91	31.68	46.00	-14.32	peak			

Power:

Distance:


RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

Page 21 of 62

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

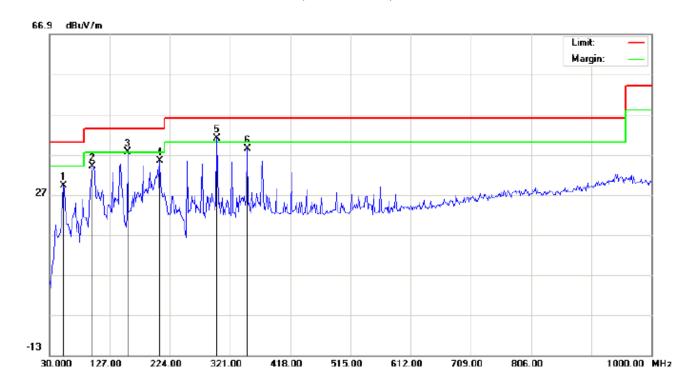

Mode: High Channel TX

Note:

Site: site #1	Polarization: Horizontal	Temperature: 22.7
Limit: FCC Class B 3M Radiation	Power:	Humidity: 53.9 %
EUT:SPEAKER	Distance:	
M/N:FBX1520		


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		52.6333	20.72	8.41	29.13	40.00	-10.87	peak			
2		99.5167	24.07	10.00	34.07	43.50	-9.43	peak			
3	į	156.1000	26.39	11.28	37.67	43.50	-5.83	peak			
4		207.8333	24.18	11.20	35.38	43.50	-8.12	peak			
5	*	299.9833	25.65	15.41	41.06	46.00	-4.94	peak			
6		348.4833	19.86	18.64	38.50	46.00	-7.50	peak			

Temperature: 22.7

Humidity: 53.9 %

Page 22 of 62

RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

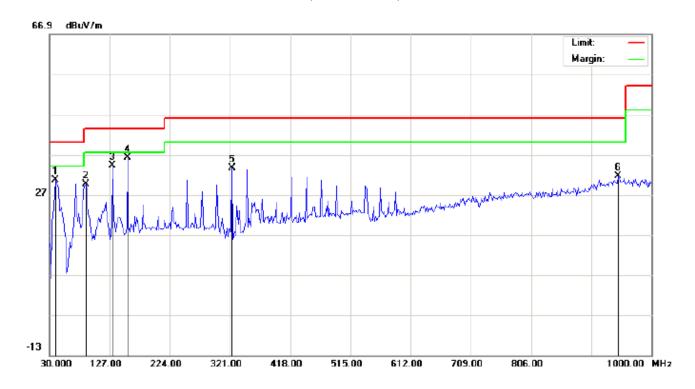

Polarization:

Power:

Distance:

Vertical

Site: site #1 Limit: FCC Class B 3M Radiation

EUT:SPEAKER

M/N:FBX1520

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		39.7000	22.17	8.51	30.68	40.00	-9.32	peak			
2		88.2000	24.94	4.74	29.68	43.50	-13.82	peak			
3		131.8500	22.42	11.80	34.22	43.50	-9.28	peak			
4	*	156.1000	21.00	15.30	36.30	43.50	-7.20	peak			
5		324.2333	16.64	17.02	33.66	46.00	-12.34	peak			
6		946.6500	1.66	29.91	31.57	46.00	-14.43	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.


Page 23 of 62

RADIATED EMISSION ABOVE 1GHz

(Worst modulation: GFSK)

FOR BR/EDR

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

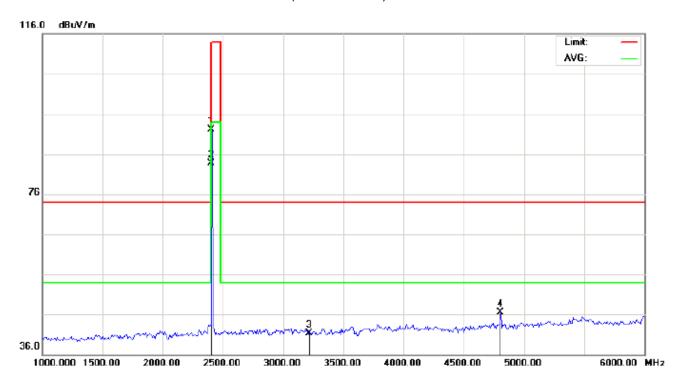

Site: site #1 Polarization: Horizontal Temperature: 22.7
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %

EUT:SPEAKER Distance:

M/N:FBX1520


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2402.000	81.79	10.32	92.11	114.00	-21.89	peak			
2	*	2402.000	73.31	10.32	83.63	94.00	-10.37	AVG	100	29	
3		3214.000	29.42	11.84	41.26	74.00	-32.74	peak			
4		4804.000	38.74	7.69	46.43	74.00	-27.57	peak			

Page 24 of 62

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

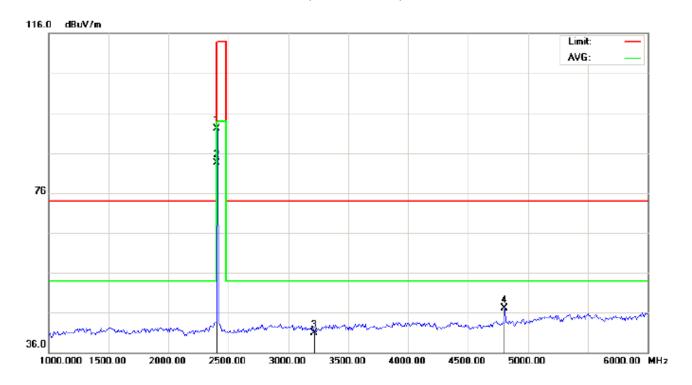

Site: site #1

Polarization: Vertical Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Humidity: 53.6 %

EUT:SPEAKER

Power: Distance:

M/N:FBX1520


Mode: Low Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
		MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1		2402.000	81.74	10.32	92.06	114.00	-21.94	peak			
2	*	2402.000	73.22	10.32	83.54	94.00	-10.46	AVG	100	51	
3		3216.000	29.07	11.84	40.91	74.00	-33.09	peak			
4		4804.000	39.38	7.69	47.07	74.00	-26.93	peak			

Page 25 of 62

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

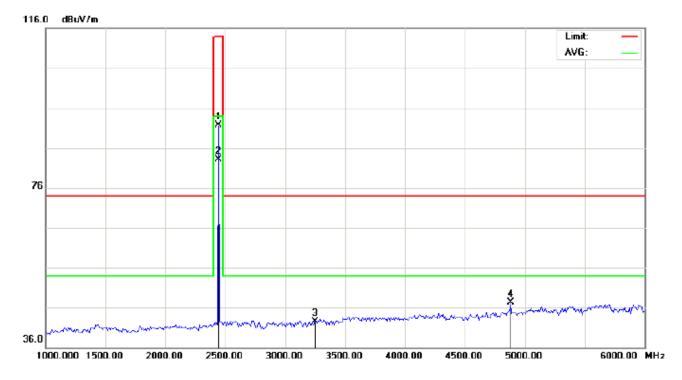

Site: site #1
Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Power:

Polarization: Horizontal

Temperature: 22.7 Humidity: 53.6 %

EUT:SPEAKER

Distance:

M/N:FBX1520


Mode: Middle Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2441.000	81.25	10.36	91.61	114.00	-22.39	peak			
2	*	2441.000	72.72	10.36	83.08	94.00	-10.92	AVG	100	30	
3		3251.000	30.57	11.88	42.45	74.00	-31.55	peak			
4		4882.000	39.38	7.89	47.27	74.00	-26.73	peak			

Page 26 of 62

RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

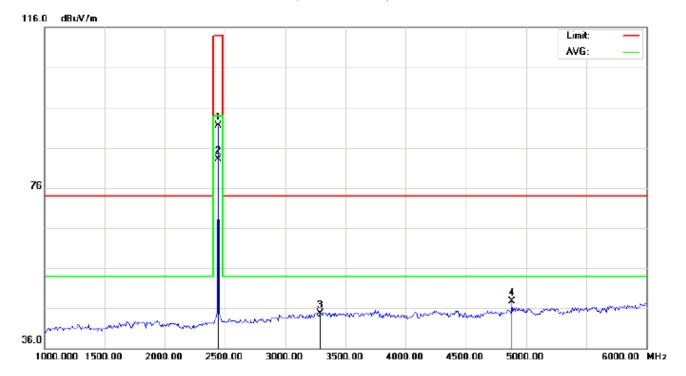

Site: site #1

Power:

Polarization: Vertical

Temperature: 22.7

Limit: FCC Class B 3M Radiation above 1GHz(PK)-

Humidity: 53.6 %

EUT:SPEAKER

Distance:

M/N:FBX1520

Mode: Middle Channel TX

Note:


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2441.000	81.16	10.36	91.52	114.00	-22.48	peak			
2	*	2441.000	72.65	10.36	83.01	94.00	-10.99	AVG	100	53	
3		3287.000	32.71	11.91	44.62	74.00	-29.38	peak			
4		4882.000	39.81	7.89	47.70	74.00	-26.30	peak			

Temperature: 22.7

Humidity: 53.6 %

Page 27 of 62

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

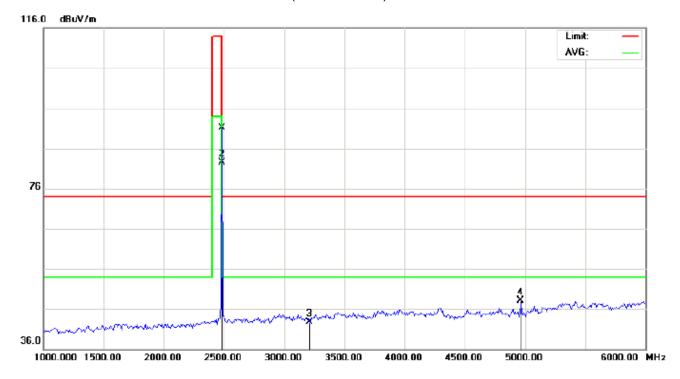

Site: site #1 Polarization: Horizontal
Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power:

EUT:SPEAKER Distance:

M/N:FBX1520


Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2480.000	80.62	10.41	91.03	114.00	-22.97	peak			
2	*	2480.000	72.09	10.41	82.50	94.00	-11.50	AVG	100	28	
3		3213.000	30.92	11.84	42.76	74.00	-31.24	peak			
4		4960.000	40.01	8.09	48.10	74.00	-25.90	peak			

Page 28 of 62

RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

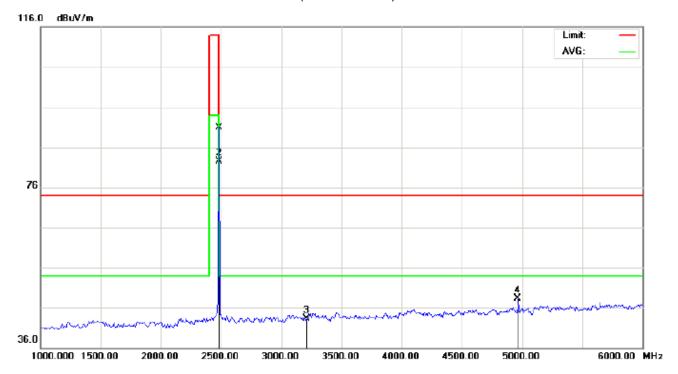

Site: site #1 Polarization: Vertical Temperature: 22.7 Limit: FCC Class B 3M Radiation above 1GHz(PK)- Power: Humidity: 53.6 %

EUT:SPEAKER Distance:

M/N:FBX1520

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2480.000	80.55	10.41	90.96	114.00	-23.04	peak			
2	*	2480.000	72.02	10.41	82.43	94.00	-11.57	AVG	100	52	
3		3213.000	31.53	11.84	43.37	74.00	-30.63	peak			
4		4960.000	40.16	8.09	48.25	74.00	-25.75	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Report No.: AGC09834170401FE03 Page 29 of 62

Field strength of the fundamental signal

1Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.79	10.32	92.11	114	-21.89	Horizontal
2402	81.74	10.32	92.06	114	-21.94	Vertical
2441	81.25	10.36	91.61	114	-22.39	Horizontal
2441	81.16	10.36	91.52	114	-22.48	Vertical
2480	80.62	10.41	91.03	114	-22.97	Horizontal
2480	80.55	10.41	90.96	114	-23.04	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.31	10.32	83.63	94	-10.37	Horizontal
2402	73.22	10.32	83.54	94	-10.46	Vertical
2441	72.72	10.36	83.08	94	-10.92	Horizontal
2441	72.65	10.36	83.01	94	-10.99	Vertical
2480	72.09	10.41	82.50	94	-11.50	Horizontal
2480	72.02	10.41	82.43	94	-11.57	Vertical

Report No.: AGC09834170401FE03 Page 30 of 62

2Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.71	10.32	92.03	114	-21.97	Horizontal
2402	81.63	10.32	91.95	114	-22.05	Vertical
2441	81.18	10.36	91.54	114	-22.46	Horizontal
2441	81.07	10.36	91.43	114	-22.57	Vertical
2480	80.54	10.41	90.95	114	-23.05	Horizontal
2480	80.48	10.41	90.89	114	-23.11	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.26	10.32	83.58	94	-10.42	Horizontal
2402	73.14	10.32	83.46	94	-10.54	Vertical
2441	72.66	10.36	83.02	94	-10.98	Horizontal
2441	72.60	10.36	82.96	94	-11.04	Vertical
2480	72.01	10.41	82.42	94	-11.58	Horizontal
2480	71.94	10.41	82.35	94	-11.65	Vertical

Report No.: AGC09834170401FE03 Page 31 of 62

3Mbps Result:

Peak value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	81.61	10.32	91.93	114	-22.07	Horizontal
2402	81.59	10.32	91.91	114	-22.09	Vertical
2441	81.11	10.36	91.47	114	-22.53	Horizontal
2441	80.99	10.36	91.35	114	-22.65	Vertical
2480	80.50	10.41	90.91	114	-23.09	Horizontal
2480	80.41	10.41	90.82	114	-23.18	Vertical

Average value

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	73.20	10.32	83.52	94	-10.48	Horizontal
2402	73.09	10.32	83.41	94	-10.59	Vertical
2441	72.57	10.36	82.93	94	-11.07	Horizontal
2441	72.46	10.36	82.82	94	-11.18	Vertical
2480	71.92	10.41	82.33	94	-11.67	Horizontal
2480	71.88	10.41	82.29	94	-11.71	Vertical

Page 32 of 62


10. BAND EDGE EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
- 2. Max hold the trace of the setup1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
- 3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission

10.2 TEST SETUP

RADIATED EMISSION TEST SETUP

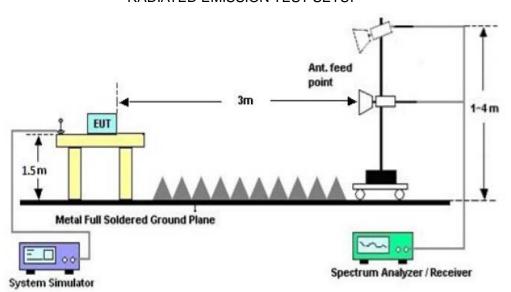

Temperature: 26

Humidity: 60 %


Page 33 of 62

10.3 RADIATED TEST RESULT

(Worst modulation: GFSK)

FOR BR/EDR

TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

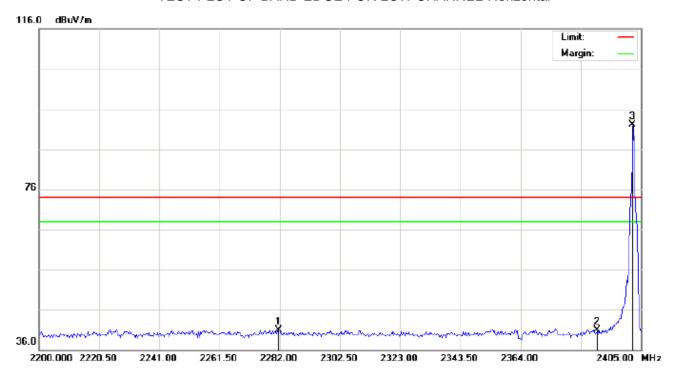

Site: site #1 Polarization: Horizontal
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power:

EUT:SPEAKER Distance:


M/N:FBX1520

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2281.658	30.70	10.19	40.89	74.00	-33.11	peak			
2		2390.000	30.50	10.31	40.81	74.00	-33.19	peak			
3	*	2402.000	81.83	10.32	92.15	74.00	18.15	peak			

Page 34 of 62

TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

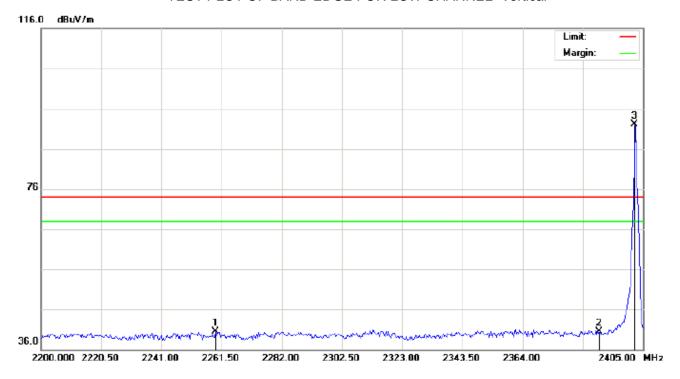

Site: site #1 Polarization: Vertical Temperature: 26
Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %

EUT:SPEAKER Distance:


M/N:FBX1520

Mode: Low Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2259.450	30.34	10.17	40.51	74.00	-33.49	peak			
2		2390.000	30.21	10.31	40.52	74.00	-33.48	peak			
3	*	2402.000	81.73	10.32	92.05	74.00	18.05	peak			

Page 35 of 62

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

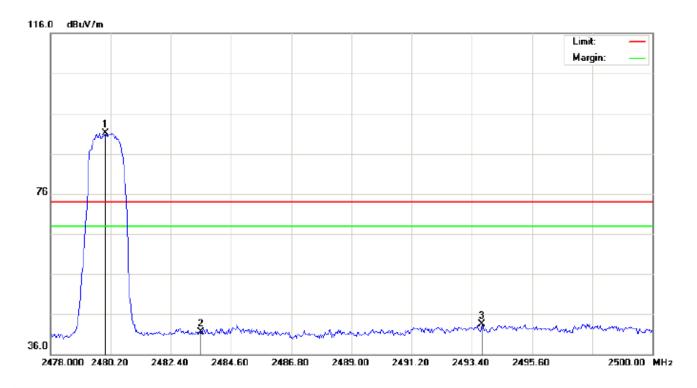

Site: site #1 Polarization: Horizontal Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %

EUT:SPEAKER Distance:

M/N:FBX1520

Mode: High Channel TX

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	80.64	10.41	91.05	74.00	17.05	peak			
2		2483.500	31.19	10.41	41.60	74.00	-32.40	peak			
3		2493.767	33.03	10.42	43.45	74.00	-30.55	peak			

Page 36 of 62

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical



Site: site #1 Polarization: Vertical Temperature: 26

Limit: FCC Class B 3M Radiation above 1GHz(PK) Power: Humidity: 60 %

EUT:SPEAKER Distance:

M/N:FBX1520

Mode: High Channel TX

Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	80.57	10.41	90.98	74.00	16.98	peak			
2		2483.500	31.76	10.41	42.17	74.00	-31.83	peak			
3		2493.620	31.73	10.42	42.15	74.00	-31.85	peak			

RESULT: PASS

Note: Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

Hopping on mode and Hopping off mode have been tested, but only worst case reported.


Page 37 of 62

11. 20DB BANDWIDTH

11.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW ≥ 1% of the 20 dB bandwidth, VBW ≥ RBW; Sweep = auto; Detector function = peak
- 3. Set SPA Trace 1 Max hold, then View.

11.2. TEST SET-UP

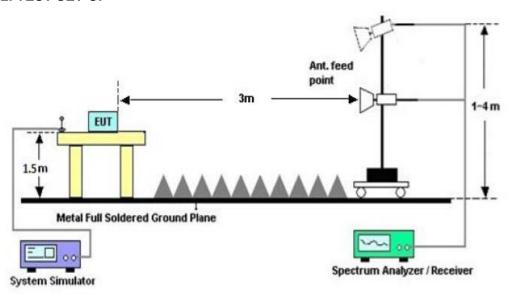

11.3. LIMITS AND MEASUREMENT RESULTS

FOR BR/EDR


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT									
	Measurement Result								
Applicable Limits		Doorle							
		99%OBW (MHz)	-20dB BW(MHz)	Result					
	Low Channel	1.004	1.134	PASS					
N/A	Middle Channel	1.003	1.132	PASS					
	High Channel	1.013	1.151	PASS					

Page 38 of 62

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

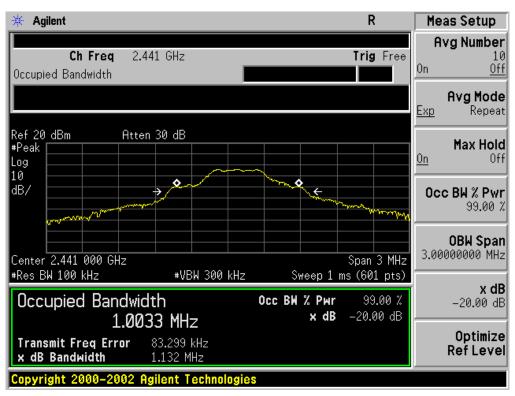

Page 39 of 62

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

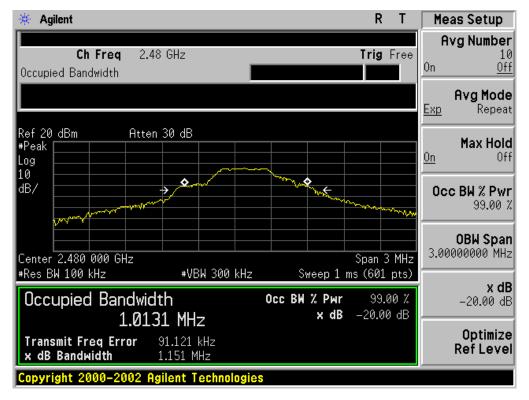

Report No.: AGC09834170401FE03 Page 40 of 62


BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Doorle								
		99%OBW (MHz)	-20dB BW(MHz)	Result						
	Low Channel	1.182	1.296	PASS						
N/A	Middle Channel	1.169	1.323	PASS						
	High Channel	1.181	1.332	PASS						

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




Report No.: AGC09834170401FE03 Page 41 of 62

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

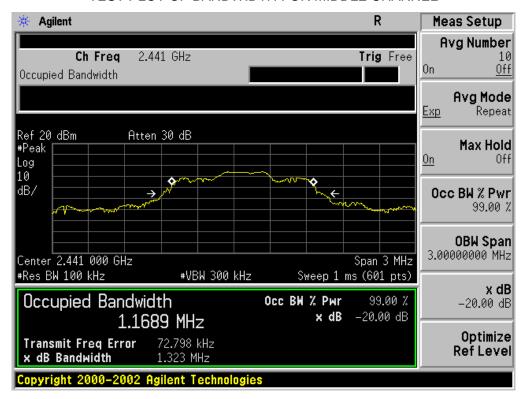


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

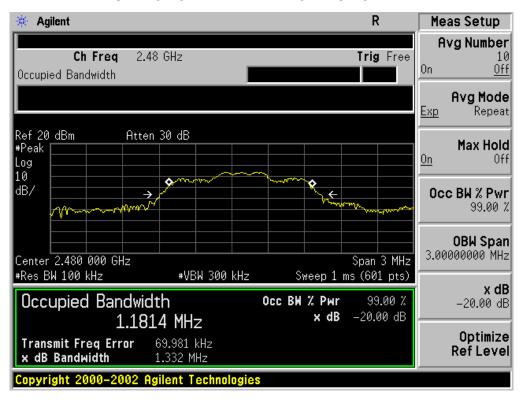

Report No.: AGC09834170401FE03 Page 42 of 62


BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT										
	Measurement Result									
Applicable Limits		Danill								
		Result								
	Low Channel	1.196	1.311	PASS						
N/A	Middle Channel	1.198	1.314	PASS						
	High Channel	1.204	1.317	PASS						

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

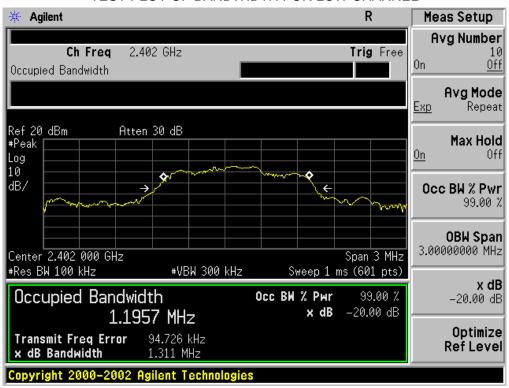


Page 43 of 62

TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

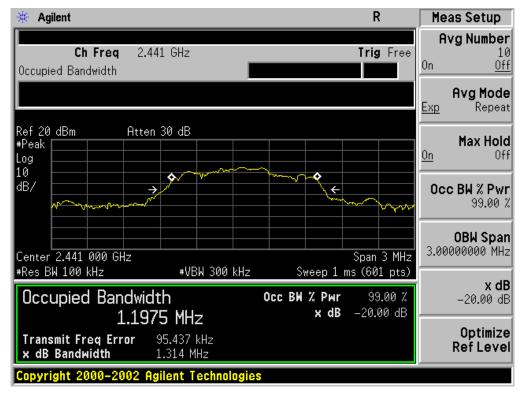

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

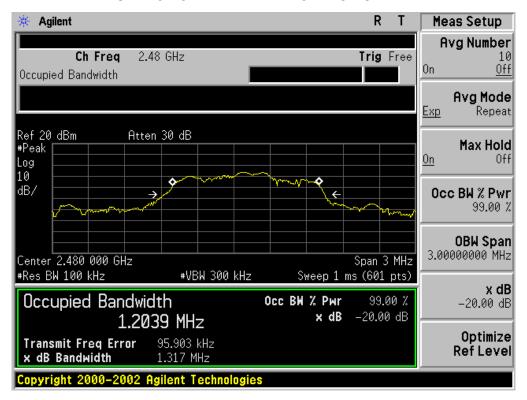

Page 44 of 62

12. FCC LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Framueney	Maximum RF Line Voltage							
Frequency	Q.P.(dBuV)	Average(dBuV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

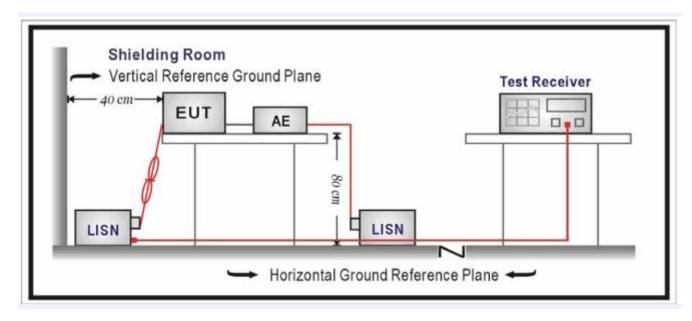

Page 45 of 62

12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.

- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.


Humidity: 60 %

Page 46 of 62

12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

FOR BR/EDR

Line Conducted Emission Test Line 1-L

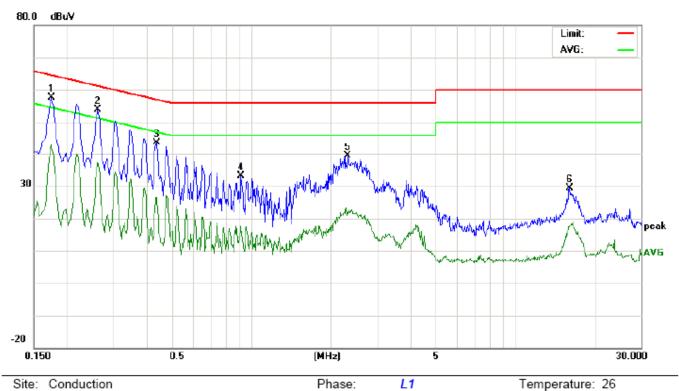

Limit: FCC Class B Conduction(QP)

EUT:SPEAKER M/N:FBX1520

Mode:BT Link with charging

Note:


No.	Freq.	Reading_Level (dBuV)		Correct Measurement Factor (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment		
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1740	47.48		32.60	10.19	57.67		42.79	64.76	54.76	-7.09	-11.97	Р	
2	0.2620	43.53		27.13	10.27	53.80		37.40	61.36	51.36	-7.56	-13.96	Р	
3	0.4380	33.23		16.20	10.36	43.59		26.56	57.10	47.10	-13.51	-20.54	Р	
4	0.9180	22.68		7.24	10.40	33.08		17.64	56.00	46.00	-22.92	-28.36	Р	
5	2.3220	28.93		11.55	10.36	39.29		21.91	56.00	46.00	-16.71	-24.09	Р	
6	16.0939	19.32		7.19	10.11	29.43		17.30	60.00	50.00	-30.57	-32.70	Р	

Power:

Humidity: 60 %

Page 47 of 62

Line Conducted Emission Test Line 2-N

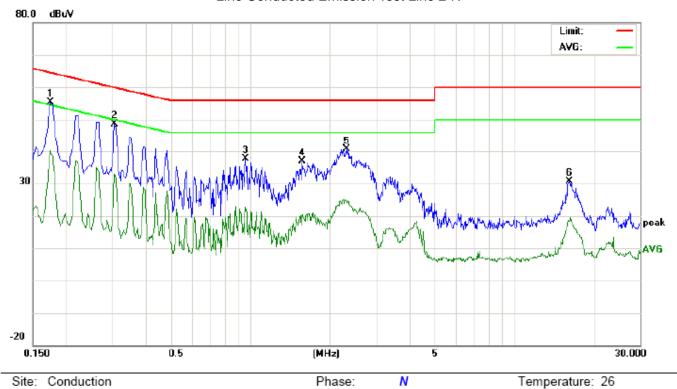

Site: Conduction Phase: N
Limit: FCC Class B Conduction(QP) Power:

EUT:SPEAKER M/N:FBX1520

Mode:BT Link with charging


Note:

No.	Freq.	Reading_Level (dBuV)		Correct Measurement Factor (dBuV)		Limit (dBuV)		Margin (dB)		P/F	Comment			
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1740	45.15		29.83	10.19	55.34		40.02	64.76	54.76	-9.42	-14.74	Р	
2	0.3060	38.41		22.66	10.29	48.70		32.95	60.08	50.08	-11.38	-17.13	Р	
3	0.9620	27.25		12.12	10.39	37.64		22.51	56.00	46.00	-18.36	-23.49	Р	
4	1.5740	26.48		9.94	10.36	36.84		20.30	56.00	46.00	-19.16	-25.70	Р	
5	2.3179	30.26		14.21	10.35	40.61		24.56	56.00	46.00	-15.39	-21.44	Р	
6	16.1899	20.49		8.36	10.11	30.60		18.47	60.00	50.00	-29.40	-31.53	Р	

Page 48 of 62


APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC LINE CONDUCTED EMISSION TEST SETUP

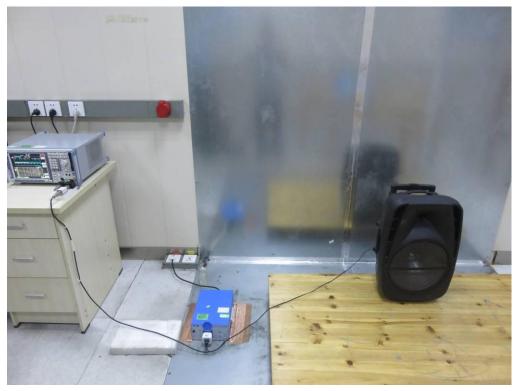


FCC RADIATED EMISSION TEST SETUP



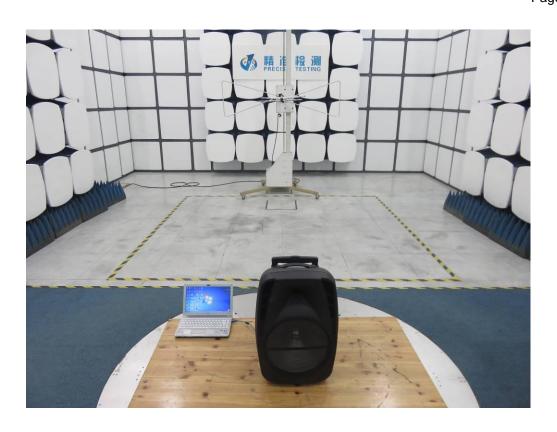

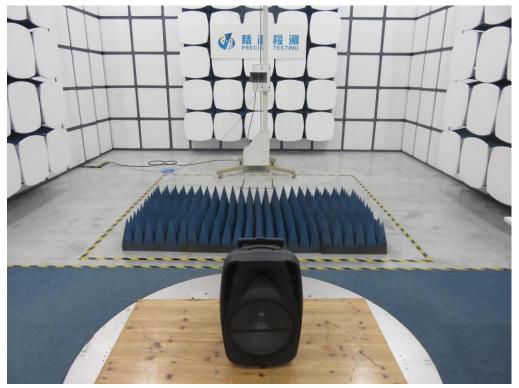

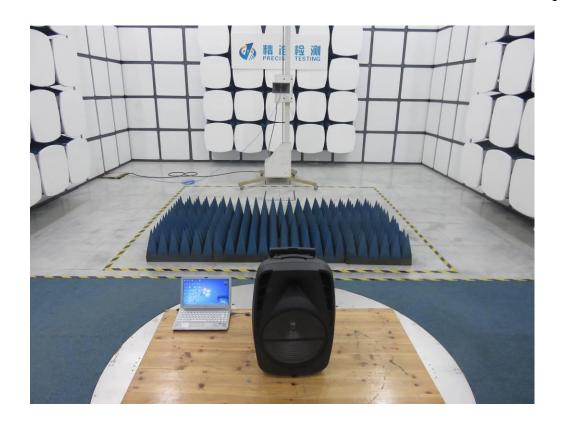

Report No.: AGC09834170401FE03 Page 51 of 62

APPENDIX B: PHOTOGRAPHS OF EUT

ALL VIEW OF EUT



TOP VIEW OF EUT



Report No.: AGC09834170401FE03 Page 52 of 62

BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



Report No.: AGC09834170401FE03 Page 53 of 62

BACK VIEW OF EUT



LEFT VIEW OF EUT



Report No.: AGC09834170401FE03 Page 54 of 62

RIGHT VIEW OF EUT



VIEW OF EUT (PORT)-1



Report No.: AGC09834170401FE03 Page 55 of 62


VIEW OF EUT (PORT)-2




VIEW OF EUT (PORT)-3




OPEN VIEW OF EUT-1

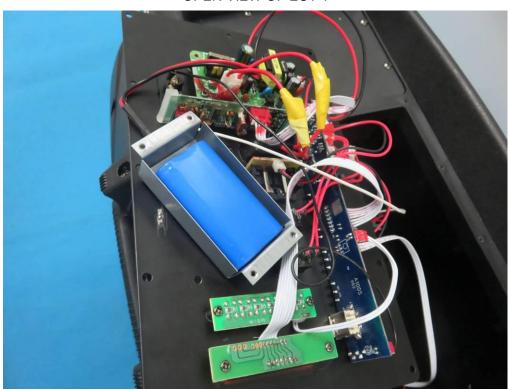


OPEN VIEW OF EUT-2

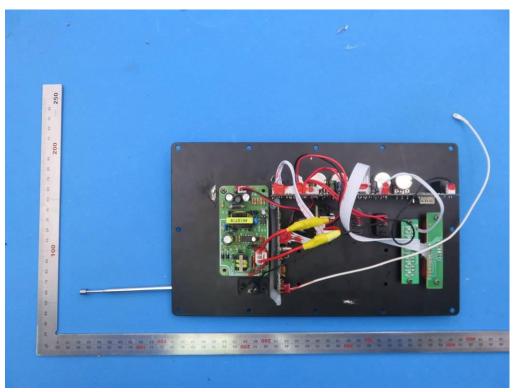


VIEW OF BATTERY

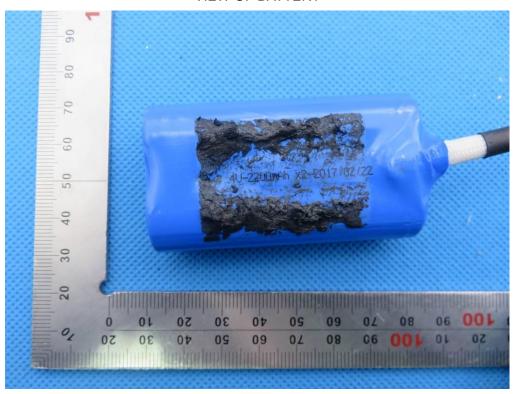


INTERNAL VIEW OF EUT-1

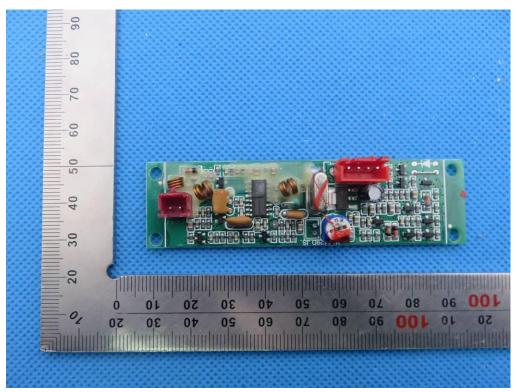


INTERNAL VIEW OF EUT-2

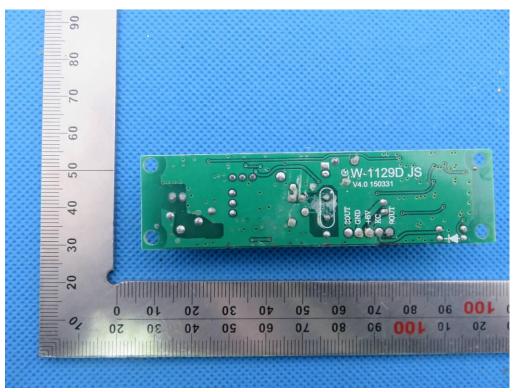


INTERNAL VIEW OF EUT-3

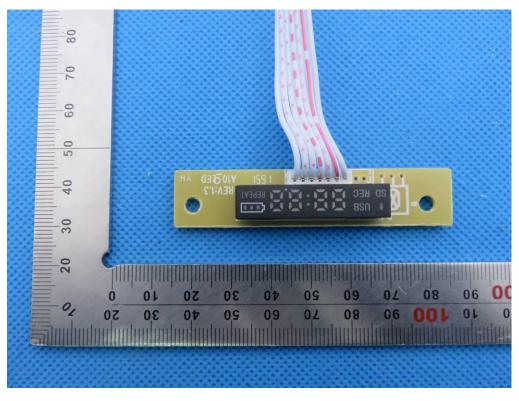


INTERNAL VIEW OF EUT-4

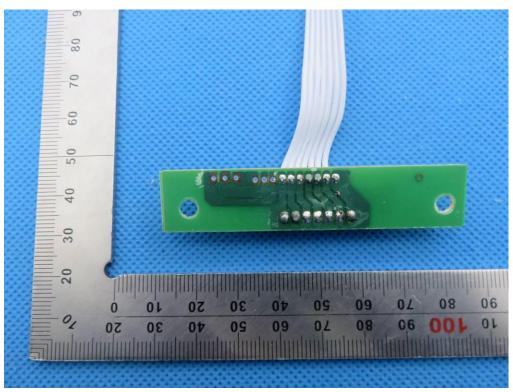


INTERNAL VIEW OF EUT-5

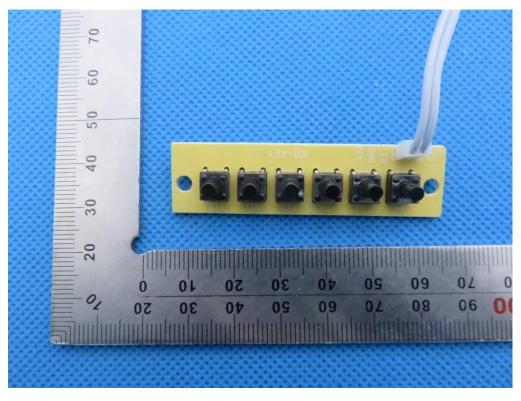


INTERNAL VIEW OF EUT-6

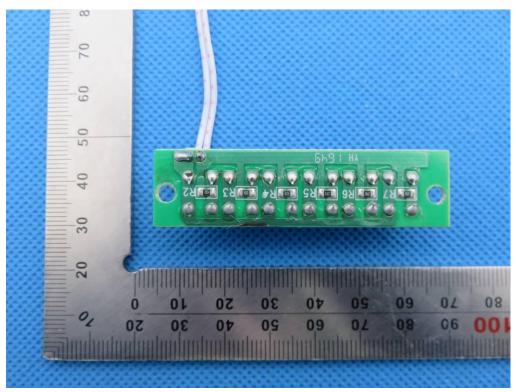


INTERNAL VIEW OF EUT-7

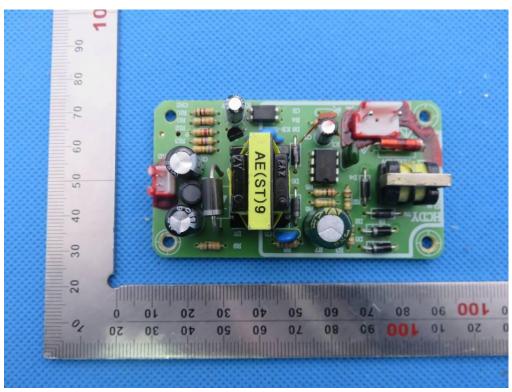


INTERNAL VIEW OF EUT-8

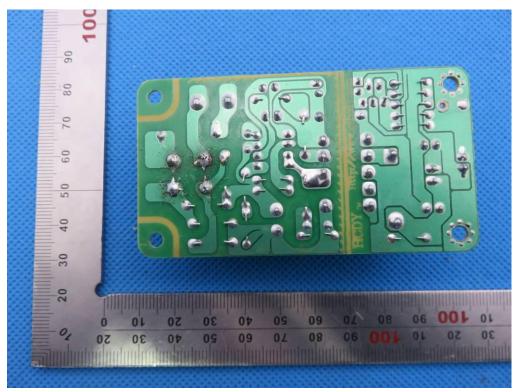


INTERNAL VIEW OF EUT-9

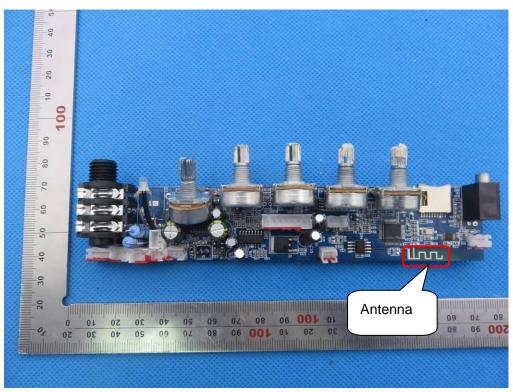

INTERNAL VIEW OF EUT-10

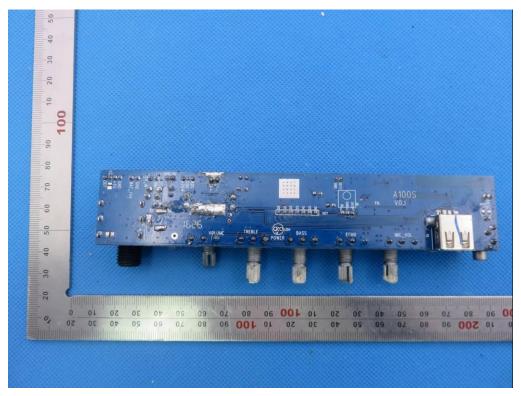

INTERNAL VIEW OF EUT-11

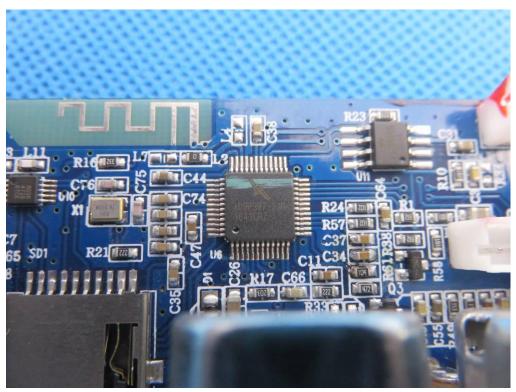

----END OF REPORT----