



PHIL JONES BASS

NANOBASS X4
COMBO AMPLIFIER
(Keyboards-Guitar-Bass)



OWNER'S MANUAL

Thank you for purchasing the NANOBASS X4. A great deal of dedication and passion went into designing and building this no-compromise, high performance combo amplifier. It was conceived to be a dedicated amplifier for the “connoisseur” bassist. Reading and following this manual will enable you to get the best performance from the amp and ensure its longevity.

READ THIS FIRST

- Before using the NANOBASS, please read ALL the instructions.
- On receipt of product, check for any signs of physical damage arising from shipping. If any damage is visible, contact your retailer.
- Do not install this equipment in a confined or building-in space such as a bookcase or similar unit. The amp should remain in well ventilation conditions at an open site. The ventilation should not be impeded by covering the ventilation openings with items such as newspaper, able-cloths, curtains, etc.
- WARNING: Only use attachments/accessories specified or provided by the manufacturer.
- WARNING: To reduce the risk of fire or electric shock, do not expose the amp to rain or moisture. The amp shall not be exposed to dripping or splashing. Objects filled with liquids such as a coffee cup shall not be placed on top of the amp.
- When not in use and during movement, please take care of the power cord, e.g. tie up the power cord with cable tie. It shall be free from sharp edges which can cause abrasion of the power cord. When put into use again, please make sure the power cord being not damaged. If any damages found, please replace it with one specified by the manufacturer or with the same specifications as the original one.
-  Correct Disposal of this product. This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

OVERVIEW OF THE (X4)

The NANOBASS is a single channel combo amplifier for multiple instruments such as Bass, Guitar, ukulele, violin, E-drum .that has an 6.35 Jack input socket for instrument, an 3.5 stereo jack auxiliary input for iPad/iPod, or drum machine, and a 3.5 stereo jack for your headphone. It features 3 band EQ that is perfectly tailored for your instruments, it also can play music with the Blue Tooth(5.0 with aptX HD) function.

Using our extensive R&D facility which includes the largest anechoic chamber in the bass guitar amplifier industry and the KLIPPEL transducer measurement system (it uses lasers!), we were able to develop the perfect 4 inch loudspeaker. We analyzed the neodymium magnetic system, the cone behavior at all frequencies in 3D representation, cone suspension and frame, etc., until we had achieved a transducer beyond what anyone would have ever thought possible. Then we looked at the acoustic loading using the acoustic simulation software and calculated exactly the full power cone displacement at every frequency.

We designed a custom Rectangular Auxiliary Low Frequency Radiator (RALFR®). It also reduces the cone excursion of the speakers, allowing greater power handling.

The proprietary PJB NeoPower 4-inch speakers have full frequency range to the highest audio frequencies. Not only does this give greater clarity and transparency to your instrument, but also a high-fidelity sound to any backing track fed into the auxiliary input.

The cabinet may be as small as a shoe box, but it is built to the same standards of all PJB cabinets, heavily braced internally and damped with acoustic damping materials to prevent cabinet coloration that can kill the true sound of your instrument. What you hear from the NANOBASS is the closest you can get to how your instrument actually sounds.

TAudio front end on the Amp system of NANOBASS is one ADC chip PCM1861 from Texas Instrument. With special configuration, the ADC is running at 96KHz sampling rate to get wider frequency range and higher precision from the two analog inputs. Amplifier system of NANOBASS is built with one piece high-efficient Class-D power amplifier TAS5805 also from Texas Instrument. The chip is wired in Parallel BTL mode to drive the woofer, and its 768KHz output PWM carrier frequency is ideal for rendering high resolution sound. With low-ripple switch-mode power supply and integrated DSP-based active crossover and dynamic range control, the amplifiers provide sufficient horse power for the speaker driver.


NANOBASS also features an integrated Bluetooth audio receiver, which is built with Qualcomm's latest V5.0 chipset QCC3031. The chipset can support aptX HD codec, offering lower distortion and higher resolution Bluetooth audio playback than what traditional SBC can provide.

NANOBASS may be built for practice use, while it sounds a lot more than that. The sound image it renders exceeds its figure, and you may find it hard to believe the overwhelming sound wave are coming from such a tiny cube.

AMPLIFIER FEATURES

- PJB N52 Neo-Power 4inch speaker driver.
- 35watts Digital Amp with DSP-based active crossover and dynamic range control.
- PJB 3 Band EQ.
- Stereo Aux input for Drum machine or iPod/Smart phone player.
- Bluetooth5.0 (aptX HD).
- Worldwide AC voltage Input. (100~240V).

FUNCTIONS OVERVIEW

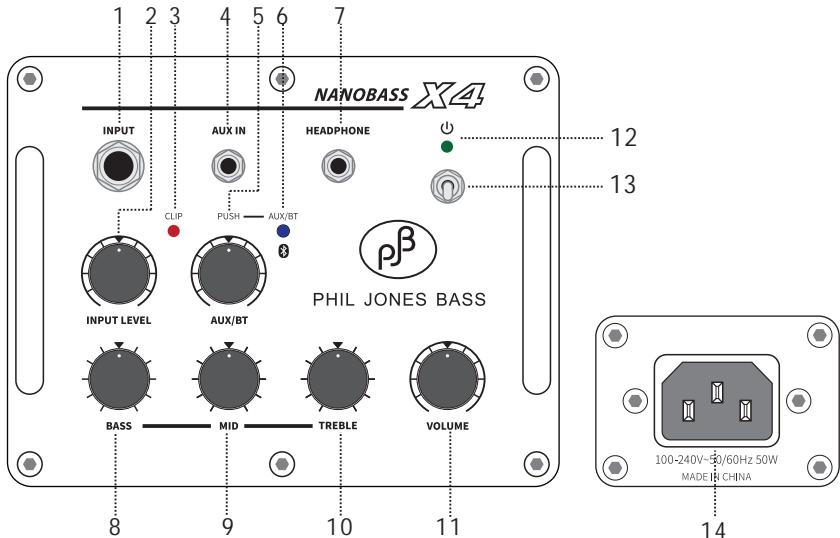

1. Input Jack

This is a high impedance input and is designed for all passive and active instruments.

2. Input Level Control

Different instruments and also different playing styles and even players will affect the signal level so adjust this control so that the signal overload Clip light does not light up. This optimizes the best signal to noise ratio between amp and instrument and will give you the full extent of the amplifiers tone and power.

3. Clip Light

when the power amplifier is overloaded and causes distortion, the CLIP light will light up in red.

4. Auxiliary Input(3.5mm stereo)

This is a stereo mini jack and can accept any signal from iPod, iPad, smartphone or drum machine.

5. Auxiliary / Bluetooth level control & Mode select

Rotate: Increase or reduce the input level for AUX and Bluetooth;

Press: switch AUX/BT input mode, keep press will disconnect the Bluetooth.

6. Aux/BT mode Indicator

Blue light steady lit: Bluetooth;

Green light steady lit: Aux input.

Note: For initial pairing, the blue light will flash when Bluetooth input is selected, after pairing is successful, the blue light will be steady lit.

7. Headphone Jack

You can use any kind of stereo headphones on this jack but remember you will only sound good in your headphones if they are high quality.

8. Bass Control

Boosting or cutting this will have significant effect on the weight of the tone.

9. Mid Range Control

Boosting or cutting Mid-range.

10. Treble Control

Boosting or cutting treble.

11. Master Volume

This controls the volume of instrument input.

12. Power Switch

This switches off the amplifier from the DC supply but AC signal will still be in the external supply. We advise that you disconnect the power supply from AC source if you do not intend to use the NANOBASS for long periods of time.

13. Power Indicator

Will light up when you have power cable connected and amp switched on.

14. AC INPUT SOCKET

Connects the amplifier to the AC power supply.

NOTE: TURN THE VOLUME DOWN on the NANOBASS before plugging in your instrument.

TRANSPORTING AND STORING THE NANOBASS

When transporting in a vehicle, it is recommended that you use an external case or heavy-duty cover to prevent it being damaged by falling over or other objects falling on it.

When Storing:

- Keep in a dry location preferably at room temperature.
- Do not store in temperatures below 20 Degrees C or above 40 Degrees C.
- Do not allow it to get wet. If this occurs, never turn it on in this condition.
- Do not leave the X4 permanently connected to a power source.

SPECIFICATIONS

Power output: 35watts,

Speaker: 1xPJB N52 Neopower 4-inch Speaker,
1x Rectangular Auxiliary Low Frequency Radiator

Speaker Frequency Response: 72Hz-15KHz

EQ: 3Band EQ,

Bass shelf 100Hz, +/-15dB;

Mid 1KHz Bandwidth 120Hz-10Kz, +/-15dB;

Treble shelf 10KHz, +/-15dB;

Input Mode: Instrument Input,

Aux in (3.5mm Stereo Jack) ,

Bluetooth 5.0(aptX)

Input Levels: Instrument:240 mV- 2 V;

AUX:300mV(MAX);

Bluetooth:500mFFS

Output: Headphone Out

Main Valtage: AC100-240V/50-60Hz,6 ft Angle Plug AC Power Cord

Dimensions (WxHxD): 6.3 x 7.9 x 7.8 inch (160 x 200 x 197mm)

Weight: 5.3 lbs / 2.4 kg

SERVICE/WARRANTY INFORMATION

The NANOBASS carries a 2-year limited warranty on parts and labor.

Products must be purchased from an authorized PJB dealer.

Buyer must complete and return the enclosed warranty card within 15 days of purchase, or register online by www.pjbworld.com

This warranty covers defect in materials or workmanship that occurs in normal use.

Within warranty period PJB or its local distributor will repair or replace the defect unit free of labor and parts charge. It is the buyer's responsibility to use the unit strictly according to instructions written in the owner's manual.

This warranty is not transferable; it is provided to original owner only.

Damage/defects caused by the following conditions are not covered by this warranty:

- Improper handling, neglect or failure to operate the unit in compliance with the instructions given in user manual;
- Connection or operation in any way that does not comply with the technical or safety regulations applicable in the country where the product is used;
- Repairs or modifications by anyone other than authorized PJB service agent;
- Damages/defects caused by forces of nature or any other condition that is beyond the control of PJB.

IMPORTANT:

- In all warranty issues your first line of communication should be to the retailer you purchased from, even if you have purchased product from an online source.
- When a local distributor is available, customer who prefers to purchase across country online maybe required to pay shipping charges to retailer in order to obtain service. Warranty policies differ in countries outside of USA. Please check with local distributors for warranty information in your region. Register first with your local distributor if available will give you better and quicker service when needed.

Further questions, please contact your local distributors, or PJB by email
info@philjonespuresound.com.

PHIL JONES BASS

American Acoustic Development LLC

8509 Mid County Industrial Dr.

St Louis, MO 63114

USA

Tel: 855-227-7510 (855-BASS-510)

www.pjbworld.com

support@philjonespuresound.com

For servicing outside USA please contact our distributor in your country.
Information can be found on our website.

EDIFIER®

FCC Regulatory Compliance

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

RF Exposure Compliance

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

ISED Regulatory compliance

This device contains licence-exempt transmitters that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

This device may not cause interference.

This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

L'appareil ne doit pas produire de brouillage.

L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Cet équipement est conforme aux limites d'exposition aux radiations IC CNR-102 établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.

IB-200-000000-13

名 称:	说明书FCC ISED认证说明-音箱	东莞市漫步者科技有限公司
材 质:	80g书纸	版面设计:
尺 寸:	125×120 (MM)	校 对:
版本号及料号:	V1.3/IB-200-000000-13	批 准:



PHIL JONES BASS

American Acoustic Development LLC
8509 Mid County Industrial Dr.
St Louis, MO 63114

USA

WWW.PJBWORLD.COM

Printed in China