

## **FCC MPE Report**

**Applicant** : *Amazipoint Technology Ltd.*

**Product Name** : *PERSONAL ALERT SYSTEM*

**Trade Name** : *Albion Devices, Inc.*

**Model Number** : *Detetur*

**Applicable Standard** : *47 CFR § 2.1091*

**Received Date** : *Aug. 02, 2023*

**Issued Date** : *Oct. 20, 2023*

Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City 334025, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330

**Note:**

- 1.The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2.This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

**Approved By :**



## Table of Contents

1.	<b>General Information</b> .....	4
2.	<b>Description of Equipment under Test (EUT)</b> .....	6
3.	<b>RF Exposure Limit</b> .....	7
4.	<b>RF Exposure Assessment</b> .....	8
5.	<b>Maximum Transmitting Mode Evaluation</b> .....	10
6.	<b>Result</b> .....	10
7.	<b>Conclusion</b> .....	10

## Revision History

Rev.	Issued Date	Description	Revised by
00	Oct. 20, 2023	Initial Issue	Rowan Hsieh

## 1. General Information

### 1.1 Reference Applicable Standard

Standard	Description	Version
IEEE C95.1	American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 300 KHz to 100 GHz, New York.	1992
47 CFR § 2.1091	Radiofrequency radiation exposure evaluation: mobile devices.	-
47 CFR § 1.1310	Radiofrequency radiation exposure limits.	-

## 1.2 Testing Location

### Test Facilities

Company Name: Eurofins E&E Wireless Taiwan Co., Ltd.  
Address: No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan  
Website: <https://www.atl.com.tw>  
Telephone: +886-3-271-0188  
Fax: +886-3-271-0190  
E-mail: [infoEETW@eurofins.com](mailto:infoEETW@eurofins.com)

### Test Site Location

- No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan
- No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan

### Laboratory Accreditation

Location	TAF	FCC	ISED
No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan	Accreditation No.: 1330	Designation No.: TW0010	Company No.: 7381A CAB ID: TW1330
No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan	Accreditation No.: 1330	Designation No.: TW0034	Company No.: 28922 CAB ID: TW1330

## 2. Description of Equipment under Test (EUT)

<b>Applicant</b>	Amazipoint Technology Ltd. 2F, #113, ZhongYang Rd. XinDian Dist., New Taipei City 23150, Taiwan			
<b>Product Name</b>	PERSONAL ALERT SYSTEM			
<b>Trade Name</b>	Albion Devices, Inc.			
<b>Model Number</b>	Detectur			
<b>FCC ID</b>	2ALWN-A001			
<b>Use Distance</b>	20 cm			
<b>Antenna Information</b>	Trade Name	Model No.	Type	Gain
	Shenzhen Hongxin Technology Electronics Co., Ltd.	H1855_915	Helical Antenna	1.75 dBi

Note:

The above information of DUT was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

### 2.1 RF Specification

SRD / LoRa	
Operation Frequency	915 MHz
Modulation	FSK

### 3. RF Exposure Limit

For devices that operate at larger distances from persons, where there are minimal RF coupling interactions between a device and the user or nearby persons, RF exposure compliance using maximum permissible exposure (MPE) limits is applied. The limits for MPE is listed as below:

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824 / f	2.19 / f	(180 / f <sup>2</sup> )*	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	F / 1,500	30
1,500-100,000	-	-	1.0	30
Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1,842 / f	4.89 / f	(900 / f <sup>2</sup> )*	6
30-300	61.4	0.163	1.0	6
300-1,500	-	-	F / 300	6
1,500-100,000	-	-	5	6


f = frequency in MHz. \* = Plane-wave equivalent power density.

## 4. RF Exposure Assessment

### 4.1 Exemption Evaluation

Exemption evaluation was performed according to the appendix A and B in KDB447498 D04.

The General Sequence for Determination of Procedure demonstrated in Figure A.1 of KDB447498 D04 was applied.

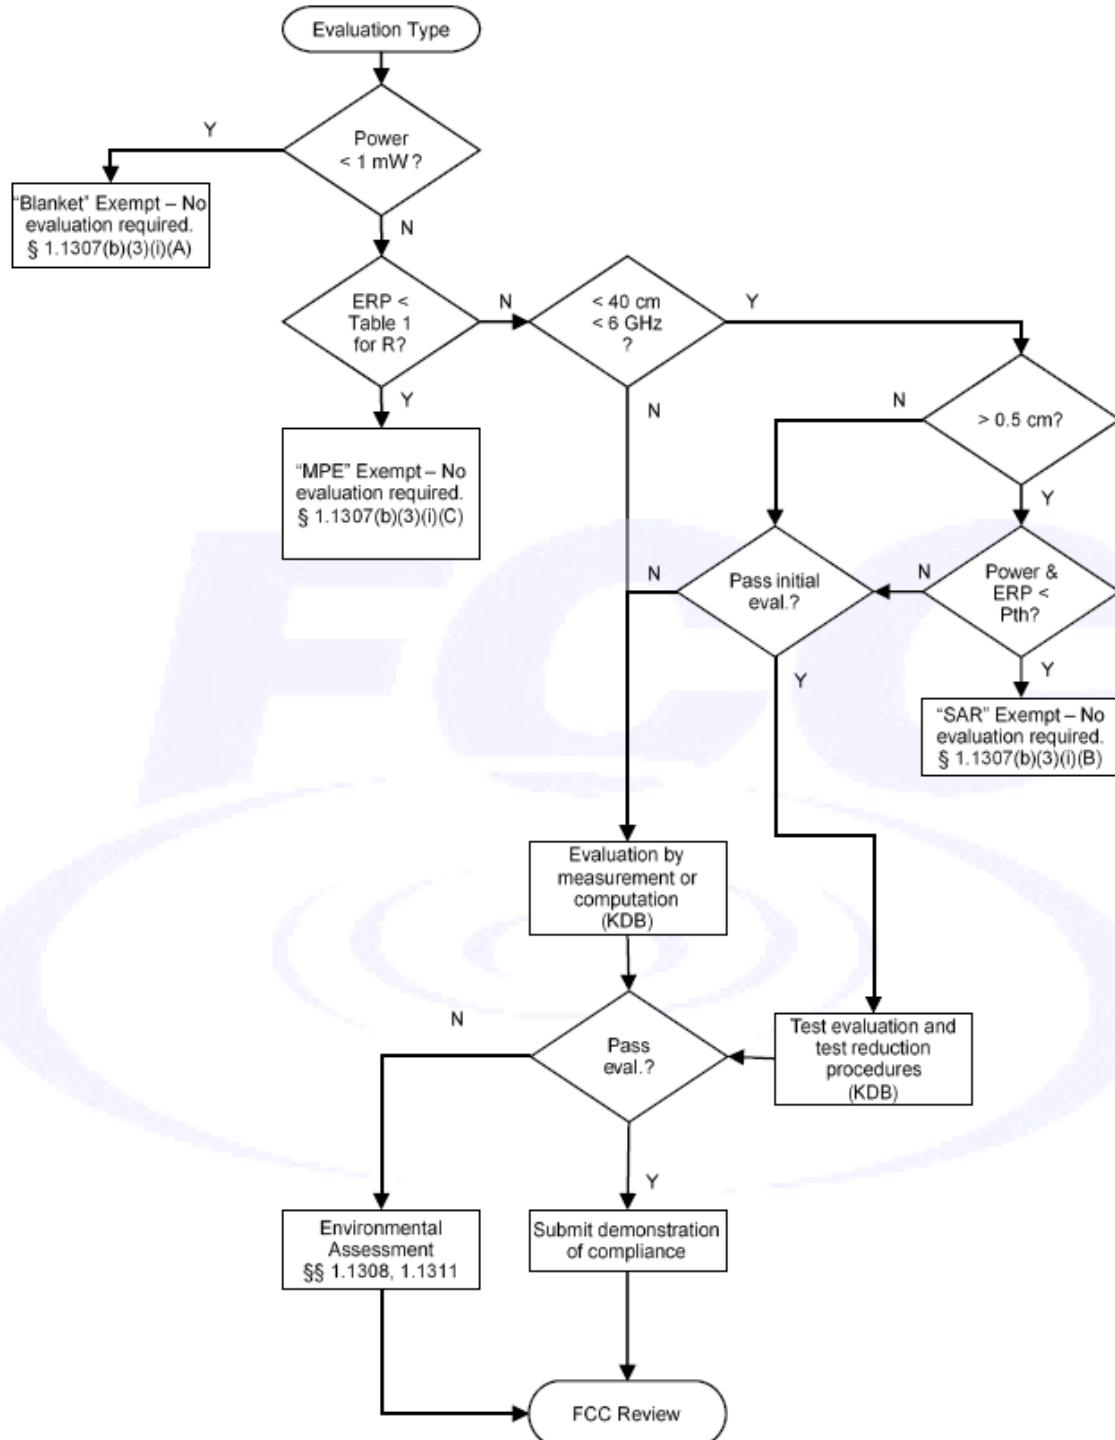

## 4.2 Human Exposure Assessment

Due to the design and installation of this product, it is not possible to conduct SAR evaluation. This is because client either manufactures or supplies the antenna(s) that will be used in the installation of this product. Therefore, this product will be evaluated as a mobile device per 47 CFR § 1.1310 titled "Radiofrequency radiation exposure limits", generally referred to as MPE limits.

In 47 CFR § 2.1091, paragraph (b) defines a mobile device as "a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 cm is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons."

### Exposure evaluation

$$S_{eirp} = \frac{EIRP}{4\pi d^2} = \frac{PG}{4\pi d^2} \left( \text{W} / \text{m}^2 \right)$$

Where

S: is the input power (W);

G: is the antenna gain;

d : is the distance between antennas and evaluation point (m).

## 5. Maximum Transmitting Mode Evaluation

Antenna transmission description								
SRD: 1TX (Diversity)								

## 6. Result

Band	Frequency (MHz)	Conducted Power (dBm) [P]	ANT Gain (dBi)	Numeric Gain [G]	Power with Duty cycle (mW) [P]x[G]	Power Density (mW/cm^2) [S]	Standalone Limit (mW/cm^2)	Evaluated / Exposure Limit
SRD	902 - 928	16.46	1.75	1.50	66.39	0.01	0.62	0.02

Note:

1. The calculation uses the minimum distance defined by the regulations of 20 cm, which is more conservative than the actual use distance of the product.

**MAX MPE:** 0.01 mW/cm<sup>2</sup>

## 7. Conclusion

The result shows that this device is compliance with the exposure limits in 47 CFR §1.1310.

\*\*\*\*\* End of Report \*\*\*\*\*