
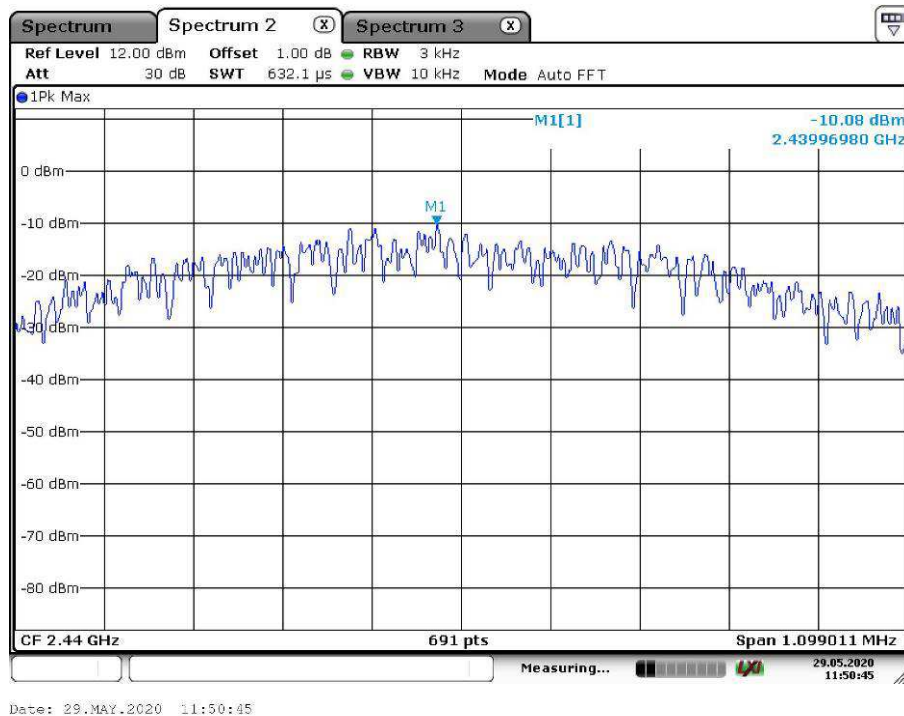



Appendix C: Test Results of BLE

APPENDIX C: TEST RESULTS OF BLE	1
APPENDIX C.1: TEST RESULTS OF CONDUCTED POWER SPECTRAL DENSITY	2
<i>GFSK(BLE) Mode, 1Mbps.....</i>	<i>2</i>
<i>GFSK(BLE) Mode, 2Mbps.....</i>	<i>3</i>
APPENDIX C.2: TEST RESULTS OF 6DB BANDWIDTH.....	5
<i>GFSK(BLE) Mode, 1Mbps.....</i>	<i>5</i>
<i>GFSK(BLE) Mode, 2Mbps.....</i>	<i>8</i>
APPENDIX C.3: TEST RESULTS OF 99% BANDWIDTH.....	11
<i>GFSK(BLE) Mode, 1Mbps.....</i>	<i>11</i>
<i>GFSK(BLE) Mode, 2Mbps.....</i>	<i>14</i>
APPENDIX C.4: TEST RESULTS OF CONDUCTED SPURIOUS EMISSIONS	17
<i>GFSK(BLE) Mode, 1Mbps.....</i>	<i>17</i>
<i>Low Channel.....</i>	<i>17</i>
<i>Middle Channel.....</i>	<i>18</i>
<i>High Channel.....</i>	<i>19</i>
<i>Band Edge, Low Channel.....</i>	<i>20</i>
<i>Band Edge, High Channel.....</i>	<i>20</i>
<i>GFSK(BLE) Mode, 2Mbps.....</i>	<i>21</i>
<i>Low Channel.....</i>	<i>21</i>
<i>Middle Channel.....</i>	<i>22</i>
<i>High Channel.....</i>	<i>23</i>
<i>Band Edge, Low Channel.....</i>	<i>24</i>
<i>Band Edge, High Channel.....</i>	<i>24</i>
APPENDIX C.5: TEST RESULTS OF RADIATED SPURIOUS EMISSIONS.....	25
<i>30 MHz to 1GHz.....</i>	<i>25</i>
<i>Above 1GHz.....</i>	<i>29</i>
APPENDIX C.6: TEST RESULTS OF RADIATED EMISSIONS IN RESTRICTED BANDS	41


Appendix C.1: Test Results of Conducted Power Spectral Density


GFSK(BLE) Mode, 1Mbps

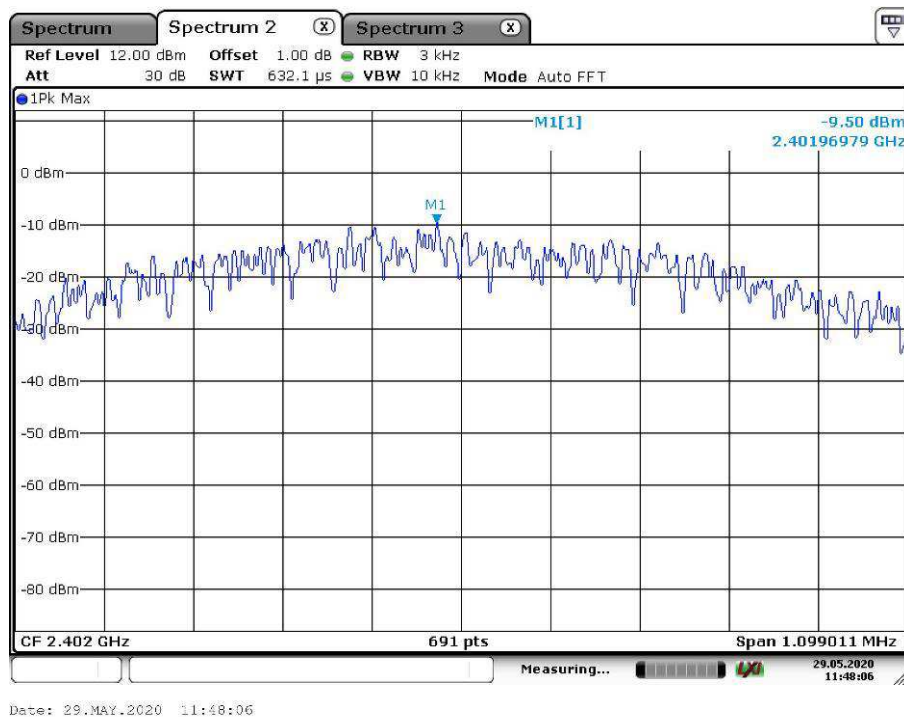

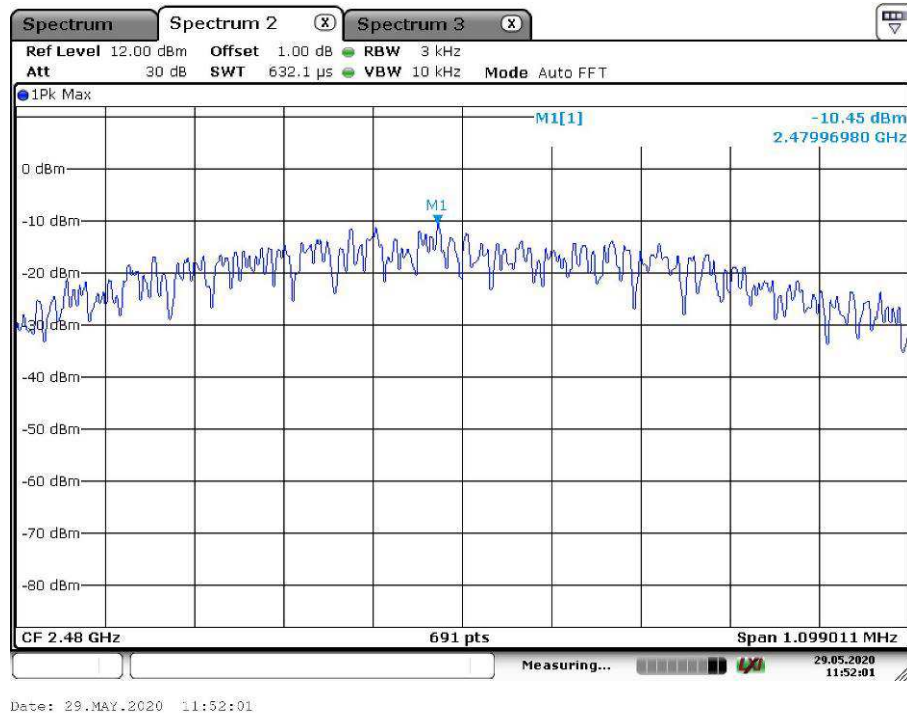


GFSK(BLE) Mode, 2Mbps

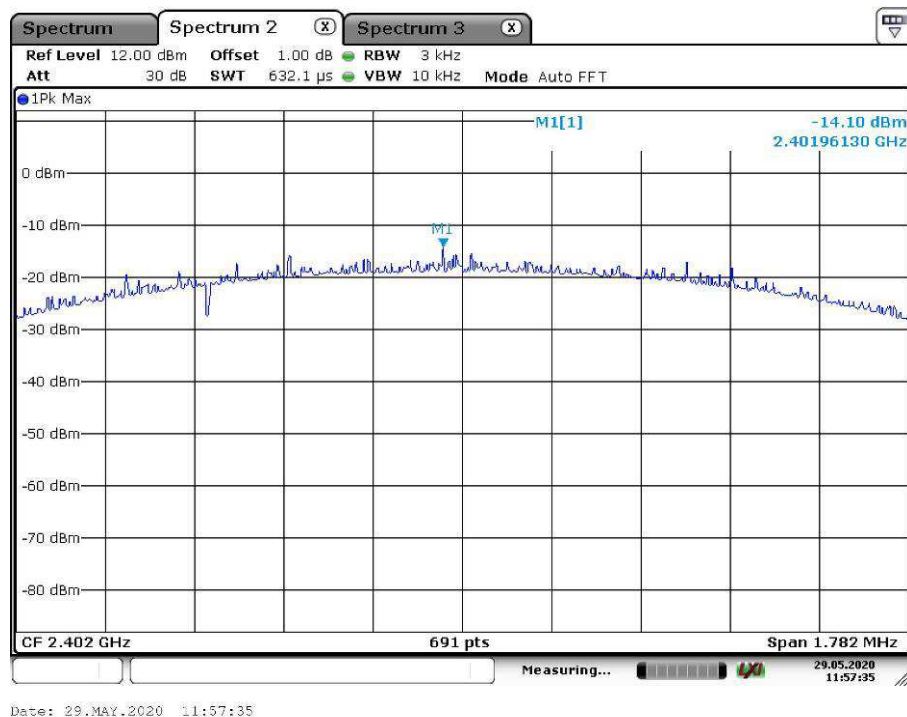

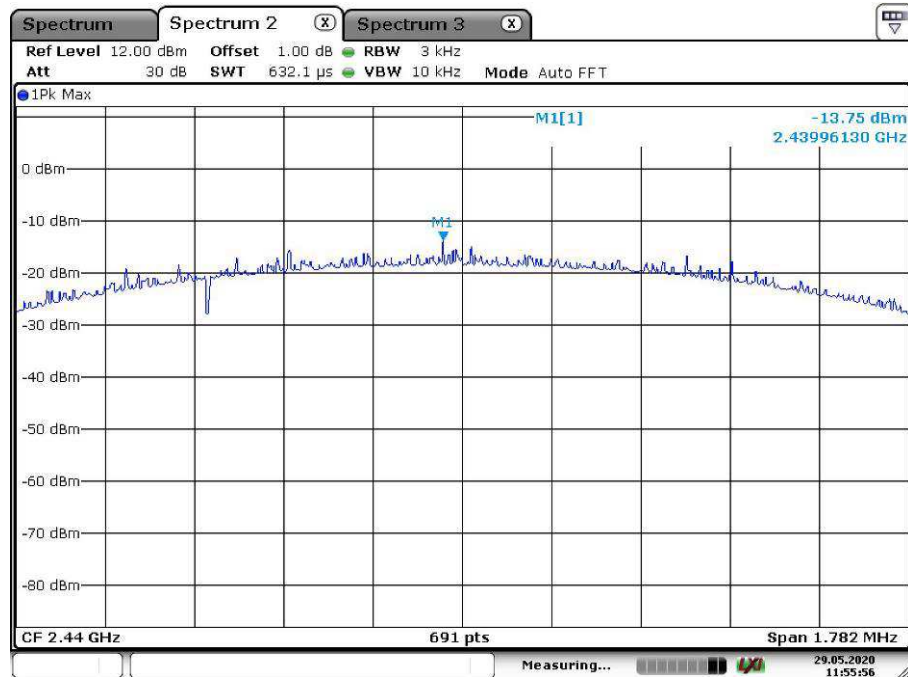

Date: 29.MAY.2020 11:55:57

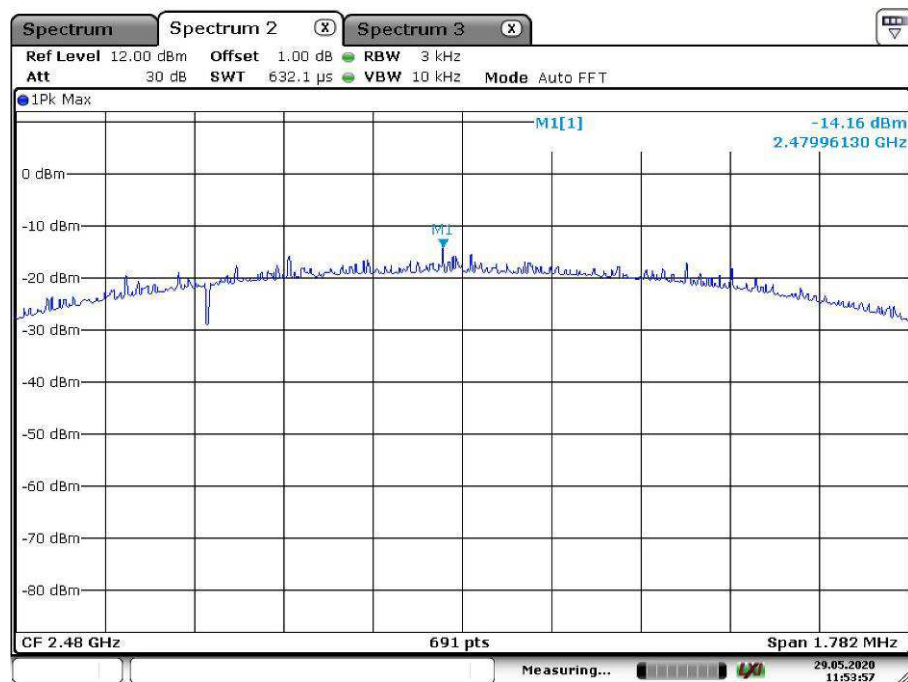

Date: 29.MAY.2020 11:53:57

Appendix C.2: Test Results of 6dB Bandwidth

GFSK(BLE) Mode, 1Mbps

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Minimum Emission Bandwidth 6 dB (2402 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	0.732674	0.500000	—	2401.623762	2402.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	4.2	PASS

6 dB Bandwidth

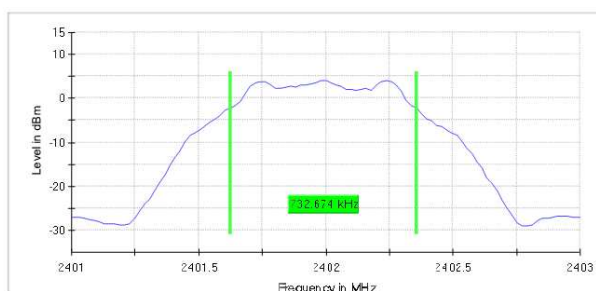

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.08 dB	0.50 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Minimum Emission Bandwidth 6 dB (2440 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	0.732674	0.500000	—	2439.623762	2440.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	3.6	PASS

6 dB Bandwidth

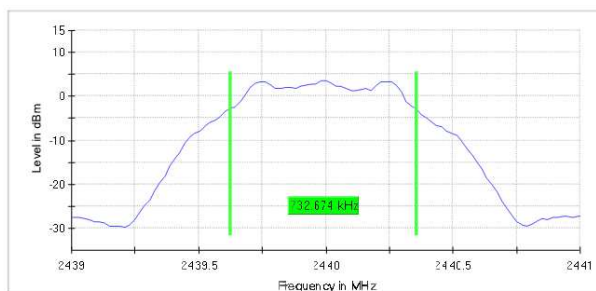

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.19 dB	0.50 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Minimum Emission Bandwidth 6 dB (2480 MHz; 10.000 dBm; 1 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	0.732674	0.500000	—	2479.623762	2480.356436

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	3.6	PASS

6 dB Bandwidth

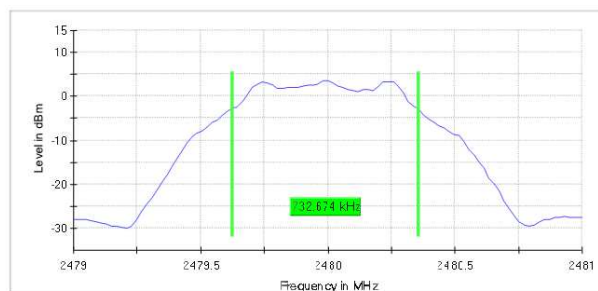

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.05 dB	0.50 dB

GFSK(BLE) Mode, 2Mbps

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Minimum Emission Bandwidth 6 dB (2402 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.188118	0.500000	—	2401.405941	2402.594059

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2402.000000	3.5	PASS

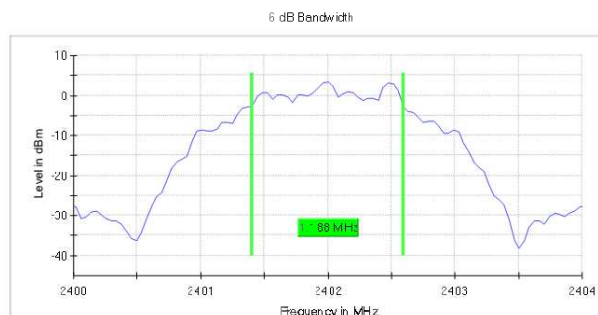

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	19 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Minimum Emission Bandwidth 6 dB (2440 MHz; 10.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.188118	0.500000	—	2439.405941	2440.594059

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2440.000000	3.6	PASS

6 dB Bandwidth

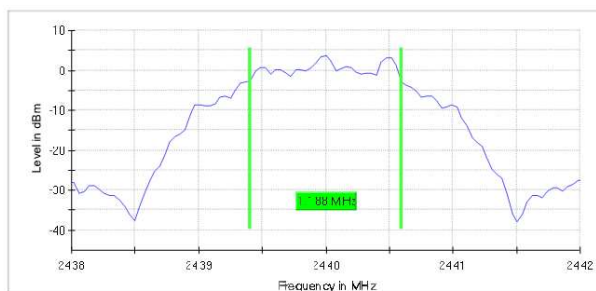

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.05 dB	0.50 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Minimum Emission Bandwidth 6 dB (2480 MHz; 10.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


6 dB Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.188118	0.500000	—	2479.405941	2480.594059

(continuation of the "6 dB Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Max Level (dBm)	Result
2480.000000	3.2	PASS

6 dB Bandwidth

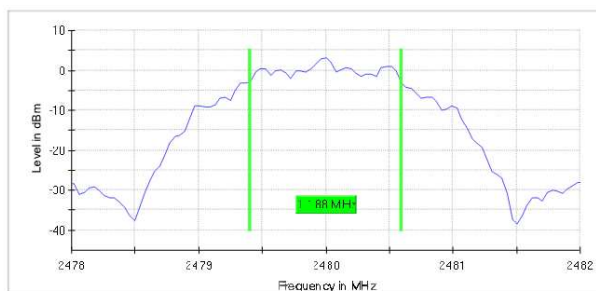

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 80
SweepTime	18.938 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.02 dB	0.50 dB

Appendix C.3: Test Results of 99% Bandwidth

GFSK(BLE) Mode, 1Mbps

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	1.035000	---	---	2401.487500	2402.522500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

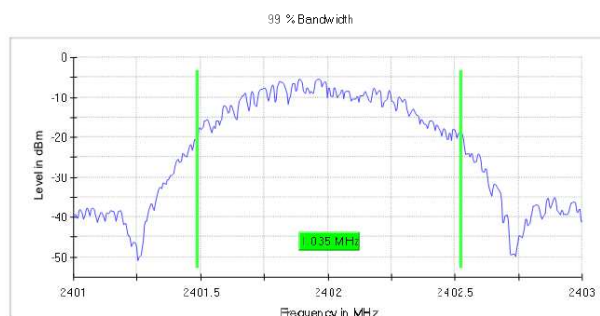

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.12 dB	0.30 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2440 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	1.035000	---	---	2439.487500	2440.522500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

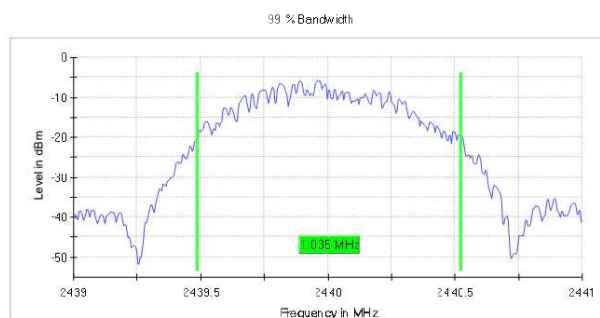

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.10 dB	0.30 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 1 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	1.035000	---	---	2479.487500	2480.522500

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

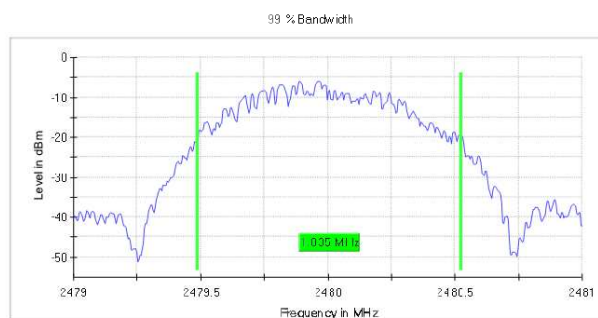

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
SweepTime	189.648 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.09 dB	0.30 dB

GFSK(BLE) Mode, 2Mbps

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2402 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2402.000000	2.060000	---	---	2400.975000	2403.035000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2402.000000	PASS

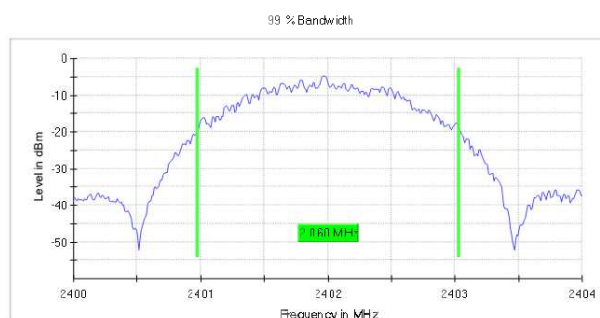

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.40400 GHz	2.40400 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.30 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2440 MHz; 10.000 dBm; 2 MHz)


Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013

99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2440.000000	2.070000	---	---	2438.965000	2441.035000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2440.000000	PASS

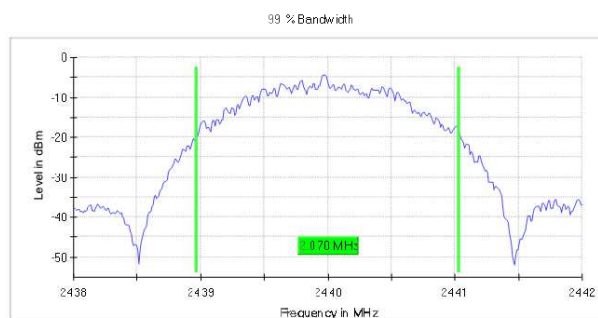

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.43800 GHz	2.43800 GHz
Stop Frequency	2.44200 GHz	2.44200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.30 dB

FCC Part 47 §15.247 2400-2483.5 MHz 2017

Occupied Channel Bandwidth 99% (2480 MHz; 10.000 dBm; 2 MHz)

Test according to FCC title 47 part 15 §15.247(a), KDB 558074 D01 DTS Meas Guidance v04 and ANSI C63.10-2013


99 % Bandwidth

DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2480.000000	2.070000	---	---	2478.965000	2481.035000

(continuation of the "99 % Bandwidth" table from column 6 ...)

DUT Frequency (MHz)	Result
2480.000000	PASS

99 % Bandwidth

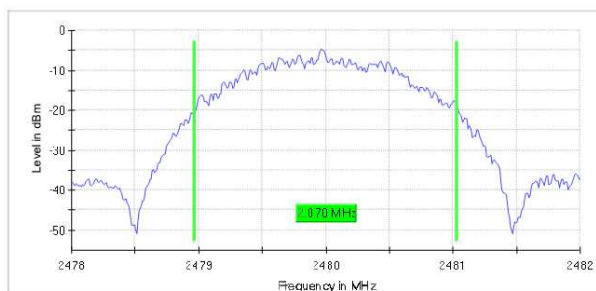


Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.47800 GHz	2.47800 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	4.000 MHz	4.000 MHz
RBW	20.000 kHz	>= 20.000 kHz
VBW	100.000 kHz	>= 60.000 kHz
SweepPoints	400	~ 400
SweepTime	94.824 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.30 dB


Appendix C.4: Test Results of Conducted Spurious Emissions

GFSK(BLE) Mode, 1Mbps

Low Channel

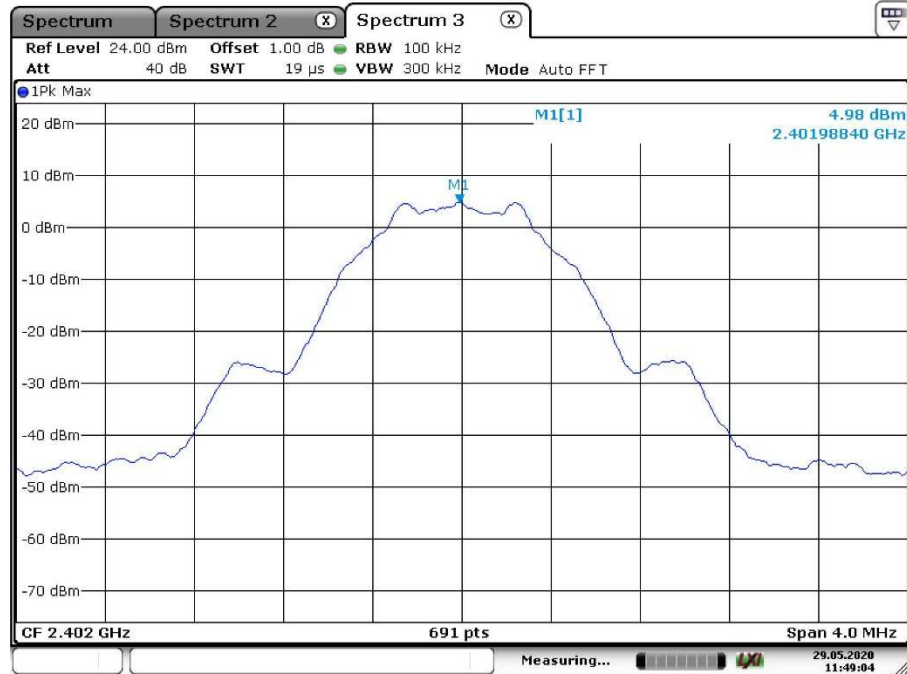


Date: 29.MAY.2020 11:49:05

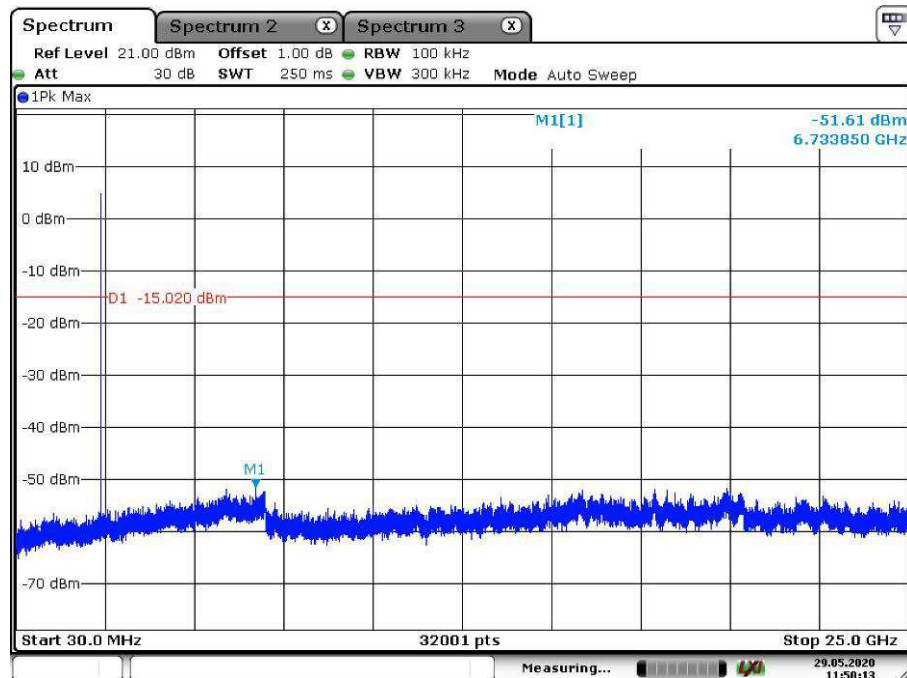


Date: 29.MAY.2020 11:50:13

Middle Channel

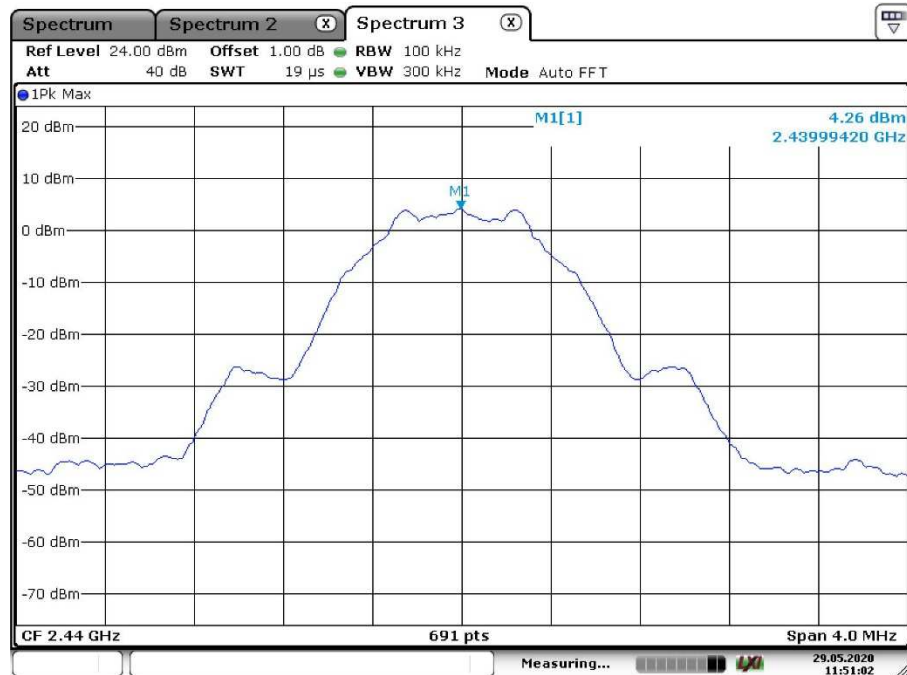


Date: 29.MAY.2020 11:51:02

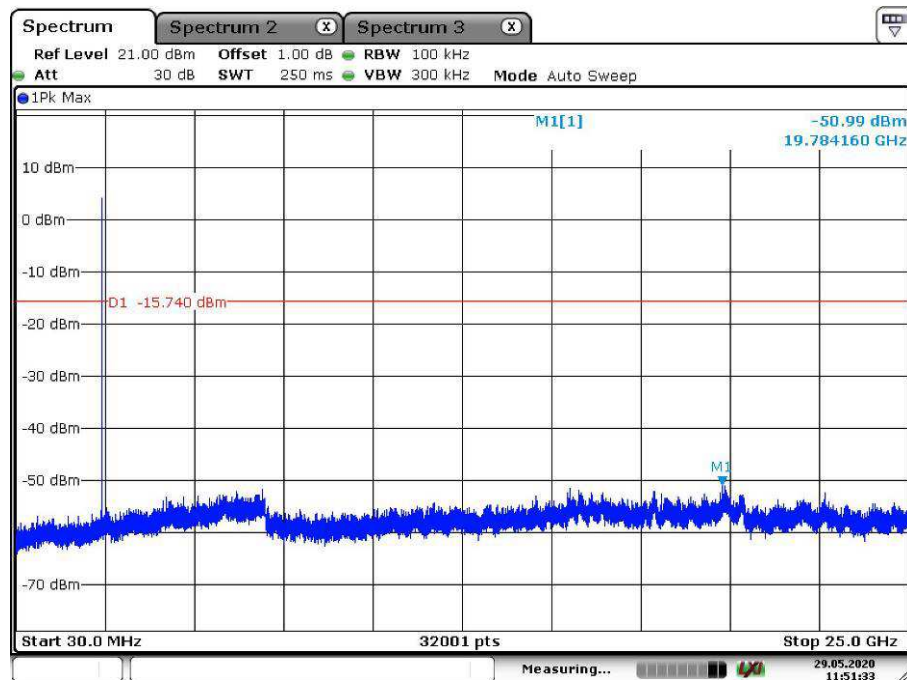


Date: 29.MAY.2020 11:51:33

High Channel

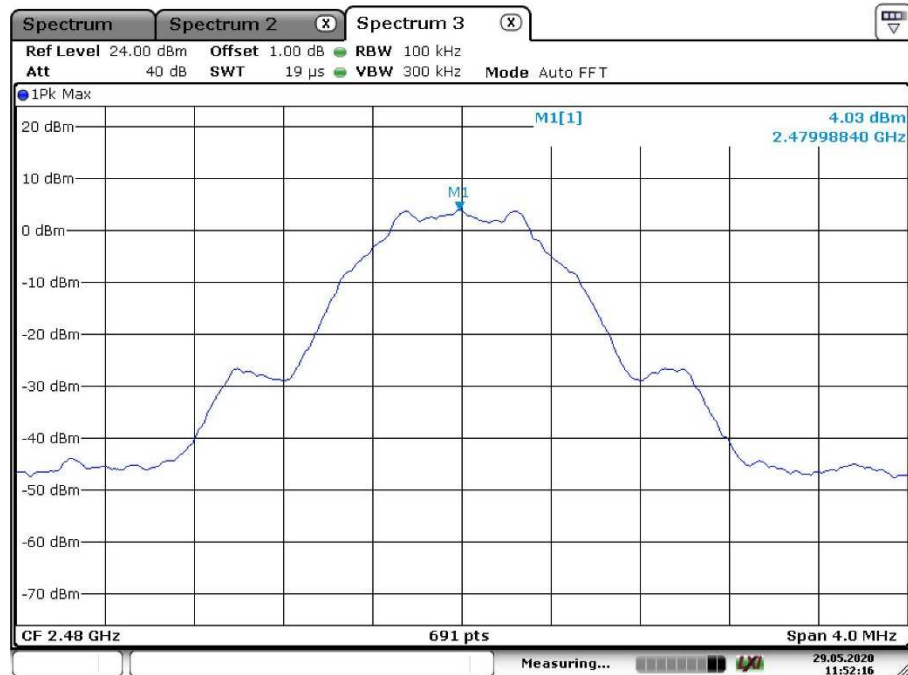


Date: 29.MAY.2020 11:52:16

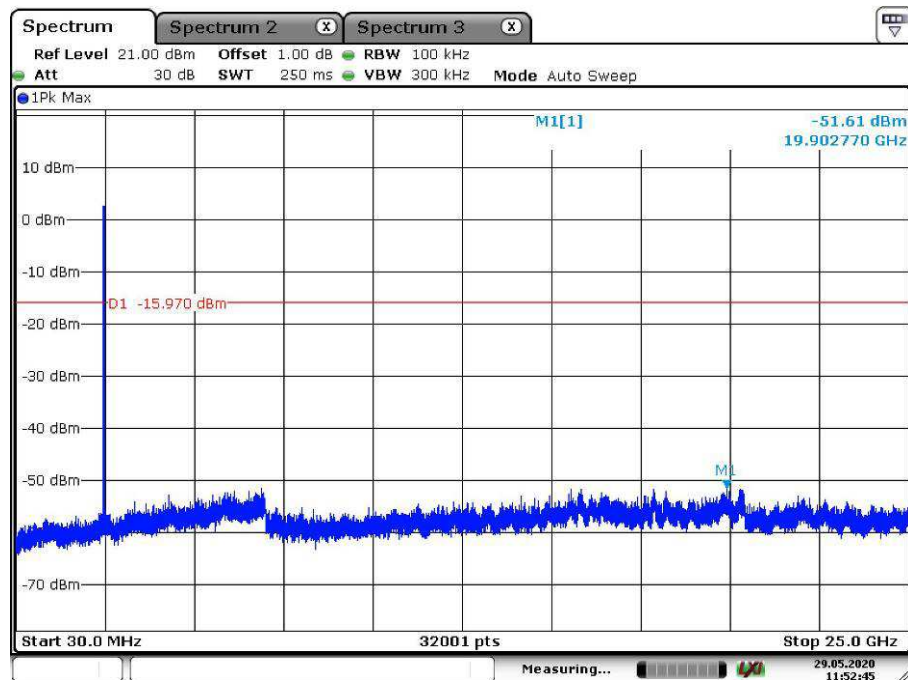


Date: 29.MAY.2020 11:52:45

Band Edge, Low Channel

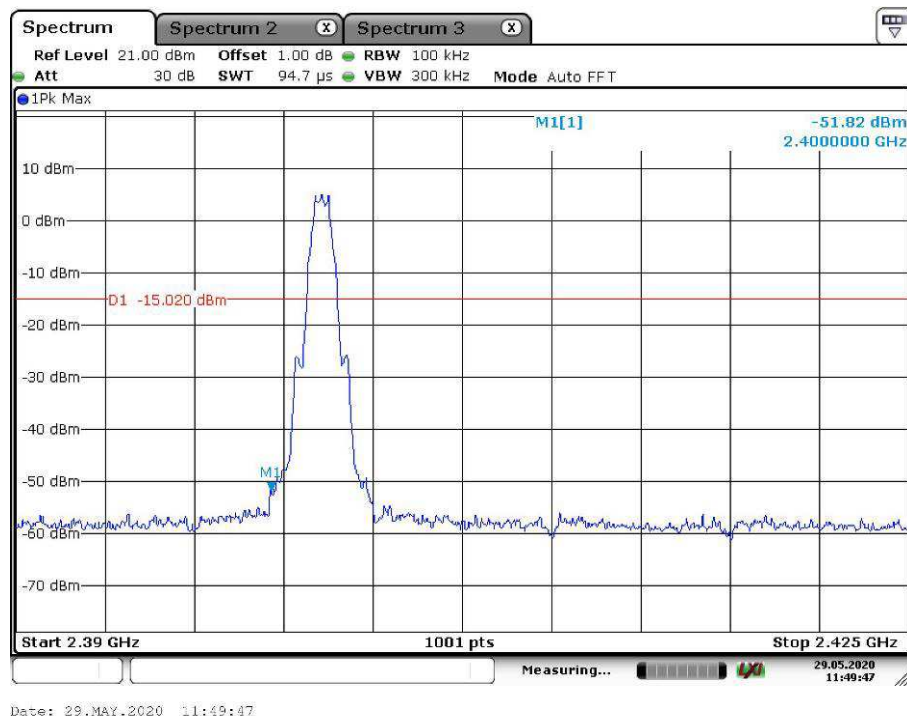


Band Edge, High Channel

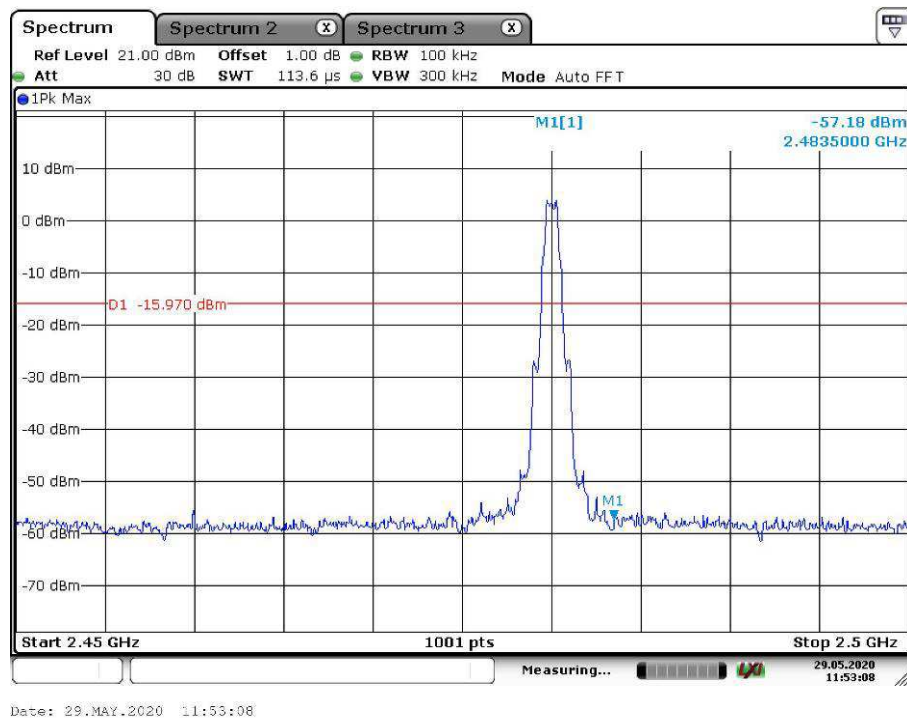


GFSK(BLE) Mode, 2Mbps

Low Channel

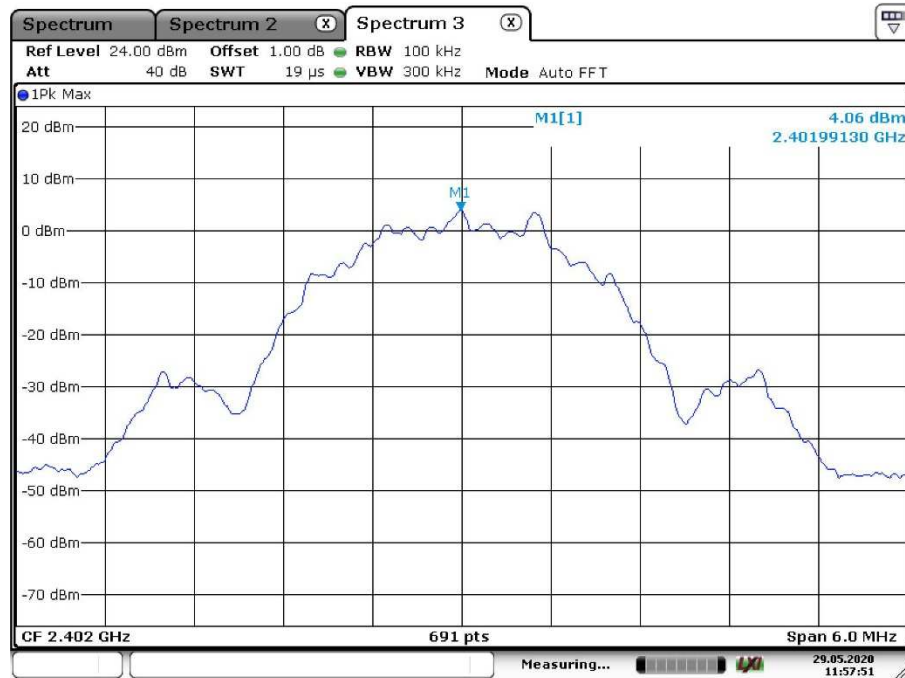


Date: 29.MAY.2020 11:57:51

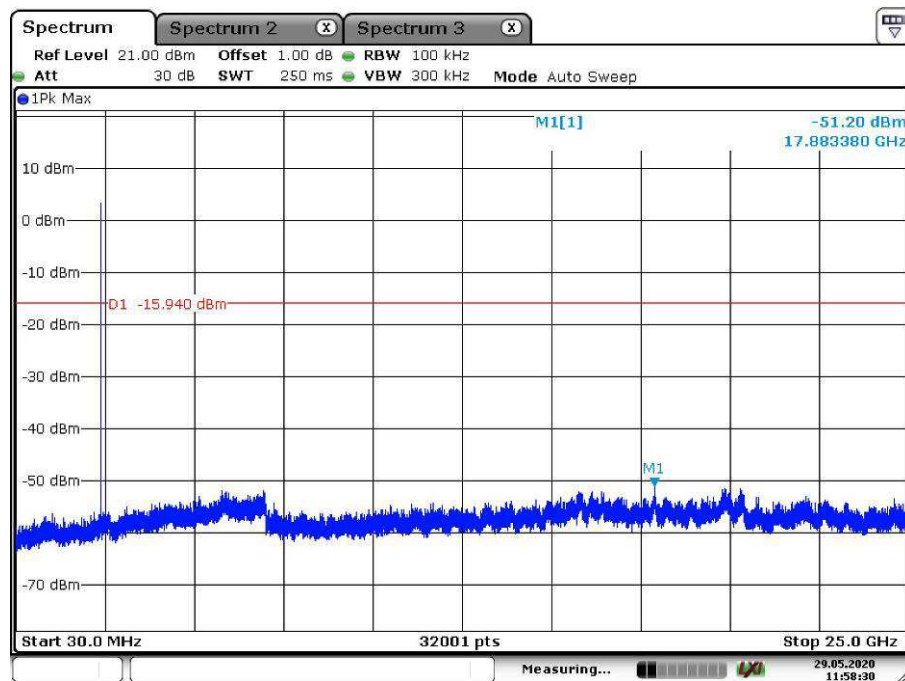


Date: 29.MAY.2020 11:58:30

Middle Channel

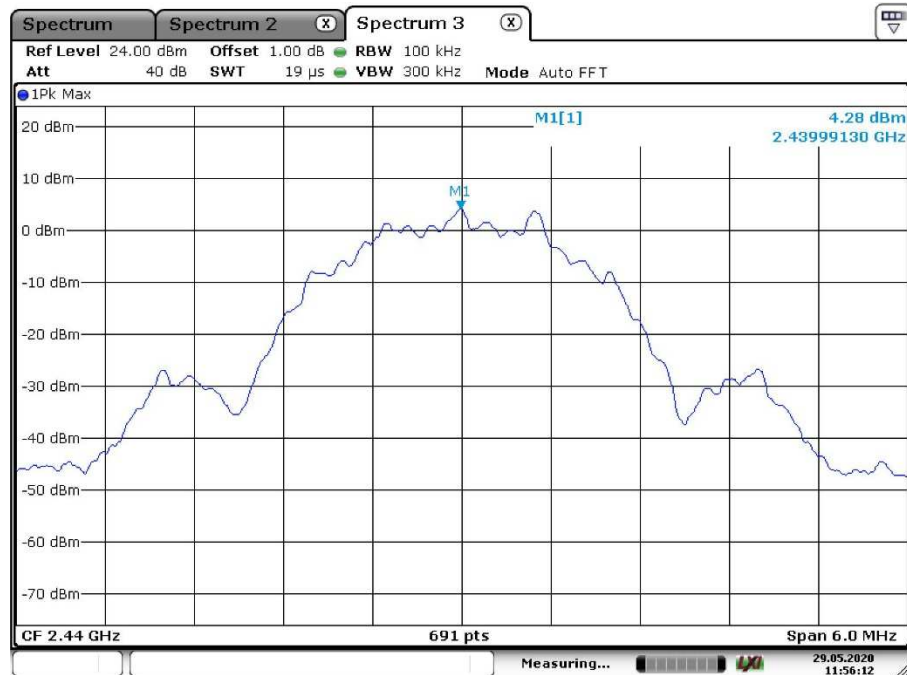


Date: 29.MAY.2020 11:56:12

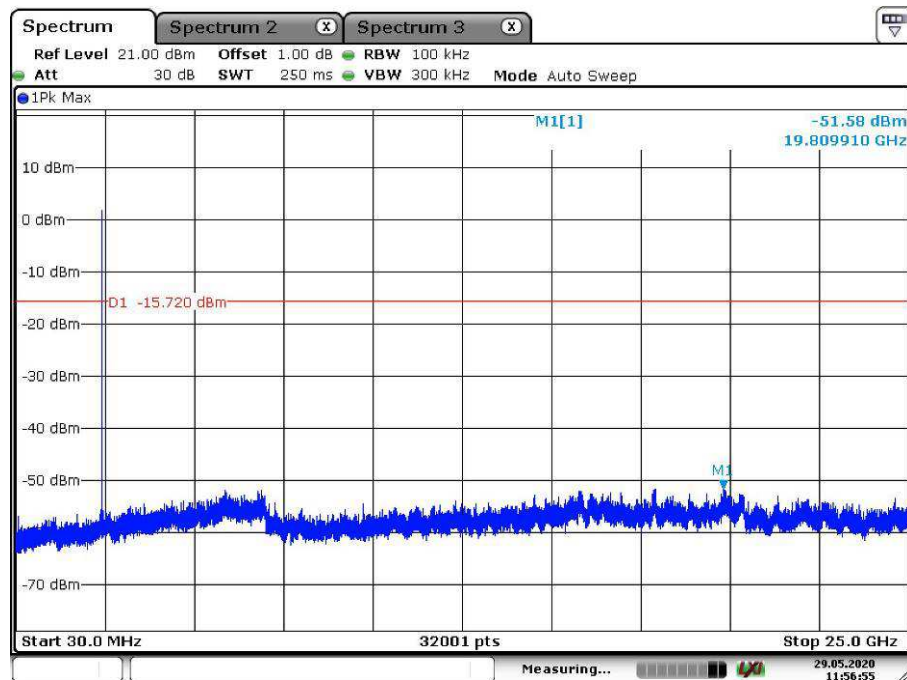


Date: 29.MAY.2020 11:56:55

High Channel

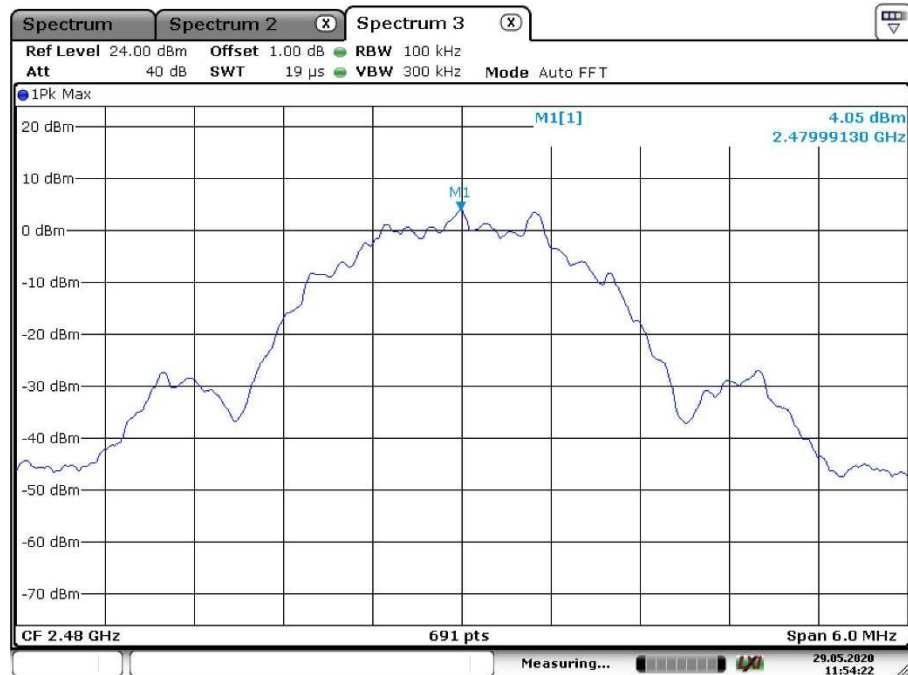


Date: 29.MAY.2020 11:54:23

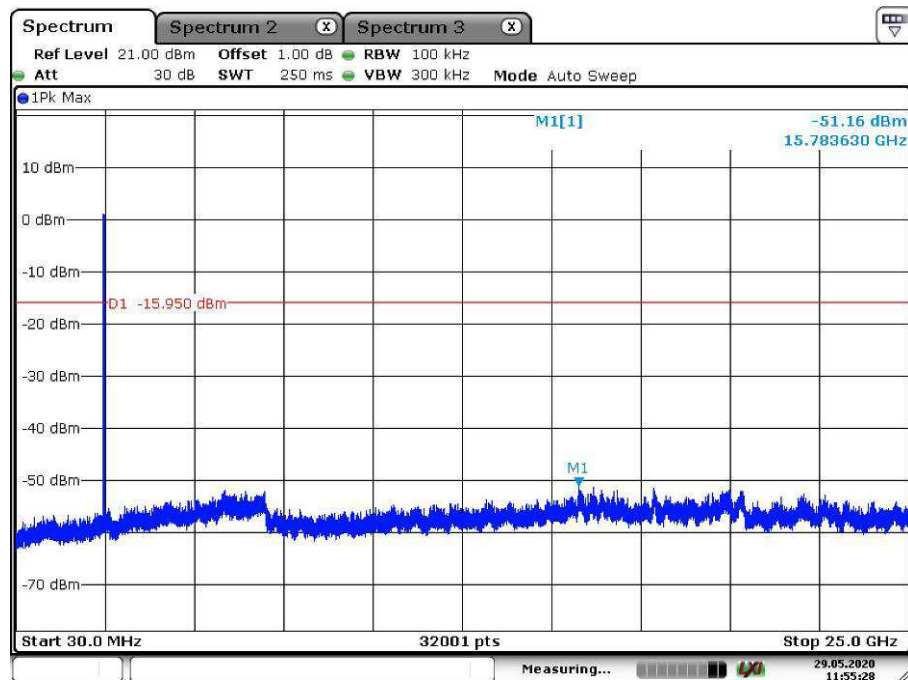


Date: 29.MAY.2020 11:55:29

Band Edge, Low Channel

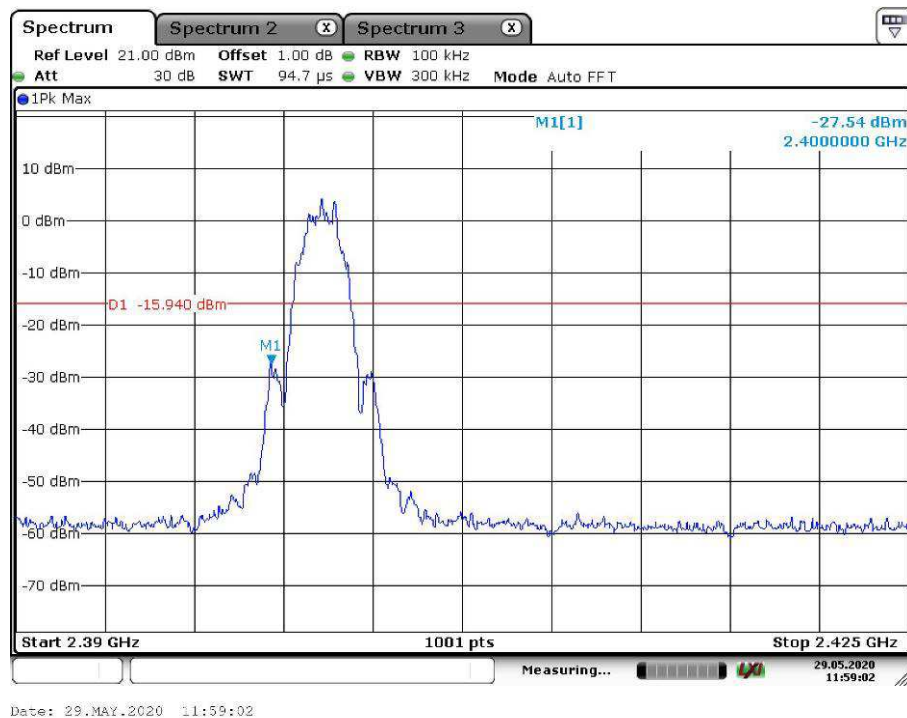

Band Edge, High Channel

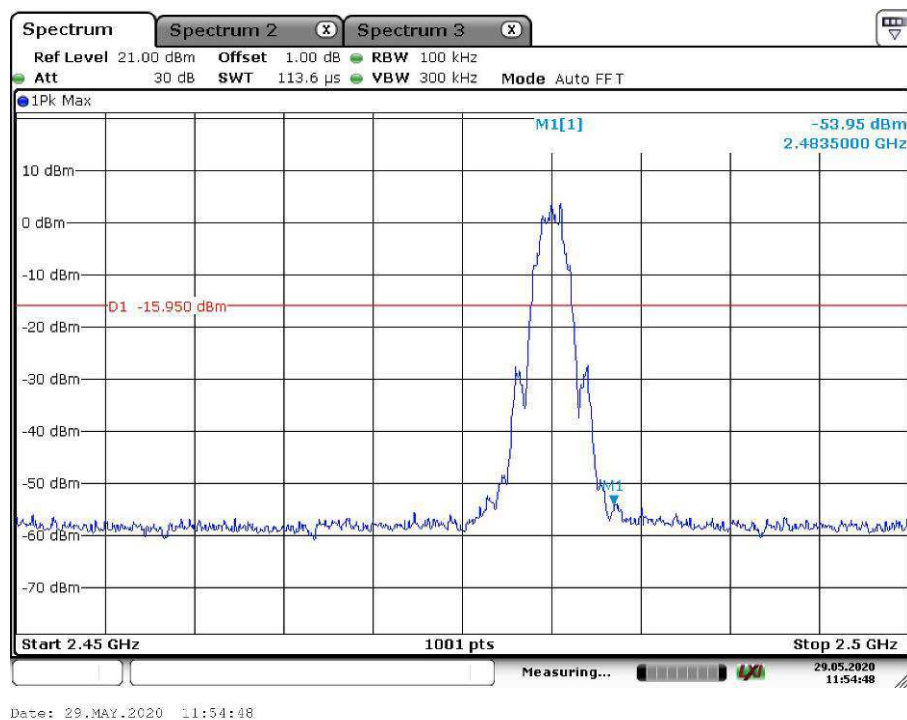

Appendix C.5: Test Results of Radiated Spurious Emissions

Note: This testing was carried out on different modulations, but only the worst case was presented in this report.

30 MHz to 1GHz


EMI Auto Test(1)

1 / 4

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
Test Mode:	BLE_1M_CH0
Test Voltage:	AC 120V@60Hz
Remark:	Temp 23 Humi:42%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

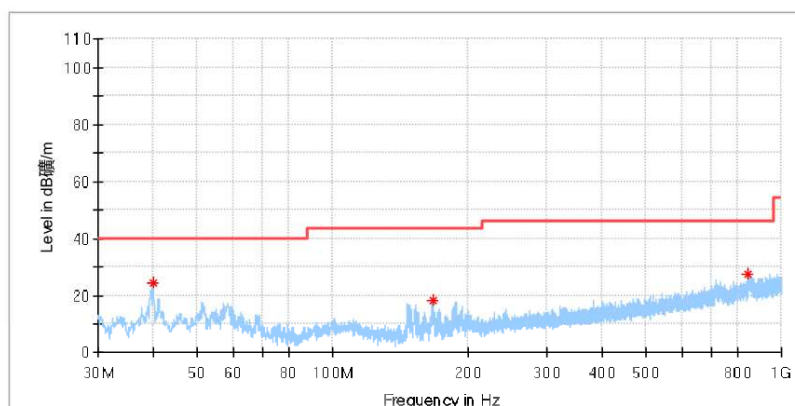

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
39.748500	24.65	---	40.00	15.35	100.0	H	353.0	-20.5
167.012500	18.20	---	43.50	25.30	100.0	H	318.0	-21.7
844.800000	27.74	---	46.00	18.26	100.0	H	289.0	-6.0


EMI Auto Test(1)

2 / 4

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
TestMode:	BLE_1M_CH0
Test Voltage::	AC 120V@60Hz
Remark:	Temp 23 Humi:42%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

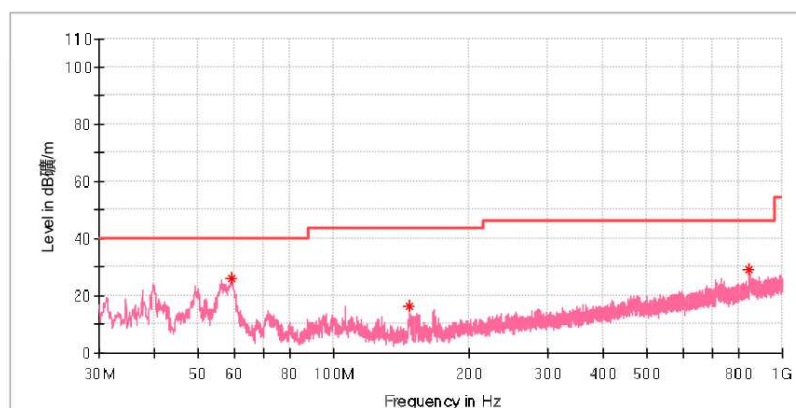

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
59.391000	26.00	---	40.00	14.00	100.0	V	76.0	-19.2
147.806500	16.55	---	43.50	26.95	100.0	V	333.0	-22.6
844.848500	29.18	---	46.00	16.82	100.0	V	23.0	-6.0

2/7/2020

5:05:08 PM


EMI Auto Test(1)

3 / 4

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
TestMode:	BLE_1M_CH39
Test Voltage::	AC 120V@60Hz
Remark:	Temp 23 Humi:42%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

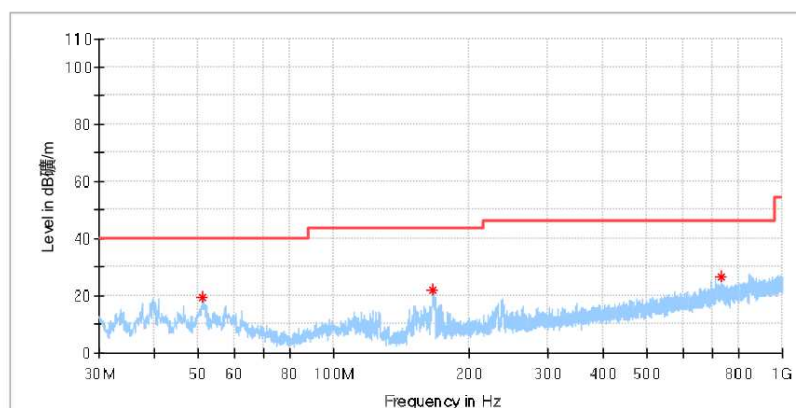

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.952000	19.49	---	40.00	20.51	100.0	H	65.0	-18.6
166.576000	22.13	---	43.50	21.37	100.0	H	305.0	-21.7
728.594000	26.63	---	46.00	19.37	100.0	H	268.0	-7.9

2/7/2020

5:05:08 PM


EMI Auto Test(1)

4 / 4

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
TestMode:	BLE_1M_CH39
Test Voltage::	AC 120V@60Hz
Remark:	Temp 23 Humi:42%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

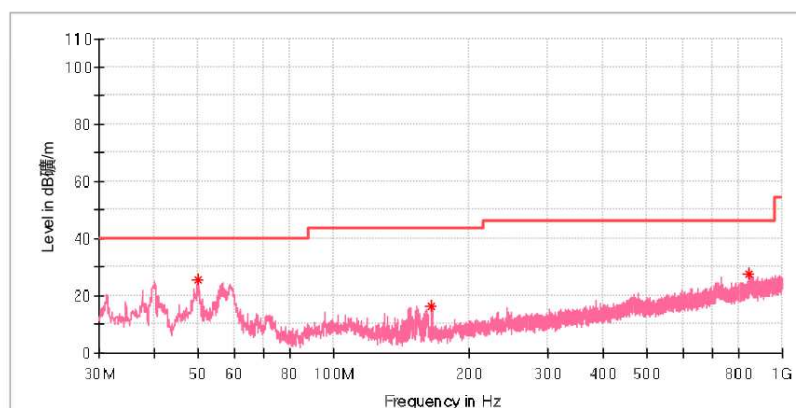

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
49.982000	25.67	---	40.00	14.33	100.0	V	318.0	-18.6
165.606000	16.48	---	43.50	27.02	100.0	V	58.0	-21.8
844.800000	27.80	---	46.00	18.20	100.0	V	296.0	-6.0

2/7/2020

5:05:08 PM

Above 1GHz

Note: The highest waveform in the figure is Bluetooth Fundamental.


EMI Auto Test(1)

1 / 12

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
TestMode:	BLE_1M_CH0
TestVoltage::	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
TestStandard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

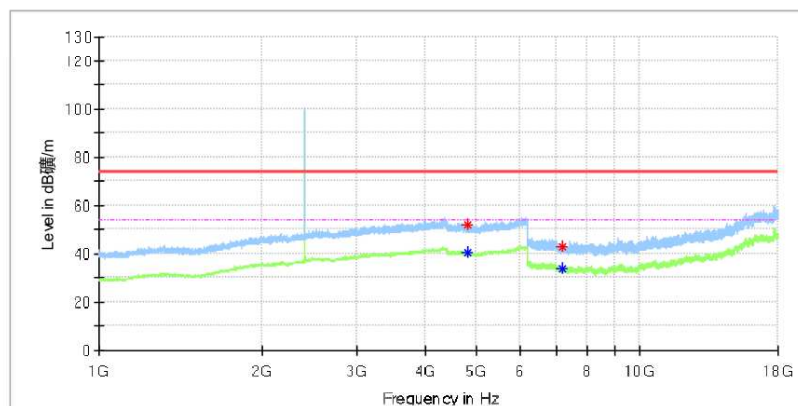

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4808.500000	52.29	---	74.00	21.71	100.0	H	18.0	13.6
4812.000000	---	40.55	54.00	13.45	100.0	H	158.0	13.6
7203.000000	43.11	---	74.00	30.89	100.0	H	301.0	8.8
7209.391667	---	34.12	54.00	19.88	100.0	H	232.0	8.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---


EMI Auto Test(1)

2 / 12

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
Test Mode: BLE_1M_CH0
Test Voltage: AC 120V@60Hz
Remark: Temp 24 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

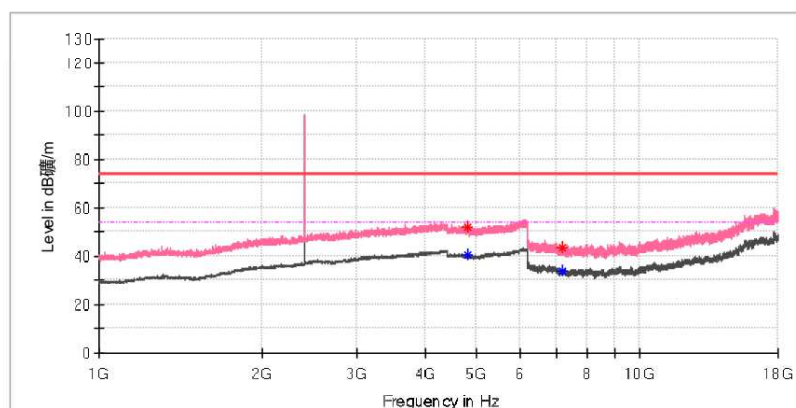

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4804.000000	51.84	---	74.00	22.16	100.0	V	302.0	13.6
4804.500000	---	40.52	54.00	13.48	100.0	V	40.0	13.6
7206.441667	43.59	---	74.00	30.41	100.0	V	96.0	8.8
7206.933333	---	33.89	54.00	20.11	100.0	V	9.0	8.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

4:50:46 PM


EMI Auto Test(1)

3 / 12

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
Test Mode: BLE_1M_CH19
Test Voltage: AC 120V@60Hz
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

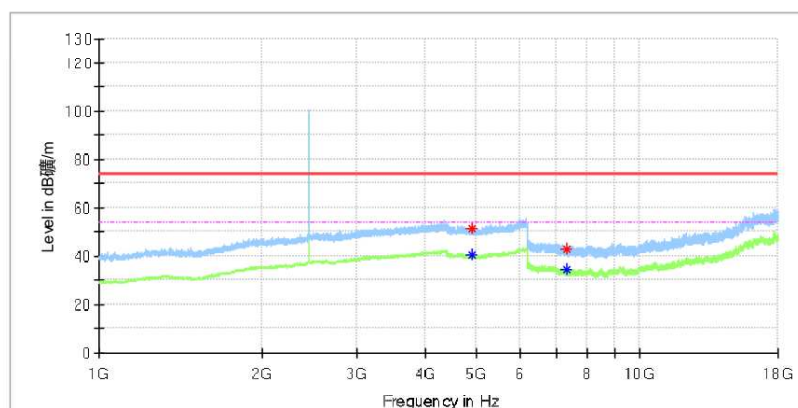

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4898.000000	51.58	---	74.00	22.42	100.0	H	32.0	13.3
4900.500000	---	40.51	54.00	13.49	100.0	H	22.0	13.3
7313.133333	---	34.26	54.00	19.74	100.0	H	323.0	8.2
7338.208333	42.93	---	74.00	31.07	100.0	H	270.0	8.1

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

4:50:46 PM


EMI Auto Test(1)

4 / 12

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
Test Mode: BLE_1M_19
Test Voltage: AC 120V@60Hz
Remark: Temp 22 Humi:50%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

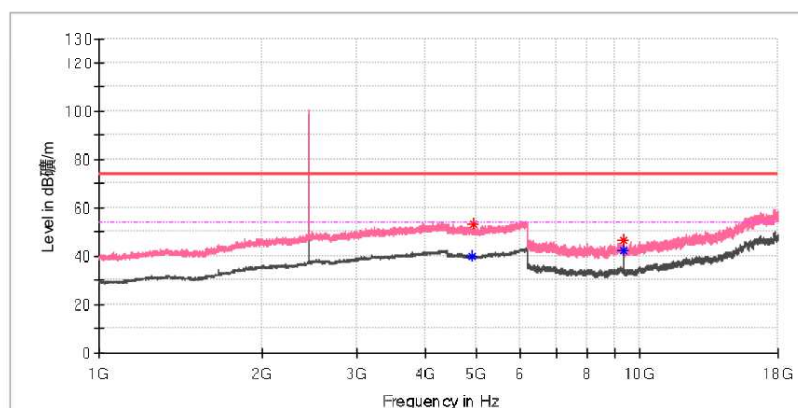

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4898.000000	---	40.19	54.00	13.81	100.0	V	297.0	13.3
4917.500000	53.07	---	74.00	20.93	100.0	V	172.0	13.3
9320.116667	46.52	---	74.00	27.48	100.0	V	0.0	10.0
9320.116667	---	42.48	54.00	11.52	100.0	V	0.0	10.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

4:50:46 PM


EMI Auto Test(1)

5 / 12

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
Test Mode: BLE_1M_CH39
Test Voltage: AC 120V@60Hz
Remark: Temp 24 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

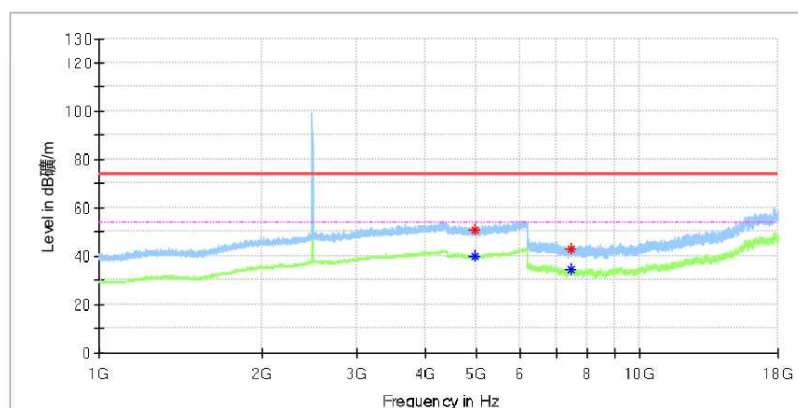

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4956.500000	---	40.21	54.00	13.79	100.0	H	185.0	13.2
4961.000000	50.89	---	74.00	23.11	100.0	H	12.0	13.2
7442.933333	---	34.37	54.00	19.63	100.0	H	82.0	8.4
7442.933333	42.77	---	74.00	31.23	100.0	H	82.0	8.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

4:50:46 PM


EMI Auto Test(1)

6 / 12

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
Test Mode: BLE_1M_CH39
Test Voltage: AC 120V@60Hz
Remark: Temp 24 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

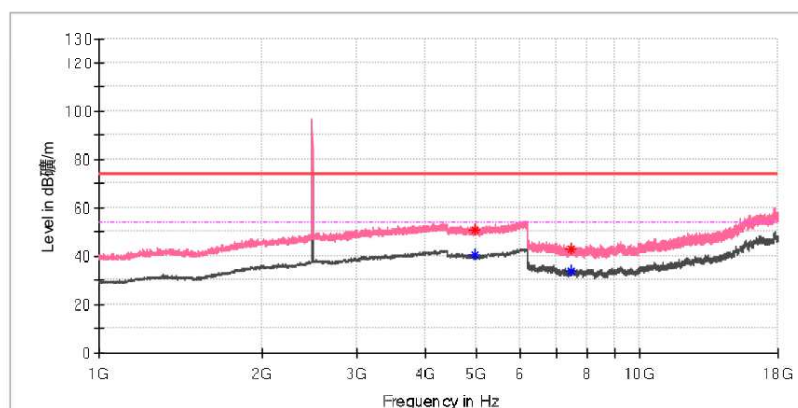

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4958.000000	---	40.36	54.00	13.64	100.0	V	226.0	13.2
4960.500000	50.81	---	74.00	23.19	100.0	V	304.0	13.2
7438.016667	---	33.79	54.00	20.21	100.0	V	257.0	8.4
7441.458333	43.17	---	74.00	30.83	100.0	V	114.0	8.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

4:50:46 PM


EMI Auto Test(1)

7 / 12

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
Test Mode: BLE_2M_CH0
Test Voltage: AC 120V@60Hz
Remark: Temp 24 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

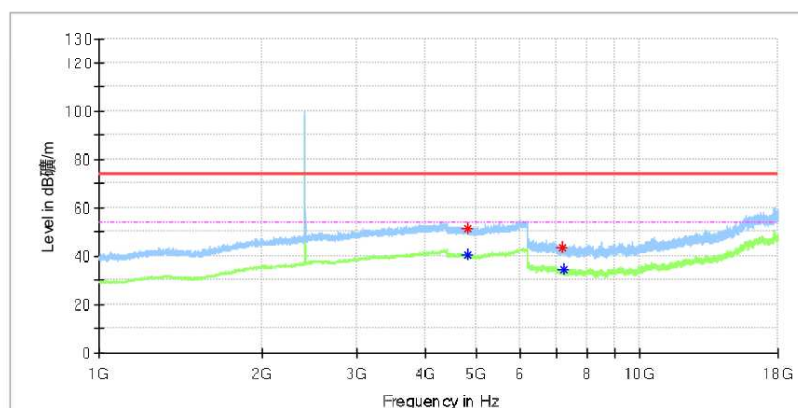

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4802.500000	---	40.73	54.00	13.27	100.0	H	238.0	13.6
4804.500000	51.61	---	74.00	22.39	100.0	H	58.0	13.6
7204.966667	43.32	---	74.00	30.68	100.0	H	250.0	8.8
7210.375000	---	34.22	54.00	19.78	100.0	H	317.0	8.7

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

4:50:46 PM


EMI Auto Test(1)

8 / 12

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
Test Mode: BLE_2M_CH0
Test Voltage: AC 120V@60Hz
Remark: Temp 24 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

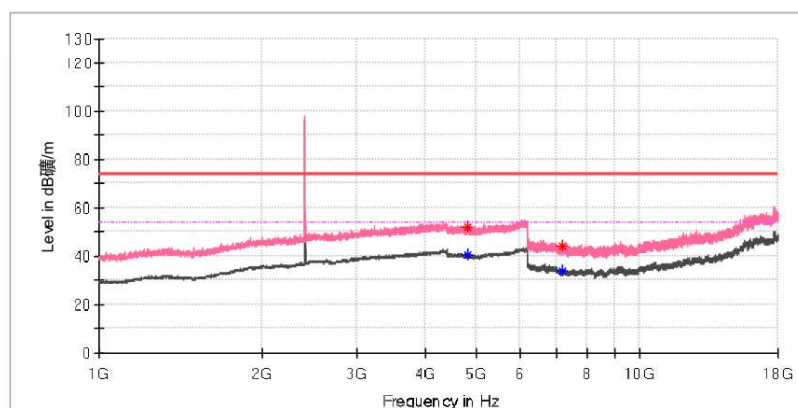

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4805.500000	---	40.41	54.00	13.59	100.0	V	230.0	13.6
4805.500000	51.94	---	74.00	22.06	100.0	V	230.0	13.6
7207.425000	44.02	---	74.00	29.98	100.0	V	27.0	8.8
7207.916667	---	34.13	54.00	19.87	100.0	V	11.0	8.8

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

4:50:46 PM


EMI Auto Test(1)

9 / 12

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
Test Mode: BLE_2M_CH19
Test Voltage: AC 120V@60Hz
Remark: Temp 24 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

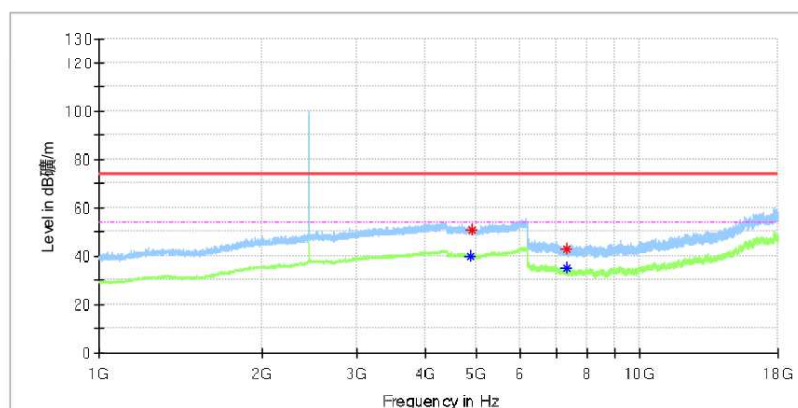

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4875.000000	---	40.13	54.00	13.87	100.0	H	1.0	13.4
4882.000000	50.51	---	74.00	23.49	100.0	H	33.0	13.4
7313.133333	---	35.13	54.00	18.87	100.0	H	80.0	8.2
7328.375000	43.23	---	74.00	30.77	100.0	H	187.0	8.1

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

4:50:46 PM


EMI Auto Test(1)

10 / 12

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
Test Mode: BLE_2M_CH19
Test Voltage: AC 120V@60Hz
Remark: Temp 24 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

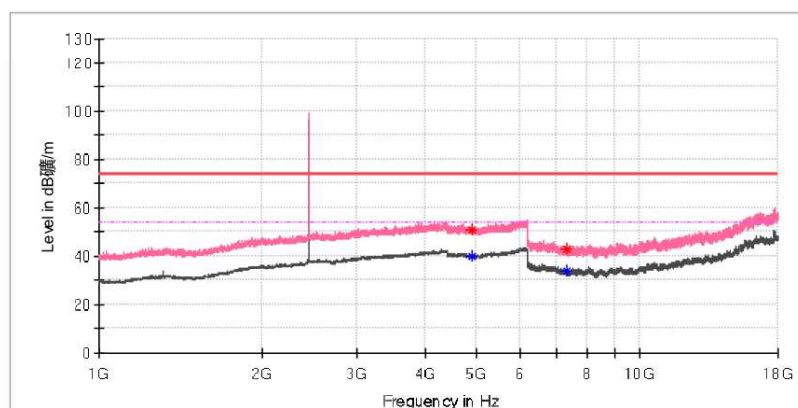

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4879.000000	50.99	---	74.00	23.01	100.0	V	216.0	13.4
4884.500000	---	40.17	54.00	13.83	100.0	V	166.0	13.4
7320.016667	---	33.82	54.00	20.18	100.0	V	78.0	8.2
7320.016667	43.21	---	74.00	30.79	100.0	V	78.0	8.2

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

4:50:46 PM


EMI Auto Test(1)

11 / 12

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
Test Mode: BLE_2M_CH39
Test Voltage: AC 120V@60Hz
Remark: Temp 24 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

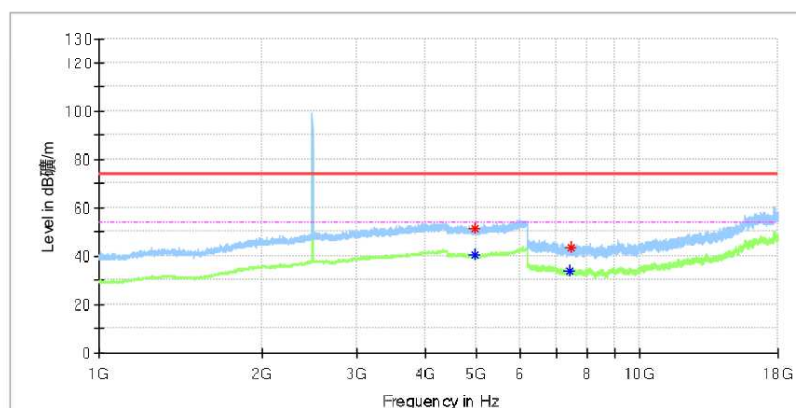

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4958.000000	---	40.39	54.00	13.61	100.0	H	1.0	13.2
4958.000000	51.17	---	74.00	22.83	100.0	H	1.0	13.2
7436.541667	---	33.65	54.00	20.35	100.0	H	99.0	8.4
7438.508333	43.66	---	74.00	30.34	100.0	H	348.0	8.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

4:50:46 PM


EMI Auto Test(1)

12 / 12

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
Test Mode: BLE_2M_CH39
Test Voltage: AC 120V@60Hz
Remark: Temp 24 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

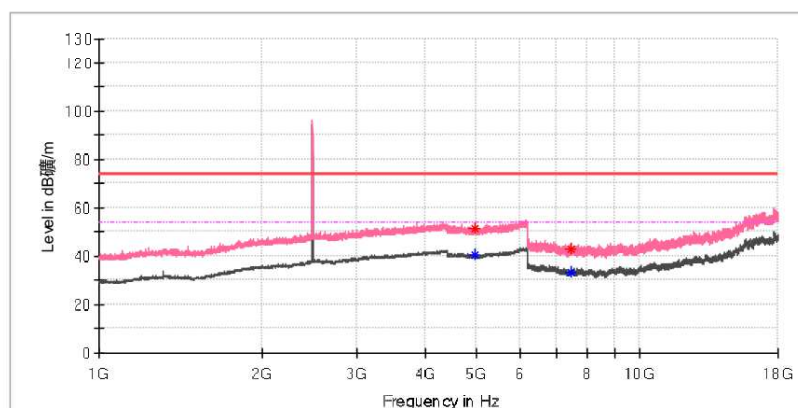

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4962.500000	---	40.45	54.00	13.55	100.0	V	229.0	13.2
4963.000000	51.67	---	74.00	22.33	100.0	V	39.0	13.2
7442.441667	42.98	---	74.00	31.02	100.0	V	241.0	8.4
7444.900000	---	33.47	54.00	20.53	100.0	V	241.0	8.5

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

4:50:46 PM

Appendix C.6: Test Results of Radiated Emissions in Restricted Bands


EMI Auto Test(1)

1 / 8

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
Test Mode:	BLE_1M_CH0
Test Voltage::	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

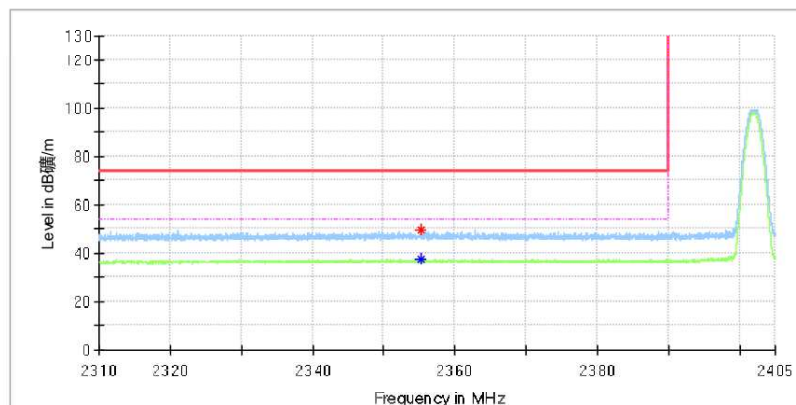

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2355.306618	49.29	---	74.00	24.71	100.0	H	13.0	6.9
2355.320588	---	37.45	54.00	16.55	100.0	H	23.0	6.9

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---


EMI Auto Test(1)

2 / 8

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
TestMode:	BLE_1M_CH0
Test Voltage::	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

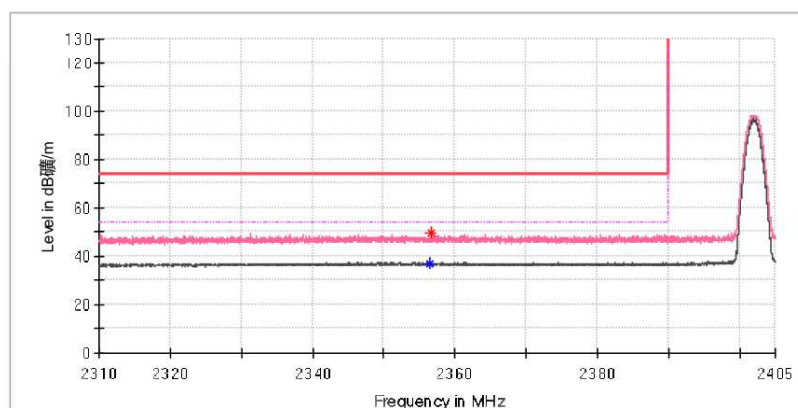

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2356.563971	---	37.13	54.00	16.87	100.0	V	0.0	6.9
2356.703677	49.50	---	74.00	24.50	100.0	V	63.0	6.9

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

5:08:51 PM


EMI Auto Test(1)

3 / 8

Test Report

EUT Information

EUT Name: Digital media receiver
Model: B7W644
TestMode: BLE_1M_CH39
Test Voltage: AC 120V@60Hz
Remark: Temp 24 Humi:45%
Test Standard: FCC 15.247
Tested By: Kei Zhang
Reviewed By: Terry Yin

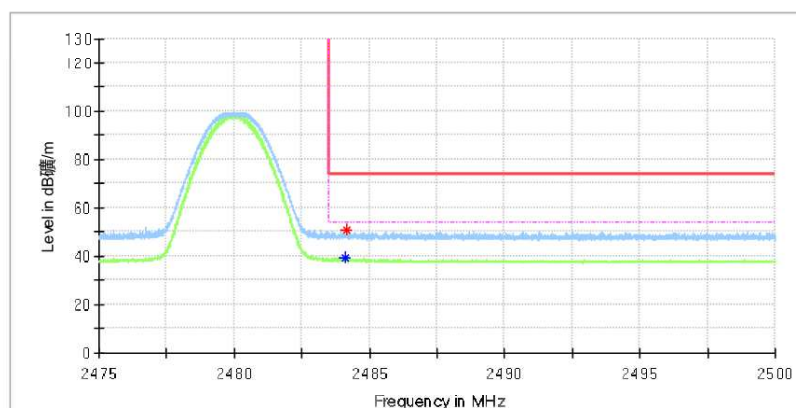

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2484.088235	---	39.32	54.00	14.68	100.0	H	143.0	7.4
2484.147059	50.57	---	74.00	23.43	100.0	H	143.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---

29/5/2020

5:08:51 PM


EMI Auto Test(1)

4 / 8

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
TestMode:	BLE_1M_CH39
Test Voltage::	AC 120V@60Hz
Remark:	Temp 24 Humi:45%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

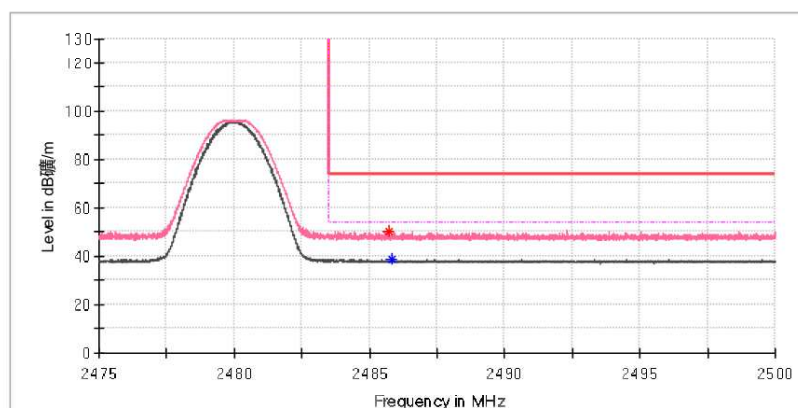

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2485.731618	50.44	---	74.00	23.56	100.0	V	257.0	7.4
2485.838235	---	38.57	54.00	15.43	100.0	V	173.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

5:08:51 PM


EMI Auto Test(1)

5 / 8

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
TestMode:	BLE_2M_CH0
Test Voltage::	AC 120V@60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

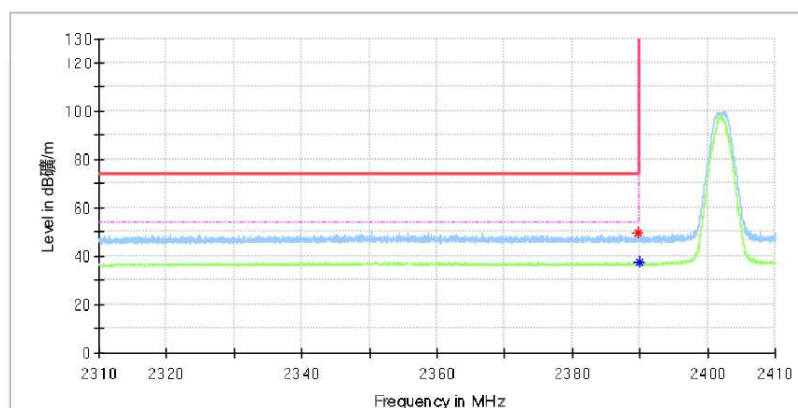

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.750000	49.46	---	74.00	24.54	100.0	H	92.0	7.0
2389.882353	---	37.21	54.00	16.79	100.0	H	137.0	7.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---

29/5/2020

5:08:51 PM


EMI Auto Test(1)

6 / 8

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
TestMode:	BLE_2M_CH0
Test Voltage::	AC 120V@60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

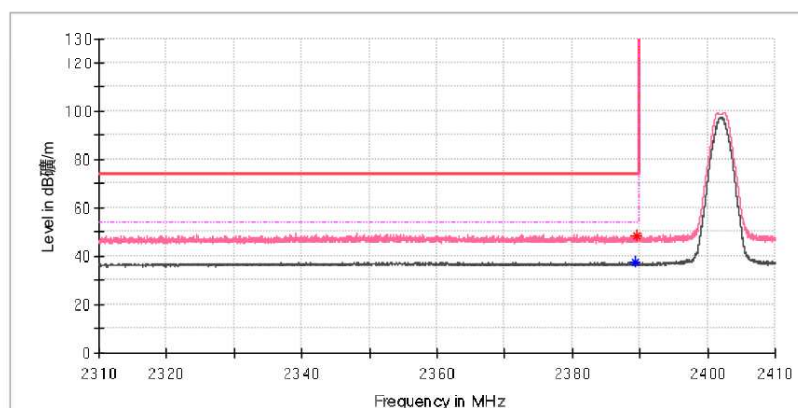

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2389.338235	---	37.22	54.00	16.78	100.0	V	185.0	7.0
2389.529412	48.42	---	74.00	25.58	100.0	V	195.0	7.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

5:08:51 PM


EMI Auto Test(1)

7 / 8

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
TestMode:	BLE_2M_CH39
Test Voltage::	AC 120V@60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

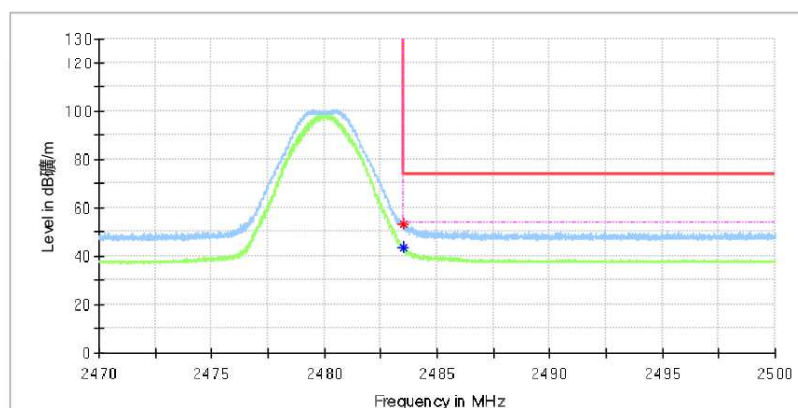

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.500000	53.17	---	74.00	20.83	100.0	H	124.0	7.4
2483.504412	---	43.66	54.00	10.34	100.0	H	124.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---	---

29/5/2020

5:08:51 PM


EMI Auto Test(1)

8 / 8

Test Report

EUT Information

EUT Name:	Digital media receiver
Model:	B7W644
TestMode:	BLE_2M_CH 39
Test Voltage::	AC 120V@60Hz
Remark:	Temp 22 Humi:50%
Test Standard:	FCC 15.247
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

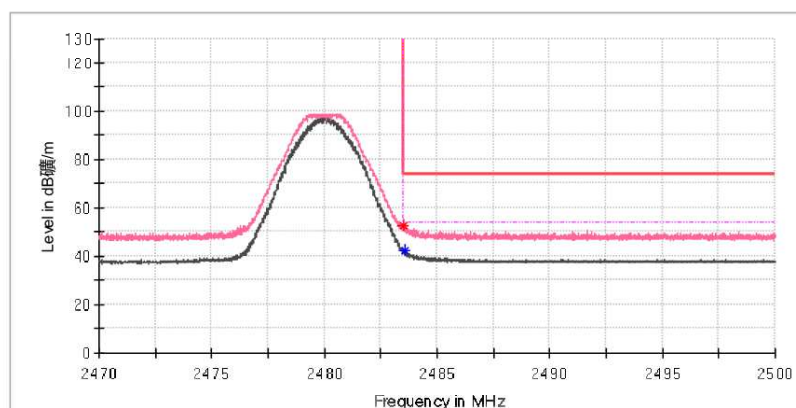

Critical Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2483.513235	52.34	---	74.00	21.66	100.0	V	133.0	7.4
2483.557353	---	42.34	54.00	11.66	100.0	V	123.0	7.4

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---	---	---	---

29/5/2020

5:08:51 PM