



TEST REPORT

APPLICANT : Great Talent Technology Limited
PRODUCT NAME : Smart phone
MODEL NAME : freedom turbo XL
BRAND NAME : Schok
STANDARD(S) : 47 CFR Part 15 Subpart B
FCC ID : 2ALZM-TURBOXL
RECEIPT DATE : 2020-06-28
TEST DATE : 2020-07-01 to 2020-07-02
ISSUE DATE : 2020-10-14

Edited by:

He Sinuo

He Sinuo(Rapporteur)

Approved by:

Xiao Xiong

Xiao Xiong(Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

1. Technical Information.....	3
1.1. Applicant and Manufacturer Information.....	3
1.2. Equipment Under Test (EUT) Description	3
2. Test Results	6
2.1. Applied Reference Documents	6
2.2. EUT Setup and Operating Conditions.....	7
3. 47 CFR Part 15B Requirements	8
3.1. Conducted Emission	8
3.2. Radiated Emission.....	12
Annex A Test Uncertainty	19
Annex B Testing Laboratory Information.....	20

Change History		
Version	Date	Reason for Change
1.0	2020-10-14	First edition



1. Technical Information

Note: Provide by applicant

1.1. Applicant and Manufacturer Information

Applicant:	Great Talent Technology Limited
Applicant Address:	RM602,T3 Software Park,Nanshan,Shenzhen,China
Manufacturer:	Unimaxcomm
Manufacturer Address:	Floor 35th, HBC Huilong Centre 2nd Phase office building, Minzhi Street, Longhua District, Shenzhen, P.R. China 518057

1.2. Equipment Under Test (EUT) Description

Product Name:	Smart phone
Serial No.:	(N/A, marked #1 by test site)
Hardware Version:	V10_0506
Software Version:	Q6501_SFT656128_V1.0.29-userdebug
Tx Frequency:	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz Bluetooth 5.0: 2402 MHz ~ 2480 MHz 802.11b/g/n: 2412 MHz ~ 2472 MHz 802.11a/ac/n: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5700 MHz; 5745MHz ~ 5825 MHz NFC: 13.56 MHz.



Rx Frequency:	GSM850: 869 MHz ~ 894 MHz GSM1900: 1930 MHz ~ 1990 MHz WCDMA Band II: 1930 MHz ~ 1990 MHz WCDMA Band V: 869 MHz ~ 894 MHz WCDMA Band IV: 2110 MHz ~ 2155 MHz LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 5: 869 MHz ~ 894 MHz LTE Band 12: 729 MHz ~ 746 MHz LTE Band 13: 746 MHz ~ 756 MHz LTE Band 17: 734 MHz ~ 746 MHz LTE Band 25: 1930 MHz ~ 1995 MHz LTE Band 26: 859 MHz ~ 894 MHz LTE Band 30: 2350 MHz ~ 2360 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 2110 MHz ~ 2200 MHz LTE Band 71: 617 MHz ~ 652 MHz Bluetooth 5.0: 2402 MHz ~ 2480 MHz 802.11b/g/n: 2412 MHz ~ 2472 MHz GPS/BDS/ Galileo/GLONASS: 1559 MHz ~ 1610 MHz FM: 87.5 MHz ~ 108 MHz Wireless Power Consortium: 110 KHz ~ 205 KHz
Ancillary Equipment:	Battery Brand Name: Milai Model No.: 426684P4000 Serial No.: (N/A, marked #1 by test site) Capacity: 4000mAh Rated Voltage: 3.85V Charge Limit: 4.4V Manufacturer: DONGGUAN MILLET ELECTRONIC CO.LTD AC Adapter Brand Name: Schok Model No.: BLJ-QC06HU Serial No.: (N/A, marked #1 by test site) Rated Input: 100-240V ~ 50/60Hz 0.5A Rated Output: 5/9/12V--3/2/1.5A Manufacturer: ZhongShan Baolijin Electronic Co., Ltd

Note:**MORLAB**SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. ChinaTel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.cn E-mail: service@morlab.cn



REPORT No.: SZ20060303E01

1. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer

MORLAB

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.
FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
[Http://www.morlab.cn](http://www.morlab.cn) E-mail: service@morlab.cn



2. Test Results

2.1. Applied Reference Documents

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method Determination Remark
1	15.107	Conducted Emission	2020.07.02	Huang Zhiye	PASS	No deviation
2	15.109	Radiated Emission	2020.07.01	Yang Jie	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSI C63.4-2014.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.



2.2. EUT Setup and Operating Conditions

Note: All of the following test modes are tested in all the test items.

Test Modes	
Mode 1	WWAN Band Idle + Bluetooth Idle + WLAN Idle + GPS Rx + Battery + USB Cable(Charging from Adapter) + Earphone + Adapter + SIM Card
Mode 2	WWAN Band Idle + Bluetooth Idle + WLAN Idle + GLONASS Rx + Battery + USB Cable(Charging from Adapter) + Earphone + Adapter + SIM Card
Mode 3	WWAN Band Idle + Bluetooth Idle + WLAN Idle + Galileo Rx + Battery + USB Cable(Charging from Adapter) + Earphone + Adapter + SIM Card
Mode 4	WWAN Band Idle + Bluetooth Idle + WLAN Idle + BDS Rx + Battery + USB Cable(Charging from Adapter) + Earphone + Adapter + SIM Card
Mode 5	WWAN Band Idle + Bluetooth Idle + WLAN Idle + Camera + Battery + USB Cable(Charging from Adapter) + Earphone + Adapter + SIM Card
Mode 6	WWAN Band Idle + Bluetooth Idle + WLAN Idle + FM Rx + Battery + USB Cable(Charging from Adapter) + Earphone + Adapter + SIM Card
Mode 7	WWAN Band Idle + Bluetooth Idle + WLAN Idle + data link with PC + Battery + Earphone + USB Cable + SIM Card
Mode 8	WWAN Band Idle + Bluetooth Idle + WLAN Idle + NFC Idle + Battery + USB Cable(Charging from Adapter) + Earphone + Adapter + SIM Card
Mode 9	WWAN Band Idle + Bluetooth Idle + WLAN Idle + NFC Idle + Battery + USB Cable(Charging from Adapter) + Earphone + Adapter + SIM Card + Wireless charger
Remark: The above test mode in boldface (Mode 5) was the worst case of radiated emission test, only the test data of the mode was reported. The above test mode in boldface (Mode 6) was the worst case of conducted emission tests, only the test data of the mode was reported.	

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 - 60
Atmospheric Pressure (kPa):	86 - 106

3. 47 CFR Part 15B Requirements

3.1. Conducted Emission

3.1.1. Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

Note:

- a) The limit subjects to the Class B digital device.
- b) The lower limit shall apply at the band edges.
- c) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

3.1.2. Test Setup

Please refer to Annex A for the photographs of the Test Configuration.

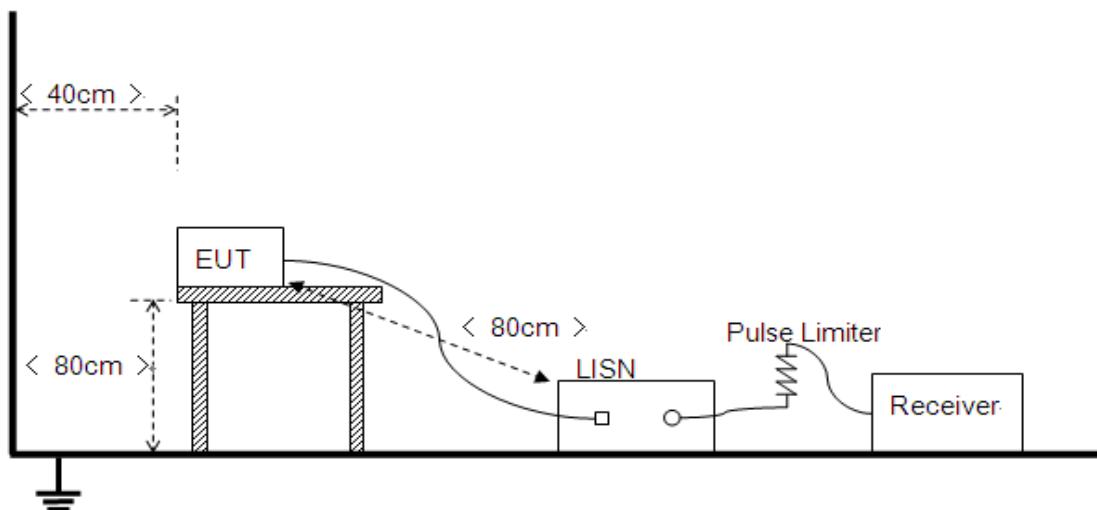




The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides $50\Omega/50\mu\text{H}$ of coupling impedance for the measuring instrument. A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.


The power strip or extension cord has been investigated to make sure that the LISN integrity is maintained with respect to the impedance characteristics as prescribed in ANSI C63.4-2014 at Clause 4.3.

3.1.3. Test Result

The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

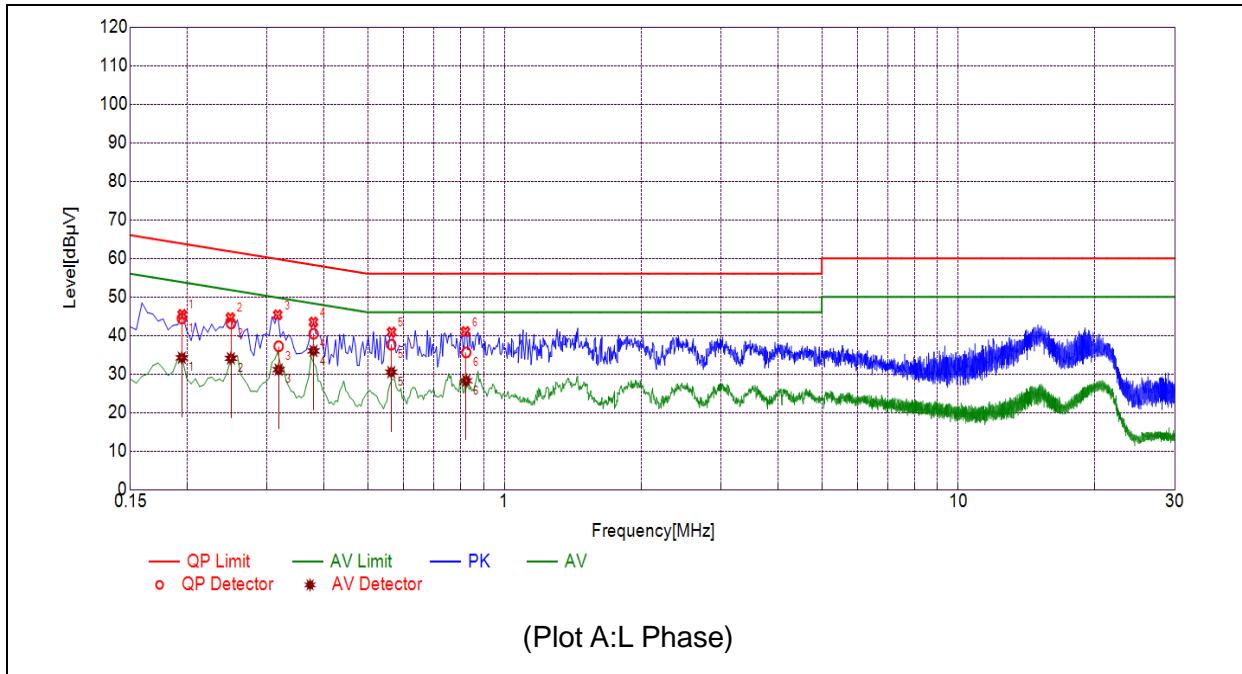A. Test Plot and Suspicious Points:


NO.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1946	44.41	34.21	63.84	53.84	Line	PASS
2	0.2497	43.13	34.06	61.77	51.77		PASS
3	0.3180	37.20	31.13	59.76	49.76		PASS
4	0.3796	40.44	35.99	58.29	48.29		PASS
5	0.5631	37.62	30.48	56.00	46.00		PASS
6	0.8235	35.61	28.26	56.00	46.00		PASS

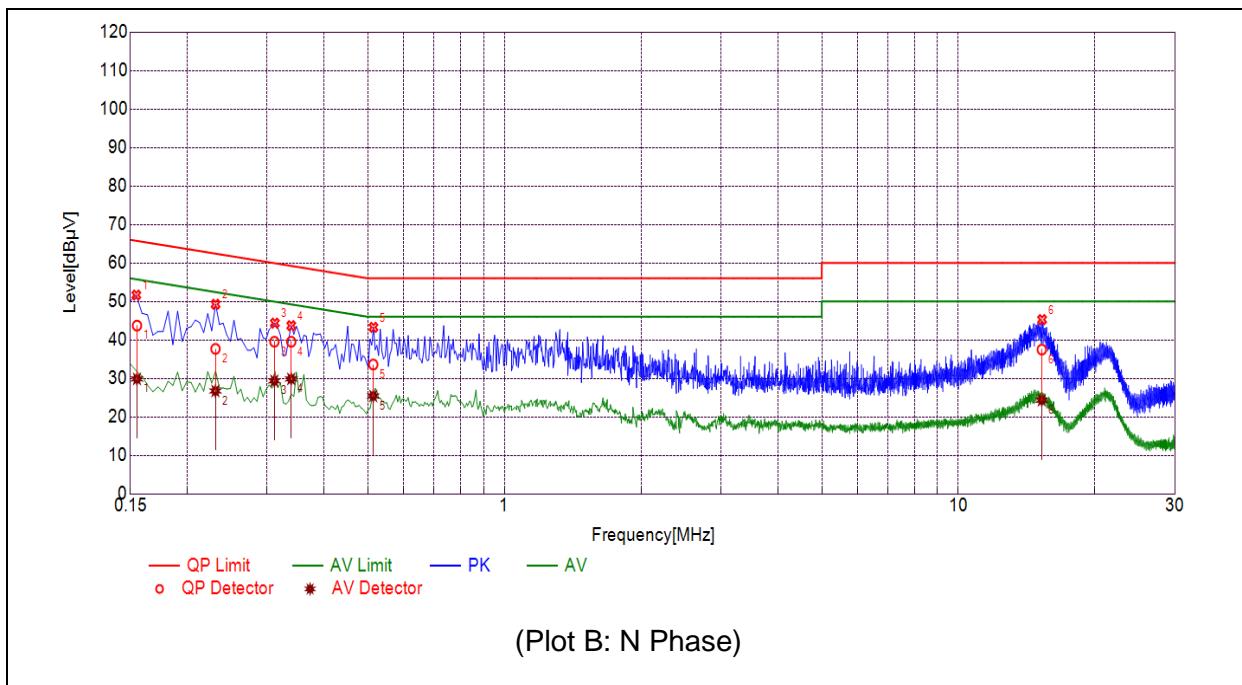

NO.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1550	43.72	29.86	65.73	55.73	Neutral	PASS
2	0.2308	37.67	26.73	62.42	52.42		PASS
3	0.3112	39.54	29.35	59.94	49.94		PASS
4	0.3389	39.53	29.86	59.23	49.23		PASS
5	0.5138	33.60	25.43	56.00	46.00		PASS
6	15.2656	37.48	24.34	60.00	50.00		PASS



3.2. Radiated Emission

3.2.1. Requirement

According to FCC section 15.109 (a), the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency Range (MHz)	Field Strength Limitation at 3m Measurement Dist	
	(μ V/m)	(dB μ V/m)
30.0 - 88.0	100	20log 100
88.0 - 216.0	150	20log 150
216.0 - 960.0	200	20log 200
Above 960.0	500	20log 500

As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dB μ V/m is calculated by 20log Emission Level(μ V/m).


3.2.2. Frequency Range of Measurement

According to 15.33(b)(1), the frequency range of radiated measurement for the EUT is listed in the following table:


Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

3.2.3. Test Setup

1) For radiated emissions from 30MHz to1GHz

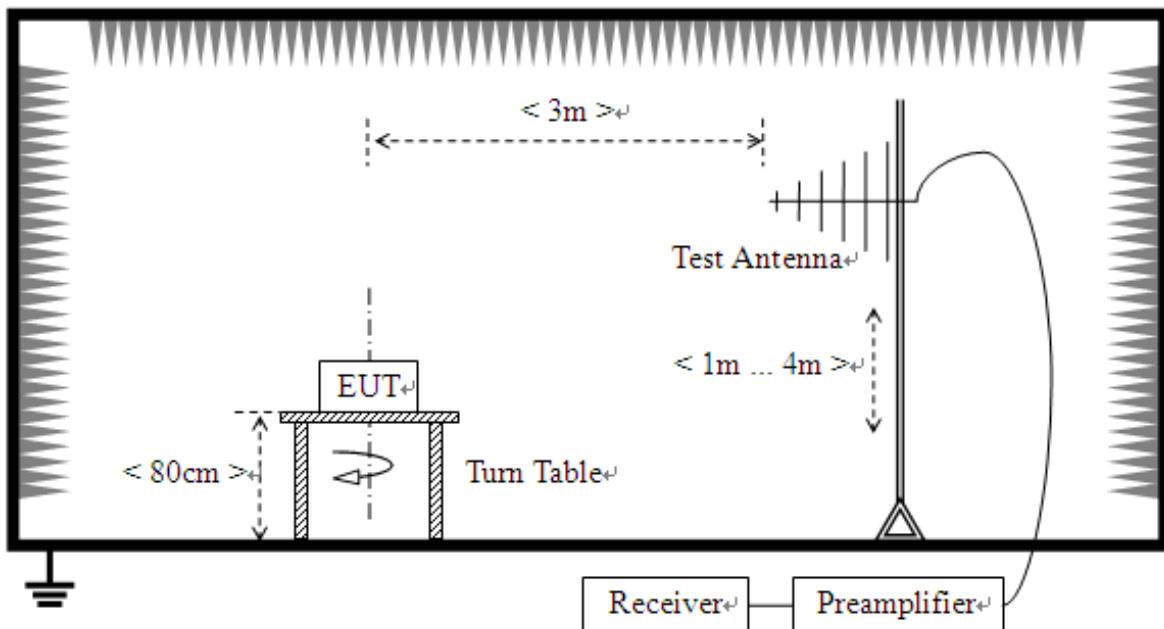

2) For radiated emissions above 1GHz

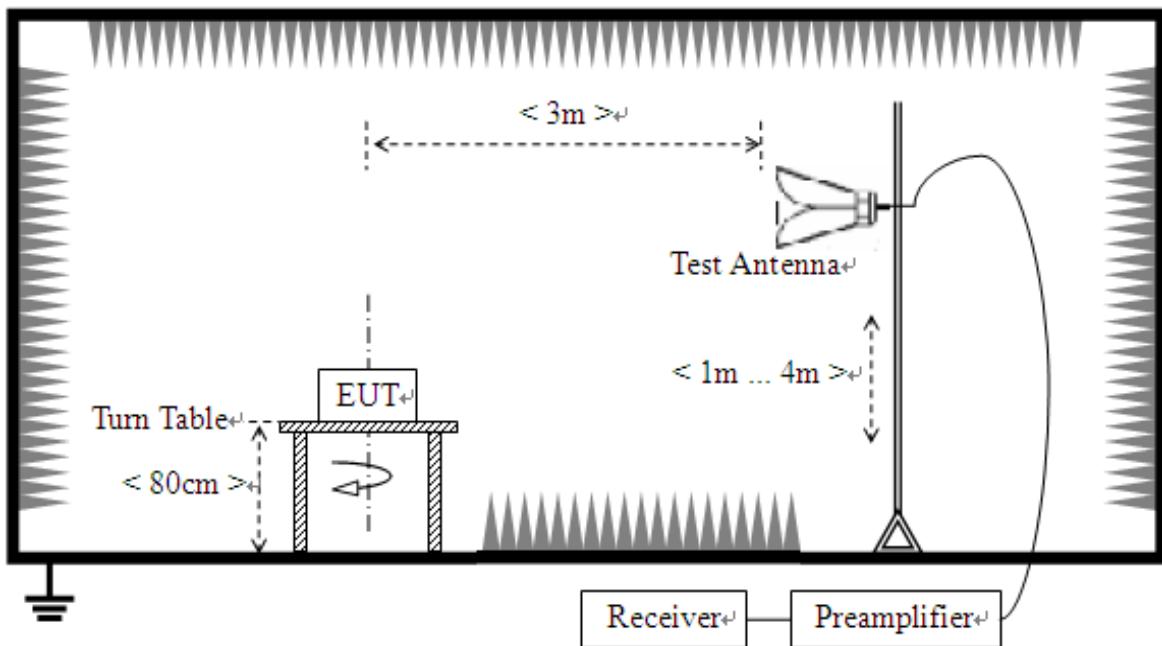



The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a variable-height antenna master tower.

For the test Antenna:


In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

3.2.4. Test Result


The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of emissions (6GHz-30GHz) which are attenuated more than 20 dB below the permissible value need not be reported.


Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

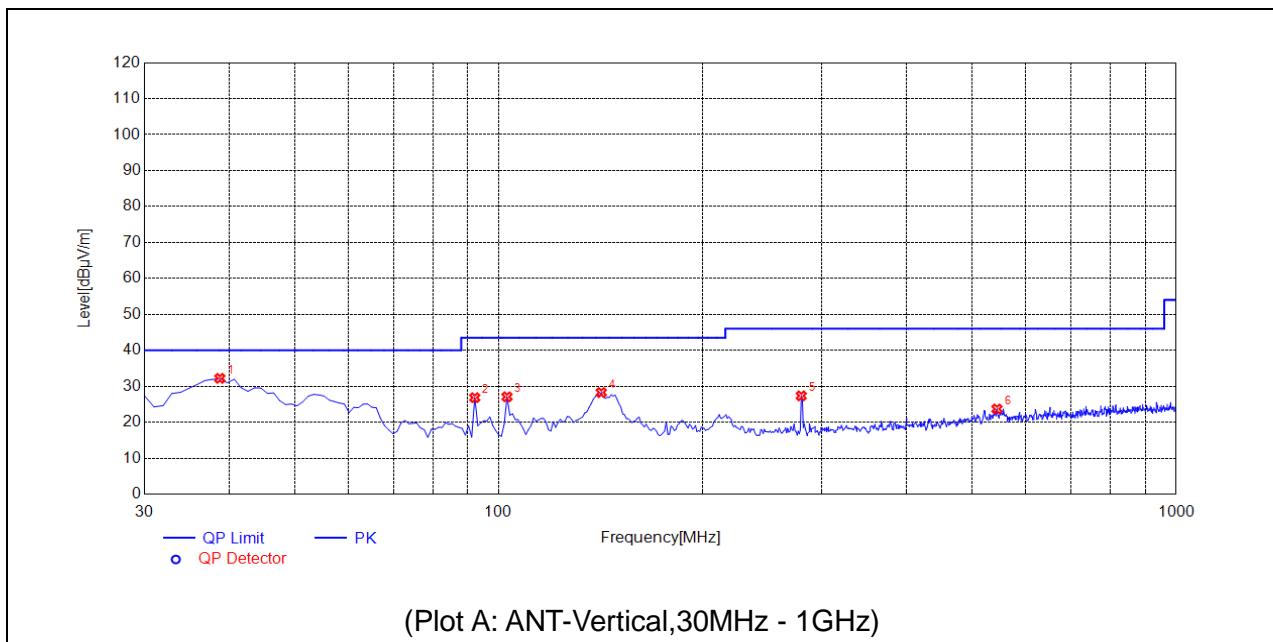


No.	Fre. MHz	PK dB μ V/m	QP dB μ V/m	AV dB μ V/m	Limit-PK dB μ V/m	Limit-QP dB μ V/m	Limit-AV dB μ V/m	ANT	Verdict
1	38.7387	32.21	N.A	N.A	N.A	40.00	N.A	V	PASS
2	92.1421	26.84	N.A	N.A	N.A	43.50	N.A	V	PASS
3	102.8228	27.08	N.A	N.A	N.A	43.50	N.A	V	PASS
4	141.6617	28.26	N.A	N.A	N.A	43.50	N.A	V	PASS
5	279.5395	27.35	N.A	N.A	N.A	46.00	N.A	V	PASS
6	543.6436	23.70	N.A	N.A	N.A	46.00	N.A	V	PASS

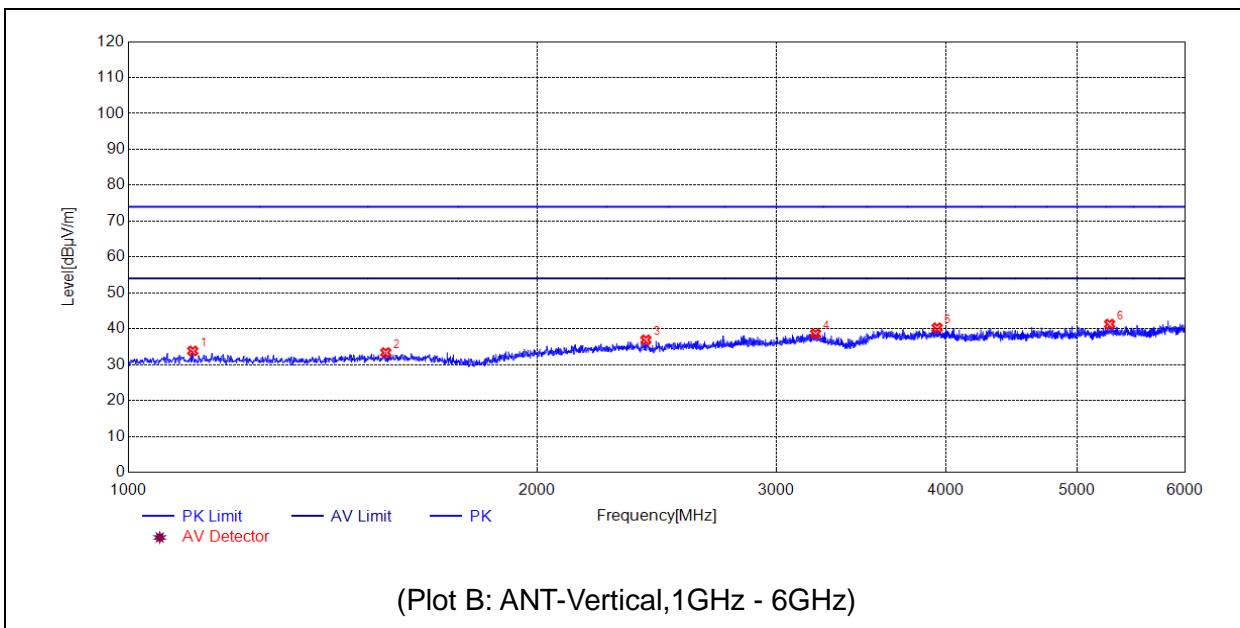

No.	Fre. MHz	PK dB μ V/m	QP dB μ V/m	AV dB μ V/m	Limit-PK dB μ V/m	Limit-QP dB μ V/m	Limit-AV dB μ V/m	ANT	Verdict
1	1115.0230	33.82	N.A	N.A	74.00	N.A	54.00	V	PASS
2	1547.1094	33.37	N.A	N.A	74.00	N.A	54.00	V	PASS
3	2405.2811	36.90	N.A	N.A	74.00	N.A	54.00	V	PASS
4	3207.4415	38.62	N.A	N.A	74.00	N.A	54.00	V	PASS
5	3942.5885	40.26	N.A	N.A	74.00	N.A	54.00	V	PASS
6	5282.8566	41.29	N.A	N.A	74.00	N.A	54.00	V	PASS

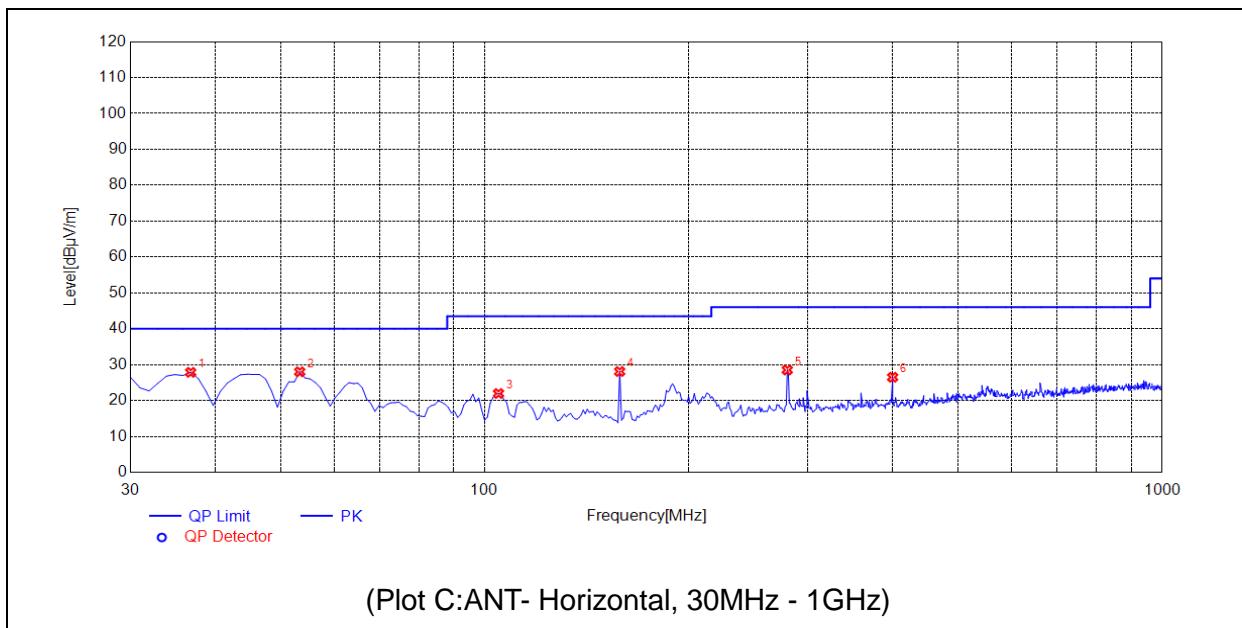

No.	Fre. MHz	PK dB μ V/m	QP dB μ V/m	AV dB μ V/m	Limit-PK dB μ V/m	Limit-QP dB μ V/m	Limit-AV dB μ V/m	ANT	Verdict
1	36.7968	27.86	N.A	N.A	N.A	40.00	N.A	H	PASS
2	53.3033	28.01	N.A	N.A	N.A	40.00	N.A	H	PASS
3	104.7648	21.96	N.A	N.A	N.A	43.50	N.A	H	PASS
4	158.1682	28.09	N.A	N.A	N.A	43.50	N.A	H	PASS
5	279.5395	28.51	N.A	N.A	N.A	46.00	N.A	H	PASS
6	399.9399	26.49	N.A	N.A	N.A	46.00	N.A	H	PASS

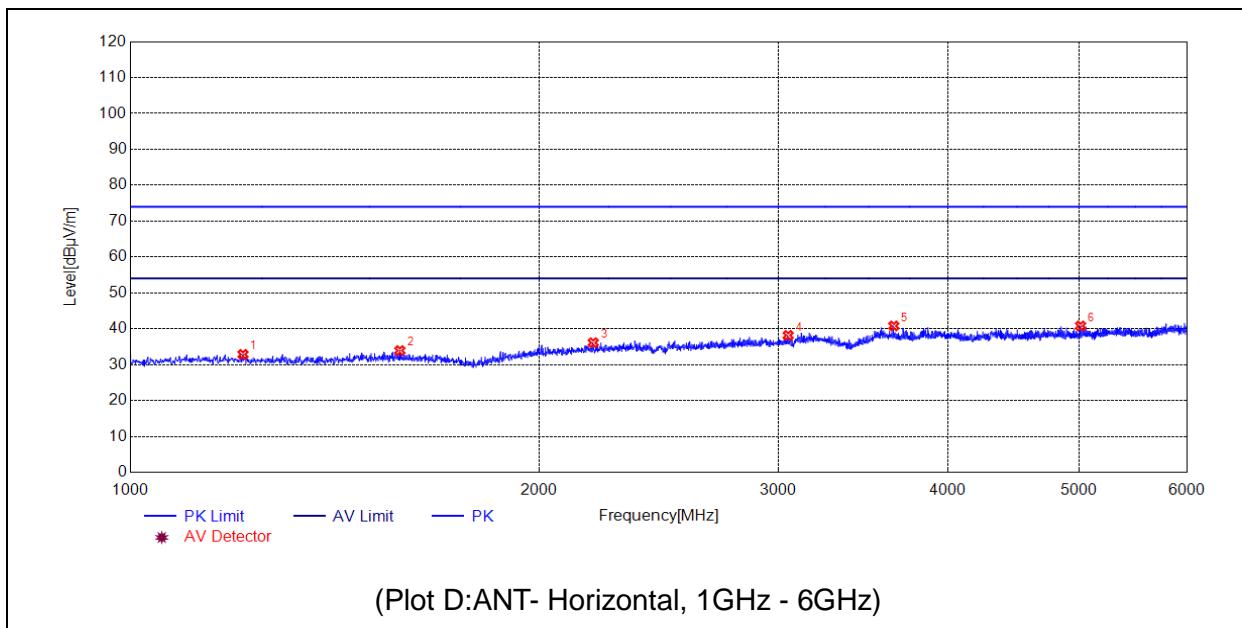

No.	Fre. MHz	PK dB μ V/m	QP dB μ V/m	AV dB μ V/m	Limit-PK dB μ V/m	Limit-QP dB μ V/m	Limit-AV dB μ V/m	ANT	Verdict
1	1210.0420	32.86	N.A	N.A	74.00	N.A	54.00	H	PASS
2	1579.1158	33.92	N.A	N.A	74.00	N.A	54.00	H	PASS
3	2192.2384	36.12	N.A	N.A	74.00	N.A	54.00	H	PASS
4	3051.4103	38.16	N.A	N.A	74.00	N.A	54.00	H	PASS
5	3650.5301	40.79	N.A	N.A	74.00	N.A	54.00	H	PASS
6	5011.8024	40.79	N.A	N.A	74.00	N.A	54.00	H	PASS



Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95% $(U=2U_{c(y)})$	9kHz-150kHz	$\pm 4.1\text{dB}$
	150kHz-30MHz	$\pm 3.7\text{dB}$

Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95% $(U=2U_{c(y)})$	30MHz-200MHz	$\pm 5.06\text{dB}$
	200MHz-1000MHz	$\pm 5.24\text{dB}$
	1GHz-6GHz	$\pm 5.18\text{dB}$
	6GHz-18GHz	$\pm 5.48\text{dB}$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Accreditation Certificate

Accredited Testing Laboratory:	The FCC designation number is CN1192. Test firm registration number is 226174. (Shenzhen Morlab Communications Technology Co., Ltd.)
---------------------------------------	--

4. Test Software Utilized

Model	Version Number	Producer
JS32-RE	Version 2.0.2.0	Tonscend
TS+ -[JS32-CE]	Version2.5.0.0	Tonscend



5. Test Equipments Utilized

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
MXE EMI Receiver	Agilent	N9038A	MY54130016	2019.07.29	2020.07.28
Test Receiver	R&S	ESPI	101052	2019.07.29	2020.07.28
LISN	Schwarzbeck	NSLK 8127	8127449	2020.03.26	2021.03.25
Pulse Limiter (10dB)	Schwarzbeck	VTSD 9561-F	VTSD 9561 F-B #206	2019.08.13	2020.08.12
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	VULB 9163-519	2019.05.24	2022.05.23
Test Antenna - Horn	Schwarzbeck	BBHA 9120D	9120D-963	2019.05.24	2022.05.23
Test Antenna - Horn	Schwarzbeck	BBHA 9170	BBHA9170#7 73	2019.05.24	2022.05.23
Radiated Disturbance Preamplifier	rflight	S020180L320 3	61171/61172	2019.07.29	2020.07.28
Radiated Disturbance Preamplifier	rflight	S10M100L38 02	46732	2019.07.29	2020.07.28
Semi-Anechoic Chamber	CRT	9m*6m*6m	N/A	2020.01.06	2023.01.05

6. Ancillary Equipment Utilized

Description	Manufacturer	Model	Serial No.
PC	A1370	APPLE	N/A
Adapter	A1374	APPLE	N/A
Earphone	VIVO	N/A	EMC-03

— END OF REPORT —