

TEST REPORT

Applicant: Fujian Newland Payment Technology Co.,Ltd.

Address: No. B602, Building #1, Haixia Jingmao Plaza, Fuzhou Bonded Area 350015, Fujian, China

Product Name: WiFi & Bluetooth Module


FCC ID: 2AM6U-FCS950U

Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2013
KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

Report Number: XMDN240122-04868E-RF-00E

Report Date: 2024/4/30

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).



Reviewed By: Gavin Xu

Title: RF Engineer



Approved By: Ivan Cao

Title: EMC Manager

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL▲	6
1.4 EQUIPMENT MODIFICATIONS	6
2. SUMMARY OF TEST RESULTS	7
3. DESCRIPTION OF TEST CONFIGURATION	8
3.1 OPERATION FREQUENCY DETAIL	8
3.2 EUT OPERATION CONDITION	9
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	10
3.4 SUPPORT CABLE LIST AND DETAILS	10
3.5 BLOCK DIAGRAM OF TEST SETUP	10
3.6 TEST FACILITY	12
3.7 MEASUREMENT UNCERTAINTY	12
4. REQUIREMENTS AND TEST PROCEDURES	13
4.1 AC LINE CONDUCTED EMISSIONS	13
4.1.1 Applicable Standard	13
4.1.2 EUT Setup	14
4.1.3 EMI Test Receiver Setup	14
4.1.4 Test Procedure	15
4.1.5 Corrected Amplitude & Margin Calculation	15
4.1.6 Test Result	15
4.2 RADIATION SPURIOUS EMISSIONS	16
4.2.1 Applicable Standard	16
4.2.2 EUT Setup	17
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
4.2.4 Test Procedure	19
4.2.5 Corrected Result & Margin Calculation	19
4.2.6 Test Result	19
4.3 MAXIMUM CONDUCTED OUTPUT POWER	20
4.3.1 Applicable Standard	20
4.3.2 EUT Setup	20
4.3.3 Test Procedure	20
4.3.4 Test Result	20
4.4 DUTY CYCLE	21
4.4.1 EUT Setup	21
4.4.2 Test Procedure	21
4.4.3 Judgment	21
4.5 ANTENNA REQUIREMENT	22
4.5.1 Applicable Standard	22

4.5.2 Judgment	22
5. Test DATA AND RESULTS	23
5.1 AC LINE CONDUCTED EMISSIONS.....	23
5.2 RADIATION SPURIOUS EMISSIONS.....	26
5.3 SPOT CHECK WITH MAXIMUM CONDUCTED OUTPUT POWER	57
5.4 DUTY CYCLE	60
APPENDIX A - EUT PHOTOGRAPHS	62
APPENDIX B - TEST SETUP PHOTOGRAPHS	63
APPENDIX C - RF EXPOSURE EVALUATION	64
APPLICABLE STANDARD	64
CALCULATION FORMULA:.....	64
CALCULATED DATA:	65

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	XMDN240122-04868E-RF-00E	Class II Permissive Change Report	2024/4/30

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	WiFi & Bluetooth Module
EUT Model:	FCS950U
Operation Frequency:	Band1: 5180-5240 MHz(802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) Band2: 5260-5320 MHz (802.11a/n ht20/ac vht20) 5270-5310 MHz(802.11n ht40/ac vht40) 5290 MHz(802.11ac vht80) Band3: 5500-5720 MHz (802.11a/n ht20/ac vht20) 5510-5710 MHz(802.11n ht40/ac vht40) 5530-5690MHz(802.11ac vht80) Band4: 5745-5825 MHz (802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
Maximum Average Output Power (Conducted):	16.57 dBm in 5150-5250 MHz Band 16.86 dBm in 5250-5350 MHz Band 17.15 dBm in 5470-5725 MHz Band 17.18 dBm in 5725-5850 MHz Band
Modulation Type:	802.11a/n/ac: OFDM-BPSK, QPSK, 16QAM, 64QAM,256QAM
Rated Input Voltage:	DC 3.3V
Serial Number:	2GZ2-1(Radiated Spurious Emission/AC Line Conducted Emission Test) 2GZ2-3 (RF Conducted Test)
EUT Received Date:	2024/1/24
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
/	/	/	/

1.3 Antenna Information Detail ▲

Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
ZHONGTIAN XUN Communication Technology Co.,Ltd	FPC	50	5.15~5.25GHz	0.35 dBi
			5.25~5.35GHz	1.61 dBi
			5.47~5.725GHz	2.39 dBi
			5.725~5.85GHz	0.30 dBi
The design of compliance with §15.203:				
☒ Unit uses a permanently attached antenna.				
☐ Unit uses a unique coupling to the intentional radiator.				
☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.				

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result	Note
§15.207(a)	AC line conducted emissions	Compliant	/
FCC§15.205& §15.209 &§15.407(b)	Radiated Spurious Emissions	Compliant	/
FCC§15.407(a) (e)	Emission Bandwidth	/	*
FCC§15.407(a)	Maximum Conducted Output Power	Reporting	/
FCC§15.407 (a)	Power Spectral Density	/	*
§15.407(h)(2)	Dynamic Frequency Selection(DFS)	/	**
§15.203	Antenna Requirement	Compliant	/
Note 1: This is Class II permissive change application based on the Change ID device, model: FCS950U, FCC ID: 2AM6U-FCS950U. The Change ID device based on the original device, model: FCS950U, FCC ID:XMR2023FCS950U, which was tested by Sporton International Inc. (Kunshan). The change between the original equipment and the current equipment is stated and guaranteed by the applicant, as following: 1. Change the antenna. Per Spot check with RF output power, the RF parameters are identical with the original device. Therefore, AC line conducted emissions and Radiated Spurious Emissions was tested based on the change. *:Please refer to Report No: FR2D0802B. The Bay Area Compliance Laboratories Corp. (Dongguan) is responsible for all the information provided in this report, except when information is provided by the customer as identified in this report. Note 2: For AC line conducted emissions, the maximum output power channel was tested. Note 3: For Radiated Spurious Emissions 9kHz~ 1GHz, the maximum output power channel was tested.			

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

For 802.11a/n ht20/ac vht20:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	52	5260	100	5500	149	5745
40	5200	56	5280	104	5520	153	5765
44	5220	60	5300	108	5540	157	5785
48	5240	64	5320	112	5560	161	5805
/	/	/	/	116	5580	165	5825
/	/	/	/	120	5600	/	/
/	/	/	/	124	5620	/	/
/	/	/	/	128	5640	/	/
/	/	/	/	132	5660	/	/
/	/	/	/	136	5680	/	/
/	/	/	/	140	5700	/	/
/	/	/	/	144	5720*	/	/

For 802.11n ht40/ac vht40:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	54	5270	102	5510	151	5755
46	5230	62	5310	110	5550	159	5795
/	/	/	/	118	5590	/	/
/	/	/	/	126	5630	/	/
/	/	/	/	134	5670	/	/
/	/	/	/	142	5710*	/	/

For 802.11ac vht80:

5150-5250MHz Band		5250-5350 MHz Band		5470-5725 MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	58	5290	106	5530	155	5775
/	/	/	/	122	5610	/	/
/	/	/	/	138	5690*	/	/

Note:

1. Tested with the frequencies in bold .

2. *: Additional channels cross the band 5470-5725MHz and 5725-5850 MHz, Conducted output power/ Power Spectral Density/bandwidth test with the additional channel to compliance with stricter limit of the two bands(5470-5725MHz more stricter).

3.2 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The EUT configuration is below:

EUT Exercise Software:		cmd		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:				
5150-5250 MHz Band:				
Test Modes	Data Rate	Power Level Setting		
		Low Channel	Middle Channel	High Channel
802.11a	6Mbps	50	28	28
802.11n ht20	6Mbps	59	38	34
802.11n ht40	MCS0	64	/	32
802.11ac vht20	MCS0	59	38	34
802.11ac vht40	MCS0	68	/	32
802.11ac vht80	MCS0	/	48	/

5250-5350 MHz Band:				
Test Modes	Data Rate	Power Level Setting		
		Low Channel	Middle Channel	High Channel
802.11a	6Mbps	27	23	19
802.11n ht20	6Mbps	38	38	74
802.11n ht40	MCS0	30	/	76
802.11ac vht20	MCS0	34	34	74
802.11ac vht40	MCS0	30	/	75
802.11ac vht80	MCS0	/	64	/

5470-5725 MHz Band:					
Test Modes	Data Rate	Power Level Setting			
		Low Channel	Middle Channel	High Channel	Cross Channel
802.11a	6Mbps	15	12	14	14
802.11n ht20	6Mbps	24	24	54	24
802.11n ht40	MCS0	60	18	26	26
802.11ac vht20	MCS0	22	22	52	22
802.11ac vht40	MCS0	60	18	26	26
802.11ac vht80	MCS0	54	/	16	16

5725-5850 MHz Band:				
Test Modes	Data Rate	Power Level Setting		
		Low Channel	Middle Channel	High Channel
802.11a	6Mbps	14	14	14
802.11n ht20	6Mbps	30	30	30
802.11n ht40	MCS0	24	/	24
802.11ac vht20	MCS0	28	28	28
802.11ac vht40	MCS0	24	/	24
802.11ac vht80	MCS0	/	26	/

The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
TOTO Link	Router	LR1200	190924004S1
Lenovo	Laptop	T430	00331-10000-00001-AA887_02
Fujian Newland Payment Technology Co.,Ltd.	Fixture board	NXG-GC76WN5528	2GZ2-1

3.4 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DB9+RJ45+TypeA+Power multifunction cable	no	no	3	Adapter/ Router/ Laptop serial port/ Laptop USB port	Fixture board

3.5 Block Diagram of Test Setup

AC Power Lines Conducted Emission:

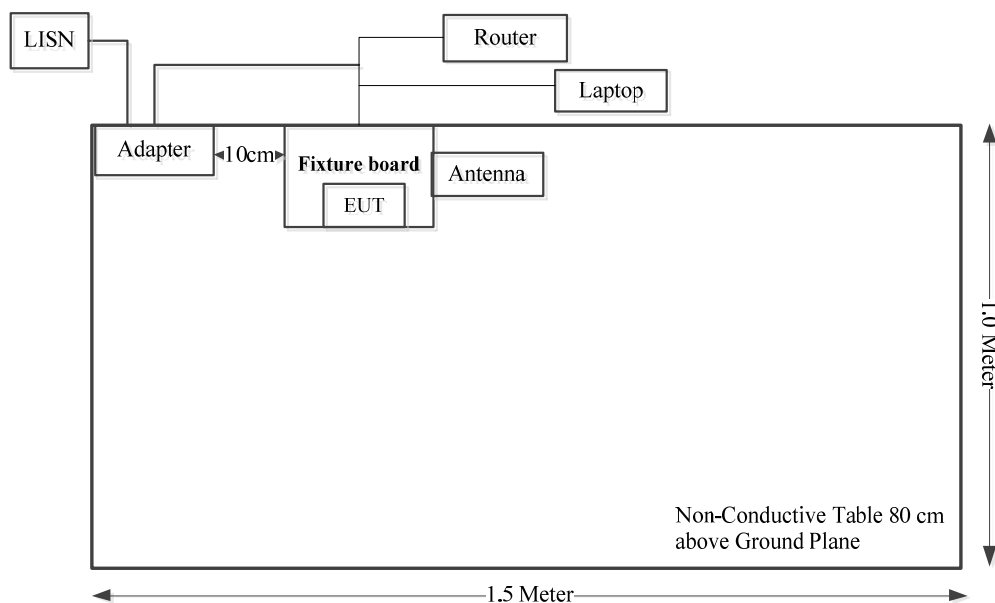

Radiated Spurious Emissions:

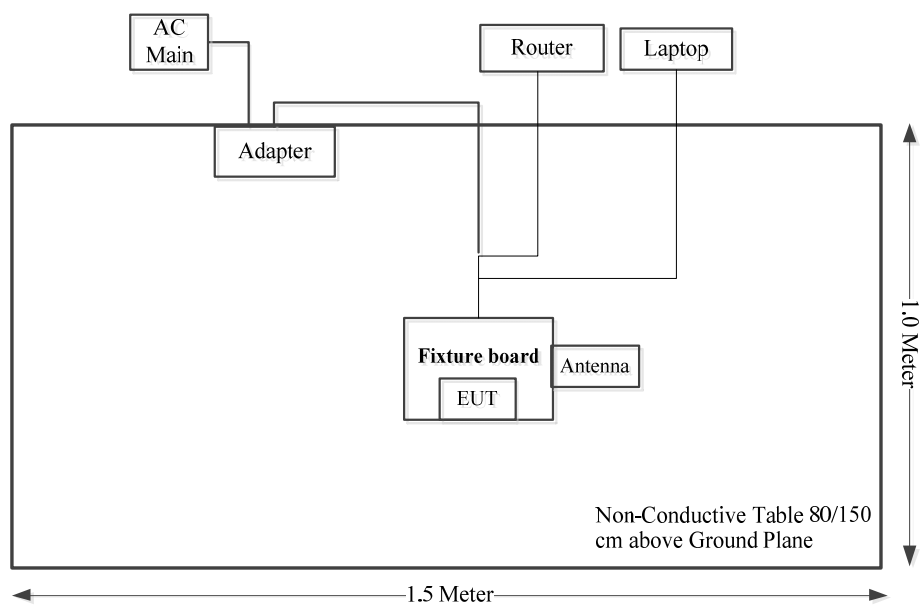

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

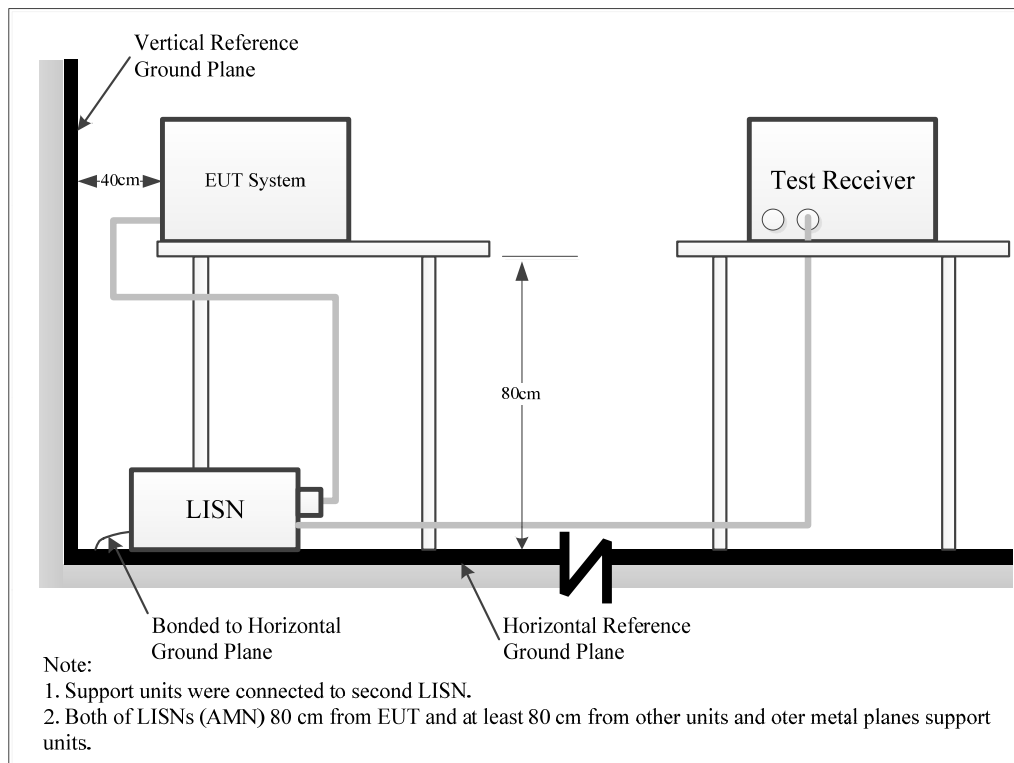

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions

4.2.1 Applicable Standard


FCC §15.407 (b);

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of - 27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
 - (i) All emissions shall be limited to a level of - 27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (10) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signalling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.


4.2.2 EUT Setup

9kHz~30MHz:

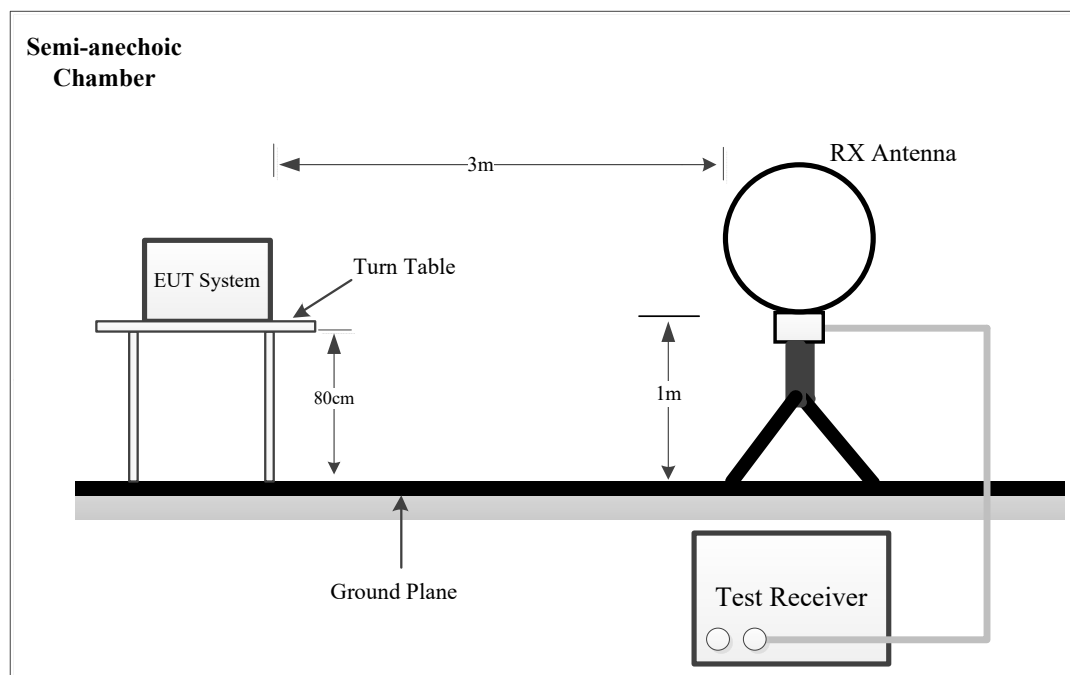

30MHz~1GHz:

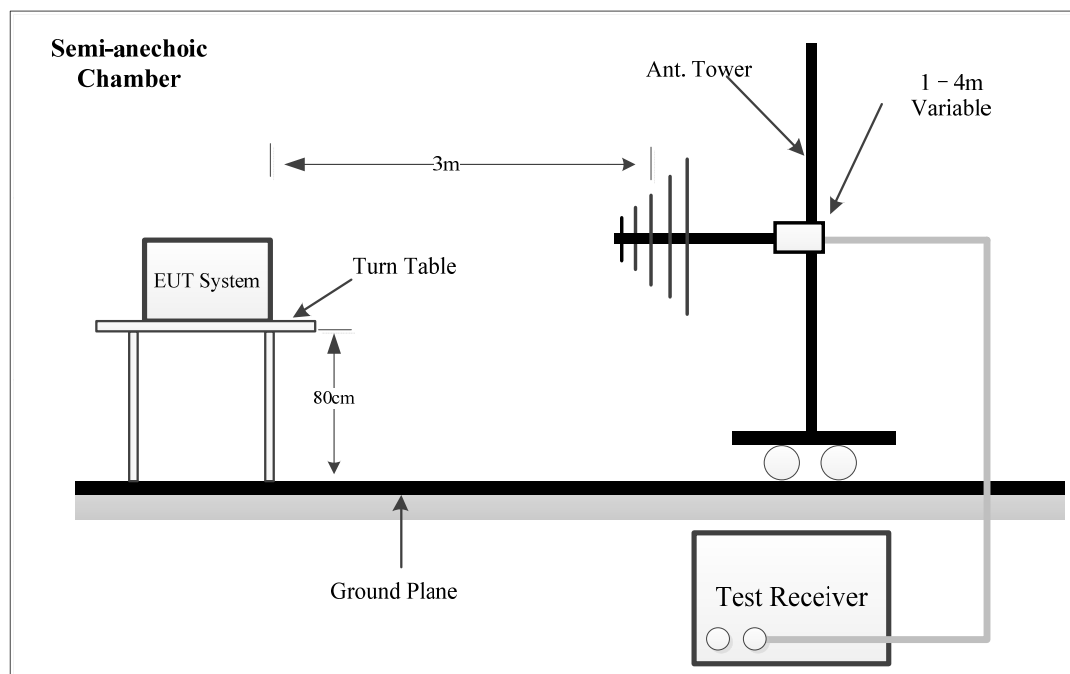

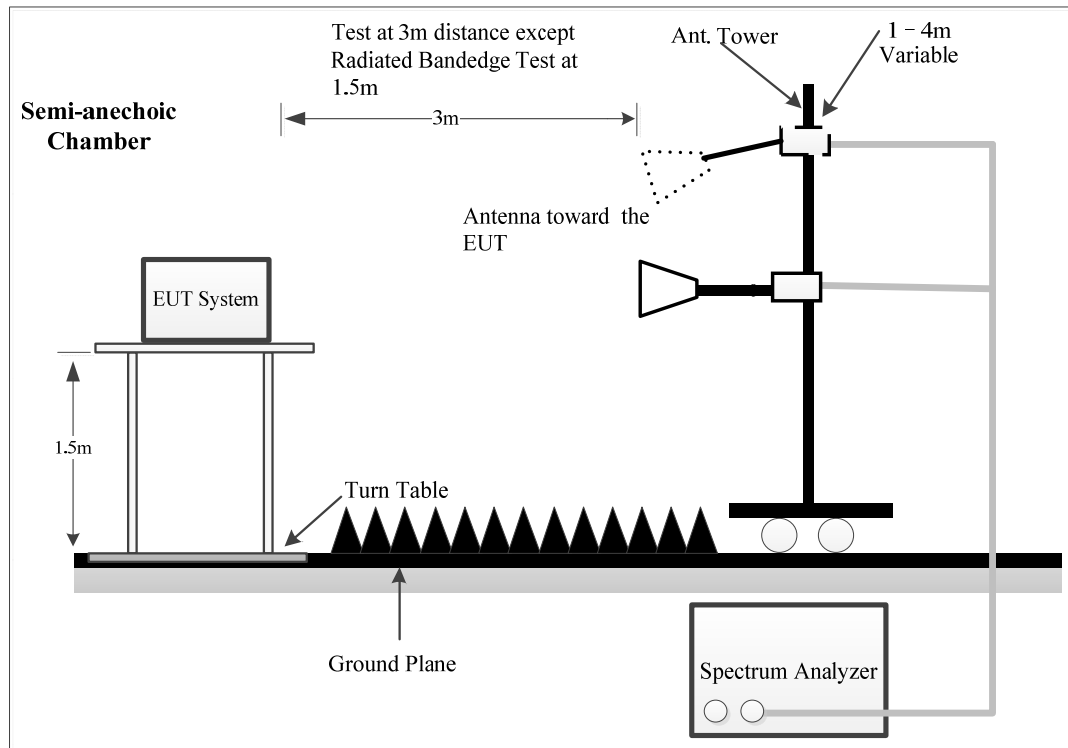Above 1GHz:

The radiated emission tests were performed in the semi-anechoic chamber, using the setup accordance with the ANSI C63.10-2013. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W
9 kHz – 150 kHz	QP/AV	200 Hz	1 kHz	200 Hz
150 kHz – 30 MHz	QP/AV	9 kHz	30 kHz	9 kHz
30 MHz – 1000 MHz	PK	100 kHz	300 kHz	/
	QP	/	/	120 kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	$\geq 1/T$

Note: T is minimum transmission duration

If the maximized peak measured value is under the QP limit by more than 6dB, then it is unnecessary to perform an QP measurement.

If the maximized peak measured value is under the average limit, then it is unnecessary to perform an QP measurement.

4.2.4 Test Procedure

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz -1 GHz, except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

For Radiated Bandedge test, which was performed at 1.5 m distance, according to C63.10, the test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB = 6.0dB

4.2.5 Corrected Result & Margin Calculation

The basic equation except radiated bandedge test is as follows:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

Result = Reading + Factor

For Radiated Bandedge test:

Factor = Antenna Factor + Cable Loss-Distance extrapolation Factor

Result = Reading + Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.2.6 Test Result

Please refer to section 5.2.

4.3 Maximum Conducted Output Power

4.3.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

4.3.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The cable loss of this RF cable was offset into the setting of test equipment, which was provided by manufacturer ▲.

4.3.3 Test Procedure

According to ANSI C63.10-2013 Section 12.3.3.1

Method PM-G is measurement using a gated RF average power meter.


Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

4.3.4 Test Result

Please refer to section 5.3.

4.4 Duty Cycle

4.4.1 EUT Setup

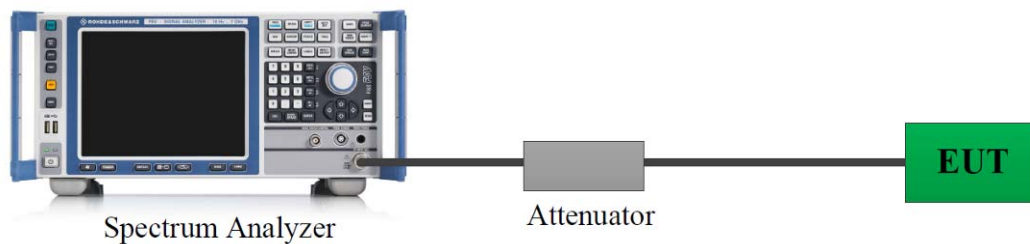

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer.

4.4.2 Test Procedure

According to ANSI C63.10-2013 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

4.4.3 Judgment

Report Only. Please refer to section 5.4.

4.5 Antenna Requirement

4.5.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.5.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

5. Test DATA AND RESULTS

5.1 AC Line Conducted Emissions

Serial Number:	2GZ2-1	Test Date:	2024/3/26
Test Site:	CE	Test Mode:	Transmitting
Tester:	Wright Lai	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.2	Relative Humidity: (%)	71	ATM Pressure: (kPa)	101.9
----------------------	------	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101614	2023/10/18	2024/10/17
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2023/9/5	2024/9/4
R&S	EMI Test Receiver	ESCI	100035	2023/8/18	2024/8/17
R&S	Test Software	EMC32	V9.10.00	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Note: the maximum output power channel was tested.


Project No: XMDN240122-04868E-RF
Test Engineer: Wright Lai
Test Date: 2024-3-26
Port: L
Test Mode: Transmitting
Power Source: AC 120V/60Hz
Note: 802.11a 5745MHz

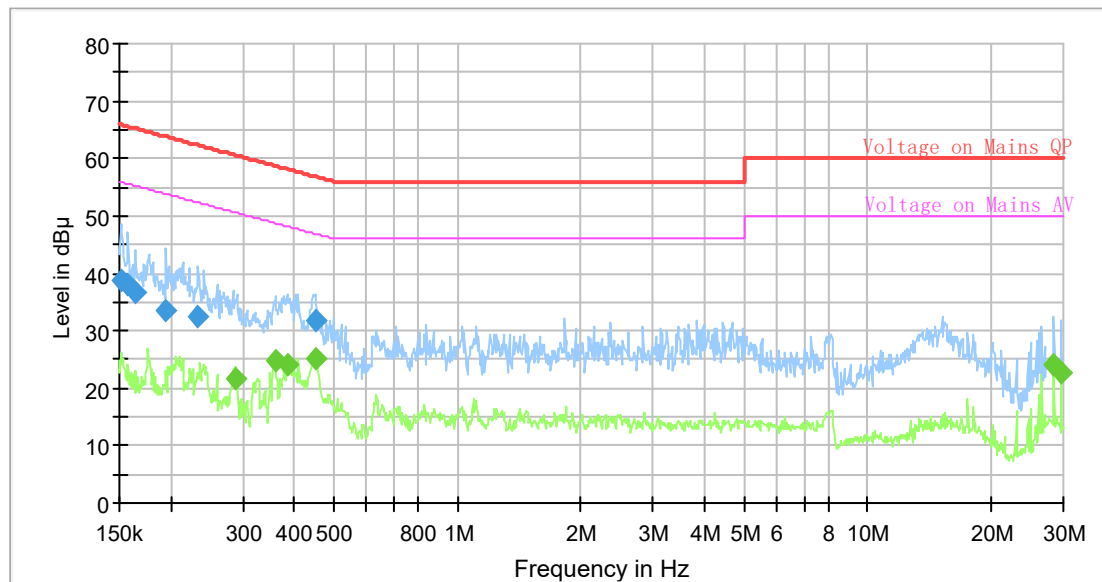

Final Result

Frequency (MHz)	QuasiPeak (dB μ V)	Average (dB μ V)	Limit (dB μ V)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.151504	38.64	---	65.92	27.28	9.000	L1	10.8
0.157671	38.06	---	65.59	27.53	9.000	L1	10.8
0.164089	36.81	---	65.25	28.44	9.000	L1	10.8
0.195386	33.42	---	63.80	30.38	9.000	L1	10.8
0.233814	32.40	---	62.31	29.91	9.000	L1	10.8
0.286866	---	21.82	50.61	28.79	9.000	L1	10.8
0.359048	---	24.68	48.75	24.07	9.000	L1	10.8
0.385014	---	24.05	48.17	24.12	9.000	L1	10.8
0.449391	---	25.00	46.89	21.89	9.000	L1	10.8
0.449391	31.89	---	56.89	25.00	9.000	L1	10.8
28.496284	---	24.01	50.00	25.99	9.000	L1	10.9
29.656283	---	22.83	50.00	27.17	9.000	L1	10.9

Project No: XMDN240122-04868E-RF
Test Engineer: Wright Lai
Test Date: 2024-3-26
Port: N
Test Mode: Transmitting
Power Source: AC 120V/60Hz
Note: 802.11a 5745MHz

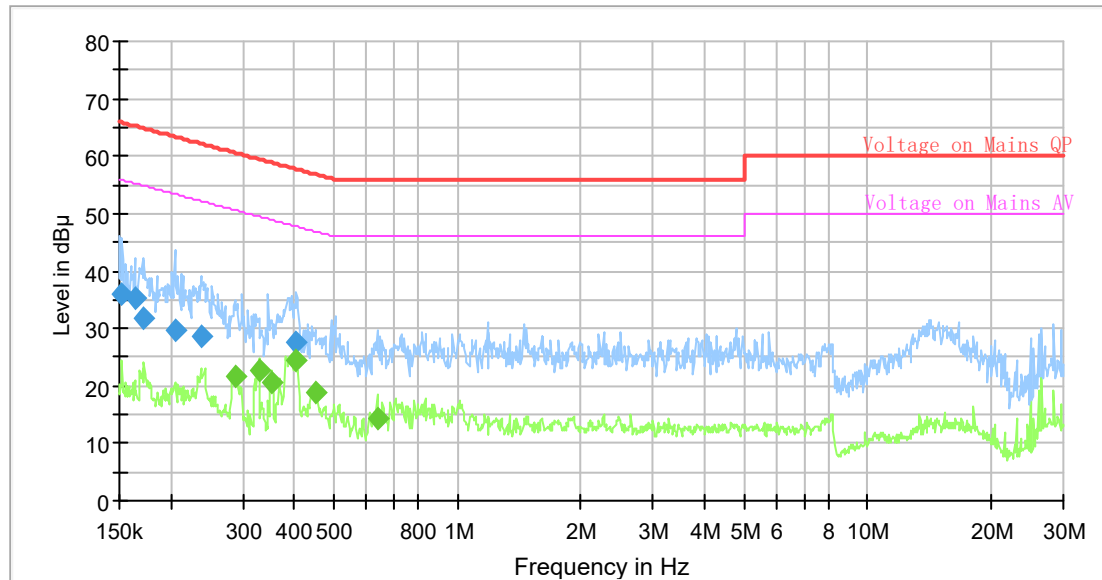

Final Result

Frequency (MHz)	QuasiPeak (dB μV)	Average (dB μV)	Limit (dB μV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.152261	36.06	---	65.88	29.82	9.000	N	10.9
0.163273	35.24	---	65.30	30.06	9.000	N	10.9
0.170769	31.73	---	64.92	33.19	9.000	N	10.9
0.205378	29.84	---	63.39	33.55	9.000	N	10.8
0.237339	28.73	---	62.19	33.46	9.000	N	10.8
0.286866	---	21.80	50.61	28.81	9.000	N	10.8
0.328218	---	22.65	49.50	26.85	9.000	N	10.8
0.353715	---	20.47	48.87	28.40	9.000	N	10.8
0.402691	---	24.37	47.80	23.43	9.000	N	10.8
0.404704	27.49	---	57.76	30.27	9.000	N	10.8
0.449391	---	18.83	46.89	28.06	9.000	N	10.8
0.637161	---	14.46	46.00	31.54	9.000	N	10.7

5.2 Radiation Spurious Emissions

Serial Number:	2GZ2-1	Test Date:	Below 1GHz: 2024/4/7 Above 1GHz: 2024/4/11~2024/4/12
Test Site:	Chamber 10m, Chamber B	Test Mode:	Transmitting
Tester:	Zoo Zou, Leo Xiao, Colin Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.1~24.4	Relative Humidity: (%)	44~58	ATM Pressure: (kPa)	100.5~101
----------------------	-----------	------------------------------	-------	------------------------	-----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
9kHz~1000MHz					
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/21	2026/10/20
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2023/8/1	2024/7/31
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2023/8/1	2024/7/31
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2023/8/1	2024/7/31
Sonoma	Amplifier	310N	185914	2023/8/1	2024/7/31
R&S	EMI Test Receiver	ESCI	101121	2023/10/18	2024/10/17
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2023/11/17	2024/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2023/12/11	2024/12/10
AH	Preamplifier	PAM-0118P	469	2023/8/19	2024/8/18
AH	Preamplifier	PAM-1840VH	191	2023/9/7	2024/9/6
R&S	Spectrum Analyzer	FSV40	101944	2023/10/18	2024/10/17
Audix	Test Software	E3	191218 (V9)	N/A	N/A
Sinoscite	Band Rejection Filter	BSF5150-5850MN	0899003	2024/2/21	2025/2/20
Mini-Circuits	High Pass Filter	VHF-6010+	31118	2023/12/1	2024/11/30

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is below:


1) 9kHz~30MHz

802.11a 5745MHz was tested, the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

2) 30MHz-1GHz

Project No: XMDN240122-04868E-RF
Test Engineer: Zoo Zou
Test Date: 2024-4-7
Polarization: Horizontal
Test Mode: Transmitting
Power Source: AC 120V/60Hz


80.0 dBuV/m

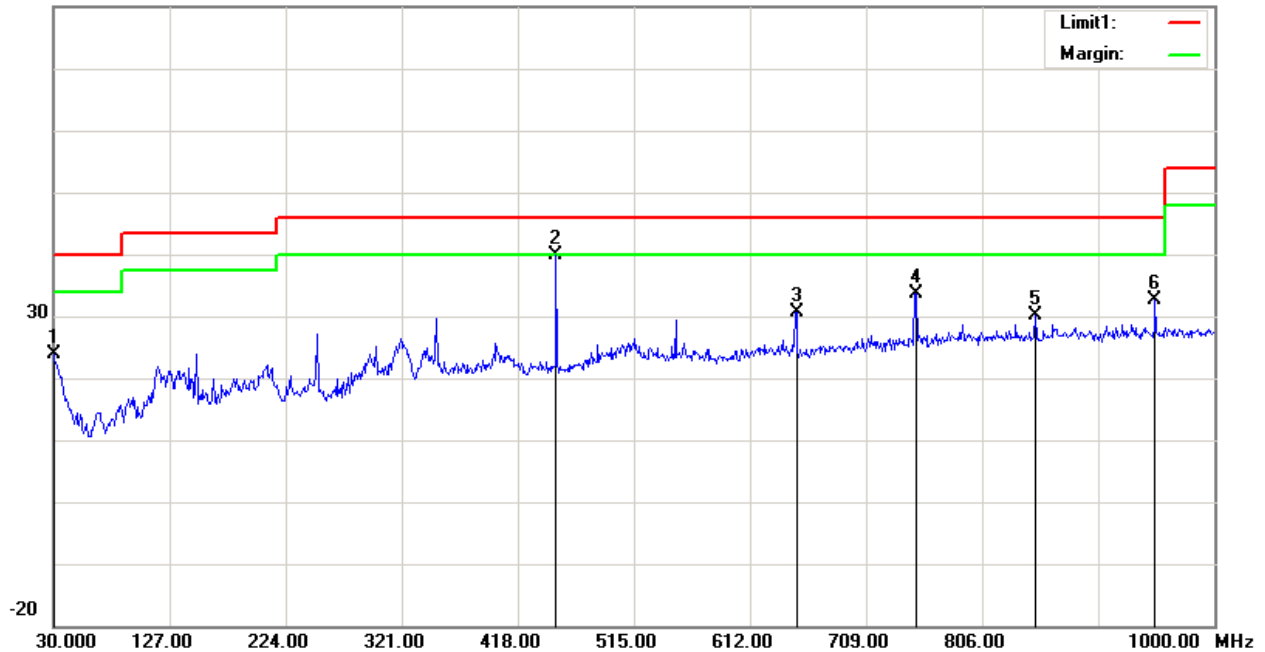

No.	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	30.0000	27.65	peak	-3.80	23.85	40.00	16.15
2	450.0100	45.30	peak	-5.47	39.83	46.00	6.17
3	650.8000	32.56	peak	-1.88	30.68	46.00	15.32
4	750.7100	34.03	peak	-0.31	33.72	46.00	12.28
5	850.6200	29.31	peak	0.90	30.21	46.00	15.79
6	950.5300	30.56	peak	2.04	32.60	46.00	13.40

Project No: XMDN240122-04868E-RF
Test Engineer: Zoo Zou
Test Date: 2024-4-7
Polarization: Vertical
Test Mode: Transmitting
Power Source: AC 120V/60Hz

80.0 dBuV/m

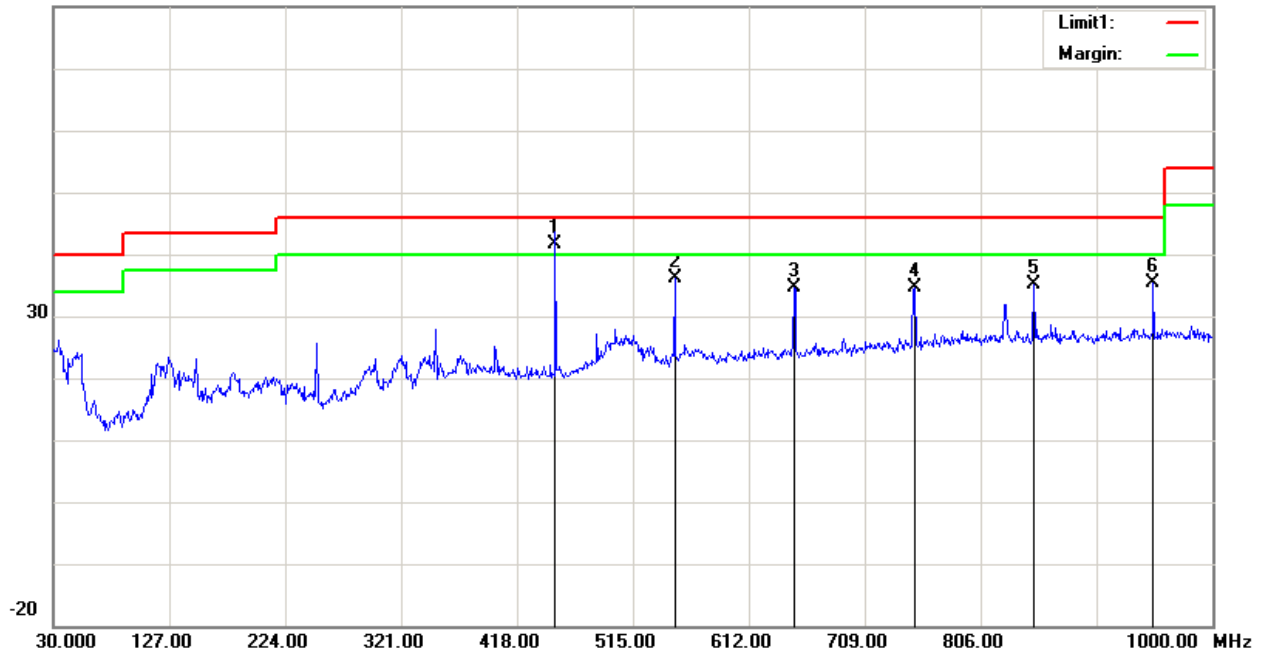

No.	Frequency (MHz)	Reading (dBuV)	Detector	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	450.0100	47.17	QP	-5.47	41.70	46.00	4.30
2	549.9200	39.65	peak	-3.43	36.22	46.00	9.78
3	649.8300	36.52	peak	-1.88	34.64	46.00	11.36
4	750.7100	34.97	peak	-0.31	34.66	46.00	11.34
5	850.6200	34.12	peak	0.90	35.02	46.00	10.98
6	950.5300	33.43	peak	2.04	35.47	46.00	10.53


3) 1-18GHz:

802.11a mode, 5320MHz, Horizontal

Project No.: XMDN240122-04868E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-2A_high channel 5320MHz

Serial No.: 2G22-1
Tester: Leo Xiao

Date: 2024-04-12

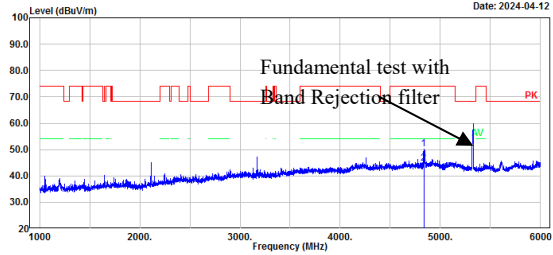


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4834.00	53.03	-2.94	50.09	74.00	23.91	Peak
2	4834.00	47.59	-2.94	44.65	54.00	9.35	Average

802.11a mode, 5320MHz, Vertical

Project No.: XMDN240122-04868E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-2A_high channel 5320MHz

Serial No.: 2G22-1
Tester: Leo Xiao

Date: 2024-04-12

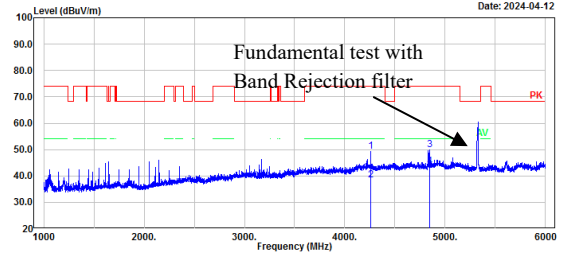


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4256.00	52.80	-3.56	49.24	74.00	24.76	Peak
2	4256.00	41.87	-3.56	38.31	54.00	15.69	Average
3	4848.00	52.85	-2.88	49.97	74.00	24.03	Peak
4	4848.00	46.50	-2.88	43.62	54.00	10.38	Average

Project No.: XMDN240122-04868E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-2A_high channel 5320MHz

Serial No.: 2G22-1
Tester: Leo Xiao

Date: 2024-04-12

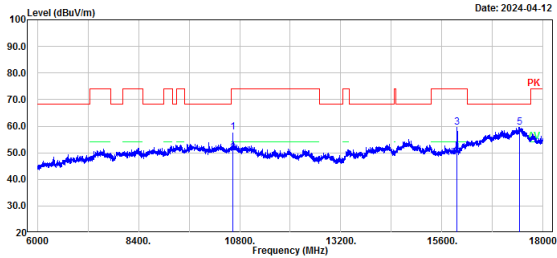


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10640.00	51.21	6.55	57.76	74.00	16.24	Peak
2	10640.00	43.21	6.55	49.76	54.00	4.24	Average
3	15960.00	54.04	5.49	59.53	74.00	14.47	Peak
4	15960.00	44.28	5.49	49.77	54.00	4.23	Average
5	17433.60	44.34	15.34	59.68	68.20	8.52	Peak

Project No.: XMDN240122-04868E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-2A_high channel 5320MHz

Serial No.: 2G22-1
Tester: Leo Xiao

Date: 2024-04-12

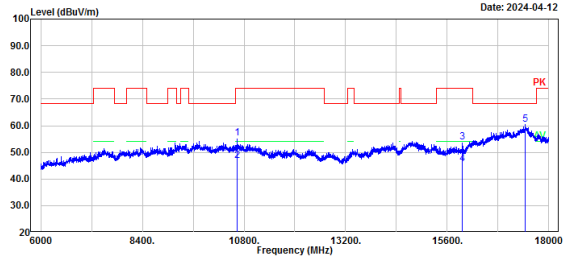


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	10640.00	48.86	6.55	55.41	74.00	18.59	Peak
2	10640.00	40.19	6.55	46.74	54.00	7.26	Average
3	15960.00	48.45	5.49	53.94	74.00	20.06	Peak
4	15960.00	40.21	5.49	45.70	54.00	8.30	Average
5	17440.80	45.05	15.40	60.45	68.20	7.75	Peak

802.11a mode, 5320MHz, Bandedge, Horizontal

Project No.: XMDN240122-04868E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 802.11a_U-NII-2A_high channel 5320MHz

Serial No.: 2622-1
Tester: Leo Xiao

Date: 2024-04-12

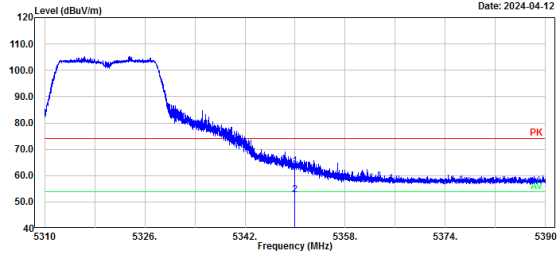


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.00	34.27	29.15	63.42	74.00	10.58	Peak
2	5350.00	23.49	29.15	52.64	54.00	1.36	Average

802.11a mode, 5320MHz, Bandedge, Vertical

Project No.: XMDN240122-04868E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 802.11a_U-NII-2A_high channel 5320MHz

Serial No.: 2622-1
Tester: Leo Xiao


Date: 2024-04-12

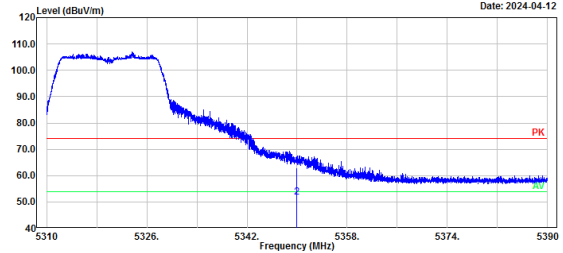

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5350.00	33.92	29.15	63.07	74.00	10.93	Peak
2	5350.00	22.63	29.15	51.78	54.00	2.22	Average

18-40GHz:

No Emission was detected in the range 18-40GHz, test was performed on the mode and channel which with the maximum power.

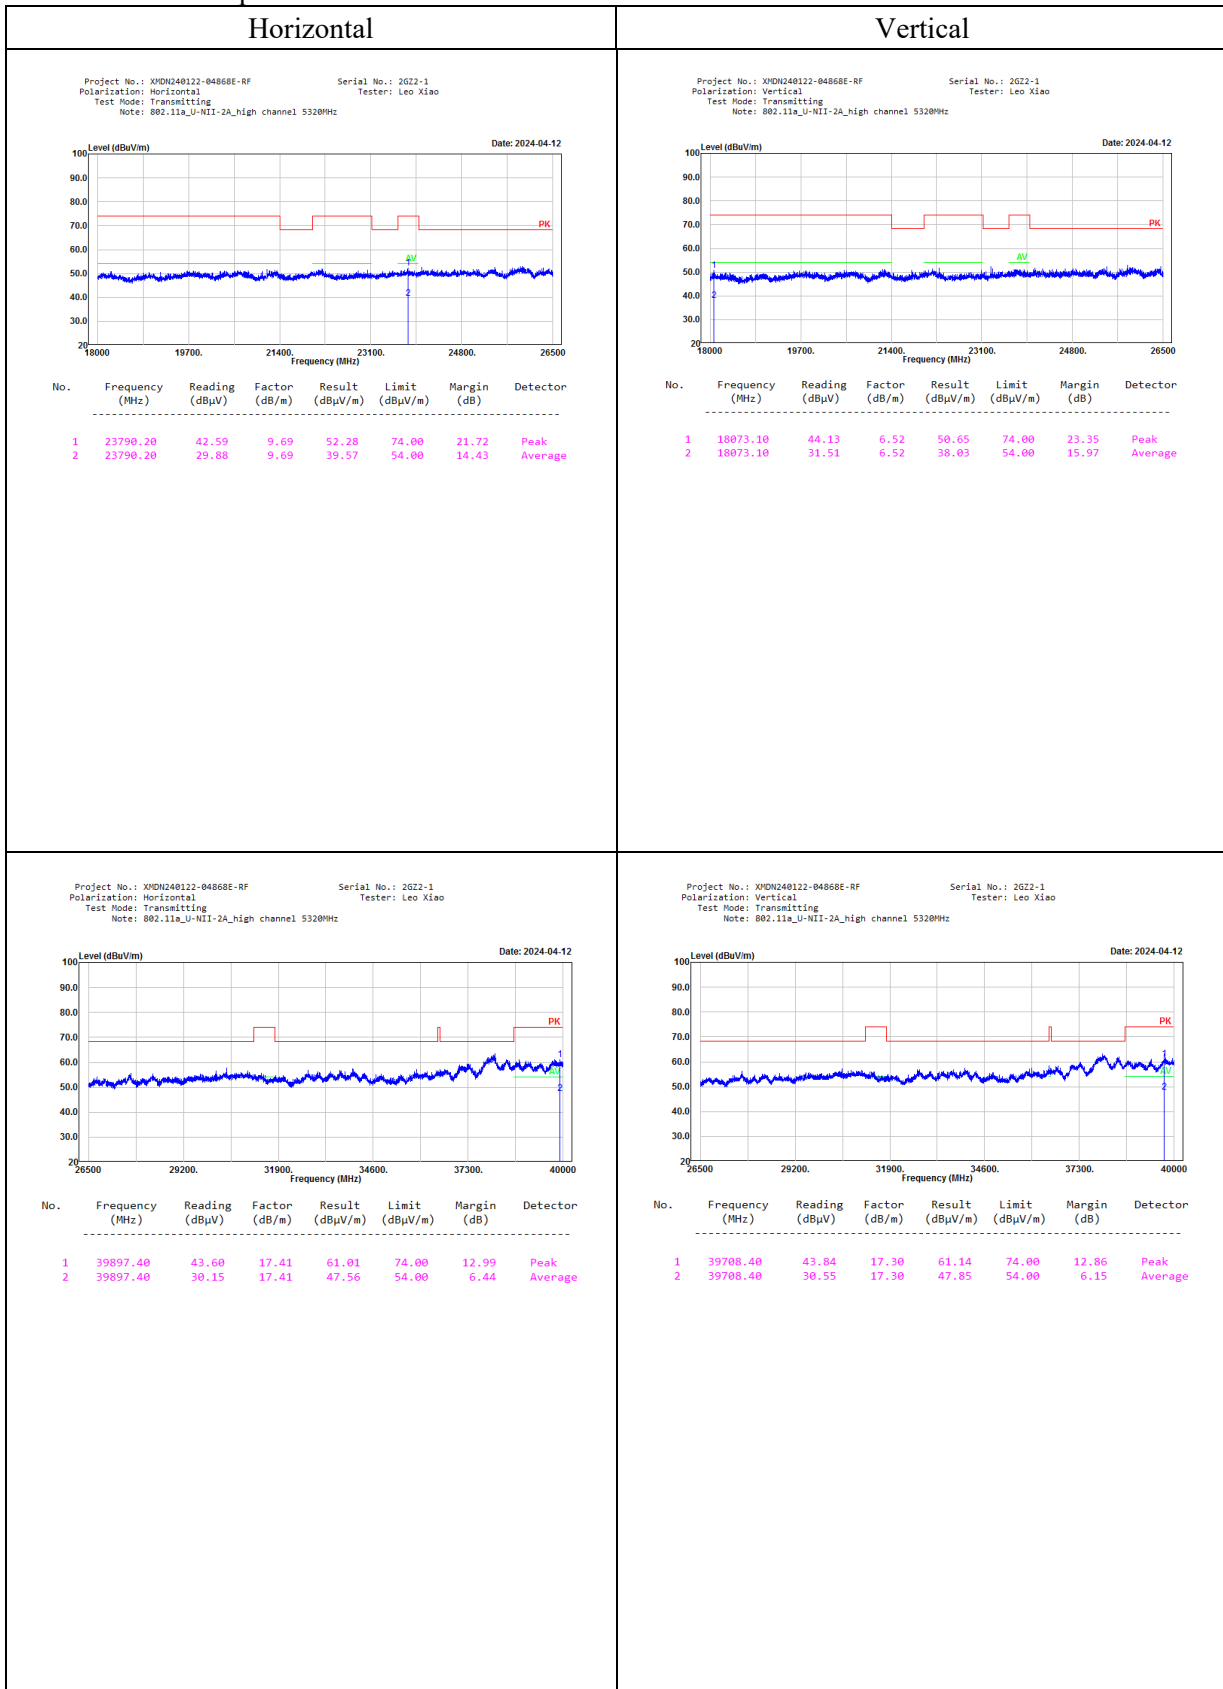

802.11a_U-NII-1_low channel

Frequency 5180 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5150.00	30.99	PK	H	33.21	1.55	0.00	65.75	59.75	74.00	14.25
5150.00	20.03	AV	H	33.21	1.55	0.00	54.79	48.79	54.00	5.21
5150.00	31.05	PK	V	33.21	1.55	0.00	65.81	59.81	74.00	14.19
5150.00	20.73	AV	V	33.21	1.55	0.00	55.49	49.49	54.00	4.51
10360.00	47.17	PK	H	38.27	3.99	35.69	53.74	53.74	68.20	14.46
10360.00	45.63	PK	V	38.27	3.99	35.69	52.20	52.2	68.20	16.00
15540.00	44.58	PK	H	37.64	5.83	38.80	49.25	49.25	74.00	24.75
15540.00	34.47	AV	H	37.64	5.83	38.80	39.14	39.14	54.00	14.86
15540.00	44.75	PK	V	37.64	5.83	38.80	49.42	49.42	74.00	24.58
15540.00	34.61	AV	V	37.64	5.83	38.80	39.28	39.28	54.00	14.72

802.11a_U-NII-1_middle channel

Frequency 5200 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
10400.00	48.94	PK	H	38.28	4.00	35.69	55.53	55.53	68.20	12.67
10400.00	47.16	PK	V	38.28	4.00	35.69	53.75	53.75	68.20	14.45
15600.00	46.61	PK	H	37.54	5.85	38.61	51.39	51.39	74.00	22.61
15600.00	38.25	AV	H	37.54	5.85	38.61	43.03	43.03	54.00	10.97
15600.00	44.29	PK	V	37.54	5.85	38.61	49.07	49.07	74.00	24.93
15600.00	34.11	AV	V	37.54	5.85	38.61	38.89	38.89	54.00	15.11

802.11a_U-NII-1_high channel

Frequency 5240 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5350.00	29.11	PK	H	33.49	1.66	0.00	64.26	58.26	74.00	15.74
5350.00	18.53	AV	H	33.49	1.66	0.00	53.68	47.68	54.00	6.32
5350.00	28.72	PK	V	33.49	1.66	0.00	63.87	57.87	74.00	16.13
5350.00	18.33	AV	V	33.49	1.66	0.00	53.48	47.48	54.00	6.52
10480.00	48.28	PK	H	38.30	4.04	35.71	54.91	54.91	68.20	13.29
10480.00	46.59	PK	V	38.30	4.04	35.71	53.22	53.22	68.20	14.98
15720.00	48.15	PK	H	37.35	5.89	38.22	53.17	53.17	74.00	20.83
15720.00	40.12	AV	H	37.35	5.89	38.22	45.14	45.14	54.00	8.86
15720.00	45.50	PK	V	37.35	5.89	38.22	50.52	50.52	74.00	23.48
15720.00	35.46	AV	V	37.35	5.89	38.22	40.48	40.48	54.00	13.52

802.11n20_U-NII-1_low channel

Frequency 5180 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5150.00	32.82	PK	H	33.21	1.55	0.00	67.58	61.58	74.00	12.42
5150.00	20.39	AV	H	33.21	1.55	0.00	55.15	49.15	54.00	4.85
5150.00	32.09	PK	V	33.21	1.55	0.00	66.85	60.85	74.00	13.15
5150.00	20.55	AV	V	33.21	1.55	0.00	55.31	49.31	54.00	4.69
10360.00	46.57	PK	H	38.27	3.99	35.69	53.14	53.14	68.20	15.06
10360.00	45.98	PK	V	38.27	3.99	35.69	52.55	52.55	68.20	15.65
15540.00	44.36	PK	H	37.64	5.83	38.80	49.03	49.03	74.00	24.97
15540.00	34.15	AV	H	37.64	5.83	38.80	38.82	38.82	54.00	15.18
15540.00	44.59	PK	V	37.64	5.83	38.80	49.26	49.26	74.00	24.74
15540.00	34.32	AV	V	37.64	5.83	38.80	38.99	38.99	54.00	15.01

802.11n20_U-NII-1_middle channel

Frequency 5200 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
10400.00	48.37	PK	H	38.28	4.00	35.69	54.96	54.96	68.20	13.24
10400.00	46.04	PK	V	38.28	4.00	35.69	52.63	52.63	68.20	15.57
15600.00	45.30	PK	H	37.54	5.85	38.61	50.08	50.08	74.00	23.92
15600.00	35.02	AV	H	37.54	5.85	38.61	39.80	39.8	54.00	14.20
15600.00	44.74	PK	V	37.54	5.85	38.61	49.52	49.52	74.00	24.48
15600.00	34.68	AV	V	37.54	5.85	38.61	39.46	39.46	54.00	14.54

802.11n20_U-NII-1_high channel

Frequency 5240 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5350.00	28.66	PK	H	33.49	1.66	0.00	63.81	57.81	74.00	16.19
5350.00	18.85	AV	H	33.49	1.66	0.00	54.00	48	54.00	6.00
5350.00	28.90	PK	V	33.49	1.66	0.00	64.05	58.05	74.00	15.95
5350.00	18.09	AV	V	33.49	1.66	0.00	53.24	47.24	54.00	6.76
10480.00	48.52	PK	H	38.30	4.04	35.71	55.15	55.15	68.20	13.05
10480.00	46.35	PK	V	38.30	4.04	35.71	52.98	52.98	68.20	15.22
15720.00	47.90	PK	H	37.35	5.89	38.22	52.92	52.92	74.00	21.08
15720.00	39.34	AV	H	37.35	5.89	38.22	44.36	44.36	54.00	9.64
15720.00	44.25	PK	V	37.35	5.89	38.22	49.27	49.27	74.00	24.73
15720.00	36.12	AV	V	37.35	5.89	38.22	41.14	41.14	54.00	12.86

802.11n40_U-NII-1_low channel

Frequency 5190 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5150.00	31.55	PK	H	33.21	1.55	0.00	66.31	60.31	74.00	13.69
5150.00	20.30	AV	H	33.21	1.55	0.00	55.06	49.06	54.00	4.94
5150.00	30.64	PK	V	33.21	1.55	0.00	65.40	59.4	74.00	14.60
5150.00	20.09	AV	V	33.21	1.55	0.00	54.85	48.85	54.00	5.15
10380.00	46.88	PK	H	38.28	3.99	35.69	53.46	53.46	68.20	14.74
10380.00	45.11	PK	V	38.28	3.99	35.69	51.69	51.69	68.20	16.51
15570.00	45.12	PK	H	37.59	5.84	38.70	49.85	49.85	74.00	24.15
15570.00	35.33	AV	H	37.59	5.84	38.70	40.06	40.06	54.00	13.94
15570.00	45.32	PK	V	37.59	5.84	38.70	50.05	50.05	74.00	23.95
15570.00	35.07	AV	V	37.59	5.84	38.70	39.80	39.8	54.00	14.20

802.11n40_U-NII-1_high channel

Frequency 5230 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5350.00	29.32	PK	H	33.49	1.66	0.00	64.47	58.47	74.00	15.53
5350.00	18.50	AV	H	33.49	1.66	0.00	53.65	47.65	54.00	6.35
5350.00	29.55	PK	V	33.49	1.66	0.00	64.70	58.7	74.00	15.30
5350.00	18.33	AV	V	33.49	1.66	0.00	53.48	47.48	54.00	6.52
10460.00	45.66	PK	H	38.29	4.03	35.70	52.28	52.28	68.20	15.92
10460.00	45.35	PK	V	38.29	4.03	35.70	51.97	51.97	68.20	16.23
15690.00	48.71	PK	H	37.40	5.88	38.32	53.67	53.67	74.00	20.33
15690.00	38.63	AV	H	37.40	5.88	38.32	43.59	43.59	54.00	10.41
15690.00	45.04	PK	V	37.40	5.88	38.32	50.00	50	74.00	24.00
15690.00	35.10	AV	V	37.40	5.88	38.32	40.06	40.06	54.00	13.94

802.11ac20_U-NII-1_low channel Frequency 5180 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5150.00	32.95	PK	H	33.21	1.55	0.00	67.71	61.71	74.00	12.29
5150.00	20.13	AV	H	33.21	1.55	0.00	54.89	48.89	54.00	5.11
5150.00	33.28	PK	V	33.21	1.55	0.00	68.04	62.04	74.00	11.96
5150.00	21.06	AV	V	33.21	1.55	0.00	55.82	49.82	54.00	4.18
10360.00	50.25	PK	H	38.27	3.99	35.69	56.82	56.82	68.20	11.38
10360.00	47.59	PK	V	38.27	3.99	35.69	54.16	54.16	68.20	14.04
15540.00	44.42	PK	H	37.64	5.83	38.80	49.09	49.09	74.00	24.91
15540.00	34.09	AV	H	37.64	5.83	38.80	38.76	38.76	54.00	15.24
15540.00	44.71	PK	V	37.64	5.83	38.80	49.38	49.38	74.00	24.62
15540.00	34.42	AV	V	37.64	5.83	38.80	39.09	39.09	54.00	14.91

802.11ac20_U-NII-1_middle channel Frequency 5200 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
10400.00	50.26	PK	H	38.28	4.00	35.69	56.85	56.85	68.20	11.35
10400.00	48.52	PK	V	38.28	4.00	35.69	55.11	55.11	68.20	13.09
15600.00	46.30	PK	H	37.54	5.85	38.61	51.08	51.08	74.00	22.92
15600.00	35.09	AV	H	37.54	5.85	38.61	39.87	39.87	54.00	14.13
15600.00	44.91	PK	V	37.54	5.85	38.61	49.69	49.69	74.00	24.31
15600.00	34.31	AV	V	37.54	5.85	38.61	39.09	39.09	54.00	14.91

802.11ac20_U-NII-1_high channel Frequency 5240 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5350.00	28.21	PK	H	33.49	1.66	0.00	63.36	57.36	74.00	16.64
5350.00	18.26	AV	H	33.49	1.66	0.00	53.41	47.41	54.00	6.59
5350.00	28.65	PK	V	33.49	1.66	0.00	63.80	57.8	74.00	16.20
5350.00	18.52	AV	V	33.49	1.66	0.00	53.67	47.67	54.00	6.33
10480.00	52.16	PK	H	38.30	4.04	35.71	58.79	58.79	68.20	9.41
10480.00	47.11	PK	V	38.30	4.04	35.71	53.74	53.74	68.20	14.46
15720.00	55.46	PK	H	37.35	5.89	38.22	60.48	60.48	74.00	13.52
15720.00	44.47	AV	H	37.35	5.89	38.22	49.49	49.49	54.00	4.51
15720.00	46.03	PK	V	37.35	5.89	38.22	51.05	51.05	74.00	22.95
15720.00	35.59	AV	V	37.35	5.89	38.22	40.61	40.61	54.00	13.39

802.11ac40_U-NII-1_low channel

Frequency 5190 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5150.00	29.63	PK	H	33.21	1.55	0.00	64.39	58.39	74.00	15.61
5150.00	19.28	AV	H	33.21	1.55	0.00	54.04	48.04	54.00	5.96
5150.00	31.23	PK	V	33.21	1.55	0.00	65.99	59.99	74.00	14.01
5150.00	19.68	AV	V	33.21	1.55	0.00	54.44	48.44	54.00	5.56
10380.00	48.16	PK	H	38.28	3.99	35.69	54.74	54.74	68.20	13.46
10380.00	46.54	PK	V	38.28	3.99	35.69	53.12	53.12	68.20	15.08
15570.00	48.40	PK	H	37.59	5.84	38.70	53.13	53.13	74.00	20.87
15570.00	38.79	AV	H	37.59	5.84	38.70	43.52	43.52	54.00	10.48
15570.00	45.08	PK	V	37.59	5.84	38.70	49.81	49.81	74.00	24.19
15570.00	35.41	AV	V	37.59	5.84	38.70	40.14	40.14	54.00	13.86

802.11ac40_U-NII-1_high channel

Frequency 5230 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5350.00	29.69	PK	H	33.49	1.66	0.00	64.84	58.84	74.00	15.16
5350.00	19.16	AV	H	33.49	1.66	0.00	54.31	48.31	54.00	5.69
5350.00	29.90	PK	V	33.49	1.66	0.00	65.05	59.05	74.00	14.95
5350.00	19.69	AV	V	33.49	1.66	0.00	54.84	48.84	54.00	5.16
10460.00	45.77	PK	H	38.29	4.03	35.70	52.39	52.39	68.20	15.81
10460.00	46.79	PK	V	38.29	4.03	35.70	53.41	53.41	68.20	14.79
15690.00	49.64	PK	H	37.40	5.88	38.32	54.60	54.6	74.00	19.40
15690.00	39.74	AV	H	37.40	5.88	38.32	44.70	44.7	54.00	9.30
15690.00	45.09	PK	V	37.40	5.88	38.32	50.05	50.05	74.00	23.95
15690.00	35.39	AV	V	37.40	5.88	38.32	40.35	40.35	54.00	13.65

802.11ac80_U-NII-1_low channel

Frequency 5210 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5150.00	32.59	PK	H	33.21	1.55	0.00	67.35	61.35	74.00	12.65
5150.00	22.86	AV	H	33.21	1.55	0.00	57.62	51.62	54.00	2.38
5150.00	32.38	PK	V	33.21	1.55	0.00	67.14	61.14	74.00	12.86
5150.00	22.44	AV	V	33.21	1.55	0.00	57.20	51.2	54.00	2.80
10420.00	47.15	PK	H	38.28	4.01	35.70	53.74	53.74	68.20	14.46
10420.00	44.39	PK	V	38.28	4.01	35.70	50.98	50.98	68.20	17.22
15630.00	45.87	PK	H	37.49	5.86	38.51	50.71	50.71	74.00	23.29
15630.00	35.22	AV	H	37.49	5.86	38.51	40.06	40.06	54.00	13.94
15630.00	46.26	PK	V	37.49	5.86	38.51	51.10	51.1	74.00	22.90
15630.00	36.40	AV	V	37.49	5.86	38.51	41.24	41.24	54.00	12.76

802.11a_U-NII-2A_low channel

Frequency 5260 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5150.00	29.53	PK	H	33.21	1.55	0.00	64.29	58.29	74.00	15.71
5150.00	18.40	AV	H	33.21	1.55	0.00	53.16	47.16	54.00	6.84
5150.00	28.78	PK	V	33.21	1.55	0.00	63.54	57.54	74.00	16.46
5150.00	18.46	AV	V	33.21	1.55	0.00	53.22	47.22	54.00	6.78
10520.00	49.92	PK	H	38.29	4.06	35.72	56.55	56.55	68.20	11.65
10520.00	45.83	PK	V	38.29	4.06	35.72	52.46	52.46	68.20	15.74
15780.00	51.78	PK	H	37.25	5.92	38.03	56.92	56.92	74.00	17.08
15780.00	43.32	AV	H	37.25	5.92	38.03	48.46	48.46	54.00	5.54
15780.00	46.32	PK	V	37.25	5.92	38.03	51.46	51.46	74.00	22.54
15780.00	38.72	AV	V	37.25	5.92	38.03	43.86	43.86	54.00	10.14

802.11a_U-NII-2A_middle channel

Frequency 5280 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
10560.00	50.97	PK	H	38.28	4.07	35.74	57.58	57.58	68.20	10.62
10560.00	46.68	PK	V	38.28	4.07	35.74	53.29	53.29	68.20	14.91
15840.00	51.85	PK	H	37.16	5.94	37.84	57.11	57.11	74.00	16.89
15840.00	43.57	AV	H	37.16	5.94	37.84	48.83	48.83	54.00	5.17
15840.00	49.04	PK	V	37.16	5.94	37.84	54.30	54.3	74.00	19.70
15840.00	40.85	AV	V	37.16	5.94	37.84	46.11	46.11	54.00	7.89

802.11a_U-NII-2A_high channel

Frequency 5320 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5350.00	34.27	PK	H	33.49	1.66	0.00	69.42	63.42	74.00	10.58
5350.00	23.49	AV	H	33.49	1.66	0.00	58.64	52.64	54.00	1.36
5350.00	33.92	PK	V	33.49	1.66	0.00	69.07	63.07	74.00	10.93
5350.00	22.63	AV	V	33.49	1.66	0.00	57.78	51.78	54.00	2.22
10640.00	51.21	PK	H	38.24	4.10	35.79	57.76	57.76	74.00	16.24
10640.00	43.21	AV	H	38.24	4.10	35.79	49.76	49.76	54.00	4.24
10640.00	48.86	PK	V	38.24	4.10	35.79	55.41	55.41	74.00	18.59
10640.00	40.19	AV	V	38.24	4.10	35.79	46.74	46.74	54.00	7.26
15960.00	54.04	PK	H	36.96	5.98	37.45	59.53	59.53	74.00	14.47
15960.00	44.28	AV	H	36.96	5.98	37.45	49.77	49.77	54.00	4.23
15960.00	48.45	PK	V	36.96	5.98	37.45	53.94	53.94	74.00	20.06
15960.00	40.21	AV	V	36.96	5.98	37.45	45.70	45.7	54.00	8.30

802.11n20_U-NII-2A_low channel

Frequency 5260 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5150.00	28.60	PK	H	33.21	1.55	0.00	63.36	57.36	74.00	16.64
5150.00	18.52	AV	H	33.21	1.55	0.00	53.28	47.28	54.00	6.72
5150.00	28.67	PK	V	33.21	1.55	0.00	63.43	57.43	74.00	16.57
5150.00	18.27	AV	V	33.21	1.55	0.00	53.03	47.03	54.00	6.97
10520.00	48.48	PK	H	38.29	4.06	35.72	55.11	55.11	68.20	13.09
10520.00	45.48	PK	V	38.29	4.06	35.72	52.11	52.11	68.20	16.09
15780.00	49.28	PK	H	37.25	5.92	38.03	54.42	54.42	74.00	19.58
15780.00	41.24	AV	H	37.25	5.92	38.03	46.38	46.38	54.00	7.62
15780.00	45.46	PK	V	37.25	5.92	38.03	50.60	50.6	74.00	23.40
15780.00	37.45	AV	V	37.25	5.92	38.03	42.59	42.59	54.00	11.41

802.11n20_U-NII-2A_middle channel

Frequency 5280 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
10560.00	48.92	PK	H	38.28	4.07	35.74	55.53	55.53	68.20	12.67
10560.00	46.50	PK	V	38.28	4.07	35.74	53.11	53.11	68.20	15.09
15840.00	48.82	PK	H	37.16	5.94	37.84	54.08	54.08	74.00	19.92
15840.00	40.29	AV	H	37.16	5.94	37.84	45.55	45.55	54.00	8.45
15840.00	45.57	PK	V	37.16	5.94	37.84	50.83	50.83	74.00	23.17
15840.00	37.20	AV	V	37.16	5.94	37.84	42.46	42.46	54.00	11.54

802.11n20_U-NII-2A_high channel

Frequency 5320 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5350.00	30.44	PK	H	33.49	1.66	0.00	65.59	59.59	74.00	14.41
5350.00	19.18	AV	H	33.49	1.66	0.00	54.33	48.33	54.00	5.67
5350.00	29.47	PK	V	33.49	1.66	0.00	64.62	58.62	74.00	15.38
5350.00	18.73	AV	V	33.49	1.66	0.00	53.88	47.88	54.00	6.12
10640.00	47.34	PK	H	38.24	4.10	35.79	53.89	53.89	74.00	20.11
10640.00	39.24	AV	H	38.24	4.10	35.79	45.79	45.79	54.00	8.21
10640.00	46.19	PK	V	38.24	4.10	35.79	52.74	52.74	74.00	21.26
10640.00	38.12	AV	V	38.24	4.10	35.79	44.67	44.67	54.00	9.33
15960.00	45.38	PK	H	36.96	5.98	37.45	50.87	50.87	74.00	23.13
15960.00	37.56	AV	H	36.96	5.98	37.45	43.05	43.05	54.00	10.95
15960.00	45.15	PK	V	36.96	5.98	37.45	50.64	50.64	74.00	23.36
15960.00	37.23	AV	V	36.96	5.98	37.45	42.72	42.72	54.00	11.28

802.11n40_U-NII-2A_low channel

Frequency 5270 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5150.00	28.11	PK	H	33.21	1.55	0.00	62.87	56.87	74.00	17.13
5150.00	18.26	AV	H	33.21	1.55	0.00	53.02	47.02	54.00	6.98
5150.00	29.19	PK	V	33.21	1.55	0.00	63.95	57.95	74.00	16.05
5150.00	18.80	AV	V	33.21	1.55	0.00	53.56	47.56	54.00	6.44
10540.00	47.26	PK	H	38.28	4.06	35.73	53.87	53.87	68.20	14.33
10540.00	45.59	PK	V	38.28	4.06	35.73	52.20	52.2	68.20	16.00
15810.00	49.11	PK	H	37.20	5.93	37.93	54.31	54.31	74.00	19.69
15810.00	40.18	AV	H	37.20	5.93	37.93	45.38	45.38	54.00	8.62
15810.00	45.26	PK	V	37.20	5.93	37.93	50.46	50.46	74.00	23.54
15810.00	36.12	AV	V	37.20	5.93	37.93	41.32	41.32	54.00	12.68

802.11n40_U-NII-2A_high channel

Frequency 5310 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5350.00	30.65	PK	H	33.49	1.66	0.00	65.80	59.8	74.00	14.20
5350.00	19.78	AV	H	33.49	1.66	0.00	54.93	48.93	54.00	5.07
5350.00	30.27	PK	V	33.49	1.66	0.00	65.42	59.42	74.00	14.58
5350.00	19.08	AV	V	33.49	1.66	0.00	54.23	48.23	54.00	5.77
10620.00	46.55	PK	H	38.25	4.09	35.77	53.12	53.12	74.00	20.88
10620.00	37.32	AV	H	38.25	4.09	35.77	43.89	43.89	54.00	10.11
10620.00	45.63	PK	V	38.25	4.09	35.77	52.20	52.2	74.00	21.80
10620.00	36.38	AV	V	38.25	4.09	35.77	42.95	42.95	54.00	11.05
15930.00	45.29	PK	H	37.01	5.97	37.55	50.72	50.72	74.00	23.28
15930.00	36.27	AV	H	37.01	5.97	37.55	41.70	41.7	54.00	12.30
15930.00	45.34	PK	V	37.01	5.97	37.55	50.77	50.77	74.00	23.23
15930.00	36.08	AV	V	37.01	5.97	37.55	41.51	41.51	54.00	12.49

802.11ac20_U-NII-2A_low channel

Frequency 5260 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5150.00	28.32	PK	H	33.21	1.55	0.00	63.08	57.08	74.00	16.92
5150.00	18.39	AV	H	33.21	1.55	0.00	53.15	47.15	54.00	6.85
5150.00	28.25	PK	V	33.21	1.55	0.00	63.01	57.01	74.00	16.99
5150.00	18.89	AV	V	33.21	1.55	0.00	53.65	47.65	54.00	6.35
10520.00	55.49	PK	H	38.29	4.06	35.72	62.12	62.12	68.20	6.08
10520.00	48.78	PK	V	38.29	4.06	35.72	55.41	55.41	68.20	12.79
15780.00	44.21	PK	H	37.25	5.92	38.03	49.35	49.35	74.00	24.65
15780.00	34.76	AV	H	37.25	5.92	38.03	39.90	39.9	54.00	14.10
15780.00	45.91	PK	V	37.25	5.92	38.03	51.05	51.05	74.00	22.95
15780.00	35.19	AV	V	37.25	5.92	38.03	40.33	40.33	54.00	13.67

802.11ac20_U-NII-2A_middle channel

Frequency 5280 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
10560.00	52.57	PK	H	38.28	4.07	35.74	59.18	59.18	68.20	9.02
10560.00	48.60	PK	V	38.28	4.07	35.74	55.21	55.21	68.20	12.99
15840.00	44.29	PK	H	37.16	5.94	37.84	49.55	49.55	74.00	24.45
15840.00	34.95	AV	H	37.16	5.94	37.84	40.21	40.21	54.00	13.79
15840.00	44.47	PK	V	37.16	5.94	37.84	49.73	49.73	74.00	24.27
15840.00	34.97	AV	V	37.16	5.94	37.84	40.23	40.23	54.00	13.77

802.11ac20_U-NII-2A_high channel

Frequency 5320 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5350.00	30.16	PK	H	33.49	1.66	0.00	65.31	59.31	74.00	14.69
5350.00	19.77	AV	H	33.49	1.66	0.00	54.92	48.92	54.00	5.08
5350.00	32.87	PK	V	33.49	1.66	0.00	68.02	62.02	74.00	11.98
5350.00	19.37	AV	V	33.49	1.66	0.00	54.52	48.52	54.00	5.48
10640.00	44.38	PK	H	38.24	4.10	35.79	50.93	50.93	74.00	23.07
10640.00	44.57	PK	V	38.24	4.10	35.79	51.12	51.12	74.00	22.88
15960.00	44.82	PK	H	36.96	5.98	37.45	50.31	50.31	74.00	23.69
15960.00	34.22	AV	H	36.96	5.98	37.45	39.71	39.71	54.00	14.29
15960.00	44.94	PK	V	36.96	5.98	37.45	50.43	50.43	74.00	23.57
15960.00	34.58	AV	V	36.96	5.98	37.45	40.07	40.07	54.00	13.93

802.11ac40_U-NII-2A_low channel

Frequency 5270 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5150.00	28.60	PK	H	33.21	1.55	0.00	63.36	57.36	74.00	16.64
5150.00	18.88	AV	H	33.21	1.55	0.00	53.64	47.64	54.00	6.36
5150.00	28.64	PK	V	33.21	1.55	0.00	63.40	57.4	74.00	16.60
5150.00	18.36	AV	V	33.21	1.55	0.00	53.12	47.12	54.00	6.88
10540.00	54.68	PK	H	38.28	4.06	35.73	61.29	61.29	68.20	6.91
10540.00	47.81	PK	V	38.28	4.06	35.73	54.42	54.42	68.20	13.78
15810.00	44.18	PK	H	37.20	5.93	37.93	49.38	49.38	74.00	24.62
15810.00	34.76	AV	H	37.20	5.93	37.93	39.96	39.96	54.00	14.04
15810.00	45.60	PK	V	37.20	5.93	37.93	50.80	50.8	74.00	23.20
15810.00	35.40	AV	V	37.20	5.93	37.93	40.60	40.6	54.00	13.40

802.11ac40_U-NII-2A_high channel

Frequency 5310 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5350.00	31.84	PK	H	33.49	1.66	0.00	66.99	60.99	74.00	13.01
5350.00	18.86	AV	H	33.49	1.66	0.00	54.01	48.01	54.00	5.99
5350.00	29.78	PK	V	33.49	1.66	0.00	64.93	58.93	74.00	15.07
5350.00	19.18	AV	V	33.49	1.66	0.00	54.33	48.33	54.00	5.67
10620.00	45.76	PK	H	38.25	4.09	35.77	52.33	52.33	74.00	21.67
10620.00	35.76	AV	H	38.25	4.09	35.77	42.33	42.33	54.00	11.67
10620.00	44.66	PK	V	38.25	4.09	35.77	51.23	51.23	74.00	22.77
10620.00	34.19	AV	V	38.25	4.09	35.77	40.76	40.76	54.00	13.24
15930.00	44.47	PK	H	37.01	5.97	37.55	49.90	49.9	74.00	24.10
15930.00	34.21	AV	H	37.01	5.97	37.55	39.64	39.64	54.00	14.36
15930.00	44.13	PK	V	37.01	5.97	37.55	49.56	49.56	74.00	24.44
15930.00	34.64	AV	V	37.01	5.97	37.55	40.07	40.07	54.00	13.93

802.11ac80_U-NII-2A_low channel

Frequency 5290 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5150.00	30.95	PK	H	33.21	1.55	0.00	65.71	59.71	74.00	14.29
5150.00	20.11	AV	H	33.21	1.55	0.00	54.87	48.87	54.00	5.13
5150.00	31.28	PK	V	33.21	1.55	0.00	66.04	60.04	74.00	13.96
5150.00	20.37	AV	V	33.21	1.55	0.00	55.13	49.13	54.00	4.87
10580.00	46.98	PK	H	38.27	4.08	35.75	53.58	53.58	68.20	14.62
10580.00	45.67	PK	V	38.27	4.08	35.75	52.27	52.27	68.20	15.93
15870.00	45.79	PK	H	37.11	5.95	37.74	51.11	51.11	74.00	22.89
15870.00	35.39	AV	H	37.11	5.95	37.74	40.71	40.71	54.00	13.29
15870.00	44.82	PK	V	37.11	5.95	37.74	50.14	50.14	74.00	23.86
15870.00	34.96	AV	V	37.11	5.95	37.74	40.28	40.28	54.00	13.72

802.11a_U-NII-2C_low channel

Frequency 5500 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5470.00	34.70	PK	H	33.66	1.70	0.00	70.06	64.06	68.20	4.14
5470.00	35.23	PK	V	33.66	1.70	0.00	70.59	64.59	68.20	3.61
11000.00	49.19	PK	H	38.10	4.23	35.98	55.54	55.54	74.00	18.46
11000.00	43.21	AV	H	38.10	4.23	35.98	49.56	49.56	54.00	4.44
11000.00	49.22	PK	V	38.10	4.23	35.98	55.57	55.57	74.00	18.43
11000.00	43.07	AV	V	38.10	4.23	35.98	49.42	49.42	54.00	4.58
16500.00	45.38	PK	H	37.60	6.14	34.38	54.74	54.74	68.20	13.46
16500.00	49.64	PK	V	37.60	6.14	34.38	59.00	59	68.20	9.20

802.11a_U-NII-2C_middle channel

Frequency 5580 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
11160.00	48.04	PK	H	38.10	4.34	36.77	53.71	53.71	74.00	20.29
11160.00	41.75	AV	H	38.10	4.34	36.77	47.42	47.42	54.00	6.58
11160.00	50.09	PK	V	38.10	4.34	36.77	55.76	55.76	74.00	18.24
11160.00	43.68	AV	V	38.10	4.34	36.77	49.35	49.35	54.00	4.65
16740.00	47.37	PK	H	38.42	6.18	34.02	57.95	57.95	68.20	10.25
16740.00	46.07	PK	V	38.42	6.18	34.02	56.65	56.65	68.20	11.55

802.11a_U-NII-2C_high channel Frequency 5700 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5725.00	35.35	PK	H	33.97	1.84	0.00	71.16	65.16	68.20	3.04
5725.00	35.71	PK	V	33.97	1.84	0.00	71.52	65.52	68.20	2.68
11400.00	46.33	PK	H	38.10	4.49	37.95	50.97	50.97	74.00	23.03
11400.00	40.21	AV	H	38.10	4.49	37.95	44.85	44.85	54.00	9.15
11400.00	45.64	PK	V	38.10	4.49	37.95	50.28	50.28	74.00	23.72
11400.00	39.22	AV	V	38.10	4.49	37.95	43.86	43.86	54.00	10.14
17100.00	44.15	PK	H	39.58	6.28	33.17	56.84	56.84	68.20	11.36
17100.00	44.27	PK	V	39.58	6.28	33.17	56.96	56.96	68.20	11.24

802.11n20_U-NII-2C_low channel Frequency 5500 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5470.00	34.64	PK	H	33.66	1.70	0.00	70.00	64	68.20	4.20
5470.00	34.32	PK	V	33.66	1.70	0.00	69.68	63.68	68.20	4.52
11000.00	50.04	PK	H	38.10	4.23	35.98	56.39	56.39	74.00	17.61
11000.00	42.74	AV	H	38.10	4.23	35.98	49.09	49.09	54.00	4.91
11000.00	49.56	PK	V	38.10	4.23	35.98	55.91	55.91	74.00	18.09
11000.00	42.84	AV	V	38.10	4.23	35.98	49.19	49.19	54.00	4.81
16500.00	48.66	PK	H	37.60	6.14	34.38	58.02	58.02	68.20	10.18
16500.00	45.55	PK	V	37.60	6.14	34.38	54.91	54.91	68.20	13.29

802.11n20_U-NII-2C_middle channel Frequency 5580 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
11160.00	47.95	PK	H	38.10	4.34	36.77	53.62	53.62	74.00	20.38
11160.00	39.32	AV	H	38.10	4.34	36.77	44.99	44.99	54.00	9.01
11160.00	48.44	PK	V	38.10	4.34	36.77	54.11	54.11	74.00	19.89
11160.00	40.16	AV	V	38.10	4.34	36.77	45.83	45.83	54.00	8.17
16740.00	47.03	PK	H	38.42	6.18	34.02	57.61	57.61	68.20	10.59
16740.00	44.25	PK	V	38.42	6.18	34.02	54.83	54.83	68.20	13.37

802.11n20_U-NII-2C_high channel

Frequency 5700 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5725.00	35.31	PK	H	33.97	1.84	0.00	71.12	65.12	68.20	3.08
5725.00	34.76	PK	V	33.97	1.84	0.00	70.57	64.57	68.20	3.63
11400.00	46.33	PK	H	38.10	4.49	37.95	50.97	50.97	74.00	23.03
11400.00	38.05	AV	H	38.10	4.49	37.95	42.69	42.69	54.00	11.31
11400.00	45.33	PK	V	38.10	4.49	37.95	49.97	49.97	74.00	24.03
11400.00	37.29	AV	V	38.10	4.49	37.95	41.93	41.93	54.00	12.07
17100.00	44.34	PK	H	39.58	6.28	33.17	57.03	57.03	68.20	11.17
17100.00	43.85	PK	V	39.58	6.28	33.17	56.54	56.54	68.20	11.66

802.11n40_U-NII-2C_low channel

Frequency 5510 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5470.00	34.52	PK	H	33.66	1.70	0.00	69.88	63.88	68.20	4.32
5470.00	35.54	PK	V	33.66	1.70	0.00	70.90	64.9	68.20	3.30
11020.00	46.18	PK	H	38.10	4.24	36.08	52.44	52.44	74.00	21.56
11020.00	36.34	AV	H	38.10	4.24	36.08	42.60	42.6	54.00	11.40
11020.00	45.75	PK	V	38.10	4.24	36.08	52.01	52.01	74.00	21.99
11020.00	35.26	AV	V	38.10	4.24	36.08	41.52	41.52	54.00	12.48
16530.00	44.39	PK	H	37.70	6.15	34.34	53.90	53.9	68.20	14.30
16530.00	44.48	PK	V	37.70	6.15	34.34	53.99	53.99	68.20	14.21

802.11n40_U-NII-2C_middle channel

Frequency 5550 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
11100.00	47.27	PK	H	38.10	4.30	36.47	53.20	53.2	74.00	20.80
11100.00	37.12	AV	H	38.10	4.30	36.47	43.05	43.05	54.00	10.95
11100.00	47.22	PK	V	38.10	4.30	36.47	53.15	53.15	74.00	20.85
11100.00	37.17	AV	V	38.10	4.30	36.47	43.10	43.1	54.00	10.90
16650.00	45.07	PK	H	38.11	6.17	34.16	55.19	55.19	68.20	13.01
16650.00	45.26	PK	V	38.11	6.17	34.16	55.38	55.38	68.20	12.82

802.11n40_U-NII-2C_high channel

Frequency 5670 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5725.00	35.42	PK	H	33.97	1.84	0.00	71.23	65.23	68.20	2.97
5725.00	35.12	PK	V	33.97	1.84	0.00	70.93	64.93	68.20	3.27
11340.00	47.06	PK	H	38.10	4.45	37.65	51.96	51.96	74.00	22.04
11340.00	36.88	AV	H	38.10	4.45	37.65	41.78	41.78	54.00	12.22
11340.00	45.63	PK	V	38.10	4.45	37.65	50.53	50.53	74.00	23.47
11340.00	35.22	AV	V	38.10	4.45	37.65	40.12	40.12	54.00	13.88
17010.00	43.89	PK	H	39.33	6.24	33.58	55.88	55.88	68.20	12.32
17010.00	44.01	PK	V	39.33	6.24	33.58	56.00	56	68.20	12.20

802.11ac20_U-NII-2C_low channel

Frequency 5500 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5470.00	29.52	PK	H	33.66	1.70	0.00	64.88	58.88	68.20	9.32
5470.00	30.41	PK	V	33.66	1.70	0.00	65.77	59.77	68.20	8.43
11000.00	44.23	PK	H	38.10	4.23	35.98	50.58	50.58	74.00	23.42
11000.00	34.44	AV	H	38.10	4.23	35.98	40.79	40.79	54.00	13.21
11000.00	44.21	PK	V	38.10	4.23	35.98	50.56	50.56	74.00	23.44
11000.00	34.14	AV	V	38.10	4.23	35.98	40.49	40.49	54.00	13.51
16500.00	44.45	PK	H	37.60	6.14	34.38	53.81	53.81	68.20	14.39
16500.00	44.53	PK	V	37.60	6.14	34.38	53.89	53.89	68.20	14.31

802.11ac20_U-NII-2C_middle channel

Frequency 5580 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
11160.00	44.33	PK	H	38.10	4.34	36.77	50.00	50	74.00	24.00
11160.00	34.10	AV	H	38.10	4.34	36.77	39.77	39.77	54.00	14.23
11160.00	44.03	PK	V	38.10	4.34	36.77	49.70	49.7	74.00	24.30
11160.00	34.23	AV	V	38.10	4.34	36.77	39.90	39.9	54.00	14.10
16740.00	44.31	PK	H	38.42	6.18	34.02	54.89	54.89	68.20	13.31
16740.00	44.85	PK	V	38.42	6.18	34.02	55.43	55.43	68.20	12.77

802.11ac20_U-NII-2C_high channel Frequency 5700 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5725.00	34.85	PK	H	33.97	1.84	0.00	70.66	64.66	68.20	3.54
5725.00	36.18	PK	V	33.97	1.84	0.00	71.99	65.99	68.20	2.21
11400.00	44.52	PK	H	38.10	4.49	37.95	49.16	49.16	74.00	24.84
11400.00	34.41	AV	H	38.10	4.49	37.95	39.05	39.05	54.00	14.95
11400.00	44.45	PK	V	38.10	4.49	37.95	49.09	49.09	74.00	24.91
11400.00	34.62	AV	V	38.10	4.49	37.95	39.26	39.26	54.00	14.74
17100.00	45.76	PK	H	39.58	6.28	33.17	58.45	58.45	68.20	9.75
17100.00	35.77	PK	V	39.58	6.28	33.17	48.46	48.46	68.20	19.74

802.11ac40_U-NII-2C_low channel Frequency 5510 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5470.00	32.59	PK	H	33.66	1.70	0.00	67.95	61.95	68.20	6.25
5470.00	33.29	PK	V	33.66	1.70	0.00	68.65	62.65	68.20	5.55
11020.00	45.52	PK	H	38.10	4.24	36.08	51.78	51.78	74.00	22.22
11020.00	35.49	AV	H	38.10	4.24	36.08	41.75	41.75	54.00	12.25
11020.00	44.25	PK	V	38.10	4.24	36.08	50.51	50.51	74.00	23.49
11020.00	34.28	AV	V	38.10	4.24	36.08	40.54	40.54	54.00	13.46
16530.00	46.96	PK	H	37.70	6.15	34.34	56.47	56.47	68.20	11.73
16530.00	45.47	PK	V	37.70	6.15	34.34	54.98	54.98	68.20	13.22

802.11ac40_U-NII-2C_middle channel Frequency 5550 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
11100.00	45.23	PK	H	38.10	4.30	36.47	51.16	51.16	74.00	22.84
11100.00	35.78	AV	H	38.10	4.30	36.47	41.71	41.71	54.00	12.29
11100.00	45.49	PK	V	38.10	4.30	36.47	51.42	51.42	74.00	22.58
11100.00	35.25	AV	V	38.10	4.30	36.47	41.18	41.18	54.00	12.82
16650.00	45.82	PK	H	38.11	6.17	34.16	55.94	55.94	68.20	12.26
16650.00	44.26	PK	V	38.11	6.17	34.16	54.38	54.38	68.20	13.82

802.11ac40_U-NII-2C_high channel

Frequency 5670 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5725.00	31.56	PK	H	33.97	1.84	0.00	67.37	61.37	68.20	6.83
5725.00	30.42	PK	V	33.97	1.84	0.00	66.23	60.23	68.20	7.97
11340.00	46.89	PK	H	38.10	4.45	37.65	51.79	51.79	74.00	22.21
11340.00	35.75	AV	H	38.10	4.45	37.65	40.65	40.65	54.00	13.35
11340.00	44.23	PK	V	38.10	4.45	37.65	49.13	49.13	74.00	24.87
11340.00	34.38	AV	V	38.10	4.45	37.65	39.28	39.28	54.00	14.72
17010.00	44.93	PK	H	39.33	6.24	33.58	56.92	56.92	68.20	11.28
17010.00	45.70	PK	V	39.33	6.24	33.58	57.69	57.69	68.20	10.51

802.11ac80_U-NII-2C_low channel

Frequency 5530 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5470.00	32.89	PK	H	33.66	1.70	0.00	68.25	62.25	68.20	5.95
5470.00	33.37	PK	V	33.66	1.70	0.00	68.73	62.73	68.20	5.47
11060.00	44.57	PK	H	38.10	4.27	36.28	50.66	50.66	74.00	23.34
11060.00	34.43	AV	H	38.10	4.27	36.28	40.52	40.52	54.00	13.48
11060.00	44.48	PK	V	38.10	4.27	36.28	50.57	50.57	74.00	23.43
11060.00	34.44	AV	V	38.10	4.27	36.28	40.53	40.53	54.00	13.47
16590.00	44.37	PK	H	37.91	6.16	34.25	54.19	54.19	68.20	14.01
16590.00	44.40	PK	V	37.91	6.16	34.25	54.22	54.22	68.20	13.98

802.11ac80_U-NII-2C_high channel

Frequency 5610 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5725.00	29.84	PK	H	33.97	1.84	0.00	65.65	59.65	68.20	8.55
5725.00	29.53	PK	V	33.97	1.84	0.00	65.34	59.34	68.20	8.86
11220.00	45.56	PK	H	38.10	4.38	37.06	50.98	50.98	74.00	23.02
11220.00	35.80	AV	H	38.10	4.38	37.06	41.22	41.22	54.00	12.78
11220.00	45.29	PK	V	38.10	4.38	37.06	50.71	50.71	74.00	23.29
11220.00	35.72	AV	V	38.10	4.38	37.06	41.14	41.14	54.00	12.86
16830.00	45.96	PK	H	38.72	6.20	33.89	56.99	56.99	68.20	11.21
16830.00	46.82	PK	V	38.72	6.20	33.89	57.85	57.85	68.20	10.35

802.11a_U-NII-3_low channel

Frequency 5745 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5725.00	47.05	PK	H	33.97	1.84	0.00	82.86	76.86	122.20	45.34
5720.00	35.48	PK	H	33.96	1.84	0.00	71.28	65.28	110.80	45.52
5700.00	30.71	PK	H	33.94	1.83	0.00	66.48	60.48	105.20	44.72
5650.00	29.55	PK	H	33.88	1.81	0.00	65.24	59.24	68.20	8.96
5725.00	46.63	PK	V	33.97	1.84	0.00	82.44	76.44	122.20	45.76
5720.00	35.67	PK	V	33.96	1.84	0.00	71.47	65.47	110.80	45.33
5700.00	30.76	PK	V	33.94	1.83	0.00	66.53	60.53	105.20	44.67
5650.00	29.37	PK	V	33.88	1.81	0.00	65.06	59.06	68.20	9.14
11490.00	46.91	PK	H	38.10	4.55	38.39	51.17	51.17	74.00	22.83
11490.00	36.48	AV	H	38.10	4.55	38.39	40.74	40.74	54.00	13.26
11490.00	47.71	PK	V	38.10	4.55	38.39	51.97	51.97	74.00	22.03
11490.00	37.78	AV	V	38.10	4.55	38.39	42.04	42.04	54.00	11.96
17235.00	43.10	PK	H	39.96	6.35	32.54	56.87	56.87	68.20	11.33
17235.00	42.11	PK	V	39.96	6.35	32.54	55.88	55.88	68.20	12.32

802.11a_U-NII-3_middle channel

Frequency 5785 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
11570.00	46.55	PK	H	38.09	4.58	38.36	50.86	50.86	74.00	23.14
11570.00	36.49	AV	H	38.09	4.58	38.36	40.80	40.8	54.00	13.20
11570.00	47.95	PK	V	38.09	4.58	38.36	52.26	52.26	74.00	21.74
11570.00	37.81	AV	V	38.09	4.58	38.36	42.12	42.12	54.00	11.88
17355.00	44.56	PK	H	40.29	6.41	31.99	59.27	59.27	68.20	8.93
17355.00	43.68	PK	V	40.29	6.41	31.99	58.39	58.39	68.20	9.81

802.11a_U-NII-3_high channel

Frequency 5825 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5850.00	46.98	PK	H	34.12	1.88	0.00	82.98	76.98	122.20	45.22
5855.00	36.31	PK	H	34.13	1.88	0.00	72.32	66.32	110.80	44.48
5875.00	30.28	PK	H	34.15	1.89	0.00	66.32	60.32	105.20	44.88
5925.00	29.88	PK	H	34.21	1.91	0.00	66.00	60	68.20	8.20
5850.00	47.82	PK	V	34.12	1.88	0.00	83.82	77.82	122.20	44.38
5855.00	36.23	PK	V	34.13	1.88	0.00	72.24	66.24	110.80	44.56
5875.00	30.35	PK	V	34.15	1.89	0.00	66.39	60.39	105.20	44.81
5925.00	29.58	PK	V	34.21	1.91	0.00	65.70	59.7	68.20	8.50
11650.00	49.12	PK	H	38.07	4.60	38.26	53.53	53.53	74.00	20.47
11650.00	39.37	AV	H	38.07	4.60	38.26	43.78	43.78	54.00	10.22
11650.00	48.24	PK	V	38.07	4.60	38.26	52.65	52.65	74.00	21.35
11650.00	38.32	AV	V	38.07	4.60	38.26	42.73	42.73	54.00	11.27
17475.00	42.27	PK	H	40.63	6.48	31.44	57.94	57.94	68.20	10.26
17475.00	42.71	PK	V	40.63	6.48	31.44	58.38	58.38	68.20	9.82

802.11n20_U-NII-3_low channel

Frequency 5745 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5725.00	48.22	PK	H	33.97	1.84	0.00	84.03	78.03	122.20	44.17
5720.00	36.68	PK	H	33.96	1.84	0.00	72.48	66.48	110.80	44.32
5700.00	30.73	PK	H	33.94	1.83	0.00	66.50	60.5	105.20	44.70
5650.00	30.20	PK	H	33.88	1.81	0.00	65.89	59.89	68.20	8.31
5725.00	47.73	PK	V	33.97	1.84	0.00	83.54	77.54	122.20	44.66
5720.00	35.36	PK	V	33.96	1.84	0.00	71.16	65.16	110.80	45.64
5700.00	30.66	PK	V	33.94	1.83	0.00	66.43	60.43	105.20	44.77
5650.00	29.47	PK	V	33.88	1.81	0.00	65.16	59.16	68.20	9.04
11490.00	45.55	PK	H	38.10	4.55	38.39	49.81	49.81	74.00	24.19
11490.00	35.23	AV	H	38.10	4.55	38.39	39.49	39.49	54.00	14.51
11490.00	46.78	PK	V	38.10	4.55	38.39	51.04	51.04	74.00	22.96
11490.00	36.67	AV	V	38.10	4.55	38.39	40.93	40.93	54.00	13.07
17235.00	42.12	PK	H	39.96	6.35	32.54	55.89	55.89	68.20	12.31
17235.00	42.49	PK	V	39.96	6.35	32.54	56.26	56.26	68.20	11.94

802.11n20_U-NII-3_middle channel

Frequency 5785 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
11570.00	47.76	PK	H	38.09	4.58	38.36	52.07	52.07	74.00	21.93
11570.00	37.65	AV	H	38.09	4.58	38.36	41.96	41.96	54.00	12.04
11570.00	46.52	PK	V	38.09	4.58	38.36	50.83	50.83	74.00	23.17
11570.00	36.37	AV	V	38.09	4.58	38.36	40.68	40.68	54.00	13.32
17355.00	43.78	PK	H	40.29	6.41	31.99	58.49	58.49	68.20	9.71
17355.00	42.71	PK	V	40.29	6.41	31.99	57.42	57.42	68.20	10.78

802.11n20_U-NII-3_high channel

Frequency 5825 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5850.00	48.77	PK	H	34.12	1.88	0.00	84.77	78.77	122.20	43.43
5855.00	36.18	PK	H	34.13	1.88	0.00	72.19	66.19	110.80	44.61
5875.00	30.46	PK	H	34.15	1.89	0.00	66.50	60.5	105.20	44.70
5925.00	30.10	PK	H	34.21	1.91	0.00	66.22	60.22	68.20	7.98
5850.00	47.79	PK	V	34.12	1.88	0.00	83.79	77.79	122.20	44.41
5855.00	35.48	PK	V	34.13	1.88	0.00	71.49	65.49	110.80	45.31
5875.00	30.43	PK	V	34.15	1.89	0.00	66.47	60.47	105.20	44.73
5925.00	29.13	PK	V	34.21	1.91	0.00	65.25	59.25	68.20	8.95
11650.00	48.69	PK	H	38.07	4.60	38.26	53.10	53.1	74.00	20.90
11650.00	38.74	AV	H	38.07	4.60	38.26	43.15	43.15	54.00	10.85
11650.00	48.36	PK	V	38.07	4.60	38.26	52.77	52.77	74.00	21.23
11650.00	38.42	AV	V	38.07	4.60	38.26	42.83	42.83	54.00	11.17
17475.00	42.65	PK	H	40.63	6.48	31.44	58.32	58.32	68.20	9.88
17475.00	42.36	PK	V	40.63	6.48	31.44	58.03	58.03	68.20	10.17

802.11n40_U-NII-3_low channel

Frequency 5755 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5725.00	44.86	PK	H	33.97	1.84	0.00	80.67	74.67	122.20	47.53
5720.00	35.76	PK	H	33.96	1.84	0.00	71.56	65.56	110.80	45.24
5700.00	30.48	PK	H	33.94	1.83	0.00	66.25	60.25	105.20	44.95
5650.00	30.33	PK	H	33.88	1.81	0.00	66.02	60.02	68.20	8.18
5725.00	45.58	PK	V	33.97	1.84	0.00	81.39	75.39	122.20	46.81
5720.00	36.81	PK	V	33.96	1.84	0.00	72.61	66.61	110.80	44.19
5700.00	30.19	PK	V	33.94	1.83	0.00	65.96	59.96	105.20	45.24
5650.00	30.12	PK	V	33.88	1.81	0.00	65.81	59.81	68.20	8.39
11510.00	46.64	PK	H	38.10	4.56	38.43	50.87	50.87	74.00	23.13
11510.00	36.79	AV	H	38.10	4.56	38.43	41.02	41.02	54.00	12.98
11510.00	45.15	PK	V	38.10	4.56	38.43	49.38	49.38	74.00	24.62
11510.00	35.18	AV	V	38.10	4.56	38.43	39.41	39.41	54.00	14.59
17265.00	42.86	PK	H	40.04	6.37	32.41	56.86	56.86	68.20	11.34
17265.00	43.11	PK	V	40.04	6.37	32.41	57.11	57.11	68.20	11.09

802.11n40_U-NII-3_high channel

Frequency 5795 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5850.00	45.53	PK	H	34.12	1.88	0.00	81.53	75.53	122.20	46.67
5855.00	36.49	PK	H	34.13	1.88	0.00	72.50	66.5	110.80	44.30
5875.00	30.70	PK	H	34.15	1.89	0.00	66.74	60.74	105.20	44.46
5925.00	30.06	PK	H	34.21	1.91	0.00	66.18	60.18	68.20	8.02
5850.00	45.40	PK	V	34.12	1.88	0.00	81.40	75.4	122.20	46.80
5855.00	35.08	PK	V	34.13	1.88	0.00	71.09	65.09	110.80	45.71
5875.00	30.87	PK	V	34.15	1.89	0.00	66.91	60.91	105.20	44.29
5925.00	30.19	PK	V	34.21	1.91	0.00	66.31	60.31	68.20	7.89
11590.00	46.15	PK	H	38.08	4.58	38.33	50.48	50.48	74.00	23.52
11590.00	36.01	AV	H	38.08	4.58	38.33	40.34	40.34	54.00	13.66
11590.00	46.90	PK	V	38.08	4.58	38.33	51.23	51.23	74.00	22.77
11590.00	36.47	AV	V	38.08	4.58	38.33	40.80	40.8	54.00	13.20
17385.00	45.23	PK	H	40.38	6.43	31.85	60.19	60.19	68.20	8.01
17385.00	44.12	PK	V	40.38	6.43	31.85	59.08	59.08	68.20	9.12

802.11ac20_U-NII-3_low channel

Frequency 5745 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
5725.00	43.75	PK	H	33.97	1.84	0.00	79.56	73.56	122.20	48.64
5720.00	33.85	PK	H	33.96	1.84	0.00	69.65	63.65	110.80	47.15
5700.00	30.01	PK	H	33.94	1.83	0.00	65.78	59.78	105.20	45.42
5650.00	30.27	PK	H	33.88	1.81	0.00	65.96	59.96	68.20	8.24
5725.00	44.32	PK	V	33.97	1.84	0.00	80.13	74.13	122.20	48.07
5720.00	36.35	PK	V	33.96	1.84	0.00	72.15	66.15	110.80	44.65
5700.00	29.94	PK	V	33.94	1.83	0.00	65.71	59.71	105.20	45.49
5650.00	29.74	PK	V	33.88	1.81	0.00	65.43	59.43	68.20	8.77
11490.00	48.47	PK	H	38.10	4.55	38.39	52.73	52.73	74.00	21.27
11490.00	38.65	AV	H	38.10	4.55	38.39	42.91	42.91	54.00	11.09
11490.00	45.20	PK	V	38.10	4.55	38.39	49.46	49.46	74.00	24.54
11490.00	35.94	AV	V	38.10	4.55	38.39	40.20	40.2	54.00	13.80
17235.00	42.57	PK	H	39.96	6.35	32.54	56.34	56.34	68.20	11.86
17235.00	42.39	PK	V	39.96	6.35	32.54	56.16	56.16	68.20	12.04

802.11ac20_U-NII-3_middle channel

Frequency 5785 MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
11570.00	47.65	PK	H	38.09	4.58	38.36	51.96	51.96	74.00	22.04
11570.00	37.82	AV	H	38.09	4.58	38.36	42.13	42.13	54.00	11.87
11570.00	45.44	PK	V	38.09	4.58	38.36	49.75	49.75	74.00	24.25
11570.00	35.52	AV	V	38.09	4.58	38.36	39.83	39.83	54.00	14.17
17355.00	42.80	PK	H	40.29	6.41	31.99	57.51	57.51	68.20	10.69
17355.00	42.18	PK	V	40.29	6.41	31.99	56.89	56.89	68.20	11.31

802.11ac20_U-NII-3_high channel

Frequency 5825 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5850.00	33.85	PK	H	34.12	1.88	0.00	69.85	63.85	122.20	58.35
5855.00	32.23	PK	H	34.13	1.88	0.00	68.24	62.24	110.80	48.56
5875.00	30.33	PK	H	34.15	1.89	0.00	66.37	60.37	105.20	44.83
5925.00	30.63	PK	H	34.21	1.91	0.00	66.75	60.75	68.20	7.45
5850.00	34.68	PK	V	34.12	1.88	0.00	70.68	64.68	122.20	57.52
5855.00	32.55	PK	V	34.13	1.88	0.00	68.56	62.56	110.80	48.24
5875.00	30.24	PK	V	34.15	1.89	0.00	66.28	60.28	105.20	44.92
5925.00	30.29	PK	V	34.21	1.91	0.00	66.41	60.41	68.20	7.79
11650.00	49.69	PK	H	38.07	4.60	38.26	54.10	54.1	74.00	19.90
11650.00	39.79	AV	H	38.07	4.60	38.26	44.20	44.2	54.00	9.80
11650.00	46.63	PK	V	38.07	4.60	38.26	51.04	51.04	74.00	22.96
11650.00	36.06	AV	V	38.07	4.60	38.26	40.47	40.47	54.00	13.53
17475.00	42.46	PK	H	40.63	6.48	31.44	58.13	58.13	68.20	10.07
17475.00	42.61	PK	V	40.63	6.48	31.44	58.28	58.28	68.20	9.92

802.11ac40_U-NII-3_low channel

Frequency 5755 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5725.00	40.57	PK	H	33.97	1.84	0.00	76.38	70.38	122.20	51.82
5720.00	39.95	PK	H	33.96	1.84	0.00	75.75	69.75	110.80	41.05
5700.00	29.88	PK	H	33.94	1.83	0.00	65.65	59.65	105.20	45.55
5650.00	29.55	PK	H	33.88	1.81	0.00	65.24	59.24	68.20	8.96
5725.00	43.00	PK	V	33.97	1.84	0.00	78.81	72.81	122.20	49.39
5720.00	42.14	PK	V	33.96	1.84	0.00	77.94	71.94	110.80	38.86
5700.00	32.07	PK	V	33.94	1.83	0.00	67.84	61.84	105.20	43.36
5650.00	30.66	PK	V	33.88	1.81	0.00	66.35	60.35	68.20	7.85
11510.00	49.86	PK	H	38.10	4.56	38.43	54.09	54.09	74.00	19.91
11510.00	39.51	AV	H	38.10	4.56	38.43	43.74	43.74	54.00	10.26
11510.00	47.54	PK	V	38.10	4.56	38.43	51.77	51.77	74.00	22.23
11510.00	37.22	AV	V	38.10	4.56	38.43	41.45	41.45	54.00	12.55
17265.00	42.25	PK	H	40.04	6.37	32.41	56.25	56.25	68.20	11.95
17265.00	42.63	PK	V	40.04	6.37	32.41	56.63	56.63	68.20	11.57

802.11ac40_U-NII-3_high channel

Frequency 5795 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5850.00	35.64	PK	H	34.12	1.88	0.00	71.64	65.64	122.20	56.56
5855.00	31.84	PK	H	34.13	1.88	0.00	67.85	61.85	110.80	48.95
5875.00	30.59	PK	H	34.15	1.89	0.00	66.63	60.63	105.20	44.57
5925.00	30.57	PK	H	34.21	1.91	0.00	66.69	60.69	68.20	7.51
5850.00	35.71	PK	V	34.12	1.88	0.00	71.71	65.71	122.20	56.49
5855.00	32.54	PK	V	34.13	1.88	0.00	68.55	62.55	110.80	48.25
5875.00	30.42	PK	V	34.15	1.89	0.00	66.46	60.46	105.20	44.74
5925.00	29.54	PK	V	34.21	1.91	0.00	65.66	59.66	68.20	8.54
11590.00	48.75	PK	H	38.08	4.58	38.33	53.08	53.08	74.00	20.92
11590.00	38.42	AV	H	38.08	4.58	38.33	42.75	42.75	54.00	11.25
11590.00	46.25	PK	V	38.08	4.58	38.33	50.58	50.58	74.00	23.42
11590.00	36.24	AV	V	38.08	4.58	38.33	40.57	40.57	54.00	13.43
17385.00	42.44	PK	H	40.38	6.43	31.85	57.40	57.4	68.20	10.80
17385.00	42.30	PK	V	40.38	6.43	31.85	57.26	57.26	68.20	10.94

802.11ac80_U-NII-3_low channel

Frequency 5775 MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBμV/m	Extrapolation result dBμV/m	Limit dBμV/m	Margin dB
	Reading dBμV	Detector PK/QP/AV	Polar H/V	Factor dB/m						
5725.00	41.69	PK	H	33.97	1.84	0.00	77.50	71.5	122.20	50.70
5720.00	41.04	PK	H	33.96	1.84	0.00	76.84	70.84	110.80	39.96
5700.00	34.23	PK	H	33.94	1.83	0.00	70.00	64	105.20	41.20
5650.00	30.60	PK	H	33.88	1.81	0.00	66.29	60.29	68.20	7.91
5725.00	42.59	PK	V	33.97	1.84	0.00	78.40	72.4	122.20	49.80
5720.00	41.78	PK	V	33.96	1.84	0.00	77.58	71.58	110.80	39.22
5700.00	35.20	PK	V	33.94	1.83	0.00	70.97	64.97	105.20	40.23
5650.00	30.23	PK	V	33.88	1.81	0.00	65.92	59.92	68.20	8.28
5850.00	33.47	PK	H	34.12	1.88	0.00	69.47	63.47	122.20	58.73
5855.00	31.20	PK	H	34.13	1.88	0.00	67.21	61.21	110.80	49.59
5875.00	29.75	PK	H	34.15	1.89	0.00	65.79	59.79	105.20	45.41
5925.00	29.54	PK	H	34.21	1.91	0.00	65.66	59.66	68.20	8.54
5850.00	34.45	PK	V	34.12	1.88	0.00	70.45	64.45	122.20	57.75
5855.00	31.57	PK	V	34.13	1.88	0.00	67.58	61.58	110.80	49.22
5875.00	30.52	PK	V	34.15	1.89	0.00	66.56	60.56	105.20	44.64
5925.00	30.62	PK	V	34.21	1.91	0.00	66.74	60.74	68.20	7.46
11550.00	47.64	PK	H	38.09	4.57	38.38	51.92	51.92	74.00	22.08
11550.00	37.40	AV	H	38.09	4.57	38.38	41.68	41.68	54.00	12.32
11550.00	45.82	PK	V	38.09	4.57	38.38	50.10	50.1	74.00	23.90
11550.00	35.39	AV	V	38.09	4.57	38.38	39.67	39.67	54.00	14.33
17325.00	42.03	PK	H	40.21	6.40	32.13	56.51	56.51	68.20	11.69
17325.00	42.36	PK	V	40.21	6.40	32.13	56.84	56.84	68.20	11.36

5.3 Spot Check With Maximum Conducted Output Power

Serial No.:	2GZ2-3	Test Date:	2024/4/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Alice Tan	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	27	Relative Humidity: (%)	48	ATM Pressure: (kPa)	101
-----------------------------	----	----------------------------------	----	-------------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY54170006	2023/10/18	2024/10/17
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM488	2023/9/10	2024/9/9

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

5150-5250 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		reading	FCC Limit
802.11a	5180	13.09	24
	5200	16.57	24
	5240	16.39	24
802.11n ht20	5180	13.14	24
	5200	15.74	24
	5240	15.76	24
802.11n ht40	5190	12.06	24
	5230	15.97	24
802.11ac vht20	5180	13.35	24
	5200	15.83	24
	5240	15.88	24
802.11ac vht40	5190	12.07	24
	5230	16.03	24
802.11ac vht80	5210	13.93	24

Note:
The device is a client device.

5250-5350 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		reading	FCC Limit
802.11a	5260	16.53	24
	5280	16.71	24
	5320	16.86	24
802.11n ht20	5260	15.67	24
	5280	15.52	24
	5320	11.38	24
802.11n ht40	5270	16.06	24
	5310	10.77	24
802.11ac vht20	5260	15.92	24
	5280	15.89	24
	5320	11.35	24
802.11ac vht40	5270	16.14	24
	5310	10.99	24
802.11ac vht80	5290	12.53	24

5470-5725 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	FCC Limit
802.11a	5500	16.44	24
	5580	16.84	24
	5700	17.15	24
	5720	16.86	24
802.11n ht20	5500	15.77	24
	5580	15.93	24
	5700	13.44	24
	5720	15.56	24
802.11n ht40	5510	11.29	24
	5550	15.93	24
	5670	16.18	24
	5710	15.79	24
802.11ac vht20	5500	15.92	24
	5580	16.09	24
	5700	13.65	24
	5720	15.64	24
802.11ac vht40	5510	13.23	24
	5550	16.07	24
	5670	16.28	24
	5710	16.07	24
802.11ac vht80	5530	11.81	24
	5610	16.04	24
	5690	16.11	24

5725-5850 MHz:

Test Modes	Test Frequency (MHz)	Max. Conducted Average Output Power(dBm)	
		Result	Limit
802.11a	5745	17.18	30
	5785	17.15	30
	5825	16.8	30
802.11n ht20	5745	15.98	30
	5785	15.88	30
	5825	15.54	30
802.11n ht40	5755	16.11	30
	5795	16.12	30
802.11ac vht20	5745	16.18	30
	5785	15.98	30
	5825	15.67	30
802.11ac vht40	5755	16.16	30
	5795	16.25	30
802.11ac vht80	5775	16.06	30

5.4 Duty Cycle

Serial No.:	2GZ2-3	Test Date:	2024/4/11
Test Site:	RF	Test Mode:	Transmitting
Tester:	Alice Tan	Test Result:	/

Environmental Conditions:

Temperature: (°C)	27	Relative Humidity: (%)	48	ATM Pressure: (kPa)	101
----------------------	----	------------------------------	----	---------------------------	-----

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101589	2023/10/18	2024/10/17
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM488	2023/9/10	2024/9/9

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Test Modes	Ton (ms)	Ton+off (ms)	Duty cycle (%)	1/T (Hz)	Duty Factor (dB)	VBW Setting (kHz)
802.11a	1.377	1.42	96.97	726	0.13	1.00
802.11n ht20	1.29	1.333	96.77	775	0.14	1.00
802.11n ht40	0.643	0.691	93.05	1555	0.31	2.00
802.11ac vht20	1.306	1.342	97.32	766	0.12	1.00
802.11ac vht40	0.648	0.691	93.78	1543	0.28	2.00
802.11ac vht80	0.325	0.374	86.90	3077	0.61	5.00


a_5200MHz_Chain 0

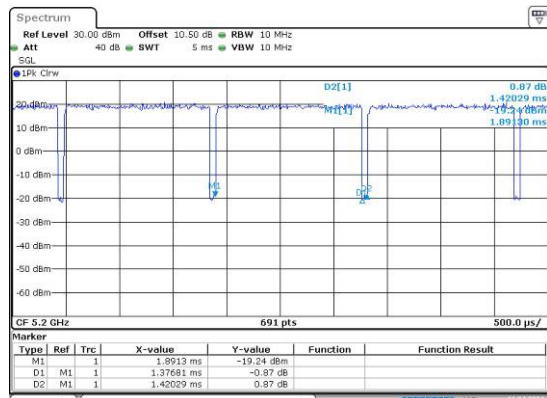


n20_5200MHz_Chain 0

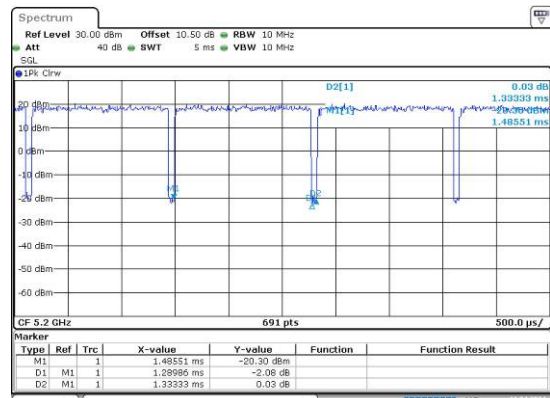


n40_5190MHz_Chain 0

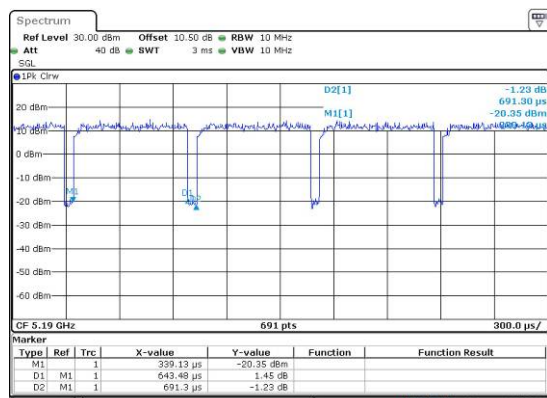


ac20_5200MHz_Chain 0

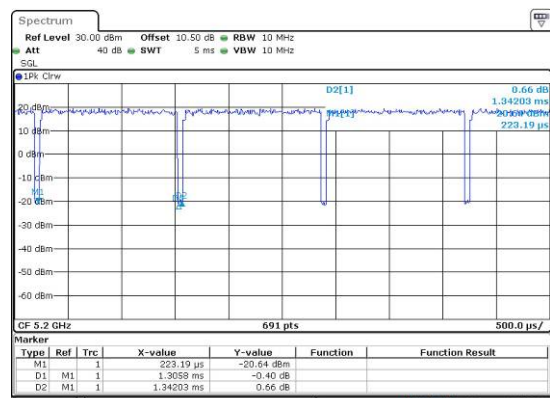

ac40_5190MHz_Chain 0

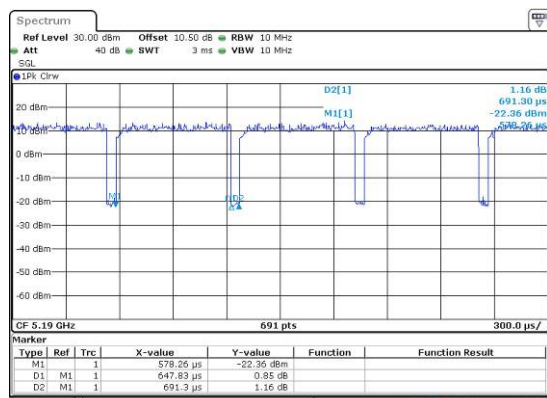

ac80_5210MHz_Chain 0

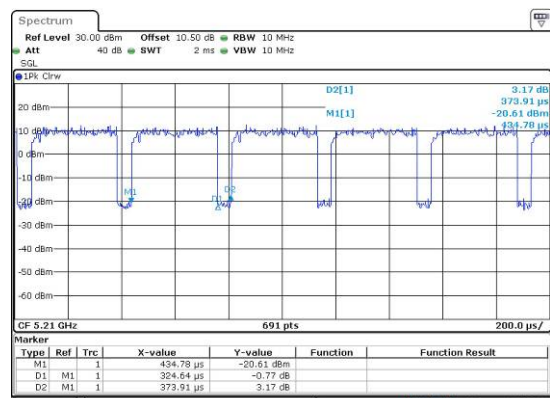

APPENDIX A - EUT PHOTOGRAPHS

Please refer to the attachment XMDN240122-04868E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and XMDN240122-04868E-RF-INP EUT INTERNAL PHOTOGRAPHS.

APPENDIX B - TEST SETUP PHOTOGRAPHS

Please refer to the attachment XMDN240122-04868E-RF-00E-TSP TEST SETUP PHOTOGRAPHS.

APPENDIX C - RF EXPOSURE EVALUATION

Applicable Standard

According to subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Operation Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Bluetooth	2402-2480	1.04	1.27	10	10.00	20.00	0.00253	1.0
2.4G Wifi	2412-2462	1.04	1.27	18	63.10	20.00	0.01596	1.0
5G Wifi	5150-5250	0.35	1.08	18	63.10	20.00	0.01361	1.0
	5250-5350	1.61	1.45	18	63.10	20.00	0.01819	1.0
	5470-5725	2.39	1.73	18	63.10	20.00	0.02177	1.0
	5725-5850	0.3	1.07	18	63.10	20.00	0.01346	1.0

Note:

The Conducted output power including Tune-up Tolerance provided by manufacturer.

The Bluetooth BDR/EDR / BLE /2.4G Wifi / 5G Wifi can't transmit simultaneously

Result: Compliant. The devices meet FCC MPE at 20 cm distance

===== **END OF REPORT** =====