

FCC 47 CFR PART 15 SUBPART C CERTIFICATION TEST REPORT

For

Luka Reading Robot

MODEL No.:LK1601

FCC ID: 2AM8U-LK1601

Trade Mark: ling luka

REPORT NO:ES170731010E

ISSUE DATE: January 13, 2018

Prepared for

Beijing Ling Technology Co., Ltd.

Room 3602, 36F, Building No.13, Wangjing East garden Four Area, Chaoyang District, Beijing, China

Prepared by

EMTEK(SHENZHEN) CO., LTD.

Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China
TEL: 86-755-26954280

FAX: 86-755-26954282

TRF No : FCC 15C/A Page 1 of 46 Report No.: ES170731010E Ver.1.0



TABLE OF CONTENTS

1	TES	ST RESULT CERTIFICATION	3
2	EU ⁻	F TECHNICAL DESCRIPTION	4
3	SUI	MMARY OF TEST RESULT	5
4	TES	ST METHODOLOGY	6
	4.1 4.2 4.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
5	FAC	CILITIES AND ACCREDITATIONS	8
	5.1 5.2	FACILITIESLABORATORY ACCREDITATIONS AND LISTINGS	3 3
6	TES	ST SYSTEM UNCERTAINTY	g
7	SE	TUP OF EQUIPMENT UNDER TEST	10
	7.1 7.2 7.3 7.4 7.5	RADIO FREQUENCY TEST SETUP 1 RADIO FREQUENCY TEST SETUP 2 CONDUCTED EMISSION TEST SETUP BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM SUPPORT EQUIPMENT	10 11 12
8	TES	ST REQUIREMENTS	13
	8.1 8.2 8.3 8.4 8.5 8.6	DTS(6DB)BANDWIDTH	



1 TEST RESULT CERTIFICATION

Applicant: Beijing Ling Technology Co., Ltd.

Room 3602, 36F, Building No.13, Wangjing East garden Four Area, Chaoyang District,

Beijing, China

Manufacturer: Beijing Ling Technology Co., Ltd.

Room 3602, 36F, Building No.13, Wangjing East garden Four Area, Chaoyang District,

Beijing, China

EUT Description: Luka Reading Robot

Model Number: LK1601

File Number: ES170731010E

Date of Test: July 31, 2017 to January 13, 2018

Measurement Procedure Used:

APPLICABLE STANDARDS					
STANDARD TEST RESULT					
FCC 47 CFR Part 2 2017, Subpart J	PASS				
FCC 47 CFR Part 15 2017, Subpart C	PASS				

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 2017 and Part 15.247 2017 The test results of this report relate only to the tested sample identified in this report.

Date of Test :	July 31, 2017 to January 13, 2018		
Prepared by :	Yaping Shen Yaping Shen /Editor		
Reviewer :	Joe Xia/Supervisor		
	JOE AIA/Supervisor		
Approve & Authorized Signer :	Lisa Wang/Manager		



2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
IEEE 802.11 WLAN Mode Supported	
Data Rate	WIFI: 802.11 b:1,2,5.5,11Mbps; 802.11 g:6,9,12,18,24,36,48,54Mbps; 802.11n(HT20):MCS0-MCS7;
Modulation	WIFI: DSSS with DBPSK/DQPSK/CCK for 802.11b; OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n;
Operating Frequency Range	2412-2462MHz for 802.11b/g/n(HT20);
Number of Channels	WIFI: 11 channels for 802.11b/g n(HT20);
Transmit Power Max	WIFI: 17.11dBm for 802.11b; 21.12dBm for 802.11g; 21.29dBm for 802.11/n(HT20);
Antenna Type	FPC antenna
Antenna Gain	2.4 dBi
Power supply	
Temperature Range	-10°C ~ +50°C

TRF No : FCC 15C/A Page 4 of 46 Report No.: ES170731010E Ver.1.0



3 SUMMARY OF TEST RESULT

FCC PartClause	Test Parameter	Verdict	Remark		
15.247(a)(2)	DTS (6dB) Bandwidth	PASS			
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS			
15.247(e)	Maximum Power Spectral Density Level	PASS			
15.247(d)	Unwanted Emission Into Non-Restricted	PASS			
	Frequency Bands				
15.247(d)	Unwanted Emission Into Restricted Frequency	PASS			
15.209	Bands (conducted)				
15.247(d)	Radiated Spurious Emission	PASS			
15.209					
15.207	Conducted EmissionTest	PASS			
15.203	Antenna Application	PASS			
	NOTE1:N/A (Not Applicable)				
	NOTE2:According to FCC OET KDB 558074, the report use radiated				
	measurements in the restricted frequency bands. In addition, the radiated				
	test is also performed to ensure the emissions emanating from the device				
	cabinet also comply with the applicable limits.				

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AM8U-LK1601 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

TRF No : FCC 15C/A Page 5 of 46 Report No.: ES170731010E Ver.1.0



4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 ČFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

FCC KDB 558074 D01 DTS Meas Guidance v04

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 662911 D02MIMO With Cross Polarized Antenna V01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT	MFR	MODEL	SERIAL	LASTCAL.	DUE CAL.
TYPE		NUMBER	NUMBER		
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/20/2017	05/20/2018
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/20/2017	05/20/2018
50Ω Coaxial Switch	Anritsu	MP59B	M20531	05/21/2017	05/21/2018
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/21/2017	05/21/2018
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/21/2017	05/21/2018
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/212017	05/212018

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	DUE CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/20/2017	05/20/2018
Pre-Amplifier	HP	8447D	2944A07999	05/20/2017	05/20/2018
Bilog Antenna	Schwarzbeck	VULB9163	142	05/20/2017	05/20/2018
Loop Antenna	ARA	PLA-1030/B	1029	05/21/2017	05/21/2018
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/21/2017	05/21/2018
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/212017	05/212018
Cable	Schwarzbeck	AK9513	ACRX1	05/21/2017	05/21/2018
Cable	Rosenberger	N/A	FP2RX2	05/21/2017	05/21/2018
Cable	Schwarzbeck	AK9513	CRPX1	05/21/2017	05/21/2018
Cable	Schwarzbeck	AK9513	CRRX2	05/21/2017	05/21/2018

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LASTCAL.	DUE CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/21/2017	05/21/2018
Signal Analyzer	Agilent	N9010A	My53470879	05/21/2017	05/21/2018
Power meter	Anritsu	ML2495A	0824006	05/21/2017	05/21/2018
Power sensor	Anritsu	MA2411B	0738172	05/21/2017	05/21/2018

Remark: Each piece of equipment is scheduled for calibration once a year.

TRF No : FCC 15C/A Page 6 of 46 Report No.: ES170731010E Ver.1.0



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (802.11b: 1 Mbps;802.11g: 6 Mbps;802.11n(HT20): MCS0; 802.11n(HT40):MCS0) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

☑Frequency and Channel list for 802.11 b/g/n(HT20):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447		

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462

TRF No : FCC 15C/A Page 7 of 46 Report No.: ES170731010E Ver.1.0



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab. : Accredited by CNAS, 2016.10.24

The certificate is valid until 2022.10.28

The Laboratory has been assessed and proved to be in compliance

with CNAS-CL01: 2006(identical to ISO/IEC17025: 2005)

The Certificate Registration Number is L229

: Accredited by TUV Rheinland Shenzhen, 2016.05.19

The Laboratory has been assessed according to the requirements

ISO/IEC 17025.

: Accredited by FCC, August 03, 2017 Designation Number: CN1204

Test Firm Registration Number: 882943

: Accredited by Industry Canada, November 24, 2015 The Certificate Registration Number is 4480A-2.

TRF No : FCC 15C/A Page 8 of 46 Report No .: ES170731010E Ver.1.0



6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

apparatae.	
Parameter	Uncertainty
Radio Frequency	±1x10^-5
Maximum Peak Output Power Test	±1.0dB
Conducted Emissions Test	±2.0dB
Radiated Emission Test	±2.0dB
Power Density	±2.0dB
Occupied Bandwidth Test	±1.0dB
Band Edge Test	±3dB
All emission, radiated	±3dB
Antenna Port Emission	±3dB
Temperature	±0.5
Humidity	±3%

Measurement Uncertainty for a level of Confidence of 95%


TRF No : FCC 15C/A Page 9 of 46 Report No.: ES170731010E Ver.1.0



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT androtated about its vertical axis formaximum response at each azimuth about the EUT. The center of the loopshall be 1 m above the ground. For certain applications, the loop antennaplane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

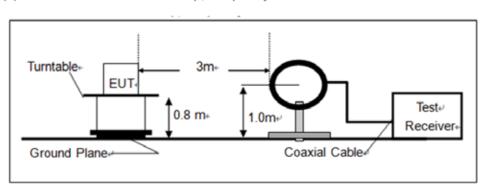


TRF No: FCC 15C/A Page 10 of 46 Report No.: ES170731010E Ver.1.0



(b)Radiated Emission Test Set-Up, Frequency Below 1000MHz

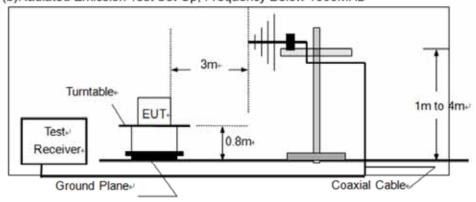

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

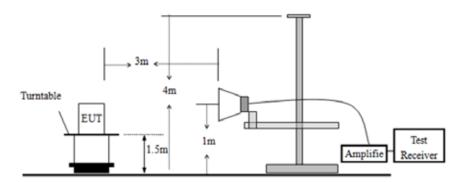


7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.


According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

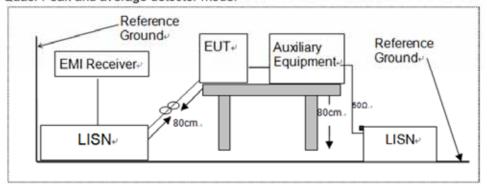

TRF No: FCC 15C/A Page 11 of 46 Report No.: ES170731010E Ver.1.0



7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

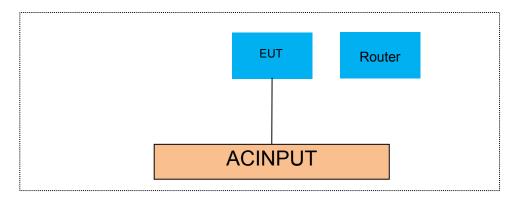

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1.	Router	TP-LINK	TL-WVR308	N/A	N/A
2.	Adapter	Tenpao	S003GU0500060	N/A	N/A

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



8 TEST REQUIREMENTS

8.1 DTS(6DB)BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB558074 DTS 01 Meas. Guidance v04.

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in IEEE 802.11b/g/n mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Measure and record the results in the test report.

8.1.5 Test Results


Temperature : 26 Test Date : December 25, 2017 Humidity : 60 % Test By: King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (MHz)	Limit (kHz)	Verdict
	1	2412	10.03	>500	PASS
802.11b	6	2437	10.03	>500	PASS
	11	2462	10.03	>500	PASS
	1	2412	16.384	>500	PASS
802.11g	6	2437	16.399	>500	PASS
	11	2462	16.374	>500	PASS
902 11n	1	2412	17.582	>500	PASS
802.11n (HT20)	6	2437	17.597	>500	PASS
(11120)	11	2462	17.592	>500	PASS

TRF No : FCC 15C/A Page 13 of 46 Report No.: ES170731010E Ver.1.0



DTS (6dB) Bandwidth 802.11b Channel 1: 2412MHz

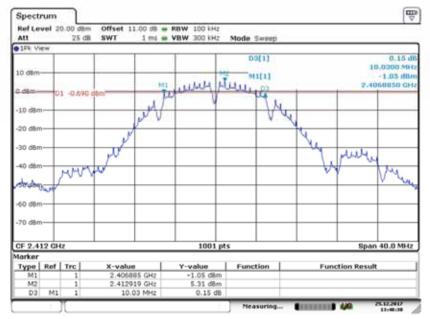

Date: 25.DEC.2017 13:48:29


DTS (6dB) Bandwidth
Test Model 802.11b
Channel 6: 2437MHz



Date: 25.DEC.2017 13:51:03




DTS (6dB) Bandwidth 802.11b Channel 11: 2462MHz

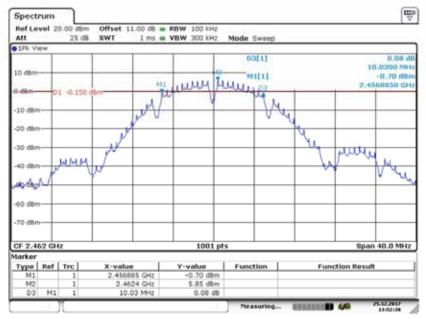

Date: 25.DEC.2017 13:52:38

Test Model


DTS (6dB) Bandwidth 802.11g Channel 1: 2412MHz

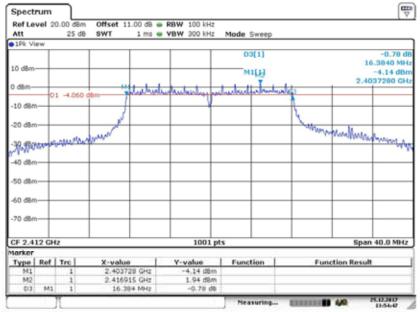

Date: 25 DEC:2017 13:54:46




DTS (6dB) Bandwidth 802.11g Channel 6: 2437MHz

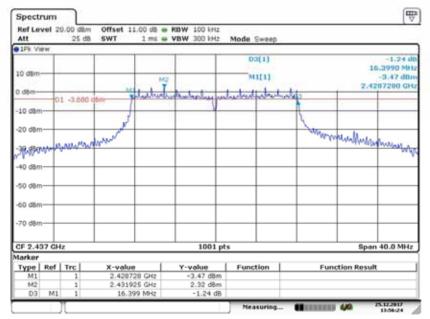

Date: 25.DEC.2017 13:56:24

Test Model


DTS (6dB) Bandwidth 802.11g Channel 11: 2462MHz

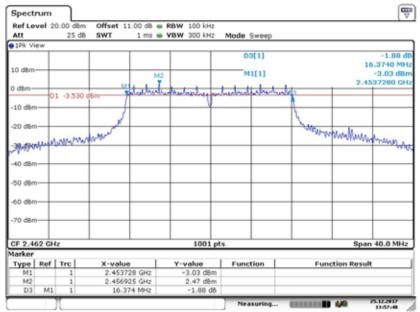

Date: 25.DEC.2017 13:57:48




DTS (6dB) Bandwidth 802.11n (HT20) Channel 1: 2412MHz

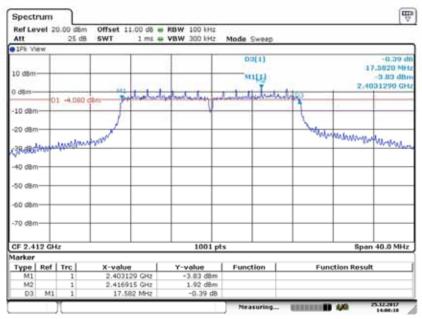

Date: 25.DEC.2017 14:00:19

Test Model


DTS (6dB) Bandwidth 802.11n (HT20) Channel 6: 2437MHz

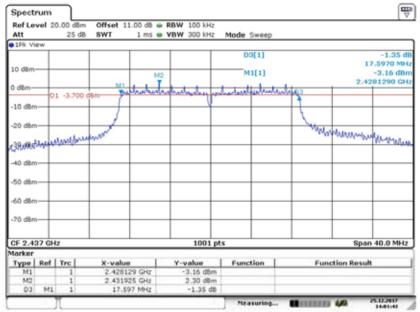

Date: 25.DEC.2017 14.01.43



DTS (6dB) Bandwidth 802.11n (HT20) Channel 11: 2462MHz

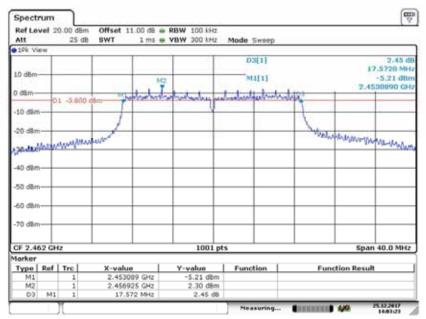

Date: 25.DEC.2017 14:03:23



8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB558074 DTS 01 Meas. Guidance v04.

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.2.4 Test Procedure

■ According to FCC Part15.247(b)(3)

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

The testing follows FCC public Notice DA 00-705 Measurement Guidelines.

The RF output of EUT was connected to the power meter by RF cable and attnuator. The path loss was compensated to the results for each measurement.

Set to the maximum output power setting and enable the EUT transmit continuously.

Measure the conducted output power with cable loss and record the results in the test report.

Measure and record the results in the report.

■ According to FCC Part 15.247(b)(4):

Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note: If antenna Gain exceeds 6 dBi, then Output power Limit=30-(Gain- 6)

8.2.5 Test Results

Temperature : 26 Test Date : December 25, 2017 Humidity : 60 % Test By: King Kong

Operation	Channel	Channel	Measurement	Limit	
Mode	Number	Frequency	Level (dBm)	(dBm)	Verdict
		(MHz)			
	1	2412	16.88	30	PASS
802.11b	6	2437	17.11	30	PASS
	11	2462	17.09	30	PASS
	1	2412	20.74	30	PASS
802.11g	6	2437	21.12	30	PASS
	11	2462	21.08	30	PASS
802.11n	1	2412	20.91	30	PASS
(HT20)	6	2437	21.28	30	PASS
(1120)	11	2462	21.29	30	PASS

TRF No : FCC 15C/A Page 19 of 46 Report No.: ES170731010E Ver.1.0



8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB558074 DTS 01 Meas. Guidance v04.

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance

The transmitter output (antenna port) was connected to the spectrum analyzer

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to:10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

Note: If antenna Gain exceeds 6 dBi, then PSD Limit=8-(Gain- 6)

8.3.5 Test Results


Temperature : 26 Test Date : December 25, 2017 Humidity : 60 % Test By: King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
	1	2412	-7.87	8	PASS
802.11b	6	2437	-7.62	8	PASS
	11	2462	-7.65	8	PASS
	1	2412	-13.33	8	PASS
802.11g	6	2437	-12.85	8	PASS
	11	2462	-12.89	8	PASS
802.11n	1	2412	-12.13	8	PASS
(HT20)	6	2437	-12.05	8	PASS
(11120)	11	2462	-11.94	8	PASS

TRF No : FCC 15C/A Page 20 of 46 Report No.: ES170731010E Ver.1.0




Test Model Power Spectral Density 802.11b
Channel 1: 2412MHz

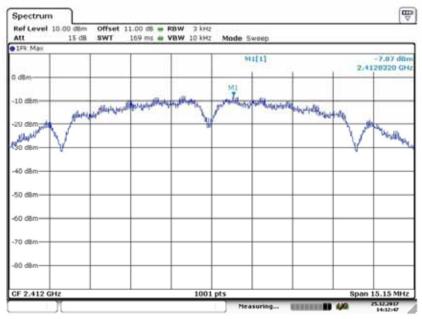

Date: 25.DEC.2017 14:12:47




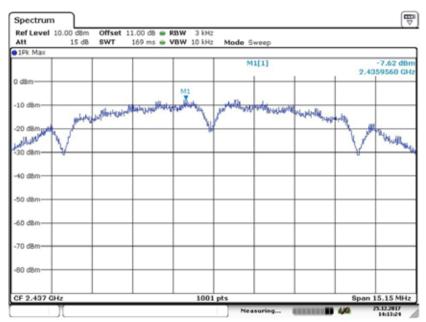

Date: 25.DEC.2017 14:13:24




Test Model Power Spectral Density 802.11b Channel 11: 2462MHz

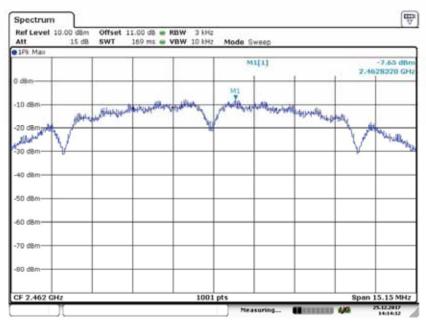

Date: 25.DEC.2017 14:14:12


Power Spectral Density
Test Model 802.11g
Channel 1: 2412MHz

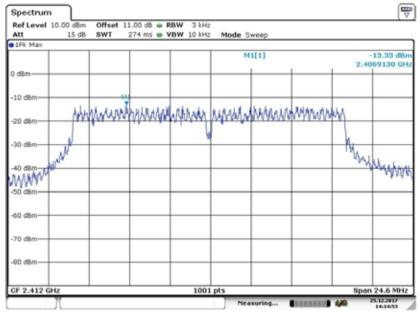

Date: 25.DEC.2017 14:14:52




Test Model Power Spectral Density 802.11g
Channel 6: 2437MHz

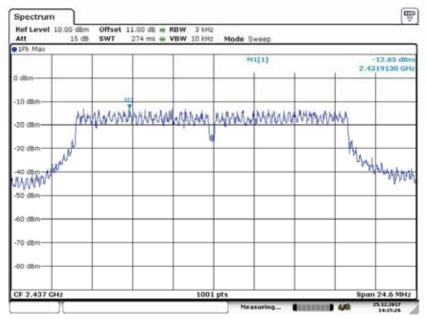

Date: 25.DEC.2017 14:15:26


Test Model Power Spectral Density
802.11g
Channel 11: 2462MHz

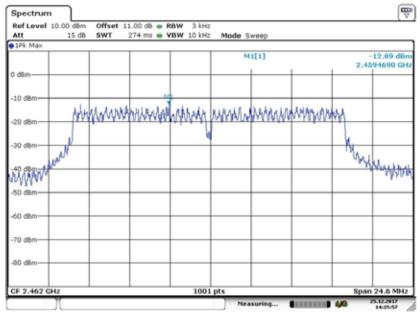

Date: 25.DEC.2017 14:15:57




Power Spectral Density 802.11n (HT20) Channel 1: 2412MHz

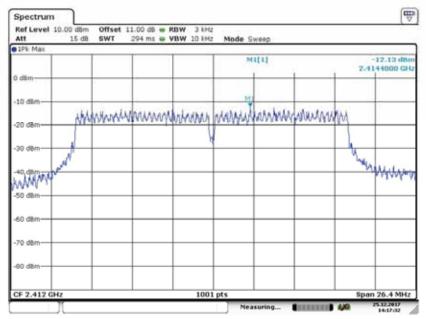

Date: 25.DEC.2017 14:17:31

Test Model


Power Spectral Density 802.11n (HT20) Channel 6: 2437MHz

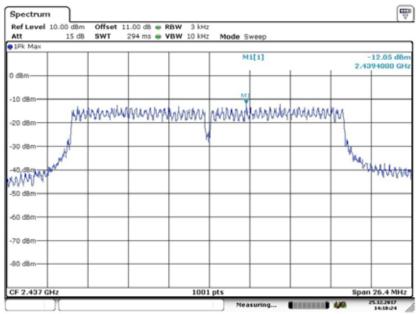

Date: 25.DEC.2017 14:18:25



Power Spectral Density 802.11n (HT20) Channel 11: 2462MHz

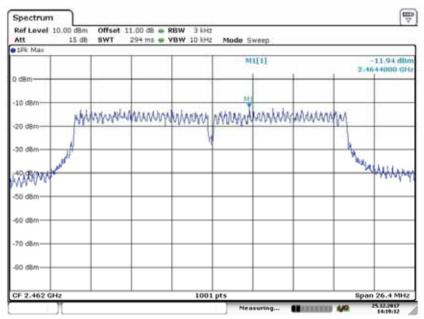

Date: 25.DEC.2017 14:19:12



8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB558074 DTS 01 Meas. Guidance v04.

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to ≥ 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW \geq 3 x RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW =300 kHz.

Set Detector = peak

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.4.5 Test Results


TRF No : FCC 15C/A Page 26 of 46 Report No.: ES170731010E Ver.1.0



All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

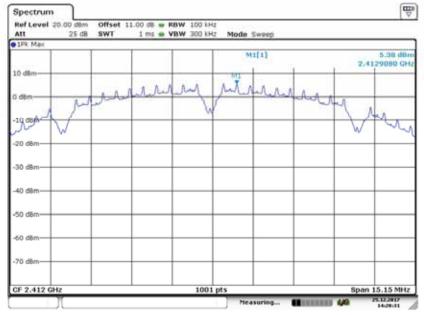


Date: 25.DEC.2017 14:20:31

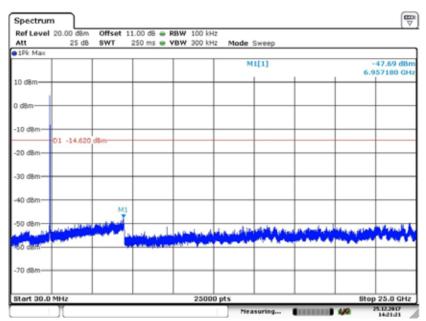


Date: 25.DEC.2017 14:21:21



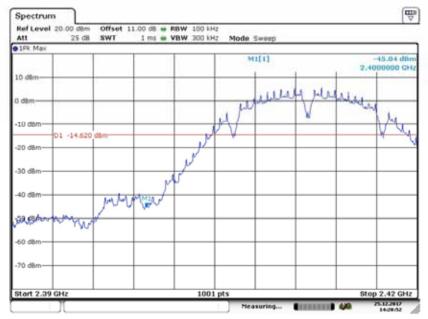


Date: 25.DEC.2017 14:20:52

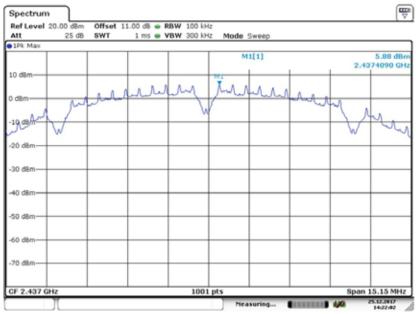


Date: 25.DEC.2017 14:22:02



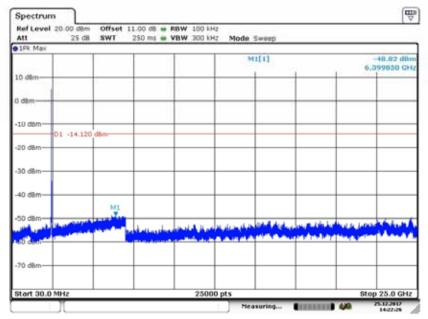



Date: 25.DEC.2017 14:22:26

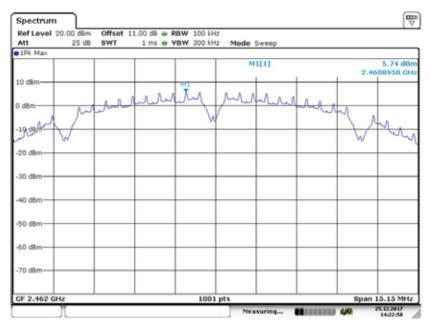

Date: 25.DEC.2017 14:22:58





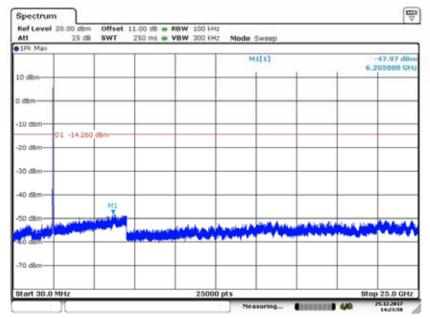

Date: 25.DEC.2017 14:23:58





Date: 25.DEC.2017 14:23:30



8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB558074 DTS 01 Meas. Guidance v04.

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands

7 tocording to 1 oo 1 dit 10.	200, 11001110104 541140		
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205,the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \ge 1$ GHz(1GHz to 25GHz), 100 kHz for f < 1 GHz(30MHz to 1GHz), 200Hz for f < 150KHz(9KHz to 150KHz), 9KHz for f < 30MHz(150KHz to 30KHz)

 $VBW \ge RBW$

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the

TRF No : FCC 15C/A Page 31 of 46 Report No.: ES170731010E Ver.1.0



measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data. Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log(dwell time/100 ms), in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.5.5 Test Results

Spurious Emission below 30MHz(9KHz to 30MHz)

Temperature: 24 Test Date: N/A Humidity: 53 % Test By: N/A

Test mode: TX Mode

	Freq.	Ant.Pol.		ssion BuV/m)	Limit 3m	(dBuV/m)	Over(dB)		
	(MHz)	H/V	PK `	ÁV	PK	AV	PK	AV	
Ī									

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);

Limit line=Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz(1GHz to 25GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Temperature: 26 Test Date: August 05,2017 Humidity: 60 % Test By: King Kong

Test mode: 802.11b Frequency: Channel 1: 2412MHz

Freq.	Ant.Pol.		ission dBuV/m)	Limit 3m	(dBuV/m)	Ove	er(dB)
(MHz)	H/V	PK `	AV	PK	AV	PK	AV
4824.2	V	52.29	42.56	74.00	54.00	-21.71	-11.44
7237.76	V	48.95	40.53	74.00	54.00	-25.05	-13.47
9233.4	V	56.74	42.3	74.00	54.00	-17.26	-11.7
4824.62	Н	51.84	42.85	74.00	54.00	-22.16	-11.15
7236.34	Н	48.63	41.13	74.00	54.00	-25.37	-12.87
10012.41	Н	56.46	42.94	74.00	54.00	-17.54	-11.06

Temperature: 26 Test Date: August 05,2017 Humidity: 60 % Test By: King Kong

Test mode: 802.11b Frequency: Channel 6: 2437MHz

Freq.	Ant.Po I.	Emission Lev	rel(dBuV/m)	Limit 3m((dBuV/m)	Ove	er(dB)
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4875.31	V	52.06	41.65	74.00	54.00	-21.94	-12.35
7311.05	V	50.56	41.3	74.00	54.00	-23.44	-12.7
9577.17	V	55.82	41.54	74.00	54.00	-18.18	-12.46
4875.53	Н	51.94	42.01	74.00	54.00	-22.06	-11.99
7311.29	Н	48.87	40.15	74.00	54.00	-25.13	-13.85
9853.88	Н	54.69	44.15	74.00	54.00	-19.31	-9.85

TRF No : FCC 15C/A Page 32 of 46 Report No.: ES170731010E Ver.1.0



Temperature :26Test Date :August 05,2017Humidity :60 %Test By:King KongTest mode:802.11bFrequency:Channel 11: 2462MHz

Freq.	Ant.P ol.	Emission Lev	vel(dBuV/m)	Limit 3m((dBuV/m)	Ove	er(dB)
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4924.43	V	52.41	41.82	74.00	54.00	-21.59	-12.18
7387.1	V	49.2	40.15	74.00	54.00	-24.8	-13.85
9222.2	V	56.18	41.87	74.00	54.00	-17.82	-12.13
4925.39	Н	51.85	43.48	74.00	54.00	-22.15	-10.52
7386.68	Н	49.73	42.73	74.00	54.00	-24.27	-11.27
9333.89	Н	57.92	42.04	74.00	54.00	-16.08	-11.96

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant_F + Cab_L - Preamp

(4)Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

TRF No : FCC 15C/A Page 33 of 46 Report No.: ES170731010E Ver.1.0



■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Temperature: 26 Test Date: August 05,2017 Humidity: 60 % Test By: King Kong

Test mode: 802.11b Frequency: Channel 1: 2412MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2389.44	Н	49.93	74	-24.07	34.70	54	-19.30
2387.60	V	50.86	74	-23.14	35.90	54	-18.10

Temperature: 26 Test Date: August 05,2017 Humidity: 60 % Test By: King Kong

Test mode: 802.11b Frequency: Channel 11: 2462MHz

Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2483.50	Н	47.43	74	-26.57	31.70	54	-22.30
2483.50	V	51.15	74	-22.85	37.80	54	-16.20

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).


(2) Emission Level= Reading Level+Correct Factor +Cable Loss.

(3) Correct Factor= Ant_F + Cab_L - Preamp


(4)Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

TRF No : FCC 15C/A Page 34 of 46 Report No.: ES170731010E Ver.1.0



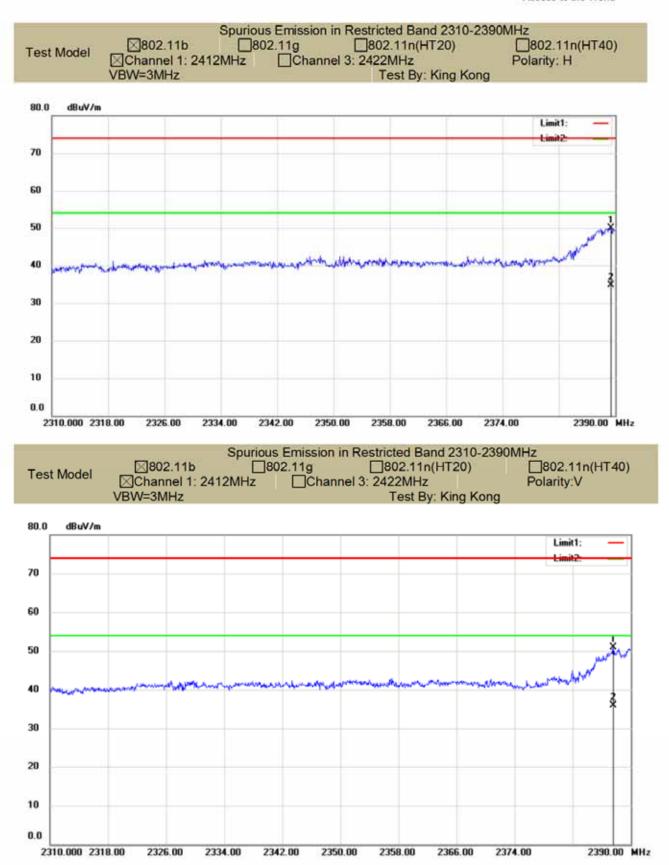




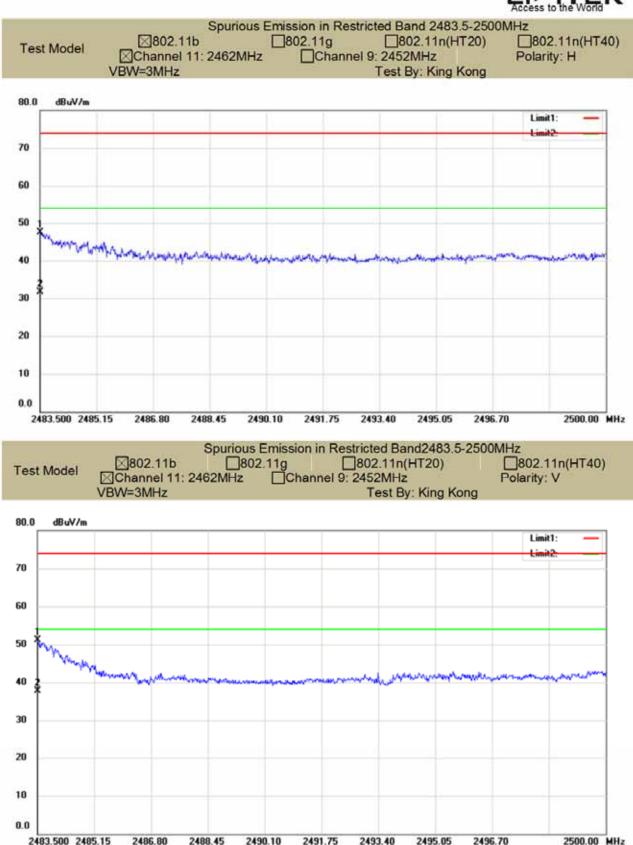




■ Spurious Emission below 1GHz (30MHz to 1GHz) All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

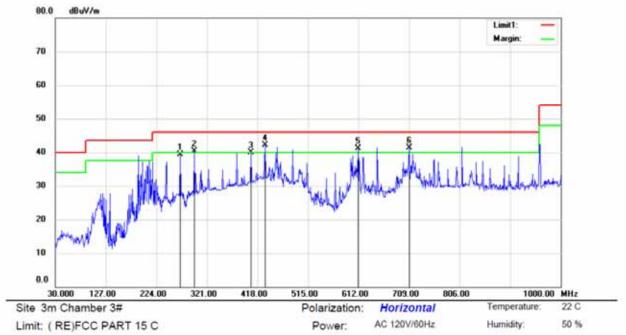

Mode:TX 2412

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	Ų.
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		269.5900	49.15	-9.81	39.34	46.00	-6.66	QP			
2	1	296.7500	49.01	-8.74	40.27	46.00	-5.73	QP			
3		405,3900	46.72	-6.88	39.84	46.00	-6.16	QP			
4		432.5500	48.32	-6.18	42.14	46.00	-3.86	QP			
5	1	611.0300	44.33	-3.19	41.14	46.00	-4.86	QP			
6	1	709.0000	43.22	-1.93	41.29	46.00	-4.71	QP			



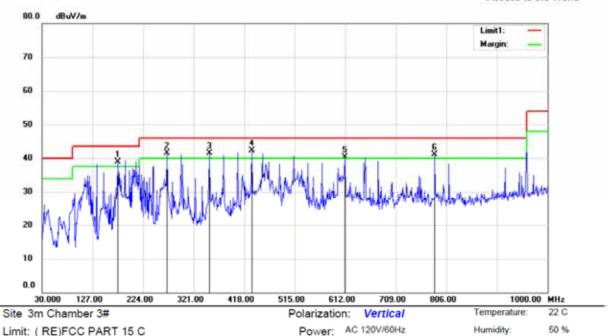


Limit: (RE)FCC PART 15 C

Mode:TX 2412

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	ļ	175.5000	53.44	-14.59	38.85	43.50	-4.65	QP			
2	ļ	269.5900	51.37	-9.81	41.56	46.00	-4.44	QP			
3	ļ	351.0700	48.93	-7.44	41.49	46.00	-4.51	QP			
4	*	432.5500	48.39	-6.18	42.21	46.00	-3.79	QP			
5	ļ	611.0300	43.45	-3.19	40.26	46.00	-5.74	QP			
6	ļ	783.6900	41.91	-0.74	41.17	46.00	-4.83	QP			



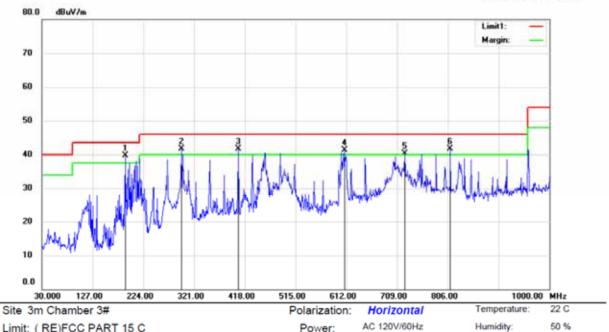


Power:

Limit: (RE)FCC PART 15 C

Mode:TX 2437

No.	M	k.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	18	9.0800	53.11	-13.37	39.74	43.50	-3.76	QP			
2	İ	29	6.7500	50.48	-8.74	41.74	46.00	-4.26	QP			
3	ı	40	5.3900	48.64	-6.88	41.76	46.00	-4.24	QP			
4	ļ	60	8.1200	44.58	-3.26	41.32	46.00	-4.68	QP			
5	ļ	72	3.5500	42.07	-1.68	40.39	46.00	-5.61	QP			
6	ļ	81	0.8500	42.19	-0.45	41.74	46.00	-4.26	QP			



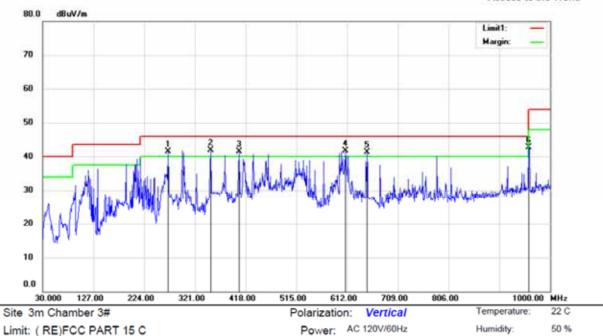


Limit: (RE)FCC PART 15 C

Mode:TX 2437

No.	M	Λk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	ļ	2	69.5900	51.36	-9.81	41.55	46.00	-4.45	QP			
2	Ī	3	51.0700	49.38	-7.44	41.94	46.00	-4.06	QP			
3	ļ	4	05.3900	48.45	-6.88	41.57	46.00	-4.43	QP			
4	ļ	6	08.1200	44.93	-3.26	41.67	46.00	-4.33	QP			
5	ļ	6	49.8300	44.08	-2.83	41.25	46.00	-4.75	QP			
6	*	9	59.2600	40.21	2.45	42.66	46.00	-3.34	QP			



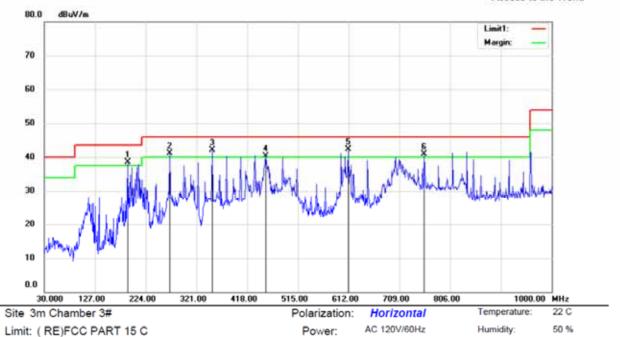


Mode:TX 2462

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	ļ	189.0800	51.79	-13.37	38.42	43.50	-5.08	QP			
2	ļ	269.5900	50.91	-9.81	41.10	46.00	-4.90	QP			
3	ļ	351.0700	49.47	-7.44	42.03	46.00	-3.97	QP			
4	İ	452.9200	46.02	-5.81	40.21	46.00	-5.79	QP			
5	*	611.0300	45.41	-3.19	42.22	46.00	-3.78	QP			
6	İ	756.5300	41.93	-1.08	40.85	46.00	-5.15	QP			



Humidity:

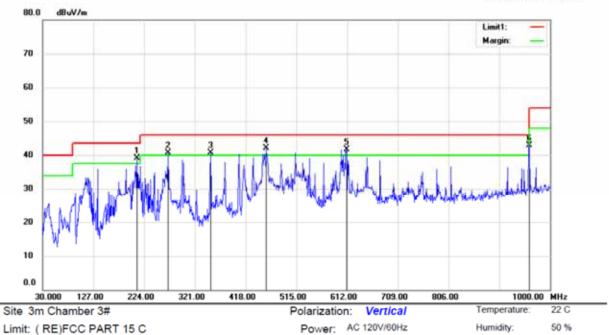

Limit: (RE)FCC PART 15 C

Mode:TX 2462

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	ļ	210.4200	51.58	-12.55	39.03	43.50	-4.47	QP			
2	Ţ	269.5900	50.55	-9.81	40.74	46.00	-5.26	QP			
3	ļ	351.0700	48.21	-7.44	40.77	46.00	-5.23	QP			
4	*	457.7700	47.74	-5.72	42.02	46.00	-3.98	QP			
5	ļ	611.0300	44.88	-3.19	41.69	46.00	-4.31	QP			
6		960.2300	40.35	2.46	42.81	54.00	-11.19	QP			



8.6 CONDUCTED EMISSIONS TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Conducted Emission Limit

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 7.3conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane. Maximum procedure was performed on the highest emissions to ensure EUT compliance. Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results


Pass

The 120V &240V voltage have been tested, and the worst result recorded was report as below:



Humidity:

54 %

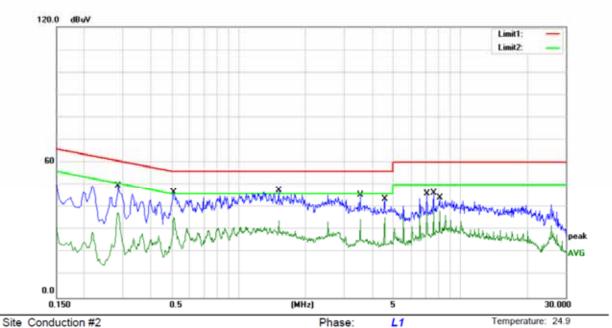

Power: AC 120V/60Hz

Limit: (CE)FCC PART 15 C

Mode: Charging+WIFI ON

Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2860	39.65	9.90	49.55	60.64	-11.09	QP	
2		0.2860	27.77	9.90	37.67	50.64	-12.97	AVG	
3		0.5100	36.65	9.92	46.57	56.00	-9.43	QP	
4		0.5100	25.49	9.92	35.41	46.00	-10.59	AVG	
5	*	1.5180	37.57	9.97	47.54	56.00	-8.46	QP	
6		3.5420	35.58	9.99	45.57	56.00	-10.43	QP	
7		4.5500	25.52	10.00	35.52	46.00	-10.48	AVG	
8		7.0740	35.91	10.03	45.94	60.00	-14.06	QP	
9		7.0740	27.93	10.03	37.96	50.00	-12.04	AVG	
10		7.5780	36.31	10.04	46.35	60.00	-13.65	QP	
11		7.5780	29.19	10.04	39.23	50.00	-10.77	AVG	
12		8.0820	28.30	10.04	38.34	50.00	-11.66	AVG	

*:Maximum data x:Over limit I:over margin Comment: Factor build in receiver. Operator: CSL



Humidity:

54 %

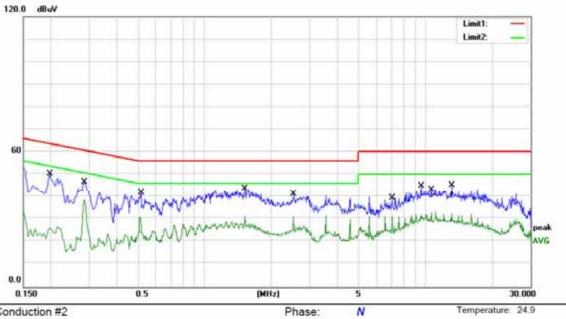

Power; AC 120V/60Hz

Site Conduction #2

Limit: (CE)FCC PART 15 207

Mode: Charging+WIFI ON

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1980	40.24	9.89	50.13	63.69	-13.56	QP	
2	*	0.2860	28.76	9.90	38.66	50.64	-11.98	AVG	
3		0.5100	21.07	9.92	30.99	46.00	-15.01	AVG	
4		0.5140	32.08	9.92	42.00	56.00	-14.00	QP	
5		1.5220	33.55	9.97	43.52	56.00	-12.48	QP	
6		1.5220	21.29	9.97	31.26	46.00	-14.74	AVG	
7		2.5260	21.31	9.98	31.29	46.00	-14.71	AVG	
8		2.5300	31.23	9.98	41.21	56.00	-14.79	QP	
9		7.0780	21.46	10.03	31.49	50.00	-18.51	AVG	
10		9.6020	34.86	10.06	44.92	60.00	-15.08	QP	
11		10.6340	22.67	10.08	32.75	50.00	-17.25	AVG	
12		13.1420	35.07	10.10	45.17	60.00	-14.83	QP	

*:Maximum data Comment: Factor build in receiver. x:Over limit I:over margin Operator: CSL



8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217,§15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2	Result
PASS.	
The EU Note:	IT has 1 antenna: a FPC Antenna, the gain is 2.57dBi; ☐ Antenna use a permanently attached antenna which is not replaceable. ☐ Not using a standard antenna jack or electrical connector for antenna replacement ☐ The antenna has to be professionally installed (please provide method of installation) which in accordance to section 15.203, please refer to the internal photos.

TRF No : FCC 15C/A Page 46 of 46 Report No.: ES170731010E Ver.1.0