



REPORT No.: SZ17050127W02

# FCC RF TEST REPORT

**APPLICANT** : FenSens, Inc

**PRODUCT NAME** : Smart Wireless Parking Sensor

**MODEL NAME** : FenV1

**TRADE NAME** : FenSens

**BRAND NAME** : FenSens

**FCC ID** : 2AMAJ-FENSENS-USCAN

**STANDARD(S)** : 47 CFR Part 15 Subpart C

**ISSUE DATE** : 2017-07-19

**SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.**

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

**MORLAB GROUP**

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Tel: 86-755-36698555 Fax: 86-755-36698525  
Block67, BaoAn District, Shenzhen , GuangDong Province, P. R. China [Http://www.morlab.com](http://www.morlab.com) E-mail: [service@morlab.cn](mailto:service@morlab.cn)



## DIRECTORY

<b>TEST REPORT DECLARATION</b>	4
<b>1. TECHNICAL INFORMATION</b>	5
<b>1.1 APPLICANT INFORMATION</b>	5
<b>1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION</b>	5
<b>1.2.1 IDENTIFICATION OF ALL USED EUTS</b>	5
<b>1.3 TEST STANDARDS AND RESULTS</b>	6
<b>1.3.1 TEST ENVIRONMENT CONDITIONS</b>	6
<b>2. 47 CFR PART 15C REQUIREMENTS</b>	7
<b>2.1 ANTENNA REQUIREMENT</b>	7
<b>2.1.1 APPLICABLE STANDARD</b>	7
<b>2.1.2 RESULT: COMPLIANT</b>	7
<b>2.2 PEAK OUTPUT POWER</b>	7
<b>2.2.1 REQUIREMENT</b>	7
<b>2.2.2 TEST DESCRIPTION</b>	7
<b>2.2.3 TEST PROCEDURE</b>	7
<b>2.2.4 TEST RESULT</b>	8
<b>2.3 6DB BANDWIDTH</b>	10
<b>2.3.1 REQUIREMENT</b>	10
<b>2.3.2 TEST DESCRIPTION</b>	10
<b>2.3.3 TEST PROCEDURE</b>	10
<b>2.3.4 TEST RESULT</b>	11
<b>2.4 CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE</b>	13
<b>2.4.1 REQUIREMENT</b>	13
<b>2.4.2 TEST DESCRIPTION</b>	13
<b>2.4.3 TEST RESULT</b>	13
<b>2.5 POWER SPECTRAL DENSITY (PSD)</b>	17
<b>2.5.1 REQUIREMENT</b>	17
<b>2.5.2 TEST DESCRIPTION</b>	17
<b>2.5.3 TEST PROCEDURE</b>	17
<b>2.5.4 TEST RESULT</b>	17
<b>2.6 RESTRICTED FREQUENCY BANDS</b>	20



2.6.1	REQUIREMENT	20
2.6.2	TEST DESCRIPTION	20
2.6.3	TEST RESULT	21
<b>2.7</b>	<b>CONDUCTED EMISSION</b>	<b>24</b>
2.7.1	REQUIREMENT	24
2.7.2	TEST DESCRIPTION	24
2.7.3	TEST RESULT	25
<b>2.8</b>	<b>RADIATED EMISSION</b>	<b>26</b>
2.8.1	REQUIREMENT	26
2.8.2	TEST DESCRIPTION	27
2.8.3	TEST RESULT	29
<b><u>ANNEX A GENERAL INFORMATION</u></b>		<b>33</b>

Change History		
Issue	Date	Reason for change
1.0	2017-06-27	First edition
2.0	2017-07-19	Second edition



## TEST REPORT DECLARATION

Applicant	FenSens, Inc
Applicant Address	383 E. Laurel Rd, Bellingham, WA 98226, USA
Manufacturer	NOA Labs Ltd.
Manufacturer Address	709 Bldg C HuangDu GuangChang Building YiTian Road, Futian District, Shenzhen, 518000, GuangDong, China
Product Name	Smart Wireless Parking Sensor
Model Name	FenV1
Brand Name	FenSens
HW Version	V1.0.0
SW Version	V1.0.2
Test Standards	47 CFR Part 15 Subpart C
Test Date	2017-06-06 to 2017-06-21
Test Result	PASS

Tested by : Su Hang  
Su Hang (Test Engineer)

Approved by : Qiu Xiaojun  
Qiu Xiaojun (Supervisor)



## 1. TECHNICAL INFORMATION

Note: Provide by applicant.

### 1.1 Applicant Information

Company:	FenSens, Inc
Address:	383 E. Laurel Rd, Bellingham, WA 98226, USA

### 1.2 Equipment under Test (EUT) Description

Brand Name:	FenSens
Trade Name:	FenSens
Model Name:	FenV1
Frequency Range:	The frequency range used is 2402MHz - 2480MHz (40 channels, at intervals of 2MHz);
Modulation Type:	GFSK
Bluetooth Version:	Bluetooth 4.1 BLE
Antenna Type:	PCB Antenna
Antenna Gain:	4.41 dBi

#### NOTE:

The EUT is a Smart Wireless Parking Sensor, it contain Bluetooth 4.1 LE Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth 4.1 LE is  $F(\text{MHz})=2402+2*n$  ( $0 \leq n \leq 39$ ). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19 (2440MHz) and 39 (2480MHz).

The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

#### 1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
A01	V1.0.0	V1.0.2



### 1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.203	Antenna Requirement	N/A	<u>PASS</u>
2	15.247(b)	Peak Output Power	Jun 06, 2017	<u>PASS</u>
3	15.247(a)	Bandwidth	Jun 06, 2017	<u>PASS</u>
4	15.247(d)	Conducted Spurious Emission and Band Edge	Jun 06, 2017	<u>PASS</u>
5	15.247(d)	Restricted Frequency Bands	Jun 21, 2017& Jul 15, 2017	<u>PASS</u>
6	15.207	Conducted Emission	N/A	<u>N/A</u>
7	15.209 ,15.247(d)	Radiated Emission	Jun 20, 2017	<u>PASS</u>
8	15.247(e)	Power spectral density (PSD)	Jun 06, 2017	<u>PASS</u>

**Note:** Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v04 (04/05/2017).

#### 1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

## 2. 47 CFR PART 15C REQUIREMENTS

### 2.1 Antenna requirement

#### 2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

### 2.2 Peak Output Power


#### 2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

#### 2.2.2 Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

#### A. Test Setup:

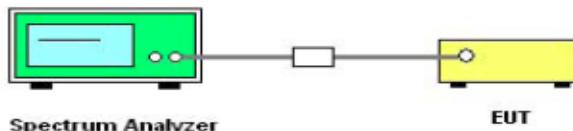

The EUT (Equipment under the test) which is powered by the adapter is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

#### B. Equipments List:

Please reference ANNEX A (1.5).

#### 2.2.3 Test procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer:

- Set analyzer center frequency to channel center frequency.



- b) Set the RBW to 1MHz
- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time to auto couple.
- f) Detector = peak.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use peak marker function to determine the peak amplitude level.


## 2.2.4 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.


### A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power		Refer to Plot	Limit		Verdict
		dBm	W		dBm	W	
0	2402	-2.30	0.00059	Plot A	30	1	PASS
19	2440	-2.19	0.00060				PASS
39	2480	-1.65	0.00068				PASS


### B. Test Plots:

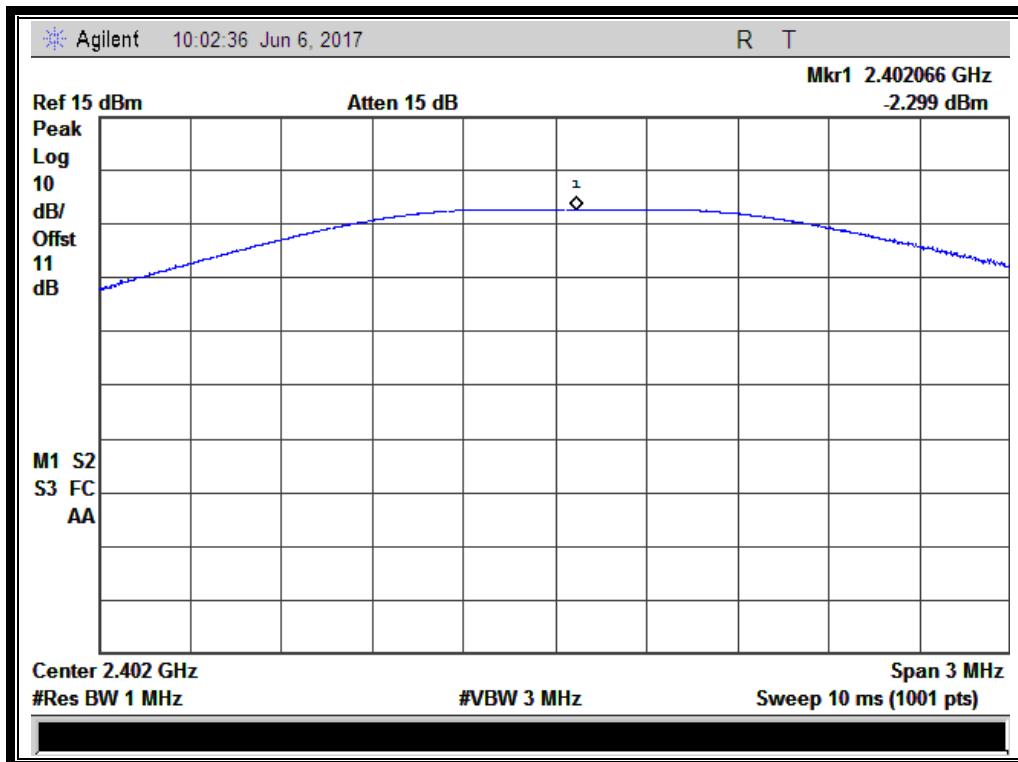

(Plot A: Channel 0: 2402MHz)

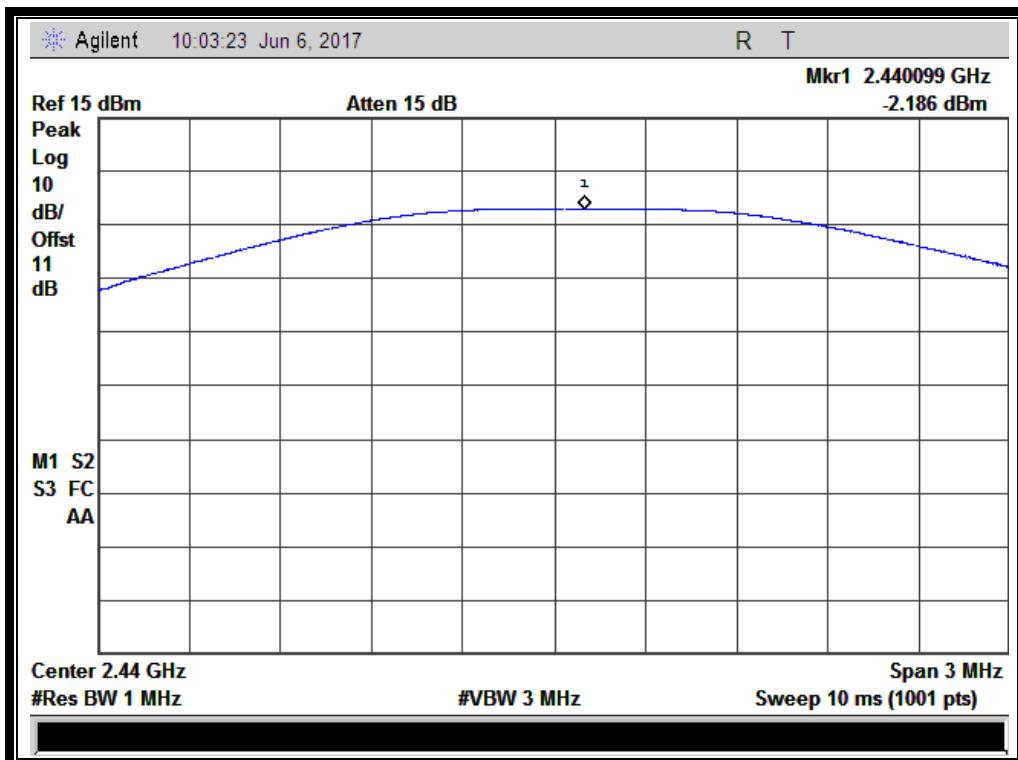

(Plot B: Channel 19: 2440MHz)

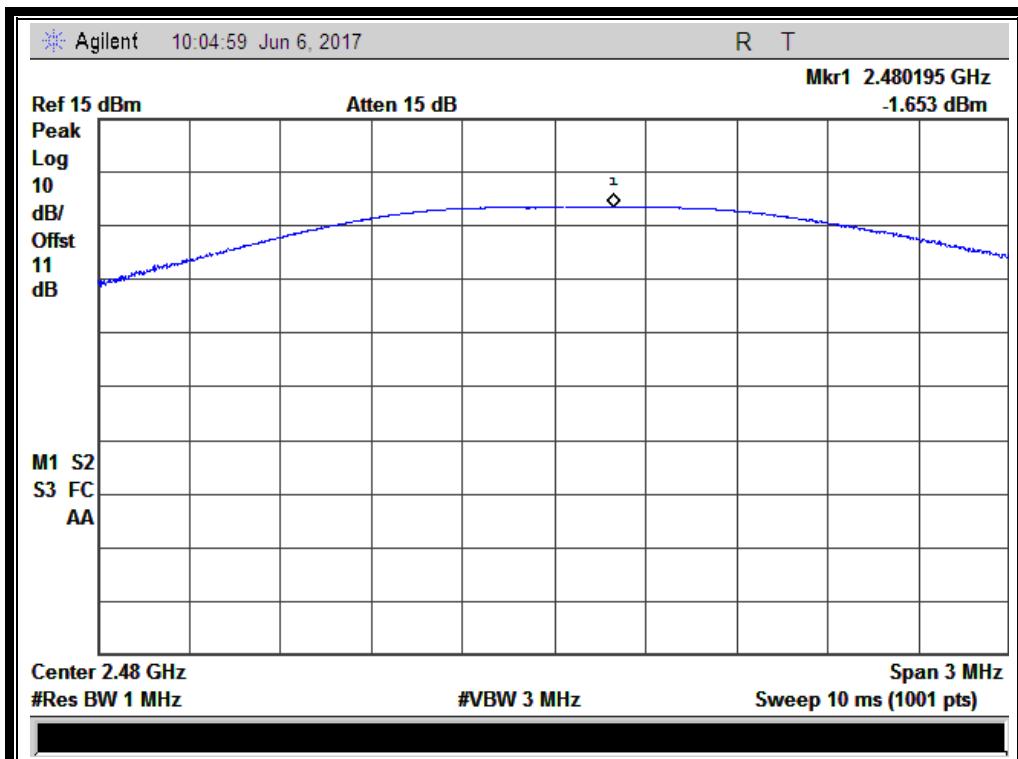

(Plot C: Channel 39: 2480MHz)


## 2.3 6dB Bandwidth

### 2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.3.2 Test Description

#### A. Test Set:

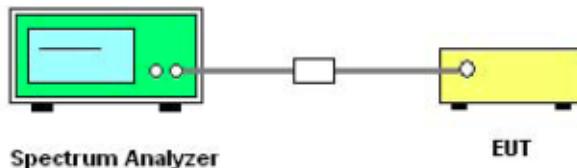

The EUT which is powered by the adapter, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### B. Equipments List:

Please reference ANNEX A(1.5).

### 2.3.3 Test procedure

The steps for the first option are as follows:

- (1) Set analyzer center frequency to channel center frequency.
  - a) Set RBW = 100 kHz.
  - b) Set the VBW=300 kHz.
  - c) Detector = peak.
  - d) Trace mode = max hold.
  - e) Sweep = auto couple
  - f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
  
- (2) The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz, VBW  $\geq 3 \times$  RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth



measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.


### 2.3.4 Test Result


The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the module.

#### A. Test Verdict:


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
0	2402	0.7747	Plot A	$\geq 500$	PASS
19	2440	0.7729	Plot B	$\geq 500$	PASS
39	2480	0.7961	Plot C	$\geq 500$	PASS

#### B. Test Plots:

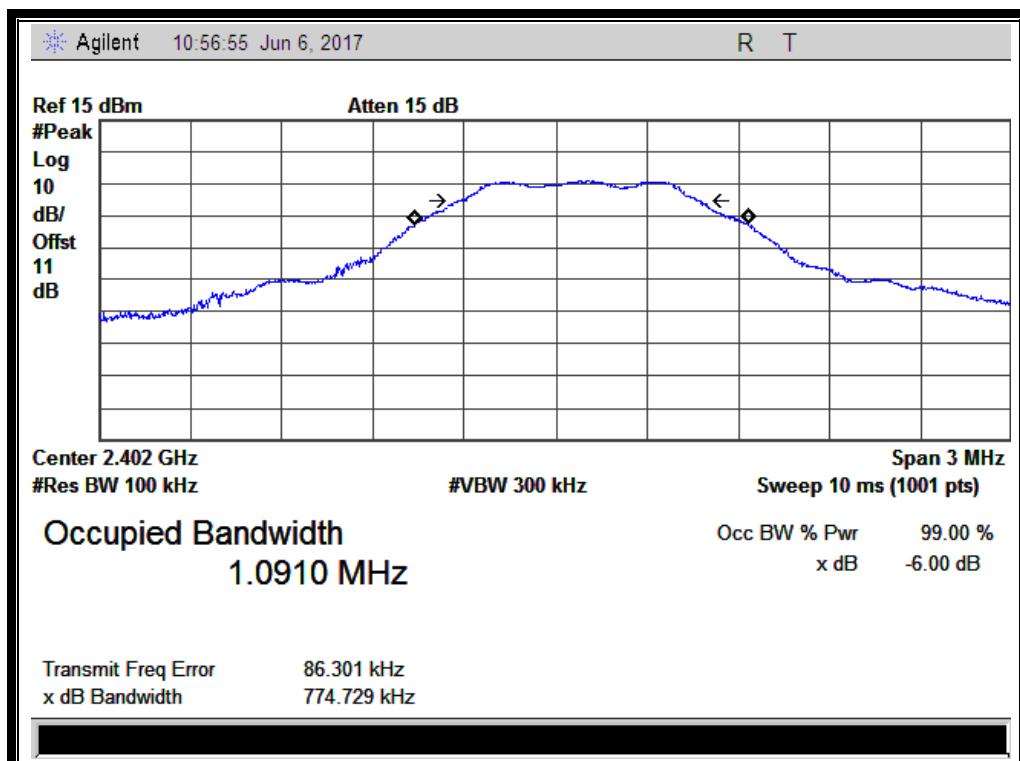

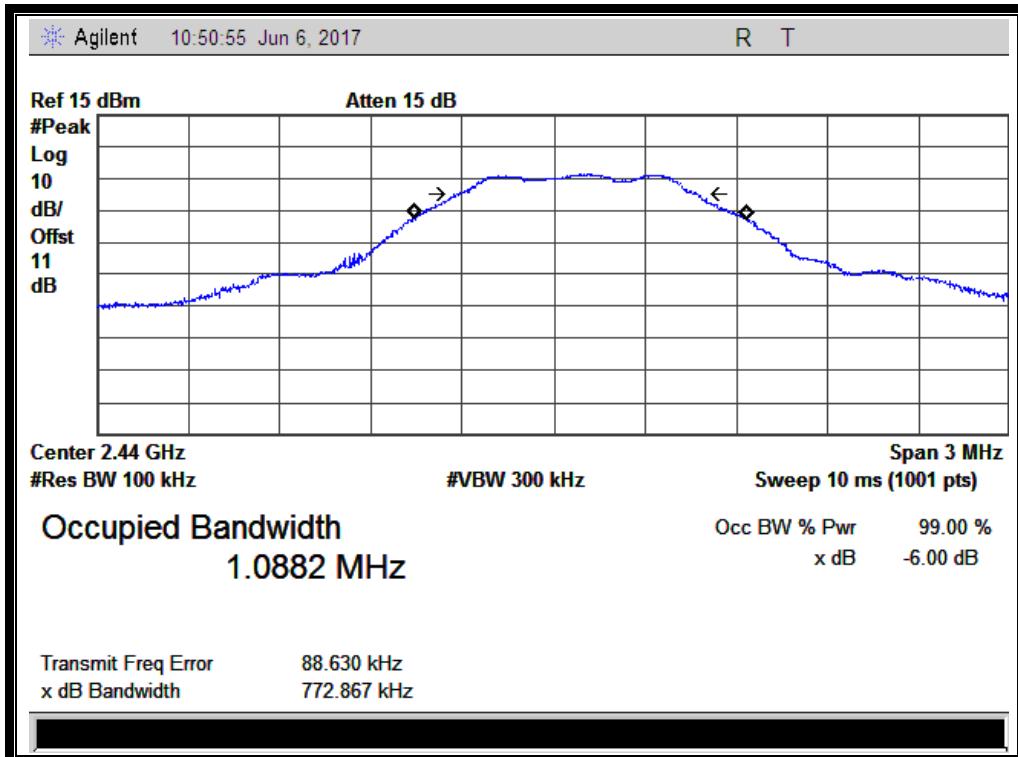

(Plot B: Channel 19: 2440 MHz)

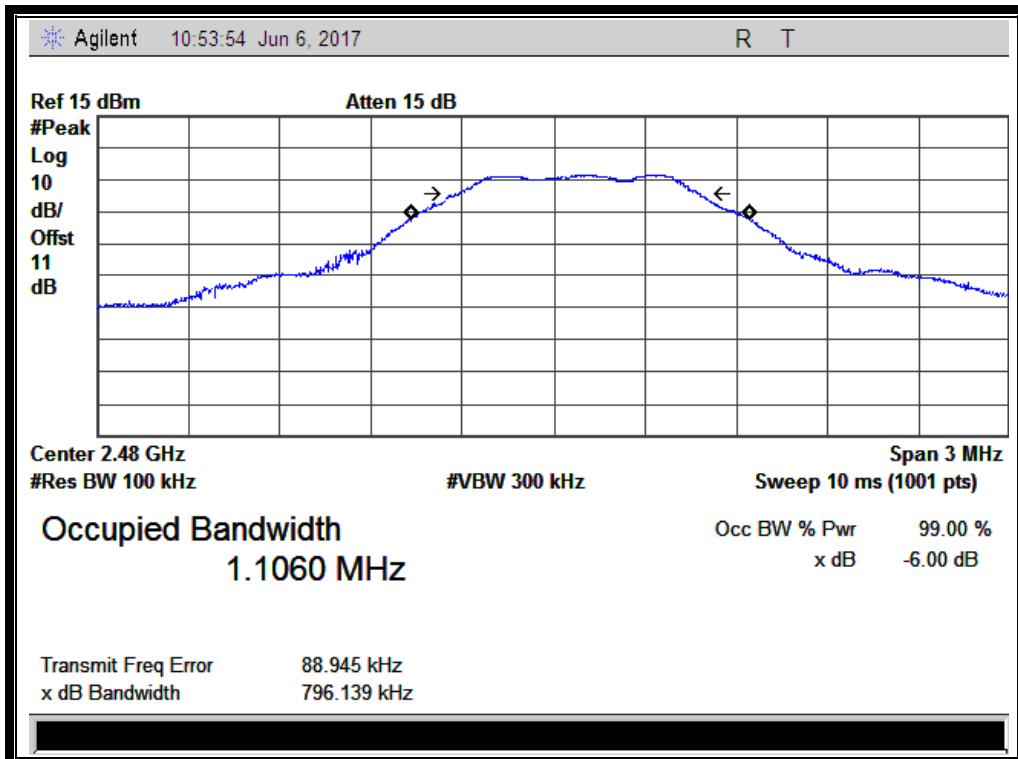

(Plot C: Channel 39: 2480MHz)




## 2.4 Conducted Spurious Emissions and Band Edge

### 2.4.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.4.2 Test Description

#### A. Test Set:

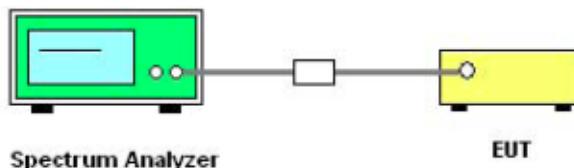

The EUT which is powered by the adapter, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### B. Equipments List:

Please reference ANNEX A (1.5).

### 2.4.3 Test Result


The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

#### A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-26.10	Plot A.1	-3.53	-23.53	PASS
19	2440	-25.48	Plot B.1	-2.74	-22.74	PASS
39	2480	-27.24	Plot C.1	-2.60	-22.60	PASS

**B. Test Plots:**



**Note:** the power of the Module transmitting frequency should be ignored.

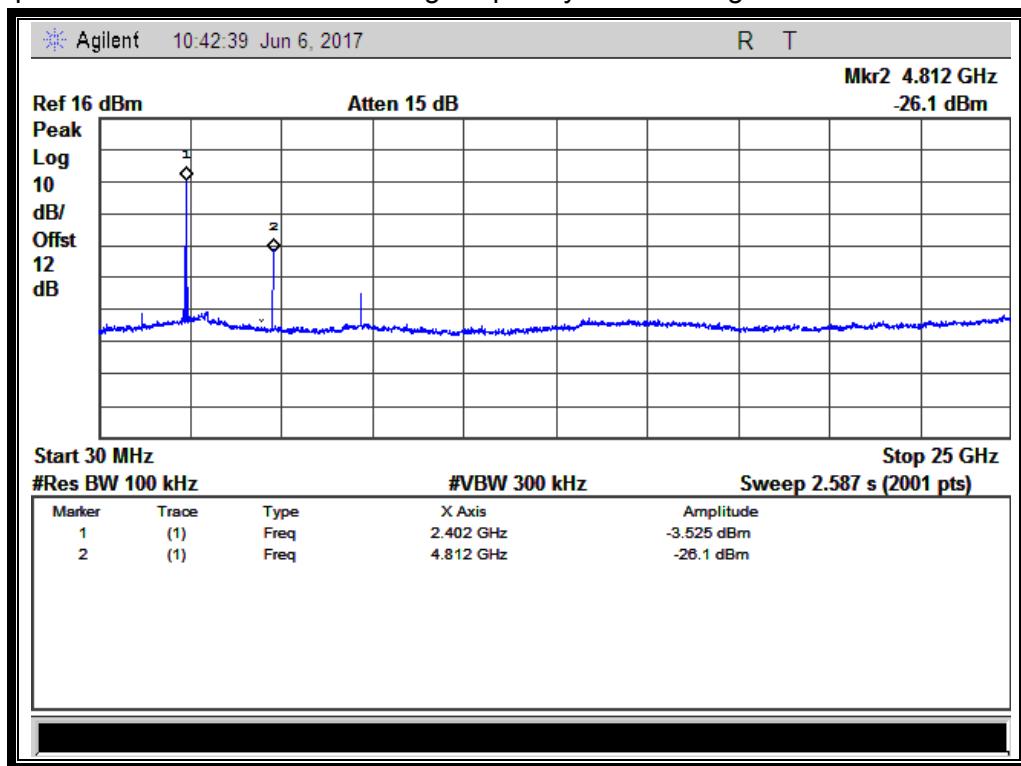

(Plot A.1: Channel = 0, 30MHz to 25GHz)




REPORT No.: SZ17050127W02

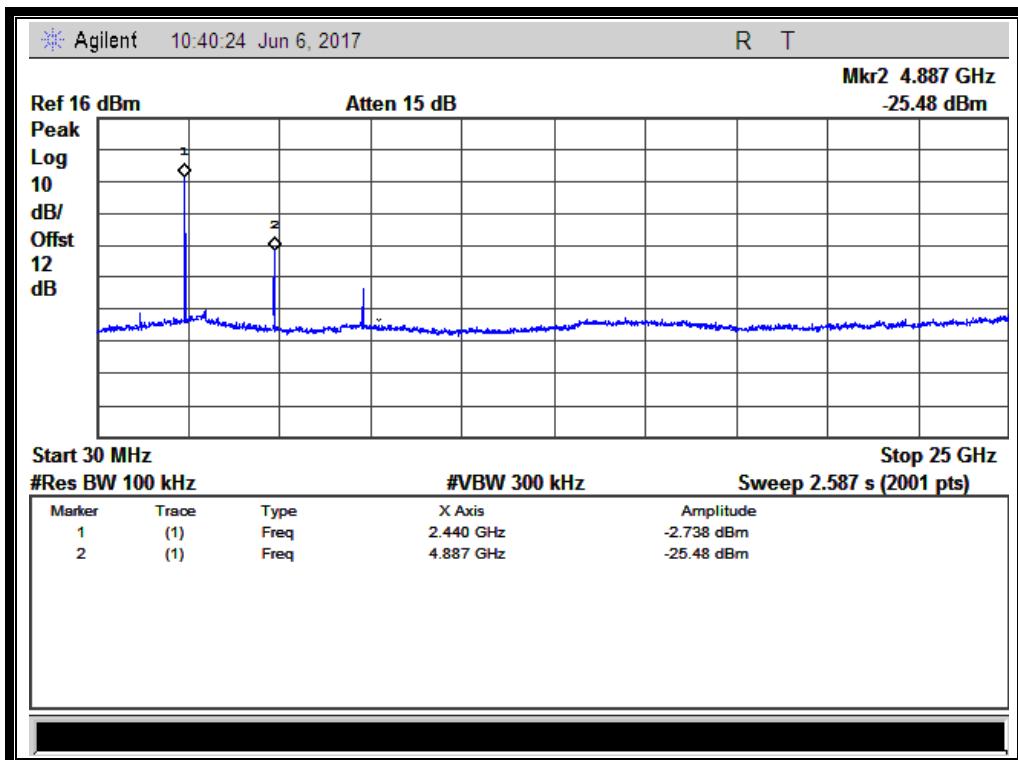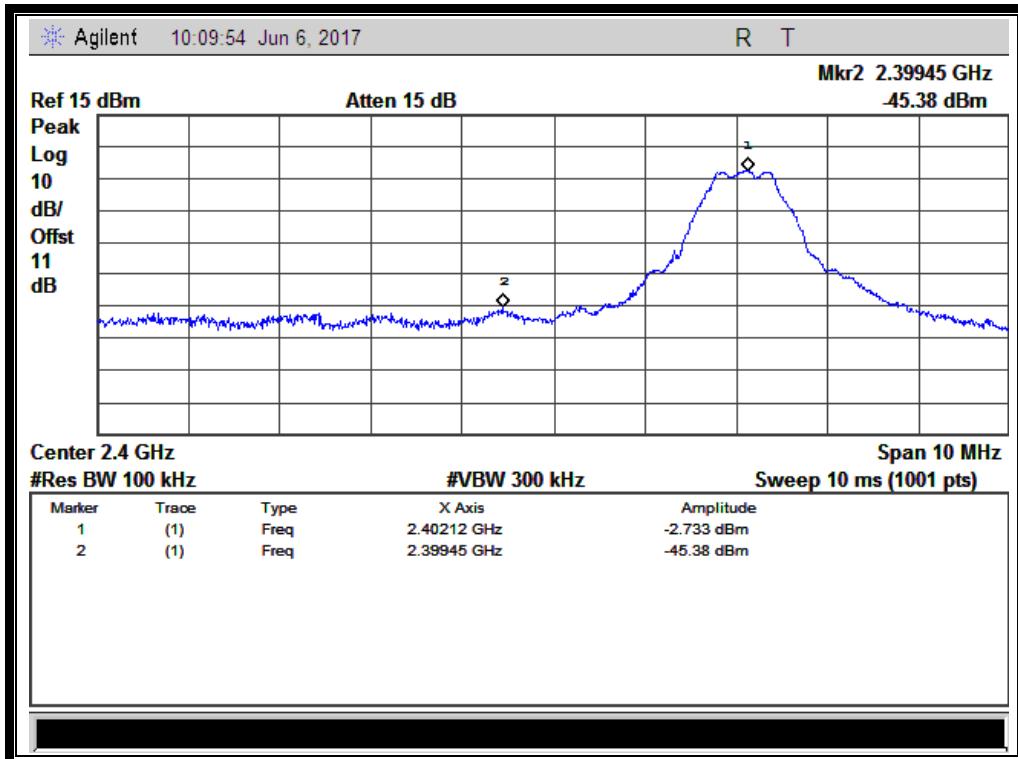




REPORT No.: SZ17050127W02

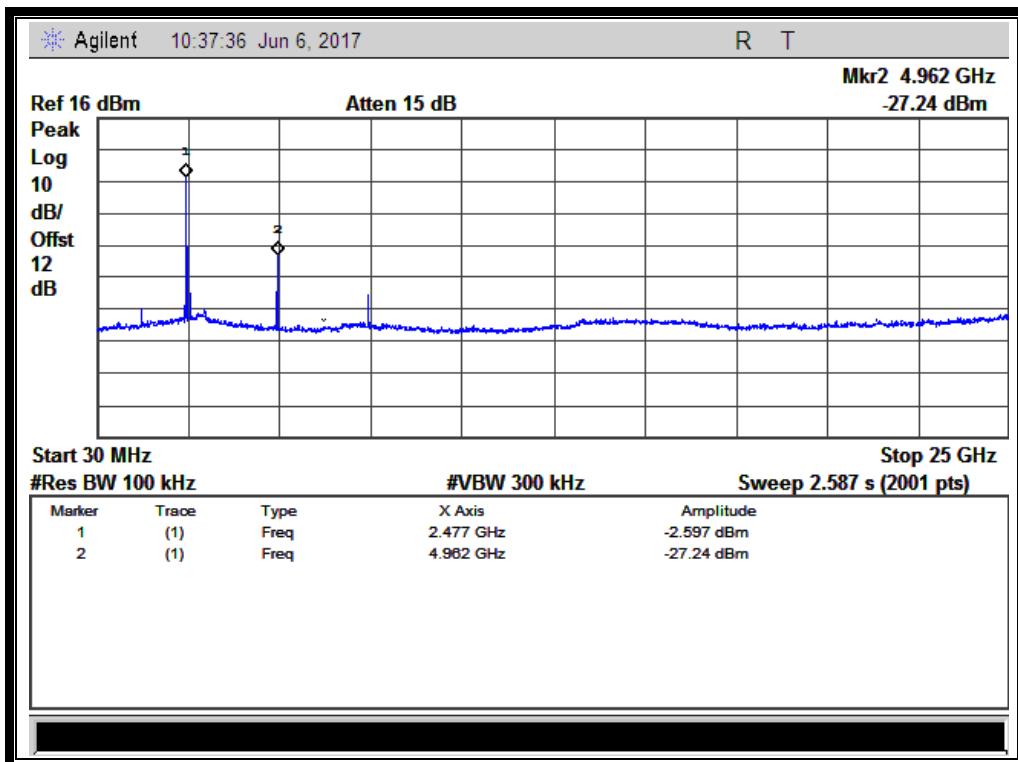

(Plot C.1: Channel = 39, 30MHz to 25GHz)

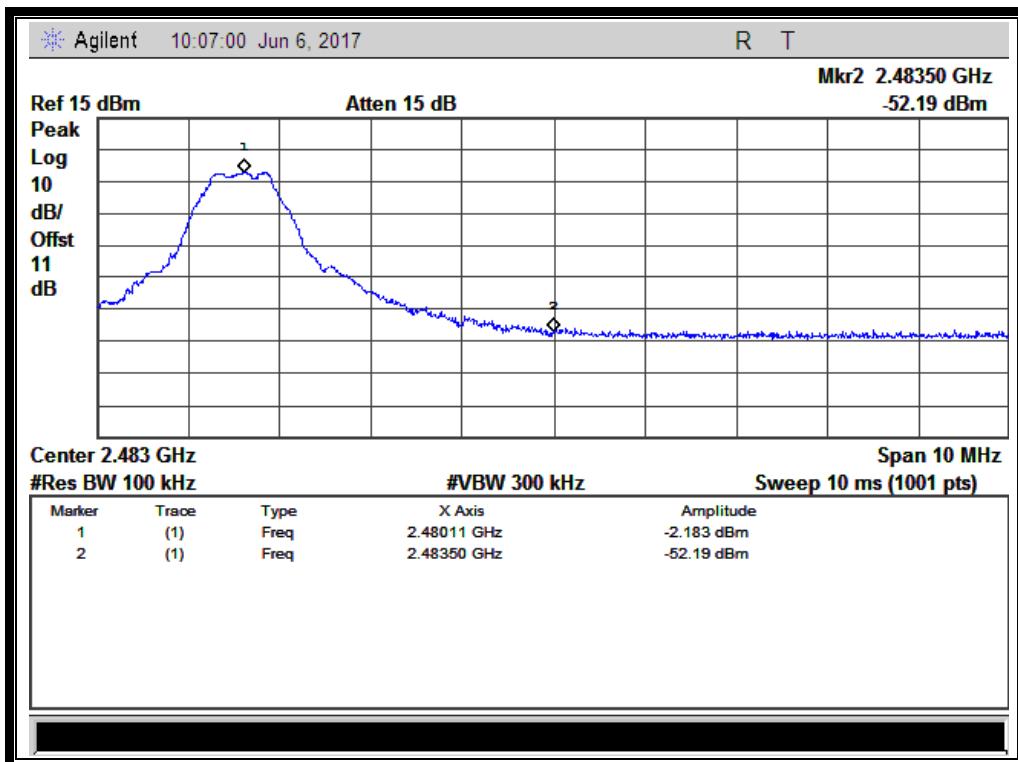

(Band Edge@ Channel = 39)


## 2.5 Power spectral density (PSD)

### 2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 2.5.2 Test Description

#### A. Test Set:

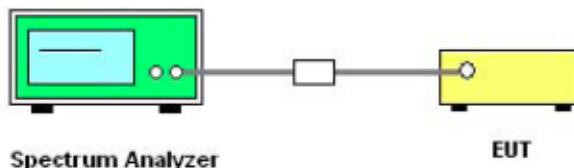

The EUT which is powered by the adapter, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

#### B. Equipments List:

Please reference ANNEX A (1.5).

### 2.5.3 Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 3MHz
- c) Set the RBW to 3 kHz
- d) Set the VBW to 10KHz
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

### 2.5.4 Test Result

The lowest, middle and highest channels are tested.


#### A. Test Verdict:



Spectral power density (dBm/3kHz)					
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict
0	2402	-14.30	Plot A	8	PASS
19	2440	-14.03	Plot B	8	PASS
39	2480	-13.05	Plot C	8	PASS

Measurement uncertainty:  $\pm 1.3$ dB


## B. Test Plots:

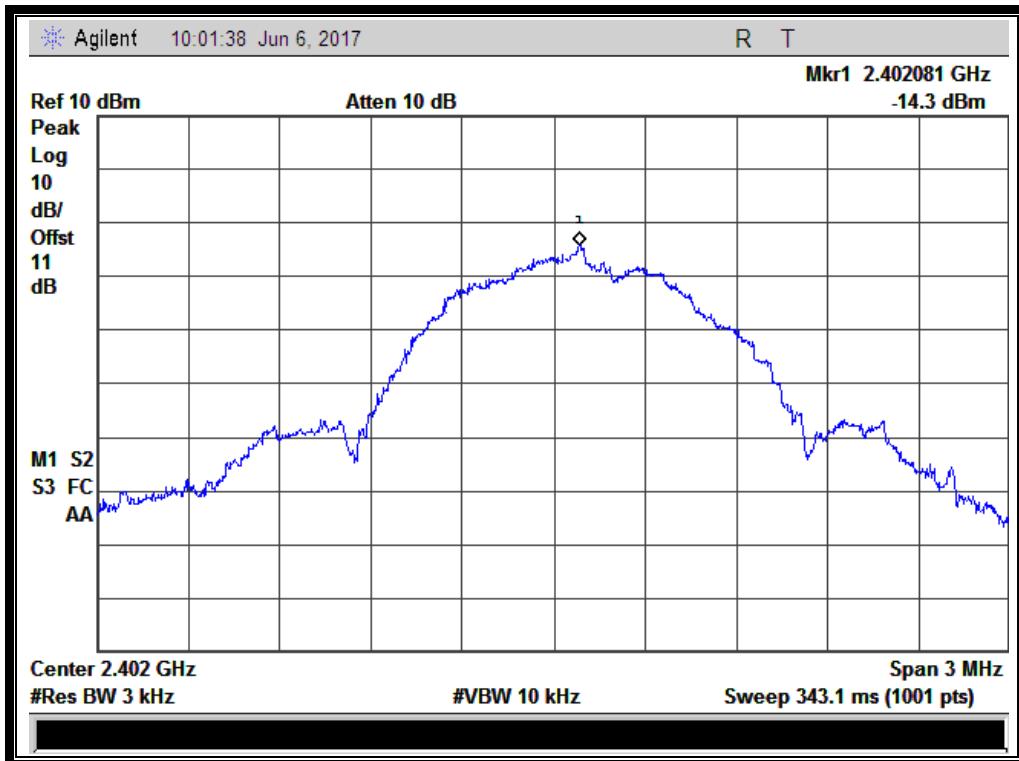


(Plot A: Channel = 0)



REPORT No.: SZ17050127W02

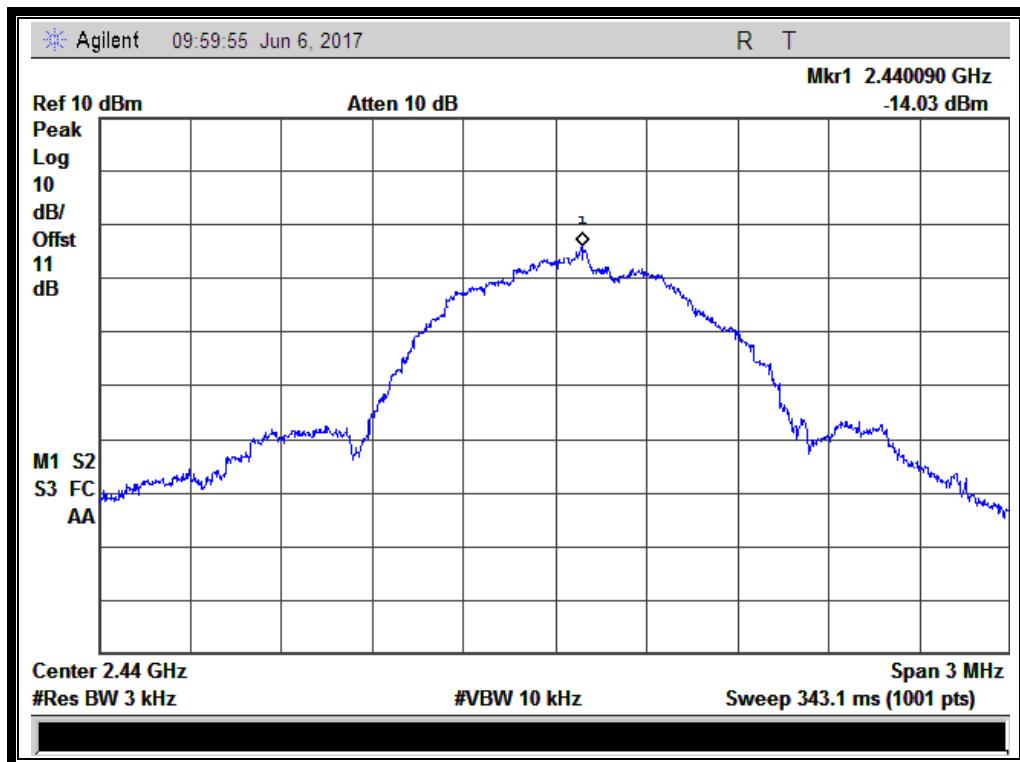

(Plot B: Channel = 19)

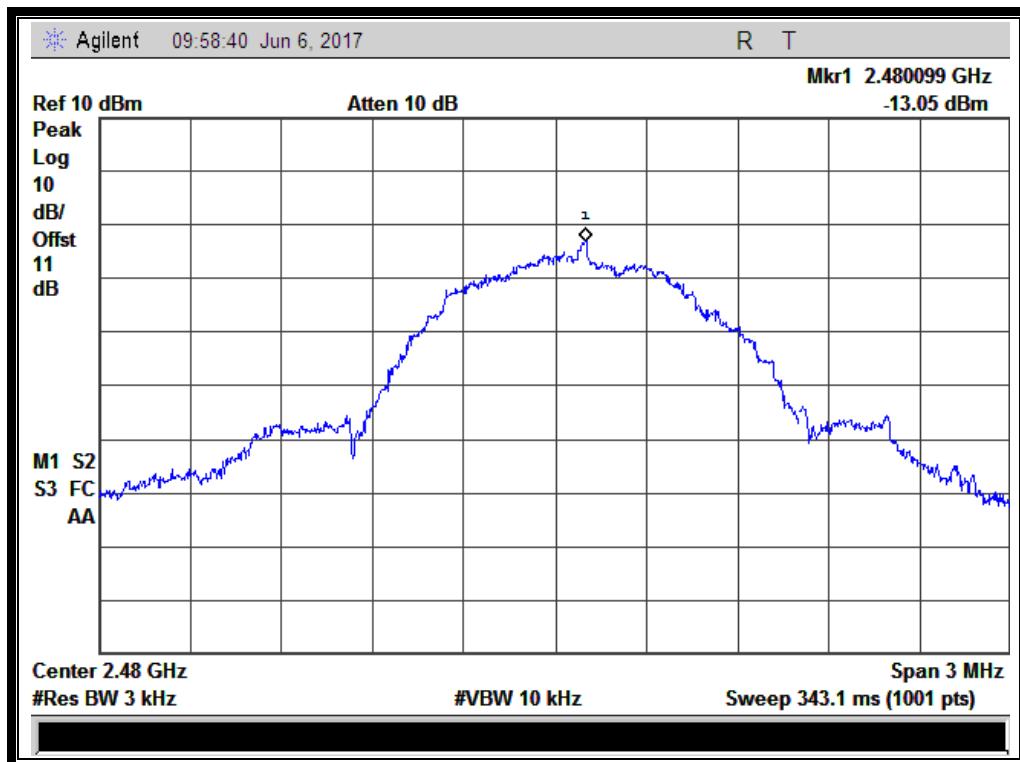

(Plot C: Channel = 39)


## 2.6 Restricted Frequency Bands

### 2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### 2.6.2 Test Description

#### A. Test Setup

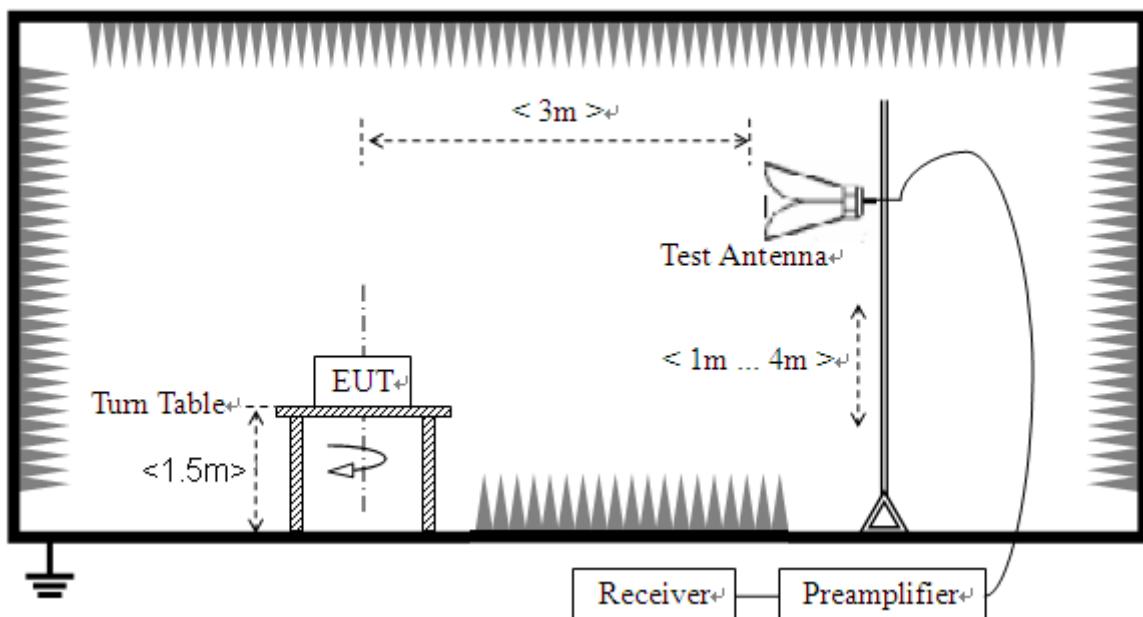

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

#### B. Equipments List:

Please reference ANNEX A(1.5).



### 2.6.3 Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}/\text{m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading


$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m


Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

#### A. Test Verdict:

Channel	Frequency (MHz)	Detector PK/ AV	Receiver Reading $U_R$ (dBuV)	$A_T$ (dB)	$A_{\text{Factor}}$ (dB@3m)	Max. Emission $E$ (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Verdict
0	2374.26	PK	43.52	-33.63	32.56	42.45	74	Pass
0	2374.26	AV	32.63	-33.63	32.56	31.56	54	Pass
39	2488.52	PK	43.22	-33.18	32.5	42.54	74	Pass
39	2488.52	AV	32.54	-33.18	32.5	31.86	54	Pass

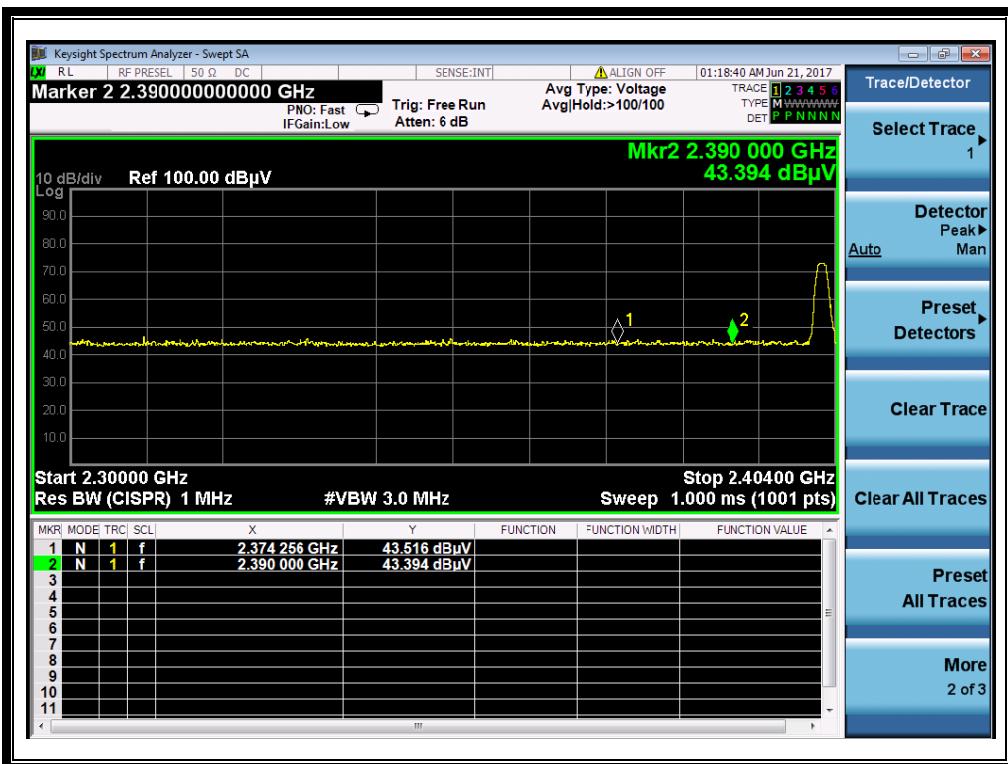**B. Test Plots:**


(Plot A1: Channel = 0 PEAK)

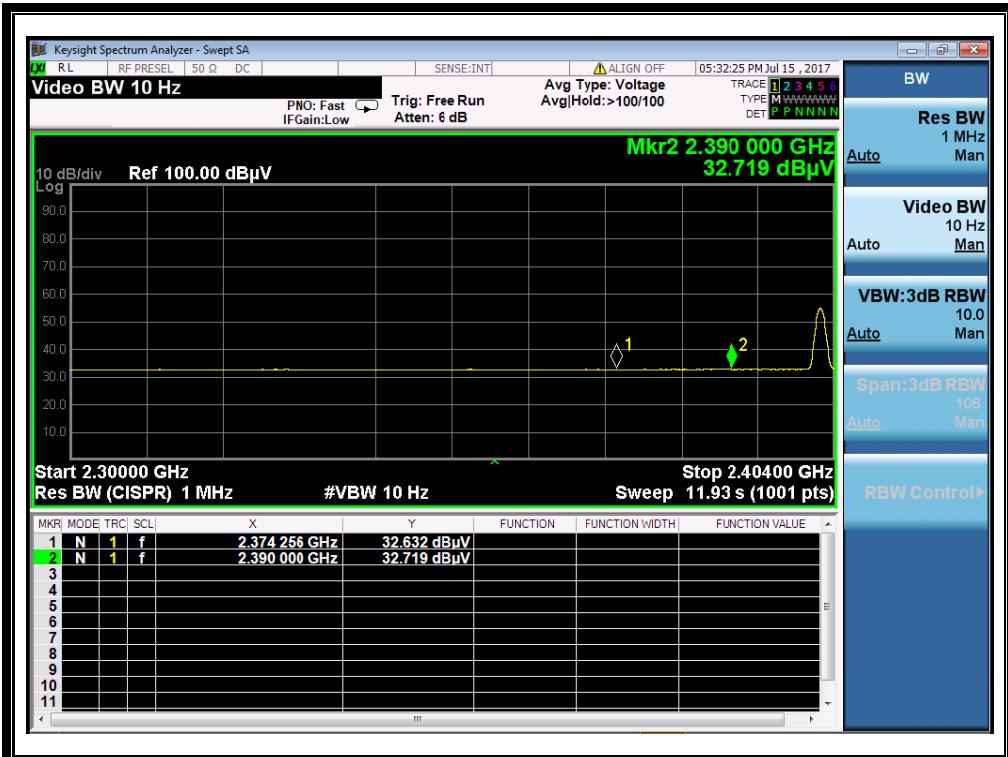


(Plot A2: Channel = 0 AVG)



REPORT No.: SZ17050127W02

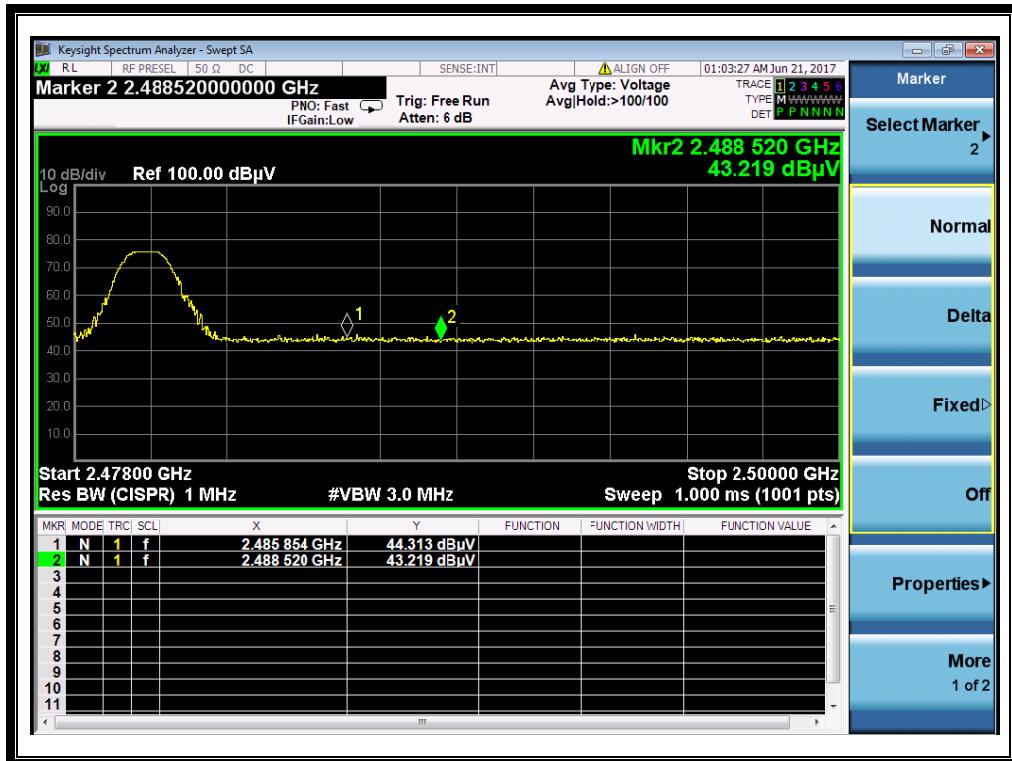

(Plot B1: Channel = 39 PEAK)

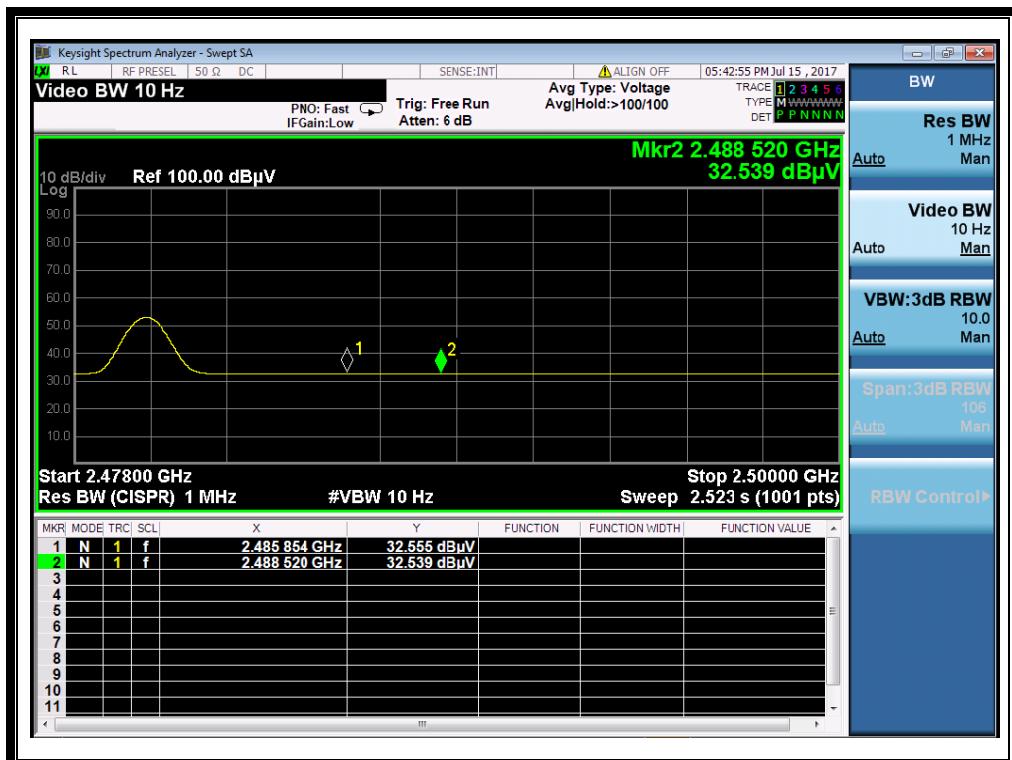

(Plot B2: Channel = 39 AVG)

## 2.7 Conducted Emission

### 2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

### 2.7.2 Test Description

#### A. Test Setup:

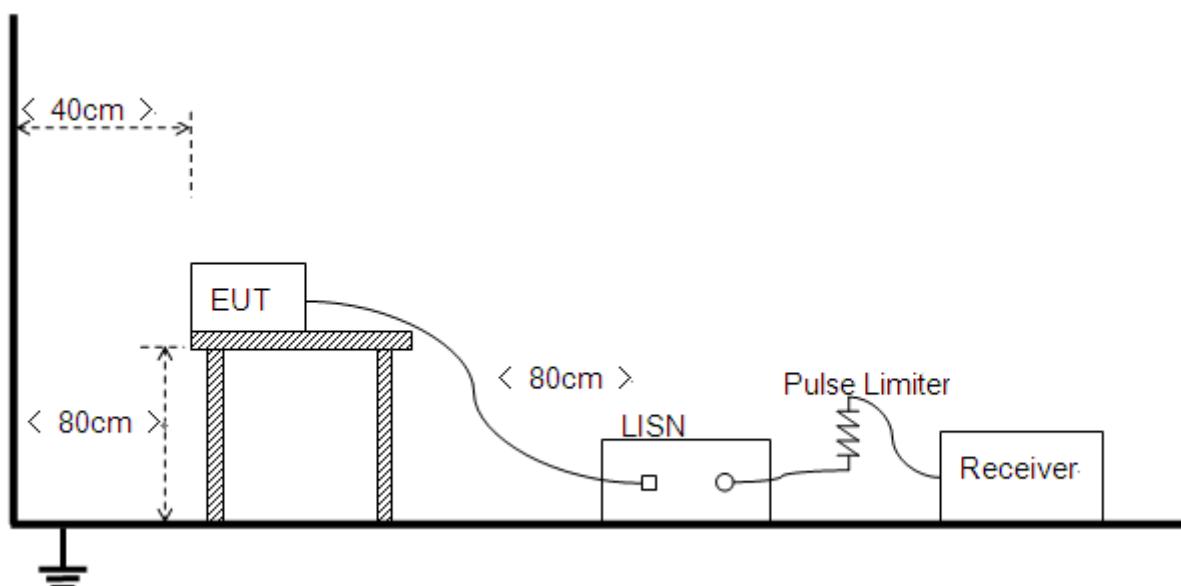

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

#### B. Equipments List:

Please reference ANNEX A(1.5).



### 2.7.3 Test Result

**Note:** Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

**A. Test setup:**

N/A

**B. Test Plots:**

N/A



## 2.8 Radiated Emission

### 2.8.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu$ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


## 2.8.2 Test Description

### A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

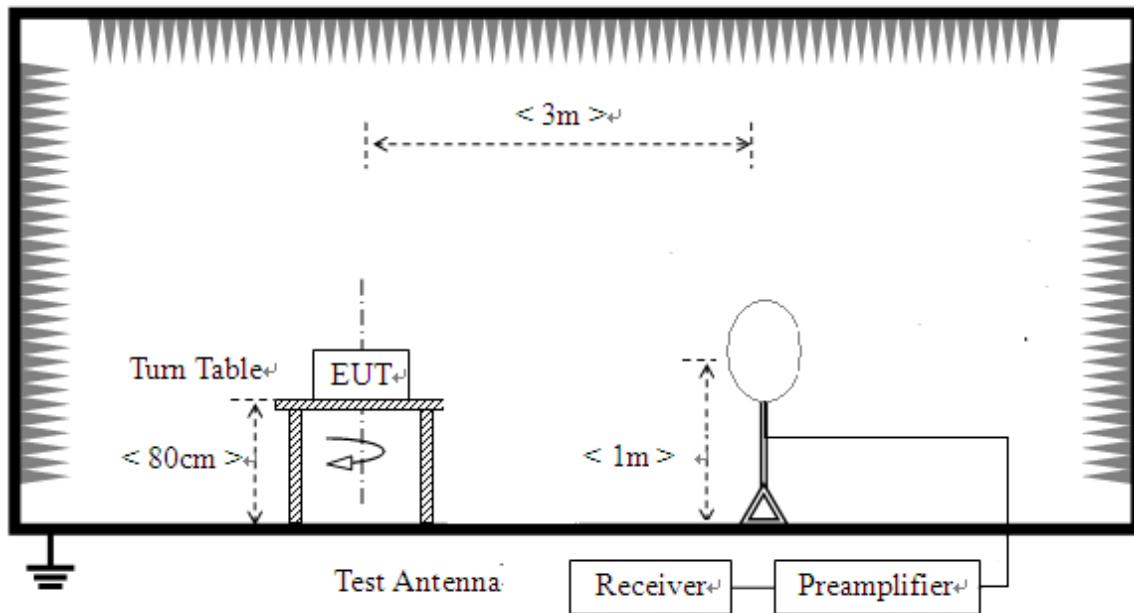

- 2) For radiated emissions from 30MHz to 1GHz

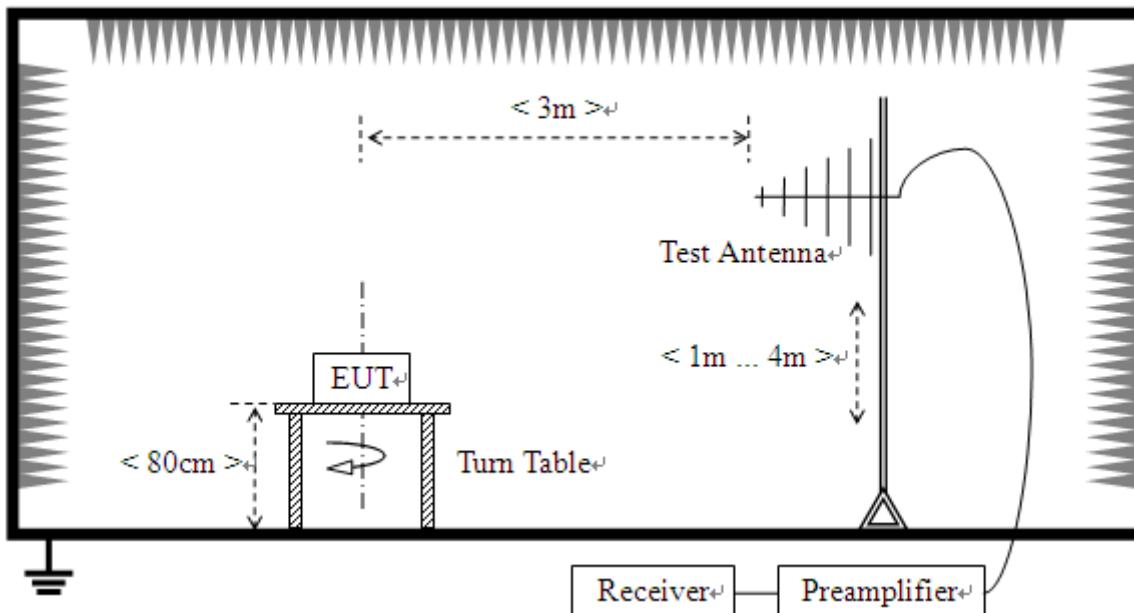

## 3) For radiated emissions above 1GHz

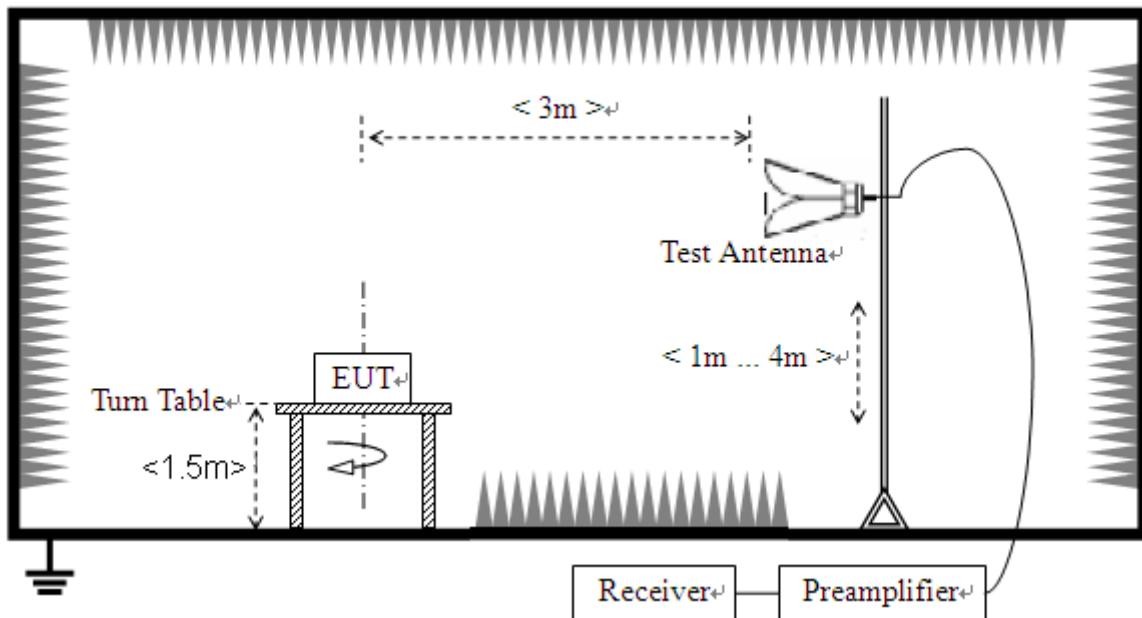

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

## B. Equipments List:

Please reference ANNEX A(1.5).

### 2.8.3 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

$A_T$ : Total correction Factor except Antenna

$U_R$ : Receiver Reading

$G_{\text{preamp}}$ : Preamplifier Gain

$A_{\text{Factor}}$ : Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{\text{Factor}}$  were built in test software.

**Note:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

**A. Test Plots for the Whole Measurement Frequency Range:**  
Plots for Channel = 0



Fre. (MHz)	PK (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AV (dB $\mu$ V/m)	Limit-PK (dB $\mu$ V/m)	Limit-QP (dB $\mu$ V/m)	Limit-AV (dB $\mu$ V/m)	Antenna	Verdict
40.926	34.80	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
123.479	31.44	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
2329.812	45.11	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
4803.746	50.78	46.68	30.57	74.0	N/A	54.00	Horizontal	PASS
9133.843	47.38	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
18396.909	49.86	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre. (MHz)	Pk (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AV (dB $\mu$ V/m)	Limit-PK (dB $\mu$ V/m)	Limit-QP (dB $\mu$ V/m)	Limit-AV (dB $\mu$ V/m)	Antenna	Verdict
43.354	34.40	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
270.375	21.98	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
799.687	26.74	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
2819.967	44.99	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
4803.800	50.18	46.10	35.68	74.0	N/A	54.0	Vertical	PASS
10188.871	48.40	N/A	N/A	74.0	N/A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)




REPORT No.: SZ17050127W02

Plot for Channel = 19



Fre. (MHz)	Pk (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AV (dB $\mu$ V/m)	Limit-PK (dB $\mu$ V/m)	Limit-QP (dB $\mu$ V/m)	Limit-AV (dB $\mu$ V/m)	Antenna	Verdict
40.926	34.33	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
89.487	30.89	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
1110.764	48.61	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
2217.767	48.74	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
5675.468	47.86	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS
12193.017	48.78	N/A	N/A	74.0	N/A	54.00	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)

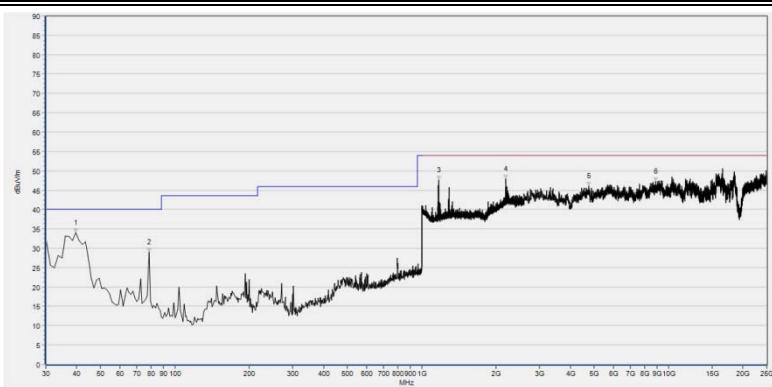

Fre. (MHz)	Pk (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AV (dB $\mu$ V/m)	Limit-PK (dB $\mu$ V/m)	Limit-QP (dB $\mu$ V/m)	Limit-AV (dB $\mu$ V/m)	Antenna	Verdict
39.712	42.33	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
78.561	35.27	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
1170.308	47.67	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
2194.078	48.01	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
4758.938	46.06	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
8877.214	47.26	N/A	N/A	74.0	N/A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



Plot for Channel = 39



Fre. (MHz)	Pk (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AV (dB $\mu$ V/m)	Limit-PK (dB $\mu$ V/m)	Limit-QP (dB $\mu$ V/m)	Limit-AV (dB $\mu$ V/m)	Antenna	Verdict
40.926	33.93	N/A	N/A	N/A	40.00	N/A	Horizontal	PASS
123.479	30.11	N/A	N/A	N/A	43.50	N/A	Horizontal	PASS
428.198	29.42	N/A	N/A	N/A	46.00	N/A	Horizontal	PASS
2507.163	48.23	N/A	N/A	74.0	N/A	54.0	Horizontal	PASS
2576.311	52.29	48.25	31.56	74.0	N/A	54.0	Horizontal	PASS
11736.789	48.08	N/A	N/A	74.0	N/A	54.0	Horizontal	PASS

(Antenna Horizontal, 30MHz to 25GHz)



Fre. (MHz)	Pk (dB $\mu$ V/m)	QP (dB $\mu$ V/m)	AV (dB $\mu$ V/m)	Limit-PK (dB $\mu$ V/m)	Limit-QP (dB $\mu$ V/m)	Limit-AV (dB $\mu$ V/m)	Antenna	Verdict
43.354	34.11	N/A	N/A	N/A	40.00	N/A	Vertical	PASS
270.375	21.70	N/A	N/A	N/A	46.00	N/A	Vertical	PASS
1111.405	45.58	N/A	N/A	74.0	N/A	54.0	Vertical	PASS
2507.500	53.84	50.71	31.49	74.0	N/A	54.0	Vertical	PASS
2576.800	56.96	53.49	31.58	74.0	N/A	54.0	Vertical	PASS
18396.909	49.87	N/A	N/A	74.0	N/A	54.0	Vertical	PASS

(Antenna Vertical, 30MHz to 25GHz)



## ANNEX A GENERAL INFORMATION

### 1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

### 1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

### 1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC registration number is 695796.

### 1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	±2.22dB
Power spectral density (PSD)	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB



REPORT No.: SZ17050127W02

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

## 1.5 Test Equipments Utilized

### 1.5.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2017.05.24	2018.05.23
2	Power Splitter	NW521	1506A	Weinschel	2017.05.24	2018.05.23
3	Attenuator 1	(N/A.)	10dB	Resnet	2017.05.24	2018.05.23
4	Attenuator 2	(N/A.)	3dB	Resnet	2017.05.24	2018.05.23
5	EXA Signal Analyzer	MY53470836	N9010A	Agilent	2016.12.07	2017.12.06
6	RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
7	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
8	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

### 1.5.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2017.05.24	2018.05.23
2	LISN	812744	NSLK 8127	Schwarzbeck	2017.05.24	2018.05.23
3	Service Supplier	100448	CMU200	R&S	2017.05.24	2018.05.23
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2017.05.24	2018.05.23
5	Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

### 1.5.3 Auxiliary Test Equipment

Auxiliary Test Equipment						
No.	Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	T430i	Think Pad	Lenovo	N/A	N/A

**1.5.4 Radiated Test Equipments**

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	GB45360846	8960-E5515C	Agilent	2017.05.17	2018.05.16
2	Receiver	MY54130016	N9038A	Agilent	2017.05.17	2018.05.16
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2016.12.09	2017.12.08
4	Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2016.07.05	2017.07.04
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2016.07.05	2017.07.04
6	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2016.07.05	2017.07.04
7	Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
8	Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
9	Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
10	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16
11	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16

**1.5.5 Climate Chamber**

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2017.01.11	2018.01.10

**1.5.6 Vibration Table**

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2017.01.11	2018.01.10

**1.5.7 Anechoic Chamber**

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2017.01.11	2018.01.10

\*\*\*\*\* END OF REPORT \*\*\*\*\*