



FCC RF Test Report

APPLICANT : Relay, Inc.
EQUIPMENT : Relay
BRAND NAME : RelayM
MODEL NAME : RY2267
FCC ID : 2AMBHRY2267
STANDARD : 47 CFR Part 22, 24, 27
CLASSIFICATION : PCS Licensed Transmitter held to face (PCF)
TEST DATE(S) : Sep. 08, 2024 ~ Feb. 08, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

***No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China***



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP and Emission Designator	6
1.7 Testing Location	8
1.8 Test Software	9
1.9 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System	12
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example	13
2.5 Frequency List of Low/Middle/High Channels	13
3 CONDUCTED TEST ITEMS	16
3.1 Measuring Instruments	16
3.2 Test Setup	16
3.3 Test Result of Conducted Test	16
3.4 Conducted Output Power and ERP/EIRP	17
3.5 Peak-to-Average Ratio	18
3.6 Occupied Bandwidth	19
3.7 Conducted Band Edge	20
3.8 Conducted Spurious Emission	22
3.9 Frequency Stability	23
4 RADIATED TEST ITEMS	24
4.1 Measuring Instruments	24
4.2 Test Setup	24
4.3 Test Result of Radiated Test	25
4.4 Radiated Spurious Emission	26
5 LIST OF MEASURING EQUIPMENT	27
6 MEASUREMENT UNCERTAINTY	28
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG250505H	Rev. 01	Initial issue of report	Feb. 24, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5, n26)	ERP < 7 Watt		
	§24.232(c)	Equivalent Isotropic Radiated Power (5G NR n2, n25)	EIRP < 2Watt		
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (5G NR n66, n70)	EIRP < 1Watt		
3.5	§24.232(d) §27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Band Edge Measurement (5G NR n5, n26) (5G NR n2, n25) (5G NR n66, n70)	< 43+10log10(P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(h)	Conducted Spurious Emission (5G NR n5, n26) (5G NR n2, n25) (5G NR n66, n70)	< 43+10log10(P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(h)	Radiated Spurious Emission (5G NR n5, n26) (5G NR n2, n25) (5G NR n66, n70)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 15.02 dB at 9240.00 MHz

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Relay, Inc.

2230 Bandmate Way, Suite 500, Raleigh, NC 27607, USA

1.2 Manufacturer

Relay, Inc.

2230 Bandmate Way, Suite 500, Raleigh, NC 27607, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Relay
Brand Name	RelayM
Model Name	RY2267
FCC ID	2AMBHRY2267
IMEI Code	Conducted : 004400152020000 Radiation : 990007540010789
HW Version	v01
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 824 MHz ~ 849 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n70 : 1695 MHz ~ 1710 MHz
Rx Frequency	5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n25 : 1930 MHz ~ 1995 MHz 5G NR n26 : 869 MHz ~ 894 MHz 5G NR n66 : 2110 MHz~ 2200 MHz 5G NR n70 : 1995 MHz ~ 2020 MHz
Bandwidth	n2, n5, n26 : 5MHz / 10MHz / 15MHz / 20MHz n25 : 5MHz / 10MHz / 15MHz / 20MHz /25MHz / 30MHz / 40MHz n66 : 5MHz / 10MHz / 15MHz / 20MHz / 30MHz / 40MHz n70 : 5MHz / 10MHz / 15MHz
SCS	15kHz
Antenna Gain	<Ant.1> n2: 0 dBi n5: -5.1 dBi n25: 0 dBi

	n26: -5.1 dBi n66: 0 dBi <Ant.2> n2: -0.3 dBi n66: 3.4 dBi n70: -0.2 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum ERP/EIRP is calculated from max output power and max antenna gain, only the maximum ERP/EIRP are shown in the report, 5G NR n2/n5/n25/n26 for Ant. 1 and n66/n70 for Ant. 2.
2. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
3. 5G NR support SA (n2/n5/n25/n26/n66/n70) mode and NSA(n2/n5/n66) mode. According to the maximum power between SA and NSA mode, SA covers NSA mode.
4. The device supports two PAs for 5G NR n2/n66 (main PA for ant.1 and other PA for ant.2), we chose higher power PA to calculate the EIRP and show in the report.
5. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP and Emission Designator

5G NR n2		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1907.5	0.2917	4M47G7D	0.2198	4M48W7D
10	1855.0 ~ 1905.0	0.3034	9M29G7D	0.2280	9M30W7D
15	1857.5 ~ 1902.5	0.2793	14M1G7D	0.2183	14M1W7D
20	1860.0 ~ 1900.0	0.2818	19M0G7D	0.2239	19M0W7D



5G NR n25		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1912.5	0.3090	4M48G7D	0.2455	4M48W7D
10	1855.0 ~ 1910.0	0.3133	9M29G7D	0.2500	9M31W7D
15	1857.5 ~ 1907.5	0.3155	14M1G7D	0.2466	14M1W7D
20	1860.0 ~ 1905.0	0.3155	19M0G7D	0.2432	19M0W7D
25	1862.5 ~ 1902.5	0.3148	23M8G7D	0.2506	23M8W7D
30	1865.0 ~ 1900.0	0.3105	28M6G7D	0.2529	28M7W7D
40	1870.0 ~ 1895.0	0.3148	38M6G7D	0.2576	38M6W7D

5G NR n5		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0441	4M47G7D	0.0320	4M50W7D
10	829.0 ~ 844.0	0.0403	9M28G7D	0.0321	9M30W7D
15	831.5 ~ 841.5	0.0415	14M1G7D	0.0319	14M1W7D
20	834.0 ~ 839.0	0.0461	18M9G7D	0.0365	18M9W7D

5G NR n26		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0426	4M47G7D	0.0323	4M50W7D
10	829.0 ~ 844.0	0.0421	9M28G7D	0.0334	9M30W7D
15	831.5 ~ 841.5	0.0402	14M1G7D	0.0317	14M1W7D
20	834.0 ~ 839.0	0.0463	18M9G7D	0.0332	18M9W7D

5G NR n66		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1712.5 ~ 1777.5	0.6637	4M49G7D	0.5875	4M49W7D
10	1715.0 ~ 1775.0	0.6776	9M30G7D	0.6095	9M32W7D
15	1717.5 ~ 1772.5	0.6592	14M1G7D	0.6124	14M1W7D
20	1720.0 ~ 1770.0	0.6516	19M0G7D	0.5794	19M0W7D
30	1725.0 ~ 1765.0	0.6412	28M6G7D	0.5821	28M7W7D
40	1730.0 ~ 1760.0	0.6397	38M6G7D	0.5861	38M7W7D



5G NR n70		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1697.5 ~ 1707.5	0.2564	4M47G7D	0.2056	4M49W7D
10	1700.0 ~ 1705.0	0.2600	9M29G7D	0.1968	9M30W7D
15	1702.5	0.2799	14M1G7D	0.1897	14M2W7D

Note:

- 5G NR n26 overlaps the entire frequency range of 5G NR n5. Therefore, the test results provided in this report covers 5G NR n5 and the portion of 5G NR n26 subject to Part 22.
- 5G NR n25 overlaps the entire frequency range of 5G NR n2. Therefore, the test results provided in this report covers 5G NR n25 as well as 5G NR n2.
- All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

Test data subcontracted: Radiated Spurious Emission test case in section 4.4 of this report.

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH02-SZ	AUDIX	E3	6.2009-8-24a

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 22, 24, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Z plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.


Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane

Test Items	5G NR	Bandwidth (MHz)													Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H
Max. Output Power	n2	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	v	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n70	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
Peak-to- Average Ratio	n2				v	-	-	-	-	-	-	-	-	-	v	v				v	v		v	
	n25				v				-	-	-	-	-	-	v	v				v	v		v	
	n26				v	-	-	-	-	-	-	-	-	-	v	v				v	v		v	
	n66				v	-			-	-	-	-	-	-	v	v				v	v		v	
	n70			v	-	-	-	-	-	-	-	-	-	-	v	v				v	v		v	
26dB and 99% Bandwidth	n2	v	v	v	v	-	-	-	-	-	-	-	-	-		v	v	v	v		v		v	
	n25	v	v	v	v	v	v	v	-	-	-	-	-	-		v	v	v	v		v		v	
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-		v	v	v	v		v		v	
	n66	v	v	v	v	-	v	v	-	-	-	-	-	-		v	v	v	v		v		v	
	n70	v	v	v	-	-	-	-	-	-	-	-	-	-		v	v	v	v		v		v	
Conducted	n2	v		v	v	-	-	-	-	-	-	-	-	-	v	v				v	v	v		v



Test Items	5G NR	Bandwidth (MHz)													Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H
Band Edge	n25	v			v			v	-	-	-	-	-	-	v	v				v	v	v		v
	n26	v		v	v	-	-	-	-	-	-	-	-	-	v	v				v	v	v		v
	n66	v			v	-		v	-	-	-	-	-	-	v	v				v	v	v		v
	n70	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v				v	v	v		v
Conducted Spurious Emission	n2	v		v	v	-	-	-	-	-	-	-	-	-	v	v				v		v	v	v
	n25	v			v			v	-	-	-	-	-	-	v	v				v		v	v	v
	n26	v		v	v	-	-	-	-	-	-	-	-	-	v	v				v		v	v	v
	n66	v			v	-		v	-	-	-	-	-	-	v	v				v		v	v	v
	n70	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v				v		v	v	v
Frequency Stability	n2				v	-	-	-	-	-	-	-	-	-		v					v		v	
	n25				v				-	-	-	-	-	-		v					v		v	
	n26				v	-	-	-	-	-	-	-	-	-		v					v		v	
	n66				v	-			-	-	-	-	-	-		v					v		v	
	n70			v	-	-	-	-	-	-	-	-	-	-		v					v		v	
E.R.P / E.I.R.P	n2	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n5	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	v	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n66	v	v	v	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n70	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n2	Worst Case																				v	v	v
	n5	Worst Case																				v	v	v
	n25	Worst Case																				v	v	v
	n26	Worst Case																				v	v	v
	n66	Worst Case																				v	v	v
	n70	Worst Case																				v	v	v
Note	1. The mark “v “ means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.85V ; Low Voltage =3.60V. ; High Voltage =4.40V																							

2.2 Connection Diagram of Test System

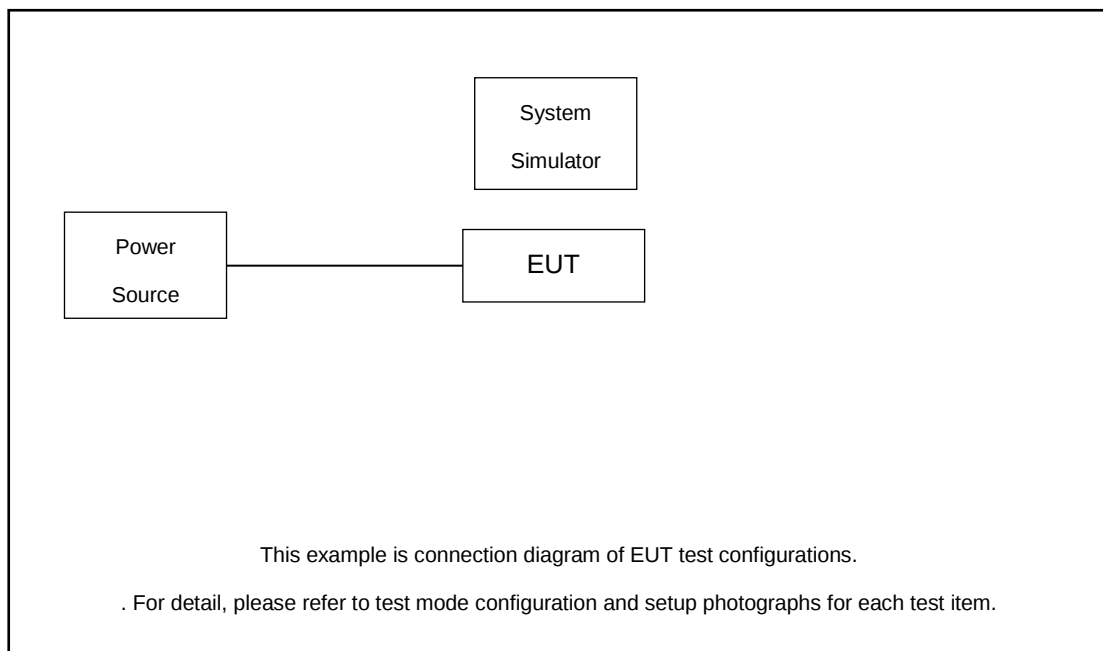

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.4 dB and 20dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 5.4 + 20 = 25.4 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n2 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5

5G NR n5 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n25 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	390000	392500	395000
	Frequency	1870	1882.5	1895
30	Channel	389000	392500	396000
	Frequency	1865	1882.5	1900
25	Channel	388500	392500	396500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5

5G NR n26 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5



5G NR n66 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	346000	349000	352000
	Frequency	1730	1745	1760
30	Channel	345000	349000	353000
	Frequency	1725	1745	1765
20	Channel	344000	349000	354000
	Frequency	1720	1745	1770
15	Channel	343500	349000	354500
	Frequency	1717.5	1745	1772.5
10	Channel	343000	349000	355000
	Frequency	1715	1745	1775
5	Channel	342500	349000	355500
	Frequency	1712.5	1745	1777.5

5G NR n70 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	340500		
	Frequency	1702.5		
10	Channel	340000	340500	341000
	Frequency	1700	1702.5	1705
5	Channel	399500	340500	341500
	Frequency	1697.5	1702.5	1707.5

3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission

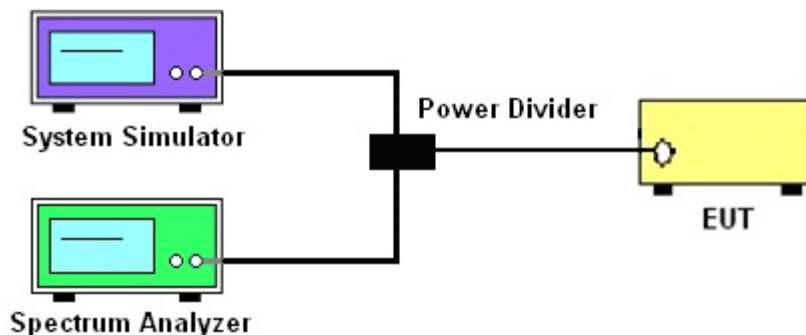

3.2.3 Frequency Stability

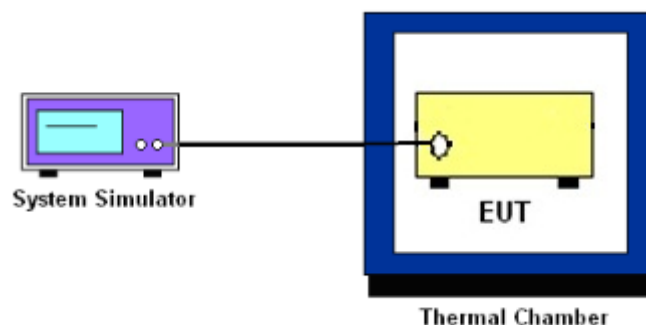

3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5, n26.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n25.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n66, n70.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13$ dBm.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at $20\pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz



4.2.2 For radiated test from 30MHz to 1GHz

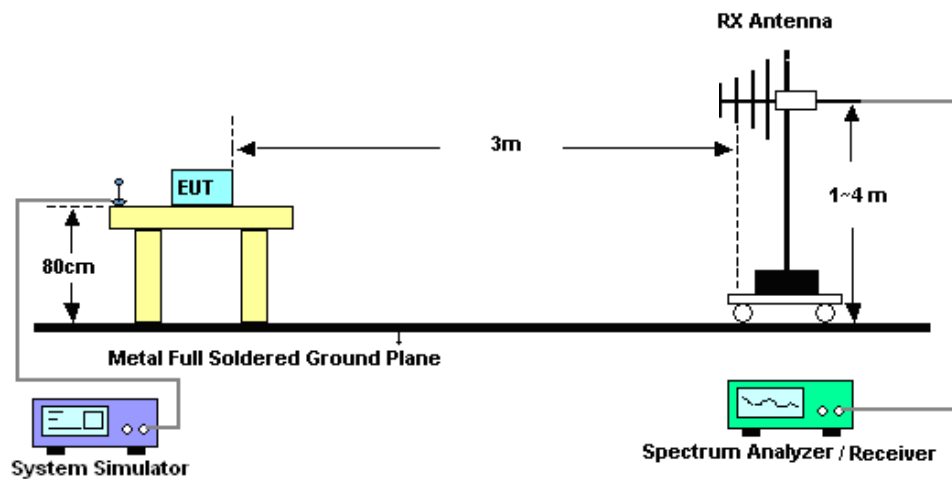

4.2.3 For radiated test above 1GHz

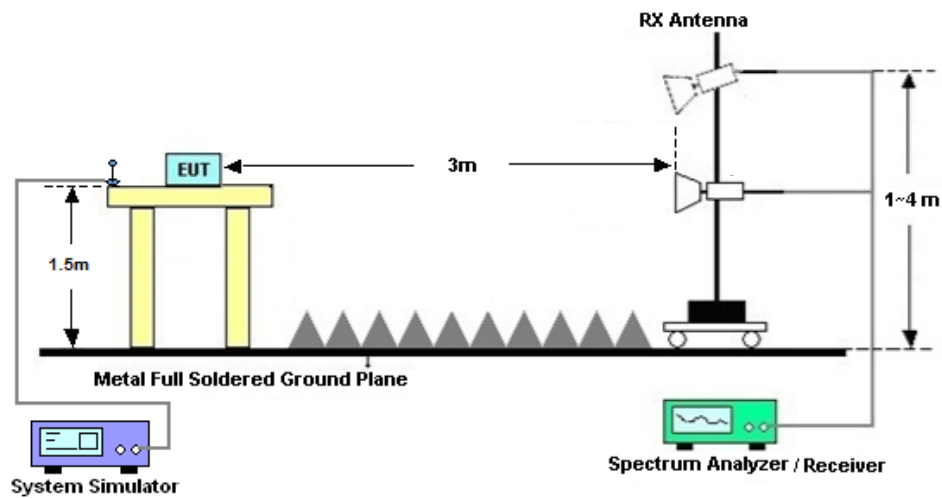

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}.$$



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Sep. 08, 2024~ Nov. 05, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Sep. 08, 2024~ Nov. 05, 2024	NCR	Conducted (TH01-KS)
Radio communication analyzer	Anritsu	MT8000A	6262148297	5GNR Sub6	Jul. 04, 2024	Sep. 08, 2024~ Nov. 05, 2024	Jul. 03, 2025	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Sep. 08, 2024~ Nov. 05, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Jan. 20, 2025~ Feb. 08, 2025	Jul. 02, 2025	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Jan. 20, 2025~ Feb. 08, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Jan. 20, 2025~ Feb. 08, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Jan. 20, 2025~ Feb. 08, 2025	Jul. 04, 2025	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Jan. 20, 2025~ Feb. 08, 2025	Jul. 03, 2025	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 09, 2024	Jan. 20, 2025~ Feb. 08, 2025	Apr. 08, 2025	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2024	Jan. 20, 2025~ Feb. 08, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 14, 2024	Jan. 20, 2025~ Feb. 08, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2024	Jan. 20, 2025~ Feb. 08, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jan. 20, 2025~ Feb. 08, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jan. 20, 2025~ Feb. 08, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.04ppm

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.72 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%



FR1 N2 ANT1

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=0dB

NR Band	SCS	Band Width	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
2	15	5	370500	1852.5	DFT-s-OFDM PI/2 BPSK	1@1	24.31	24.31	0.2698
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	24.35	24.35	0.2723
2	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	23.27	23.27	0.2123
2	15	5	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.37	24.37	0.2735
2	15	5	376000	1880	DFT-s-OFDM QPSK	1@1	24.40	24.40	0.2754
2	15	5	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.40	23.40	0.2188
2	15	5	381500	1907.5	DFT-s-OFDM PI/2 BPSK	1@1	24.45	24.45	0.2786
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@1	24.65	24.65	0.2917
2	15	5	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	23.42	23.42	0.2198
2	15	10	371000	1855	DFT-s-OFDM PI/2 BPSK	1@1	24.47	24.47	0.2799
2	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	24.37	24.37	0.2735
2	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	23.25	23.25	0.2113
2	15	10	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.35	24.35	0.2723
2	15	10	376000	1880	DFT-s-OFDM QPSK	1@1	24.34	24.34	0.2716
2	15	10	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.36	23.36	0.2168
2	15	10	381000	1905	DFT-s-OFDM PI/2 BPSK	1@1	24.82	24.82	0.3034
2	15	10	381000	1905	DFT-s-OFDM QPSK	1@1	24.46	24.46	0.2793
2	15	10	381000	1905	DFT-s-OFDM 16 QAM	1@1	23.58	23.58	0.2280
2	15	15	371500	1857.5	DFT-s-OFDM PI/2 BPSK	1@1	24.29	24.29	0.2685
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	24.27	24.27	0.2673
2	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	23.30	23.30	0.2138
2	15	15	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.30	24.30	0.2692
2	15	15	376000	1880	DFT-s-OFDM QPSK	1@1	24.28	24.28	0.2679
2	15	15	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.24	23.24	0.2109
2	15	15	380500	1902.5	DFT-s-OFDM PI/2 BPSK	1@1	24.39	24.39	0.2748
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@1	24.46	24.46	0.2793
2	15	15	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	23.39	23.39	0.2183
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	50@25	24.19	24.19	0.2624
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@1	24.19	24.19	0.2624
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@104	24.24	24.24	0.2655
2	15	20	372000	1860	DFT-s-OFDM QPSK	50@25	24.29	24.29	0.2685
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	24.25	24.25	0.2661
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@104	24.26	24.26	0.2667
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	50@25	23.29	23.29	0.2133
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	23.18	23.18	0.2080
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@104	23.26	23.26	0.2118
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	50@25	21.82	21.82	0.1521
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@1	21.95	21.95	0.1567
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@104	21.90	21.90	0.1549
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	50@25	19.74	19.74	0.0942



NR Band	SCS	Band Width	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@1	19.24	19.24	0.0839
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@104	19.19	19.19	0.0830
2	15	20	372000	1860	CP-OFDM QPSK	53@26	22.79	22.79	0.1901
2	15	20	372000	1860	CP-OFDM QPSK	1@1	22.80	22.80	0.1905
2	15	20	372000	1860	CP-OFDM QPSK	1@104	22.76	22.76	0.1888
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	50@25	24.41	24.41	0.2761
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.20	24.20	0.2630
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	1@104	24.33	24.33	0.2710
2	15	20	376000	1880	DFT-s-OFDM QPSK	50@25	24.47	24.47	0.2799
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@1	24.26	24.26	0.2667
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@104	24.37	24.37	0.2735
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	50@25	23.44	23.44	0.2208
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.17	23.17	0.2075
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@104	23.32	23.32	0.2148
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	50@25	22.00	22.00	0.1585
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	1@1	21.94	21.94	0.1563
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	1@104	22.01	22.01	0.1589
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	50@25	22.06	22.06	0.1607
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	1@1	19.25	19.25	0.0841
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	1@104	19.42	19.42	0.0875
2	15	20	376000	1880	CP-OFDM QPSK	53@26	22.86	22.86	0.1932
2	15	20	376000	1880	CP-OFDM QPSK	1@1	22.80	22.80	0.1905
2	15	20	376000	1880	CP-OFDM QPSK	1@104	22.86	22.86	0.1932
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	50@25	24.49	24.49	0.2812
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	1@1	24.44	24.44	0.2780
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	1@104	24.44	24.44	0.2780
2	15	20	380000	1900	DFT-s-OFDM QPSK	50@25	24.50	24.50	0.2818
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@1	24.32	24.32	0.2704
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@104	24.41	24.41	0.2761
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	50@25	23.50	23.50	0.2239
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@1	23.32	23.32	0.2148
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@104	23.42	23.42	0.2198
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	50@25	22.10	22.10	0.1622
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	1@1	22.07	22.07	0.1611
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	1@104	22.14	22.14	0.1637
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	50@25	19.99	19.99	0.0998
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	1@1	19.39	19.39	0.0869
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	1@104	19.43	19.43	0.0877
2	15	20	380000	1900	CP-OFDM QPSK	53@26	23.03	23.03	0.2009
2	15	20	380000	1900	CP-OFDM QPSK	1@1	22.93	22.93	0.1963
2	15	20	380000	1900	CP-OFDM QPSK	1@104	22.92	22.92	0.1959



Software Version: 23.06.1602

FR1 N2 Ant 2-Other PA

LTE Band: 5, LTE BW: 10M, LTE ARFCN: Mid

Transmitter Conducted Output Power And EIRP, $(G_T - L_c) = -0.3\text{dB}$

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
2	15	5	370500	1852.5	DFT-s-OFDM PI/2 BPSK	1@1	24.35	24.05	0.2541
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	24.29	23.99	0.2506
2	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	23.49	23.19	0.2084
2	15	5	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.49	24.19	0.2624
2	15	5	376000	1880	DFT-s-OFDM QPSK	1@1	24.51	24.21	0.2636
2	15	5	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.58	23.28	0.2128
2	15	5	381500	1907.5	DFT-s-OFDM PI/2 BPSK	1@1	24.49	24.19	0.2624
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@1	24.50	24.20	0.2630
2	15	5	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	23.62	23.32	0.2148
2	15	10	371000	1855	DFT-s-OFDM PI/2 BPSK	1@1	24.42	24.12	0.2582
2	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	24.35	24.05	0.2541
2	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	23.40	23.10	0.2042
2	15	10	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.52	24.22	0.2642
2	15	10	376000	1880	DFT-s-OFDM QPSK	1@1	24.61	24.31	0.2698
2	15	10	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.54	23.24	0.2109
2	15	10	381000	1905	DFT-s-OFDM PI/2 BPSK	1@1	24.46	24.16	0.2606
2	15	10	381000	1905	DFT-s-OFDM QPSK	1@1	24.57	24.27	0.2673
2	15	10	381000	1905	DFT-s-OFDM 16 QAM	1@1	23.43	23.13	0.2056
2	15	15	371500	1857.5	DFT-s-OFDM PI/2 BPSK	1@1	24.37	24.07	0.2553
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	24.42	24.12	0.2582
2	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	23.35	23.05	0.2018
2	15	15	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.39	24.09	0.2564
2	15	15	376000	1880	DFT-s-OFDM QPSK	1@1	24.39	24.09	0.2564
2	15	15	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.33	23.03	0.2009
2	15	15	380500	1902.5	DFT-s-OFDM PI/2 BPSK	1@1	24.36	24.06	0.2547
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@1	24.40	24.10	0.2570
2	15	15	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	23.35	23.05	0.2018
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	50@25	24.49	24.19	0.2624
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@1	24.49	24.19	0.2624
2	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@104	24.42	24.12	0.2582
2	15	20	372000	1860	DFT-s-OFDM QPSK	50@25	24.47	24.17	0.2612
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	24.49	24.19	0.2624
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@104	24.46	24.16	0.2606
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	50@25	23.53	23.23	0.2104
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	23.46	23.16	0.2070



NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@104	23.44	23.14	0.2061
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	50@25	22.09	21.79	0.1510
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@1	22.21	21.91	0.1552
2	15	20	372000	1860	DFT-s-OFDM 64 QAM	1@104	22.15	21.85	0.1531
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	50@25	19.98	19.68	0.0929
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@1	19.65	19.35	0.0861
2	15	20	372000	1860	DFT-s-OFDM 256 QAM	1@104	19.59	19.29	0.0849
2	15	20	372000	1860	CP-OFDM QPSK	53@26	23.01	22.71	0.1866
2	15	20	372000	1860	CP-OFDM QPSK	1@1	22.97	22.67	0.1849
2	15	20	372000	1860	CP-OFDM QPSK	1@104	22.89	22.59	0.1816
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	50@25	24.69	24.39	0.2748
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	24.56	24.26	0.2667
2	15	20	376000	1880	DFT-s-OFDM PI/2 BPSK	1@104	24.56	24.26	0.2667
2	15	20	376000	1880	DFT-s-OFDM QPSK	50@25	24.67	24.37	0.2735
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@1	24.61	24.31	0.2698
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@104	24.56	24.26	0.2667
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	50@25	23.68	23.38	0.2178
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@1	23.50	23.20	0.2089
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@104	23.51	23.21	0.2094
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	50@25	22.22	21.92	0.1556
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	1@1	22.28	21.98	0.1578
2	15	20	376000	1880	DFT-s-OFDM 64 QAM	1@104	22.30	22.00	0.1585
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	50@25	20.16	19.86	0.0968
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	1@1	19.77	19.47	0.0885
2	15	20	376000	1880	DFT-s-OFDM 256 QAM	1@104	19.76	19.46	0.0883
2	15	20	376000	1880	CP-OFDM QPSK	53@26	23.18	22.88	0.1941
2	15	20	376000	1880	CP-OFDM QPSK	1@1	23.11	22.81	0.1910
2	15	20	376000	1880	CP-OFDM QPSK	1@104	23.00	22.70	0.1862
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	50@25	24.63	24.33	0.2710
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	1@1	24.59	24.29	0.2685
2	15	20	380000	1900	DFT-s-OFDM PI/2 BPSK	1@104	24.60	24.30	0.2692
2	15	20	380000	1900	DFT-s-OFDM QPSK	50@25	24.64	24.34	0.2716
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@1	24.59	24.29	0.2685
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@104	24.60	24.30	0.2692
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	50@25	23.68	23.38	0.2178
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@1	23.53	23.23	0.2104
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@104	23.58	23.28	0.2128
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	50@25	22.23	21.93	0.1560
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	1@1	22.28	21.98	0.1578
2	15	20	380000	1900	DFT-s-OFDM 64 QAM	1@104	22.34	22.04	0.1600
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	50@25	20.20	19.90	0.0977
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	1@1	19.77	19.47	0.0885



NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
2	15	20	380000	1900	DFT-s-OFDM 256 QAM	1@104	19.79	19.49	0.0889
2	15	20	380000	1900	CP-OFDM QPSK	53@26	23.22	22.92	0.1959
2	15	20	380000	1900	CP-OFDM QPSK	1@1	23.08	22.78	0.1897
2	15	20	380000	1900	CP-OFDM QPSK	1@104	23.07	22.77	0.1892

**Frequency Stability**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	-0.0035	PASS	NV
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	0.0042	PASS	LV
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	-0.0056	PASS	HV
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	0.0068	PASS	-30°C
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	-0.0037	PASS	-20°C
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	0.0052	PASS	-10°C
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	0.0063	PASS	0°C
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	-0.0042	PASS	10°C
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	0.0034	PASS	20°C
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	-0.0039	PASS	30°C
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	-0.0042	PASS	40°C
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	0.0047	PASS	50°C

**Peak to Average Ratio**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
2	15	20	376000	1880.0	DFT-s-OFDM PI/2 BPSK	100@0	3.96	13	PASS
2	15	20	376000	1880.0	DFT-s-OFDM PI/2 BPSK	1@0	3.7	13	PASS
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	100@0	4.56	13	PASS
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	1@0	3.48	13	PASS

**Occupied Bandwidth**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
2	15	5	376000	1880.0	CP-OFDM QPSK	25@0	4.4667	5.053
2	15	5	376000	1880.0	CP-OFDM 16 QAM	25@0	4.4727	4.955
2	15	5	376000	1880.0	CP-OFDM 64 QAM	25@0	4.4826	4.982
2	15	5	376000	1880.0	CP-OFDM 256 QAM	25@0	4.4787	5.126
2	15	10	376000	1880.0	CP-OFDM QPSK	52@0	9.2885	10.03
2	15	10	376000	1880.0	CP-OFDM 16 QAM	52@0	9.2858	9.94
2	15	10	376000	1880.0	CP-OFDM 64 QAM	52@0	9.2885	10.07
2	15	10	376000	1880.0	CP-OFDM 256 QAM	52@0	9.3017	9.999
2	15	15	376000	1880.0	CP-OFDM QPSK	79@0	14.115	14.98
2	15	15	376000	1880.0	CP-OFDM 16 QAM	79@0	14.115	15.02
2	15	15	376000	1880.0	CP-OFDM 64 QAM	79@0	14.125	15.0
2	15	15	376000	1880.0	CP-OFDM 256 QAM	79@0	14.096	14.96
2	15	20	376000	1880.0	CP-OFDM QPSK	106@0	18.954	19.84
2	15	20	376000	1880.0	CP-OFDM 16 QAM	106@0	18.944	21.2
2	15	20	376000	1880.0	CP-OFDM 64 QAM	106@0	18.99	19.87
2	15	20	376000	1880.0	CP-OFDM 256 QAM	106@0	18.975	19.89




B5_N2(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

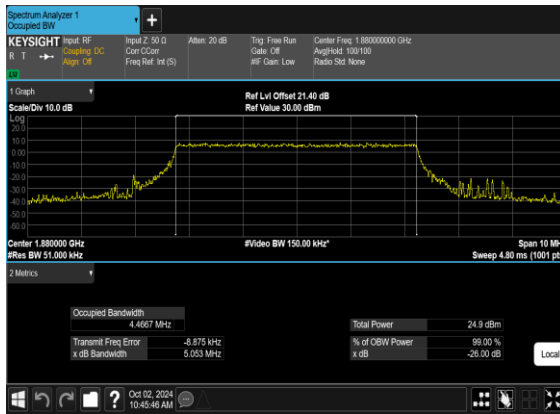


B5_N2(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

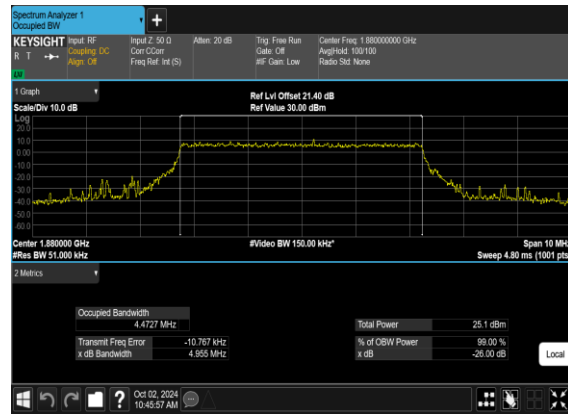

B5_N2(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

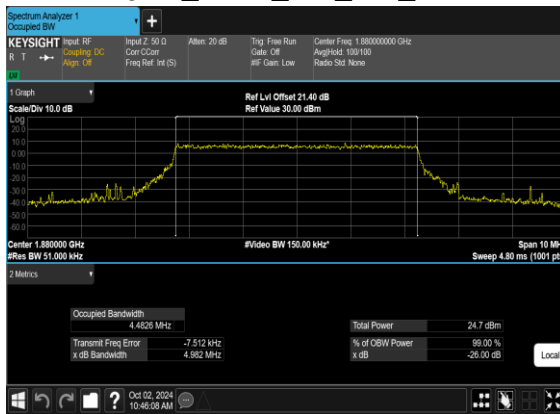


B5_N2(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

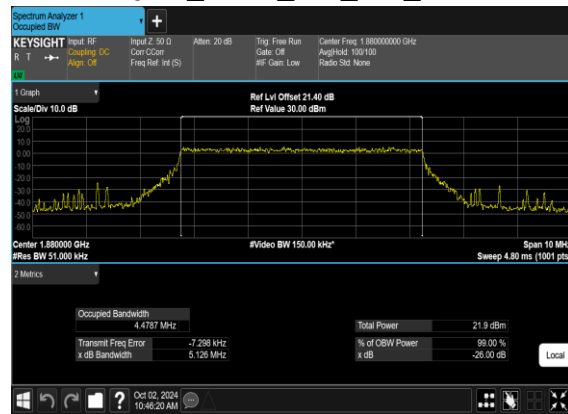





B5_N2(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

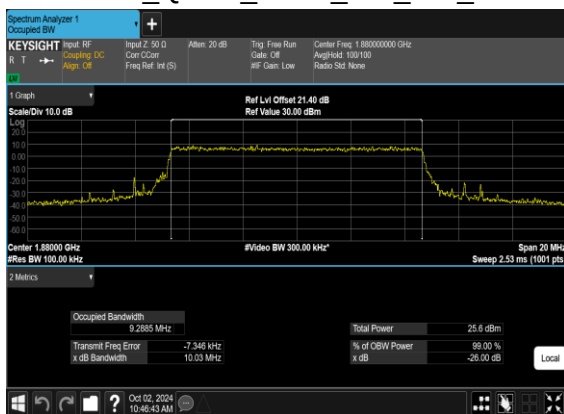


B5_N2(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

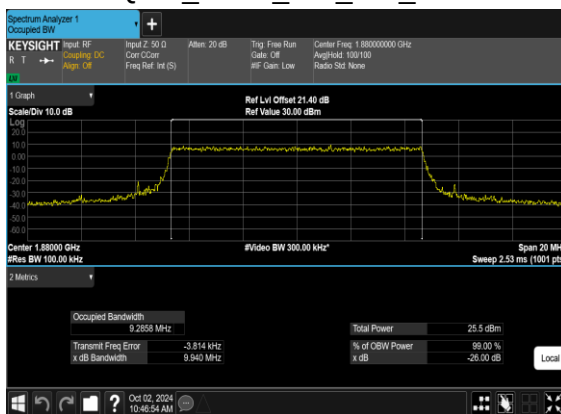

B5_N2(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

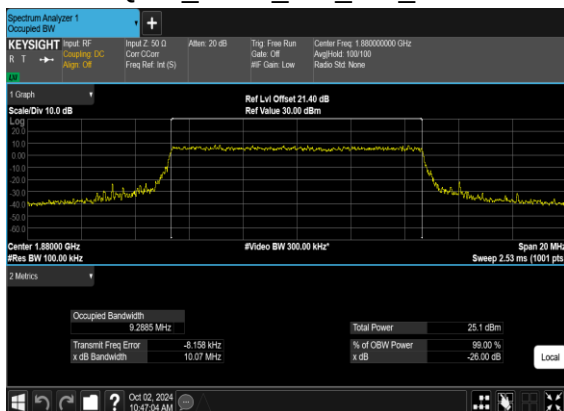


B5_N2(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

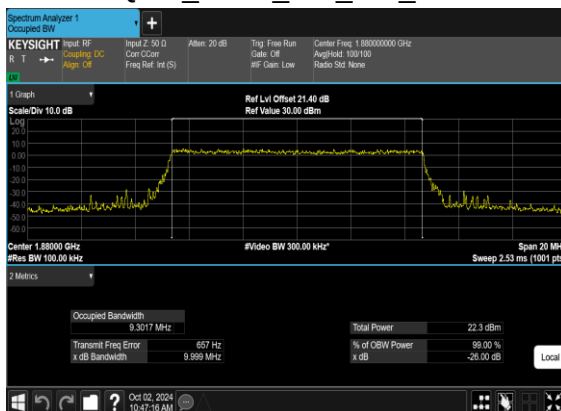





B5_N2(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

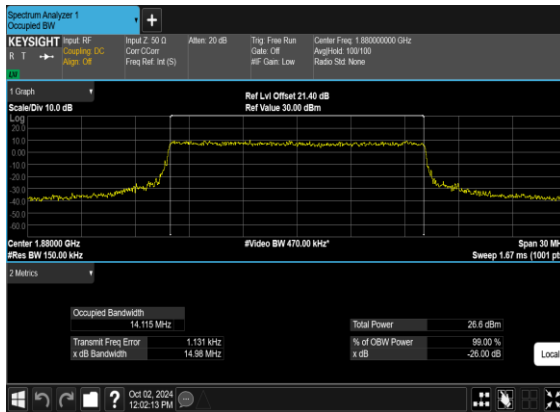


B5_N2(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

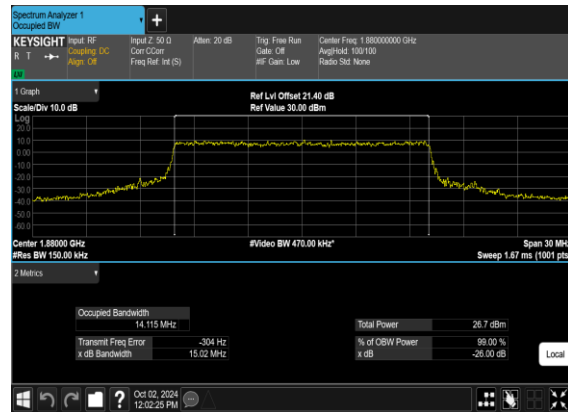

B5_N2(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

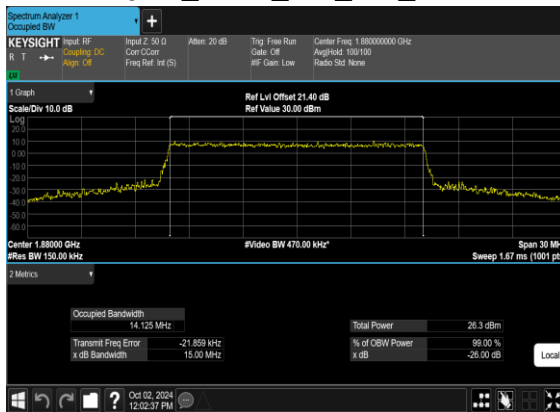


B5_N2(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

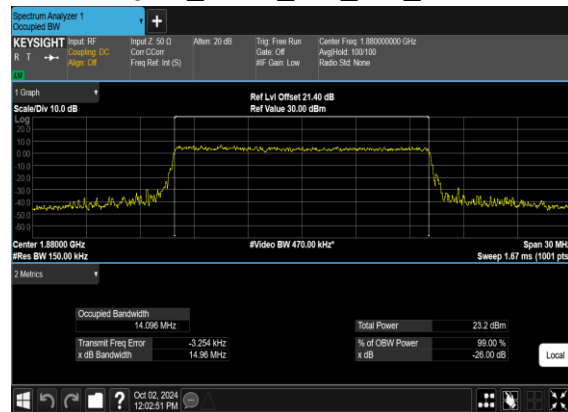





B5_N2(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

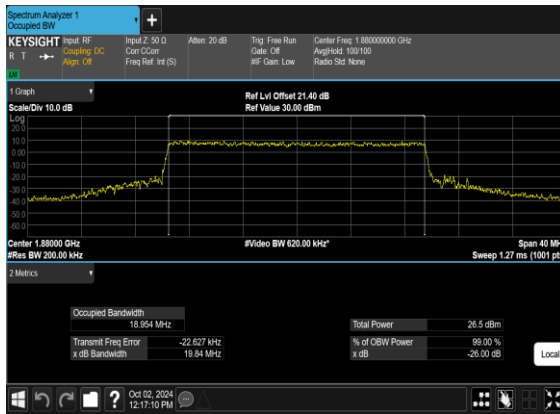


B5_N2(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

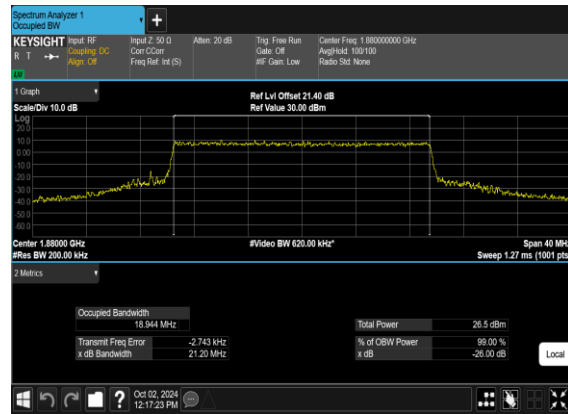

B5_N2(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

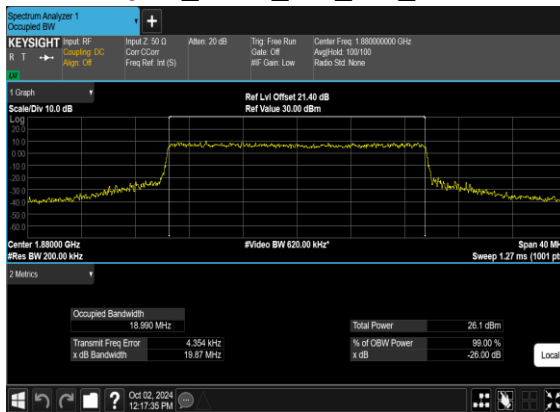

B5_N2(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

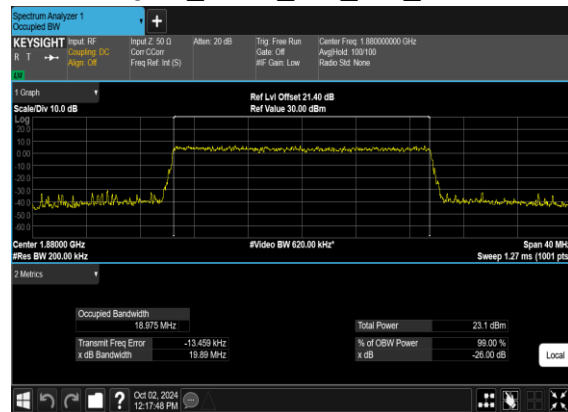



Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
2	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	---
2	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	---
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
2	15	5	376000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	---
2	15	5	376000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
2	15	5	376000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	---
2	15	5	376000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
2	15	5	381500	1907.5	DFT-s-OFDM BPSK	1@0	see graph	---
2	15	5	381500	1907.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@0	see graph	---
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
2	15	15	371500	1857.5	DFT-s-OFDM BPSK	1@0	see graph	---
2	15	15	371500	1857.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@0	see graph	---
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
2	15	15	376000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	---
2	15	15	376000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
2	15	15	376000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	---
2	15	15	376000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
2	15	15	380500	1902.5	DFT-s-OFDM BPSK	1@0	see graph	---
2	15	15	380500	1902.5	DFT-s-OFDM BPSK	1@0	see graph	PASS




2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@0	see graph	---
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
2	15	20	372000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	---
2	15	20	372000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
2	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	---
2	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
2	15	20	376000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	---
2	15	20	376000	1880.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	---
2	15	20	376000	1880.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
2	15	20	380000	1900.0	DFT-s-OFDM BPSK	1@0	see graph	---
2	15	20	380000	1900.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
2	15	20	380000	1900.0	DFT-s-OFDM QPSK	1@0	see graph	---
2	15	20	380000	1900.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




B5_N2(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

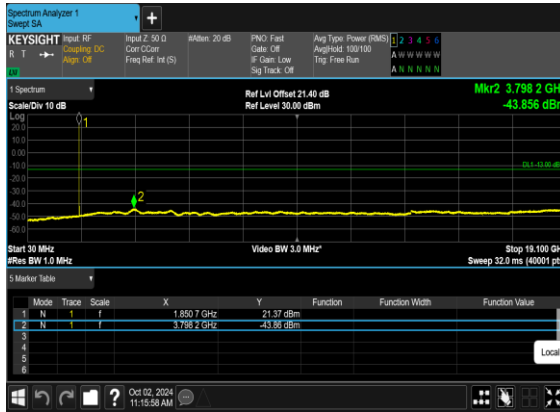


B5_N2(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

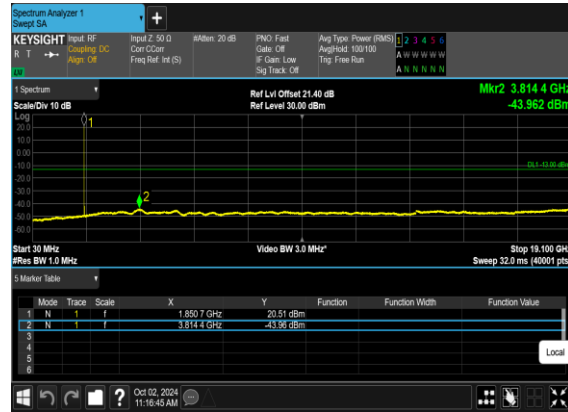

B5_N2(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

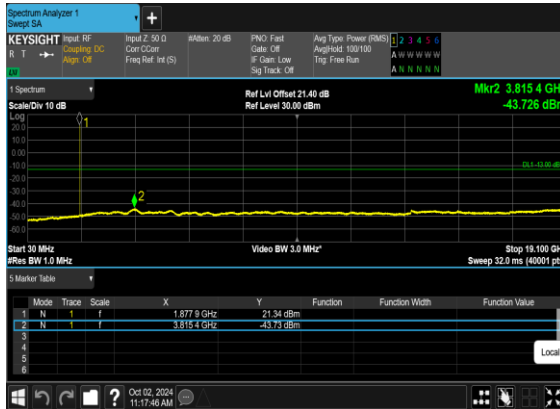


B5_N2(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

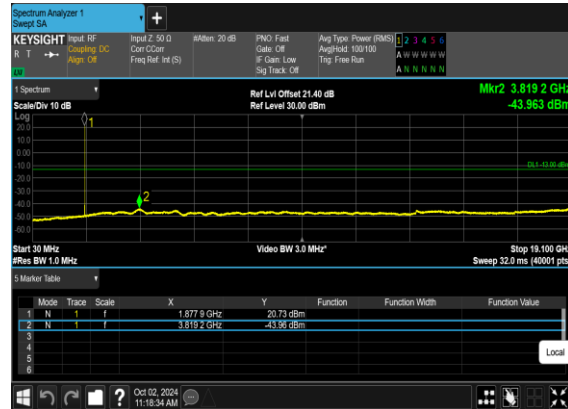





B5_N2(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

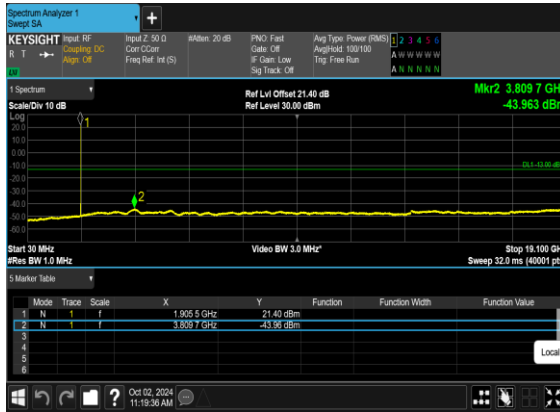


B5_N2(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

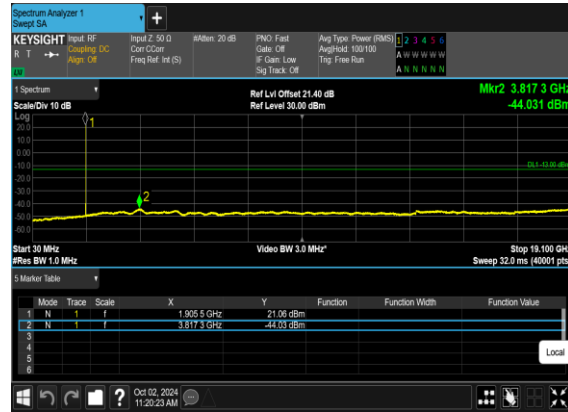

B5_N2(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

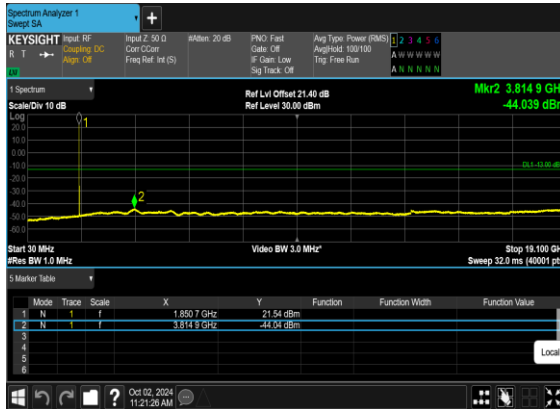


B5_N2(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

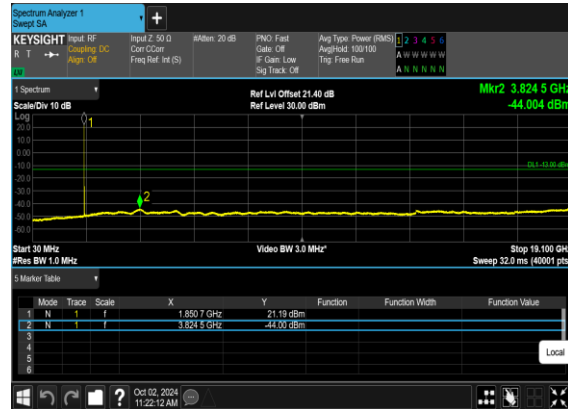





B5_N2(15M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

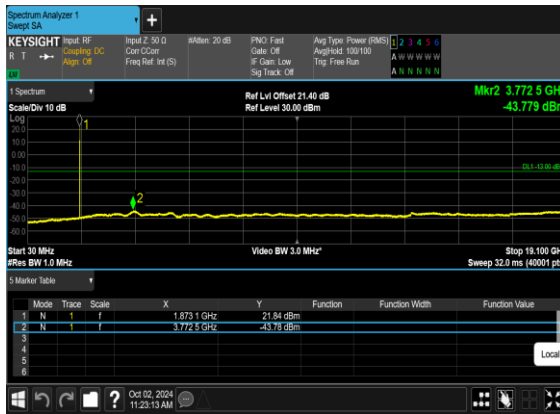


B5_N2(15M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

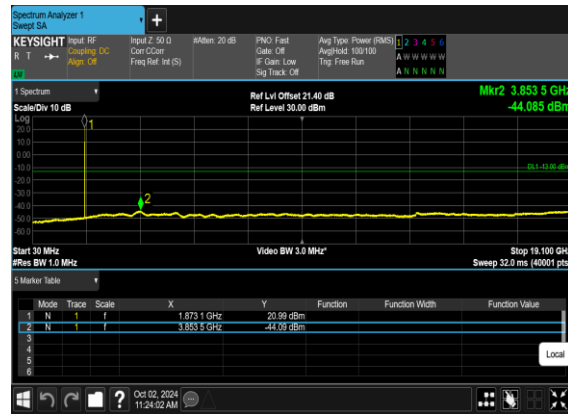

B5_N2(15M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_High_CH

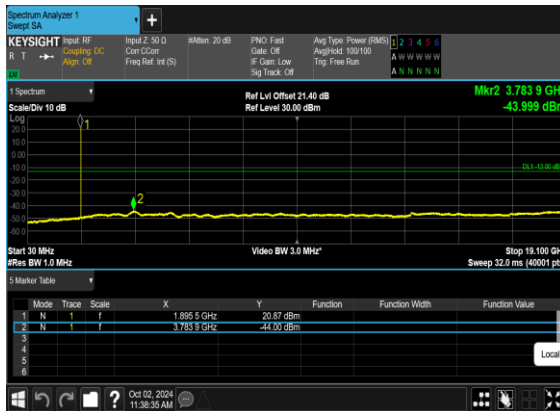


B5_N2(15M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

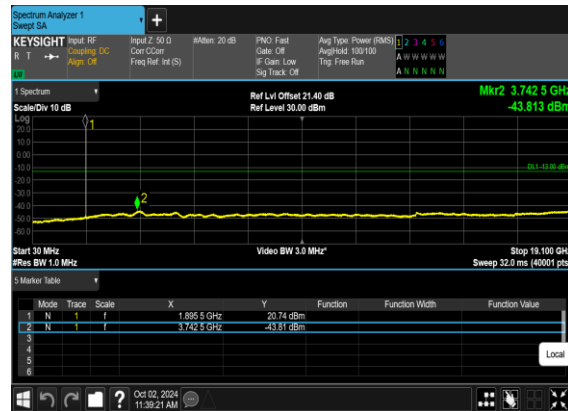




B5_N2(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

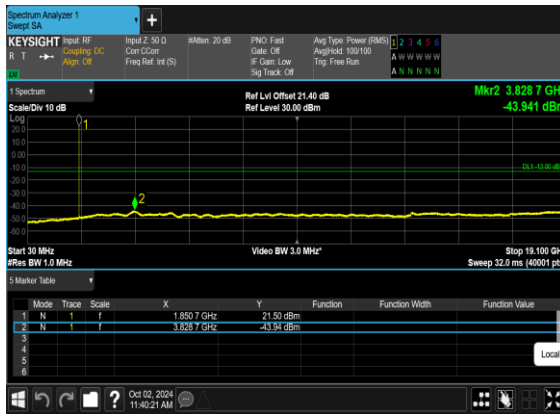


B5_N2(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH



B5_N2(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

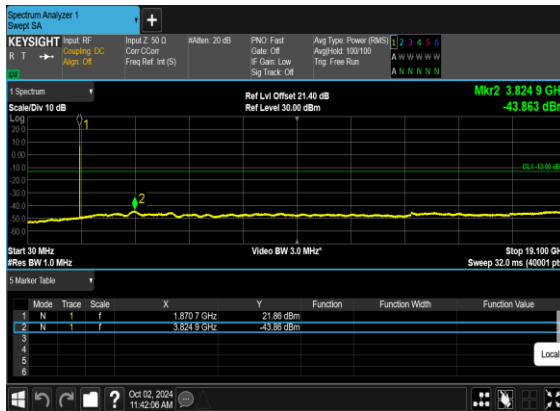


B5_N2(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

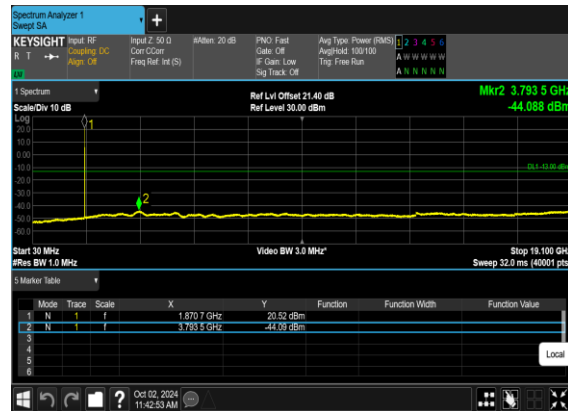




B5_N2(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

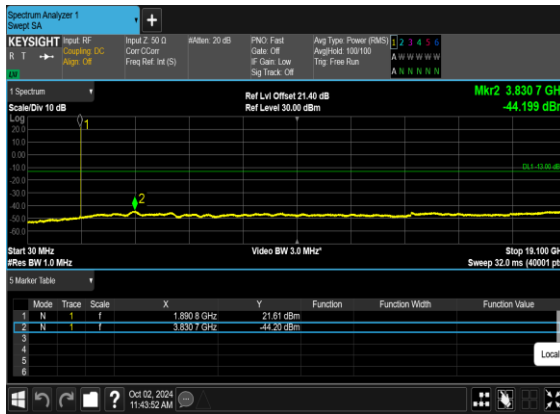

B5_N2(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

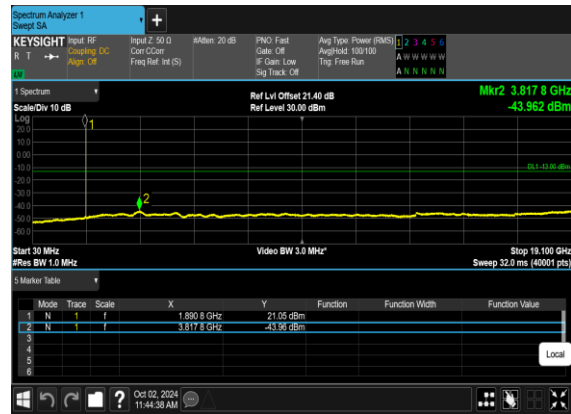


**Conducted Band Edge**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
2	15	5	370500	1852.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
2	15	5	370500	1852.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
2	15	5	381500	1907.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
2	15	5	381500	1907.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
2	15	15	371500	1857.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
2	15	15	371500	1857.5	DFT-s-OFDM BPSK	75@0	see graph	PASS
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	75@0	see graph	PASS
2	15	15	380500	1902.5	DFT-s-OFDM BPSK	1@78	see graph	PASS
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@78	see graph	PASS
2	15	15	380500	1902.5	DFT-s-OFDM BPSK	75@0	see graph	PASS
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	75@0	see graph	PASS
2	15	20	372000	1860.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
2	15	20	372000	1860.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
2	15	20	372000	1860.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
2	15	20	372000	1860.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
2	15	20	380000	1900.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
2	15	20	380000	1900.0	DFT-s-OFDM QPSK	1@105	see graph	PASS
2	15	20	380000	1900.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
2	15	20	380000	1900.0	DFT-s-OFDM QPSK	100@0	see graph	PASS




B5_N2(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

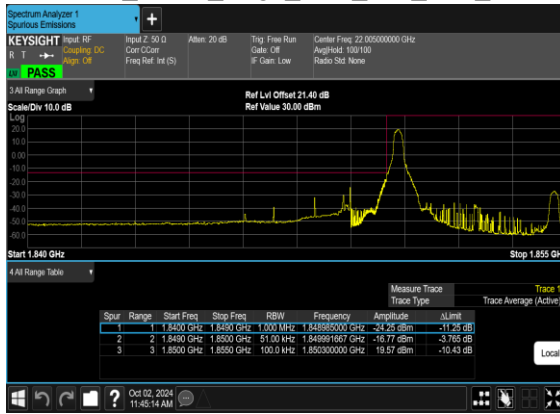


B5_N2(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

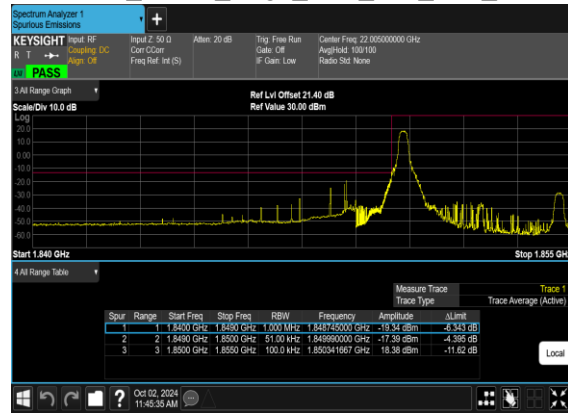

B5_N2(5M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

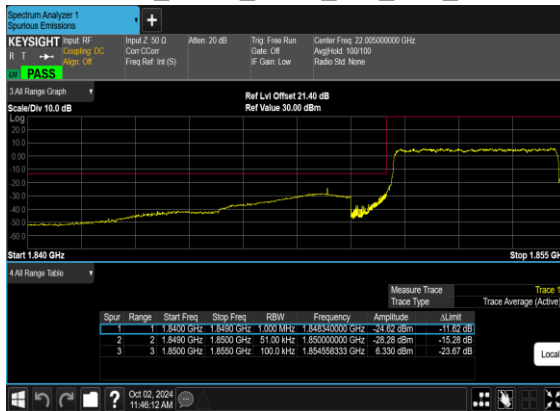


B5_N2(5M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

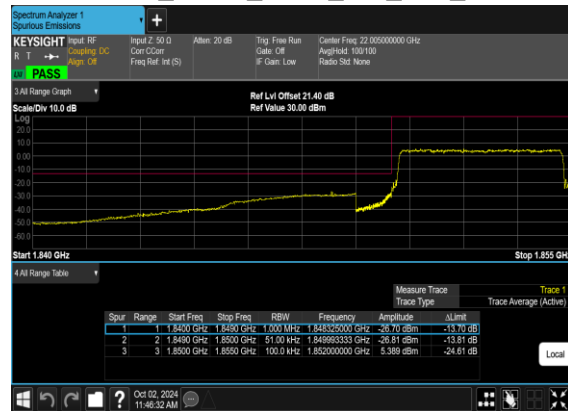





B5_N2(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

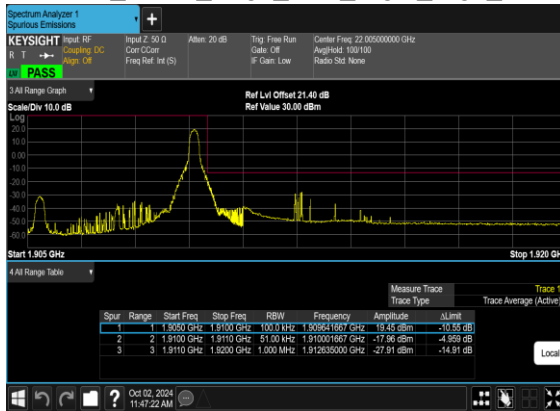


B5_N2(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

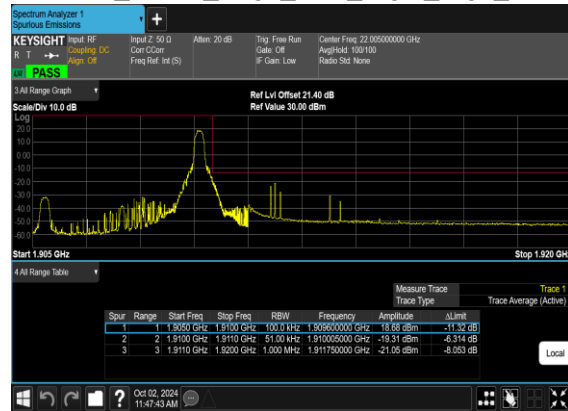

B5_N2(5M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

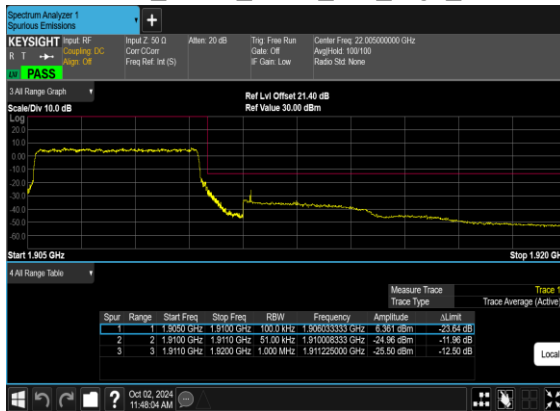


B5_N2(5M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

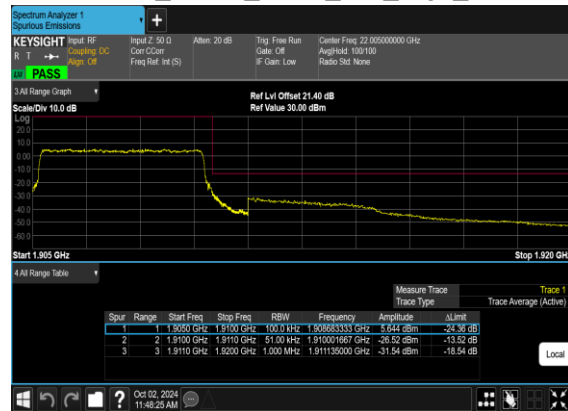





B5_N2(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

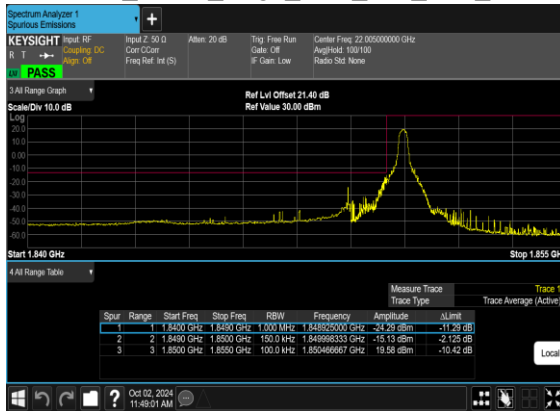


B5_N2(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

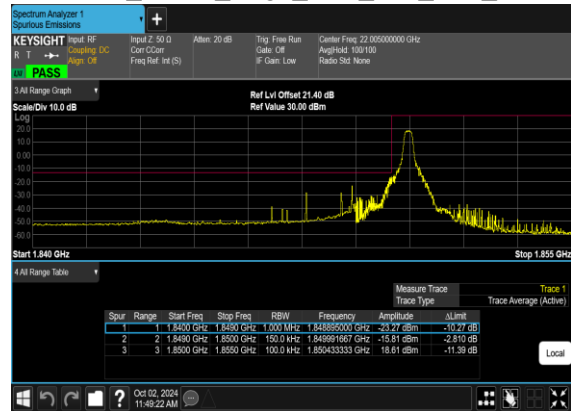

B5_N2(15M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

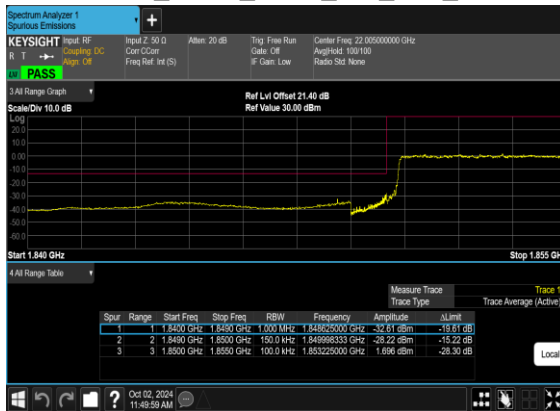


B5_N2(15M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

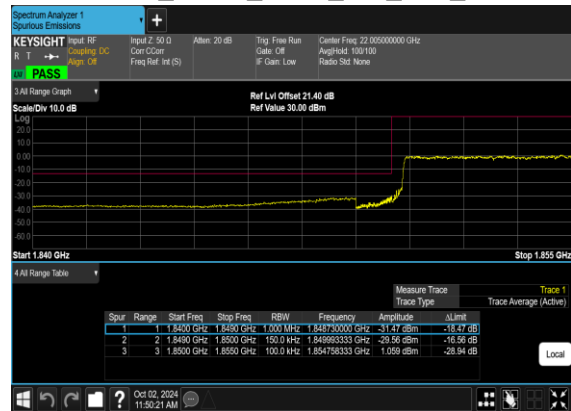





B5_N2(15M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

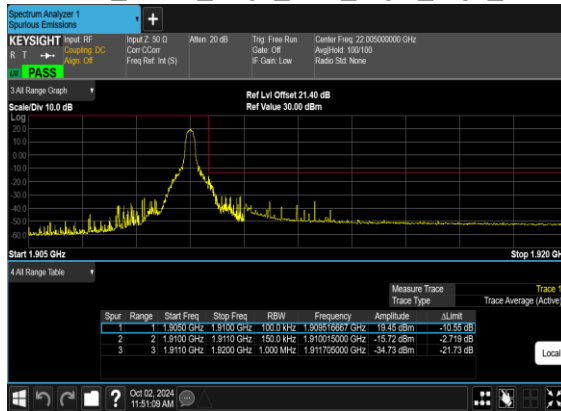


B5_N2(15M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

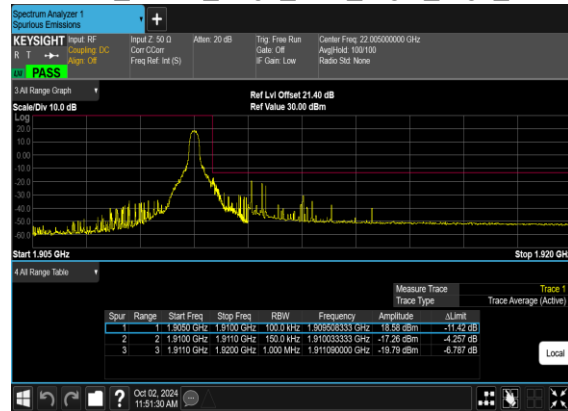

B5_N2(15M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

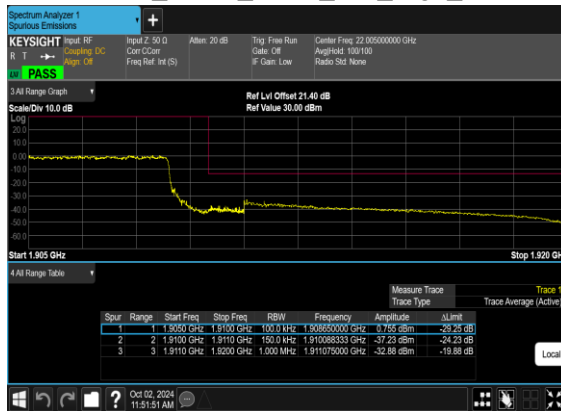


B5_N2(15M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

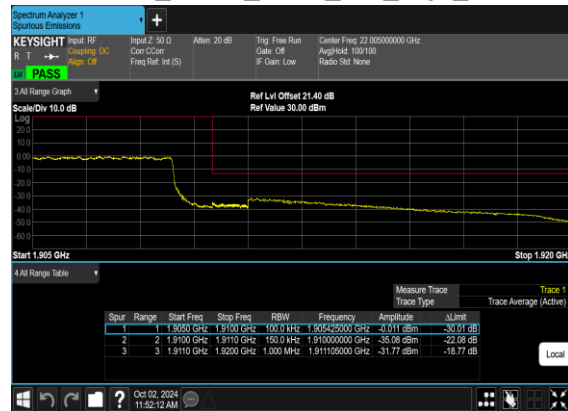





B5_N2(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

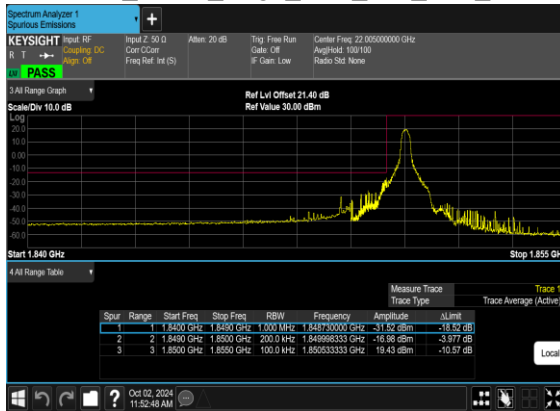


B5_N2(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

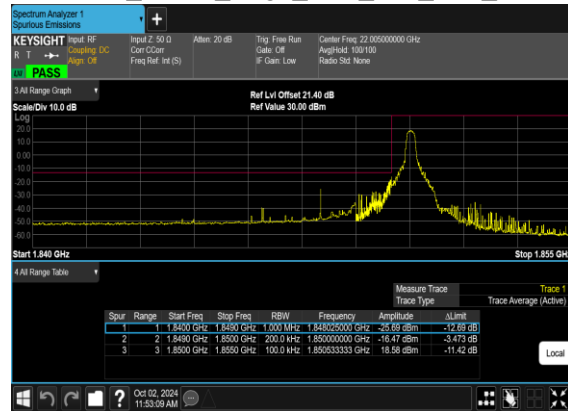

B5_N2(20M)_DFT-s-
OFDM_BPSK_Outer_Full_Low_CH

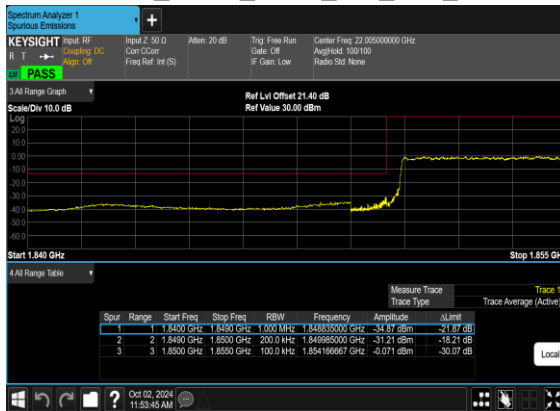


B5_N2(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

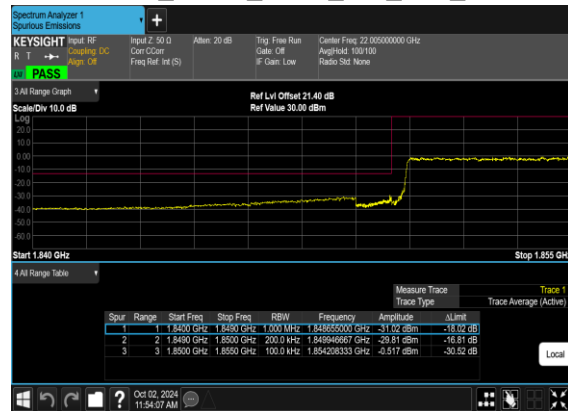





B5_N2(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Right_High_CH

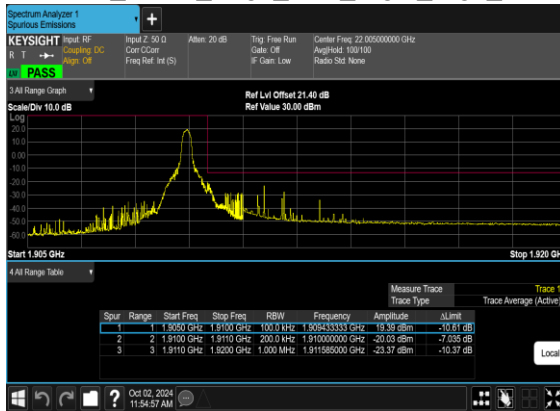


B5_N2(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_High_CH

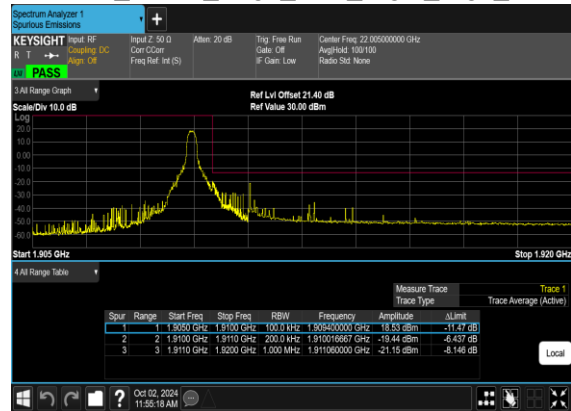

B5_N2(20M)_DFT-s-
OFDM_BPSK_Outer_Full_High_CH

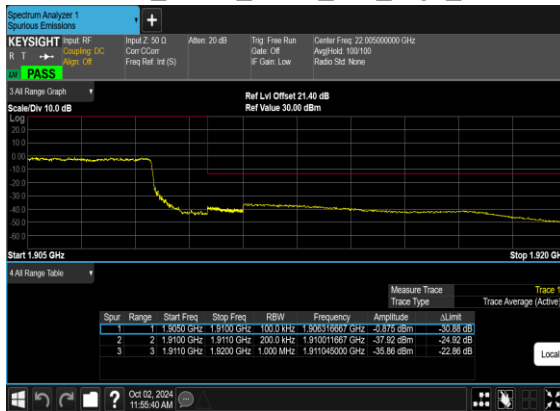

B5_N2(20M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

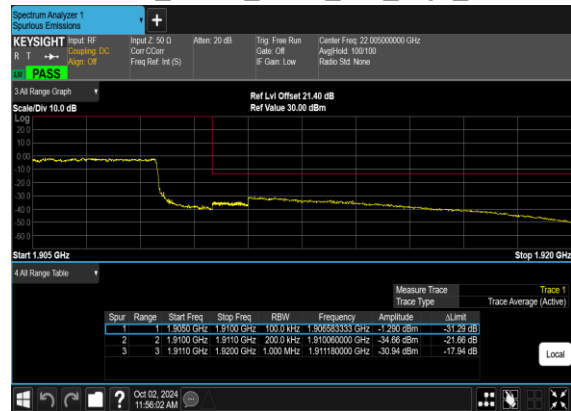



FR1 N5 ANT1

Transmitter Conducted Output Power And ERP, $(G_T - L_c) = -5.1\text{dB}$

NR Band	SCS	Bandwidth	Arfcn	Freq(M Hz)	Modulation	RB	Conducted Power(dBm)	ERP(dBm)	ERP(W)
5	15	5	165300	826.5	DFT-s-OFDM PI/2 BPSK	1@1	23.51	16.26	0.0423
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	23.69	16.44	0.0441
5	15	5	165300	826.5	DFT-s-OFDM 16 QAM	1@1	22.30	15.05	0.0320
5	15	5	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	23.20	15.95	0.0394
5	15	5	167300	836.5	DFT-s-OFDM QPSK	1@1	23.31	16.06	0.0404
5	15	5	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.22	14.97	0.0314
5	15	5	169300	846.5	DFT-s-OFDM PI/2 BPSK	1@1	23.29	16.04	0.0402
5	15	5	169300	846.5	DFT-s-OFDM QPSK	1@1	23.47	16.22	0.0419
5	15	5	169300	846.5	DFT-s-OFDM 16 QAM	1@1	22.12	14.87	0.0307
5	15	10	165800	829	DFT-s-OFDM PI/2 BPSK	1@1	23.22	15.97	0.0395
5	15	10	165800	829	DFT-s-OFDM QPSK	1@1	23.30	16.05	0.0403
5	15	10	165800	829	DFT-s-OFDM 16 QAM	1@1	22.22	14.97	0.0314
5	15	10	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	23.19	15.94	0.0393
5	15	10	167300	836.5	DFT-s-OFDM QPSK	1@1	23.21	15.96	0.0394
5	15	10	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.22	14.97	0.0314
5	15	10	168800	844	DFT-s-OFDM PI/2 BPSK	1@1	23.28	16.03	0.0401
5	15	10	168800	844	DFT-s-OFDM QPSK	1@1	23.21	15.96	0.0394
5	15	10	168800	844	DFT-s-OFDM 16 QAM	1@1	22.31	15.06	0.0321
5	15	15	166300	831.5	DFT-s-OFDM PI/2 BPSK	1@1	23.31	16.06	0.0404
5	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	23.43	16.18	0.0415
5	15	15	166300	831.5	DFT-s-OFDM 16 QAM	1@1	22.27	15.02	0.0318
5	15	15	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	23.26	16.01	0.0399
5	15	15	167300	836.5	DFT-s-OFDM QPSK	1@1	23.28	16.03	0.0401
5	15	15	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.29	15.04	0.0319
5	15	15	168300	841.5	DFT-s-OFDM PI/2 BPSK	1@1	23.24	15.99	0.0397
5	15	15	168300	841.5	DFT-s-OFDM QPSK	1@1	23.25	16.00	0.0398
5	15	15	168300	841.5	DFT-s-OFDM 16 QAM	1@1	22.18	14.93	0.0311
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	50@25	23.05	15.80	0.0380
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@1	23.35	16.10	0.0407
5	15	20	166800	834	DFT-s-OFDM PI/2 BPSK	1@104	23.22	15.97	0.0395
5	15	20	166800	834	DFT-s-OFDM QPSK	50@25	23.62	16.37	0.0434
5	15	20	166800	834	DFT-s-OFDM QPSK	1@1	23.38	16.13	0.0410
5	15	20	166800	834	DFT-s-OFDM QPSK	1@104	23.11	15.86	0.0385
5	15	20	166800	834	DFT-s-OFDM 16 QAM	50@25	22.87	15.62	0.0365
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@1	22.31	15.06	0.0321
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@104	22.21	14.96	0.0313
5	15	20	166800	834	DFT-s-OFDM 64 QAM	50@25	21.44	14.19	0.0262
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@1	21.02	13.77	0.0238
5	15	20	166800	834	DFT-s-OFDM 64 QAM	1@104	20.86	13.61	0.0230
5	15	20	166800	834	DFT-s-OFDM 256 QAM	50@25	18.39	11.14	0.0130



NR Band	SCS	BandWidth	Arfcn	Freq(M Hz)	Modulation	RB	Conducted Power(dBm)	ERP(dBm)	ERP(W)
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@1	18.34	11.09	0.0129
5	15	20	166800	834	DFT-s-OFDM 256 QAM	1@104	18.31	11.06	0.0128
5	15	20	166800	834	CP-OFDM QPSK	53@26	21.58	14.33	0.0271
5	15	20	166800	834	CP-OFDM QPSK	1@1	21.89	14.64	0.0291
5	15	20	166800	834	CP-OFDM QPSK	1@104	21.67	14.42	0.0277
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	50@25	22.99	15.74	0.0375
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@1	23.34	16.09	0.0406
5	15	20	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@104	23.11	15.86	0.0385
5	15	20	167300	836.5	DFT-s-OFDM QPSK	50@25	23.89	16.64	0.0461
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@1	23.42	16.17	0.0414
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@104	23.16	15.91	0.0390
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	50@25	22.00	14.75	0.0299
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.35	15.10	0.0324
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@104	22.15	14.90	0.0309
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	50@25	21.34	14.09	0.0256
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@1	21.07	13.82	0.0241
5	15	20	167300	836.5	DFT-s-OFDM 64 QAM	1@104	20.81	13.56	0.0227
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	50@25	18.36	11.11	0.0129
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@1	18.34	11.09	0.0129
5	15	20	167300	836.5	DFT-s-OFDM 256 QAM	1@104	18.20	10.95	0.0124
5	15	20	167300	836.5	CP-OFDM QPSK	53@26	21.67	14.42	0.0277
5	15	20	167300	836.5	CP-OFDM QPSK	1@1	21.80	14.55	0.0285
5	15	20	167300	836.5	CP-OFDM QPSK	1@104	21.62	14.37	0.0274
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	50@25	22.99	15.74	0.0375
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@1	23.34	16.09	0.0406
5	15	20	167800	839	DFT-s-OFDM PI/2 BPSK	1@104	23.08	15.83	0.0383
5	15	20	167800	839	DFT-s-OFDM QPSK	50@25	23.64	16.39	0.0436
5	15	20	167800	839	DFT-s-OFDM QPSK	1@1	23.38	16.13	0.0410
5	15	20	167800	839	DFT-s-OFDM QPSK	1@104	23.12	15.87	0.0386
5	15	20	167800	839	DFT-s-OFDM 16 QAM	50@25	22.58	15.33	0.0341
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@1	22.31	15.06	0.0321
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@104	22.14	14.89	0.0308
5	15	20	167800	839	DFT-s-OFDM 64 QAM	50@25	21.15	13.90	0.0245
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@1	20.96	13.71	0.0235
5	15	20	167800	839	DFT-s-OFDM 64 QAM	1@104	20.84	13.59	0.0229
5	15	20	167800	839	DFT-s-OFDM 256 QAM	50@25	19.02	11.77	0.0150
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@1	18.41	11.16	0.0131
5	15	20	167800	839	DFT-s-OFDM 256 QAM	1@104	18.23	10.98	0.0125
5	15	20	167800	839	CP-OFDM QPSK	53@26	22.23	14.98	0.0315
5	15	20	167800	839	CP-OFDM QPSK	1@1	21.83	14.58	0.0287
5	15	20	167800	839	CP-OFDM QPSK	1@104	21.64	14.39	0.0275



Software Version: 23.06.1602

FR1 N25 ANT1

Transmitter Conducted Output Power And EIRP, ($G_T - L_c$)=0dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
25	15	5	370500	1852.5	DFT-s-OFDM PI/2 BPSK	1@1	24.90	24.90	0.3090
25	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	24.85	24.85	0.3055
25	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	23.77	23.77	0.2382
25	15	5	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.85	24.85	0.3055
25	15	5	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.83	24.83	0.3041
25	15	5	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.90	23.90	0.2455
25	15	5	382500	1912.5	DFT-s-OFDM PI/2 BPSK	1@1	24.88	24.88	0.3076
25	15	5	382500	1912.5	DFT-s-OFDM QPSK	1@1	24.01	24.01	0.2518
25	15	5	382500	1912.5	DFT-s-OFDM 16 QAM	1@1	23.09	23.09	0.2037
25	15	10	371000	1855	DFT-s-OFDM PI/2 BPSK	1@1	24.88	24.88	0.3076
25	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	24.88	24.88	0.3076
25	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	23.78	23.78	0.2388
25	15	10	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.89	24.89	0.3083
25	15	10	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.83	24.83	0.3041
25	15	10	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.98	23.98	0.2500
25	15	10	382000	1910	DFT-s-OFDM PI/2 BPSK	1@1	24.96	24.96	0.3133
25	15	10	382000	1910	DFT-s-OFDM QPSK	1@1	24.04	24.04	0.2535
25	15	10	382000	1910	DFT-s-OFDM 16 QAM	1@1	23.08	23.08	0.2032
25	15	15	371500	1857.5	DFT-s-OFDM PI/2 BPSK	1@1	24.95	24.95	0.3126
25	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	24.99	24.99	0.3155
25	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	23.88	23.88	0.2443
25	15	15	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.82	24.82	0.3034
25	15	15	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.99	24.99	0.3155
25	15	15	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.92	23.92	0.2466
25	15	15	381500	1907.5	DFT-s-OFDM PI/2 BPSK	1@1	24.76	24.76	0.2992
25	15	15	381500	1907.5	DFT-s-OFDM QPSK	1@1	23.76	23.76	0.2377
25	15	15	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	22.87	22.87	0.1936
25	15	20	372000	1860	DFT-s-OFDM PI/2 BPSK	1@1	24.87	24.87	0.3069
25	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	24.86	24.86	0.3062
25	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	23.86	23.86	0.2432
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.99	24.99	0.3155
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.99	24.99	0.3155
25	15	20	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.85	23.85	0.2427
25	15	20	381000	1905	DFT-s-OFDM PI/2 BPSK	1@1	24.66	24.66	0.2924



NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
25	15	20	381000	1905	DFT-s-OFDM QPSK	1@1	24.34	24.34	0.2716
25	15	20	381000	1905	DFT-s-OFDM 16 QAM	1@1	23.38	23.38	0.2178
25	15	25	372500	1862.5	DFT-s-OFDM PI/2 BPSK	1@1	24.91	24.91	0.3097
25	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@1	24.92	24.92	0.3105
25	15	25	372500	1862.5	DFT-s-OFDM 16 QAM	1@1	23.84	23.84	0.2421
25	15	25	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.98	24.98	0.3148
25	15	25	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.91	24.91	0.3097
25	15	25	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.99	23.99	0.2506
25	15	25	380500	1902.5	DFT-s-OFDM PI/2 BPSK	1@1	24.82	24.82	0.3034
25	15	25	380500	1902.5	DFT-s-OFDM QPSK	1@1	24.63	24.63	0.2904
25	15	25	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	23.90	23.90	0.2455
25	15	30	373000	1865	DFT-s-OFDM PI/2 BPSK	1@1	24.89	24.89	0.3083
25	15	30	373000	1865	DFT-s-OFDM QPSK	1@1	24.92	24.92	0.3105
25	15	30	373000	1865	DFT-s-OFDM 16 QAM	1@1	23.78	23.78	0.2388
25	15	30	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.88	24.88	0.3076
25	15	30	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.91	24.91	0.3097
25	15	30	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.87	23.87	0.2438
25	15	30	380000	1900	DFT-s-OFDM PI/2 BPSK	1@1	24.83	24.83	0.3041
25	15	30	380000	1900	DFT-s-OFDM QPSK	1@1	24.92	24.92	0.3105
25	15	30	380000	1900	DFT-s-OFDM 16 QAM	1@1	24.03	24.03	0.2529
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	108@54	24.82	24.82	0.3034
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@1	24.82	24.82	0.3034
25	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@214	24.93	24.93	0.3112
25	15	40	374000	1870	DFT-s-OFDM QPSK	108@54	24.94	24.94	0.3119
25	15	40	374000	1870	DFT-s-OFDM QPSK	1@1	24.86	24.86	0.3062
25	15	40	374000	1870	DFT-s-OFDM QPSK	1@214	24.76	24.76	0.2992
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	108@54	24.06	24.06	0.2547
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@1	23.83	23.83	0.2415
25	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@214	23.86	23.86	0.2432
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	108@54	22.45	22.45	0.1758
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@1	22.62	22.62	0.1828
25	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@214	22.75	22.75	0.1884
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	108@54	20.41	20.41	0.1099
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@1	19.82	19.82	0.0959
25	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@214	20.10	20.10	0.1023
25	15	40	374000	1870	CP-OFDM QPSK	108@54	23.44	23.44	0.2208
25	15	40	374000	1870	CP-OFDM QPSK	1@1	23.34	23.34	0.2158
25	15	40	374000	1870	CP-OFDM QPSK	1@214	23.61	23.61	0.2296
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	108@54	24.98	24.98	0.3148
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@1	24.79	24.79	0.3013
25	15	40	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@214	24.82	24.82	0.3034



NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	108@54	24.86	24.86	0.3062
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@1	24.83	24.83	0.3041
25	15	40	376500	1882.5	DFT-s-OFDM QPSK	1@214	24.63	24.63	0.2904
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	108@54	24.07	24.07	0.2553
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	1@1	23.84	23.84	0.2421
25	15	40	376500	1882.5	DFT-s-OFDM 16 QAM	1@214	23.99	23.99	0.2506
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	108@54	22.58	22.58	0.1811
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	1@1	22.66	22.66	0.1845
25	15	40	376500	1882.5	DFT-s-OFDM 64 QAM	1@214	22.86	22.86	0.1932
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	108@54	20.16	20.16	0.1038
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	1@1	19.93	19.93	0.0984
25	15	40	376500	1882.5	DFT-s-OFDM 256 QAM	1@214	20.15	20.15	0.1035
25	15	40	376500	1882.5	CP-OFDM QPSK	108@54	23.56	23.56	0.2270
25	15	40	376500	1882.5	CP-OFDM QPSK	1@1	23.38	23.38	0.2178
25	15	40	376500	1882.5	CP-OFDM QPSK	1@214	23.55	23.55	0.2265
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	108@54	24.83	24.83	0.3041
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	1@1	24.91	24.91	0.3097
25	15	40	379000	1895	DFT-s-OFDM PI/2 BPSK	1@214	24.95	24.95	0.3126
25	15	40	379000	1895	DFT-s-OFDM QPSK	108@54	24.88	24.88	0.3076
25	15	40	379000	1895	DFT-s-OFDM QPSK	1@1	24.95	24.95	0.3126
25	15	40	379000	1895	DFT-s-OFDM QPSK	1@214	24.54	24.54	0.2844
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	108@54	24.11	24.11	0.2576
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	1@1	23.90	23.90	0.2455
25	15	40	379000	1895	DFT-s-OFDM 16 QAM	1@214	23.70	23.70	0.2344
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	108@54	22.67	22.67	0.1849
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	1@1	22.69	22.69	0.1858
25	15	40	379000	1895	DFT-s-OFDM 64 QAM	1@214	22.63	22.63	0.1832
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	108@54	19.67	19.67	0.0927
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	1@1	19.94	19.94	0.0986
25	15	40	379000	1895	DFT-s-OFDM 256 QAM	1@214	20.14	20.14	0.1033
25	15	40	379000	1895	CP-OFDM QPSK	108@54	23.68	23.68	0.2333
25	15	40	379000	1895	CP-OFDM QPSK	1@1	23.46	23.46	0.2218
25	15	40	379000	1895	CP-OFDM QPSK	1@214	23.38	23.38	0.2178



Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0042	PASS	NV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	-0.0028	PASS	LV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0035	PASS	HV
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	-0.0022	PASS	-30°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0024	PASS	-20°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0055	PASS	-10°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	-0.0022	PASS	0°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	-0.0016	PASS	10°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0008	PASS	20°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0005	PASS	30°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	-0.0016	PASS	40°C
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	0.0019	PASS	50°C

**Peak to Average Ratio**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	100@0	3.89	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM PI/2 BPSK	1@0	3.47	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	100@0	4.78	13	PASS
25	15	20	376500	1882.5	DFT-s-OFDM QPSK	1@0	4.21	13	PASS



N25(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH



N25(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Mid_CH



N25(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH



N25(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH



**Occupied Bandwidth**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
25	15	5	376500	1882.5	CP-OFDM QPSK	25@0	4.4825	5.073
25	15	5	376500	1882.5	CP-OFDM 16 QAM	25@0	4.4772	5.106
25	15	5	376500	1882.5	CP-OFDM 64 QAM	25@0	4.482	4.988
25	15	5	376500	1882.5	CP-OFDM 256 QAM	25@0	4.4754	5.147
25	15	10	376500	1882.5	CP-OFDM QPSK	52@0	9.2921	10.13
25	15	10	376500	1882.5	CP-OFDM 16 QAM	52@0	9.3083	10.05
25	15	10	376500	1882.5	CP-OFDM 64 QAM	52@0	9.2953	10.02
25	15	10	376500	1882.5	CP-OFDM 256 QAM	52@0	9.2778	9.997
25	15	15	376500	1882.5	CP-OFDM QPSK	79@0	14.113	15.18
25	15	15	376500	1882.5	CP-OFDM 16 QAM	79@0	14.111	15.01
25	15	15	376500	1882.5	CP-OFDM 64 QAM	79@0	14.108	15.27
25	15	15	376500	1882.5	CP-OFDM 256 QAM	79@0	14.137	15.59
25	15	20	376500	1882.5	CP-OFDM QPSK	106@0	18.977	19.71
25	15	20	376500	1882.5	CP-OFDM 16 QAM	106@0	18.961	20.16
25	15	20	376500	1882.5	CP-OFDM 64 QAM	106@0	18.976	21.27
25	15	20	376500	1882.5	CP-OFDM 256 QAM	106@0	18.993	20.03
25	15	25	376500	1882.5	CP-OFDM QPSK	133@0	23.796	24.84
25	15	25	376500	1882.5	CP-OFDM 16 QAM	133@0	23.8	26.08
25	15	25	376500	1882.5	CP-OFDM 64 QAM	133@0	23.771	24.8
25	15	25	376500	1882.5	CP-OFDM 256 QAM	133@0	23.792	24.8
25	15	30	376500	1882.5	CP-OFDM QPSK	160@0	28.556	29.52
25	15	30	376500	1882.5	CP-OFDM 16 QAM	160@0	28.683	30.04
25	15	30	376500	1882.5	CP-OFDM 64 QAM	160@0	28.564	29.67




25	15	30	376500	1882.5	CP-OFDM 256 QAM	160@0	28.654	29.65
25	15	40	376500	1882.5	CP-OFDM QPSK	216@0	38.601	39.95
25	15	40	376500	1882.5	CP-OFDM 16 QAM	216@0	38.582	39.87
25	15	40	376500	1882.5	CP-OFDM 64 QAM	216@0	38.527	39.89
25	15	40	376500	1882.5	CP-OFDM 256 QAM	216@0	38.577	40.0




N25(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N25(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

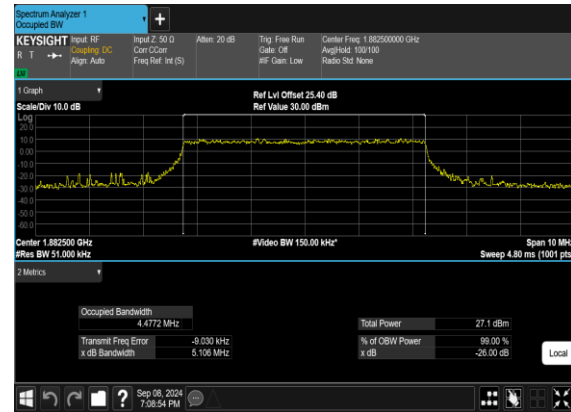

N25(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

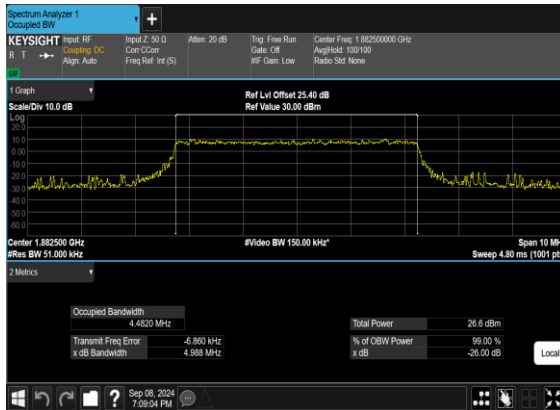


N25(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

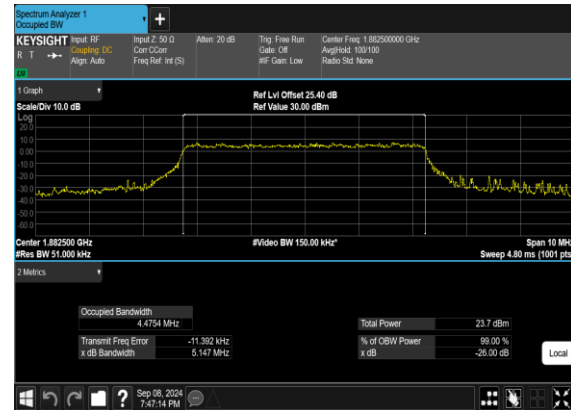





N25(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

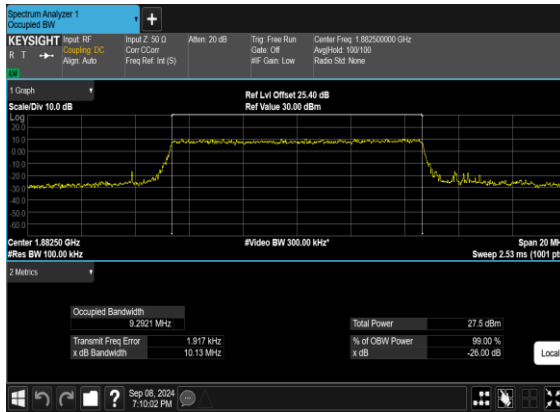

N25(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

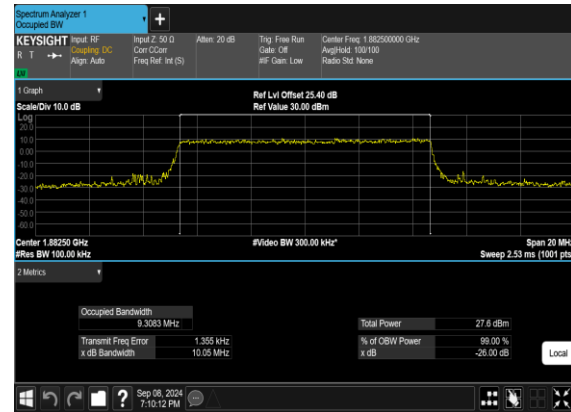

N25(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

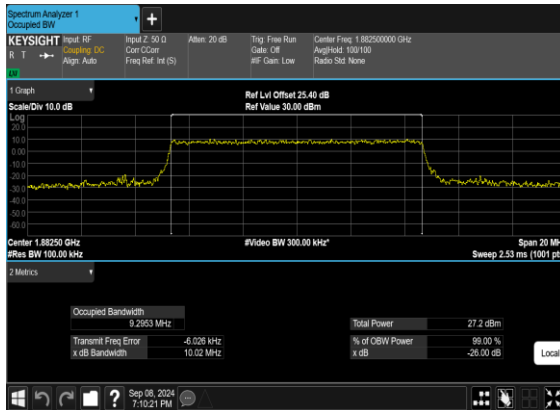

N25(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

