



FCC RF Test Report

APPLICANT : Relay, Inc.
EQUIPMENT : Relay
BRAND NAME : RelayM
MODEL NAME : RY2267
FCC ID : 2AMBHRY2267
STANDARD : 47 CFR Part 27
CLASSIFICATION : PCS Licensed Transmitter held to face (PCF)
TEST DATE(S) : Sep. 07, 2024 ~ Feb. 10, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Product Specification of Equipment Under Test	5
1.5 Modification of EUT	6
1.6 Maximum ERP/EIRP and Emission Designator	6
1.7 Testing Location	8
1.8 Test Software	9
1.9 Applicable Standards	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Test Mode	10
2.2 Connection Diagram of Test System	12
2.3 Support Unit used in test configuration and system	12
2.4 Measurement Results Explanation Example	13
2.5 Frequency List of Low/Middle/High Channels	13
3 CONDUCTED TEST ITEMS	16
3.1 Measuring Instruments	16
3.2 Test Setup	16
3.3 Test Result of Conducted Test	16
3.4 Conducted Output Power and ERP/EIRP	17
3.5 Peak-to-Average Ratio	18
3.6 Occupied Bandwidth	19
3.7 Conducted Band Edge	20
3.8 Conducted Spurious Emission	22
3.9 Frequency Stability	23
4 RADIATED TEST ITEMS	24
4.1 Measuring Instruments	24
4.2 Test Setup	24
4.3 Test Result of Radiated Test	25
4.4 Radiated Spurious Emission	26
5 LIST OF MEASURING EQUIPMENT	27
6 MEASUREMENT UNCERTAINTY	28
APPENDIX A. TEST RESULTS OF CONDUCTED TEST	
APPENDIX B. TEST RESULTS OF RADIATED TEST	
APPENDIX C. TEST SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG250505I	Rev. 01	Initial issue of report	Feb. 24, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(b)(10) §27.50(c)(10)	Effective Radiated Power (5G NR n12, n13, n71)	ERP < 3 Watt		
	§27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n7, n41, n38)	EIRP < 2Watt		
3.5	N/A	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(g)	Conducted Band Edge Measurement (5G NR n12, n13, n71)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§27.53(m)(4)	Conducted Band Edge Measurement (5G NR n7, n41, n38)	§27.53(m)(4)		
3.8	§2.1051 §27.53(g)	Conducted Spurious Emission (5G NR n12, n13, n71)	< 43+10log ₁₀ (P[Watts])	PASS	-
	§2.1051 §27.53(m)(4)	Conducted Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])		
3.9	§24.235 §27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(g)	Radiated Spurious Emission (5G NR n12, n13, n71)	< 43+10log ₁₀ (P[Watts])	PASS	Under limit 20.27 dB at 1559.40 MHz
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (5G NR n7, n41, n38)	< 55+10log ₁₀ (P[Watts])		

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Relay, Inc.

2230 Bandmate Way, Suite 500, Raleigh, NC 27607, USA

1.2 Manufacturer

Relay, Inc.

2230 Bandmate Way, Suite 500, Raleigh, NC 27607, USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Relay
Brand Name	RelayM
Model Name	RY2267
FCC ID	2AMBHRY2267
IMEI Code	Conducted : 004400152020000 Radiation : 990007540010789
HW Version	v01
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n13 : 777 MHz ~ 787 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n71: 663 MHz ~ 698 MHz
Rx Frequency	5G NR n7 : 2620 MHz ~ 2690 MHz 5G NR n12: 729 MHz ~ 746 MHz 5G NR n13 : 746 MHz ~ 756 MHz 5G NR n38: 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n71: 617 MHz ~ 652 MHz
Bandwidth	n7: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz n12: 5MHz / 10MHz / 15MHz n13: 5MHz / 10MHz n38: 10MHz / 15MHz / 20MHz / 30MHz / 40MHz n41 : 10MHz / 15MHz / 20MHz / 30MHz / 40MHz / 50MHz / 60MHz / 80MHz / 90MHz / 100MHz n71: 5MHz / 10MHz / 15MHz / 20MHz
SCS	15kHz for FDD, 30kHz for TDD

Antenna Gain	<Ant. 1>: n7: 3.0 dBi n12: -8.8 dBi n13: -9.1 dBi n38: 2.1 dBi n41: 2.1 dBi n71: -16.3 dBi <Ant. 2>: n41: 1.5 dBi <Ant. 8>: n41: -2.6 dBi <Ant. 9>: n41: -3.6 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum ERP/EIRP is calculated from max output power and max antenna gain, only the maximum ERP/EIRP are shown in the report, 5G NR n7/n12/n13/n38/n41/n71 for Ant. 1.
2. 5G NR n7/n12/n13/n38/n41/n71 only support SA mode.
3. 5G NR n41 supports HPUE mode.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum ERP/EIRP and Emission Designator

5G NR n12		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	701.5 ~ 713.5	0.0182	4M49G7D	0.0151	4M48W7D
10	704.0~ 711.0	0.0188	9M26G7D	0.0145	9M30W7D
15	706.5 ~ 708.5	0.0185	14M1G7D	0.0148	14M1W7D

5G NR n13		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	779.5 ~ 784.5	0.0223	4M48G7D	0.0163	4M49W7D
10	782	0.0206	9M27G7D	0.0169	9M27W7D



5G NR n71		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	665.5 ~ 695.5	0.0039	4M46G7D	0.0030	4M49W7D
10	668.0 ~ 693.0	0.0039	9M28G7D	0.0030	9M29W7D
15	670.5 ~ 690.5	0.0040	14M1G7D	0.0030	14M1W7D
20	673.0 ~ 688.0	0.0039	18M9G7D	0.0030	18M9W7D

5G NR n7		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	2502.5 ~ 2567.5	0.5794	4M48G7D	0.4624	4M50W7D
10	2505.0 ~ 2565.0	0.5741	9M30G7D	0.4539	9M31W7D
15	2507.5 ~ 2562.5	0.5888	14M1G7D	0.4624	14M2W7D
20	2510.0 ~ 2560.0	0.5861	18M9G7D	0.4550	19M0W7D
25	2512.5 ~ 2557.5	0.5943	23M8G7D	0.4624	23M9W7D
30	2515.0 ~ 2555.0	0.5861	28M6G7D	0.4592	28M7W7D
40	2520.0 ~ 2550.0	0.5861	38M6G7D	0.4603	38M7W7D

5G NR n38		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2575.0 ~ 2615.0	0.5957	8M59G7D	0.5023	8M61W7D
15	2577.5 ~ 2612.5	0.5359	13M6G7D	0.4315	13M6W7D
20	2580.0 ~ 2610.0	0.5164	18M2G7D	0.4266	18M3W7D
30	2585.0 ~ 2605.0	0.5224	27M9G7D	0.4285	27M9W7D
40	2590.0 ~ 2600.0	0.5572	37M9G7D	0.4571	37M9W7D



5G NR n41		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	2501.01 ~ 2685.00	0.9141	8M59G7D	0.7345	8M61W7D
15	2503.50 ~ 2682.48	0.9057	13M6G7D	0.7311	13M6W7D
20	2506.02 ~ 2679.99	0.8851	18M2G7D	0.7211	18M3W7D
30	2511.00 ~ 2674.98	0.8974	27M9G7D	0.7211	27M9W7D
40	2516.01 ~ 2670.00	0.8954	37M9G7D	0.7211	37M9W7D
50	2521.02 ~ 2664.99	0.8570	47M5G7D	0.6982	47M5W7D
60	2526.00 ~ 2659.98	0.9162	57M8G7D	0.7328	57M9W7D
80	2536.02 ~ 2649.99	0.9290	77M5G7D	0.7228	77M7W7D
90	2541.00 ~ 2644.98	0.8954	87M5G7D	0.7295	87M4W7D
100	2546.01 ~ 2640.00	0.9204	97M4G7D	0.7447	97M5W7D

Note:

1. 5G NR n41 overlaps the entire frequency range of 5G NR n38. Therefore, the test results provided in this report covers 5G NR n41 as well as 5G NR n38.
2. All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309



Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH02-SZ	CN1256	421272

Test data subcontracted: Radiated Spurious Emission test case in section 4.4 of this report.

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH02-SZ	AUDIX	E3	6.2009-8-24a

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

All test items were verified and recorded according to the standards and without any deviation during the test.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Z plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.


Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane

Test Items	5G NR	Bandwidth (MHz)														Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H	
Max. Output Power	n7	v	v	v	v	v	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n12	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n13	v	v	-	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n38	-	v	v	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n41	-	v	v	v	-	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v	
	n71	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
Peak-to-Average Ratio	n7				v				-	-	-	-	-	-	v	v				v	v		v		
	n12			v	-	-	-	-	-	-	-	-	-	-	v	v				v	v		v		
	n13		v	-	-	-	-	-	-	-	-	-	-	-	v	v				v	v		v		
	n41	-			v	-					-				v	v				v	v		v		
	n71				v	-	-	-	-	-	-	-	-	-	v	v				v	v		v		
26dB and 99% Bandwidth	n7	v	v	v	v	v	v	v	-	-	-	-	-	-		v	v	v	v		v		v		
	n12	v	v	v	-	-	-	-	-	-	-	-	-	-		v	v	v	v		v		v		
	n13	v	v	-	-	-	-	-	-	-	-	-	-	-		v	v	v	v		v		v		
	n41	-	v	v	v	-	v	v	v	v	-	v	v	v		v	v	v	v		v		v		
	n71	v	v	v	v	-	-	-	-	-	-	-	-	-		v	v	v	v		v		v		
Conducted	n7	v			v			v	-	-	-	-	-	-	v	v				v	v	v		v	



Test Items	5G NR	Bandwidth (MHz)													Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256QAM	1	Full	L	M	H
Band Edge	n12	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v				v	v	v		v
	n13	v	v	-	-	-	-	-	-	-	-	-	-	-	v	v				v	v	v		v
	n41	-	v			-			v		-			v	v	v				v	v	v		v
	n71	v	v		v	-	-	-	-	-	-	-	-	-	v	v				v	v	v		v
Conducted Spurious Emission	n7	v			v			v	-	-	-	-	-	-	v	v				v		v	v	v
	n12	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v				v		v	v	v
	n13	v	v	-	-	-	-	-	-	-	-	-	-	-	v	v				v		v	v	v
	n41	-	v			-			v		-			v	v	v				v		v	v	v
	n71	v	v		v	-	-	-	-	-	-	-	-	-	v	v				v		v	v	v
Frequency Stability	n7				v				-	-	-	-	-	-		v					v		v	
	n12		v		-	-	-	-	-	-	-	-	-	-		v					v		v	
	n13		v	-	-	-	-	-	-	-	-	-	-	-		v					v		v	
	n41	-			v	-					-					v					v		v	
	n71				v	-	-	-	-	-	-	-	-	-		v					v		v	
E.R.P / E.I.R.P	n7	v	v	v	v	v	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n12	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n13	v	v	-	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n38	-	v	v	v	-	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
	n41	-	v	v	v	-	v	v	v	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n71	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v
Radiated Spurious Emission	n7	Worst Case																			v	v	v	
	n12	Worst Case																			v	v	v	
	n13	Worst Case																			v	v	v	
	n41	Worst Case																			v	v	v	
	n71	Worst Case																			v	v	v	
Note	1. The mark “v ” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.85V ; Low Voltage =3.60V. ; High Voltage =4.40V																							

2.2 Connection Diagram of Test System

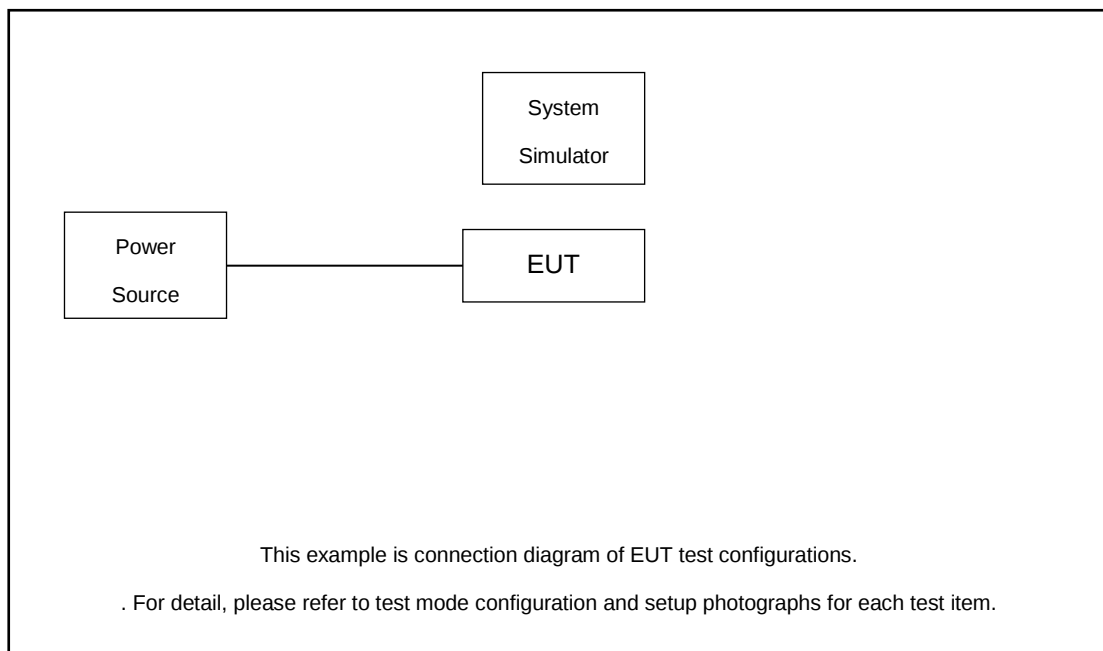

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.8 dB and 20dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.8 + 20 = 24.8 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n7 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	504000	507000	510000
	Frequency	2520	2535	2550
30	Channel	503000	507000	511000
	Frequency	2515	2535	2555
25	Channel	502500	507000	511500
	Frequency	2512.5	2535	2557.5
20	Channel	502000	507000	512000
	Frequency	2510	2535	2560
15	Channel	501500	507000	512500
	Frequency	2507.5	2535	2562.5
10	Channel	501000	507000	513000
	Frequency	2505	2535	2565
5	Channel	500500	507000	513500
	Frequency	2502.5	2535	2567.5



5G NR n12 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711
5	Channel	140300	141500	142700
	Frequency	701.5	707.5	713.5

5G NR n13 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
10	Channel	156400		
	Frequency	782		
5	Channel	155900	156400	156900
	Frequency	779.5	782	784.5

5G NR n38 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	518000	519000	520000
	Frequency	2590	2595	2600
30	Channel	517000	519000	521000
	Frequency	2585	2595	2605
20	Channel	516000	519000	522000
	Frequency	2580	2595	2610
15	Channel	515500	519000	522500
	Frequency	2577.5	2595	2612.5
10	Channel	515000	519000	523000
	Frequency	2575	2595	2615



5G NR n41 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	509202	518598	528000
	Frequency	2546.01	2592.99	2640
90	Channel	508200	518598	528996
	Frequency	2541	2592.99	2644.98
80	Channel	507204	518598	529998
	Frequency	2536.02	2592.99	2649.99
60	Channel	505200	518598	531996
	Frequency	2526	2592.99	2659.98
50	Channel	504204	518598	532998
	Frequency	2521.02	2592.99	2664.99
40	Channel	503202	518598	534000
	Frequency	2516.01	2592.99	2670
30	Channel	502200	518598	534996
	Frequency	2511	2592.99	2674.98
20	Channel	501204	518598	535998
	Frequency	2506.02	2592.99	2679.99
15	Channel	500700	518598	536496
	Frequency	2503.5	2592.99	2682.48
10	Channel	500202	518598	537000
	Frequency	2501.01	2592.99	2685

5G NR n71 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5

3 Conducted Test Items

3.1 Measuring Instruments

See list of measuring instruments of this test report.

3.2 Test Setup

3.2.1 Conducted Output Power



3.2.2 Peak-to-Average Ratio, Occupied Bandwidth ,Conducted Band-Edge and Conducted Spurious Emission



3.2.3 Frequency Stability



3.3 Test Result of Conducted Test

Please refer to Appendix A.

3.4 Conducted Output Power and ERP/EIRP

3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 3 Watts for 5G NR n12, n13, n71.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n7, n38, n41.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 Occupied Bandwidth

3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



3.7 Conducted Band Edge

3.7.1 Description of Conducted Band Edge Measurement

27.53 (g)

For operations in the 600MHz band and 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53(m)(4)

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq$ 1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. For 5G NR n7/n38/n41, the other 40 dB, and 55 dB have additionally applied same calculation above.
10. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.

3.8 Conducted Spurious Emission

3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.
11. For 5G NR n7/n38/n41
The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [55 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[55 + 10\log(P)]$ (dB)
 $= -25\text{dBm}$.

3.9 Frequency Stability

3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.

4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz



4.2.2 For radiated test from 30MHz to 1GHz

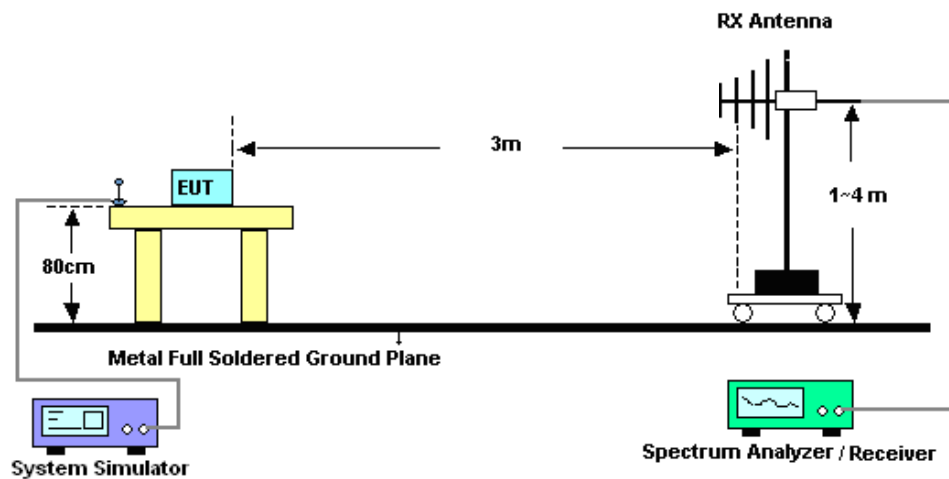

4.2.3 For radiated test above 1GHz

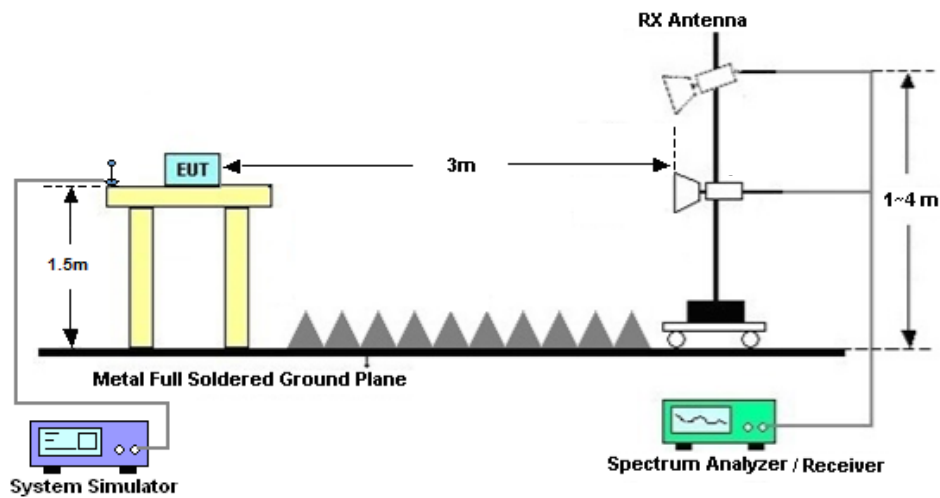

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.

4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For 5G NR n7/n38/n41

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10. $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11. $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$

13. For 5G NR n7/n38/n41:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Sep. 07, 2024~ Sep. 11, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Sep. 07, 2024~ Sep. 11, 2024	NCR	Conducted (TH01-KS)
Radio communication analyzer	Anritsu	MT8000A	6262148297	5GNR Sub6	Jul. 04, 2024	Sep. 07, 2024~ Sep. 11, 2024	Jul. 03, 2025	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Sep. 07, 2024~ Sep. 11, 2024	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Feb. 08, 2025~ Feb. 10, 2025	Jul. 02, 2025	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Feb. 08, 2025~ Feb. 10, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Feb. 08, 2025~ Feb. 10, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Feb. 08, 2025~ Feb. 10, 2025	Jul. 04, 2025	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Feb. 08, 2025~ Feb. 10, 2025	Jul. 03, 2025	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 09, 2024	Feb. 08, 2025~ Feb. 10, 2025	Apr. 08, 2025	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2024	Feb. 08, 2025~ Feb. 10, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 14, 2024	Feb. 08, 2025~ Feb. 10, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2024	Feb. 08, 2025~ Feb. 10, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Feb. 08, 2025~ Feb. 10, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Feb. 08, 2025~ Feb. 10, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.04ppm

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.72 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%



Software Version: 23.06.1602

FR1 N7

Transmitter Conducted Output Power And EIRP, (G_T - L_c)=3.0dB

NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
7	15	5	500500	2502.5	DFT-s-OFDM PI/2 BPSK	1@1	24.52	27.52	0.5649
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@1	24.60	27.60	0.5754
7	15	5	500500	2502.5	DFT-s-OFDM 16 QAM	1@1	23.56	26.56	0.4529
7	15	5	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.59	27.59	0.5741
7	15	5	507000	2535	DFT-s-OFDM QPSK	1@1	24.63	27.63	0.5794
7	15	5	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.65	26.65	0.4624
7	15	5	513500	2567.5	DFT-s-OFDM PI/2 BPSK	1@1	24.53	27.53	0.5662
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@1	24.39	27.39	0.5483
7	15	5	513500	2567.5	DFT-s-OFDM 16 QAM	1@1	23.28	26.28	0.4246
7	15	10	501000	2505	DFT-s-OFDM PI/2 BPSK	1@1	24.56	27.56	0.5702
7	15	10	501000	2505	DFT-s-OFDM QPSK	1@1	24.59	27.59	0.5741
7	15	10	501000	2505	DFT-s-OFDM 16 QAM	1@1	23.57	26.57	0.4539
7	15	10	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.53	27.53	0.5662
7	15	10	507000	2535	DFT-s-OFDM QPSK	1@1	24.58	27.58	0.5728
7	15	10	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.49	26.49	0.4457
7	15	10	513000	2565	DFT-s-OFDM PI/2 BPSK	1@1	24.31	27.31	0.5383
7	15	10	513000	2565	DFT-s-OFDM QPSK	1@1	24.47	27.47	0.5585
7	15	10	513000	2565	DFT-s-OFDM 16 QAM	1@1	23.41	26.41	0.4375
7	15	15	501500	2507.5	DFT-s-OFDM PI/2 BPSK	1@1	24.62	27.62	0.5781
7	15	15	501500	2507.5	DFT-s-OFDM QPSK	1@1	24.65	27.65	0.5821
7	15	15	501500	2507.5	DFT-s-OFDM 16 QAM	1@1	23.62	26.62	0.4592
7	15	15	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.60	27.60	0.5754
7	15	15	507000	2535	DFT-s-OFDM QPSK	1@1	24.70	27.70	0.5888
7	15	15	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.65	26.65	0.4624
7	15	15	512500	2562.5	DFT-s-OFDM PI/2 BPSK	1@1	24.53	27.53	0.5662
7	15	15	512500	2562.5	DFT-s-OFDM QPSK	1@1	24.66	27.66	0.5834
7	15	15	512500	2562.5	DFT-s-OFDM 16 QAM	1@1	23.52	26.52	0.4487
7	15	20	502000	2510	DFT-s-OFDM PI/2 BPSK	1@1	24.60	27.60	0.5754
7	15	20	502000	2510	DFT-s-OFDM QPSK	1@1	24.61	27.61	0.5768
7	15	20	502000	2510	DFT-s-OFDM 16 QAM	1@1	23.58	26.58	0.4550
7	15	20	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.66	27.66	0.5834
7	15	20	507000	2535	DFT-s-OFDM QPSK	1@1	24.68	27.68	0.5861
7	15	20	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.55	26.55	0.4519
7	15	20	512000	2560	DFT-s-OFDM PI/2 BPSK	1@1	24.56	27.56	0.5702



NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
7	15	20	512000	2560	DFT-s-OFDM QPSK	1@1	24.56	27.56	0.5702
7	15	20	512000	2560	DFT-s-OFDM 16 QAM	1@1	23.56	26.56	0.4529
7	15	25	502500	2512.5	DFT-s-OFDM PI/2 BPSK	1@1	24.63	27.63	0.5794
7	15	25	502500	2512.5	DFT-s-OFDM QPSK	1@1	24.55	27.55	0.5689
7	15	25	502500	2512.5	DFT-s-OFDM 16 QAM	1@1	23.52	26.52	0.4487
7	15	25	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.71	27.71	0.5902
7	15	25	507000	2535	DFT-s-OFDM QPSK	1@1	24.74	27.74	0.5943
7	15	25	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.65	26.65	0.4624
7	15	25	511500	2557.5	DFT-s-OFDM PI/2 BPSK	1@1	24.58	27.58	0.5728
7	15	25	511500	2557.5	DFT-s-OFDM QPSK	1@1	24.64	27.64	0.5808
7	15	25	511500	2557.5	DFT-s-OFDM 16 QAM	1@1	23.65	26.65	0.4624
7	15	30	503000	2515	DFT-s-OFDM PI/2 BPSK	1@1	24.63	27.63	0.5794
7	15	30	503000	2515	DFT-s-OFDM QPSK	1@1	24.64	27.64	0.5808
7	15	30	503000	2515	DFT-s-OFDM 16 QAM	1@1	23.47	26.47	0.4436
7	15	30	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.68	27.68	0.5861
7	15	30	507000	2535	DFT-s-OFDM QPSK	1@1	24.65	27.65	0.5821
7	15	30	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.62	26.62	0.4592
7	15	30	511000	2555	DFT-s-OFDM PI/2 BPSK	1@1	24.66	27.66	0.5834
7	15	30	511000	2555	DFT-s-OFDM QPSK	1@1	24.60	27.60	0.5754
7	15	30	511000	2555	DFT-s-OFDM 16 QAM	1@1	23.62	26.62	0.4592
7	15	40	504000	2520	DFT-s-OFDM PI/2 BPSK	108@54	24.51	27.51	0.5636
7	15	40	504000	2520	DFT-s-OFDM PI/2 BPSK	1@1	24.60	27.60	0.5754
7	15	40	504000	2520	DFT-s-OFDM PI/2 BPSK	1@214	24.50	27.50	0.5623
7	15	40	504000	2520	DFT-s-OFDM QPSK	108@54	24.62	27.62	0.5781
7	15	40	504000	2520	DFT-s-OFDM QPSK	1@1	24.54	27.54	0.5675
7	15	40	504000	2520	DFT-s-OFDM QPSK	1@214	24.55	27.55	0.5689
7	15	40	504000	2520	DFT-s-OFDM 16 QAM	108@54	23.60	26.60	0.4571
7	15	40	504000	2520	DFT-s-OFDM 16 QAM	1@1	23.55	26.55	0.4519
7	15	40	504000	2520	DFT-s-OFDM 16 QAM	1@214	23.53	26.53	0.4498
7	15	40	504000	2520	DFT-s-OFDM 64 QAM	108@54	22.03	25.03	0.3184
7	15	40	504000	2520	DFT-s-OFDM 64 QAM	1@1	22.25	25.25	0.3350
7	15	40	504000	2520	DFT-s-OFDM 64 QAM	1@214	22.31	25.31	0.3396
7	15	40	504000	2520	DFT-s-OFDM 256 QAM	108@54	19.95	22.95	0.1972
7	15	40	504000	2520	DFT-s-OFDM 256 QAM	1@1	19.53	22.53	0.1791
7	15	40	504000	2520	DFT-s-OFDM 256 QAM	1@214	19.47	22.47	0.1766
7	15	40	504000	2520	CP-OFDM QPSK	108@54	23.15	26.15	0.4121
7	15	40	504000	2520	CP-OFDM QPSK	1@1	23.03	26.03	0.4009
7	15	40	504000	2520	CP-OFDM QPSK	1@214	23.03	26.03	0.4009
7	15	40	507000	2535	DFT-s-OFDM PI/2 BPSK	108@54	24.65	27.65	0.5821
7	15	40	507000	2535	DFT-s-OFDM PI/2 BPSK	1@1	24.68	27.68	0.5861



NR Band	SCS	BandWidth	Arfcn	Freq(MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
7	15	40	507000	2535	DFT-s-OFDM PI/2 BPSK	1@214	24.49	27.49	0.5610
7	15	40	507000	2535	DFT-s-OFDM QPSK	108@54	24.66	27.66	0.5834
7	15	40	507000	2535	DFT-s-OFDM QPSK	1@1	24.62	27.62	0.5781
7	15	40	507000	2535	DFT-s-OFDM QPSK	1@214	24.47	27.47	0.5585
7	15	40	507000	2535	DFT-s-OFDM 16 QAM	108@54	23.61	26.61	0.4581
7	15	40	507000	2535	DFT-s-OFDM 16 QAM	1@1	23.55	26.55	0.4519
7	15	40	507000	2535	DFT-s-OFDM 16 QAM	1@214	23.46	26.46	0.4426
7	15	40	507000	2535	DFT-s-OFDM 64 QAM	108@54	22.16	25.16	0.3281
7	15	40	507000	2535	DFT-s-OFDM 64 QAM	1@1	22.37	25.37	0.3443
7	15	40	507000	2535	DFT-s-OFDM 64 QAM	1@214	22.10	25.10	0.3236
7	15	40	507000	2535	DFT-s-OFDM 256 QAM	108@54	19.63	22.63	0.1832
7	15	40	507000	2535	DFT-s-OFDM 256 QAM	1@1	19.56	22.56	0.1803
7	15	40	507000	2535	DFT-s-OFDM 256 QAM	1@214	19.46	22.46	0.1762
7	15	40	507000	2535	CP-OFDM QPSK	108@54	23.04	26.04	0.4018
7	15	40	507000	2535	CP-OFDM QPSK	1@1	23.19	26.19	0.4159
7	15	40	507000	2535	CP-OFDM QPSK	1@214	22.98	25.98	0.3963
7	15	40	510000	2550	DFT-s-OFDM PI/2 BPSK	108@54	24.39	27.39	0.5483
7	15	40	510000	2550	DFT-s-OFDM PI/2 BPSK	1@1	24.52	27.52	0.5649
7	15	40	510000	2550	DFT-s-OFDM PI/2 BPSK	1@214	24.35	27.35	0.5433
7	15	40	510000	2550	DFT-s-OFDM QPSK	108@54	24.52	27.52	0.5649
7	15	40	510000	2550	DFT-s-OFDM QPSK	1@1	24.61	27.61	0.5768
7	15	40	510000	2550	DFT-s-OFDM QPSK	1@214	24.35	27.35	0.5433
7	15	40	510000	2550	DFT-s-OFDM 16 QAM	108@54	23.52	26.52	0.4487
7	15	40	510000	2550	DFT-s-OFDM 16 QAM	1@1	23.63	26.63	0.4603
7	15	40	510000	2550	DFT-s-OFDM 16 QAM	1@214	23.23	26.23	0.4198
7	15	40	510000	2550	DFT-s-OFDM 64 QAM	108@54	21.95	24.95	0.3126
7	15	40	510000	2550	DFT-s-OFDM 64 QAM	1@1	22.27	25.27	0.3365
7	15	40	510000	2550	DFT-s-OFDM 64 QAM	1@214	22.15	25.15	0.3273
7	15	40	510000	2550	DFT-s-OFDM 256 QAM	108@54	19.85	22.85	0.1928
7	15	40	510000	2550	DFT-s-OFDM 256 QAM	1@1	19.51	22.51	0.1782
7	15	40	510000	2550	DFT-s-OFDM 256 QAM	1@214	19.41	22.41	0.1742
7	15	40	510000	2550	CP-OFDM QPSK	108@54	22.89	25.89	0.3882
7	15	40	510000	2550	CP-OFDM QPSK	1@1	23.08	26.08	0.4055
7	15	40	510000	2550	CP-OFDM QPSK	1@214	22.94	25.94	0.3926

**Frequency Stability**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0048	PASS	NV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	-0.0069	PASS	LV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	-0.0025	PASS	HV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	-0.0041	PASS	-30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0082	PASS	-20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0034	PASS	-10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	-0.0052	PASS	0°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0036	PASS	10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	-0.0056	PASS	20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	-0.0036	PASS	30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	0.0041	PASS	40°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	-0.0064	PASS	50°C

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (Hz)	Verdict	Environment
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	-5.2	PASS	NV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	6.8	PASS	LV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	4.6	PASS	HV
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	4.2	PASS	-30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	3.7	PASS	-20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	5.3	PASS	-10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	-6.9	PASS	0°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	4.8	PASS	10°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	-6.2	PASS	20°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	5.8	PASS	30°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	-6.4	PASS	40°C
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	3.2	PASS	50°C

$|\text{MAX}(\Delta f)| = 6.9 \text{ Hz}$

Frequency Stability	Frequency (MHz)	Limit Line	Result
$f_L - \text{MAX}(\Delta f) $	2500.126997	$\geq 2500 \text{ MHz}$	PASS
$f_H + \text{MAX}(\Delta f) $	2569.844003	$\leq 2570 \text{ MHz}$	

**Peak to Average Ratio**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	100@0	4.47	13	PASS
7	15	20	507000	2535.0	DFT-s-OFDM PI/2 BPSK	1@0	3.36	13	PASS
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	100@0	5.44	13	PASS
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	4.55	13	PASS



N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH



N7(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Mid_CH

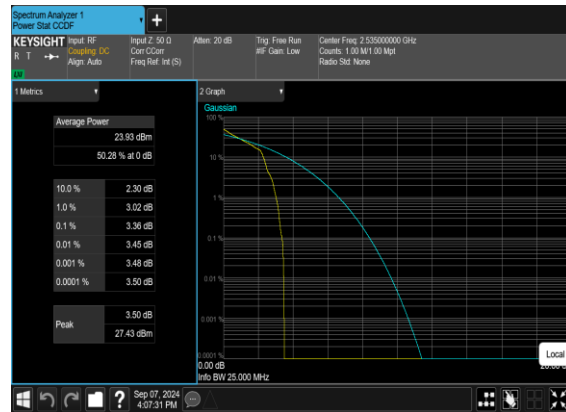

N7(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH



N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH



**Occupied Bandwidth**


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
7	15	5	507000	2535.0	CP-OFDM QPSK	25@0	4.4759	5.137
7	15	5	507000	2535.0	CP-OFDM 16 QAM	25@0	4.4993	8.023
7	15	5	507000	2535.0	CP-OFDM 64 QAM	25@0	4.4957	5.207
7	15	5	507000	2535.0	CP-OFDM 256 QAM	25@0	4.4818	7.105
7	15	10	507000	2535.0	CP-OFDM QPSK	52@0	9.2972	12.41
7	15	10	507000	2535.0	CP-OFDM 16 QAM	52@0	9.2949	10.44
7	15	10	507000	2535.0	CP-OFDM 64 QAM	52@0	9.2756	9.88
7	15	10	507000	2535.0	CP-OFDM 256 QAM	52@0	9.3061	11.23
7	15	15	507000	2535.0	CP-OFDM QPSK	79@0	14.137	17.13
7	15	15	507000	2535.0	CP-OFDM 16 QAM	79@0	14.121	16.31
7	15	15	507000	2535.0	CP-OFDM 64 QAM	79@0	14.167	16.1
7	15	15	507000	2535.0	CP-OFDM 256 QAM	79@0	14.121	14.97
7	15	20	507000	2535.0	CP-OFDM QPSK	106@0	18.944	19.87
7	15	20	507000	2535.0	CP-OFDM 16 QAM	106@0	18.99	22.25
7	15	20	507000	2535.0	CP-OFDM 64 QAM	106@0	18.962	21.16
7	15	20	507000	2535.0	CP-OFDM 256 QAM	106@0	19.047	20.01
7	15	25	507000	2535.0	CP-OFDM QPSK	133@0	23.835	24.76
7	15	25	507000	2535.0	CP-OFDM 16 QAM	133@0	23.843	26.53
7	15	25	507000	2535.0	CP-OFDM 64 QAM	133@0	23.825	25.32
7	15	25	507000	2535.0	CP-OFDM 256 QAM	133@0	23.851	24.81
7	15	30	507000	2535.0	CP-OFDM QPSK	160@0	28.642	29.7
7	15	30	507000	2535.0	CP-OFDM 16 QAM	160@0	28.687	29.67
7	15	30	507000	2535.0	CP-OFDM 64 QAM	160@0	28.619	29.72
7	15	30	507000	2535.0	CP-OFDM 256 QAM	160@0	28.654	31.29
7	15	40	507000	2535.0	CP-OFDM QPSK	216@0	38.641	39.84




7	15	40	507000	2535.0	CP-OFDM 16 QAM	216@0	38.563	40.96
7	15	40	507000	2535.0	CP-OFDM 64 QAM	216@0	38.691	39.89
7	15	40	507000	2535.0	CP-OFDM 256 QAM	216@0	38.628	40.21




N7(5M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

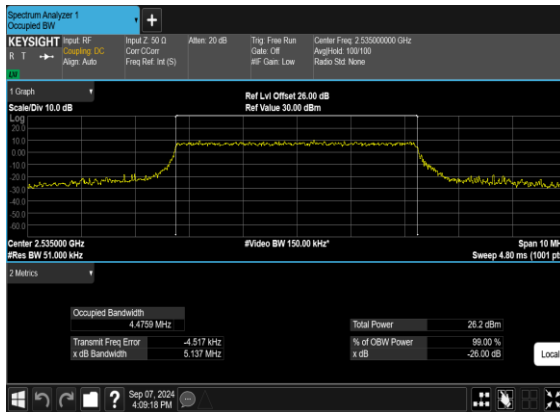


N7(5M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

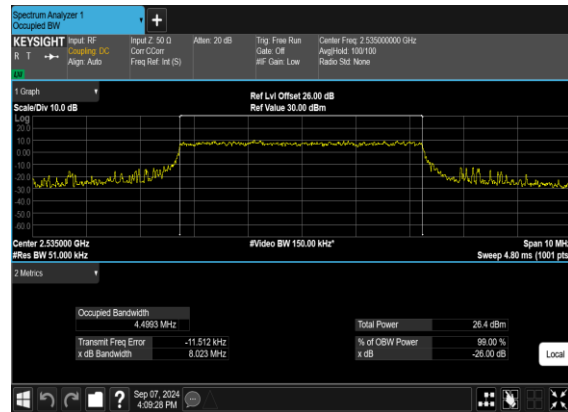

N7(5M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

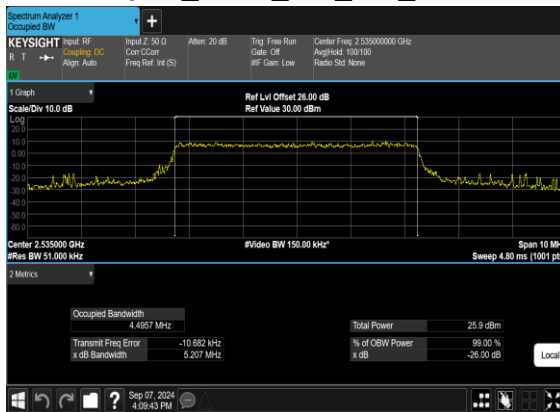


N7(5M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

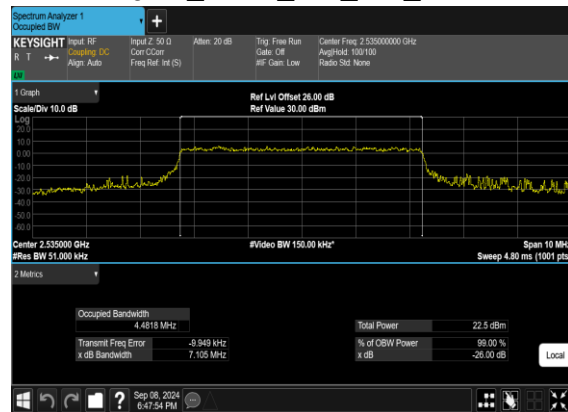





N7(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

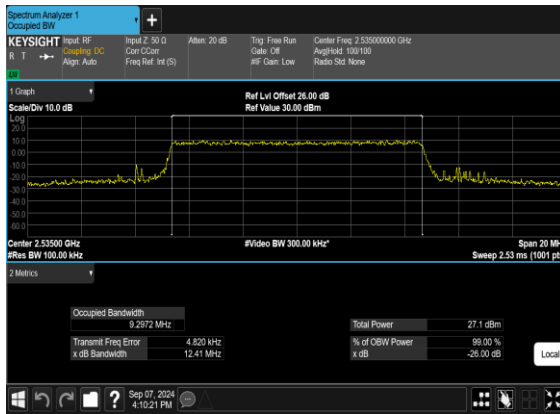


N7(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

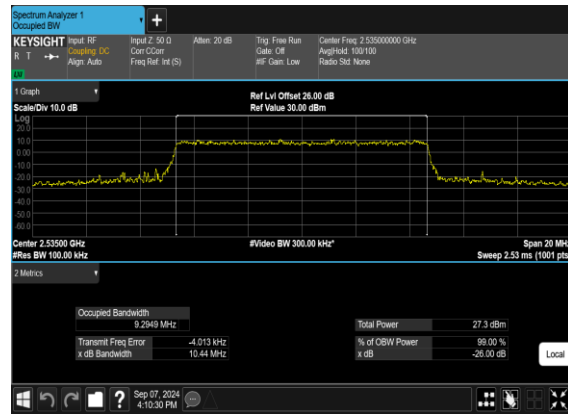

N7(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

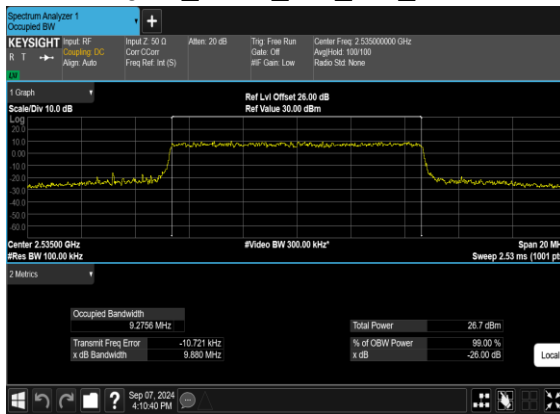


N7(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

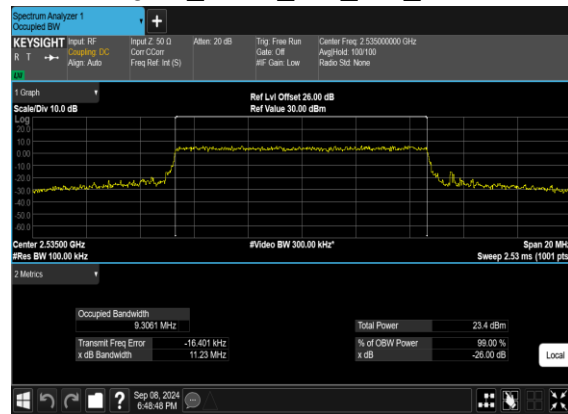





N7(15M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

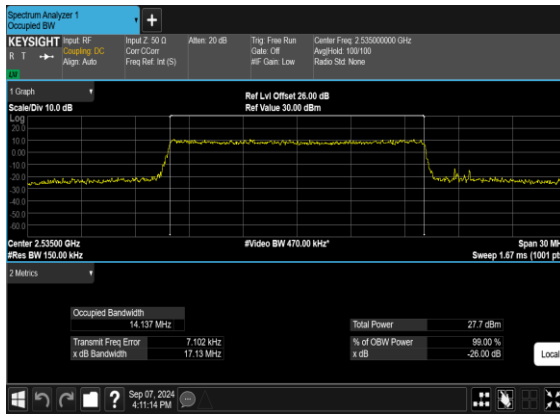


N7(15M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

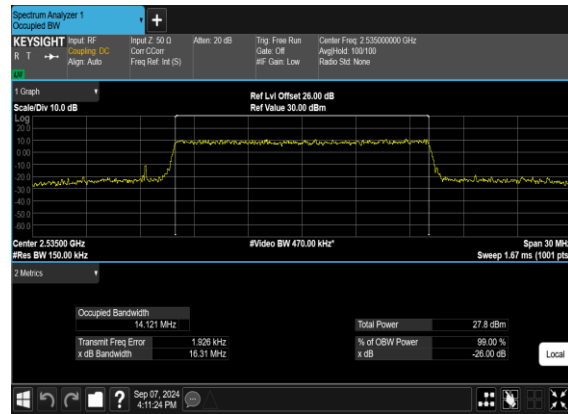

N7(15M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

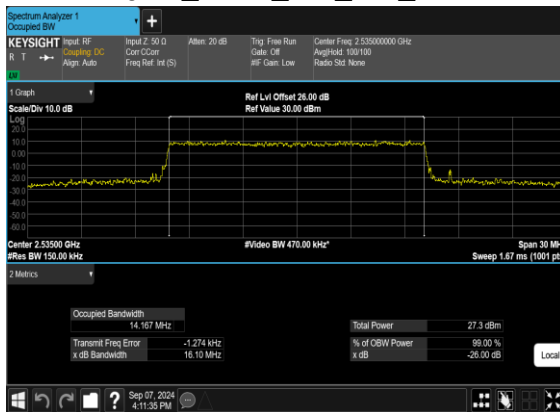


N7(15M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

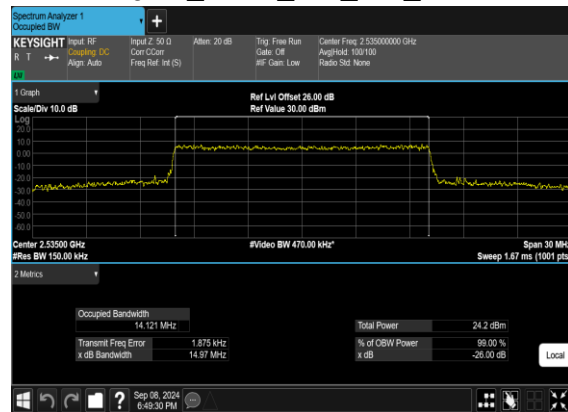





N7(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

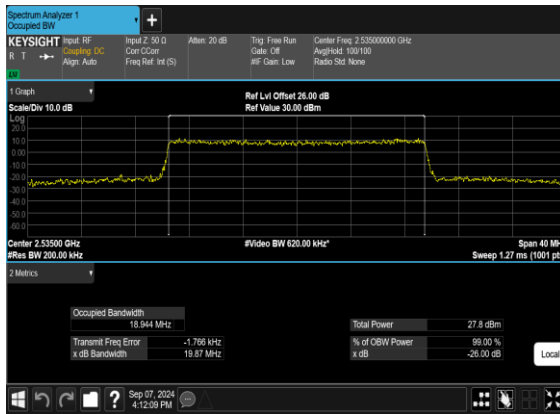


N7(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

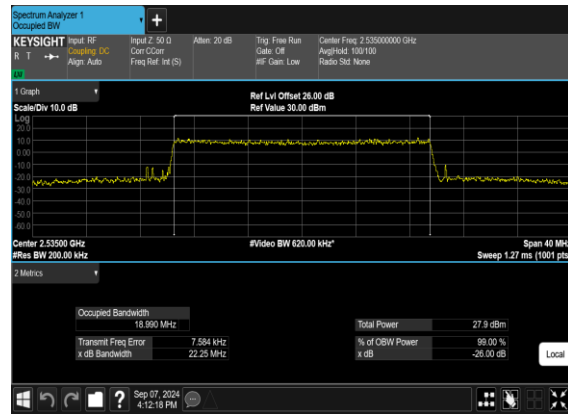

N7(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

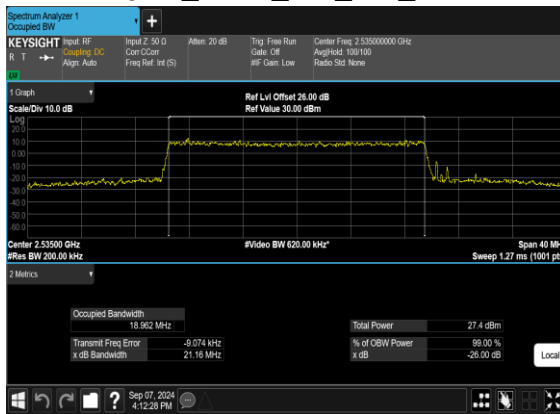


N7(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

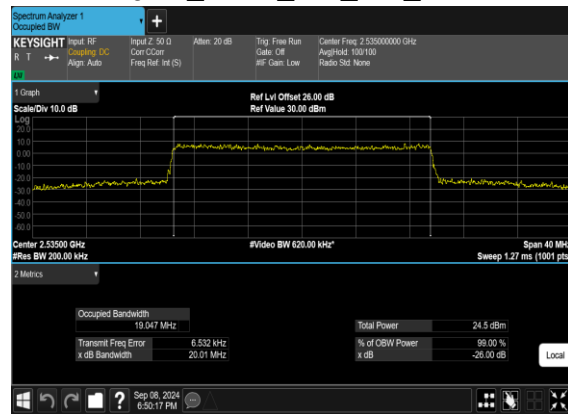





N7(25M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

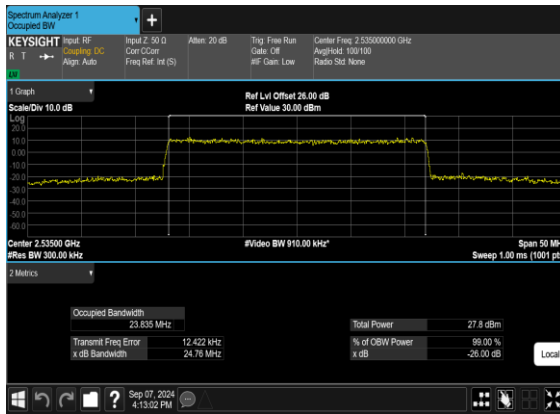


N7(25M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

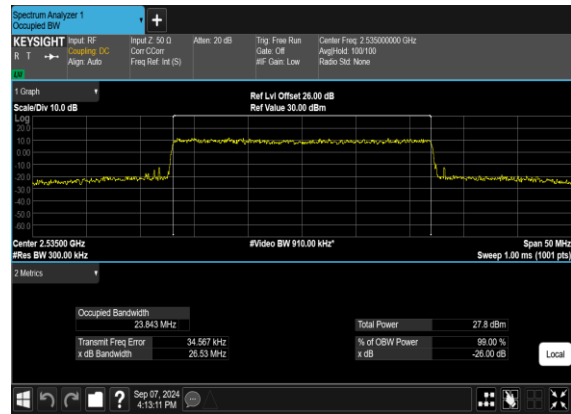

N7(25M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

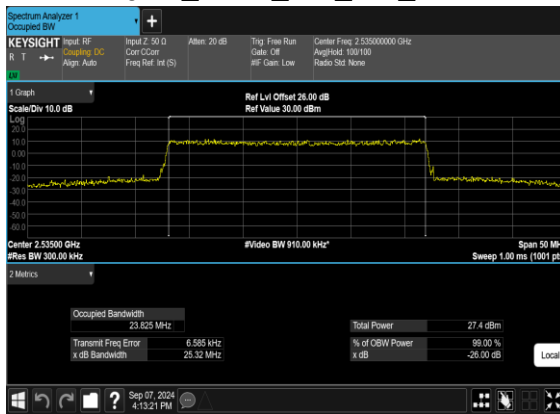


N7(25M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

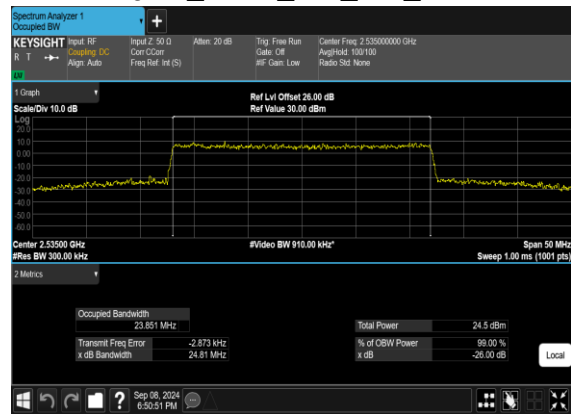





N7(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

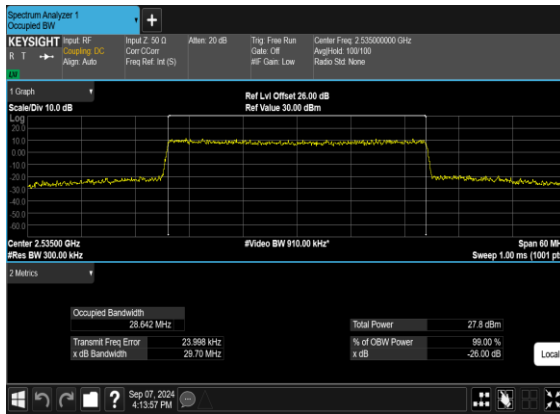


N7(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

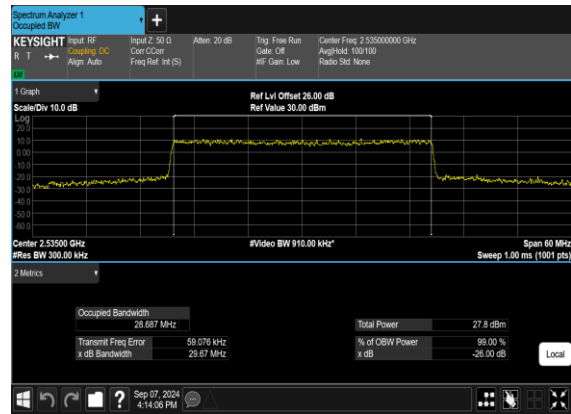

N7(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

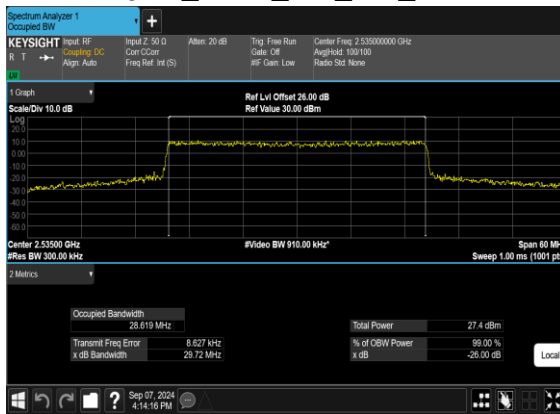


N7(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

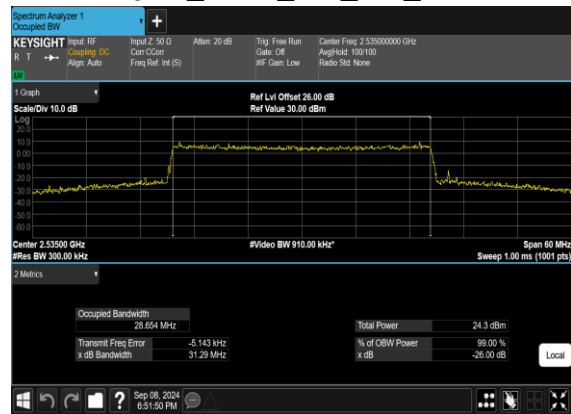




N7(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

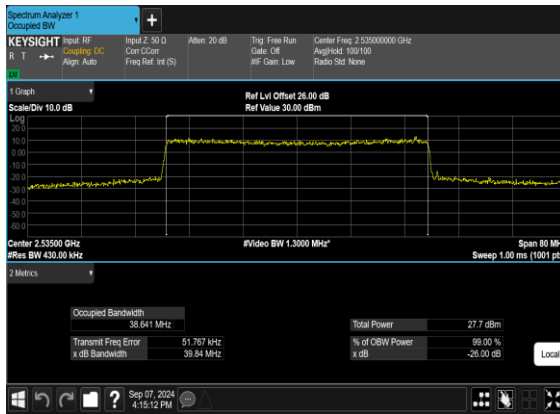


N7(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

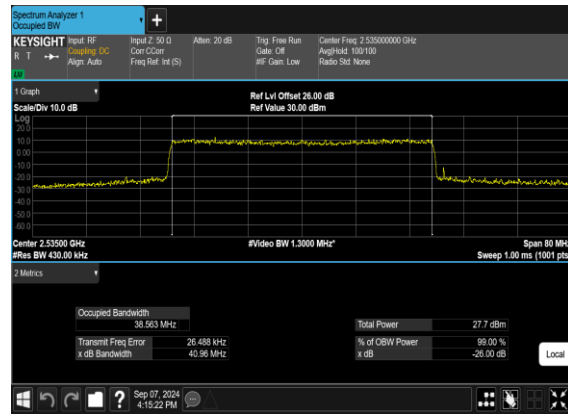

N7(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH



N7(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

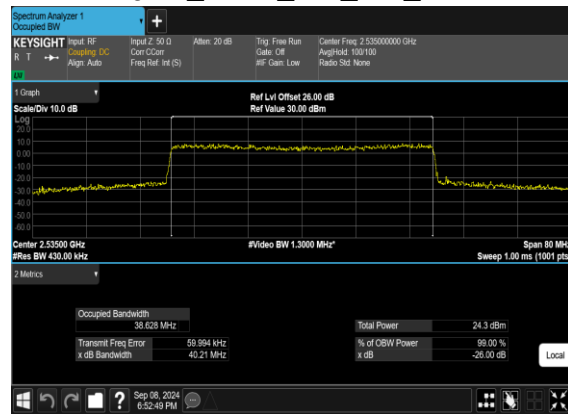

**Conducted Spurious Emissions**

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	---




7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	20	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	40	504000	2520.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	40	504000	2520.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	40	504000	2520.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	40	504000	2520.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	40	504000	2520.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	40	504000	2520.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	40	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	40	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	40	507000	2535.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	40	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	---




7	15	40	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	40	507000	2535.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	40	510000	2550.0	DFT-s-OFDM BPSK	1@0	see graph	---
7	15	40	510000	2550.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	40	510000	2550.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	40	510000	2550.0	DFT-s-OFDM QPSK	1@0	see graph	---
7	15	40	510000	2550.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	40	510000	2550.0	DFT-s-OFDM QPSK	1@0	see graph	PASS




N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

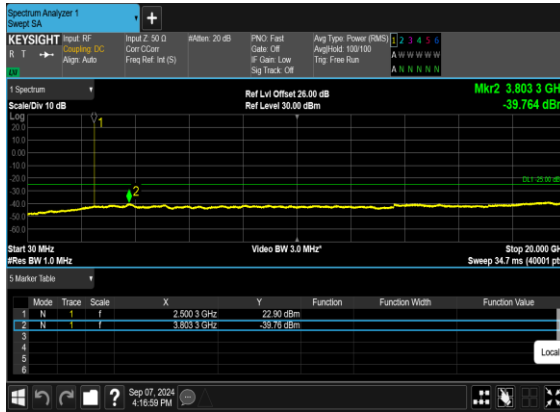


N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

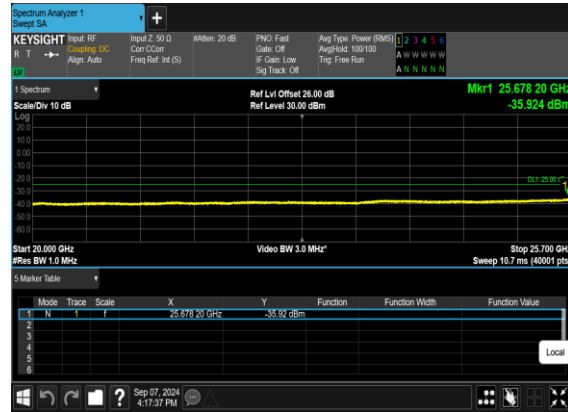

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

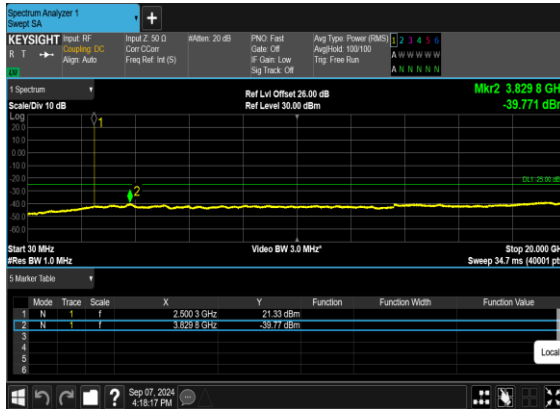


N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

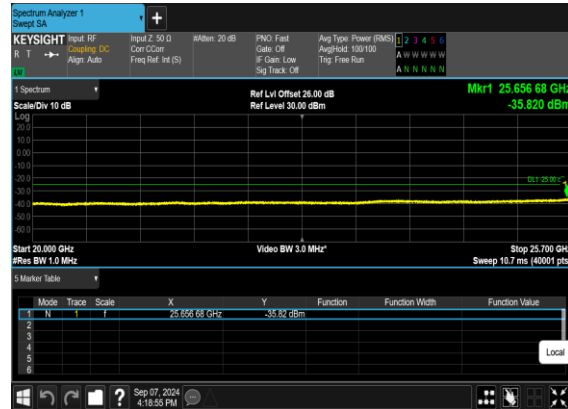





N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

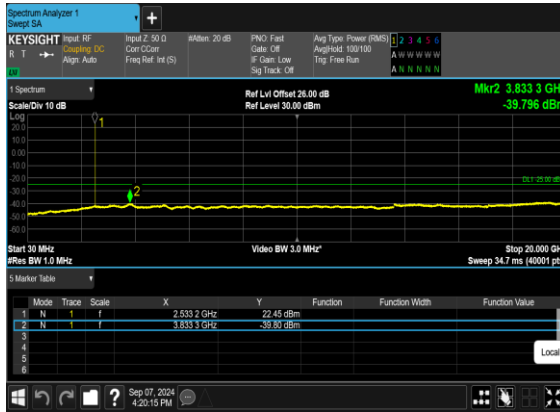


N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

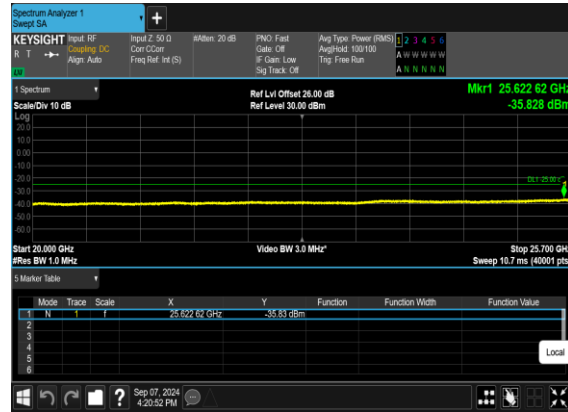

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

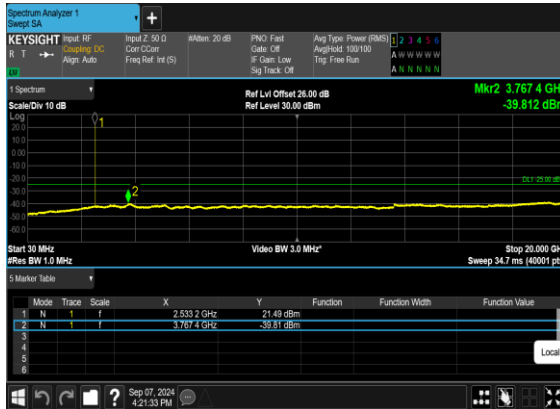


N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

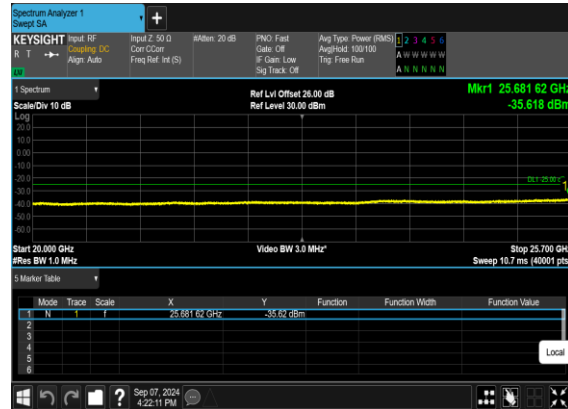





N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

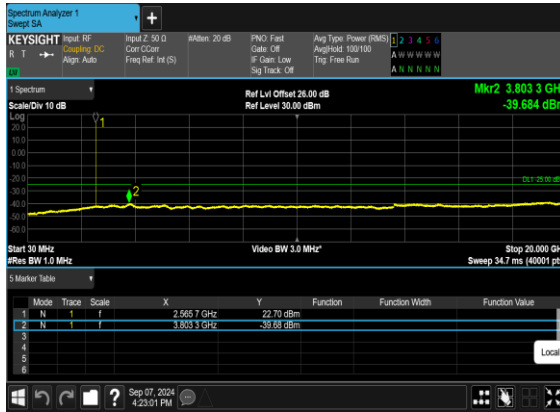


N7(5M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

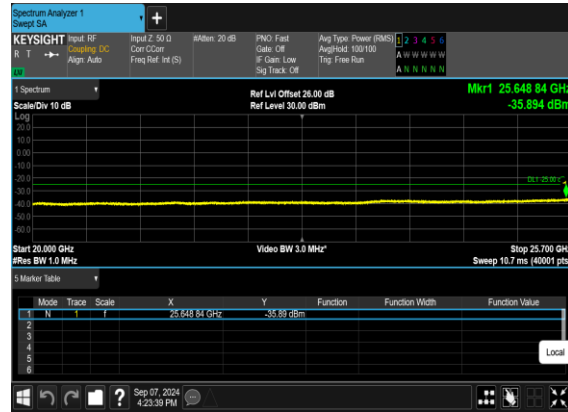

N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

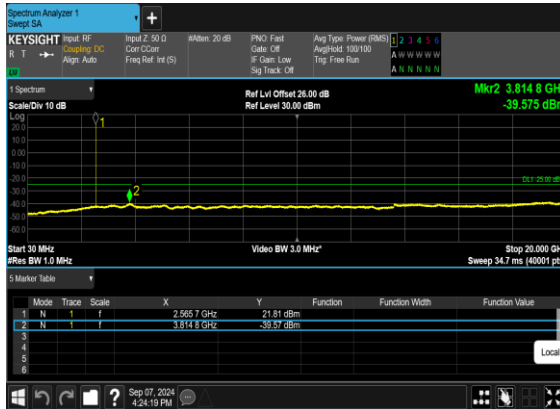


N7(5M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

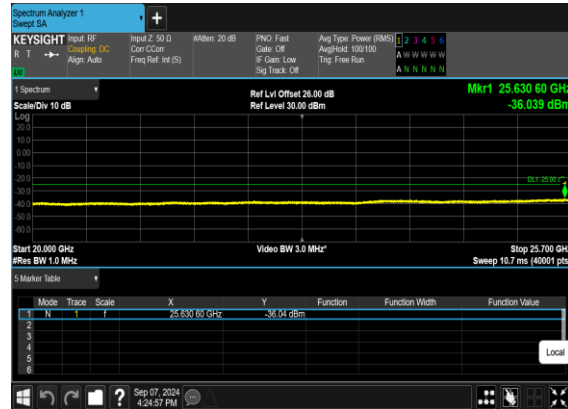





N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

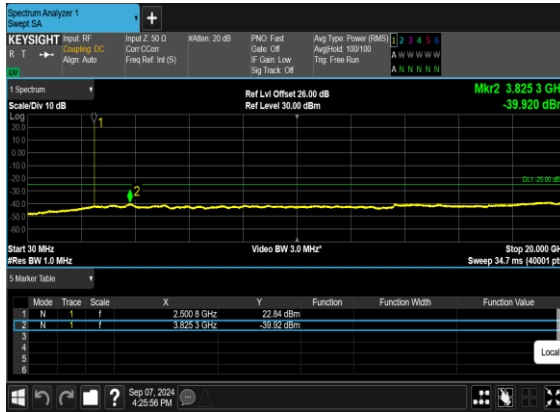


N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

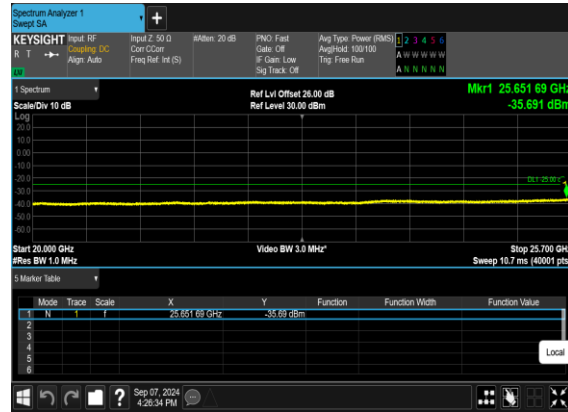

N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

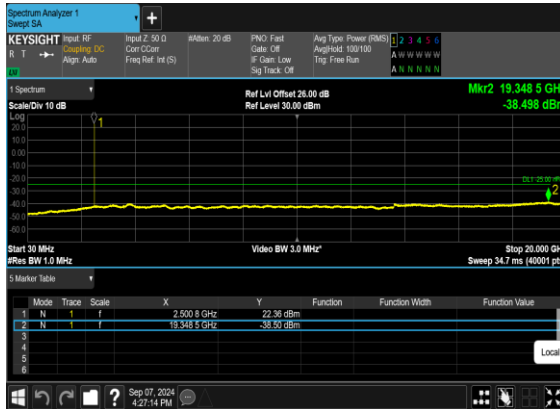


N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

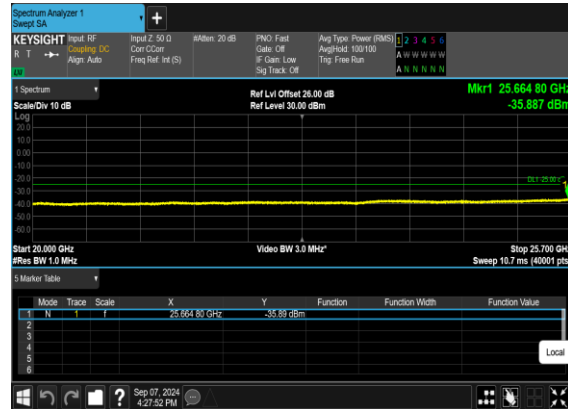





N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

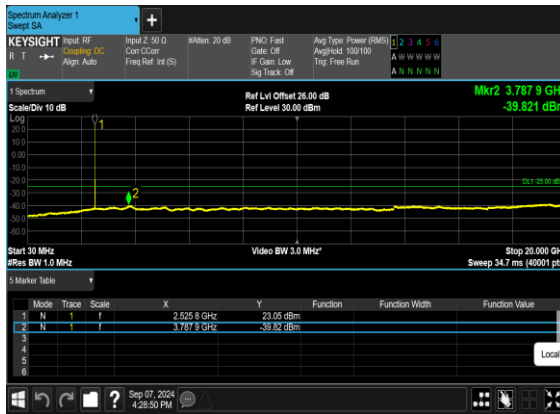


N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

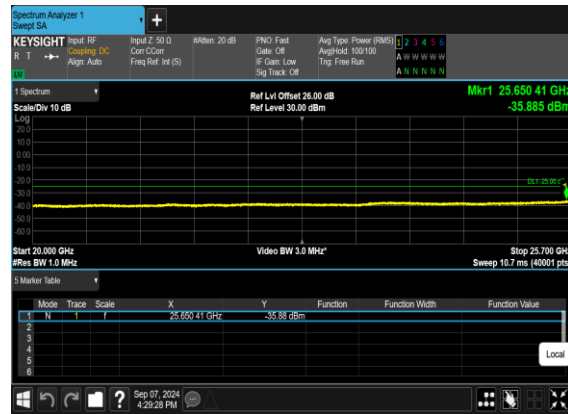

N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

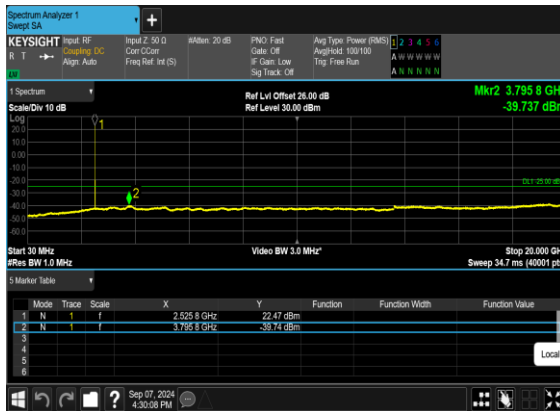


N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

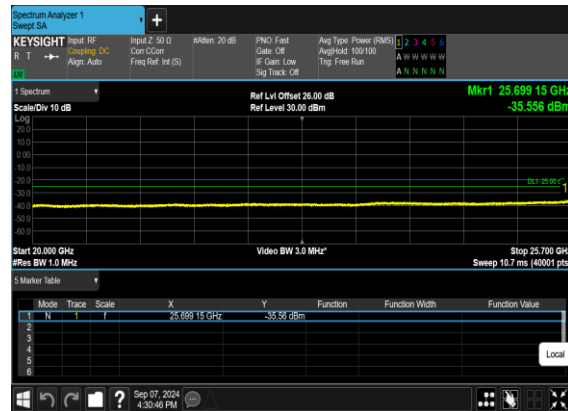





N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

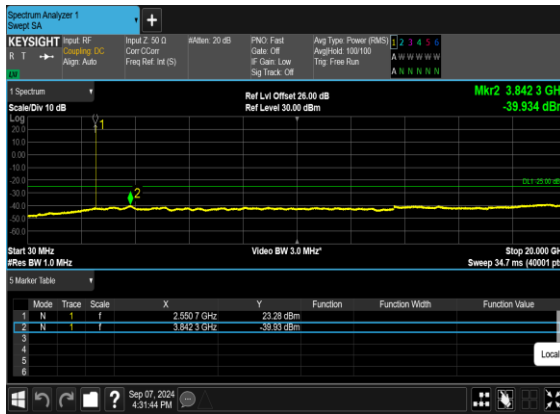


N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

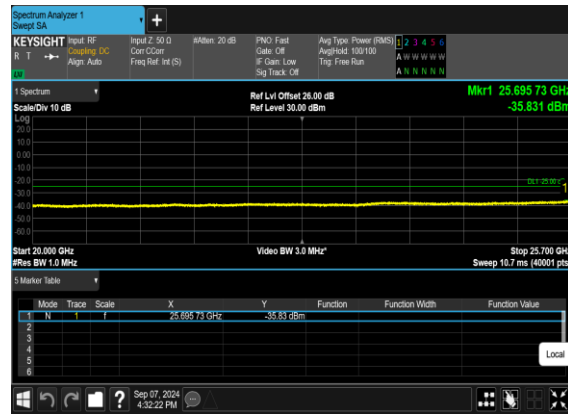

N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

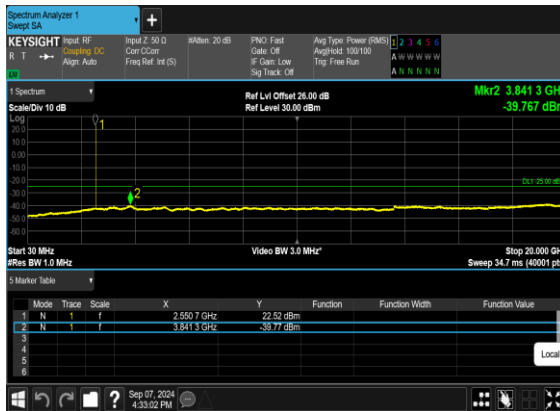


N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

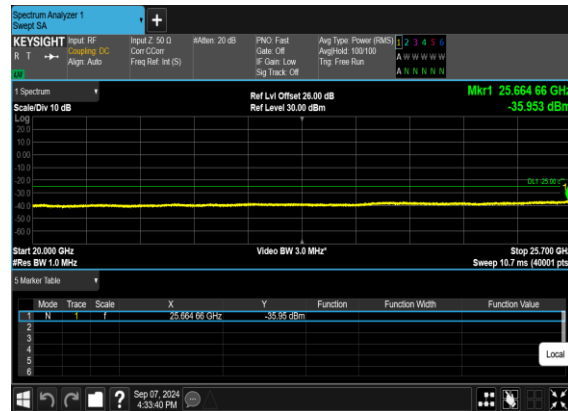





N7(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

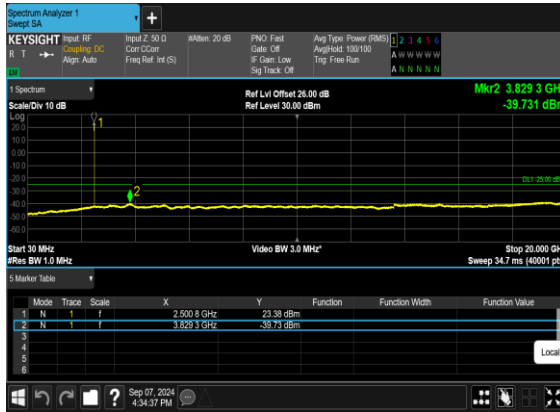


N7(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH

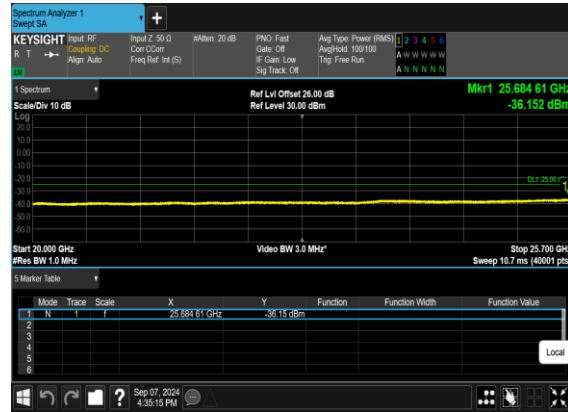

N7(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

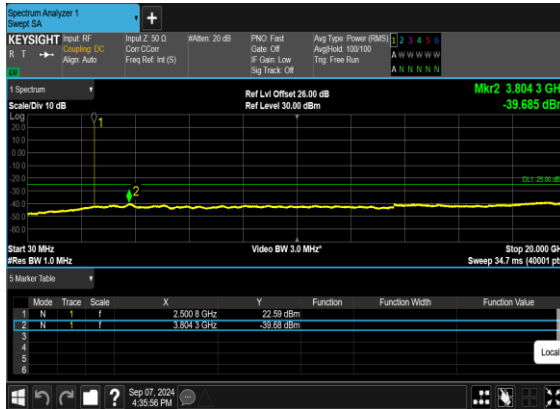


N7(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

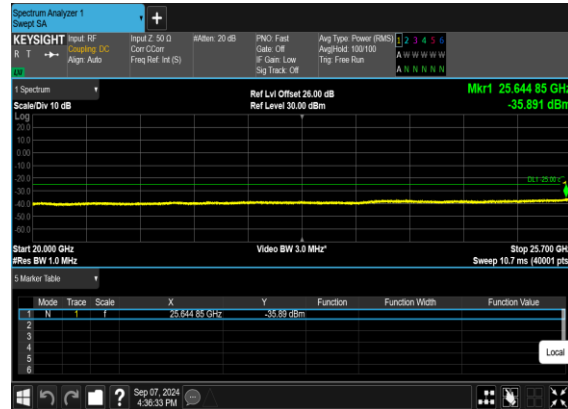





N7(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

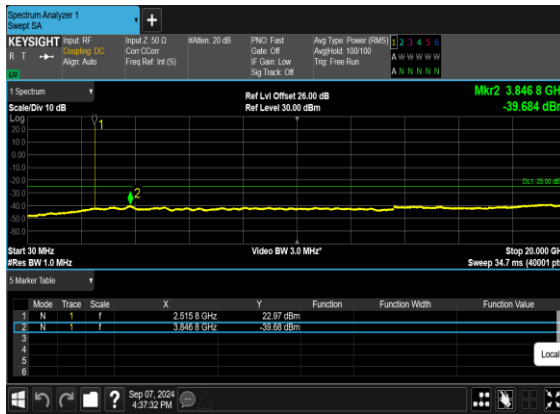


N7(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH

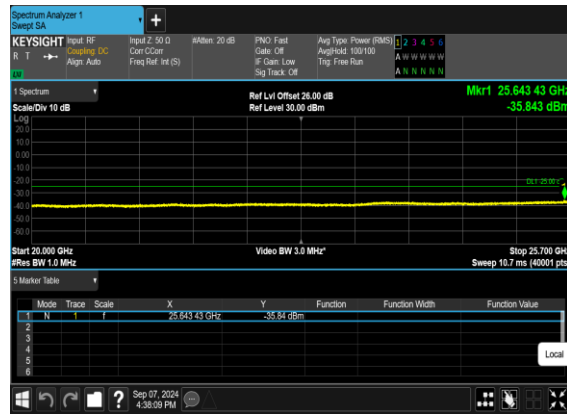

N7(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

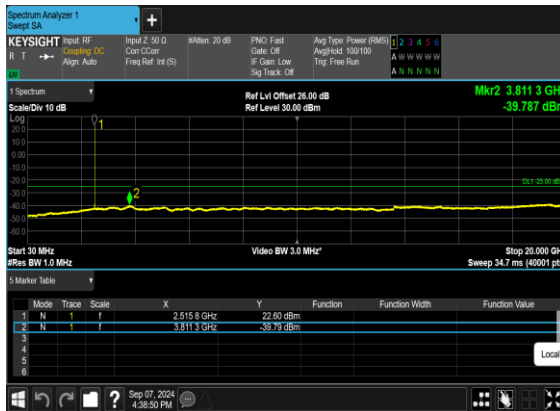


N7(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

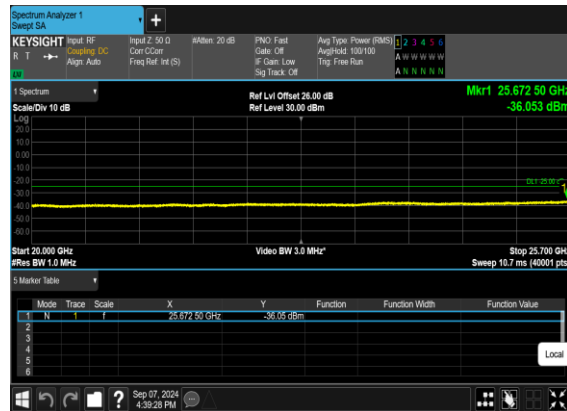





N7(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

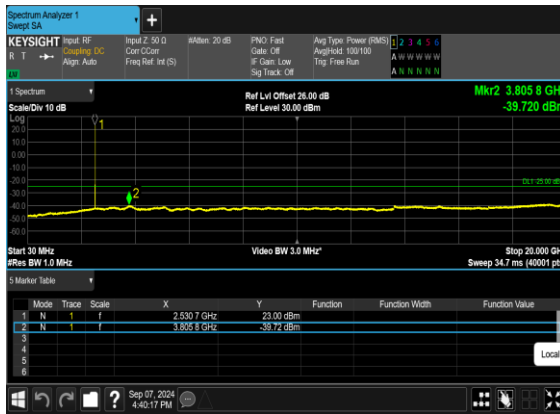


N7(40M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_High_CH

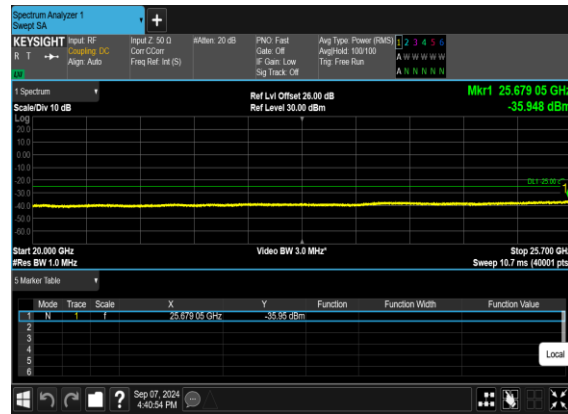

N7(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

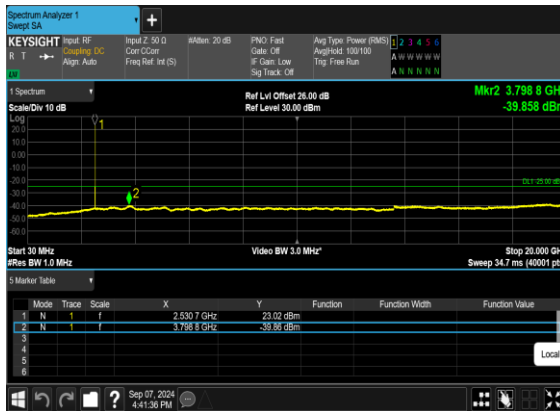

N7(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

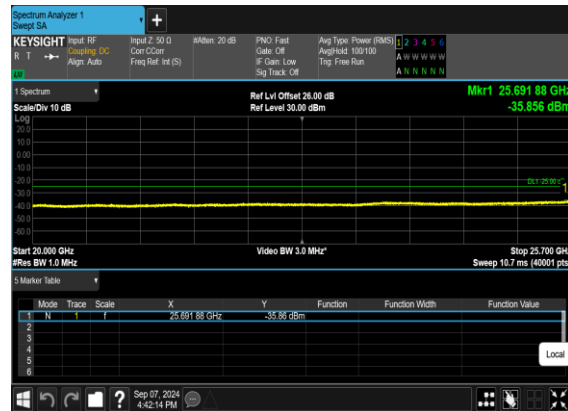


Conducted Band Edge


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
7	15	5	500500	2502.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
7	15	5	513500	2567.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
7	15	20	502000	2510.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	1@105	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	1@105	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM BPSK	100@0	see graph	PASS
7	15	20	512000	2560.0	DFT-s-OFDM QPSK	100@0	see graph	PASS
7	15	40	504000	2520.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
7	15	40	504000	2520.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
7	15	40	504000	2520.0	DFT-s-OFDM BPSK	216@0	see graph	PASS
7	15	40	504000	2520.0	DFT-s-OFDM QPSK	216@0	see graph	PASS
7	15	40	510000	2550.0	DFT-s-OFDM BPSK	1@215	see graph	PASS
7	15	40	510000	2550.0	DFT-s-OFDM QPSK	1@215	see graph	PASS
7	15	40	510000	2550.0	DFT-s-OFDM BPSK	216@0	see graph	PASS
7	15	40	510000	2550.0	DFT-s-OFDM QPSK	216@0	see graph	PASS




N7(5M)_DFT-s-
OFDM BPSK Edge 1RB Left Low CH

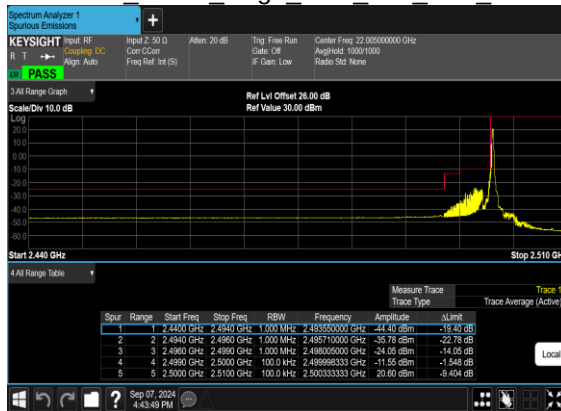


N7(5M)_DFT-s-
OFDM QPSK Edge 1RB Left Low CH

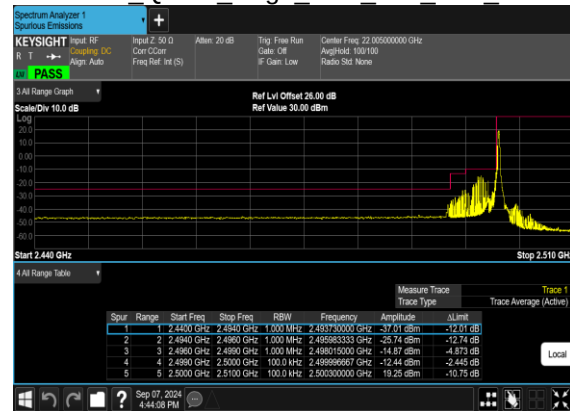

N7(5M)_DFT-s-
OFDM BPSK Outer Full Low CH

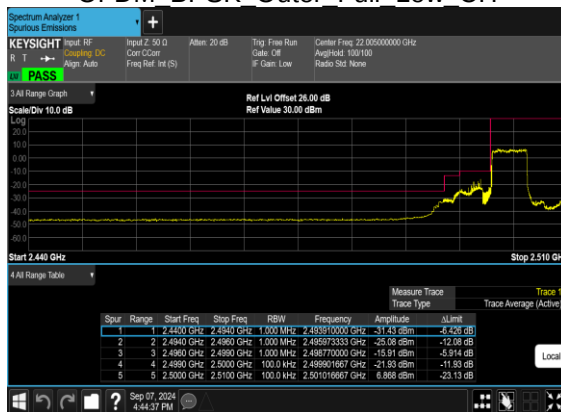


N7(5M)_DFT-s-
OFDM QPSK Outer Full Low CH

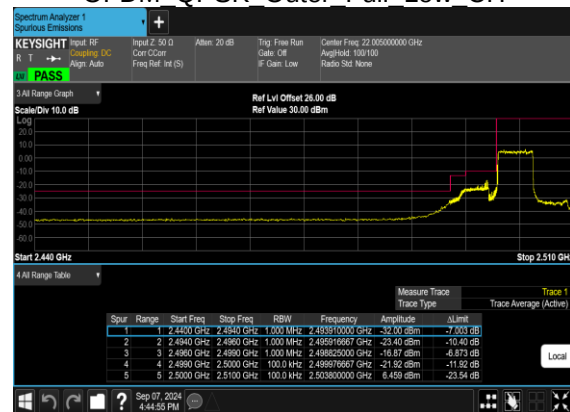





N7(5M)_DFT-s-
OFDM BPSK Edge 1RB Right High CH

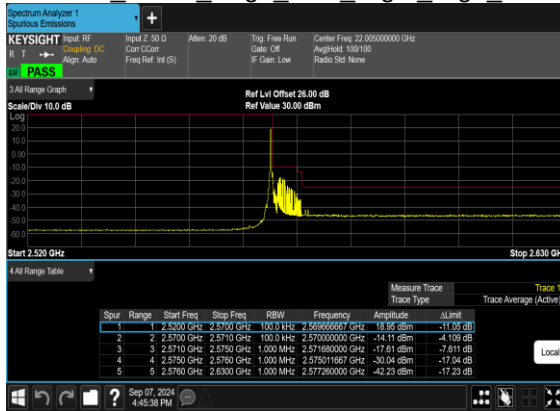


N7(5M)_DFT-s-
OFDM QPSK Edge 1RB Right High CH

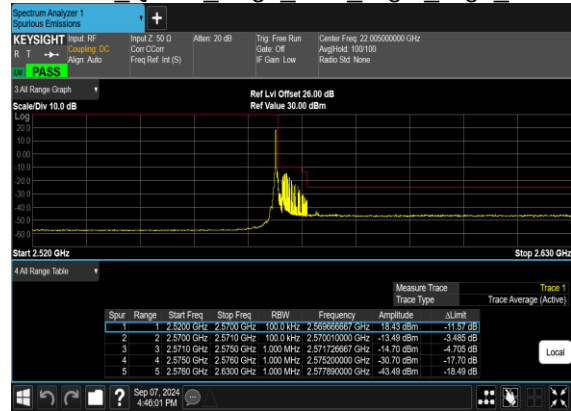

N7(5M)_DFT-s-
OFDM BPSK Outer Full High CH

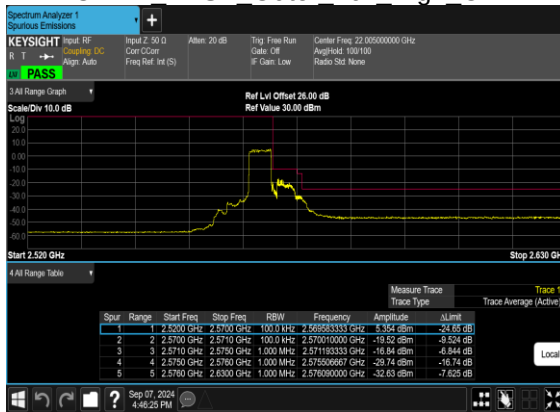

N7(5M)_DFT-s-
OFDM QPSK Outer Full High CH

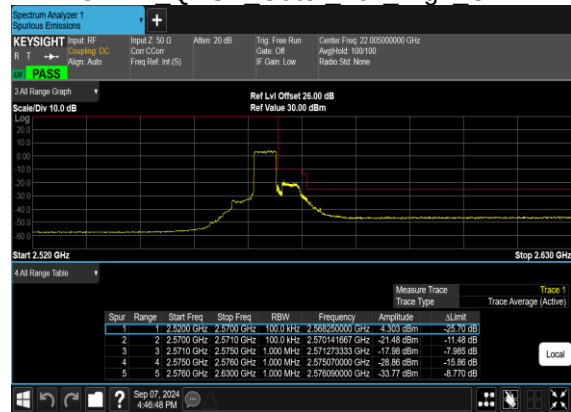





N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N7(20M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH
_CHP_PASS

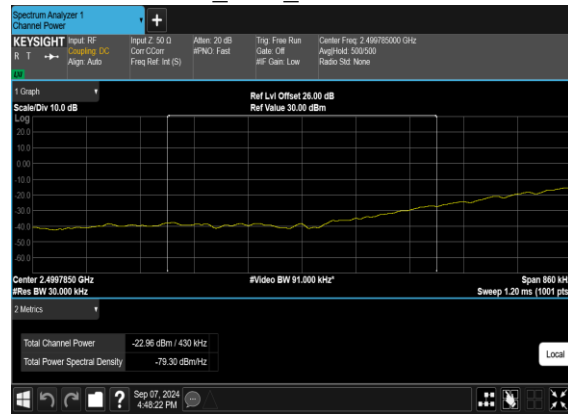

N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

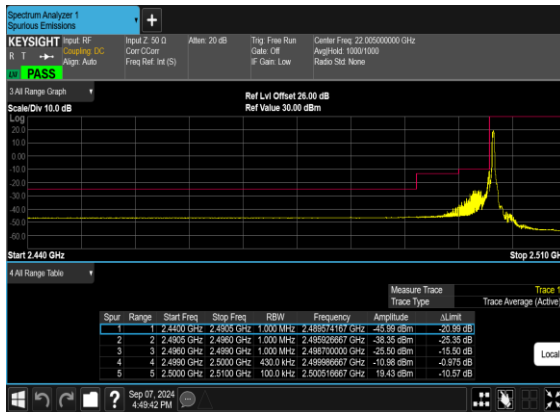


N7(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH
_CHP_PASS

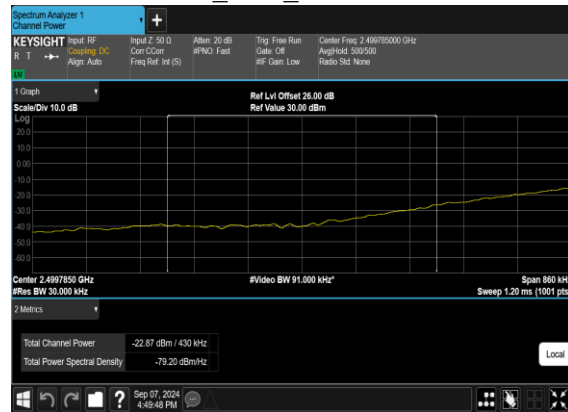




N7(20M)_DFT-s-
OFDM BPSK Outer Full Low CH

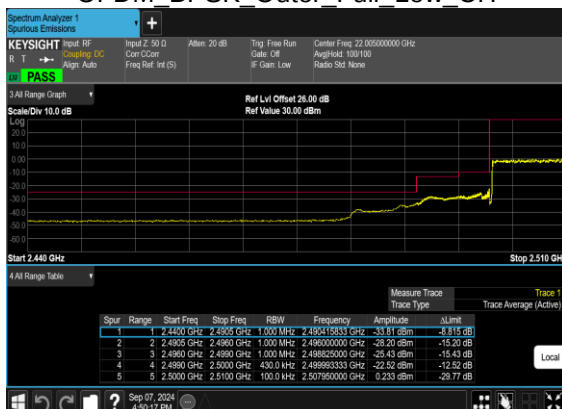

N7(20M)_DFT-s-
OFDM QPSK Outer Full Low CH



N7(20M)_DFT-s-
OFDM BPSK Edge 1RB Right High CH

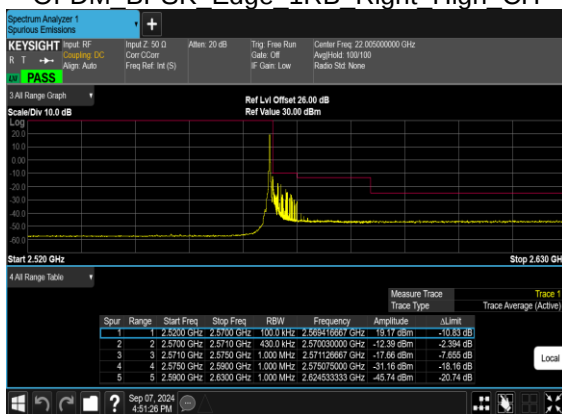

N7(20M)_DFT-s-
OFDM QPSK Edge 1RB Right High CH

