



Compliance Testing, LLC

Previously Flom Test Lab

EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268

fax: (480) 926-3598

<http://www.ComplianceTesting.com>

info@ComplianceTesting.com

Test Report

Prepared for: Voxnetwork USA, LLC

Model: CARD 99C - RX PACK

Description: Body Worn Receiver Pack

Serial Number: N/A

FCC ID: 2AMBK-VOXCARD99C

To

FCC Part 15B

Class B

And

IC ICES-003 Issue 6 (January 2016)

Date of Issue: June 13, 2017

On the behalf of the applicant:

Voxnetwork USA, LLC
15905 Greenway Hayden Loop
Suite 107
Scottsdale, AZ 85260

Attention of:

Marc Colenbrander
Ph: (480)202-0780
E-Mail: marc@voxnetworkusa.com

Prepared By
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project ID: p1760001

Poona Saber
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing.
All results contained herein relate only to the sample tested.

Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	6/6/17	Poona Saber	Original Document
2.0	6/13/17	Amanda Reed	Added FCC ID to cover page

Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions and Engineering Practices	6
Test Results Summary	8
15.109 Radiated Emissions	9
Test Equipment Utilized	12

The applicant has been cautioned as to the following

FCC

15.21 – Information to user

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a) – Special Accessories

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in the part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in §2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.

Industry Canada

Products subject to Industry Canada ICES-003 must be labeled in English and/or French (based on the intended market and any other applicable provincial or federal regulations) as follows:

CAN ICES-3 (B)/NMB-3(B)

ILAC / A2LA

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to the joint ISO-ILAC-IAF Communiqué dated January 2009).

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



FCC Site Reg. #349717

IC Site Reg. #2044A-2

Non-accredited tests contained in this report:

N/A

Test and Measurement Data

Subpart 2.1033(b)

All tests and measurement data shown were performed in accordance with FCC Rule Parts: 15.107, 15.109 (Unintentional Radiators).

All tests and measurement data shown are deemed satisfactory evidence of compliance with Industry Canada Interference-Causing Equipment Standard ICES-003.

Name of Test	FCC Section	ICES-003
A/C Powerline Conducted Emissions	15.107	Section 6
Radiated Emissions	15.109	Section 6

Standard Engineering Practices

Unless otherwise indicated, the procedures contained in ANSI C63.4-2014 were observed during testing.

Prior to testing, the EUT was tuned up in accordance with the manufacturer's alignment procedures. All external gain controls were maintained at the position of maximum and/or optimum gain throughout the testing.

Measurement results, unless otherwise noted, are worst case measurement.

Standard Test Conditions and Engineering Practices

Unless otherwise indicated in the specific measurement results, the ambient temperature was maintained within the range of 10° to 40°C (50° to 104°F) and the relative humidity levels were in the range of 10% to 90%.

Environmental Conditions	
Temperature (°C)	Humidity (%)
27.2	30.6

EUT Description

Model: CARD 99C - RX PACK

Description: Body Worn Receiver Pack

Firmware: N/A

Software: N/A

Serial Number: NA

Highest Clock Frequency: 120.7 MHz

Additional Information:

The EUT is a receiver with 96 channels operating from 640.1 MHz to 663.9 MHz used for Tour Guide Systems. It is powered by 2 AAA batteries.

EUT Operation during Tests

The Unit is configured in typical fashion, as customer would normally use.



Accessories:

Qty	Description	Manufacturer	Model	S/N
1	Earphone 1.2m	Apple Inc.	N/A	N/A

Cables: None

Modifications: None

Test Results Summary

Specification	Test Name	Pass, Fail, N/A	Comments
15.107	A/C Powerline Conducted Emissions	N/A	Unit is battery powered
15.109	Radiated Emissions	Pass	

15.109 Radiated Emissions


Engineer: Poona Saber

Test Date: 6/6/2017

Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antennas in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure the signal levels were maximized. All emissions from 30 MHz to 1 GHz were examined.

Test Setup



Analyzer Settings for 30MHz - 1 GHz

RBW = 120 KHz

VBW = 300 KHz

Detector – Quasi Peak

Analyzer Settings for 1-6 GHz

RBW = 1 MHz

VBW = 3 MHz

Detector – Peak

Sample Calculations

Corrected Value = Measured Value + Correction factor


Correction factor = ACF + Cable loss

Radiated Emissions (30 MHz- 1GHz)

Emission Frequency (MHz)	Measured Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Antenna Polarity (V/H)	Turntable Position (deg)	Detector (QP,PK,Avg)
953.5	33.78	46	-12.22	150	H	80	QP
830.200	32.34	46	-13.66	150	H	0	QP
797.000	31.36	46	-14.64	100	V	0	QP
788.000	32.19	46	-13.81	100	H	0	QP
800.000	32.46	46	-13.54	100	H	20	QP
31.000	27.34	40	-12.66	100	H	0	QP




Radiated Emissions (1-6 GHz)- Peak Below average limit

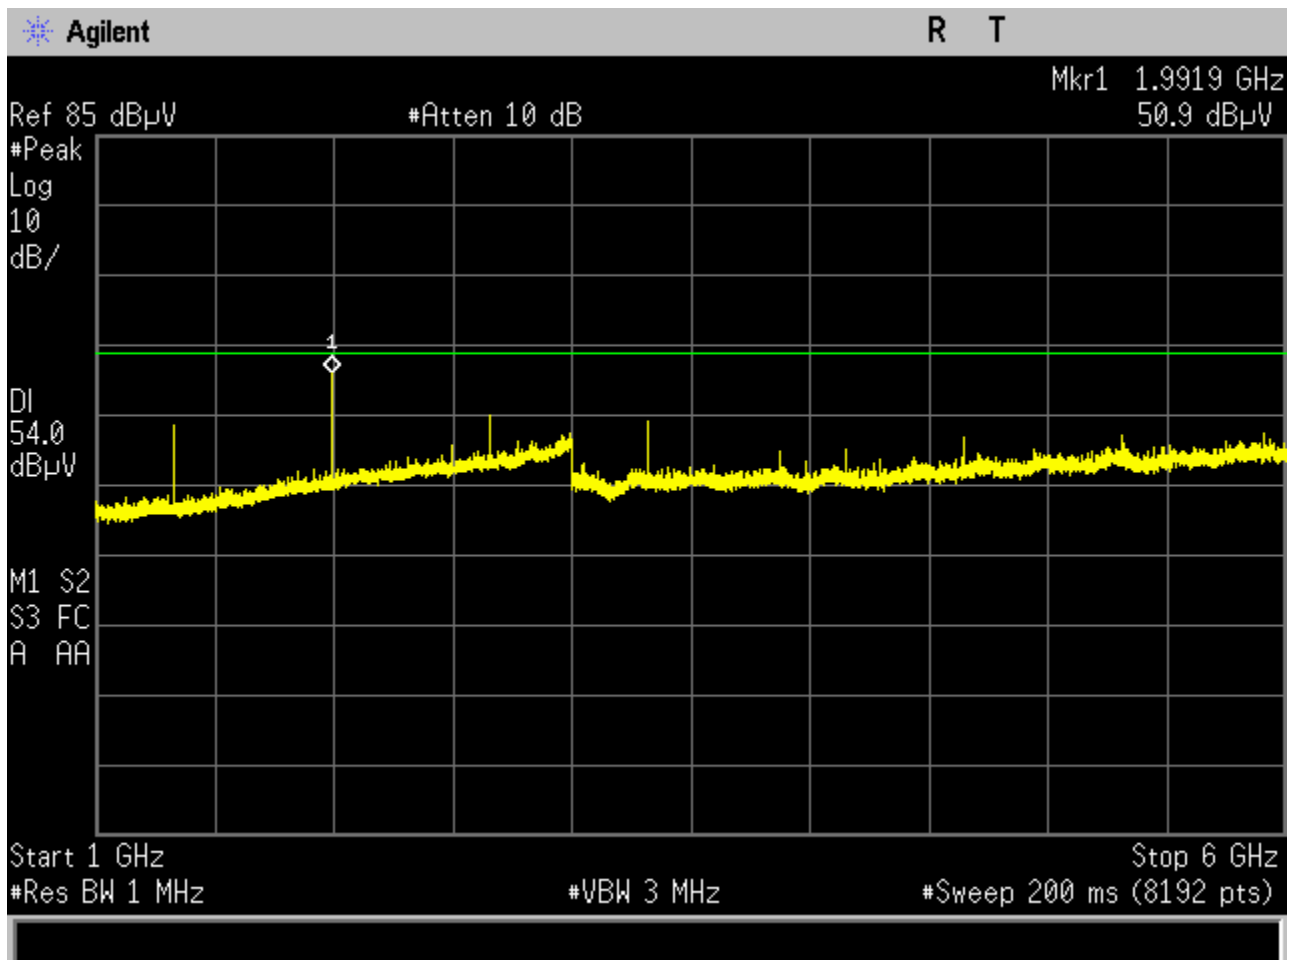




Radiated Emissions Test Setup Photos

Radiated Emissions for 30 MHz-1 GHz

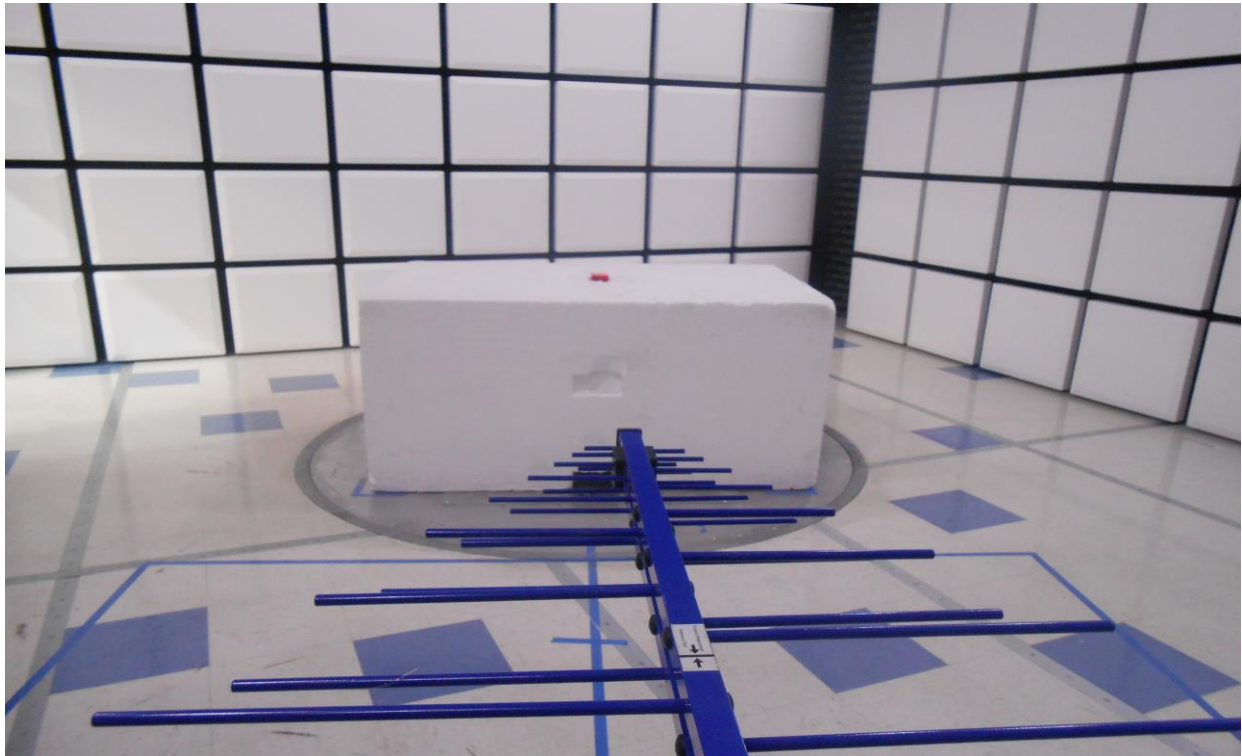

Radiated Emissions for 1-6 GHz

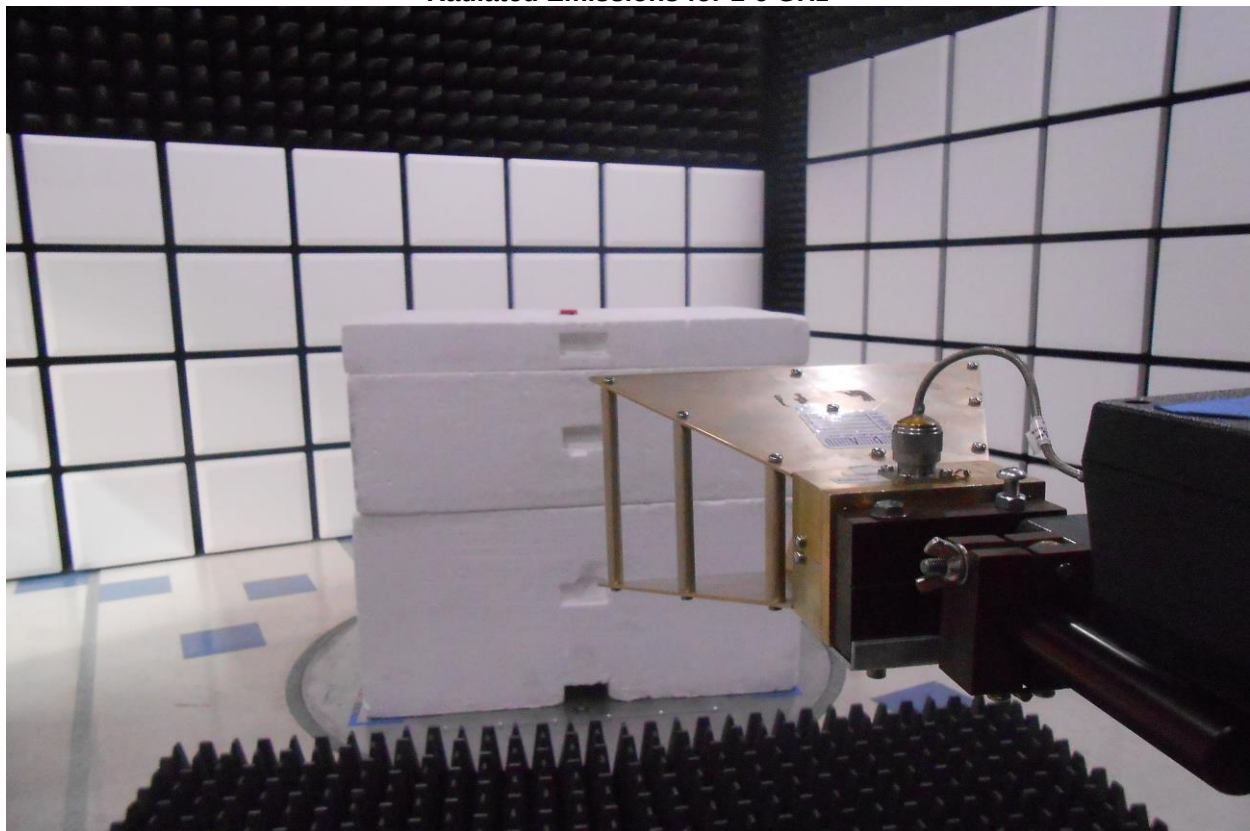

Test Equipment Utilized

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Horn Antenna	ARA	DRG-118/A	i00271	6/16/16	6/16/18
Bi-Log Antenna	Schaffner	CBL 6111D	i00349	8/3/16	8/3/18
EMI Analyzer	Agilent	E7405A	i00379	2/22/17	2/22/18
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	8/15/16	8/15/19
Preamplifier for 1-18GHz horn antenna	Miteq	AFS44 00101 400 23-10P-44	i00509	N/A	N/A

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT